

## Features



Figure 1: 4007ES FACU front view

### Compatible with Autocall ES Net

### Flexible standard combination of addressable initiation and addressable notification

#### 4.3 in. (109 mm) diagonal color touchscreen display:

- Convenient and intuitive user interface provides detailed system status and individual point information
- Supports dual language selection, including unicode character languages
- A custom background display appears when operation is normal

### Includes a 3 A IDNAC signaling line circuit (SLC) output power supply that provides enhanced power delivery to addressable notification appliances:

- A constant 29 VDC source voltage is maintained during alarm, even during battery operation. This allows strobes to operate at higher voltage with lower current and ensuring a consistent current draw and voltage drop margin under both primary power and secondary battery standby.
- Efficiencies include lower strobe currents, wiring distances up to two to three times farther than with conventional notification, support for more appliances per IDNAC SLC, and smaller gauge wiring. This provides installation and maintenance savings, with high assurance that appliances will operate as normal during worst case alarm conditions.
- IDNAC SLCs are compatible with both TrueAlert ES and TrueAlert addressable notification appliances, and remote 4009 IDNAC Repeaters to extend power and wiring distance and provide for up to 127 addressable notification appliances.
- Power supply provides battery backup charging of up to 33 Ah; up to 18 Ah for cabinet mounted batteries and up to 33 Ah batteries for mounting in close-nippled remote battery cabinet.

### Electrically isolated IDNet 2 addressable initiating device SLC:

- Provides built-in short circuit isolation for monitoring and control of TrueAlarm analog sensors and IDNet communications devices; for use with either shielded or unshielded, twisted or untwisted single pair wiring; outputs are Class A or Class B
- Standard panel SLC provides up to 100 addressable points; optional

additional loop expansion modules provide an additional isolated loop with short circuit isolation for the IDNet 2 channel; each loop expansion module also provides an additional 75 addressable points to the IDNet 2 channel capacity for a total of up to 250 addressable points

### Software feature summary:

- Current and previous panel configuration are both maintained in on-board memory to allow easy selection of desired revision
- An internal Ethernet service port is available for service computer connections to perform configuration updates, downloads and uploads; report downloads, and system software updates
- Internal USB interface allows a memory stick/thumb drive to store job revisions, update revised jobs and panel software, and save detailed system reports from the panel

### Optional modules and connections include:

- Fire alarm network interface card (NIC) for ES Net
- Peer-to-Peer network communications, supports either Class B or Class X operation
- Point or Event DACT assembly that is compatible with IP Communicators
- Up to two additional IDNet 2 addressable device output loop connections with 75 additional point capacity each
- Front mounted 48 LED annunciator with custom label inserts.
- Dual Class A IDNAC Isolator (DCAI)
- Remote LED annunciator support through remote unit interface (RUI) communications port for use with unshielded, twisted pair wiring (UTP)
- Eight point zone/relay modules individually selectable as IDC or relay rated 2 A at 30 VDC (resistive)
- Alarm relays and auxiliary relays
- Dual RS-232 ports for printer, PC annunciator or third party interface
- TrueInsight Remote Gateway
- City connections, with or without disconnect switch
- 4003EC Voice Control Panels
- 4009 Series IDNAC Repeaters
- Battery brackets for seismic area protection

### General mechanical:

- Compact red or platinum cabinet for convenient surface or semi-flush mounting; rated NEMA 1 and IP30

### 4007ES Listings reference:

- UL 864 - Control Units, System (UOJZ); Control Unit Accessories, System, Fire Alarm (UOXX); Control Units, Releasing Device Service (SYZV)
- UL 2017 - Emergency Alarm System Control Units (CO detection), (FSZI)
- ULC-S559 - Central Station Fire Alarm System Units (DAYRC)
- ULC-S527 - Control Units, System, Fire Alarm (UOJZC); Control Unit Accessories, System, Fire Alarm (UOXXC); Control Units, Releasing Device Service (SYZVC)

\* This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listings 7120-2269:0546, 7300-2269:0553, 7300-2269:0559, 7272-2269:0537 and 7165-2269:0536 for allowable values and/or conditions concerning material presented in this document. NYC Fire Dept COA #6264. Additional listings may be applicable; contact your local Autocall product supplier for the latest status.

## Introduction

### 4007ES series fire detection and control units

4007ES fire alarm control units (FACUs) provide extensive installation, operator, and service features with point and module capacities suitable for a wide range of system applications. FACUs are configurable for stand-alone or networked fire control operation. The convenient and intuitive color touchscreen provides easy access for typical system response actions and for detailed system review or configuration updates with password control to limit user access.

IDNet 2 addressable initiation communications and IDNAC addressable notification communications are standard features. Refer to data sheet AC4007-0001 for 4007ES FACUs providing conventional notification.

### ES panel compatibility with ES Net

Autocall ES Network (ES Net) is a next generation IP based fire network that uses industry standard network technology and infrastructure and allows for simplified network upgrades, easy terminal connectivity and IP file transfer between nodes; and advanced network diagnostics.

You can upgrade ES fire FACUs to operate on an ES network by adding an ES Net NIC to the panel.

For more detailed information on ES Net, refer to data sheet AC4100-0076, and talk to your local Autocall product supplier.

## Operator interface

### Convenient status information

With the locking door closed, the glass window allows viewing of the display status LEDs. The user interface is a 4.3 in. (109 mm) diagonal color touchscreen LCD with separate status LEDs, see Figure 2.

LED indicators describe the general category of activity being displayed and the LCD provides more detail. Authorized user can unlock the door to gain access to the control functions and scroll through the display for additional detail.


### Touchscreen display with LED status indicators



Figure 2: Touchscreen display with LED status indicators

## Operator screen reference

**Main Menu** screen provides easy navigation to the function required. Buttons A, B, and C have programmable functions.



**System Alarm** screen identifies active alarms with custom labels required. Use the arrows to allow navigation through the list.




**System Trouble** screen identifies active troubles with custom labels displayed, arrows allow navigation through the list.



**Trouble Log** screen allows review of past troubles with time stamp and point details shown.



**Point Information** screen allows review of point details, arrows allow navigation through the information.



**User Access Login** screen controls access to panel operations as determined per panel.



## Operator interface and software features

- Convenient and detailed operator information is easily accessed using a logical, menu-driven touchscreen display with password access control
- Multiple automatic and manual diagnostics for maintenance reduction
- Alarm and Trouble History Logs (up to 1000 entries for each, 2000 total events) are available for viewing from the display or for printing to a connected printer, or downloaded to a service computer
- Module level ground fault searching assists installation and service by locating and isolating modules with grounded wiring
- WALKTEST silent or audible system test performs an automatic self-resetting test cycle and supports up to eight WALKTEST groups
- Install Mode allows grouping of multiple troubles for uninstalled modules and devices into a single trouble condition (typical with future phased expansion); with future equipment and devices grouped into a single trouble, operators can more clearly identify events from the commissioned and occupied areas

## Mechanical description

- Locking door with polycarbonate window
- Latching front panel assembly swings forward for convenient internal access
- Smooth box surfaces are provided for locally cutting conduit entrance holes exactly where required
- Modules are power-limited except as noted, such as relay modules
- Battery compartment (bottom) accepts two batteries, up to 18 Ah, to be mounted within the cabinet without interfering with module space; charger capacity is up to 33 Ah; for batteries greater than 18 Ah, see [Module and accessories selection information](#) for external battery cabinet details
- Cabinet assembly design has been seismic tested and is certified to IBC and CBC standards as well as to ASCE 7 categories A through F, requires battery brackets as detailed on data sheet [AC2081-0019](#)

## IDNet 2 addressable device control

The 4007ES provides an IDNet 2 addressable initiating device signaling line circuit (SLC) that supervises wiring connections and the individual device communications status on the SLC. With two-wire IDNet 2 SLCs, initiation, monitoring, and control devices such as manual fire alarm stations, TrueAlarm sensors, control relays, and sprinkler waterflow switches can communicate their identity and status and receive fire alarm system control. Additional addressable interface modules include circuit isolators, conventional IDC zone adapters, and interface to other system circuits such as fans, dampers, and elevator controls.

## IDNet 2 addressable device operation

Each addressable device on the IDNet 2 communication channel is continuously interrogated for status condition such as: normal, off-normal, alarm, supervisory, or trouble. Both Class B and Class A operation is available. Sophisticated poll and response communication techniques ensure supervision integrity and allow for T-tapping of the circuits for Class B operation. Devices with LEDs pulse the LED to indicate receipt of a communications poll and can be turned on steady from the panel. With addressable devices, the location and status of the connected device is monitored, logged, and displayed on the operator interface LCD with each device having its own 40 character custom label for precise identification.

## TrueAlarm addressable sensor operation

Addressable initiating device communications include operation of TrueAlarm smoke and temperature sensors. Smoke sensors transmit an output value based on their smoke chamber condition and the CPU maintains a current value, peak value, and an average value for each sensor. Status is determined by comparing the current sensor value to its average value. Tracking this average value as a continuously shifting reference point filters out environmental factors that cause shifts in sensitivity.



**Figure 3: TrueAlarm Photo Sensor with base**



**Figure 4: TrueAlarm Photo/Heat Sensor in CO base**

## Programmable sensitivity

Programmable sensitivity of each sensor can be selected at the control panel for different levels of smoke obscuration, shown directly in percent, or for specific heat detection levels. To evaluate whether the sensitivity should be revised, the peak value is stored in memory and can be easily read or downloaded as a report and compared to the alarm threshold directly in percent.

## CO sensor bases

CO sensor bases combine an electrolytic CO sensing module with a TrueAlarm analog sensor to provide a single multiple sensing assembly using one system address. The CO sensor can be enabled/disabled, and can be used in LED/Switch modes and custom control. Refer to data sheet [AC4098-0052](#) for more details.

## TrueAlarm heat sensors

TrueAlarm heat sensors are selectable for fixed temperature detection, with or without rate-of-rise detection. Utility temperature sensing is also available, typically to provide freeze warnings or alert to HVAC system problems. Readings are selectable as either Fahrenheit or Celsius.

## TrueSense early fire detection

Multi-sensor A4098-9754 provides photoelectric and heat sensor data using a single IDNet address. The panel evaluates smoke activity, heat activity, and their combination, to provide TrueSense early detection. For more details on this operation, refer to data sheet [AC4098-0024](#).

## Diagnostics and default device type

### Sensor status

TrueAlarm operation allows the FACU to automatically indicate when a sensor is almost dirty, dirty, and excessively dirty. The NFPA 72 requirement for a test of the sensitivity range of the sensors is fulfilled by the ability of TrueAlarm operation to maintain the sensitivity level of each sensor. CO Sensors track their 10 year active life status providing indicators to assist with service planning. Indicators occur at: 1 year, 6 months, and end of life.

### Modular TrueAlarm sensors

TrueAlarm sensors use the same base and different sensor types (smoke or heat sensor) and can be easily interchanged to meet specific location requirements. This allows intentional sensor substitution during building construction when conditions are temporarily dusty. Instead of covering smoke sensors, causing them to be disabled, you can install heat sensors without reprogramming the FACU. The FACU will indicate an incorrect sensor type, but the heat sensor will operate at a default sensitivity to provide heat detection for building protection at that location.

## IDNet 2 addressable channel capacity

The 4007ES provides an isolated output IDNet 2 SLC that supports up to 250 addressable monitor and control points intermixed on the same pair of wires. 250 total requires two A007-9803 IDNet 2 Loop Expansion Modules.

**Table 1: IDNet 2 SLC wiring specifications**

Specification		Rating
<b>Maximum distance from FACU for each device load</b>	0 to 125	4000 ft (1219 m); 50 ohms
	126 to 250	2500 ft (762 m); 35 ohms
<b>Total wire length allowed with T-taps for Class B wiring</b>		Up to 12,500 ft (3.8 km); 0.60 $\mu$ F
<b>Maximum capacitance between IDNet 2 channels</b>		1 $\mu$ F
<b>Loading for each device</b>		0.8 mA supv., 1 mA alarm; 2 mA per activated device LED
<b>Wire type and connections</b>		Shielded or unshielded, twisted or untwisted wire*
<b>Connections</b>		Terminal blocks for 18 AWG to 12 AWG
Compatibility includes: IDNet communicating devices and TrueAlarm sensors including QuickConnect and QuickConnect2 sensors		
<b>Note: *</b> Some applications may require shielded wiring. Review your system with your local Autocall product supplier.		

## IDNAC SLC control of TrueAlert and TrueAlert ES addressable notification

### Addressable notification appliance communications

Addressable notification appliance communications include operation of TrueAlert and TrueAlert ES Visible only (V/O, strobe), Audible only (A/O, horn), Audible/Visible (A/V, horn/strobe), and strobes of Speaker/Visible (S/V) notification appliances. (S/V appliances require separate speaker wiring.) IDNAC SLC addressable communications allow each horn and strobe to be individually controlled using a single two-wire circuit, confirms the wiring connections to the individual notification appliance's electronic circuit, and confirms communications between each appliance and the fire alarm control unit. Addressable communications increases supervision integrity versus conventional notification systems by providing supervision beyond the circuit wiring to each individual appliance and by constantly verifying the ability of each appliance to communicate with the control panel.

### Individual appliance status and settings

The FACU monitors and records each addressable notification appliance status, type of appliance, and its configured appliance settings. A fault in any individual appliance automatically reports a trouble condition to the control panel.



Figure 5: TrueAlert ES addressable appliance reference

### Virtual NACs provide control convenience

For control convenience, IDNAC notification appliances can be grouped into Virtual NACS (VNACs) for group control.

### Panel control convenience

Applicable operation settings for each appliance can be programmed without having to replace appliances or remove them from the wall or ceiling. An appliance's VNAC notification zone can be easily changed through programming without having to add additional circuits, conduit, and wiring. Audible and visible appliances for non-fire emergency communications notification can be programmed to operate separately on the same pair of wires as the fire alarm notification appliances. The result is lower installation, retrofit, and overall life-cycle cost of ownership compared with traditional conventional notification systems.

### Installation, retrofit, and life-cycle cost benefits

With each addressable appliance capable of being controlled separately on the same two-wire IDNAC SLC, installation time and expense for both retrofit and new construction can be significantly reduced. When Class B wiring is used, wiring can be "T-tapped" allowing more savings in distance, wire, conduit (size and utilization), and overall installation efficiency.

### Location information, diagnostics and troubleshooting

Each addressable notification appliance has its own 40 character custom label to identify the location of the appliance and to aid in troubleshooting fault conditions. In conventional notification systems, conventional appliances are not capable of communicating with the control panel. Fault reporting on a conventional system is limited to the circuit wiring and the entire area (zone) covered by appliances on the notification appliance circuit (NAC) making it much more difficult and costly to locate and correct the source of a problem. Using the TrueAlert magnet test allows each appliance to individually identify its candela setting and address and to briefly operate if desired, and using the TrueAlert ES Appliance Self-Test feature provides detailed performance verification per appliance.

## TrueAlert ES appliance Self-Test operation

### On-board test sensors

TrueAlert ES appliances are equipped with on-board sensors to detect strobe and/or horn output allowing efficient and unobtrusive Self-Testing, see Figure 11. When Automatic Self-Test is initiated from the control panel, each appliance within the selected VNAC group will briefly operate and then report its Self-Test status to the control panel, all within several seconds. Silent Self-Test can be selected to test only visible appliance if desired. The control panel is in a trouble condition during testing and in the event of an alarm, Self-Test is automatically terminated.

### Automatic Self-Test

Results are communicated to the control panel with a time and date stamp and are stored in memory. Results are viewable at the front panel display and printed reports are available from the panel USB port.

### Individual Self-Test

Self-Test is selected from the FACU when individual appliances need to be observed to operate. Each appliance in the selected VNAC group will turn on its LED until individually activated by applying a magnet. After performing the individual test, the appliance LED turns off to indicate completion. Results are recorded the same as during the automatic test, see Figure 12.

## IDNAC SLC hardware reference

The 4007ES provides a 3 A IDNAC SLC for control and power to TrueAlert ES and TrueAlert addressable notification appliances. The power supply incorporates an efficient switching design that provides a regulated output of 29 VDC, even during battery operation. With 29 VDC minimum output at the FACU, addressable notification SLCs can support wiring distances two to three times farther than available with conventional notification, or support more appliances for each SLC, or work with smaller gauge wiring, or combinations of these benefits. The result is installation and maintenance savings with high assurance that appliances that operate during normal system testing will operate during worst case alarm conditions.

## IDNAC SLC appliance wiring reference

### IDNAC SLC capacity

Up to 127 addresses and up to 139 unit loads. Appliances are typically one unit load, devices such as Isolators may require more than one load. Refer to individual device data sheet for specific information, see Table 12.

Table 2: IDNAC SLC appliance wiring reference

Wiring reference	Description
Recommended wire type	UTP, unshielded twisted pair
Maximum wire length allowed with T-tap for Class B wiring, for each SLC	10,000 ft (3048 m)
Maximum wire length for each SLC to any appliance	4000 ft (1219 m)
Appliance supervisory current	1 unit load = 0.8 mA per appliance
Wiring connections	Terminals for 18 AWG to 12 AWG

4007ES mounting and module location reference

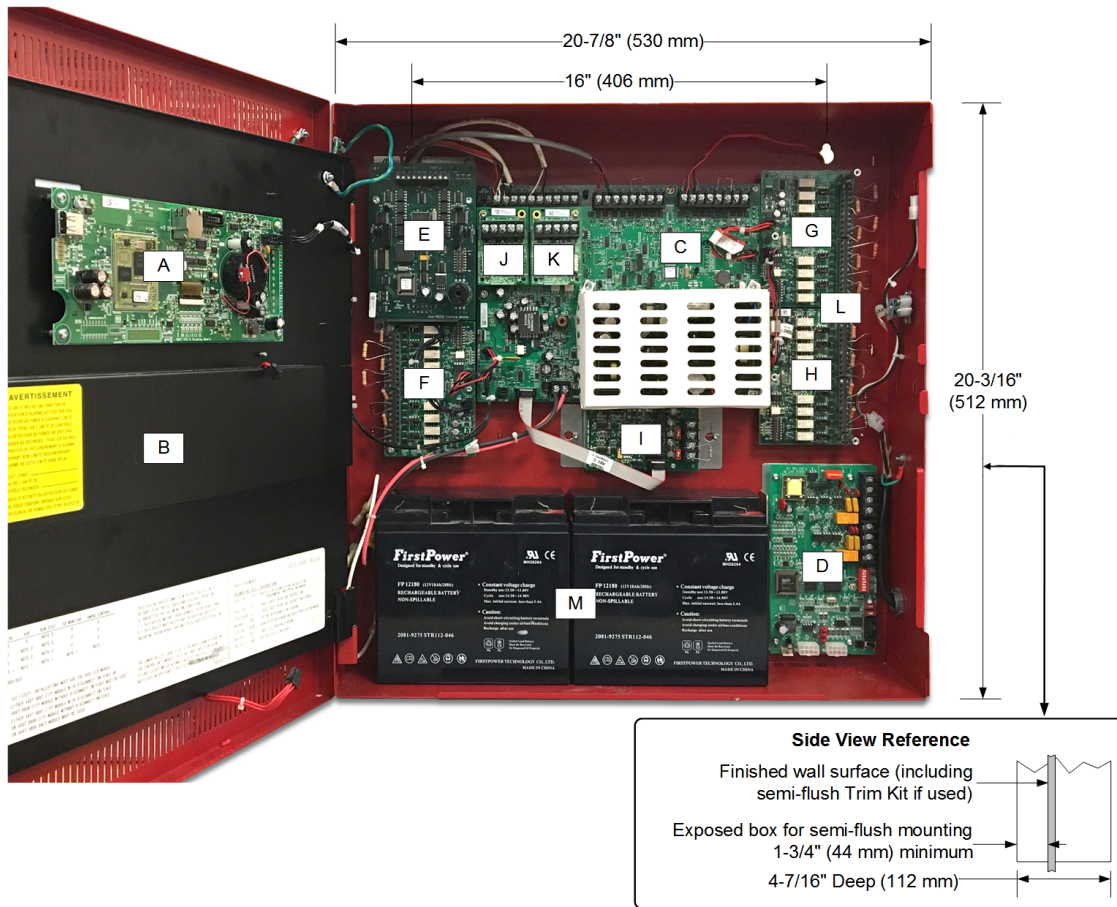


Figure 6: 4007ES mounting and module location reference

Table 3: Module locations

Key	Description
A	CPU and User Interface assembly.
B	Location for optional A007-9805 LED Module.
C	Power Supply Assembly.
D	A007-9806 SDACT location.  <b>Note:</b> The SDACT includes a 650-1838 flat mounting bracket (available separately). Some pre-existing systems with an angled SDACT bracket will need to be replaced with the flat mounting bracket when a Network Interface Card is installed.
E	Location for A007-9801 Zone/Relay Module, A007-9812 Dual RS-232 Interface, or (as shown) A007-9802 25 V Regulator Module
F	Primary location for A007-9801 Zone/Relay Module
G	Location for additional A007-9801 Zone/Relay Module.
H	Identical to Block G above.
I	A007-9807 or A007-9808 City Circuit Module, or A007-9809 Relay Module.
J	A007-9803 IDNet 2 Loop Expansion Modules, maximum of two (two are shown).
K	Identical to block J above.
L	Block L is an additional block that sits on spacers above Block G and H. You can mount the A007-9817 NIC in block L with or without modules mounted below it in blocks G and H. When you use fiber media cards and an SDACT is present, the SDACT requires a 650-1838 flat mounting bracket, ordered separately.
M	Battery location for up to 18 Ah batteries.  <b>Note:</b> No conduit entry or wiring in this area, 14 7/8 in. (378 mm) wide.

**Note:** A system ground must be provided for Earth Detection and transient protection devices. This connection shall be made to an approved, dedicated Earth connection per NFPA 70, Article 250, and NFPA 780.

## Power supply output and zone/relay module details

### Power supply output details:

- **2 A auxiliary output (AUX/SNAC)** can be selected either as resettable auxiliary power of 2 A at 24 VDC, or selected to be a simple NAC (SNAC) for sounder base power, four-wire detector power, or door holder power
- **4 A output rating** includes current for: IDNAC controlled notification appliances; IDNet devices; module currents; and auxiliary output current (battery charging, CPU, and power supply current are not subtracted from the 4 A)
- **Low battery voltage cutout** is selectable when required (required for ULC listing applications)
- **Battery and charger monitoring** includes battery charger status and low or depleted battery conditions; status information provided to the master controller includes analog values for: battery voltage, charger voltage and current, actual system voltage and current, and IDNAC SLC current
- **Battery charger** is dual rate, temperature compensated, and charges up to 18 Ah sealed lead-acid batteries in the battery compartment, and charges up to 33 Ah batteries in an external cabinet
- **IDNet 2 SLC output** provides electrically isolated Class B or Class A communication; standard capacity is up to 100 addressable points with expansion for up to 250 points using up to two A007-9803 IDNet 2 Loop Expansion Modules; see Table 1
- **Compatible RUI remote equipment** includes: A4606-9202 and A4606-9205 Color Touchscreen Annunciators (up to 6 total), 4100 Series 24 I/O and LED/Switch modules, A602 Series LED/Switch and I/O Annunciator modules, including A602-9101 Status Command Units (SCU), and A602-9102 Remote Command Units (RCU)
- **RUI communications** controls up to 10 remote devices at up to 2500 ft (762 m) for single run, or 10,000 ft (3048 m) total if wiring is Class B and T-tapped; output is selectable as Class B or Class A

## Product selection

Table 4: Product Selection

Model	Color	Description	Supv.	Alarm
A007-9201	Red	4007ES with a 3 A, Class B, IDNAC SLC for up to 127 addressable notification appliances, and 4 A output power supply/battery charger; includes IDNet 2 communications for 100 addressable points	180 mA	185 mA
A007-9202	Platinum	<p><b>Note:</b> Add optional module and other currents separately for battery calculations; base panel current does not subtract from the 4 A power available for optional modules and external loads</p>		

## Module and accessories selection information

Table 5: Factory programming options

Model	Description
A007-8810	Factory Programming (select)

Table 6: Field installed optional modules

SKU	Description	Supv.	Alarm	
A007-9801	Eight Point Zone/Relay Module; each point is selectable as an IDC input or Relay output, Class A IDCs require two points (one out and one return); select up to four maximum. Alarm current shown is for eight Class B IDCs using 3.3K end-of-line (EOL) resistors with four IDCs in alarm and four IDCs in standby. Supervisory current shown is for all eight IDCs in standby. Detector current is added separately. Refer to 4007ES Hybrid data sheet <i>AC4007-0001</i> and <i>579-1103AC Zone/Relay Module Installation Instructions</i> for additional information.	83 mA max	295 mA max	
A007-9802	25 VDC Regulator Module; 2 A maximum output; use to power Zone/Relay modules connected to initiating devices requiring nominal 25 VDC voltage; refer to technical publication <i>579-832AC 2-Wire Detector Compatibility Chart</i> for application details	with 1 module	190 mA	445 mA
		with 2 modules	290 mA	801 mA
		with 3 modules	390 mA	1156 mA
A007-9803	IDNet 2 Loop Expansion Module; provides an additional isolated loop with short circuit isolation to the existing IDNet 2 channel, also provides an additional 75 addressable points to the IDNet 2 channel capacity, maximum of two	NA	NA	
A007-9804	Dual Class A IDNAC Isolator (DCAI); converts a single Class B IDNAC SLC input to two Class A or two Class B SLC outputs; provides short circuit isolation between each Class A or B output circuit; requires one IDNAC address; the total current remains controlled by the Class B input source SLC at 3 A maximum; maximum 30 appliances per isolated loop  <b>Note:</b> Up to 30 additional device addresses may be installed between each A4905-9929 TrueAlert Addressable Isolator+ Module, not to exceed the maximum address and unit loading specifications for the IDNAC channel.	12.7 mA	25 mA	

**Table 6: Field installed optional modules**

SKU	Description	Supv.	Alarm
A007-9805	Panel Mounted 48 LED Status Annunciator Module; provides 24 Yellow LEDs, 20 Red LEDs, and four Red/Green LEDs that are programmable for up to 24 IDC zones of alarm and trouble annunciation, or as required for custom annunciation requirements	no LEDs on	10 mA
		with LEDs on	1.75 mA per LED, 105 mA max
A007-9806	SDACT Module for Point or Event Reporting; order connection cables as required; see Table 10	30 mA	40 mA
A007-9807	City Circuit Module with Disconnect Switch	20 mA	36 mA
A007-9808	City Circuit Module without Disconnect Switch	20 mA	36 mA
A007-9809	Relay Module; relays for Alarm, Supervisory, and Trouble; rated 2 A resistive @ 32 VDC	15 mA	37 mA
A007-9812	Dual RS-232 Interface Module, compatible with Autocall remote printer, PC annunciator or third party interface (two ports/connections maximum).	60 mA	60 mA

**Table 7: Field installed optional network modules**

SKU	Card type	Description	Size	Alarm/Supv.
A007-9817	Flat	Connects a 4007ES FACU to an ES network. Supports Class B or Class X operation. Includes four built in Ethernet ports, supports up to two additional media cards. Ports A and C can be configured for earth fault detection.	2 vertical blocks (only in Block L)	120 mA
A007-6308	ES Net NIC Dual Channel Single-mode Fiber Media Card	Select per network connection requirements; mounts on the supplied ES Net NICs; two media cards per slot type and flat type NIC.	N/A	135 mA
A007-6309	ES Net NIC Dual Channel Multi-mode Fiber Media Card	Dual Channel Media Cards provide two ports for input and output connections.	N/A	135 mA
A007-6307	ES Net NIC Dual Channel DSL Media Card	Field connections require proper port pairing, refer to <i>579-1258AC ES Net Dual Channel Fiber, Ethernet, and DSL Media Card Installation Instructions</i> for additional information.	N/A	155 mA

### Network interface and network media card product selection

4007ES FACUs are compatible with Autocall ES Net network.

- Refer to data sheet *AC4100-0076* for additional information on compatible ES Net fire alarm products.
- Refer to data sheet *AC4100-0061* for additional information on the Building Network Interface Card.

**Table 8: Batteries**

Model	Capacity	Battery Mounting Details
2081-9272	6.2 Ah	12 V Batteries for cabinet mounting; select one battery model per system standby requirements; order quantity of two; to be wired in series for 24 VDC
2081-9274	10 Ah	
2081-9275	18 Ah	
2081-9276	33 Ah	Requires A009-9801 external battery cabinet, see Table 9

**Table 9: Battery cabinets**

Model	Color	Capacity	Dimensions (H x W x D)	Description
A009-9801	Beige	For up to 33 Ah batteries, see note	13 1/2 in. x 16 1/4 in. x 5 3/4 in. (343 mm x 413 mm x 146 mm)	External battery cabinet without charger, for mounting close-nipped to the FACU cabinet; includes locking solid door. Use battery harness 734-304 for a NAC power supply and harness 734-303 for an IDNAC power supply; battery harnesses are shipped with the panel.

**Note:** 33 Ah capacity requires 2081-9276 **square** 33 Ah batteries.

**Table 10: Accessories**

Model	Description
D080-9047	DACT cable, 14 ft (4.3 m) long, RJ45 plug one end, spade lugs on the other; order one per phone line connection required
A2975-9812	Red semi-flush box trim; 1 7/16 in. (37 mm) wide, four corners and trim pieces for top, bottom, and sides
A2975-9813	Platinum semi-flush box trim; 1 7/16 in. (37 mm) wide, four corners and trim pieces for top, bottom, and sides
A4081-9018	10 kohms, 1 W EOL resistor harness for non-addressable NACs (if A007-9801 is used)

**General specifications**
**Table 11: General specifications**

Specification		Rating	
<b>Input power</b>	120 VAC input	2 A maximum @ 102 VAC to 132 VAC, 50/60 Hz	
	240 VAC input	1 A maximum @ 204 VAC to 264 VAC, 50/60 Hz	
	Battery	6 A maximum @ 24 VDC (during battery operation)	
<b>4007ES power supply output ratings</b>	Power supply output rating	4 A output for "Special Application" appliances  <b>Note:</b> The 4 A output rating was determined such that optional module currents, and external device and appliance currents can be directly added together, not to exceed 4 A total.	Output switches to battery backup during mains AC failure or brownout conditions
	IDNAC SLC ratings	3 A, regulated 29 VDC during Alarm, 127 addresses, 139 unit loads; DC-DC converter circuit is >92% efficient over operating range	
	IDNAC SLC wiring	Output terminals are rated for 18 AWG to 12 AWG with duplicate output terminals rated for two wires each, allowing up to four Class B branch circuit T-taps to be made in the cabinet; additional T-taps may be made in external wiring junction cabinets or boxes	
	Auxiliary power tap	2 A maximum, 24 VDC nominal (19.5 VDC to 31.1 VDC)	
<b>Compatible special application appliances</b>		Autocall TrueAlert ES and TrueAlert addressable notification appliances; contact your Autocall product representative for compatible appliances	
<b>Battery charger ratings (sealed lead-acid batteries)</b>	Battery capacity range	UL and ULC listed for battery charging of 6.2 Ah up to 33 Ah (batteries larger than 18 Ah require a remote battery cabinet)	
	Charger characteristics and performance	Temperature compensated, dual rate, recharges depleted batteries within 48 hours per UL Standard 864; to 70% capacity in 12 hours per ULC Standard S527	
<b>Custom background display details</b>		Supported file types: JPG, BMP, GIF, and PNG Recommended image type is JPG, recommended image size is 480 x 240, and the file size limit is 100kb	
<b>Environmental</b>	Operating temperature	32°F to 120°F (0°C to 49°C)	
	Operating humidity	Up to 93% RH, non-condensing @ 90°F (32°C) maximum	

**Additional 4007ES and network product reference data sheets**
**Table 12: Additional 4007ES and network product reference data sheets**

Title	Document number
Serial DACT (SDACT) for 4100ES, 4010ES, 4007ES	AC2080-0009
Seismic Battery Brackets Reference	AC2081-0019
4007ES Panels with Conventional Notification	AC4007-0001
4007ES Extinguishing Release Applications	AC4007-0003
4009 IDNet NAC Extender	AC4009-0002
4009 IDNAC Repeater	AC4009-0004
External 110 Ah Battery Charger for 4100ES, 4010ES	AC4081-0002
Graphic I/O Modules for 4100ES, 4010ES, 4007ES	AC4100-0005
Interface to VESDA Air Aspiration Detection Systems	AC4100-0026
InfoAlarm Command Center with SPS Power Supplies	AC4100-0045
BACpac Ethernet Module	AC4100-0051
Building Network Interface Card (BNIC)	AC4100-0061
ES Net Network Products and Specifications	AC4100-0076
NDU with SPS Power Supplies for ES Net	AC4100-0077
InfoAlarm Command Center with EPS Power Supplies	AC4100-0101
NDU with EPS Power Supplies for ES Net	AC4100-0104
PC Annunciator	AC4190-0013
TrueSite Workstation	AC4190-0016
TrueSite Incident Commander	AC4190-0020
SCU/RCU Annunciators	AC4602-0001
A4606 Series Color Touchscreen LCD Annunciators	AC4606-0003



4007ES additional reference

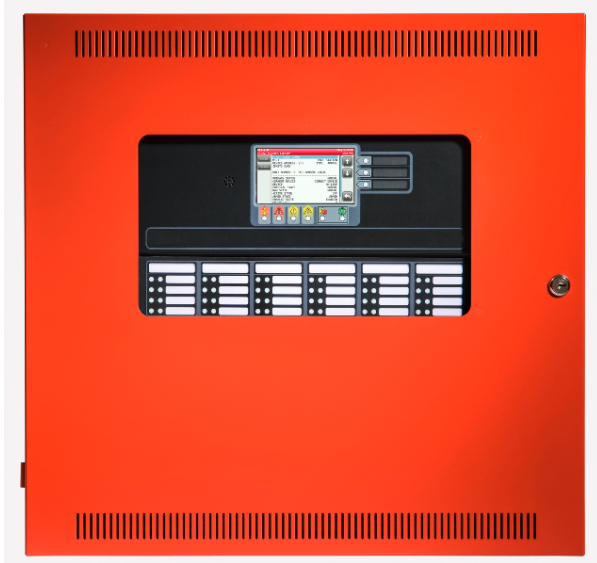


Figure 7: 4007ES with IDNAC Notification and optional 48 LED Annunciator Module (A007-9805)



Figure 8: A4606-9205 (Platinum) Color LCD Touchscreen Remote Annunciator



Figure 9: A4606-9202 (Red) Color LCD Touchscreen Remote Annunciator

TrueAlert ES appliance self-test last test results report example

Point ID	Custom Label	Date	Visual	Audible
T1-1-1	VO FIRST FLOOR (up to 40 characters)	01-JUN-15	NO OUT	N/A
T1-2-5	AV FIRST FLOOR EAST WING	01-JUN-15	NO OUT	NORMAL
T7-3-55	AO SECOND FLOOR EAST WING	01-JUN-15	N/A	NO OUT
T8-2-45	AV SECOND FLOOR ROOM 29	01-JUN-15	NOT TST	N/A
T8-2-60	AV SECOND FLOOR ROOM 22	01-JUN-15	NORMAL	NORMAL
T1-2-4	AO FIRST FLOOR ROOM 17	01-JUN-15	N/A	UNSUPP

TRUEALERT\_ES SELF-TEST REPORT COMPLETED

Press RETURN for next Screen OR CTRL-X to abort

Figure 10: Last test results reports example

Results description:

NORMAL = works correctly

NO OUT = no output: no light or sound was detected

NOT TST = no result: either the appliance did not return a result before the test ended or the test was conducted as silent (strokes only) and audible appliance was not activated

N/A = not applicable: no strobe on audible only, for example

UNSUPP = appliance not compatible with Self-Test (TrueAlert addressable appliance not TrueAlert ES addressable appliance)

**Note:** Additional TrueAlert ES Self-Test information is detailed in *Operating Instructions 579-1165AC* shipped with the FACU.

**TrueAlert ES Appliance Self-Test all test results report example**

Point ID	Custom Label	Date	Visual	Audible
T1-1-1	VO FIRST FLOOR	01-JUN-15	NO OUT	N/A
T1-2-5	AV FIRST FLOOR EAST WING	01-JUN-15	NO OUT	NORMAL
T1-2-6	AV FIRST FLOOR NORTH ENTRANCE	12-MAY-15	NO OUT	NORMAL
T7-3-55	AO SECOND FLOOR EAST WING	01-JUN-15	N/A	NO OUT
T8-2-45	AV SECOND FLOOR ROOM 29	01-JUN-15	NOT TST	N/A
T1-1-11	AV FIRST FLOOR SOUTH ENTRANCE	12-MAY-15	NORMAL	NORMAL
T8-2-60	AV SECOND FLOOR ROOM 22	01-JUN-15	NORMAL	NORMAL
T1-2-4	AO FIRST FLOOR ROOM 17	01-JUN-15	N/A	UNSUPP
T1-2-7	AO FIRST FLOOR ROOM 12	12-MAY-15	N/A	UNSUPP
T8-3-43	AV SECOND FLOOR ROOM 25	12-MAY-15	UNSUPP	UNSUPP

TRUEALERT\_ES SELF-TEST REPORT COMPLETED  
Press RETURN for next Screen OR CTRL-X to abort

Figure 11: All test results report example

**TrueAlert ES Appliance Self-Test individual appliance report example**

CUSTOM LABEL	
4-1-2	AV
POINT ADDRESS: 4-1-2	Type: AV
CARD: 4 CHANNEL: 1 DEVICE: 2	
EXTENDED POWER SUPPLY	
UNIT NUMBER: 2	RUI NUMBER: LOCAL
PRIMARY STATUS	NORMAL
AUDIBLE GROUP CONFIG:	0 0 0
VISUAL GROUP CONFIG:	0 0 0
STYLE:	INDOOR
OPERATION:	GENERAL EVAC
CANDELA RATING	15 CD
COLOR LENS	YES
TONE TYPE	BROADBAND
CODING TYPE	TEMPORAL
VOLUME	HIGH
LAST TEST TIME:	MON 01-JUN-15 01:00 AM
LAST VISUAL TEST:	NORMAL
LAST AUDIBLE TEST:	NORMAL
LAST TEST VOLUME:	NORMAL
DEVICE TEST TROUBLE:	NORMAL

Figure 12: Individual appliance report example