



by Schneider Electric

MGE™ Galaxy™ 3500

380/400/415

3:3 10-40 kVA

3:1 15-40 kVA

Technical Data Manual



Table of Contents

| | |
|--|----|
| Model List | 1 |
| Features | 2 |
| Availability | 2 |
| Serviceability | 2 |
| Manageability | 2 |
| Total Cost of Ownership | 2 |
| Settings | 3 |
| Default Settings | 3 |
| AC Input | 4 |
| Specifications | 4 |
| 3:3 380 V, 400 V, 415 V | 4 |
| 3:1 380 V, 400 V, 415 V | 4 |
| Input Power Factor | 5 |
| AC Output | 6 |
| Specifications | 6 |
| 3:3 380 V, 400 V, 415 V | 6 |
| 3:1 380 V, 400 V, 415 V | 6 |
| Efficiency | 8 |
| 3:3 400 V | 8 |
| 3:1 400 V | 8 |
| Efficiency Curves | 8 |
| 10 kVA 400 V | 8 |
| 15 kVA 400 V | 9 |
| 20 kVA 400 V | 9 |
| 30 kVA 400 V | 9 |
| 40 kVA 400 V | 10 |
| Derating due to Load Power Factor | 11 |
| Environmental | 12 |
| Heat Dissipation | 12 |
| 3:3 380 V, 400 V, 415 V | 12 |
| 3:1 380 V, 400 V, 415 V | 12 |
| Batteries | 13 |
| Specifications | 13 |

| | |
|---|----|
| Efficiency DC to AC | 13 |
| 3:3 380 V, 400 V, 415 V | 13 |
| 3:1 380 V, 400 V, 415 V | 14 |
| Battery Run-Times – APC Battery Solution | 14 |
| 10 kVA 400 V Typical Performances | 14 |
| 15 kVA 400 V Typical Performances | 15 |
| 20 kVA 400 V Typical Performances | 17 |
| 30 kVA 400 V Typical Performances | 18 |
| 40 kVA 400 V Typical Performances | 19 |
| Battery Run-Times – Non-Modular Batteries | 20 |
| 10 kVA 400 V | 20 |
| 15 kVA 400 V | 21 |
| 20 kVA 400 V | 21 |
| 30 kVA 400 V | 22 |
| 40 kVA 400 V | 22 |
| Battery Discharge Current | 22 |
| End of Discharge Voltage | 23 |
| AC Bypass | 24 |
| Specifications | 24 |
| 3:3 380 V, 400 V, 415 V | 24 |
| 3:1 380 V, 400 V, 415 V | 24 |
| Physical | 25 |
| UPS Net Dimensions | 25 |
| UPS Shipping Weights | 25 |
| 3:3 380 V, 400 V, 415 V | 25 |
| UPS Shipping Weights | 25 |
| 3:1 380 V, 400 V, 415 V | 25 |
| XR Battery Enclosure Shipping Weights | 26 |
| XR Battery Net Weights (One Battery) | 26 |
| XR Battery Net Weights (One Module consisting of four Batteries) | 26 |
| Fuses and Breakers | 27 |
| Single Utility/Mains System | 27 |
| Dual Utility/Mains System | 28 |
| Parallel System | 29 |
| Fuse and Breaker Sizes | 29 |
| 3:3 380 V, 400 V, 415 V | 29 |

| | |
|---|----|
| 3:1 380 V, 400 V, 415 V..... | 30 |
| Parallel System | 30 |
| | |
| Minimum Breaker Settings | 31 |
| 3:3 380 V, 400 V, 415 V..... | 31 |
| 3:1 380 V, 400 V, 415 V..... | 31 |
| | |
| Communication and Management..... | 33 |
| | |
| Network Management Card..... | 33 |
| | |
| Input and Output Contacts | 33 |
| | |
| EPO..... | 35 |
| | |
| J108 Pin Connections | 35 |
| | |
| EPO Options..... | 35 |
| | |
| Compliance | 36 |
| | |
| Options..... | 37 |
| | |
| Parallel MBP - Wall-Mount | 37 |
| | |
| Empty Cabinet for batteries - floor-mount | 37 |
| | |
| Empty Cabinet for Transformer - floor-mount..... | 37 |
| | |
| Parallel Capabilities | 38 |
| | |
| Communication Cables | 38 |
| Schematic of the PBus Cables Layout..... | 38 |
| System Arrangements | 39 |
| | |
| Overview of Power Connections | 40 |

Model List

The MGE Galaxy 3500 UPS is available in the following models:


UPS for up to 2 Battery Modules

- MGE Galaxy 3500 10 kVA 400 V
- MGE Galaxy 3500 15 kVA 400 V
- MGE Galaxy 3500 15 kVA 400 V 3:1
- MGE Galaxy 3500 20 kVA 400 V
- MGE Galaxy 3500 20 kVA 400 V 3:1




UPS for up to 4 Battery Modules

- MGE Galaxy 3500 10 kVA 400 V
- MGE Galaxy 3500 15 kVA 400 V
- MGE Galaxy 3500 15 kVA 400 V 3:1
- MGE Galaxy 3500 20 kVA 400 V
- MGE Galaxy 3500 20 kVA 400 V 3:1
- MGE Galaxy 3500 30 kVA 400 V
- MGE Galaxy 3500 30 kVA 400 V 3:1
- MGE Galaxy 3500 40 kVA 400 V
- MGE Galaxy 3500 40 kVA 400 V 3:1

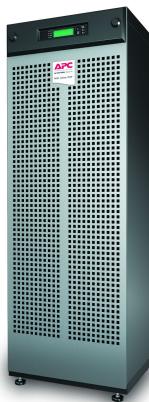

UPS without Batteries, for use with 3rd-Party Batteries (External Frame) or Longlife Battery Modules (Internal)

- MGE Galaxy 3500 10 kVA 400 V
- MGE Galaxy 3500 15 kVA 400 V
- MGE Galaxy 3500 15 kVA 400 V 3:1
- MGE Galaxy 3500 20kVA 400 V
- MGE Galaxy 3500 20 kVA 400 V 3:1
- MGE Galaxy 3500 30 kVA 400 V
- MGE Galaxy 3500 30 kVA 400 V 3:1
- MGE Galaxy 3500 40 kVA 400 V
- MGE Galaxy 3500 40 kVA 400 V 3:1

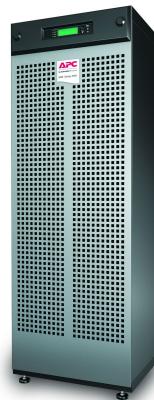

Features

Availability

- Dual mains input: Increases availability by allowing the UPS to be connected to two separate power sources
- Scalable runtime: Allows additional runtime to be quickly added as needed
- Hot-swappable batteries: Ensure clean, uninterrupted power to protected equipment while batteries are being replaced
- Generator compatible: Ensure clean, uninterrupted power to protected equipment when generator power is used
- Automatic internal static bypass: Supplies utility power to the connected loads in the event of a UPS overload condition or fault
- Battery modules connected in parallel: Delivers higher availability through redundant batteries

Serviceability

- Batteries that can be replaced by qualified personnel: Increases availability by allowing qualified personnel to perform upgrades and replacement of the batteries reducing the Mean Time To Repair (MTTR)
- Automatic self-test: Periodic battery self-test ensures early detection of a battery that needs to be replaced
- Shippable with modules installed: Enables pre-installation UPS staging and testing and faster installation
- Modular design: Provides fast serviceability and reduced maintenance requirements via self-diagnosing, field-replaceable modules

Manageability

- Network manageable: Provides remote management of the UPS over the network
- InfraStruXure Central Compatible: Enables centralized management via InfraStruXure Central
- LCD: Alphanumeric display which displays system parameters and alarms
- Audible alarms: Provides notification of changing utility power and UPS conditions
- Programmable frequency: Ensures compatibility with different input frequencies
- LED status indicators: Quickly understand unit and power status with visual indicators
- SmartSlot: Customize UPS capabilities with management cards

Total Cost of Ownership

- Input power factor correction: Minimizes installation costs by enabling the use of smaller generators and cabling
- Temperature-compensated battery charging: Prolongs battery life by regulating the charge voltage according to battery temperature
- Manual maintenance bypass: Reduces installation costs by eliminating the need for an external mechanical bypass
- Intelligent battery management: Maximizes battery performance, life, and reliability through intelligent, precision charging

Settings

Default Settings

| System Settings (only updated when in load disconnect) | Default setting |
|--|---------------------|
| Nominal output voltage (ph-ph) | 380/400/415 V |
| Frequency | 50 Hz |
| Frequency self-detect mode | Auto |
| Frequency range | ±10 Hz |
| Frequency slew rate | 1 Hz/s |
| Generator charge percentage | 100% |
| Cyclic charge mode enabled | Off |
| Auto start | On |
| Parallel UPS number | 1 |
| No. of parallel UPSs | 1 |
| MBP present | No |
| Shutdown mode (can only be set from service port) | Never |
| Shutdown setting | |
| Low battery duration | 2 minutes |
| Shutdown delay | 20 seconds |
| Turn on delay | 0 seconds |
| Return of battery capacity | 0% |
| Alarm settings | |
| Load alarm threshold | System power rating |
| Runtime alarm threshold | 0 (disabled) |
| Parallel redundancy alarm threshold | n+0 (disabled) |
| Other settings | |
| Battery self test | Off |
| External battery capacity | 0 Ah |
| Display settings | |
| Display language | English |
| Display contrast | 0 |
| Display beeper state | PwerFail+30 |
| Display beeper volume | Low |
| Display key click | Off |

AC Input

Specifications


3:3 380 V, 400 V, 415 V

| kVA | 10 | | | 15 | | | 20 | | | 30 | | | 40 | | |
|-------------------------------|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| V | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 |
| Connection type | 5-wire (3PH + N + PE) | | | | | | | | | | | | | | |
| Input frequency (Hz) | 40-70 | | | | | | | | | | | | | | |
| I thd | < 5% at full load | | | | | | | | | | | | | | |
| Nom input current (A) | 13.0 | 12.3 | 11.9 | 19.4 | 18.5 | 17.8 | 26.0 | 24.7 | 23.8 | 38.6 | 36.7 | 35.3 | 51.7 | 49.1 | 47.3 |
| Max input current (A) | 14.3 | 13.5 | 13.1 | 21.4 | 20.3 | 19.6 | 28.6 | 27.2 | 26.2 | 42.5 | 40.3 | 38.9 | 56.8 | 54.0 | 52.1 |
| Input current limitation (A) | 18 | | | 26.7 | | | 35.5 | | | 53 | | | 70.6 | | |
| Input power factor correction | 0.98 at load > 50% | | | | | | | | | | | | | | |

3:1 380 V, 400 V, 415 V

| kVA | 15 | | | 20 | | | 30 | | | 40 | | | |
|-------------------------------|-----------------------|------|------|------|------|------|------|------|------|------|------|------|--|
| V | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | |
| Connection type | 5-wire (3PH + N + PE) | | | | | | | | | | | | |
| Input frequency (Hz) | 40-70 | | | | | | | | | | | | |
| I thd | < 5% at full load | | | | | | | | | | | | |
| Nom input current (A) | 19.4 | 18.5 | 17.8 | 26.0 | 24.7 | 23.8 | 38.6 | 36.7 | 35.3 | 51.7 | 49.1 | 47.3 | |
| Max input current (A) | 21.4 | 20.3 | 19.6 | 28.6 | 27.2 | 26.2 | 42.5 | 40.3 | 38.9 | 56.8 | 54.0 | 52.1 | |
| Input current limitation (A) | 26.7 | | | 35.5 | | | 53 | | | 70.6 | | | |
| Input power factor correction | 0.98 at load > 50% | | | | | | | | | | | | |

Input Power Factor

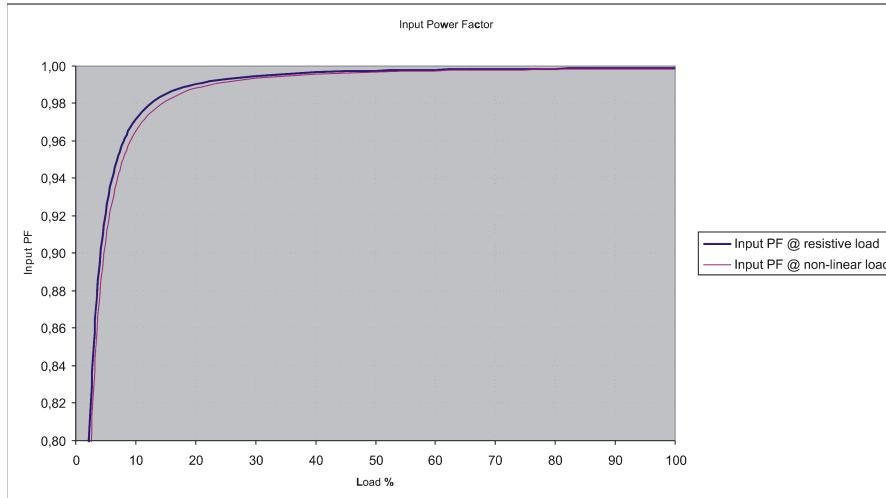

AC Output

Specifications

3:3 380 V, 400 V, 415 V

| kVA | 10 | | | 15 | | | 20 | | | 30 | | | 40 | | |
|----------------------------------|---|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| V | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 |
| Connection type | 5-wire (3PH + N + PE) | | | | | | | | | | | | | | |
| Output capacity | 150% for 1 minute (normal operation) 125% for 10 minutes (normal operation) 150% for 1 minute (battery operation) 110% continuous (bypass operation) 800% for 500 ms (bypass operation) | | | | | | | | | | | | | | |
| Voltage tolerance | +/- 20% (304-477 V) at full load | | | | | | | | | | | | | | |
| Nom output current (A) | 15.2 | 14.4 | 13.9 | 22.8 | 21.7 | 20.9 | 30.4 | 28.9 | 27.8 | 45.6 | 43.3 | 41.7 | 60.8 | 57.7 | 55.6 |
| Output frequency (sync to mains) | 47-53 Hz for 50 Hz nominal | | | | | | | | | | | | | | |
| Slew rate (Hz/Sec) | 0.25-1 | | | | | | | | | | | | | | |
| Total Harmonic Distortion (THD) | < 1.5% linear < 3.5% non-linear | | | | | | | | | | | | | | |
| Output power factor | 0.8 | | | | | | | | | | | | | | |
| Dynamic load response | +/- 5% | | | | | | | | | | | | | | |
| Output voltage regulation | +/- 1% | | | | | | | | | | | | | | |

3:1 380 V, 400 V, 415 V

| kVA | 15 | | | 20 | | | 30 | | | 40 | | |
|-------------------|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| V | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 |
| Connection type | 3-wire (1PH + N + G) | | | | | | | | | | | |
| Output capacity | 150% for 1 minute (normal operation) 125% for 10 minutes (normal operation) 150% for 1 minute (battery operation) 125% for 10 minutes (battery operation) 110% continuous (bypass operation) 800% for 500 ms (bypass operation) | | | | | | | | | | | |
| Voltage tolerance | +/- 20% (304-477 V) at full load | | | | | | | | | | | |

| kVA | 15 | | | 20 | | | 30 | | | 40 | | |
|----------------------------------|------------------------------------|------|------|-----------|------|------|-----------|-------|-------|-----------|-------|-------|
| V | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 |
| Nom output current (A) | 68.4 | 65.0 | 62.6 | 91.2 | 86.6 | 83.5 | 136.7 | 129.9 | 125.2 | 182.3 | 173.2 | 166.9 |
| Output frequency (sync to mains) | 47-53 Hz for 50 Hz nominal | | | | | | | | | | | |
| Slew rate (Hz/Sec) | 0.25-1 | | | | | | | | | | | |
| Total Harmonic Distortion (THD) | < 1.5% linear < 3.5% non-linear | | | | | | | | | | | |
| Output power factor | 0.8 | | | | | | | | | | | |
| Dynamic load response | +/- 5% | | | | | | | | | | | |
| Output voltage regulation | +/- 1% | | | | | | | | | | | |

Efficiency

3:3 400 V

| System | 25% load | 50% load | 75% load | 100% load |
|--------------|----------|----------|----------|-----------|
| 10 kVA 400 V | 92.9 | 94.8 | 94.9 | 94.9 |
| 15 kVA 400 V | 92.9 | 95.3 | 95.5 | 95.5 |
| 20 kVA 400 V | 94.4 | 95.5 | 95.5 | 95.4 |
| 30 kVA 400 V | 94.1 | 96.0 | 95.9 | 96.1 |
| 40 kVA 400 V | 95.0 | 96.0 | 95.9 | 95.5 |


3:1 400 V

| System | 25% load | 50% load | 75% load | 100% load |
|--------------|----------|----------|----------|-----------|
| 15 kVA 400 V | 93.2 | 95 | 95.3 | 95.2 |
| 20 kVA 400 V | 94.2 | 95.4 | 95.4 | 95.0 |
| 30 kVA 400 V | 93.9 | 95.5 | 95.7 | 95.3 |
| 40 kVA 400 V | 94.7 | 95.6 | 95.7 | 94.9 |


Efficiency Curves

Low line is 348 V and high line is 452 V (+/- 13%).


10 kVA 400 V

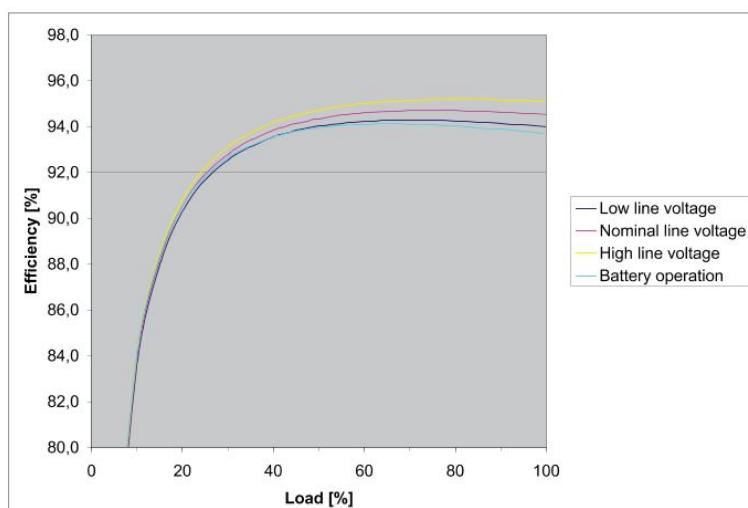


15 kVA 400 V

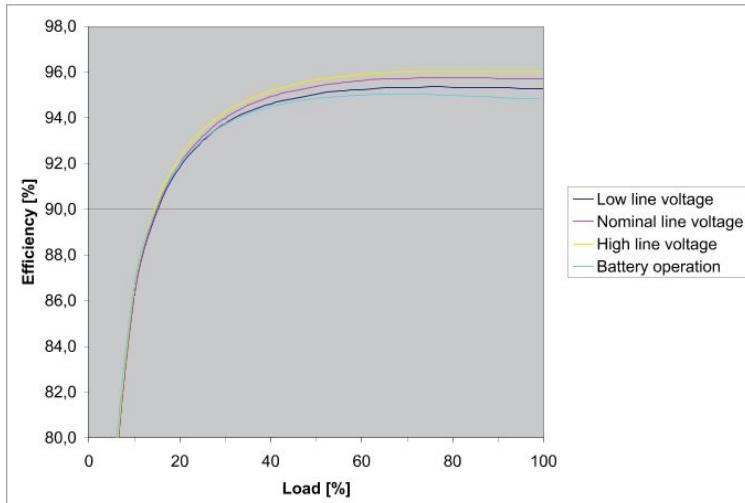


20 kVA 400 V

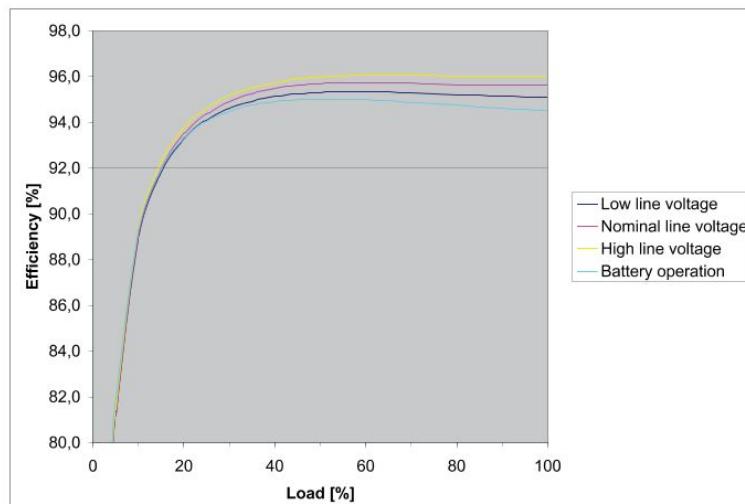


30 kVA 400 V

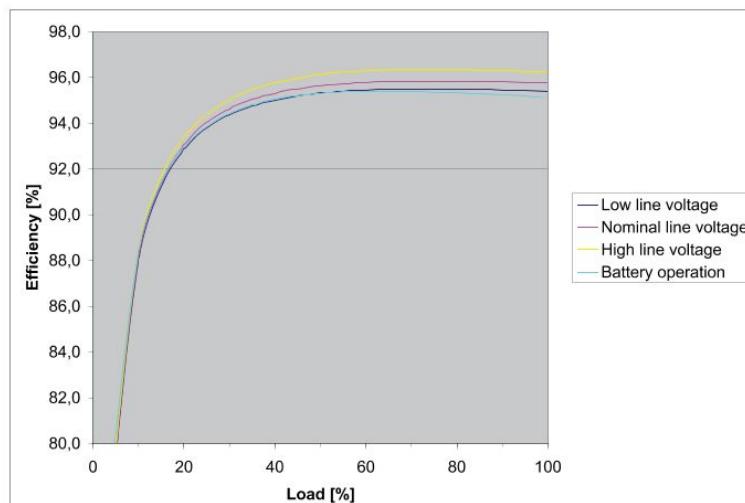

40 kVA 400 V

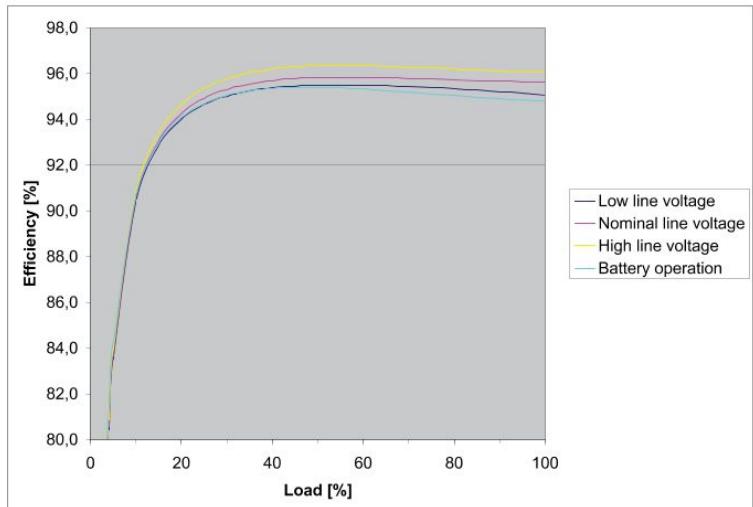

Derating due to Load Power Factor

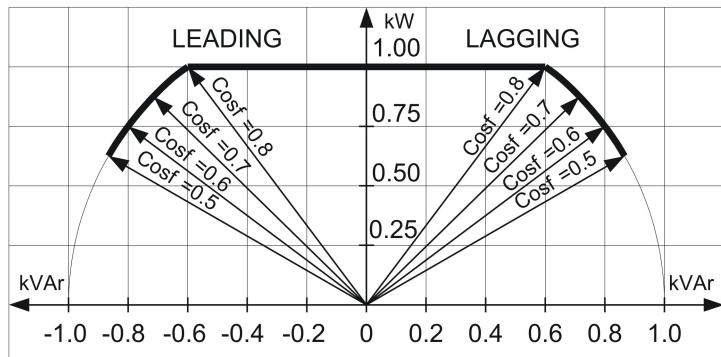

Environmental

| | | |
|---|---|--|
| Operating Temperature | 0 - 40 °C | |
| Storage Temperature with batteries | -15 - 40 °C | |
| Storage Temperature without batteries | -30 - 70 °C | |
| Operating Relative Humidity | 0 - 95%, non-condensing | |
| Storage Relative Humidity | 0 - 95%, non-condensing | |
| Operating Elevation | 0-1000 m: 100% load 1000–1500 m: 95% load 1500–2000 m: 91% load 2000–2500 m: 86% load 2500–3000 m: 82% load | |
| Storage Elevation | 0-15000 meters | |
| Audible noise at 70% load – 1 meter from surface of unit | 42.3 dBA 46.2 dBA | |
| 10-20 kVA 380/400/415 V | | |
| 30-40 kVA 380/400/415 V | | |
| Audible noise at 100% load – 1 meter from surface of unit | 51.3 dBA 55.0 dBA | |
| 10-20 kVA 380/400/415 V | | |
| 30-40 kVA 380/400/415 V | | |
| Protection Class | Up to IP51 | |
| Colour | Dark grey | |

Heat Dissipation

3:3 380 V, 400 V, 415 V

| | 10 kVA | | 15 kVA | | 20 kVA | | 30 kVA | | 40 kVA | |
|---------------------------|---------------|----------|---------------|----------|---------------|----------|---------------|----------|---------------|----------|
| Batteries | Fully charged | Charging |
| Heat dissipation (BTU/hr) | 1474 | 2020 | 1965 | 2784 | 2675 | 3367 | 3439 | 4531 | 5241 | 6333 |

3:1 380 V, 400 V, 415 V

| | 15 kVA | | 20 kVA | | 30 kVA | | 40 kVA | |
|---------------------------|---------------|----------|---------------|----------|---------------|----------|---------------|----------|
| Batteries | Fully charged | Charging |
| Heat dissipation (BTU/hr) | 2088 | 2907 | 2893 | 3985 | 4094 | 5186 | 5896 | 6988 |

Batteries

Specifications

| | |
|------------------------------------|--|
| Type | VRLA |
| Nominal voltage (VDC) | +/- 192 |
| Float voltage (VDC) | +/- 219 |
| End of discharge voltage (VDC) | +/- 154 |
| Battery current (at full load) | 87.9 A at +/- 192 V |
| Max. current (at end of discharge) | 110.1 A at + 154 V |
| Max. charging power | 10 kVA: 1600 W 15 kVA: 2400 W 20 kVA: 3200 W 30 kVA: 3200 W 40 kVA: 3200 W |
| Max. charging current | 10 kVA: 4.2 A 15 kVA: 6.3 A 20 kVA: 8.4 A 30 kVA: 8.4 A 40 kVA: 8.4 A |
| Typical re-charge time | 5 hours |
| End voltage | 1.6-1.75 V/cell (automatic, depending on load) |

Efficiency DC to AC

3:3 380 V, 400 V, 415 V

| kVA | 10 | | | 15 | | | 20 | | | 30 | | | 40 | | |
|---|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| V | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 |
| Efficiency at nominal batt. voltage (%) | 94.7 | 94.8 | 94.9 | 95.1 | 95.2 | 95.3 | 94.9 | 95.0 | 95.1 | 95.0 | 95.1 | 95.2 | 94.8 | 94.9 | 95.1 |


3:1 380 V, 400 V, 415 V

| kVA | 15 | | | 20 | | | 30 | | | 40 | | |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| V | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 |
| Efficiency at nominal batt. voltage (%) | 94.9 | 95.0 | 95.1 | 94.7 | 94.8 | 94.9 | 94.9 | 95.0 | 95.1 | 94.8 | 94.9 | 95.0 |

Battery Run-Times – APC Battery Solution

“# of battery shelves” indicates the total number of populated battery shelves in the UPS and Battery Enclosure.


10 kVA 400 V Typical Performances

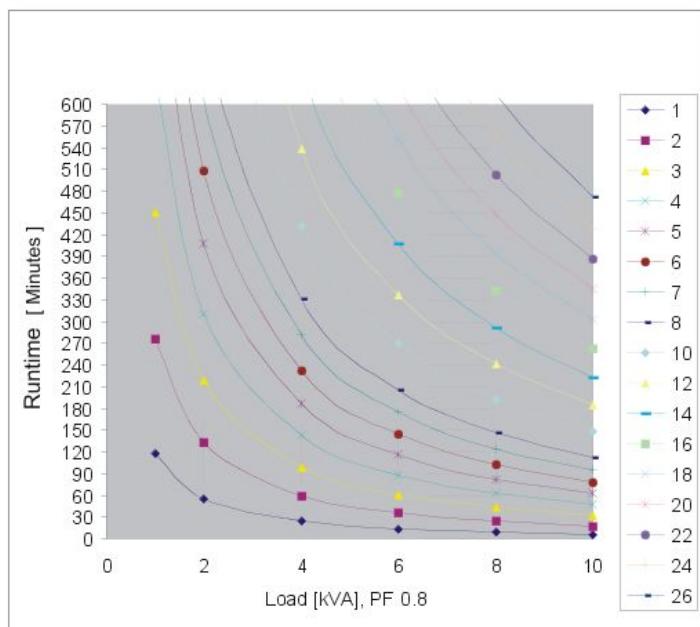

| # of bat shelves | Load kVA | | | | | |
|------------------|----------|-----|-----|-----|-----|-----|
| | 1 | 2 | 4 | 6 | 8 | 10 |
| 1 | 118 | 56 | 24 | 14 | 9 | 6 |
| 2 | 276 | 133 | 60 | 36 | 25 | 18 |
| 3 | 452 | 219 | 99 | 61 | 43 | 32 |
| 4 | 639 | 311 | 142 | 88 | 62 | 47 |
| 5 | 837 | 407 | 187 | 116 | 82 | 62 |
| 6 | 1043 | 508 | 233 | 145 | 103 | 78 |
| 7 | 1255 | 611 | 281 | 175 | 124 | 95 |
| 8 | 1474 | 718 | 331 | 206 | 147 | 112 |
| 9 | 1698 | 828 | 382 | 238 | 170 | 130 |

| | Load kVA | | | | | | |
|------------------|----------|------|------|-----|-----|-----|--|
| # of bat shelves | 1 | 2 | 4 | 6 | 8 | 10 | |
| 10 | 1928 | 940 | 433 | 271 | 193 | 148 | |
| 11 | 2162 | 1054 | 486 | 304 | 217 | 166 | |
| 12 | 2400 | 1171 | 540 | 338 | 241 | 185 | |
| 13 | 2642 | 1289 | 595 | 372 | 266 | 204 | |
| 14 | 2888 | 1409 | 651 | 407 | 291 | 223 | |
| 15 | 3138 | 1531 | 707 | 443 | 316 | 243 | |
| 16 | 3391 | 1655 | 765 | 479 | 342 | 262 | |
| 17 | 3647 | 1780 | 823 | 515 | 368 | 282 | |
| 18 | 3906 | 1907 | 881 | 552 | 394 | 303 | |
| 19 | 4168 | 2035 | 941 | 589 | 421 | 323 | |
| 20 | 4433 | 2164 | 1001 | 627 | 448 | 344 | |
| 21 | 4701 | 2295 | 1061 | 665 | 475 | 365 | |
| 22 | 4971 | 2427 | 1122 | 704 | 503 | 386 | |
| 23 | 5243 | 2560 | 1184 | 742 | 530 | 408 | |
| 24 | 5518 | 2694 | 1246 | 781 | 558 | 429 | |
| 25 | 5795 | 2830 | 1309 | 821 | 586 | 451 | |
| 26 | 6075 | 2966 | 1372 | 861 | 615 | 473 | |


15 kVA 400 V Typical Performances

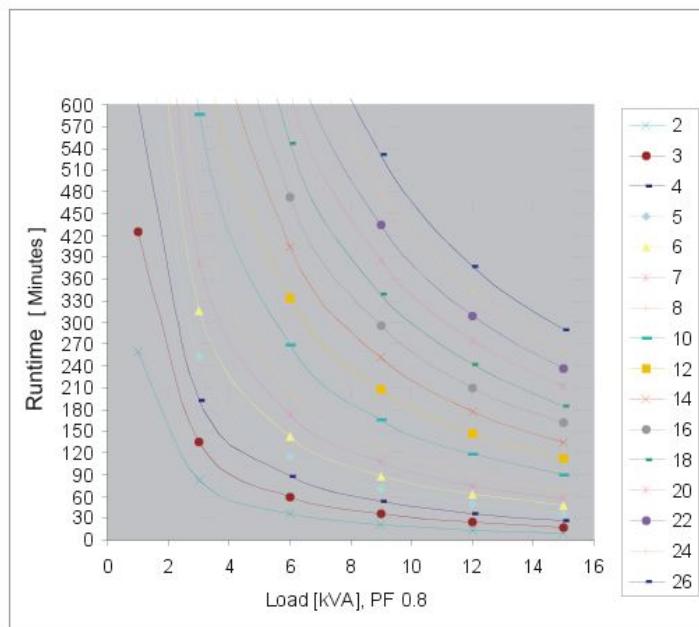

| | Load kVA | | | | | | |
|------------------|----------|------|------|------|------|------|--|
| # of bat shelves | 1 | 3 | 6 | 9 | 12 | 15 | |
| 1 | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | |
| 2 | 260 | 82 | 36 | 21 | 14 | 10 | |

| | Load kVA | | | | | |
|------------------|-----------------|------|-----|-----|-----|-----|
| # of bat shelves | 1 | 3 | 6 | 9 | 12 | 15 |
| 3 | 425 | 136 | 60 | 36 | 25 | 18 |
| 4 | 602 | 193 | 87 | 53 | 37 | 27 |
| 5 | 788 | 253 | 114 | 70 | 49 | 37 |
| 6 | 982 | 316 | 143 | 88 | 62 | 47 |
| 7 | 1182 | 381 | 173 | 107 | 75 | 57 |
| 8 | 1388 | 448 | 204 | 126 | 89 | 68 |
| 9 | 1600 | 517 | 235 | 146 | 103 | 79 |
| 10 | 1816 | 587 | 268 | 166 | 118 | 90 |
| 11 | 2036 | 659 | 300 | 187 | 132 | 101 |
| 12 | 2261 | 731 | 334 | 208 | 147 | 113 |
| 13 | 2489 | 806 | 368 | 229 | 163 | 124 |
| 14 | 2721 | 881 | 403 | 251 | 178 | 136 |
| 15 | 2956 | 957 | 438 | 273 | 194 | 148 |
| 16 | 3194 | 1035 | 473 | 295 | 210 | 161 |
| 17 | 3435 | 1113 | 509 | 317 | 226 | 173 |
| 18 | 3680 | 1192 | 546 | 340 | 242 | 185 |
| 19 | 3926 | 1272 | 582 | 363 | 259 | 198 |
| 20 | 4176 | 1353 | 620 | 387 | 275 | 211 |
| 21 | 4428 | 1435 | 657 | 410 | 292 | 224 |
| 22 | 4682 | 1518 | 695 | 434 | 309 | 237 |
| 23 | 4939 | 1601 | 733 | 458 | 326 | 250 |
| 24 | 5198 | 1685 | 772 | 482 | 343 | 263 |
| 25 | 5459 | 1770 | 811 | 506 | 361 | 277 |
| 26 | 5723 | 1856 | 850 | 531 | 378 | 290 |


20 kVA 400 V Typical Performances

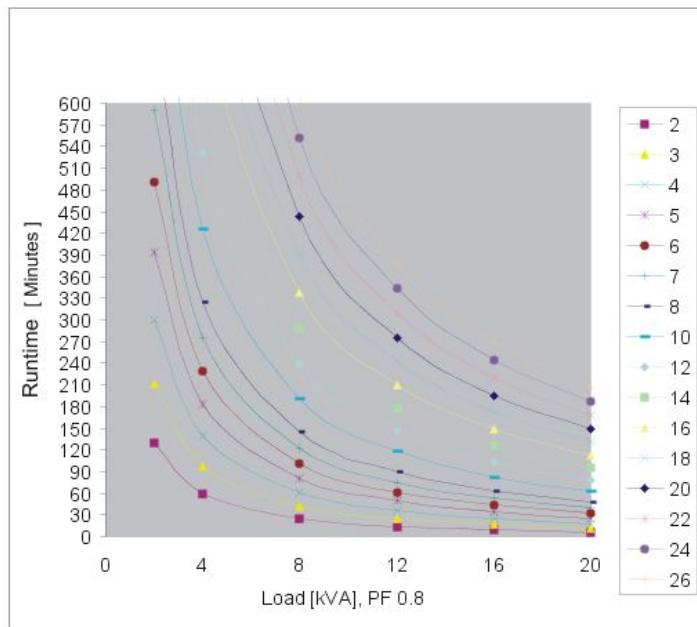

| | Load kVA | | | | | | |
|------------------|----------|------|------|------|------|------|------|
| # of bat shelves | 2 | 4 | 8 | 12 | 16 | 20 | |
| 1 | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. |
| 2 | 129 | 59 | 25 | 14 | 9 | 6 | |
| 3 | 212 | 98 | 42 | 25 | 17 | 12 | |
| 4 | 300 | 139 | 61 | 37 | 25 | 18 | |
| 5 | 394 | 183 | 81 | 49 | 34 | 25 | |
| 6 | 491 | 229 | 102 | 62 | 43 | 32 | |
| 7 | 591 | 276 | 123 | 75 | 53 | 40 | |
| 8 | 695 | 325 | 145 | 89 | 63 | 47 | |
| 9 | 801 | 375 | 168 | 103 | 73 | 55 | |
| 10 | 909 | 426 | 191 | 118 | 83 | 63 | |
| 11 | 1020 | 478 | 215 | 132 | 93 | 71 | |
| 12 | 1132 | 531 | 239 | 147 | 104 | 79 | |
| 13 | 1247 | 585 | 263 | 163 | 115 | 87 | |
| 14 | 1363 | 639 | 288 | 178 | 126 | 96 | |
| 15 | 1481 | 695 | 313 | 194 | 137 | 105 | |
| 16 | 1601 | 751 | 339 | 210 | 149 | 113 | |
| 17 | 1722 | 808 | 364 | 226 | 160 | 122 | |
| 18 | 1844 | 866 | 391 | 242 | 172 | 131 | |
| 19 | 1968 | 924 | 417 | 259 | 183 | 140 | |
| 20 | 2093 | 983 | 444 | 275 | 195 | 149 | |
| 21 | 2220 | 1043 | 471 | 292 | 207 | 158 | |
| 22 | 2347 | 1103 | 498 | 309 | 219 | 168 | |
| 23 | 2476 | 1163 | 525 | 326 | 232 | 177 | |

| | Load kVA | | | | | |
|------------------|----------|------|-----|-----|-----|-----|
| # of bat shelves | 2 | 4 | 8 | 12 | 16 | 20 |
| 24 | 2606 | 1224 | 553 | 343 | 244 | 187 |
| 25 | 2737 | 1286 | 581 | 361 | 256 | 196 |
| 26 | 2869 | 1348 | 609 | 378 | 269 | 206 |


30 kVA 400 V Typical Performances

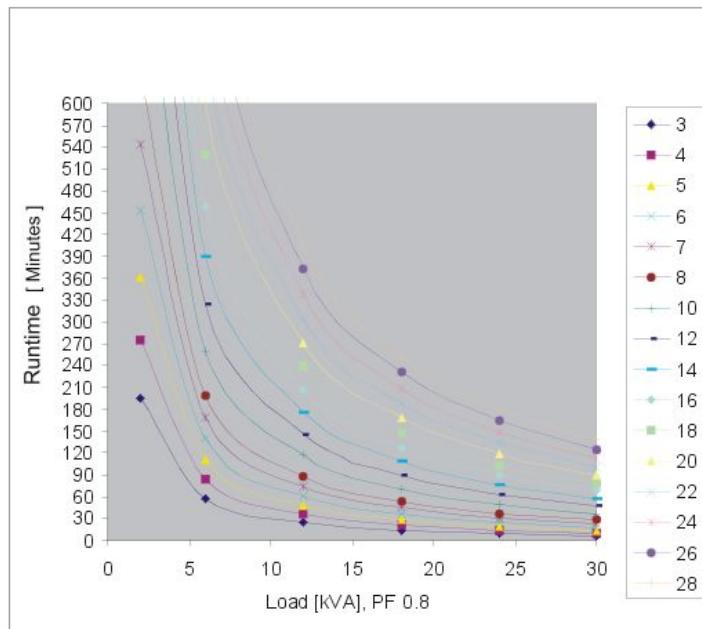

| | Load kVA | | | | | |
|------------------|----------|------|------|------|------|------|
| # of bat shelves | 2 | 6 | 12 | 18 | 24 | 30 |
| 1 | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. |
| 2 | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. |
| 3 | 195 | 58 | 25 | 14 | 9 | 6 |
| 4 | 276 | 84 | 36 | 21 | 14 | 10 |
| 5 | 362 | 111 | 48 | 29 | 19 | 14 |
| 6 | 452 | 139 | 61 | 37 | 25 | 18 |
| 7 | 544 | 168 | 74 | 45 | 31 | 23 |
| 8 | 639 | 198 | 88 | 53 | 37 | 28 |
| 9 | 737 | 228 | 102 | 62 | 43 | 32 |
| 10 | 837 | 259 | 116 | 71 | 50 | 37 |
| 11 | 939 | 291 | 130 | 80 | 56 | 42 |
| 12 | 1043 | 324 | 145 | 89 | 63 | 47 |
| 13 | 1148 | 357 | 160 | 98 | 69 | 52 |
| 14 | 1255 | 390 | 175 | 108 | 76 | 58 |
| 15 | 1364 | 424 | 191 | 118 | 83 | 63 |
| 16 | 1474 | 459 | 206 | 127 | 90 | 68 |

| | Load kVA | | | | | |
|------------------|----------|-----|-----|-----|-----|-----|
| # of bat shelves | 2 | 6 | 12 | 18 | 24 | 30 |
| 17 | 1585 | 494 | 222 | 137 | 97 | 74 |
| 18 | 1698 | 529 | 238 | 147 | 104 | 79 |
| 19 | 1812 | 565 | 255 | 157 | 111 | 85 |
| 20 | 1928 | 601 | 271 | 168 | 118 | 90 |
| 21 | 2044 | 637 | 287 | 178 | 126 | 96 |
| 22 | 2162 | 674 | 304 | 188 | 133 | 102 |
| 23 | 2280 | 711 | 321 | 199 | 141 | 107 |
| 24 | 2400 | 749 | 338 | 209 | 148 | 113 |
| 25 | 2521 | 786 | 355 | 220 | 156 | 119 |
| 26 | 2642 | 824 | 372 | 231 | 164 | 125 |
| 27 | 2765 | 863 | 390 | 242 | 171 | 131 |
| 28 | 2888 | 901 | 407 | 253 | 179 | 137 |

40 kVA 400 V Typical Performances

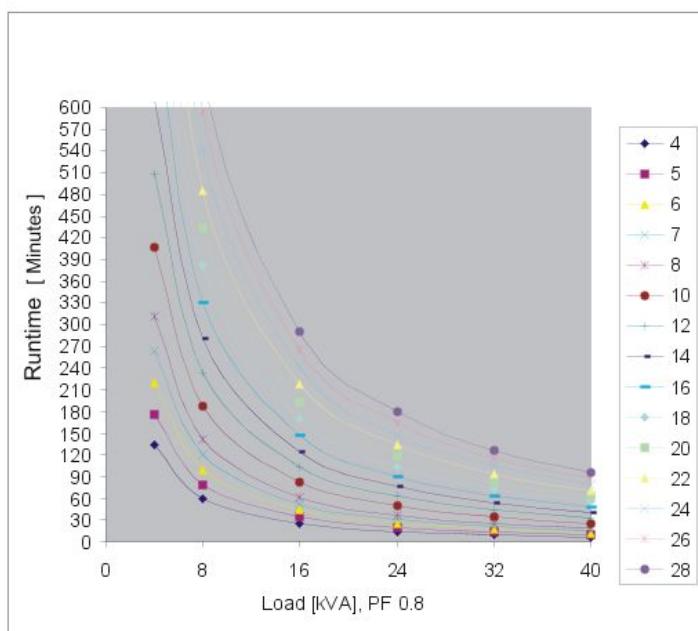

| | Load kVA | | | | | |
|------------------|----------|------|------|------|------|------|
| # of bat shelves | 4 | 8 | 16 | 24 | 32 | 40 |
| 1 | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. |
| 2 | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. |
| 3 | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. |
| 4 | 133 | 60 | 25 | 14 | 9 | 6 |
| 5 | 175 | 79 | 34 | 19 | 13 | 9 |
| 6 | 219 | 99 | 43 | 25 | 17 | 12 |

| | | Load kVA | | | | | |
|------------------|------|----------|-----|-----|-----|----|----|
| # of bat shelves | | 4 | 8 | 16 | 24 | 32 | 40 |
| 7 | 264 | 120 | 52 | 31 | 21 | 15 | |
| 8 | 311 | 142 | 62 | 37 | 25 | 19 | |
| 9 | 358 | 164 | 72 | 43 | 30 | 22 | |
| 10 | 407 | 187 | 82 | 50 | 34 | 25 | |
| 11 | 457 | 210 | 92 | 56 | 39 | 29 | |
| 12 | 508 | 233 | 103 | 63 | 43 | 33 | |
| 13 | 559 | 257 | 114 | 69 | 48 | 36 | |
| 14 | 611 | 281 | 124 | 76 | 53 | 40 | |
| 15 | 664 | 306 | 135 | 83 | 58 | 44 | |
| 16 | 718 | 331 | 147 | 90 | 63 | 47 | |
| 17 | 773 | 356 | 158 | 97 | 68 | 51 | |
| 18 | 828 | 382 | 170 | 104 | 73 | 55 | |
| 19 | 884 | 407 | 181 | 111 | 78 | 59 | |
| 20 | 940 | 433 | 193 | 118 | 83 | 63 | |
| 21 | 997 | 460 | 205 | 126 | 89 | 67 | |
| 22 | 1054 | 486 | 217 | 133 | 94 | 71 | |
| 23 | 1112 | 513 | 229 | 141 | 99 | 75 | |
| 24 | 1171 | 540 | 241 | 148 | 105 | 79 | |
| 25 | 1230 | 568 | 253 | 156 | 110 | 84 | |
| 26 | 1289 | 595 | 266 | 164 | 115 | 88 | |
| 27 | 1349 | 623 | 278 | 171 | 121 | 92 | |
| 28 | 1409 | 651 | 291 | 179 | 127 | 96 | |


Battery Run-Times – Non-Modular Batteries

- The below battery run-times are based on high quality batteries from approved manufacturers
- The run-times are based on high rate batteries designed for UPS systems
- The run-times are intended as a guide only, and APC disclaim the responsibility for these runtimes

10 kVA 400 V

* Approximately equivalent 10 hr rate ah

| Battery Ah | | Load % | | | | | | |
|------------|-------------|--------|----|----|----|----|----|-----|
| 20 hr rate | *10 hr rate | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 7.2 | 6.7 | 24 | 18 | 14 | 11 | 9 | 7 | 6 |
| 11 | 10 | 42 | 32 | 25 | 20 | 17 | 14 | 12 |
| 15 | 14 | 63 | 48 | 38 | 31 | 26 | 22 | 19 |
| 20 | 19 | 90 | 69 | 55 | 46 | 39 | 33 | 29 |

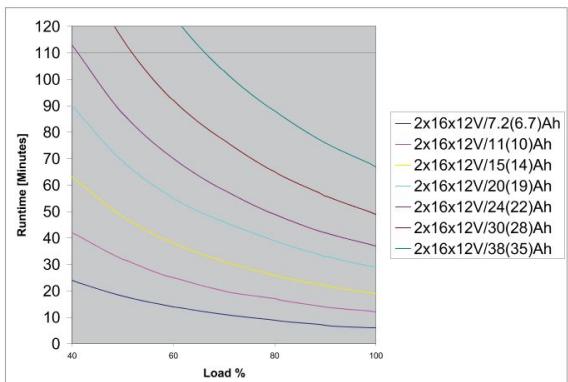


| | | | | | | | | |
|----|----|-----|-----|-----|-----|----|----|----|
| 24 | 22 | 113 | 87 | 70 | 58 | 49 | 42 | 37 |
| 30 | 28 | 149 | 115 | 92 | 77 | 65 | 56 | 49 |
| 38 | 35 | 199 | 154 | 124 | 103 | 88 | 76 | 67 |

15 kVA 400 V

* Approximately equivalent 10 hr rate ah


| Battery Ah | | Load % | | | | | | |
|------------|-------------|--------|-----|-----|----|----|----|-----|
| 20 hr rate | *10 hr rate | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 11 | 10 | 25 | 19 | 14 | 11 | 9 | 7 | 6 |
| 15 | 14 | 38 | 29 | 22 | 18 | 15 | 13 | 11 |
| 20 | 19 | 55 | 42 | 33 | 27 | 23 | 19 | 17 |
| 24 | 22 | 70 | 53 | 42 | 35 | 29 | 25 | 21 |
| 30 | 28 | 92 | 70 | 56 | 46 | 39 | 34 | 29 |
| 38 | 35 | 124 | 95 | 76 | 63 | 53 | 46 | 40 |
| 50 | 47 | 174 | 133 | 107 | 89 | 75 | 65 | 57 |

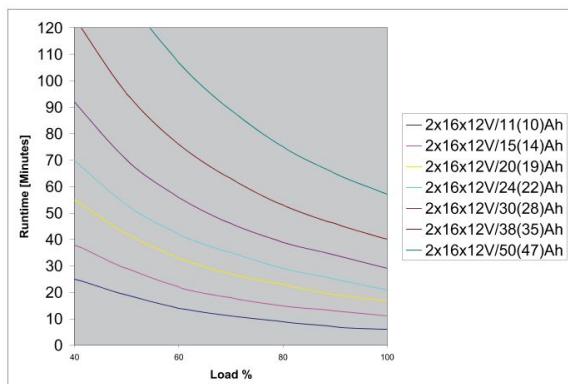

20 kVA 400 V

* Approximately equivalent 10 hr rate ah


| Battery Ah | | Load % | | | | | | |
|------------|-------------|--------|-----|-----|----|----|----|-----|
| 20 hr rate | *10 hr rate | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 15 | 14 | 26 | 19 | 15 | 12 | 10 | 8 | 7 |
| 20 | 19 | 39 | 29 | 23 | 18 | 15 | 13 | 11 |
| 24 | 22 | 49 | 37 | 29 | 24 | 20 | 17 | 14 |
| 30 | 28 | 65 | 49 | 39 | 32 | 27 | 23 | 20 |
| 38 | 35 | 88 | 67 | 53 | 44 | 37 | 31 | 27 |
| 50 | 47 | 123 | 94 | 75 | 62 | 52 | 45 | 39 |
| 65 | 60 | 170 | 130 | 104 | 86 | 73 | 63 | 55 |

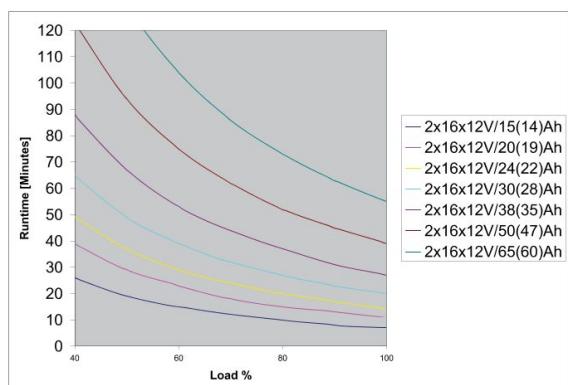

30 kVA 400 V

* Approximately equivalent 10 hr rate ah


| Battery Ah | | Load % | | | | | | |
|------------|-------------|--------|-----|-----|----|----|----|-----|
| hr rate | *10 hr rate | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 24 | 22 | 29 | 21 | 17 | 13 | 11 | 9 | 7 |
| 30 | 28 | 39 | 29 | 23 | 18 | 15 | 13 | 11 |
| 38 | 35 | 53 | 40 | 31 | 26 | 21 | 18 | 15 |
| 50 | 47 | 75 | 57 | 45 | 37 | 31 | 27 | 23 |
| 65 | 60 | 104 | 79 | 63 | 52 | 44 | 38 | 33 |
| 80 | 74 | 135 | 103 | 82 | 68 | 57 | 49 | 43 |
| 100 | 93 | 178 | 136 | 109 | 90 | 76 | 66 | 57 |

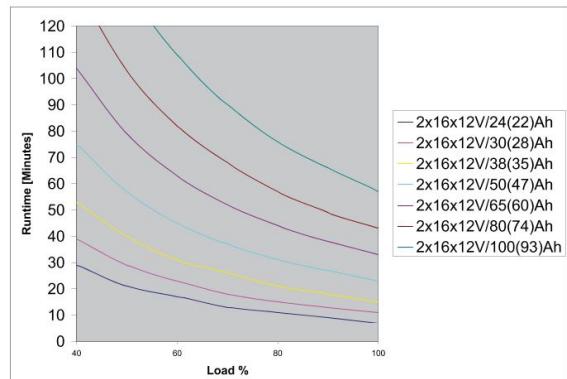

40 kVA 400 V

* Approximately equivalent 10 hr rate ah


| Battery Ah | | Load % | | | | | | |
|------------|-------------|--------|-----|----|----|----|----|-----|
| hr rate | *10 hr rate | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 20 | 28 | 27 | 20 | 15 | 12 | 10 | 8 | 7 |
| 30 | 35 | 37 | 27 | 21 | 17 | 14 | 12 | 10 |
| 38 | 47 | 52 | 39 | 31 | 25 | 21 | 18 | 15 |
| 50 | 60 | 73 | 55 | 44 | 36 | 30 | 26 | 22 |
| 65 | 74 | 95 | 72 | 57 | 47 | 40 | 34 | 30 |
| 80 | 93 | 125 | 95 | 76 | 63 | 53 | 46 | 40 |
| 100 | 112 | 157 | 120 | 96 | 79 | 67 | 58 | 50 |

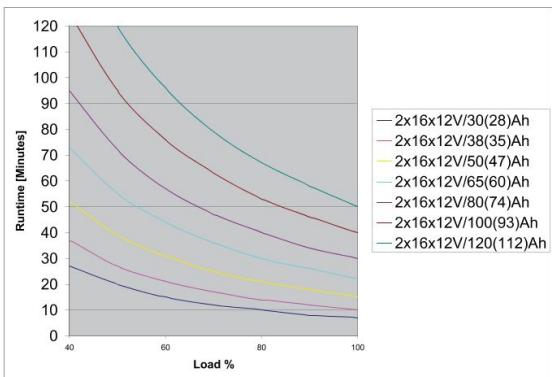

Battery Discharge Current

| | 10 kVA | 15 kVA | 20 kVA | 30 kVA | 40 kVA |
|--------------------------------|--------|--------|--------|--------|--------|
| I bat @ bat nominal, 100% load | 22 | 33 | 44 | 66 | 88 |
| I bat @ bat min, 100% load | 28 | 41 | 55 | 83 | 110 |
| I bat @ bat min, 150% load | 40 | 62 | 83 | 125 | 166 |

End of Discharge Voltage

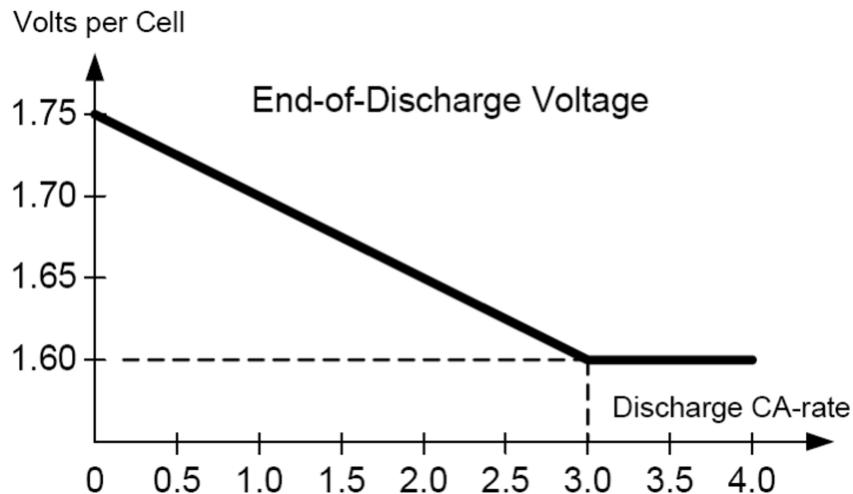

AC Bypass

Specifications

3:3 380 V, 400 V, 415 V

| kVA | 10 | | | 15 | | | 20 | | | 30 | | | 40 | | |
|-----------------------|---------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| V | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 | 380 | 400 | 415 |
| Connection type | Hard Wire 5-wire (3PH + N + PE) | | | | | | | | | | | | | | |
| Input frequency (Hz) | 40–70 | | | | | | | | | | | | | | |
| Nom input current (A) | 15.2 | 14.4 | 13.9 | 22.8 | 21.7 | 20.9 | 30.4 | 28.9 | 27.8 | 45.6 | 43.3 | 41.7 | 60.8 | 57.7 | 55.6 |

3:1 380 V, 400 V, 415 V

| kVA | 15 | | | 20 | | | 30 | | | 40 | | |
|-----------------------|-----------------------|------|------|------|------|-------|-----|-----|-----|-----|-----|-----|
| V | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 |
| Connection type | 3-wire (1PH + N + PE) | | | | | | | | | | | |
| Input frequency (Hz) | 40–70 | | | | | | | | | | | |
| Nom input current (A) | 68.4 | 65.0 | 62.6 | 91.2 | 86.6 | 83.58 | 136 | 130 | 125 | 182 | 174 | 167 |

Physical

UPS Net Dimensions

| Enclosure Net Dimensions | mm (in) |
|--|-----------------------|
| Height (identical for all UPS enclosure sizes) | 1491 (149) |
| Depth (identical for all UPS enclosure sizes - exclusive of the conduit box) | 855 (34) |
| Depth (identical for all UPS enclosure sizes - inclusive of the conduit box) | 941 (37) |
| Enclosure width (2 sizes) | 352 (14) and 523 (20) |

UPS Shipping Weights

3:3 380 V, 400 V, 415 V

| 380/400/415 V | kg | lbs | 380/400/415 V | kg | lbs |
|---------------|-----|------|---------------|-----|------|
| G35T10KH1B2S | 245 | 540 | G35T15KHS* | 290 | 638 |
| G35T10KH1B4S | 382 | 842 | G35T20KH2B2S | 433 | 955 |
| G35T10KH2B2S | 336 | 741 | G35T20KH2B4S | 474 | 1045 |
| G35T10KH2B4S | 474 | 1045 | G35T20KH3B4S | 566 | 1248 |
| G35T10KH3B4S | 566 | 1248 | G35T20KH4B4S | 657 | 1448 |
| G35T10KH4B4S | 657 | 1448 | G35T20KHS* | 290 | 638 |
| G35T10KHS* | 290 | 638 | G35T30KH3B4S | 601 | 1325 |
| G35T15KH2B2S | 433 | 955 | G35T30KH4B4S | 692 | 1526 |
| G35T15KH2B4S | 474 | 1045 | G35T30KHS* | 325 | 715 |
| G35T15KH3B4S | 566 | 1248 | G35T40KH4B4S | 692 | 1526 |
| G35T15KH4B4S | 657 | 1448 | G35T40KHS* | 325 | |

* UPS without batteries, for use with 3rd-party batteries (external frame) or longlife battery modules (internal).

UPS Shipping Weights

3:1 380 V, 400 V, 415 V

| 220/230/240 V | kg | lbs | 220/230/240 V | kg | lbs |
|---------------|-----|------|---------------|-----|------|
| G35T15K3I2B2S | 428 | 944 | G35T20K3I4B4S | 686 | 1512 |
| G35T15K3I2B4S | 505 | 1113 | G35T20K3I1S* | 290 | 638 |
| G35T15K3I3B4S | 566 | 1248 | G35T30K3I3B4S | 566 | 1248 |
| G35T15K3I4B4S | 686 | 1512 | G35T30K3I4B4S | 686 | 1512 |
| G35T15K3I1S* | 290 | 638 | G35T30K3I1S* | 325 | 715 |
| G35T20K3I2B2S | 428 | 944 | G35T40K3I4B4S | 686 | 1512 |

| 220/230/240 V | kg | lbs | 220/230/240 V | kg | lbs |
|----------------------|-----------|------------|----------------------|-----------|------------|
| G35T20K3I2B4S | 505 | 1113 | G35T40K3I1S* | 325 | 715 |
| G35T20K3I3B4S | 566 | 1248 | | | |

* UPS without batteries, for use with 3rd-party batteries (external frame) or longlife battery modules (internal).

XR Battery Enclosure Shipping Weights

| Part Nos. | kg | lbs | Part Nos. | kg | lbs |
|------------------|-----------|------------|------------------|-----------|------------|
| G35TXR2B6 | 418 | 919 | G35TXR6B6* | 807 | 1775 |
| G35TBXR2B6 | 418 | 919 | G35TBXR6B6* | 807 | 1775 |

* The total weight of the XR battery enclosure including the separate battery package.

XR Battery Net Weights (One Battery)


| Part Nos. | kg | lbs |
|------------------|-----------|------------|
| SYBT4 | 24 | 53 |
| SYBTH4 | 24 | 53 |

XR Battery Net Weights (One Module consisting of four Batteries)

| Part Nos. | kg | lbs |
|------------------|-----------|------------|
| SYBT4 | 96 | 212 |
| SYBTH4 | 96 | 212 |


Fuses and Breakers

Single Utility/Mains System

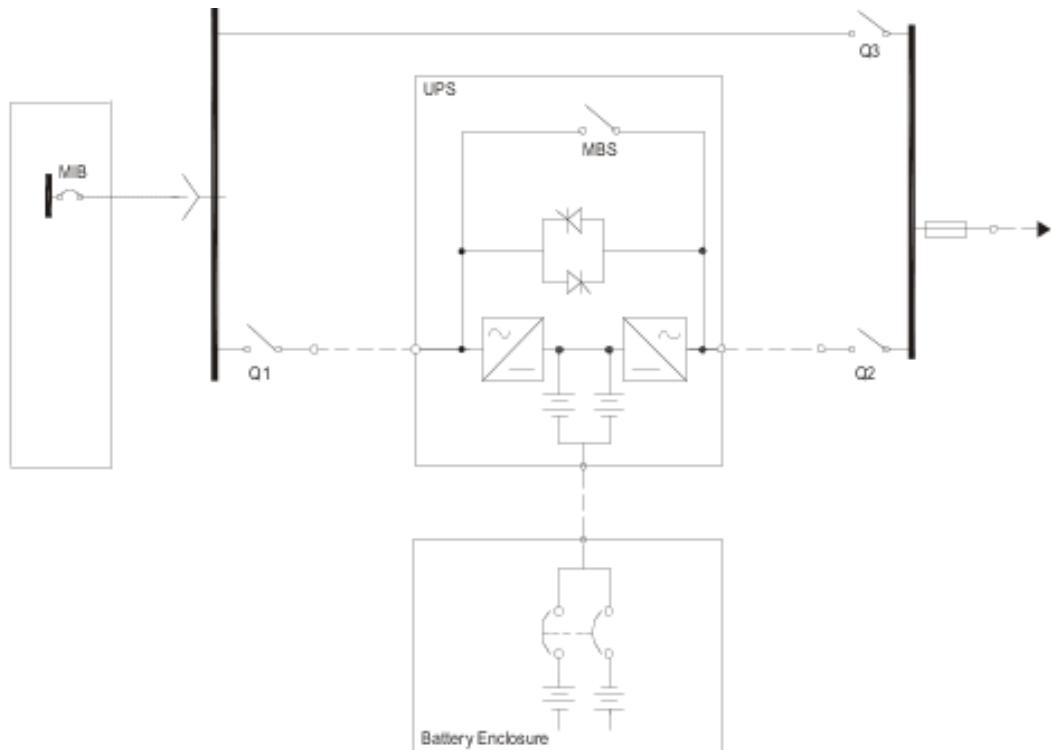


- Q1: Utility/mains input
- Q2: UPS output
- Q3: Manual bypass
- MBS: Mechanical bypass switch

Dual Utility/Mains System

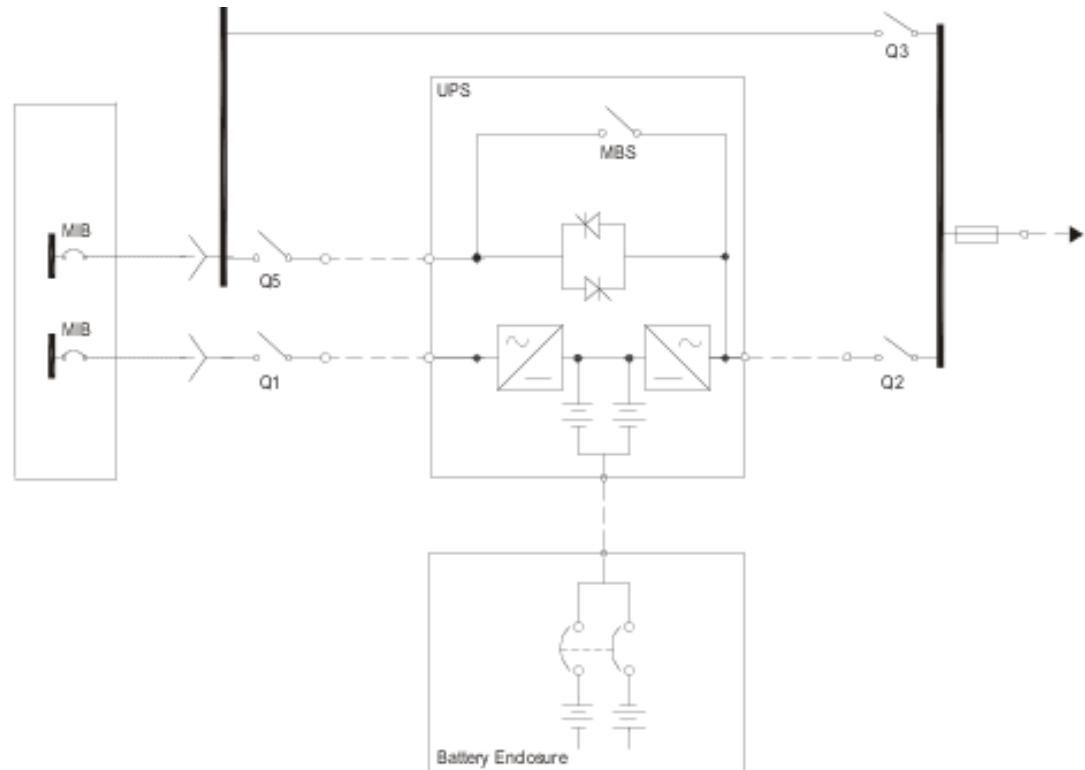

- Q1: Utility/mains input
- Q2: UPS output
- Q3: Manual bypass
- Q5: Static bypass input
- MBS: Mechanical bypass switch

Parallel System

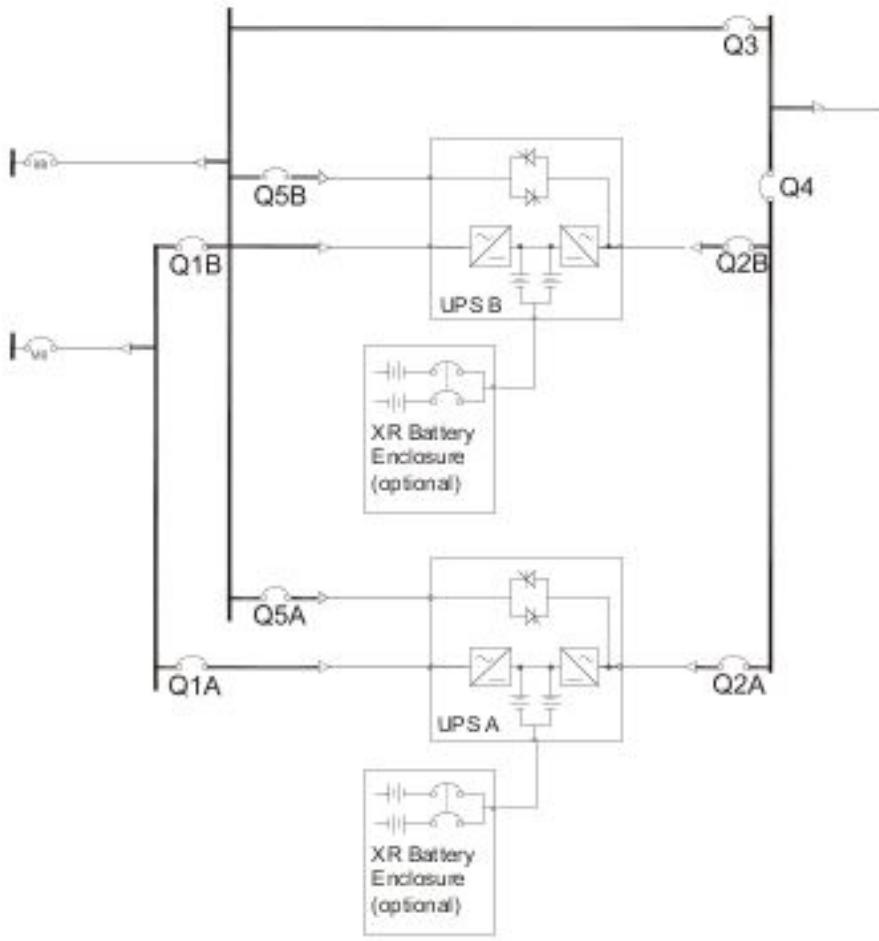

- Q1: Utility/mains input
- Q2: UPS output
- Q3: Manual bypass
- Q4: System output
- Q5: Static bypass input

Fuse and Breaker Sizes

3:3 380 V, 400 V, 415 V

Single System

| | 10 kVA | 15 kVA | 20 kVA | 30 kVA | 40 kVA |
|---------------------------------|--------|--------|--------|--------|--------|
| Mains input Q1 (A) ¹ | 16 | 25 | 35 | 50 | 63 |
| Static bypass input Q5 (A) | 16 | 25 | 35 | 50 | 63 |
| UPS output Q2 (A) | 16 | 25 | 35 | 50 | 63 |

¹ Required upstream current protection: gL type fuse

3:1 380 V, 400 V, 415 V

Single System

| | 15 kVA | 20 kVA | 30 kVA | 40 kVA |
|---|---------------|---------------|---------------|---------------|
| Mains input Q1 (A) ¹ | 25 | 35 | 50 | 63 |
| Bypass input Q5 (A) ¹ | 75 | 100 | 150 | 200 |
| Output Q2 (A) | 75 | 100 | 150 | 200 |
| ¹ Required upstream current protection: gL type fuse | | | | |

Parallel System

Q3 and Q4 in Parallel Capacity Systems

| Units in parallel | 10 kVA | 15 kVA | 20 kVA | 30 kVA | 40 kVA |
|--------------------------|---------------|---------------|---------------|---------------|---------------|
| 2 (A) | 35 | 50 | 63 | 100 | 125 |
| 3 (A) | 50 | 80 | 100 | 160 | 200 |
| 4 (A) | 63 | 100 | 200 | 200 | 250 |

Q3 and Q4 in Parallel Redundant Systems (n+1)

| Units in parallel | 10 kVA | 15 kVA | 20 kVA | 30 kVA | 40 kVA |
|--------------------------|---------------|---------------|---------------|---------------|---------------|
| 2 (A) | 16 | 25 | 35 | 50 | 63 |
| 3 (A) | 35 | 50 | 63 | 100 | 125 |
| 4 (A) | 50 | 80 | 100 | 160 | 200 |

Minimum Breaker Settings

3:3 380 V, 400 V, 415 V

| | | 800% overload bypass operation | 150% overload normal/battery operation | 125% overload normal/battery operation | Continuously |
|---------------|---------------------|---------------------------------------|---|---|---------------------|
| | Duration | 500 ms | 60 s | 10 min | |
| 10 kVA | Mains input | - ¹ | - | - | 18.0 A |
| | Static bypass input | 121.5 A | - | - | 16.7 A |
| | UPS output | 121.5 A | 22.8 A | 19 A | 16.7 A |
| 15 kVA | Mains input | - ¹ | - | - | 26.7 A |
| | Static bypass input | 182 A | - | - | 25.1 A |
| | UPS output | 182 A | 34.2 A | 25.4 A | 25.1 A |
| 20 kVA | Mains input | - ¹ | - | - | 35.5 A |
| | Static bypass input | 244 A | - | - | 33.4 A |
| | UPS output | 244 A | 45.6 A | 38 A | 33.4 A |
| 30 kVA | Mains input | - ¹ | - | - | 53.0 A |
| | Static bypass input | 364 A | - | - | 50.1 A |
| | UPS output | 364 A | 68.4 A | 57 A | 50.1 A |
| 40 kVA | Mains input | - ¹ | - | - | 70.6 A |
| | Static bypass input | 487 A | - | - | 66.9 A |
| | UPS output | 487 A | 91.2 A | 76 A | 66.9 A |

¹ For single mains systems, use the higher value of mains and static bypass

3:1 380 V, 400 V, 415 V


| | | 800% overload bypass operation | 150% overload normal/battery operation | 125% overload normal/battery operation | Continuously |
|---------------|-----------------|---------------------------------------|---|---|---------------------|
| | Duration | 500 ms | 60 s | 10 min. | |
| 15 kVA | Mains input | | | | 26.7 A |
| | Bypass input | 547 A | | | 75.2 A |
| | Output | 547 A | 103 A | 86 A | 75.2 A |
| 20 kVA | Mains input | | | | 35.5 A |
| | Bypass input | 730 A | | | 100 A |
| | Output | 730 A | 137 A | 114 A | 100 A |
| 30 kVA | Mains input | | | | 53.0 A |
| | Bypass input | 1094 A | | | 151 A |
| | Output | 1094 A | 205 A | 171 A | 151 A |

| | | 800% overload bypass operation | 150% overload normal/battery operation | 125% overload normal/battery operation | Continuously |
|---------------|-----------------|---------------------------------------|---|---|---------------------|
| | Duration | 500 ms | 60 s | 10 min. | |
| 40 kVA | Mains input | | | | 70.6 A |
| | Bypass input | 1459 A | | | 201A |
| | Output | 1459 A | 274 A | 228 A | 201 A |

Communication and Management

Network Management Card

The system is equipped with one network management card for remote monitoring and control of an individual UPS by connecting it directly to the network.

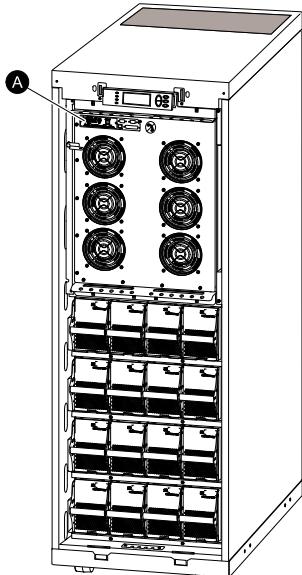


A Network Management Card

Input and Output Contacts

Pins 7 and 8 are for external charge control. When 7 and 8 are closed, the UPS charges batteries with a pre-defined percentage (0-25-50-75-100%) of the maximum charging power. To be used in generator applications, or if special codes require control of charging.

Pins 5 and 6 are for external maintenance bypass Q3 (auxiliary switch N/C type). When Q3 is closed, signals are fed back to the UPS controller.

Pins 1 to 4 are for battery measurement (only applicable to APC XR Battery Enclosures).

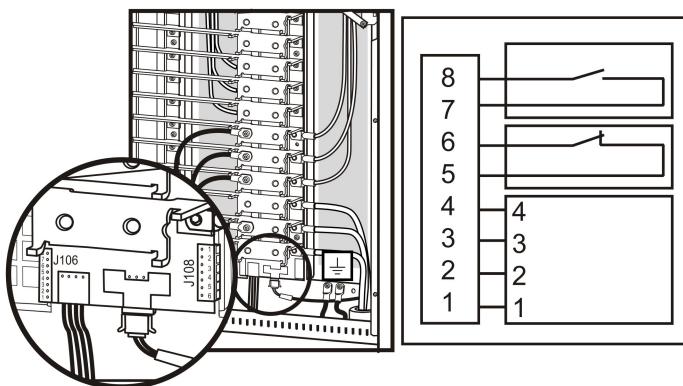


| Pin | Description |
|-----|--|
| 8 | External charging control return |
| 7 | External control of charging |
| 6 | Q3 active return |
| 5 | Q3 active |
| 4 | Battery measurement supply ¹ |
| 3 | Battery unit quantity ¹ |
| 2 | Maximum battery temperature ¹ |
| 1 | Battery measurement return ¹ |

¹ To be used with APC XR Battery Enclosure.





EPO

J108 Pin Connections

| Pin | Description |
|-----|----------------------------|
| 1 | Normally open EPO |
| 2 | Normally open EPO return |
| 3 | Normally closed EPO |
| 4 | Normally closed EPO return |
| 5 | + 24 V SELV supply |
| 6 | SELV ground |

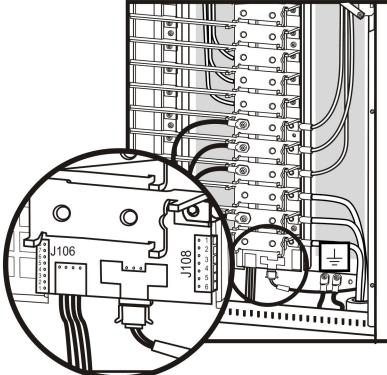

EPO Options

| | |
|---|--|
|  | <p>Dry Contacts Normally Open EPO is activated when pin 1 is connected to pins 3 and 5. Connections: 2-4-6, 3-5 and 1 (normally open)</p> |
|  | <p>+24 V Normally Open EPO is activated when an isolated SELV 24 VDC voltage is supplied on pin 1 with reference to pin 2. Connections: 3-5 and 4-6.</p> |
|  | <p>Dry Contacts Normally Closed EPO is activated when a connection from pin 3 to pin 5 is opened. Connections: 4-6.</p> |
|  | <p>+24 V Normally Closed EPO is activated when a SELV 24 VDC voltage is removed from pin 3 with reference to pin 4.</p> |

Compliance

| | |
|---------------------------|---------------------------------|
| Directives for CE marking | 2006/95/EC 2004/108/EC |
| Safety | EN/IEC62040-1 |
| EMC | EN/IEC62040-2 (class C2 and C3) |
| Performance | VFI-SS-112 |

Options

Parallel MBP - Wall-Mount

- For a line-up-and-match solution with up to three UPS units in parallel
- Two versions for 10-20 kVA and 30-40 kVA UPS units
- Two ratings: 60 kVA and 120 kVA
- Top or bottom cable entry
- Including three communication boards
- With lamps for status indication

Empty Cabinet for batteries - floor-mount


- For a line-up-and-match solution for 3rd party batteries
- Up to eight trays for 32 customer-supplied batteries (16 on + bus and 16 on- bus). Maximum size of battery 197 x 165 x 175 mm
- Including battery breaker
- Top or bottom cable entry

Empty Cabinet for Transformer - floor-mount

- For a line-up-and-match solution for 3rd party transformers
- Including mounting rails for transformer
- Top or bottom cable entry

Parallel Capabilities

Up to four UPS units can be connected in parallel via the Parallel Communication Kit. In July 2010 the 3:1 version becomes available in parallel.

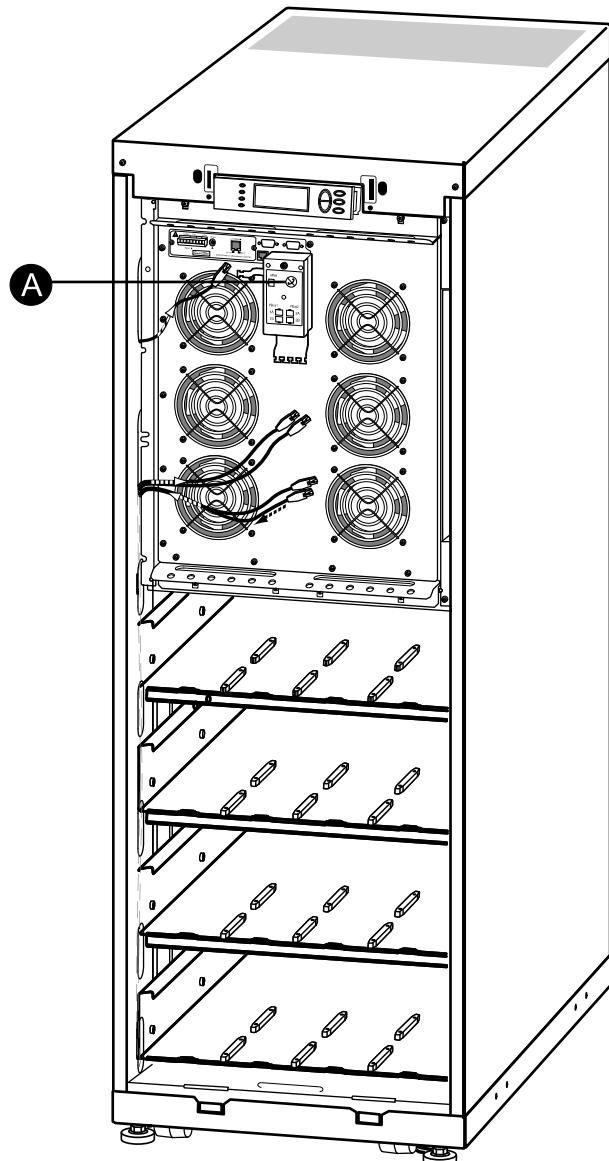


A

Parallel Communication Box

Communication Cables

Schematic of the PBus Cables Layout

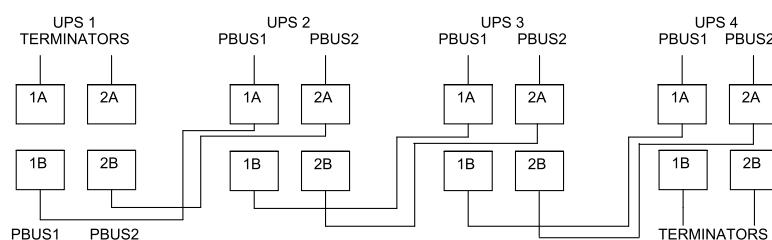



Note: If the configuration consists of only two UPSs, the terminators must be installed in UPS 2. With three UPSs the terminators must be installed in UPS 3.

System Arrangements


Examples with two parallel systems using interconnection plates/baying kits.



Note: UPS units and their respective XR Battery Enclosure can be bayed together. XR Battery Enclosures must never be shared in a parallel UPS system.

Overview of Power Connections

The below diagrams shows a parallel system with three UPS units and XR Battery Enclosures.

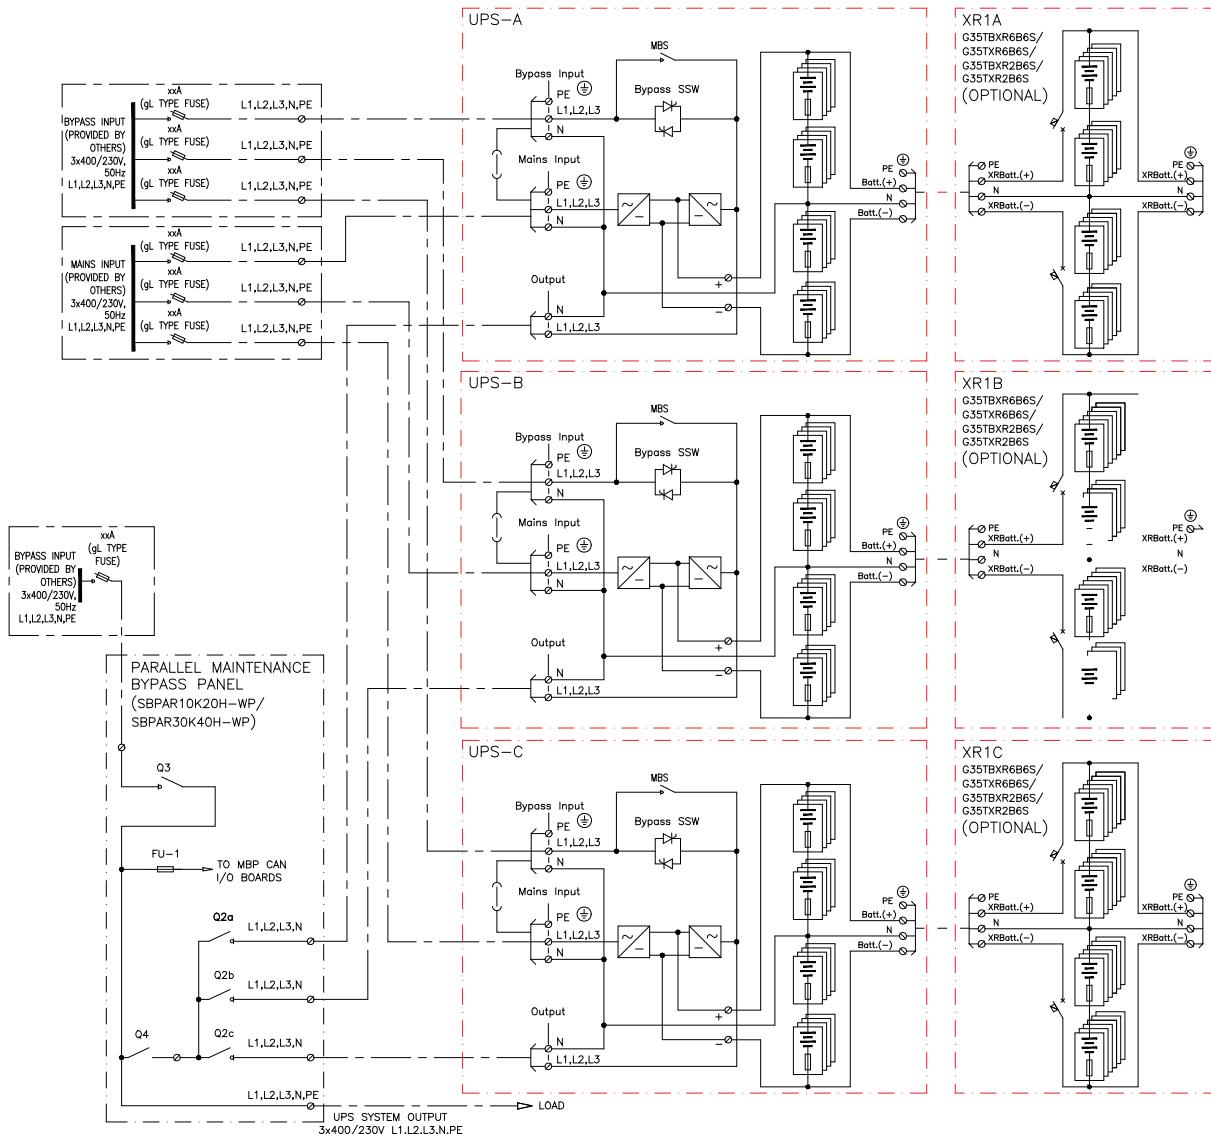

Worldwide Customer Support

Customer support for this or any other product is available at no charge:

- Contact the Customer Support Center by telephone or e-mail. For local, country-specific centers: go to www.apc.com/support/contact for contact information.

© APC by Schneider Electric. APC and the APC logo are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies. All other trademarks are property of their respective owners.