



Stunning Detail and Color for Visually Immersive Gaming

XG2700-4K





A monitor fit for competitors, adventurists, and strategists, the ViewSonic® XG2700-4K delivers an immersive visual experience where seeing is not only believing, but it's the difference between blinding defeat and brilliant victory. With stunning 3840x2160 resolution and SuperClear® IPS panel technology, this monitor delivers over 8 million pixels of sharp and refined color. At four-times the pixels of Full HD, this 4K Ultra HD monitor transports you to a world of unmatched graphical detail. What's more, an array of customizable prostyle color settings empowers you with the most accurate colors for the most realistic experience across gaming genres. This incredible alchemy of detail and color is fully realized with VESA Adaptive-Sync technology: a combination that delivers tear-free, picture-perfect gaming every time. With an arsenal of incredible detail and color at your disposal, you'll see everything your opponents can't.

Key Features:

Stunning 4K Ultra HD resolution

SuperClear® IPS panel technology

AMD FreeSync™ technology

Low input lag for seamless gaming experience

Black stabilization for ultimate visibility


Designed for:

Gaming Entertainment

27" 4K Ultra HD Gaming Monitor with SuperClear® IPS Panel Technology



XG2700-4K

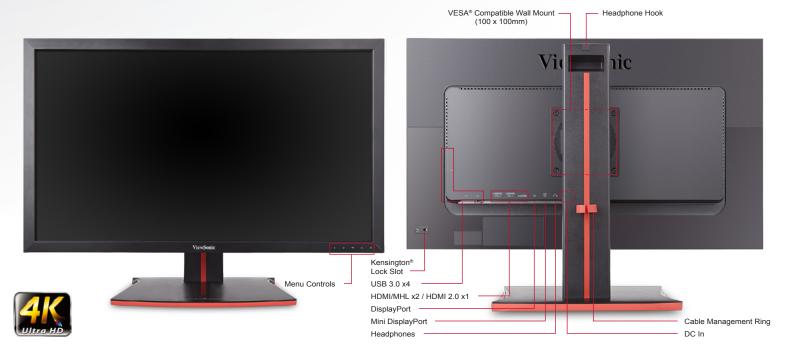

Specifications

| LCD PANEL | Type Display Area Optimum Resolution Brightness Contrast Ratio Dynamic Contrast Ratio Viewing Angles Colors Response Time Backlight Backlight Life Panel Surfase | 178° horizontal, 178° vertical 1.07B 10bit (8bit + A-FRC) 5ms (GTG) White-light LED | ERGONOMICS | Tilt Swivel Rotation Height Adjust | Forward 5° / Back 15° 175° 0–90° 0~120mm |
|---------------|--|---|---------------------------|--|---|
| | | | POWER | Voltage Consumption Optimize Conserve | AC 100–240V (universal), 50 / 60Hz 45W (typ.) / 46W (max.) 35.5W (typ.) 25.5W (typ.) |
| | | | OPERATING CONDITIONS | Temperature Humidity | 32–104° F (0–40° C) 20–90% (non-condensing) |
| VIDEO INPUT | Digital Frequency Sync | DisplayPort, HDMI Fh: 15-204kHz, Fv: 24~120Hz PCI-E, TMDS, CPU GIO | DIMENSIONS (W x H x D) | Physical with Stand Physical without Stand Packaging | 25.3 x 21.9 x 9.1 in. / 642.7 x 555.6 x 231 mm 25.3 x 15.0 x 2.2 in. / 642.7 x 381.7 x 56 mm 29.8 x 19.2 x 8.5 in. / 756 x 487 x 215 mm |
| COMPATIBILITY | PC Mac® | Up to 3840x2160 non-interlaced Up to 3840x2160 | WEIGHT | Net with Stand Net without Stand Gross | 18.4 lb. / 8.4 kg 11.8 lb. / 5.4 kg 23.6 lb. / 10.7 kg |
| CONNECTOR | Video In Headphones | DisplayPort, Mini DisplayPort, HDMI/MHL x2, HDMI 2.0 3.5mm mini jack | WALL MOUNT | VESA compatible | 100 x 100 mm |
| | USB Power | 3.0 (x4), Type B upstream DC In | REGULATIONS | | CB, CE, WEEE, RoHS, ErP, REACH, UL, cUL, FCC-B, Mexico CoC, EPEAT Gold, ENERGY STAR |
| CONTROLS | Front Panel Buttons OSD | 1, 2, Down, Up, Power Contrast/Brightness, Input select, Audio adjust, Color adjust, Information, Manual image adjust, Advanced im- age adjust, Setup menu, Memory recall (See user guide for complete OSD functionality) | RECYCLE/DISPO | DSAL | Please dispose of in accordance with local, state, or federal laws |
| | | | WARRANTY | | Three-year limited warranty on parts, labor and backlight |

Optional Accessories

| HDMI to DVI cable 6FT | |
|--|---------------|
| Mini DisplayPort to DisplayPort cable 6FT | CB-00010958 |
| DisplayPort to DisplayPort cable 30FT | CB-00010684 |
| DisplayPort to DisplayPort cable 6FT | CB-00010555 |
| DisplayPort Male to VGA Female Adapter (Single Link) | CB-00011486 |
| DisplayPort to DVI Adapter | LCD-CABLE-001 |
| Deskton Display Wall Mount Kit | LCD-W/MK-001 |

What's in the box?

XG2700-4K monitor, AC/DC Adapter, Power cable, Mini DisplayPort to DisplayPort cable, USB 3.0 cable, Quick Start Guide, ViewSonic Wizard CD





















