


### Overview

#### Product overview


The HP 10500 Switch Series sets a new benchmark for performance, reliability, and scalability with a next-generation Clos architecture.

Designed for enterprise campus core networks, the HP 10500 Switch Series enables a cloud-connected and media-rich capable infrastructure. The 10500 series provides industry-leading 10GbE/40GbE port density, 3-microsecond latency, and very low energy consumption. With HP Intelligent Resilient Framework (IRF) technology, the scalability and resiliency of the 10500 switch series can be extended and virtualized across up to four chassis with a single management interface, enabling flatter, more agile networks.

The HP 10500 Switch Series, along with the entire HP FlexNetwork architecture, can be seamlessly managed through single-pane-of-glass management with HP Intelligent Management Center (IMC).

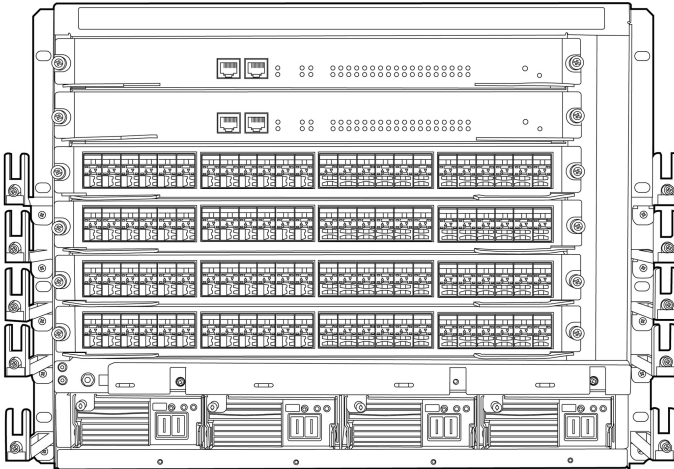


**HP 10504 Switch Chassis**

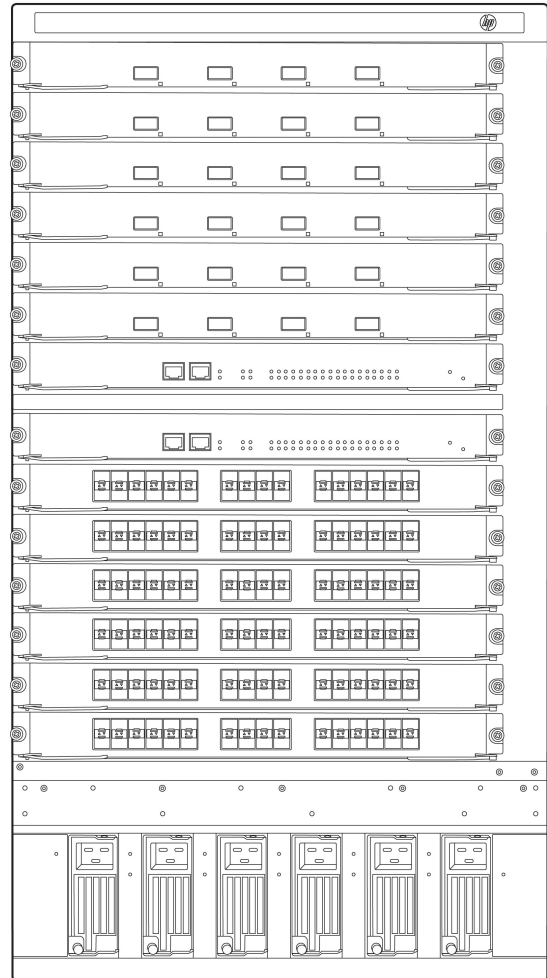


**HP 10512 Switch Chassis**

### Overview

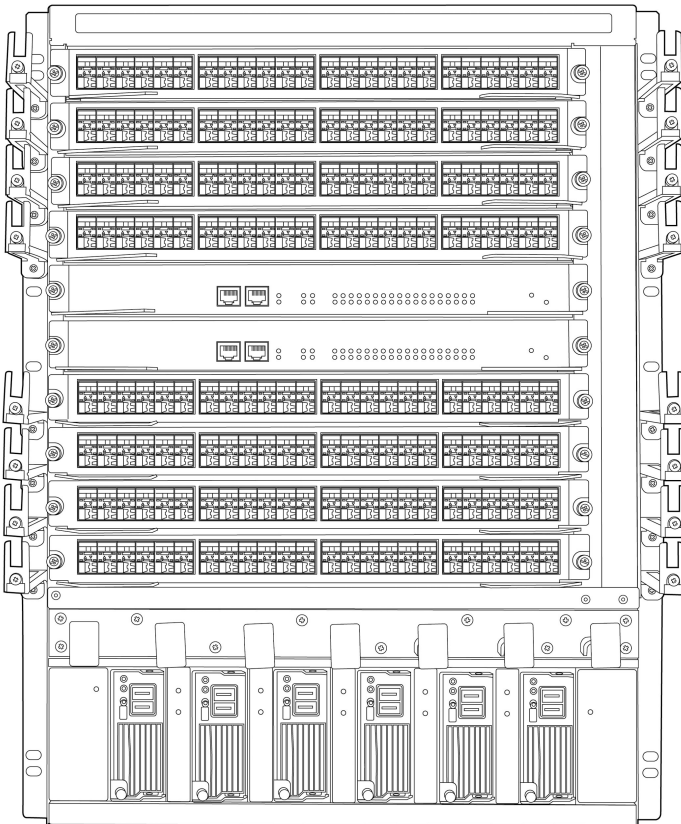

HP 10508 Switch Chassis

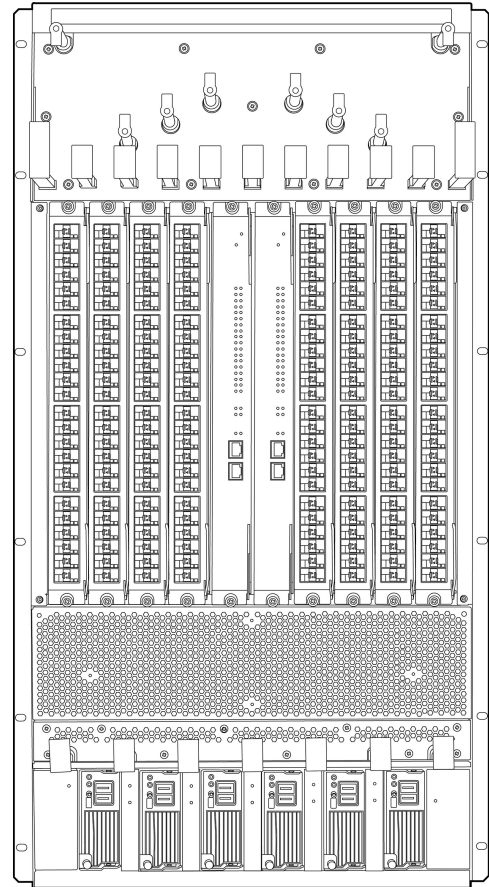

HP 10508-V Switch Chassis

### Key features

- Advanced, next-generation Clos architecture
- More than 11 terabit-per-second switching capacity
- Feature-rich, including IPv6 and MPLS functionality
- HP IRF technology virtualizes up to four chassis
- Ultra-high 1/10/40GbE density; 100GbE ready

### Features and benefits

#### Product architecture

- **Advanced Comware modular operating system**  
brings native high stability, independent process monitoring, and restart through the modular design and multiple processes of HP Comware v7 software; allows individual software modules to be upgraded for higher availability and supports enhanced serviceability functions
- **In-service software upgrade (ISSU)**  
provides an upgrade of the entire chassis, or an individual task or process, with zero packet loss
- **Distributed architecture with separation of data and control**  
delivers enhanced fault tolerance and facilitates continuous operation and zero service disruption during planned or unplanned

### Overview

control-plane events

- **NEW Multitenant Device Context (MDC)**

virtualizes a physical switch into multiple logical devices, with each logical switch having its own processes, configuration, and administration

### Performance

- **High-speed fully distributed architecture**

provides up to 11.52 Tb/s switching capacity with released line cards and up to 13.72 Tb/s switching fabric capacity with Type D fabric; modules provide nonblocking wirespeed 10GbE/40GbE performance and future 100GbE expansion capability; with four fabrics, the switch delivers up to 8.571 billion pps throughput; all switching and routing is performed in the I/O modules; meets the demand of bandwidth-intensive applications today and in the future

- **Scalable system design**

provides investment protection to support future technologies and higher-speed connectivity, as the switch is designed for increased backplane bandwidth

- **Flexible chassis selection**

enables you to tailor product selections to your budget with a choice of four chassis: the 10504 switch (four open module slots), 10508 switch (eight open module slots), 10508-V switch (eight vertical open module slots), and 10512 switch (12 open module slots)

### Connectivity

- **High-density port connectivity**

offers up to 12 interface module slots; provides up to 96 40GbE ports, 576 10GbE ports, and 576 gigabit fiber/electrical ports per system

- **Jumbo frames**

allow high-performance backups and disaster-recovery systems; provide a maximum frame size of 9K bytes

- **Loopback**

supports internal loopback testing for maintenance purposes and an increase in availability; loopback detection protects against incorrect cabling or network configurations and can be enabled on a per-port or per-VLAN basis for added flexibility

- **Ethernet operations, administration and maintenance (OAM):**

detects data link layer problems that occurred in the "last mile" using the IEEE 802.3ah OAM standard; monitors the status of the link between two devices

- **Flexible port selection**

provides a combination of fiber and copper interface modules, 100/1000BASE-X auto-speed selection, and 10/100/1000BASE-T auto-speed detection plus auto duplex and MDI/MDI-X

- **Monitor link**

collects statistics on performance and errors on physical links, increasing system availability (Comware v5 only)

- **Dual-personality functionality**

includes four 10/100/1000 ports or SFP slots for optional fiber connectivity such as Gigabit-SX, -LX, and -LH, or 100-FX

- **Packet storm protection**

protects against unknown broadcast, unknown multicast, or unicast storms with user-defined thresholds

- **Flow control**

provides back pressure using standard IEEE 802.3x, reducing congestion in heavy traffic situations

### Quality of Service (QoS)

- **IEEE 802.1p prioritization**

delivers data to devices based on the priority and type of traffic

- **Class of Service (CoS)**

sets the IEEE 802.1p priority tag based on IP address, IP Type of Service (ToS), Layer 3 protocol, TCP/UDP port number, source

### Overview

- port, and DiffServ
- **Bandwidth shaping**
  - **Port-based rate limiting**  
provides per-port ingress-/egress-enforced increased bandwidth
  - **Classifier-based rate limiting**  
uses an access control list (ACL) to enforce increased bandwidth for ingress traffic on each port
  - **Reduced bandwidth**  
provides per-port, per-queue egress-based reduced bandwidth
- **Traffic policing**  
supports Committed Access Rate (CAR) and line rate
- **Congestion avoidance**  
Weighted Random Early Detection (WRED)/Random Early Detection (RED)
- **Powerful QoS feature**  
supports the following congestion actions: strict priority (SP) queuing, weighted round robin (WRR), weighted fair queuing (WFQ), and WRED

### Resiliency and high availability

- **Redundant/Load-sharing fabrics, management, fan assemblies, and power supplies**  
increase total performance and power available while providing hitless, stateful failover
- **Hot-swappable modules**  
allow replacement of modules without any impact on other modules
- **Separate data and control paths**  
keep control separated from services and keep service processing isolated; increase security and performance
- **Passive design system**  
backplane has no active components for increased system reliability
- **Intelligent Resilient Framework (IRF)**  
creates virtual resilient switching fabrics, where two or more switches perform as a single L2 switch and L3 router; switches do not have to be co-located and can be part of a disaster-recovery system; servers or switches can be attached using standard LACP for automatic load balancing and high availability; can eliminate the need for complex protocols like Spanning Tree Protocol, Equal-Cost Multipath (ECMP), or VRRP, thereby simplifying network operation
- **IRF capability**  
provides single IP address management for a resilient virtual switching fabric of up to four switches
- **Rapid Ring Protection Protocol (RRPP)**  
provides standard sub 200 ms recovery for ring-based Ethernet topology (Comware v5 only)
- **Virtual Router Redundancy Protocol (VRRP)**  
allows groups of two routers to dynamically back each other up to create highly available routed environments
- **Device Link Detection Protocol (DLDP)**  
monitors link connectivity and shuts down ports at both ends if unidirectional traffic is detected, preventing loops in STP-based networks
- **Hitless patch upgrades**  
allow patches and new service features to be installed without restarting the equipment, increasing network uptime and facilitating maintenance
- **IEEE 802.3ad Link Aggregation Control Protocol (LACP)**  
supports up to 1024 trunk groups and up to 16 members per trunk; supports static or dynamic groups and a user-selectable hashing algorithm
- **Graceful restart**  
supports graceful restart for OSPF, IS-IS, BGP, LDP, and RSVP; the network remains stable during the active-standby switchover; after the switchover, the device quickly learns the network routes by communicating with adjacent routers; forwarding remains uninterrupted during the switchover to achieve nonstop forwarding (NSF)

### Overview

- **Ultrafast protocol convergence (sub second) with standard-based failure detection—Bidirectional Forwarding Detection (BFD)**  
enables link connectivity monitoring and reduces network convergence time for RIP, OSPF, BGP, IS-IS, VRRP, MPLS, and IRF
- **Smart link**  
allows 100 ms failover between links
- **Multiple internal power supplies**  
provides high reliability; 10504 switch provides 3+1 redundancy; 10508, 10508-V, and 10512 switches provide 5+1 redundancy

### Virtual private network (VPN)

- **IPSec**  
provides secure tunneling over an untrusted network such as the Internet or a wireless network; offers data confidentiality, authenticity, and integrity between two network endpoints
- **Generic Routing Encapsulation (GRE)**  
can be used to transport Layer 2 connectivity over a Layer 3 path in a secured way; enables the segregation of traffic from site to site
- **Manual or automatic Internet Key Exchange (IKE)**  
provides both manual or automatic key exchange required for the algorithms used in encryption or authentication; auto-IKE allows automated management of the public key exchange, providing the highest levels of encryption

### Management

- **Management interface control**  
each of the following interfaces can be enabled or disabled depending on security preferences: console port, telnet port, or reset button
- **Industry-standard CLI with a hierarchical structure**  
reduces training time and expenses, and increases productivity in multivendor installations
- **Management security**  
multiple privilege levels with password protection restrict access to critical configuration commands; ACLs provide telnet and SNMP access; local and remote syslog capabilities allow logging of all access
- **SNMPv1, v2, and v3**  
provide complete support of SNMP; provide full support of industry-standard Management Information Base (MIB) plus private extensions; SNMPv3 supports increased security using encryption
- **sFlow (RFC 3176)**  
provides scalable ASIC-based wirespeed network monitoring and accounting with no impact on network performance; this allows network operators to gather a variety of sophisticated network statistics and information for capacity planning and real-time network monitoring purposes
- **Remote monitoring (RMON)**  
uses standard SNMP to monitor essential network functions; supports events, alarm, history, and statistics group plus a private alarm extension group (Comware v5 only)
- **FTP, TFTP, and SFTP support**  
FTP allows bidirectional transfers over a TCP/IP network and is used for configuration updates; Trivial FTP is a simpler method using User Datagram Protocol (UDP); Secure File Transfer Protocol (SFTP) runs over an SSH tunnel to provide additional security
- **Debug and sampler utility**  
supports ping and traceroute for both IPv4 and IPv6
- **Network Time Protocol (NTP)**  
synchronizes timekeeping among distributed time servers and clients; keeps timekeeping consistent among all clock-dependent devices within the network so that the devices can provide diverse applications based on the consistent time
- **Network Quality Analyzer (NQA)**  
analyzes network performance and service quality by sending test packets, and provides network performance and service

### Overview

quality parameters such as jitter, TCP, or FTP connection delays and file transfer rates; allows a network manager to determine overall network performance and to diagnose and locate network congestion points or failures

- **Information center**

provides a central repository for system and network information; aggregates all logs, traps, and debugging information generated by the system and maintains them in order of severity; outputs the network information to multiple channels based on user-defined rules

- **IEEE 802.1AB Link Layer Discovery Protocol (LLDP)**

advertises and receives management information from adjacent devices on a network, facilitating easy mapping by network management applications

- **Dual flash images**

provide independent primary and secondary operating system files for backup while upgrading

- **Multiple configuration files**

can be stored to the flash image

### Layer 2 switching

- **VLAN**

supports up to 4,094 port-based or IEEE 802.1Q-based VLANs; also supports MAC-based VLANs, protocol-based VLANs, and IP-subnet-based VLANs for added flexibility (Comware v7 supports port-based VLANs only)

- **Port isolation**

increases security by isolating ports within a VLAN while still allowing them to communicate with other VLANs

- **Bridge Protocol Data Unit (BPDU) tunneling**

transmits Spanning Tree Protocol BPDUs transparently, allowing correct tree calculations across service providers, WANs, or MANs

- **GARP VLAN Registration Protocol**

allows automatic learning and dynamic assignment of VLANs

- **Port mirroring**

duplicates port traffic (ingress and egress) to a local or remote monitoring port; supports four mirroring groups, with an unlimited number of ports per group

- **Spanning Tree Protocol**

fully supports standard IEEE 802.1D Spanning Tree Protocol, IEEE 802.1w Rapid Spanning Tree Protocol for faster convergence, and IEEE 802.1s Multiple Spanning Tree Protocol

- **Internet Group Management Protocol (IGMP) and Multicast**

Listener Discovery (MLD) protocol snooping effectively control and manage the flooding of multicast packets in a Layer 2 network

- **IEEE 802.1ad QinQ and Selective QinQ**

increase the scalability of an Ethernet network by providing a hierarchical structure; connect multiple LANs on a high-speed campus or metro network

- **Per-VLAN Spanning Tree Plus (PVST+)**

allows each VLAN to build a separate spanning tree to improve link bandwidth usage in network environments with multiple VLANs (Comware v5 only)

### Layer 3 services

- **Address Resolution Protocol (ARP)**

determines the MAC address of another IP host in the same subnet; supports static ARPs; gratuitous ARP allows detection of duplicate IP addresses; proxy ARP allows normal ARP operation between subnets or when subnets are separated by a Layer 2 network

- **User Datagram Protocol (UDP) helper**

redirects UDP broadcasts to specific IP subnets to prevent server spoofing



### Overview

- **Dynamic Host Configuration Protocol (DHCP)**  
simplifies the management of large IP networks and supports client and server; DHCP Relay enables DHCP operation across subnets
- **Domain Name System (DNS)**  
provides a distributed database that translates domain names and IP addresses, which simplifies network design; supports client and server

### Layer 3 routing

- **Static IPv4 routing**  
provides simple manually configured IPv4 routing
- **Routing Information Protocol (RIP)**  
uses a distance vector algorithm with UDP packets for route determination; supports RIPv1 and RIPv2 routing; includes loop protection
- **Open shortest path first (OSPF):**  
delivers faster convergence; uses this link-state routing Interior Gateway Protocol (IGP), which supports ECMP, NSSA, and MD5 authentication for increased security and graceful restart for faster failure recovery
- **Intermediate system to intermediate system (IS-IS)**  
uses a path vector Interior Gateway Protocol (IGP), which is defined by the ISO organization for IS-IS routing and extended by IETF RFC 1195 to operate in both TCP/IP and the OSI reference model (Integrated IS-IS)
- **Border Gateway Protocol 4 (BGP-4)**  
delivers an implementation of the Exterior Gateway Protocol (EGP) utilizing path vectors; uses TCP for enhanced reliability for the route discovery process; reduces bandwidth consumption by advertising only incremental updates; supports extensive policies for increased flexibility; scales to very large networks
- **Policy-based routing**  
makes routing decisions based on policies set by the network administrator
- **IP performance optimization**  
provides a set of tools to improve the performance of IPv4 networks; includes directed broadcasts, customization of TCP parameters, support of ICMP error packets, and extensive display capabilities
- **Unicast Reverse Path Forwarding (uRPF)**  
limits erroneous or malicious traffic in accordance with RFC 3074
- **Static IPv6 routing**  
provides simple, manually configured IPv6 routing
- **Dual IP stack**  
maintains separate stacks for IPv4 and IPv6 to ease the transition from an IPv4-only network to an IPv6-only network design
- **Routing Information Protocol next generation (RIPng)**  
extends RIPv2 to support IPv6 addressing
- **OSPFv3**  
provides OSPF support for IPv6
- **IS-IS for IPv6**  
extends IS-IS to support IPv6 addressing
- **BGP+**  
extends BGP-4 to support Multiprotocol BGP (MBGP), including support for IPv6 addressing
- **Multiprotocol Label Switching (MPLS)**  
uses BGP to advertise routes across Label Switched Paths (LSPs), but uses simple labels to forward packets from any Layer 2 or Layer 3 protocol, thus reducing complexity and increasing performance; supports graceful restart for reduced failure impact; supports LSP tunneling and multilevel stacks
- **Multiprotocol Label Switching (MPLS) Layer 3 VPN**  
allows Layer 3 VPNs across a provider network; uses MP-BGP to establish private routes for increased security; supports RFC 2547bis multiple autonomous system VPNs for added flexibility

### Overview

- **Multiprotocol Label Switching (MPLS) Layer 2 VPN**  
establishes simple Layer 2 point-to-point VPNs across a provider network using only MPLS Label Distribution Protocol (LDP); requires no routing and therefore decreases complexity, increases performance, and allows VPNs of non-routable protocols; uses no routing information for increased security; supports Circuit Cross Connect (CCC), Static Virtual Circuits (SVCs), Martini draft, and Kompella-draft technologies
- **Virtual Private LAN Service (VPLS)**  
establishes point-to-multipoint Layer 2 VPNs across a provider network
- **Super VLAN**  
saves IP address space using the RFC 3069 standard (also called VLAN Aggregation)
- **Equal-Cost Multipath (ECMP)**  
enables multiple equal-cost links in a routing environment to increase link redundancy and scale bandwidth
- **IPv6 tunneling**  
is an important element for the transition from IPv4 to IPv6; allows IPv6 packets to traverse IPv4-only networks by encapsulating the IPv6 packet into a standard IPv4 packet; supports manually configured, 6to4, Intra-Site Automatic Tunnel Addressing Protocol (ISATAP) tunnels, and IPv6 on VPN to Provider Edge (6VPE) router tunnel

### Security

- **Access control list (ACL)**  
supports powerful ACLs for both IPv4 and IPv6; ACLs are used for filtering traffic to prevent unauthorized users from accessing the network, or for controlling network traffic to save resources; rules can either deny or permit traffic to be forwarded; rules can be based on a Layer 2 header or a Layer 3 protocol header; rules can be set to operate on specific dates or times
- **Remote Authentication Dial-In User Service (RADIUS)**  
eases switch security access administration by using a password authentication server
- **Terminal Access Controller Access-Control System (TACACS+)**  
delivers an authentication tool using TCP with encryption of the full authentication request, providing additional security
- **Switch management logon security**  
helps secure switch CLI logon by optionally requiring either RADIUS or TACACS+ authentication
- **Secure shell (SSHv2)**  
uses external servers to securely log in to a remote device; with authentication and encryption, it protects against IP spoofing and plain-text password interception; increases the security of Secure FTP (SFTP) transfers
- **DHCP snooping**  
helps ensure that DHCP clients receive IP addresses from authorized DHCP servers and maintain a list of DHCP entries for trusted ports; prevents reception of fake IP addresses and reduces ARP attacks, improving security
- **IP Source Guard**  
filters packets on a per-port basis, which prevents illegal packets from being forwarded
- **ARP attack protection**  
protects from attacks using a large number of ARP requests by using a host-specific, user-selectable threshold
- **Port security**  
allows access only to specified MAC addresses, which can be learned or specified by the administrator
- **IEEE 802.1X**  
provides port-based user authentication with support for Extensible Authentication Protocol (EAP) MD5, TLS, TTLS, and PEAP with choice of AES, TKIP, and static or dynamic WEP encryption for protecting wireless traffic between authenticated clients and the access point
- **Media access control (MAC) authentication**  
provides simple authentication based on a user's MAC address; supports local or RADIUS-based authentication
- **Multiple user authentication methods**
  - **IEEE 802.1X**  
is an industry-standard method of user authentication using an IEEE 802.1X supplicant on the client in conjunction with a RADIUS server



### Overview

- **Web-based authentication**  
is similar to IEEE 802.1X and provides a browser-based environment to authenticate clients that do not support the IEEE 802.1X supplicant
- **MAC-based authentication**  
authenticates the client with the RADIUS server based on the client's MAC address
- **DHCP protection**  
blocks DHCP packets from unauthorized DHCP servers, preventing denial-of-service attacks
- **Endpoint Admission Defense (EAD)**  
provides security policies to users accessing a network

### Convergence

- **LLDP-MED (Media Endpoint Discovery)**  
defines a standard extension of LLDP that stores values for parameters such as QoS and VLAN to automatically configure network devices such as IP phones
- **Multicast Source Discovery Protocol (MSDP)**  
allows multiple PIM-SM domains to interoperate; is used for inter-domain multicast applications (Comware v5 only)
- **Internet Group Management Protocol (IGMP)**  
utilizes Any-Source Multicast (ASM) or Source-Specific Multicast (SSM) to manage IPv4 multicast networks; supports IGMPv1, v2, and v3
- **Protocol Independent Multicast (PIM)**  
defines modes of Internet IPv4 and IPv6 multicasting to allow one-to-many and many-to-many transmission of information; supports PIM Dense Mode (DM), Sparse Mode (SM), and Source-Specific Mode (SSM)
- **Multicast Border Gateway Protocol (MBGP)**  
allows multicast traffic to be forwarded across BGP networks and kept separate from unicast traffic
- **Multicast Listener Discovery (MLD) protocol**  
establishes, maintains, and manages IPv6 multicast groups and networks; supports v1 and v2 and utilizes Any-Source Multicast (ASM) or Source-Specific Multicast (SSM)
- **Multicast VLAN**  
allows multiple VLANs to receive the same IPv4 or IPv6 multicast traffic, lessening network bandwidth demand by reducing or eliminating multiple streams to each VLAN
- **Voice VLAN**  
automatically assigns VLAN and priority for IP phones, simplifying network configuration and maintenance (Comware v5 only)

### Integration

- **Open Application Architecture (OAA)**  
provides high-performance application-specific modules fully integrated with the switching architecture; uses the chassis high-speed backplane to access network-related data; increases performance, reduces costs, and simplifies network management
- **VPN firewall module**  
provides enhanced stateful packet inspection and filtering; supports flexible security zones and virtual firewall containment Advanced VPN services with 3DES and AES encryption at high-performance and low-latency Web content filtering Application prioritization and optimization (JD249A; Comware v5 only)
- **Load-balancing module**  
local and global server load-balancing module helps improve traffic distribution using powerful scheduling algorithms, including Layer 4 to 7 services; monitors the health status of servers and firewalls (JD254A; Comware v5 only)
- **NetStream module**  
provides traffic analysis and statistics capture to allow network administrators to rapidly identify network anomalies and security threats, as well as capacity planning information; supports NetFlow v5 and v9 (JD254A; Comware v5 only)
- **Unified wired-WLAN module:**

### Overview

- supports up to 1,024 access points per module
- is for use with selected HP APs (see the HP 10500/7500 20G Unified Wired-WLAN Module data sheet for more details)
- provides N+1, N+N, and 1+1 redundancy with subsecond failover
- provides IPv4/IPv6 and end-to-end QoS
- includes flexible forwarding modes, as well as Wi-Fi Clear Connect Radio Frequency (RF) optimization and integrated IDS
- **VPN 20Gbps 10500 Firewall Module**
  - provides enhanced stateful packet inspection and filtering
  - supports flexible security zones and virtual firewall containment
  - delivers advanced VPN services with 3DES and AES encryption at high performance and low latency
  - offers Web content filtering and application prioritization and optimization

### Additional information

- **Green initiative support**  
provides support for RoHS and WEEE regulations
- **OPEX savings**  
simplifies and streamlines deployment, management, and training through the use of a common operating system, thereby cutting costs as well as reducing the risk of human errors associated with having to manage multiple operating systems across different platforms and network layers
- **Unified HP Comware operating system with modular architecture**  
provides an easy-to-enhance-and-extend feature set, which doesn't require whole-scale changes; all switching, routing, and security platforms leverage the Comware OS, a common unified modular operating system

### Warranty and support

- **1-year Warranty 2.0**  
advance hardware replacement with 10-calendar-day delivery (available in most countries)
- **Electronic and telephone support (for Warranty 2.0)**  
limited electronic and 24x7 telephone support is available from HP for the entire warranty period; to reach our support centers, refer to [www.hp.com/networking/contact-support](http://www.hp.com/networking/contact-support); for details on the duration of support provided with your product purchase, refer to [www.hp.com/networking/warrantysummary](http://www.hp.com/networking/warrantysummary)
- **Software releases**  
to find software for your product, refer to [www.hp.com/networking/support](http://www.hp.com/networking/support); for details on the software releases available with your product purchase, refer to [www.hp.com/networking/warrantysummary](http://www.hp.com/networking/warrantysummary)

### Configuration

**Build To Order: BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.**

HP 10504 Switch Chassis JC613A

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min 1 Power Supply
- 8U - Height

HP 10508 Switch Chassis JC612A

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min 1 Power Supply
- 14U - Height

HP 10508-V Switch Chassis JC611A

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min 1 Power Supply
- 20U - Height

HP 10512 Switch Chassis JC748A

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min 1 Power Supply
- 18U - Height

### Box Level Integration CTO Models

#### CTO Solution Sku

HP 105xx CTO Switch Solution JG504A

- SSP trigger sku

#### CTO Switch Chassis

HP 10504 Switch Chassis JC613A  
See Configuration Note:1, 2

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min 1 Power Supply
- 8U - Height

### Configuration

#### HP 10508 Switch Chassis

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min 1 Power Supply
- 14U - Height

JC612A  
See Configuration  
Note:1, 2

#### HP 10508-V Switch Chassis

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min 1 Power Supply
- 20U - Height

JC611A  
See Configuration  
Note:1, 2

#### HP 10512 Switch Chassis

- Must select min 1 Interface Module
- Must select min 4 Fabric Modules
- Must select min 1 Management Module
- Must select min1 Power Supply
- 18U - Height

JC748A  
See Configuration  
Note:1, 2

#### Configuration Rules:

- Note 1 If the Switch Chassis is to be Factory Integrated (CTO), Then the #0D1 is required on the Switch Chassis and integrated to the JG504A - HP 105xx CTO Enablement. (Min 1/Max 1 Switch per SSP)
- Note 2 If this Switch is selected, Then a Minimum of 1 factory integrated accessory must be ordered and integrated to CTO chassis. See Menu below, option must have a #0D1 to be integrated to the CTO Chassis.

### Internal Power Supplies

(Switch 10504) System (std 0 // max 4) User Selection (min 3 1 // max 4) per switch enclosure

10504 provides 3+1 Redundancy. Select an appropriate number of power supplies based on the maximum output power of your system and redundancy requirements. For component power consumption consult the install guide.

(Switch 10508 and ,10508-V and 10512 ) System (std 0 // max 6) User Selection (min 5 1 // max 6) per switch enclosure

10512 ,10508-V and 10512 provides 5+1 Redundancy. Select an appropriate number of power supplies based on the maximum output power of your system and redundancy requirements. For component power consumption consult the install guide.

#### HP 10500 2500W AC Power Supply

- includes 1 x c19, 2500w

JC610A  
See Configuration Note:  
1,2,3

#### PDU Cable NA/MEX/TW/JP

- C19 PDU Jumper Cord (NA/MEX/TW/JP)

JC610A#B2B



### Configuration

PDU Cable ROW	JC610A#B2C
<ul style="list-style-type: none"><li>C19 PDU Jumper Cord (ROW)</li></ul>	
High Volt Switch to Wall Power Cord	JC610A#B2E
<ul style="list-style-type: none"><li>NEMA L6-20P Cord (NA/MEX/JP/TW)</li></ul>	
HP 10500 2400W DC Power Supply	JC747A See Configuration Note:1, 6

### Configuration Rules:

Note 1	If more than 1 power supply is selected they, must all be the same Sku number.
Note 2	Localization required on orders without #B2B, #B2C or #B2E options.
Note 3	#B2E is Offered only in NA, Mexico, Taiwan and Japan.
Note 6	One of these cables is required when ordering this power supply: (Use #B01 if switch is CTO) - if applicable HP 10500 -48V 3m DC Power Supply Cable JG390A HP 10500 -48V 15m DC Power Supply Cable JG391A
Remarks:	"Drop down under power supply should offer the following options and results: Switch/Router/Power Supply to PDU Power Cord - #B2B in North America, Mexico, Taiwan, and Japan or #B2C ROW. (Watson Default B2B or B2C for Rack Level CTO) Switch/Router/Power Supply to Wall Power Cord - Localized Option (Watson Default for BTO and Box Level CTO) High Volt Switch/Router/Power Supply to Wall Power Cord - #B2E Option. (Offered only in North America, Mexico, Taiwan, and Japan)"

## Modules

### Interface Modules

(10504 Switch Only) System (std 0 // max 4) User Selection (min 1 // max 4) per enclosure

(10508 and 10508-V Switch Only ) System (std 0 // max 8) User Selection (min 1 // max 8) per enclosure

(10512 Switch Only) System (std 0 // max 12) User Selection (min 1 // max 12) per enclosure

HP 10500 4-port 10GbE XFP SE Module	JC620A
<ul style="list-style-type: none"><li>min=0 \ max=4 XFP Transceivers</li></ul>	See Configuration Note:4

### Configuration

HP 10500 4-port 10GbE XFP EA Module <ul style="list-style-type: none"><li>min=0 \ max=4 XFP Transceivers</li></ul>	JC624A See Configuration Note:4
HP 10500 4-port 10GbE XFP EB Module <ul style="list-style-type: none"><li>min=0 \ max=4 XFP Transceivers</li></ul>	JC627A See Configuration Note:4
HP 10500 8-port 10GbE SFP+ EB Module <ul style="list-style-type: none"><li>min=0 \ max=8 SFP+ Transceivers</li></ul>	JC629A See Configuration Note:1, 3
HP 10500 8-port 10GbE SFP+ EA Module <ul style="list-style-type: none"><li>min=0 \ max=8 SFP+ Transceivers</li></ul>	JC630A See Configuration Note:1, 3
HP 10500 8-port 10GbE SFP+ SE Module <ul style="list-style-type: none"><li>min=0 \ max=8 SFP+ Transceivers</li></ul>	JC631A See Configuration Note:1, 3
HP 10500 16-port 10GbE SFP+ SC Module <ul style="list-style-type: none"><li>min=0 \ max=16 SFP+ Transceivers</li></ul>	JC628A See Configuration Note:1, 3
HP 10500 48-port GbE SFP SE Module <ul style="list-style-type: none"><li>min=0 \ max=48 SFP Transceivers</li></ul>	JC619A See Configuration Note:1, 2
HP 10500 48-port GbE SFP EA Module <ul style="list-style-type: none"><li>min=0 \ max=48 SFP Transceivers</li></ul>	JC622A See Configuration Note:1, 2
HP 10500 48-port GbE SFP EB Module <ul style="list-style-type: none"><li>min=0 \ max=48 SFP Transceivers</li></ul>	JC625A See Configuration Note:1, 2
HP 10500 24p GbE / 2p 10GbE XFP SE Mod <ul style="list-style-type: none"><li>min=0 \ max=2 XFP min=0 \ max=24 SFP Transceivers</li></ul>	JC617A See Configuration Note:1, 2, 4
HP 10500 24p GbE / 2p 10GbE XFP EA Mod <ul style="list-style-type: none"><li>min=0 \ max=2 XFP min=0 \ max=24 SFP Transceivers</li></ul>	JC621A See Configuration Note:1, 2, 4
HP 10500 24p GbE / 2p 10GbE XFP EB Mod <ul style="list-style-type: none"><li>min=0 \ max=2 XFP min=0 \ max=24 SFP Transceivers</li></ul>	JC626A See Configuration Note:1, 2, 4



### Configuration

HP 10500 24p 1/10GBASE-T SF Mod <ul style="list-style-type: none"><li>No Transceivers</li></ul>	JG394A
HP 10500 48-port Gig-T EA Module <ul style="list-style-type: none"><li>No Transceivers</li></ul>	JC623A
HP 10500 48-port Gig-T SE Module <ul style="list-style-type: none"><li>No Transceivers</li></ul>	JC618A
HP 7500 Advanced VPN Firewall Module <ul style="list-style-type: none"><li>min=0 \ max=2 SFP Transceivers</li></ul>	JD249A See Configuration Note:6,8,9
HP 10500/11900/7500 20Gbps VPN FW Module <ul style="list-style-type: none"><li>min=0 \ max=2 SFP Transceivers</li></ul>	JG372A See Configuration Note:6,8
HP 7500 Load Balancing Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JD252A See Configuration Note:6,9
HP 7500 SSL VPN Module w/500-user Lic <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JD253A See Configuration Note:6,9
HP 7500 NetStream Monitoring Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JD254A See Configuration Note:6,9
HP 10500 32-port 10GbE SFP+ SF Module <ul style="list-style-type: none"><li>min=0 \ max=32 SFP or SFP+ Transceivers</li></ul>	JC755A See Configuration Note:1, 3
HP 10500 48-port 10GbE SFP+ SF Module <ul style="list-style-type: none"><li>min=0 \ max=48 SFP or SFP+ Transceivers</li></ul>	JC756A See Configuration Note:1, 3
HP 10500 4-port 40GbE QSFP+ SF Module <ul style="list-style-type: none"><li>min=0 \ max=4 QSFP+ Transceivers</li></ul>	JC757A See Configuration Note:5
HP 10500 16p GbE SFP/8p GbE Cmbo SE Mod <ul style="list-style-type: none"><li>min=0 \ max=24 SFP Transceivers</li></ul>	JC763A See Configuration Note:1

### Configuration

HP 10500 8p 40GbE QSFP+ SF Module	JG392A
• min=0 \ max=8 QSFP+ Transceivers	See Configuration Note:5
HP 10500 4p 40GbE CFP SF Module	JG396A
• min=0 \ max=4 CFP Transceivers	See Configuration Note:7
HP 10500/7500 20G Unified Wired-WLAN Mod	JG639A
• No supported Transceivers	See Configuration Note:6,11

### Configuration Rules:

Note 1 The following Transceivers install into this Module: (Use #0D1 if switch is CTO) - if applicable

HP X170 1G SFP LC LH70 1550 Transceiver	JD109A
HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
HP X170 1G SFP LC LH70 1510 Transceiver	JD115A
HP X170 1G SFP LC LH70 1530 Transceiver	JD116A
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X120 1G SFP RJ45 T Transceiver	JD089B
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B

Note 2 The following Transceivers install into this Module (Use #0D1 if switch is CTO) - if applicable:

HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X115 100M SFP LC BX 10-U Transceiver	JD100A
HP X115 100M SFP LC BX 10-D Transceiver	JD101A

Note 3 The following Transceivers install into this Module (Use #0D1 or #B01 if switch is CTO) - if applicable:

HP X130 10G SFP+ LC SR Transceiver	JD092B
HP X130 10G SFP+ LC LRM Transceiver	JD093B
HP X130 10G SFP+ LC LR Transceiver	JD094B
HP X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C

### Configuration

HP X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
HP X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
HP X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
HP X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable	JC784C
HP X130 10G SFP+ LC ER 40km Transceiver	JG234A

Note 4 The following Transceivers install into this Module (Use #0D1 if switch is CTO) - if applicable:

HP X135 10G XFP LC ER Transceiver	JD121A
HP X130 10G XFP LC LR Single Mode 10km 1310nm Transceiver	JD108B
HP X130 10G XFP LC SR Transceiver	JD117B
HP X130 10G XFP LC ZR Single Mode 80km 1550nm Transceiver	JD107A

Note 5 The following 40G Transceivers install into this Module (Use #0D1 or #B01 if switch is CTO) - if applicable:

HP X140 40G QSFP+ MPO SR4 Transceiver	JG325A
HP X240 40G QSFP+ QSFP+ 1m Direct Attach Copper Cable	JG326A
HP X240 40G QSFP+ QSFP+ 3m Direct Attach Copper Cable	JG327A
HP X240 40G QSFP+ QSFP+ 5m Direct Attach Copper Cable	JG328A
HP X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A
HP X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A
HP X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A

Note 6 These modules do not count towards the Minimum 1 module requirement.

Note 7 The following CFP Transceivers install into this Module:

HP X140 40G CFP LC LR4 10km SM Transceiver	JC857A
--	--------

HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B

Note 9 These modules are Not Supported with Management Module JG496A - HP 10500 Type A MPU w/Comware v7 OS.

They are Only Supported with Management Modules JC614A - HP 10500 Main Processing Unit and JG375A - HP 10500 TAA Main Processing Unit.

Note 11 Maximum of this Module per Chassis:  
 JC612A, JG821A, JC611A, JG822A min=0\max=7 per Chassis  
 JC613A, JG820A min=0\max=3 per Chassis  
 JC748A, JG823A min=0\max=11 per Chassis  
 There are no restrictions on which slots these modules may go in.

Remark: JD253A - Additional User licenses available below in the 'Switch Enclosure Options' category.  
 JG639A and JG645A - Additional AP licenses available below in the 'Switch Enclosure Options' category.

### Configuration

#### Fabric Modules

System (std 0 // max 4) User Selection (min 4 // max 4) per enclosure

HP 10504 400Gbps Type A Fabric Module	JC615A See Configuration Note:1, 4
HP 10508/10508-V 720Gbps Type A Fabric Module	JC616A See Configuration Note:2, 4
HP 10504 880Gbps Type B Fabric Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JC751A See Configuration Note:1, 4
HP 10508/10508-V 1.04Tbps Type B Fabric Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JC753A See Configuration Note:2, 4
HP 10512 1.52Tbps Type B Fabric Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JC749A See Configuration Note:3, 4
HP 10512 3.44Tbps Type D Fabric Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JC750A See Configuration Note:3, 4
HP 10504 1.2Tbps Type D Fabric Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JC752A See Configuration Note:1, 4
HP 10508/10508-V 2.32Tbps Type D Fabric Module <ul style="list-style-type: none"><li>No supported Transceivers</li></ul>	JC754A See Configuration Note:2, 4

#### Configuration Rules:

Note 1	These Modules install to the following switches: (Use #0D1 if switch is CTO) - if applicable HP 10504 Switch Chassis JC613A
Note 2	These Modules install to the following switches: (Use #0D1 if switch is CTO) - if applicable HP 10508-V Switch Chassis JC611A HP 10508 Switch Chassis JC612A
Note 3	These Modules install to the following switches: (Use #0D1 if switch is CTO) - if applicable

### Configuration

HP 10512 Switch Chassis JC748A

Note 4 If more than 1 Fabric Module is selected, they must be of the same Type.

### Management Modules

System (standard 0 // maximum 2) User Selection (minimum 1 // maximum 2) per enclosure

HP 10500 Main Processing Unit JC614A  
See Configuration  
Note:1

HP 10500 Type A MPU w/Comware v7 OS JG496A  
See Configuration  
Note:1,2

HP 10500 Type A MPU w/Comware v7 OS JG496A  
See Configuration  
Note:1,2,3

### Configuration Rules:

Note 1 If 2 Management Module are selected, they must be the same Sku number.

Note 2 Note in Watson: This MPU supports CWv7 only and may not have some features from CWv5.

Note 3 The following Interface Modules are Not Supported with this Management Module:

HP 10500/7500 Advanced VPN Firewall Module	JD249A
HP 7500 Load Balancing Module	JD252A
HP 10500/7500 SSL VPN Module with 500-user License	JD253A
HP 10500/7500 NetStream Monitoring Module	JD254A

Remarks: For Switch 10504, these modules can only be inserted into Slots 0 and 1. For Switches 10508 and 10508-V, these modules can only be inserted into Slots 4 and 5. For Switch 10512, these modules can only be inserted into Slots 6 and 7.

## Transceivers

### SFP Transceivers

HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC FX Transceiver	JD102B

### Configuration

HP X110 100M SFP LC LX Transceiver	JD120B
HP X110 100M SFP LC BX 10-U Transceiver	JD100A
HP X110 100M SFP LC BX 10-D Transceiver	JD101A
HP X120 1G SFP RJ45 T Transceiver	JD089B
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X120 1G SFP LC LH40 1550nm XCVR	JD062A
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X125 1G SFP LC LH40 1310nm XCVR	JD061A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X170 1G SFP LC LH70 1550 Transceiver	JD109A
HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
HP X170 1G SFP LC LH70 1510 Transceiver	JD115A
HP X170 1G SFP LC LH70 1530 Transceiver	JD116A

### SFP+ Transceivers

HP X130 10G SFP+ LC SR Transceiver	JD092B
HP X130 10G SFP+ LC LRM Transceiver	JD093B
HP X130 10G SFP+ LC LR Transceiver	JD094B
HP X130 10G SFP+ LC ER 40km Transceiver	JG234A
HP X240 10G SFP+ SFP+ 0.65m DAC Cable	JD095C#B01
HP X240 10G SFP+ SFP+ 1.2m DAC Cable	JD096C#B01
HP X240 10G SFP+ SFP+ 3m DAC Cable	JD097C#B01
HP X240 10G SFP+ SFP+ 5m DAC Cable	JG081C#B01
HP X240 10G SFP+ 7m DAC Cable	JC784C#B01

### XFP Transceivers

HP X130 10G XFP LC ZR 1550nm Transceiver	JD107A
HP X130 10G XFP LC SR Transceiver	JD117B
HP X130 10G XFP LC LR 1310nm Transceiver	JD108B
HP X135 10G XFP LC ER Transceiver	JD121A
HP X180 10G XFP LC LH 80km 1559.79nm DWDM Transceiver	JG232A
HP X180 10G XFP LC LH 80km 1558.98nm DWDM Transceiver	JG231A
HP X180 10G XFP LC LH 80km 1542.94nm DWDM Transceiver	JG230A
HP X180 10G XFP LC LH 80km 1542.14nm DWDM Transceiver	JG229A
HP X180 10G XFP LC LH 80km 1540.56nm DWDM Transceiver	JG228A
HP X180 10G XFP LC LH 80km 1539.77nm DWDM Transceiver	JG227A



### Configuration

HP X180 10G XFP LC LH 80km 1538.98nm DWDM Transceiver JG226A

#### QSFP+ Transceivers

HP X140 40G QSFP+ MPO SR4 Transceiver JG325A  
HP X240 40G QSFP+ QSFP+ 1m DAC Cable JG326A#B01  
HP X240 40G QSFP+ QSFP+ 3m DAC Cable JG327A#B01  
HP X240 40G QSFP+ QSFP+ 5m DAC Cable JG328A#B01  
HP X240 QSFP+ 4x10G SFP+ 1m DAC Cable JG329A#B01  
HP X240 QSFP+ 4x10G SFP+ 3m DAC Cable JG330A#B01  
HP X240 QSFP+ 4x10G SFP+ 5m DAC Cable JG331A#B01

#### CFP Transceivers

HP X140 40G CFP LC LR4 10km SM Transceiver JC857A

### Switch Enclosure Options

#### Mounting Kit

HP X421 Chassis Universal Rck Mntg Kit JC665A  
[See Configuration Note:1](#)

#### Configuration Rules:

**Note 1** If any 10500 switch is installed into a rack, then this Rack Mounting kit is required.

**Remarks:** Default a quantity of 1 when Switch is selected

#### Software Licenses

(10504 Switch Only) System (std 0 // max 3) User Selection (min 0 // max 3) per enclosure

(10508 and 10508-V Switch Only) System (std 0 // max 7) User Selection (min 0 // max 7) per enclosure

(10512 Switch Only) System (std 0 // max 11) User Selection (min 0 // max 11) per enclosure

HP 10500/7500 Wrd-WLAN Mod 128 AP E-LTU JG649AAE  
[See Configuration Note:1](#)

HP Unified Wired-WLAN 128 AP Redundant E-LTU JG902AAE

### Configuration

[See Configuration Note:1](#)

#### Configuration Rules:

**Note 1** Only applies to JG639A and JG645A.

#### Fans

HP 10504 Spare Fan Assembly	JC632A
HP 10508 Spare Fan Assembly	JC633A
HP 10508-V Spare Fan Assembly	JC634A
HP 10512 Spare Top Fan Tray Assembly	JC758A
HP 10512 Spare Bottom Fan Tray Assembly	JC773A

#### Options for the SSL VPN Service Board Modules (JD253x)

HP 7500 SSL VPN 1000-user License <ul style="list-style-type: none"><li>min=0\ max=10 per SSL</li></ul>	JD257A <a href="#">See Configuration Note:1, 2</a>
HP 7500 SSL VPN 1000-user E-LTU <ul style="list-style-type: none"><li>min=0\ max=10 per SSL</li></ul>	JD257AAE <a href="#">See Configuration Note:1, 2</a>
HP 7500 SSL VPN 5000-user License <ul style="list-style-type: none"><li>min=0\ max=2 per SSL</li></ul>	JD258A <a href="#">See Configuration Note:1, 2</a>
HP 7500 SSL VPN 5000-user E-LTU <ul style="list-style-type: none"><li>min=0\ max=10 per SSL</li></ul>	JD258AAE <a href="#">See Configuration Note:1, 2</a>

#### Configuration Rules:

**Note 1** Any mixture of (JD257A, JD258A, JD257AAE, JD258AAE) that equals 10,000 LTU's is the max per any JD253A module the maximum would be based on the module and not the entire switch.

**Note 2** SSL VPN User Licenses are only supported on the following modules:  
JD253A - HP 7500 SSL VPN Module with 500-User License

#### Power Supply Cables

(JC747A) System (std 0 // max 1) User Selection (min 1 // max 1) per DC Power Supply

HP 10500 -48V 3m DC Power Supply Cable	JG390A#B01
HP 10500 -48V 15m DC Power Supply Cable	JG391A#B01

### Technical Specifications

#### HP 10504 Switch Chassis (JC613A)

<b>I/O ports and slots</b>	2 MPU (for management modules) slots 4 switch fabric slots 4 I/O module slots Supports a maximum of 192 10GbE ports or 192 Gigabit Ethernet ports or 192 SFP ports or 32 40-GbE ports, or a combination												
<b>Power supplies</b>	4 power supply slots 1 minimum power supply required (ordered separately)												
<b>Fan tray</b>	includes: 1 x JC632A 1 fan tray slot												
<b>Physical characteristics</b>	<table border="0"> <tr> <td style="vertical-align: top;"><b>Dimensions</b></td> <td>17.32(w) x 25.98(d) x 13.9(h) in (43.99 x 65.99 x 35.31 cm) (8U height)</td> </tr> <tr> <td style="vertical-align: top;"><b>Weight</b></td> <td>85.32 lb (38.7 kg) chassis</td> </tr> <tr> <td style="vertical-align: top;"><b>Full configuration weight</b></td> <td>183.14 lb (83.07 kg)</td> </tr> </table>	<b>Dimensions</b>	17.32(w) x 25.98(d) x 13.9(h) in (43.99 x 65.99 x 35.31 cm) (8U height)	<b>Weight</b>	85.32 lb (38.7 kg) chassis	<b>Full configuration weight</b>	183.14 lb (83.07 kg)						
<b>Dimensions</b>	17.32(w) x 25.98(d) x 13.9(h) in (43.99 x 65.99 x 35.31 cm) (8U height)												
<b>Weight</b>	85.32 lb (38.7 kg) chassis												
<b>Full configuration weight</b>	183.14 lb (83.07 kg)												
<b>Memory and processor</b>	<b>Management module</b> MIPS64 @ 1G MHz, 128 MB flash, 1024 MB DDR2 SDRAM												
<b>Mounting</b>	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only												
<b>Performance</b>	<table border="0"> <tr> <td style="vertical-align: top;"><b>Throughput</b></td> <td>2857 million pps (64-byte packets)</td> </tr> <tr> <td style="vertical-align: top;"><b>Switching capacity</b></td> <td>3.8 Tbps</td> </tr> <tr> <td style="vertical-align: top;"><b>Routing table size</b></td> <td>512000 entries (IPv4), 128000 entries (IPv6)</td> </tr> <tr> <td style="vertical-align: top;"><b>MAC address table size</b></td> <td>512000 entries</td> </tr> </table>	<b>Throughput</b>	2857 million pps (64-byte packets)	<b>Switching capacity</b>	3.8 Tbps	<b>Routing table size</b>	512000 entries (IPv4), 128000 entries (IPv6)	<b>MAC address table size</b>	512000 entries				
<b>Throughput</b>	2857 million pps (64-byte packets)												
<b>Switching capacity</b>	3.8 Tbps												
<b>Routing table size</b>	512000 entries (IPv4), 128000 entries (IPv6)												
<b>MAC address table size</b>	512000 entries												
<b>Reliability</b>	<b>Availability</b> 99.999%												
<b>Environment</b>	<table border="0"> <tr> <td style="vertical-align: top;"><b>Operating temperature</b></td> <td>32°F to 113°F (0°C to 45°C)</td> </tr> <tr> <td style="vertical-align: top;"><b>Operating relative humidity</b></td> <td>10% to 95%, noncondensing</td> </tr> <tr> <td style="vertical-align: top;"><b>Nonoperating/Storage temperature</b></td> <td>-40°F to 158°F (-40°C to 70°C)</td> </tr> <tr> <td style="vertical-align: top;"><b>Nonoperating/Storage relative humidity</b></td> <td>5% to 95%, noncondensing</td> </tr> <tr> <td style="vertical-align: top;"><b>Altitude</b></td> <td>up to 13,123 ft (4 km)</td> </tr> <tr> <td style="vertical-align: top;"><b>Acoustic</b></td> <td>Low-speed fan: 62.3 dB, High-speed fan: 75.5 dB</td> </tr> </table>	<b>Operating temperature</b>	32°F to 113°F (0°C to 45°C)	<b>Operating relative humidity</b>	10% to 95%, noncondensing	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)	<b>Nonoperating/Storage relative humidity</b>	5% to 95%, noncondensing	<b>Altitude</b>	up to 13,123 ft (4 km)	<b>Acoustic</b>	Low-speed fan: 62.3 dB, High-speed fan: 75.5 dB
<b>Operating temperature</b>	32°F to 113°F (0°C to 45°C)												
<b>Operating relative humidity</b>	10% to 95%, noncondensing												
<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)												
<b>Nonoperating/Storage relative humidity</b>	5% to 95%, noncondensing												
<b>Altitude</b>	up to 13,123 ft (4 km)												
<b>Acoustic</b>	Low-speed fan: 62.3 dB, High-speed fan: 75.5 dB												
<b>Electrical characteristics</b>	<table border="0"> <tr> <td style="vertical-align: top;"><b>Frequency</b></td> <td>50/60 Hz</td> </tr> <tr> <td style="vertical-align: top;"><b>AC voltage</b></td> <td>100 - 120 / 200 - 240 VAC</td> </tr> <tr> <td style="vertical-align: top;"><b>DC voltage</b></td> <td>-48 to -60 / -48 to -60 VDC Powered by PoE</td> </tr> <tr> <td style="vertical-align: top;"><b>Current</b></td> <td>16/60 A</td> </tr> <tr> <td style="vertical-align: top;"><b>Power output</b></td> <td>2500 W</td> </tr> </table>	<b>Frequency</b>	50/60 Hz	<b>AC voltage</b>	100 - 120 / 200 - 240 VAC	<b>DC voltage</b>	-48 to -60 / -48 to -60 VDC Powered by PoE	<b>Current</b>	16/60 A	<b>Power output</b>	2500 W		
<b>Frequency</b>	50/60 Hz												
<b>AC voltage</b>	100 - 120 / 200 - 240 VAC												
<b>DC voltage</b>	-48 to -60 / -48 to -60 VDC Powered by PoE												
<b>Current</b>	16/60 A												
<b>Power output</b>	2500 W												
<b>Safety</b>	CAN/CSA 22.2 No. 60950-1; FCC Part 15, Subpart B; FDA 21 CFR Subchapter J; ROHS Compliance; IEC 60950-1 :Second Edition ; EN 60950-1:2006 + A11:2009; AS/NZS 60950-1; IEC 60825-1; UL 60950-1, 2nd Edition; EN60825-2:2004+A1:2007												
<b>Emissions</b>	VCCI Class A; EN 55022 Class A; CISPR 22 Class A; IEC/EN 61000-3-2; IEC/EN 61000-3-3; ICES-003 Class A; AS/NZS CISPR22 Class A; FCC (CFR 47, Part 15) Class A; GB9254												
<b>Immunity</b>	<b>Generic</b> Directive 2004/108/EC												

### Technical Specifications

<b>EN</b>	EN 55024:1998+ A1:2001 + A2:2003; ETSI EN 300 386 V1.3.3
<b>ESD</b>	EN 61000-4-2
<b>Radiated</b>	EN 61000-4-3
<b>EFT/Burst</b>	EN 61000-4-4
<b>Surge</b>	EN 61000-4-5
<b>Conducted</b>	EN 61000-4-6
<b>Power frequency magnetic field</b>	IEC 61000-4-8
<b>Voltage dips and interruptions</b>	EN 61000-4-11
<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3

**Management** IMC - Intelligent Management Center; command-line interface; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB

**Notes** These modules - JC614A, JD249A, JG252A, and JG254A - are only available using Comware v5 for the 10500. Please see an HP representative or technical notes for details.

**Services**

- 3-year, parts only, global next-day advance exchange (HT059E)
- 3-year, 4-hour onsite, 13x5 coverage for hardware (HT060E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware (HT062E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (HT067E)
- 3-year, 24x7 SW phone support, software updates (HT066E)
- Installation with minimum configuration, system-based pricing (UX033E)
- 4-year, 4-hour onsite, 13x5 coverage for hardware (HT068E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware (HT070E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HT075E)
- 4-year, 24x7 SW phone support, software updates (HT074E)
- 5-year, 4-hour onsite, 13x5 coverage for hardware (HT076E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware (HT078E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HT083E)
- 5-year, 24x7 SW phone support, software updates (HT082E)
- 3 Yr 6 hr Call-to-Repair Onsite (HT064E)
- 4 Yr 6 hr Call-to-Repair Onsite (HT072E)
- 5 Yr 6 hr Call-to-Repair Onsite (HT080E)
- 1-year, 4-hour onsite, 13x5 coverage for hardware (HT051E)
- 1-year, 4-hour onsite, 24x7 coverage for hardware (HT053E)
- 1-year, 6 hour Call-To-Repair Onsite for hardware (HT055E)
- 1-year, 24x7 software phone support, software updates (HT057E)
- 1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HT058E)

Refer to the HP website at: [www.hp.com/networking/services](http://www.hp.com/networking/services) for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

---

### HP 10508 Switch Chassis (JC612A)



### Technical Specifications

<b>I/O ports and slots</b>	2 MPU (for management modules) slots 4 switch fabric slots 8 I/O module slots Supports a maximum of 384 10GbE ports or 384 Gigabit Ethernet ports or 384 SFP ports or 64 40-GbE ports, or a combination	
<b>Power supplies</b>	6 power supply slots 1 minimum power supply required (ordered separately)	
<b>Fan tray</b>	includes: 1 x JC633A 1 fan tray slot	
<b>Physical characteristics</b>	<b>Dimensions</b>	17.32(w) x 25.98(d) x 24.41(h) in (43.99 x 65.99 x 62 cm) (14U height)
	<b>Weight</b>	125 lb (56.7 kg) chassis
	<b>Full configuration weight</b>	285.34 lb (129.43 kg)
<b>Memory and processor</b>	<b>Management module</b>	MIPS64 @ 1G MHz, 128 MB flash, 1024 MB DDR2 SDRAM
<b>Mounting</b>	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
<b>Performance</b>	<b>Throughput</b>	5714 million pps (64-byte packets)
	<b>Switching capacity</b>	7.7 Tbps
	<b>Routing table size</b>	512000 entries (IPv4), 128000 entries (IPv6)
	<b>MAC address table size</b>	512000 entries
<b>Reliability</b>	<b>Availability</b>	99.999%
<b>Environment</b>	<b>Operating temperature</b>	32°F to 113°F (0°C to 45°C)
	<b>Operating relative humidity</b>	10% to 95%, noncondensing
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)
	<b>Nonoperating/Storage relative humidity</b>	5% to 95%, noncondensing
	<b>Altitude</b>	up to 13,123 ft (4 km)
	<b>Acoustic</b>	Low-speed fan: 63 dB, High-speed fan: 75.8 dB
<b>Electrical characteristics</b>	<b>Frequency</b>	50/60 Hz
	<b>AC Voltage</b>	100-120/200-240 VAC
	<b>Current</b>	16/60 A
	<b>Power output</b>	2500 W
	<b>Frequency</b>	50/60 Hz
<b>Safety</b>	CAN/CSA 22.2 No. 60950-1; FCC Part 15, Subpart B; FDA 21 CFR Subchapter J; ROHS Compliance; IEC 60950-1 :Second Edition ; EN 60950-1:2006 + A11:2009; AS/NZS 60950-1; IEC 60825-1; UL 60950-1, 2nd Edition; EN60825-2:2004+A1:2007	
<b>Emissions</b>	VCCI Class A; EN 55022 Class A; CISPR 22 Class A; IEC/EN 61000-3-2; IEC/EN 61000-3-3; ICES-003 Class A; AS/NZS CISPR22 Class A; FCC (CFR 47, Part 15) Class A; GB9254	
<b>Immunity</b>	<b>Generic</b>	Directive 2004/108/EC
	<b>EN</b>	EN 55024:1998+ A1:2001 + A2:2003; ETSI EN 300 386 V1.3.3

### Technical Specifications

<b>ESD</b>	EN 61000-4-2
<b>Radiated</b>	EN 61000-4-3
<b>EFT/Burst</b>	EN 61000-4-4
<b>Surge</b>	EN 61000-4-5
<b>Conducted</b>	EN 61000-4-6
<b>Power frequency magnetic field</b>	IEC 61000-4-8
<b>Voltage dips and interruptions</b>	EN 61000-4-11
<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3

**Management** IMC - Intelligent Management Center; command-line interface; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB

**Notes** These modules - JC614A, JD249A, JG252A, and JG254A - are only available using Comware v5 for the 10500. Please see an HP representative or technical notes for details.

**Services**

- 3-year, parts only, global next-day advance exchange (HT092E)
- 3-year, 4-hour onsite, 13x5 coverage for hardware (HT093E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware (HT095E)
- 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (HT100E)
- 3-year, 24x7 SW phone support, software updates (HT099E)
- Installation with minimum configuration, system-based pricing (UX033E)
- 4-year, 4-hour onsite, 13x5 coverage for hardware (HT101E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware (HT103E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HT108E)
- 4-year, 24x7 SW phone support, software updates (HT107E)
- 5-year, 4-hour onsite, 13x5 coverage for hardware (HT109E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware (HT111E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HT116E)
- 5-year, 24x7 SW phone support, software updates (HT115E)
- 3 Yr 6 hr Call-to-Repair Onsite (HT097E)
- 4 Yr 6 hr Call-to-Repair Onsite (HT105E)
- 5 Yr 6 hr Call-to-Repair Onsite (HT113E)
- 1-year, 4-hour onsite, 13x5 coverage for hardware (HT084E)
- 1-year, 4-hour onsite, 24x7 coverage for hardware (HT086E)
- 1-year, 6 hour Call-To-Repair Onsite for hardware (HT088E)
- 1-year, 24x7 software phone support, software updates (HT090E)
- 1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HT091E)

Refer to the HP website at: [www.hp.com/networking/services](http://www.hp.com/networking/services) for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

---

### HP 10508-V Switch Chassis (JC611A)



### Technical Specifications

<b>I/O ports and slots</b>	2 MPU (for management modules) slots 4 switch fabric slots 8 I/O module slots Supports a maximum of 384 10GbE ports or 384 Gigabit Ethernet ports or 384 SFP ports or 64 40-GbE ports, or a combination	
<b>Power supplies</b>	6 power supply slots 1 minimum power supply required (ordered separately)	
<b>Fan tray</b>	includes: 1 x JC634A 1 fan tray slot	
<b>Physical characteristics</b>	<b>Dimensions</b>	17.32(w) x 25.98(d) x 34.88(h) in (43.99 x 65.99 x 88.6 cm) (20U height)
	<b>Weight</b>	169.53 lb (76.9 kg) chassis
	<b>Full configuration weight</b>	331.31 lb (150.28 kg)
<b>Memory and processor</b>	<b>Management module</b>	MIPS64 @ 1G MHz, 128 MB flash, 1024 MB DDR2 SDRAM
<b>Mounting</b>	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
<b>Performance</b>	<b>Throughput</b>	5714 million pps (64-byte packets)
	<b>Switching capacity</b>	7.7 Tbps
	<b>Routing table size</b>	512000 entries (IPv4), 128000 entries (IPv6)
	<b>MAC address table size</b>	512000 entries
<b>Reliability</b>	<b>Availability</b>	99.999%
<b>Environment</b>	<b>Operating temperature</b>	32°F to 113°F (0°C to 45°C)
	<b>Operating relative humidity</b>	10% to 95%, noncondensing
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)
	<b>Nonoperating/Storage relative humidity</b>	5% to 95%, noncondensing
	<b>Altitude</b>	up to 13,123 ft (4 km)
	<b>Acoustic</b>	Low-speed fan: 61.6 dB, High-speed fan: 72.6 dB
<b>Electrical characteristics</b>	<b>Frequency</b>	50/60 Hz
	<b>AC Voltage</b>	100-120/200-240 VAC
	<b>Current</b>	16/60 A
	<b>Power output</b>	2500 W
<b>Safety</b>	CAN/CSA 22.2 No. 60950-1; FCC Part 15, Subpart B; FDA 21 CFR Subchapter J; ROHS Compliance; IEC 60950-1 :Second Edition ; EN 60950-1:2006 + A11:2009; AS/NZS 60950-1; IEC 60825-1; UL 60950-1, 2nd Edition; EN60825-2:2004+A1:2007	
<b>Emissions</b>	VCCI Class A; EN 55022 Class A; CISPR 22 Class A; IEC/EN 61000-3-2; IEC/EN 61000-3-3; ICES-003 Class A; AS/NZS CISPR22 Class A; FCC (CFR 47, Part 15) Class A; GB9254	
<b>Immunity</b>	<b>Generic</b>	Directive 2004/108/EC
	<b>EN</b>	EN 55024:1998+ A1:2001 + A2:2003; ETSI EN 300 386 V1.3.3
	<b>ESD</b>	EN 61000-4-2

### Technical Specifications

<b>Radiated</b>	EN 61000-4-3
<b>EFT/Burst</b>	EN 61000-4-4
<b>Surge</b>	EN 61000-4-5
<b>Conducted</b>	EN 61000-4-6
<b>Power frequency magnetic field</b>	IEC 61000-4-8
<b>Voltage dips and interruptions</b>	EN 61000-4-11
<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3

### Management

IMC - Intelligent Management Center; command-line interface; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB

### Notes

These modules - JC614A, JD249A, JG252A, and JG254A - are only available using Comware v5 for the 10500. Please see an HP representative or technical notes for details.

### Services

3-year, parts only, global next-day advance exchange (HT092E)  
3-year, 4-hour onsite, 13x5 coverage for hardware (HT093E)  
3-year, 4-hour onsite, 24x7 coverage for hardware (HT095E)  
3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (HT100E)  
3-year, 24x7 SW phone support, software updates (HT099E)  
Installation with minimum configuration, system-based pricing (UX033E)  
4-year, 4-hour onsite, 13x5 coverage for hardware (HT101E)  
4-year, 4-hour onsite, 24x7 coverage for hardware (HT103E)  
4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HT108E)  
4-year, 24x7 SW phone support, software updates (HT107E)  
5-year, 4-hour onsite, 13x5 coverage for hardware (HT109E)  
5-year, 4-hour onsite, 24x7 coverage for hardware (HT111E)  
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (HT116E)  
5-year, 24x7 SW phone support, software updates (HT115E)  
3 Yr 6 hr Call-to-Repair Onsite (HT097E)  
4 Yr 6 hr Call-to-Repair Onsite (HT105E)  
5 Yr 6 hr Call-to-Repair Onsite (HT113E)  
1-year, 4-hour onsite, 13x5 coverage for hardware (HT084E)  
1-year, 4-hour onsite, 24x7 coverage for hardware (HT086E)  
1-year, 6 hour Call-To-Repair Onsite for hardware (HT088E)  
1-year, 24x7 software phone support, software updates (HT090E)  
1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HT091E)

Refer to the HP website at: [www.hp.com/networking/services](http://www.hp.com/networking/services) for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

---

### HP 10512 Switch Chassis (JC748A)

### Technical Specifications

<b>I/O ports and slots</b>	2 MPU (for management modules) slots 4 switch fabric slots 12 I/O module slots Supports a maximum of 576 10GbE ports or 576 Gigabit Ethernet ports or 576 SFP ports or 96 40-GbE ports, or a combination	
<b>Power supplies</b>	6 power supply slots 1 minimum power supply required (ordered separately)	
<b>Fan tray</b>	includes: 1 x JC758A, JC773A 2 fan tray slots	
<b>Physical characteristics</b>	<b>Dimensions</b>	17.32(w) x 25.98(d) x 31.38(h) in (44.0 x 66.0 x 79.7 cm) (18U height)
	<b>Weight</b>	166.23 lb (75.4 kg) chassis
	<b>Full configuration weight</b>	380.95 lb (172.8 kg)
<b>Memory and processor</b>	<b>Management module</b>	MIPS64 @ 1G MHz, 128 MB flash, 1024 MB DDR2 SDRAM
<b>Mounting</b>	Mounts in an EIA-standard 19 in. rack or other equipment cabinet (hardware included); horizontal surface mounting only	
<b>Performance</b>	<b>Throughput</b>	8571 million pps (64-byte packets)
	<b>Switching capacity</b>	11.5 Tbps
	<b>Routing table size</b>	512000 entries (IPv4), 128000 entries (IPv6)
	<b>MAC address table size</b>	512000 entries
<b>Reliability</b>	<b>Availability</b>	99.999%
<b>Environment</b>	<b>Operating temperature</b>	32°F to 113°F (0°C to 45°C)
	<b>Operating relative humidity</b>	10% to 95%, noncondensing
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)
	<b>Nonoperating/Storage relative humidity</b>	5% to 95%, noncondensing
	<b>Altitude</b>	up to 13,123 ft (4 km)
	<b>Acoustic</b>	Low-speed fan: 66 dB, High-speed fan: 79 dB
<b>Electrical characteristics</b>	<b>Frequency</b>	50/60 Hz
	<b>AC voltage</b>	100-120/200-240 VAC
	<b>Current</b>	16/60 A
	<b>Power output</b>	2500 W
<b>Safety</b>	CAN/CSA 22.2 No. 60950-1; FCC Part 15, Subpart B; FDA 21 CFR Subchapter J; ROHS Compliance; IEC 60950-1 :Second Edition ; EN 60950-1:2006 + A11:2009; AS/NZS 60950-1; IEC 60825-1; UL 60950-1, 2nd Edition; EN60825-2:2004+A1:2007	
<b>Emissions</b>	VCCI Class A; EN 55022 Class A; CISPR 22 Class A; IEC/EN 61000-3-2; IEC/EN 61000-3-3; ICES-003 Class A; AS/NZS CISPR22 Class A; FCC (CFR 47, Part 15) Class A; GB9254	
<b>Immunity</b>	<b>Generic</b>	Directive 2004/108/EC
	<b>EN</b>	EN 55024:1998+ A1:2001 + A2:2003; ETSI EN 300 386 V1.3.3
	<b>ESD</b>	EN 61000-4-2

### Technical Specifications

<b>Radiated</b>	EN 61000-4-3
<b>EFT/Burst</b>	EN 61000-4-4
<b>Surge</b>	EN 61000-4-5
<b>Conducted</b>	EN 61000-4-6
<b>Power frequency magnetic field</b>	IEC 61000-4-8
<b>Voltage dips and interruptions</b>	EN 61000-4-11
<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3

**Management** IMC - Intelligent Management Center; command-line interface; out-of-band management (serial RS-232C); SNMP Manager; Telnet; terminal interface (serial RS-232C); modem interface; IEEE 802.3 Ethernet MIB; Ethernet Interface MIB

**Notes** These modules - JC614A, JD249A, JG252A, and JG254A - are only available using Comware v5 for the 10500. Please see an HP representative or technical notes for details.

**Services** Refer to the HP website at: [www.hp.com/networking/services](http://www.hp.com/networking/services) for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**Standards and protocols**  
(applies to all products in series)

**BGP**

- RFC 1771 BGPv4
- RFC 1772 Application of the BGP
- RFC 1965 BGP4 confederations
- RFC 1997 BGP Communities Attribute
- RFC 1998 PPP Gandalf FZA Compression Protocol
- RFC 2385 BGP Session Protection via TCP MD5
- RFC 2439 BGP Route Flap Damping
- RFC 2796 BGP Route Reflection
- RFC 2858 BGP-4 Multi-Protocol Extensions
- RFC 2918 Route Refresh Capability
- RFC 3065 Autonomous System Confederations for BGP
- RFC 3392 Capabilities Advertisement with BGP-4
- RFC 4271 A Border Gateway Protocol 4 (BGP-4)
- RFC 4272 BGP Security Vulnerabilities Analysis
- RFC 4273 Definitions of Managed Objects for BGP-4
- RFC 4274 BGP-4 Protocol Analysis
- RFC 4275 BGP-4 MIB Implementation Survey
- RFC 4276 BGP-4 Implementation Report
- RFC 4277 Experience with the BGP-4 Protocol
- RFC 4360 BGP Extended Communities Attribute
- RFC 4456 BGP Route Reflection: An Alternative to Full Mesh Internal BGP (IBGP)
- RFC 5291 Outbound Route Filtering Capability for BGP-4
- RFC 5292 Address-Prefix-Based Outbound Route Filter for BGP-4

**MIBs**

- RFC 1156 (TCP/IP MIB)
- RFC 1157 A Simple Network Management Protocol (SNMP)
- RFC 1215 A Convention for Defining Traps for use with the SNMP
- RFC 1229 Interface MIB Extensions
- RFC 1493 Bridge MIB
- RFC 1573 SNMP MIB II
- RFC 1643 Ethernet MIB
- RFC 1657 BGP-4 MIB
- RFC 2011 SNMPv2 MIB for IP
- RFC 2012 SNMPv2 MIB for TCP
- RFC 2013 SNMPv2 MIB for UDP
- RFC 2096 IP Forwarding Table MIB
- RFC 2233 Interface MIB
- RFC 2452 IPV6-TCP-MIB
- RFC 2454 IPV6-UDP-MIB
- RFC 2465 IPv6 MIB
- RFC 2466 ICMPv6 MIB
- RFC 2571 SNMP Framework MIB
- RFC 2572 SNMP-MPD MIB
- RFC 2573 SNMP-Notification MIB
- RFC 2573 SNMP-Target MIB
- RFC 2578 Structure of Management Information Version 2 (SMIv2)
- RFC 2580 Conformance Statements for SMIv2
- RFC 2618 RADIUS Client MIB
- RFC 2620 RADIUS Accounting MIB

### Technical Specifications

#### Denial of service protection

RFC 2267 Network Ingress Filtering  
Automatic filtering of well-known denial-of-service packets  
CPU DoS Protection  
Rate Limiting by ACLs

#### Device management

RFC 1157 SNMPv1/v2c  
RFC 1305 NTPv3  
RFC 1902 (SNMPv2)  
RFC 2271 FrameWork  
RFC 2579 (SMIv2 Text Conventions)  
RFC 2580 (SMIv2 Conformance)  
RFC 2819 (RMON groups Alarm, Event, History and Statistics only)  
HTTP, SSHv1, and Telnet  
Multiple Configuration Files  
Multiple Software Images  
SSHv1/SSHv2 Secure Shell  
TACACS/TACACS+  
Web UI

#### General protocols

IEEE 802.1ad Q-in-Q  
IEEE 802.1ag Service Layer OAM  
IEEE 802.1p Priority  
IEEE 802.1Q VLANs  
IEEE 802.1s Multiple Spanning Trees  
IEEE 802.1w Rapid Reconfiguration of Spanning Tree  
IEEE 802.1X PAE  
IEEE 802.3ab 1000BASE-T  
IEEE 802.3ac (VLAN Tagging Extension)  
IEEE 802.3ad Link Aggregation Control Protocol (LACP)  
IEEE 802.3ae 10-Gigabit Ethernet  
IEEE 802.3ah Ethernet in First Mile over Point to Point Fiber - EFMF  
IEEE 802.3ba 40 and 100 Gigabit Ethernet Architecture  
IEEE 802.3x Flow Control  
IEEE 802.3z 1000BASE-X  
RFC 768 UDP  
RFC 783 TFTP Protocol (revision 2)  
RFC 791 IP  
RFC 792 ICMP  
RFC 793 TCP  
RFC 826 ARP  
RFC 854 TELNET  
RFC 894 IP over Ethernet

RFC 2665 Ethernet-Like-MIB  
RFC 2668 802.3 MAU MIB  
RFC 2674 802.1p and IEEE 802.1Q Bridge MIB  
RFC 2787 VRRP MIB  
RFC 2819 RMON MIB  
RFC 2925 Ping MIB  
RFC 2932IP (Multicast Routing MIB)  
RFC 2933 IGMP MIB  
RFC 2934 Protocol Independent Multicast MIB for IPv4  
RFC 3414 SNMP-User based-SM MIB  
RFC 3415 SNMP-View based-ACM MIB  
RFC 3417 Simple Network Management Protocol (SNMP) over IEEE 802 Networks  
RFC 3418 MIB for SNMPv3  
RFC 3595 Textual Conventions for IPv6 Flow Label  
RFC 3621 Power Ethernet MIB  
RFC 3813 MPLS LSR MIB  
RFC 3814 MPLS FTN MIB  
RFC 3815 MPLS LDP MIB  
RFC 3826 AES for SNMP's USM MIB  
RFC 4133 Entity MIB (Version 3)  
RFC 4444 Management Information Base for Intermediate System to Intermediate System (IS-IS)

#### MPLS

RFC 2205 Resource ReSerVation Protocol  
RFC 2209 Resource ReSerVation Protocol (RSVP)  
RFC 2702 Requirements for Traffic Engineering Over MPLS  
RFC 2858 Multiprotocol Extensions for BGP-4  
RFC 2961 RSVP Refresh Overhead Reduction Extensions  
RFC 3031 Multiprotocol Label Switching Architecture  
RFC 3032 MPLS Label Stack Encoding  
RFC 3107 Carrying Label Information in BGP-4  
RFC 3212 Constraint-Based LSP Setup using LDP  
RFC 3479 Fault Tolerance for the Label Distribution Protocol (LDP)  
RFC 3487 Graceful Restart Mechanism for LDP  
RFC 3564 Requirements for Support of Differentiated Service-aware MPLS Traffic Engineering  
RFC 4364 BGP/MPLS IP Virtual Private Networks (VPNs)  
RFC 4379 Detecting Multi-Protocol Label Switched (MPLS) Data Plane Failures  
RFC 4447 Pseudowire Setup and Maintenance Using LDP  
RFC 4448 Encapsulation Methods for Transport of

### Technical Specifications

RFC 903 RARP	Ethernet over MPLS Networks
RFC 906 TFTP Bootstrap	RFC 4664 Framework for Layer 2 Virtual Private Networks
RFC 925 Multi-LAN Address Resolution	RFC 4665 Service Requirements for Layer 2 Provider Provisioned Virtual Private Networks
RFC 950 Internet Standard Subnetting Procedure	RFC 4761 Virtual Private LAN Service (VPLS) Using BGP for Auto-Discovery and Signaling
RFC 959 File Transfer Protocol (FTP)	RFC 4762 Virtual Private LAN Service (VPLS) Using Label Distribution Protocol (LDP) Signaling
RFC 1027 Proxy ARP	RFC 5036 LDP Specification
RFC 1035 Domain Implementation and Specification	
RFC 1042 IP Datagrams	
RFC 1058 RIPv1	
RFC 1142 OSI IS-IS Intra-domain Routing Protocol	
RFC 1195 OSI ISIS for IP and Dual Environments	
RFC 1213 Management Information Base for Network Management of TCP/IP-based internets	<b>Network management</b>
RFC 1256 ICMP Router Discovery Protocol (IRDP)	IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
RFC 1293 Inverse Address Resolution Protocol	RFC 1155 Structure of Management Information
RFC 1305 NTPv3	RFC 1157 SNMPv1
RFC 1350 TFTP Protocol (revision 2)	RFC 1448 Protocol Operations for version 2 of the Simple Network Management Protocol (SNMPv2)
RFC 1393 Traceroute Using an IP Option	RFC 2211 Controlled-Load Network
RFC 1519 CIDR	RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events)
RFC 1531 Dynamic Host Configuration Protocol	RFC 3176 sFlow
RFC 1533 DHCP Options and BOOTP Vendor Extensions	RFC 3411 SNMP Management Frameworks
RFC 1591 DNS (client only)	RFC 3412 SNMPv3 Message Processing
RFC 1624 Incremental Internet Checksum	RFC 3414 SNMPv3 User-based Security Model (USM)
RFC 1701 Generic Routing Encapsulation	RFC 3415 SNMPv3 View-based Access Control Model VACM)
RFC 1721 RIP-2 Analysis	ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)
RFC 1723 RIP v2	
RFC 1812 IPv4 Routing	<b>OSPF</b>
RFC 2030 Simple Network Time Protocol (SNTP) v4	RFC 1245 OSPF protocol analysis
RFC 2082 RIP-2 MD5 Authentication	RFC 1246 Experience with OSPF
RFC 2091 Trigger RIP	RFC 1765 OSPF Database Overflow
RFC 2131 DHCP	RFC 1850 OSPFv2 Management Information Base (MIB), traps
RFC 2138 Remote Authentication Dial In User Service (RADIUS)	RFC 2154 OSPF w/ Digital Signatures (Password, MD-5)
RFC 2236 IGMP Snooping	RFC 2328 OSPFv2
RFC 2338 VRRP	RFC 2370 OSPF Opaque LSA Option
RFC 2453 RIPv2	RFC 3101 OSPF NSSA
RFC 2644 Directed Broadcast Control	RFC 3137 OSPF Stub Router Advertisement
RFC 2763 Dynamic Name-to-System ID mapping support	RFC 3623 Graceful OSPF Restart
RFC 2784 Generic Routing Encapsulation (GRE)	RFC 3630 Traffic Engineering Extensions to OSPFv2
RFC 2865 Remote Authentication Dial In User Service (RADIUS)	RFC 4061 Benchmarking Basic OSPF Single Router Control Plane Convergence
RFC 2966 Domain-wide Prefix Distribution with Two-Level IS-IS	RFC 4062 OSPF Benchmarking Terminology and Concepts
RFC 2973 IS-IS Mesh Groups	RFC 4063 Considerations When Using Basic OSPF Convergence Benchmarks
RFC 3022 Traditional IP Network Address Translator (Traditional NAT)	RFC 4222 Prioritized Treatment of Specific OSPF
RFC 3277 IS-IS Transient Blackhole Avoidance	
RFC 3567 Intermediate System to Intermediate System (IS-IS) Cryptographic Authentication	



### Technical Specifications

RFC 3719 Recommendations for Interoperable Networks using Intermediate System to Intermediate System (IS-IS)  
RFC 3784 ISIS TE support  
RFC 3786 Extending the Number of IS-IS LSP Fragments Beyond the 256 Limit  
RFC 3787 Recommendations for Interoperable IP Networks using Intermediate System to Intermediate System (IS-IS)  
RFC 3847 Restart signaling for IS-IS  
RFC 4251 The Secure Shell (SSH) Protocol Architecture  
RFC 4486 Subcodes for BGP Cease Notification Message  
RFC 4884 Extended ICMP to Support Multi-Part Messages  
RFC 4941 Privacy Extensions for Stateless Address Autoconfiguration in IPv6  
RFC 5130 A Policy Control Mechanism in IS-IS Using Administrative Tags

#### **IP multicast**

RFC 2236 IGMPv2  
RFC 2283 Multiprotocol Extensions for BGP-4  
RFC 2362 PIM Sparse Mode  
RFC 3376 IGMPv3  
RFC 3446 Anycast Rendezvous Point (RP) mechanism using Protocol Independent Multicast (PIM) and Multicast Source Discovery Protocol (MSDP)  
RFC 3618 Multicast Source Discovery Protocol (MSDP)  
RFC 3973 PIM Dense Mode  
RFC 4541 Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches  
RFC 4601 PIM Sparse Mode  
RFC 4604 Using Internet Group Management Protocol Version 3 (IGMPv3) and Multicast Listener Discovery Protocol Version 2 (MLDv2) for Source-Specific Multicast  
RFC 4605 IGMP/MLD Proxying  
RFC 4607 Source-Specific Multicast for IP  
RFC 5059 Bootstrap Router (BSR) Mechanism for Protocol Independent Multicast (PIM)

#### **IPv6**

RFC 1886 DNS Extension for IPv6  
RFC 1887 IPv6 Unicast Address Allocation Architecture  
RFC 1981 IPv6 Path MTU Discovery

Version 2 Packets and Congestion Avoidance  
RFC 4577 OSPF as the Provider/Customer Edge Protocol for BGP/MPLS IP Virtual Private Networks (VPNs)  
RFC 4811 OSPF Out-of-Band LSDB Resynchronization  
RFC 4812 OSPF Restart Signaling  
RFC 4813 OSPF Link-Local Signaling  
RFC 4940 IANA Considerations for OSPF

#### **QoS/CoS**

IEEE 802.1P (CoS)  
RFC 1349 Type of Service in the Internet Protocol Suite  
RFC 2211 Specification of the Controlled-Load Network Element Service  
RFC 2212 Guaranteed Quality of Service  
RFC 2474 DSCP DiffServ  
RFC 2475 DiffServ Architecture  
RFC 2597 DiffServ Assured Forwarding (AF)  
RFC 2598 DiffServ Expedited Forwarding (EF)

#### **Security**

IEEE 802.1X Port Based Network Access Control  
RFC 1321 The MD5 Message-Digest Algorithm  
RFC 1334 PPP Authentication Protocols (PAP)  
RFC 1492 TACACS+  
RFC 1994 PPP Challenge Handshake Authentication Protocol (CHAP)  
RFC 2082 RIP-2 MD5 Authentication  
RFC 2104 Keyed-Hashing for Message Authentication  
RFC 2408 Internet Security Association and Key Management Protocol (ISAKMP)  
RFC 2409 The Internet Key Exchange (IKE)  
RFC 2716 PPP EAP TLS Authentication Protocol  
RFC 2865 RADIUS Authentication  
RFC 2866 RADIUS Accounting  
RFC 2868 RADIUS Attributes for Tunnel Protocol Support  
RFC 2869 RADIUS Extensions  
Access Control Lists (ACLs)  
Guest VLAN for 802.1x  
MAC Authentication  
Port Security  
SSHv1/SSHv2 Secure Shell

#### **VPN**

RFC 2403 - HMAC-MD5-96  
RFC 2404 - HMAC-SHA1-96

### Technical Specifications

RFC 2080 RIPng for IPv6  
RFC 2081 RIPng Protocol Applicability Statement  
RFC 2292 Advanced Sockets API for IPv6  
RFC 2373 IPv6 Addressing Architecture  
RFC 2375 IPv6 Multicast Address Assignments  
RFC 2460 IPv6 Specification  
RFC 2461 IPv6 Neighbor Discovery  
RFC 2462 IPv6 Stateless Address Auto-configuration  
RFC 2463 ICMPv6  
RFC 2464 Transmission of IPv6 over Ethernet Networks  
RFC 2473 Generic Packet Tunneling in IPv6  
RFC 2526 Reserved IPv6 Subnet Anycast Addresses  
RFC 2529 Transmission of IPv6 Packets over IPv4  
RFC 2545 Use of MP-BGP-4 for IPv6  
RFC 2553 Basic Socket Interface Extensions for IPv6  
RFC 2710 Multicast Listener Discovery (MLD) for IPv6  
RFC 2740 OSPFv3 for IPv6  
RFC 2767 Dual stacks IPv4 & IPv6  
RFC 2893 Transition Mechanisms for IPv6 Hosts and Routers  
RFC 3056 Connection of IPv6 Domains via IPv4 Clouds  
RFC 3307 IPv6 Multicast Address Allocation  
RFC 3315 DHCPv6 (client and relay)  
RFC 3484 Default Address Selection for IPv6  
RFC 3513 IPv6 Addressing Architecture  
RFC 3736 Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6  
RFC 3810 MLDv2 for IPv6  
RFC 4214 Intra-Site Automatic Tunnel Addressing Protocol (ISATAP)  
RFC 4861 IPv6 Neighbor Discovery  
RFC 4862 IPv6 Stateless Address Auto-configuration  
RFC 2407 - Domain of interpretation  
RFC 2547 BGP/MPLS VPNs  
RFC 2917 A Core MPLS IP VPN Architecture  
RFC 3947 - Negotiation of NAT-Traversal in the IKE  
RFC 4302 - IP Authentication Header (AH)  
RFC 4303 - IP Encapsulating Security Payload (ESP)

**IPsec**  
RFC 1828 IP Authentication using Keyed MD5  
RFC 1829 The ESP DES-CBC Transform  
RFC 2085 HMAC-MD5 IP Authentication with Replay Prevention  
RFC 2401 IP Security Architecture  
RFC 2402 IP Authentication Header  
RFC 2406 IP Encapsulating Security Payload  
RFC 2410 - The NULL Encryption Algorithm and its use with IPsec  
RFC 2411 IP Security Document Roadmap

### Accessories

#### HP 10500 Switch Series accessories

#### Modules

<b>NEW</b> HP 10500 Type A Main Processing Unit with Comware v7 Operating System	JG496A
HP 10500 Main Processing Unit	JC614A
HP 10500 48-port 10GbE SFP+ SF Module	JC756A
HP 10500 32-port 10GbE SFP+ SF Module	JC755A
<b>NEW</b> HP 10500 24-port 1/10GBASE-T SF Module	JG394A
HP 10500 8-port 40GbE QSFP+ SF Module	JG392A
HP 10500 4-port 40GbE QSFP+ SF Module	JC757A
HP 10500 4-port 40GbE CFP SF Module	JG396A
HP 10500 8-port 10GbE SFP+ SE Module	JC631A
HP 10500 4-port 10GbE XFP SE Module	JC620A
HP 10500 16-port GbE SFP/8-port GbE Combo/2-port 10GbE XFP SE Module	JC617A
HP 10500 16-port GbE SFP / 8-port GbE Combo SE Module	JC763A
HP 10500 48-port Gig-T SE Module	JC618A
HP 10500 48-port GbE SFP SE Module	JC619A
HP 10500 16-port 10GbE SFP+ SC Module	JC628A
HP 10500 8-port 10GbE SFP+ EA Module	JC630A
HP 10500 4-port 10GbE XFP EA Module	JC624A
HP 10500 16-port GbE SFP/8-port GbE Combo/2-port 10GbE XFP EA Module	JC621A
HP 10500 48-port GbE SFP EA Module	JC622A
HP 10500 48-port Gig-T EA Module	JC623A
HP 10500 8-port 10GbE SFP+ EB Module	JC629A
HP 10500 4-port 10GbE XFP EB Module	JC627A
HP 10500 48-port GbE SFP EB Module	JC625A
HP 10500 16-port GbE SFP/8-port GbE Combo/2-port 10GbE XFP EB Module	JC626A

#### Transceivers

HP X110 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC BX 10-U Transceiver	JD100A
HP X115 100M SFP LC BX 10-D Transceiver	JD101A
<a href="#">HP X120 1G SFP RJ45 T Transceiver</a>	JD089B
<a href="#">HP X120 1G SFP LC SX Transceiver</a>	JD118B
<a href="#">HP X120 1G SFP LC LX Transceiver</a>	JD119B
<a href="#">HP X125 1G SFP LC LH40 1310nm Transceiver</a>	JD061A
<a href="#">HP X120 1G SFP LC LH40 1550nm Transceiver</a>	JD062A
<a href="#">HP X125 1G SFP LC LH70 Transceiver</a>	JD063B
<a href="#">HP X120 1G SFP LC LH100 Transceiver</a>	JD103A
<a href="#">HP X120 1G SFP LC BX 10-D Transceiver</a>	JD099B
<a href="#">HP X120 1G SFP LC BX 10-U Transceiver</a>	JD098B
HP X170 1G SFP LC LH70 1470 Transceiver	JD113A
HP X170 1G SFP LC LH70 1490 Transceiver	JD114A
HP X170 1G SFP LC LH70 1510 Transceiver	JD115A

### Accessories

HP X170 1G SFP LC LH70 1530 Transceiver	JD116A
HP X170 1G SFP LC LH70 1550 Transceiver	JD109A
HP X170 1G SFP LC LH70 1570 Transceiver	JD110A
HP X170 1G SFP LC LH70 1590 Transceiver	JD111A
HP X170 1G SFP LC LH70 1610 Transceiver	JD112A
HP X130 10G SFP+ LC SR Transceiver	JD092B
HP X130 10G SFP+ LC LRM Transceiver	JD093B
HP X130 10G SFP+ LC LR Transceiver	JD094B
HP X130 10G SFP+ LC ER 40km Transceiver	JG234A
HP X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C
HP X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
HP X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
HP X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
HP X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable	JC784C
HP X130 10G XFP LC SR Transceiver	JD117B
HP X130 10G XFP LC LR Transceiver	JD108B
HP X135 10G XFP LC ER Transceiver	JD121A
HP X130 10G XFP LC ZR Transceiver	JD107A
HP X180 10G XFP LC LH 80km 1538.98nm DWDM Transceiver	JG226A
HP X180 10G XFP LC LH 80km 1539.77nm DWDM Transceiver	JG227A
HP X180 10G XFP LC LH 80km 1540.56nm DWDM Transceiver	JG228A
HP X180 10G XFP LC LH 80km 1542.14nm DWDM Transceiver	JG229A
HP X180 10G XFP LC LH 80km 1542.94nm DWDM Transceiver	JG230A
HP X180 10G XFP LC LH 80km 1558.98nm DWDM Transceiver	JG231A
HP X180 10G XFP LC LH 80km 1559.79nm DWDM Transceiver	JG232A
HP X180 10G XFP LC LH 80km 1560.61nm DWDM Transceiver	JG233A
HP X140 40G QSFP+ LC LR4 SM 10km 1310nm Transceiver	JG661A
HP X140 40G QSFP+ MPO SR4 Transceiver	JG325A
HP X240 40G QSFP+ to QSFP+ 1m Direct Attach Copper Cable	JG326A
HP X240 40G QSFP+ to QSFP+ 3m Direct Attach Copper Cable	JG327A
HP X240 40G QSFP+ to QSFP+ 5m Direct Attach Copper Cable	JG328A
HP X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A
HP X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A
HP X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A
HP X140 40G CFP LC LR4 10km SM Transceiver	JC857A
<b>Security Modules</b>	
HP 7500 Load Balancing Module	JD252A
<b>Power Supply</b>	
HP 10500 2500W AC Power Supply	JC610A
HP 10500 2400W DC Power Supply	JC747A
<b>Mounting Kit</b>	
HP X421 Chassis Universal 4-post Rack Mounting Kit	JC665A
<b>License</b>	
HP 10500/7500 SSL VPN 1000-user License	JD257A
HP 10500/7500 SSL VPN 5000-user License	JD258A

### Accessories

HP Unified Wired-WLAN 128 AP E-LTU	JG649AAE
<b>WLAN</b>	
HP 10500/7500 20G Unified Wired-WLAN Module	JG639A
<b>Power cords</b>	
HP 10500 -48V 3m DC Power Supply Cable	JG390A
HP 10500 -48V 15m DC Power Supply Cable	JG391A
<b>Appliance</b>	
HP 10500/7500 Advanced VPN Firewall Module	JD249A
HP 10500/7500 SSL VPN Module with 500-user License	JD253A
HP 10500/7500 NetStream Monitoring Module	JD254A
HP 10500/11900/7500 20Gbps VPN Firewall Module	JG372A
<b>HP 10504 Switch Chassis (JC613A)</b>	
HP 10504 400 Gbps Type A Fabric Module	JC615A
HP 10504 880 Gbps Type B Fabric Module	JC751A
HP 10504 1.2 Tbps Type D Fabric Module	JC752A
HP 10504 Spare Fan Assembly	JC632A
<b>HP 10508 Switch Chassis (JC612A)</b>	
HP 10508/10508-V 720 Gbps Type A Fabric Module	JC616A
HP 10508/10508-V 1.04 Tbps Type B Fabric Module	JC753A
HP 10508/10508-V 2.32 Tbps Type D Fabric Module	JC754A
HP 10508 Spare Fan Assembly	JC633A
<b>HP 10508-V Switch Chassis (JC611A)</b>	
HP 10508/10508-V 720 Gbps Type A Fabric Module	JC616A
HP 10508/10508-V 1.04 Tbps Type B Fabric Module	JC753A
HP 10508/10508-V 2.32 Tbps Type D Fabric Module	JC754A
HP 10508-V Spare Fan Assembly	JC634A
<b>HP 10512 Switch Chassis (JC748A)</b>	
HP 10512 1.52 Tbps Type B Fabric Module	JC749A
HP 10512 3.44 Tbps Type D Fabric Module	JC750A
HP 10512 Spare Top Fan Tray Assembly	JC758A
HP 10512 Spare Bottom Fan Tray Assembly	JC773A

### Accessory Product Details

**NOTE:** Details are not available for all accessories. The following specifications were available at the time of publication.

#### Transceivers

<b>HP X125 1G SFP LC LH40 1310nm Transceiver</b> (JD061A)  A small form-factor pluggable SFP Gigabit LH40 transceiver that provides a full duplex Gigabit solution up to 40km on a single-mode fiber.	<b>Ports</b>	1 LC 1000Base-LH port (no IEEE standard exists for 1550 nm optics)		
	<b>Connectivity</b>	Connector type	LC	
		Wavelength	1310 nm	
	<b>Physical characteristics</b>	Dimensions	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)	
		Full configuration weight	0.04 lb. (0.02 kg)	
	<b>Electrical characteristics</b>	Power consumption typical	0.8 W	
		Power consumption maximum	1.0 W	
<b>Cabling</b>	Cable type: Single-mode fiber optic, complying with ITU-T G.652;			
	Maximum distance:			
		<ul style="list-style-type: none"> <li>40km distance</li> </ul>		
<b>Services</b>	Fiber type	Single Mode		
	Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.			

<b>HP X120 1G SFP LC LH40 1550nm Transceiver</b> (JD062A)  A small form-factor pluggable (SFP) Gigabit LH40 transceiver that provides a full-duplex Gigabit solution up to 40 km on a single mode fiber.	<b>Ports</b>	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics)		
	<b>Connectivity</b>	Connector type	LC	
		Wavelength	1550 nm	
	<b>Physical characteristics</b>	Dimensions	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)	
		Full configuration weight	0.04 lb. (0.02 kg)	
	<b>Electrical characteristics</b>	Power consumption typical	0.8 W	
		Power consumption maximum	1.0 W	
<b>Cabling</b>	Cable type: Single-mode fiber optic, complying with ITU-T G.652;			
	Maximum distance:			
		<ul style="list-style-type: none"> <li>40km distance</li> </ul>		
<b>Services</b>	Fiber type	Single Mode		
	Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.			

### Accessory Product Details

#### HP X125 1G SFP LC LH70 Transceiver (JD063B)

A small form-factor pluggable (SFP) Gigabit LH70 transceiver that provides a full-duplex Gigabit solution up to 70km on a single-mode fiber.

<b>Ports</b>	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics)
<b>Connectivity</b>	<b>Connector type</b> LC
<b>Physical characteristics</b>	<b>Wavelength</b> 1550 nm
<b>Electrical characteristics</b>	<b>Dimensions</b> 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
<b>Cabling</b>	<b>Full configuration weight</b> 0.04 lb. (0.02 kg)
<b>Services</b>	<b>Power consumption typical</b> 0.8 W
	<b>Power consumption maximum</b> 1.0 W
	Cable type: Single-mode fiber optic, complying with ITU-T G.652;
	Maximum distance: • 70km
	Fiber type Single Mode
	Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

#### HP X125 1G SFP RJ45 T Transceiver (JD089B)

A small form factor pluggable (SFP) Gigabit 1000Base-T transceiver that provides a full duplex Gigabit solution up to 100m on a Cat-5+ cable.

<b>Ports</b>	1 RJ-45 1000BASE-T port (IEEE 802.3ab Type 1000BASE-T)
<b>Connectivity</b>	<b>Connector type</b> RJ-45
<b>Physical characteristics</b>	<b>Dimensions</b> 2.71(d) x 0.54(w) x 0.55(h) in. (6.88 x 1.37 x 1.4 cm)
<b>Electrical characteristics</b>	<b>Full configuration weight</b> 0.07 lb. (0.03 kg)
<b>Cabling</b>	<b>Power consumption typical</b> 0.8 W
<b>Services</b>	<b>Power consumption maximum</b> 1.0 W
	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Ω differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;
	Maximum distance: • 100m
	Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

### Accessory Product Details

#### HP X120 1G SFP LC BX 10-U Transceiver (JD098B)

A small form-factor pluggable (SFP) Gigabit LX-BX10-U transceiver that provides a full duplex Gigabit solution up to 10km on a single mode cable.

<b>Ports</b>	1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-U); Duplex: full only
<b>Connectivity</b>	<b>Connector type</b> LC
<b>Physical characteristics</b>	<b>Dimensions</b> 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm) <b>Full configuration weight</b> 0.04 lb. (0.02 kg)
<b>Electrical characteristics</b>	<b>Power consumption typical</b> 0.8 W <b>Power consumption maximum</b> 1.0 W
<b>Cabling</b>	Maximum distance: • 10km Fiber type Single Mode
<b>Notes</b>	TX 1310nm RX 1490nm
<b>Services</b>	Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

#### HP X120 1G SFP LC BX 10-D Transceiver (JD099B)

A small form-factor pluggable (SFP) Gigabit LX-BX10-D transceiver that provides a full duplex Gigabit solution up to 10km on a single mode cable.

<b>Ports</b>	1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-D); Duplex: full only
<b>Connectivity</b>	<b>Connector type</b> LC
<b>Physical characteristics</b>	<b>Dimensions</b> 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm) <b>Full configuration weight</b> 0.04 lb. (0.02 kg)
<b>Electrical characteristics</b>	<b>Power consumption typical</b> 0.8 W <b>Power consumption maximum</b> 1.0 W
<b>Cabling</b>	Maximum distance: • Up to 10km Fiber type Single Mode
<b>Notes</b>	TX 1490nm RX 1310nm
<b>Services</b>	Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.



### Accessory Product Details

<b>HP X120 1G SFP LC LH100 Transceiver (JD103A)</b>	<b>Ports</b>	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics)	
A small form factor pluggable (SFP) Gigabit LH100 transceiver that provides a full-duplex Gigabit solution up to 100km on a single mode fiber.	<b>Connectivity</b>	<b>Connector type</b>	LC
	<b>Electrical characteristics</b>	<b>Wavelength</b>	1550 nm
		<b>Power consumption typical</b>	0.8 W
	<b>Cabling</b>	<b>Power consumption maximum</b>	1.0 W
		<b>Cabling</b>	Cable type: Single-mode fiber optic, complying with ITU-T G.652;
<b>Services</b>		Maximum distance:	
			• Up to 100km
		Fiber type	Single Mode
		Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

---

<b>HP X120 1G SFP LC SX Transceiver (JD118B)</b>	<b>Ports</b>	1 LC 1000BASE-SX port		
A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550m on a Multimode fiber.	<b>Connectivity</b>	<b>Connector type</b>	LC	
	<b>Physical characteristics</b>	<b>Wavelength</b>	850 nm	
		<b>Dimensions</b>	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)	
	<b>Electrical characteristics</b>	<b>Full configuration weight</b>	0.04 lb. (0.02 kg)	
		<b>Power consumption typical</b>	0.8 W	
<b>Cabling</b>	<b>Power consumption maximum</b>	1.0 W		
	<b>Cabling</b>	Maximum distance:		
<b>Services</b>			• FDDI Grade distance = 220m	
			• OM1 = 275m	
			• OM2 = 500m	
			• OM3 = Not Specified by standard	
		Cable length	up to 550m	
		Fiber type	Multi Mode	
		Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

---

### Accessory Product Details

<b>HP X120 1G SFP LC LX Transceiver (JD119B)</b>	<b>Ports</b>	1 SFP 1000BASE-LX port (IEEE 802.3z Type 1000BASE-LX)
A small form-factor pluggable (SFP) Gigabit LX transceiver that provides a full duplex Gigabit solution up to 550m on MMF or 10Km on SMF	<b>Connectivity</b>	<b>Connector type</b> LC
	<b>Physical characteristics</b>	<b>Wavelength</b> 1300 nm
	<b>Electrical characteristics</b>	<b>Dimensions</b> 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
		<b>Full configuration weight</b> 0.04 lb. (0.02 kg)
	<b>Cabling</b>	<b>Power consumption typical</b> 0.8 W
		<b>Power consumption maximum</b> 1.0 W
	<b>Services</b>	Cable type: Either single mode or multimode;
		Maximum distance: • 550m for Multimode • 10km for Singlemode
		Fiber type Both
		Refer to the HP website at <a href="http://www.hp.com/networking/services">www.hp.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

To learn more, visit: [www.hp.com/networking](http://www.hp.com/networking)

© Copyright 2011-2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.