



MICRO LAMBDA WIRELESS, INC.

FEATURES

- 500 MHz to 50 GHz
- Compensation for Temperature Drift
- Input Regulators for Improved Stability
 - Versus Power Supply Variations
- 12 Bit Tuning Resolution
- 0° C to +65° C Temperature Range

YIG TUNED FILTERS WITH COMMERCIAL DIGITAL DRIVERS PD SERIES



DESCRIPTION

MICRO LAMBDA YIG Filters, model types MLFP Series, MLFR-Series, MLFRD-Series and MLUN-Series are available with integrated digital driver circuits.

MICRO LAMBDA drivers eliminate the need for customers to design or develop their own driver circuits and sophisticated test and alignment procedures. Integrating a driver at MICRO LAMBDA's factory ensures that peak performance will be achieved at the time of manufacture. Alignment and compensation with the particular YIG filter can be maximized down to the component level.

All drivers in this series provide input voltage regulators, and compensation circuits to improve frequency drift.

YIG drivers act as Digital Word-To-Current convert, Converting standard 12 bit binary numbers into mA of current to tune a magnetic tuning coil.

POSITIVE INPUT DIGITAL DRIVERS PD Series

MICRO LAMBDA positive drivers are available for commercial environments. Standard products provide 12 bit TTL tuning input and operate over the 0° to 65° temperature range.

The PD series of digital drivers provide the main coil current from the +15 volt input line. Current increases linearly from 0 mA = 0 GHz at a rate of approximately 50 mA per 1 GHz. A 2-8 GHz filter will require 100 mA @ 2 GHz and 400 mA @ 8 GHz.

Negative input drives which provide the main coil current on the -15 volt input line, are available as an option.

Frequency drift performance can be minimized with the inclusive temperature compensation circuits within the driver. This yields filter/driver combinations set at the factory with excellent frequency accuracy performance.

In special cases, speed-up circuits like those used to improve the tuning speed of YIG oscillators can also be included to provide both fast-tuned filters and with good accuracy. Filter parameters can be maximized during factory alignment to meet customer specific requirements.

AVAILABLE OPTIONS FOR PD-SERIES COMMERCIAL DIGITAL DRIVERS


- Customer Defined "Truth" Table
- Latched TTL
- Negative Input Drivers



STANDARD POSITIVE INPUT DIGITAL DRIVER SELECTION GUIDE: PD SERIES

**YIG TUNED FILTERS WITH
COMMERCIAL DIGITAL DRIVERS**

DRIVER INPUT & RESPONSE	SPECIFICATION (0 to + 65 deg. C)
Tuning Command	Start Word (all 0's) = Lowest Frequency Stop Word (all 1's) = Highest Frequency
Tuning Resolution	12 BIT Positive Logic (Fmax-Fmin)/4095 Bit Resolution All Data Bits have Internal 10k ohm Pull-up Resistor to +5V
Frequency Accuracy (excluding hysteresis)	See Table
Tuning Speed	2 mS for 1 GHz step to within +/- 10 MHz.
Main Driver Inputs	
Supply Voltage & Current	+15 V +/- .5 V @ Filter Tuning Current + 50 mA, Max. -15 V +/- .5 V @ 50 mA, Max.
Supply Voltage Pushing	+/- .5 Vdc , 0.1 MHz Max.
Supply Voltage Ripple	10 mV Ripple Pk-Pk from 2 kHz to 3 MHz
Ground	Chassis Ground
YIG Heater Voltage & Current	+24 Vdc +/- 4 Vdc @ 350 - 750 mA surge for 2 seconds, 100 - 150 mA steady state depending on filter type. Polarity independent : +/- 12 Vdc or +/- 15 Vdc acceptable
Latch Enable	LATCHEN_N is a TTL, 5V CMOS control line. It has an internal 10k-ohm pull-up resistor to +5 V. It is used to transfer the data on the bus to the digital driver circuit. TTL high = data ignored. Connect to Ground if enable is not required. If the unit is to be used on a computer data bus, the below timing Diagram applies. (All times = Minimum) 10 nS rise/fall latch transitions.

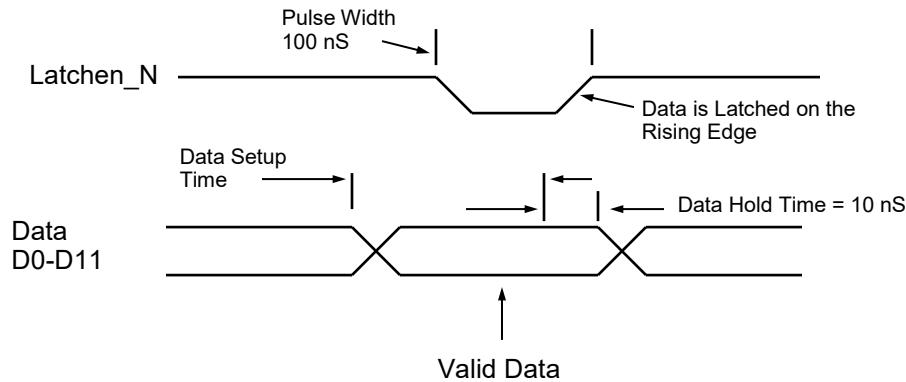

TIMING DIAGRAM



**MICRO LAMBDA
WIRELESS, INC.**

**YIG TUNED FILTERS WITH
COMMERCIAL DIGITAL DRIVERS
PD SERIES – CONTINUED**

Bandpass Filters with Positive Input Digital Drivers (0° C to +65° C)

MODEL	#	Frequency	3 dB	Accuracy	Current	Current	Outline
NUMBER	Stages	GHz	Bandwidth (MHz)	(MHz) *	+15V (mA)	-15V (mA)	Drawing
MLFP-20520PD	2	.50 to 2.0	20	+/- 10	350	50	21-050
MLFP-22018PD	2	2.0 to 18.0	25	+/- 20	1050	50	21-050
MLFP-22026PD	2	2.0 to 26.5	20	+/- 35	1200	50	21-054
MLFP-40520PD	4	.50 to 2.0	20	+/- 10	350	50	21-050
MLFP-42008PD	4	2.0 to 8.0	20	+/- 20	550	50	21-050
MLFP-42018PD	4	2.0 to 18.0	40	+/- 20	1050	50	21-050
MLFP-42026PD	4	2.0 to 26.5	25	+/- 35	1200	50	21-054
MLFP-46018PD	4	6.0 to 18.0	100	+/- 20	1050	50	21-050
MLFP-48018PD	4	8.0 to 18.0	400	+/- 35	1050	50	21-050
MLFP-43040PD	4	3.0 to 40.0	30	+/- 50	1450	50	21-090
MLFP-43044PD	4	3.0 to 44.0	30	+/- 60	1550	50	21-090
MLFP-43050PD	4	3.0 to 50.0	30	+/- 90	2100	50	21-139
MLFP-47040PD	4	7.0 to 40.0	35	+/- 50	1450	50	21-090
MLFP-41840PD	4	18.0 to 40.0	50	+/- 50	1450	50	21-090
MLFP-62018PD	6	2.0 to 18.0	40	+/- 20	1050	50	21-042
MLFP-62026PD	6	2.0 to 26.5	30	+/- 35	1430	50	21-040
MLFP-66018PD	6	6.0 to 18.0	100	+/- 20	1050	50	21-042
MLFP-68018PD	6	8.0 to 18.0	500	+/- 25	1050	50	21-042
MLFP-70520PD	7	0.5 to 2.0	20	+/- 10	350	50	21-042
MLFP-72018PD	7	2.0 to 18.0	40	+/- 35	1050	50	21-042
MLFP-72026PD	7	2.0 to 26.5	30	+/- 35	1430	50	21-040
MLFP-76018PD	7	6.0 to 18.0	500	+/- 45	1050	50	21-042
MLFP-78020PD	7	8.0 to 20.0	500	+/- 45	1150	50	21-042
MLFP-76018LPD	7-L	6.0 to 18.0	500	+/- 45	1050	50	21-042
MLFP-78018LPD	7-L	8.0 to 18.0	500	+/- 45	1050	50	21-042
MLFP-78020LPD	7-L	8.0 to 20.0	500	+/- 45	1150	50	21-042

* Accuracy includes frequency drift and linearity errors over the temperature range.



**MICRO LAMBDA
WIRELESS, INC.**

**YIG TUNED FILTERS WITH
COMMERCIAL DIGITAL DRIVERS
PD SERIES – CONTINUED**

Band Reject Filters with Positive Input Digital Drivers (0° C to +65° C)

Model	Frequency	3 dB	40 dB	Accuracy	Current	Current	Outline
Number	GHz	Bandwidth (MHz)	Bandwidth (MHz)	(MHz) *	+15 V (mA)	-15 V (mA)	Drawing
MLFR-0102PD	1.0 to 2.0	100	10	+/- 5	250	50	21-043
MLFR-0204PD	2.0 to 4.0	125	15	+/- 7	350	50	21-043
MLFR-0408PD	4.0 to 8.0	150	20	+/- 10	550	50	21-043
MLFR-0812PD	8.0 to 12.4	150	25	+/- 12	750	50	21-043
MLFR-1218PD	12.4 to 18.0	150	25	+/- 12	1050	50	21-043
MLFR-0502PD	0.50 to 2.0	100	5 @ 30dB	+/- 5	250	50	21-043
MLFR-0206PD	2.0 to 6.0	150	20	+/- 10	450	50	21-043
MLFR-0208PD	2.0 to 8.0	150	15	+/- 14	550	50	21-043
MLFR-0212PD	2.0 to 12.0	150	10	+/- 15	750	50	21-043
MLFR-0218PD	2.0 to 18.0	150	10	+/- 25	1050	50	21-043
MLFR-0220PD	2.0 to 20.0	150	5	+/- 25	1050	50	21-043
MLFR-0418PD	4.0 to 18.0	150	10	+/- 20	1050	50	21-043
MLFR-160418PD	4.0 to 18.0	150	30	+/- 20	1050	50	21-043
MLFR-0618PD	6.0 to 18.0	150	25	+/- 18	1050	50	21-043
MLFR-160618PD	6.0 to 18.0	150	25	+/- 18	1050	50	21-043
MLFR-0818PD	8.0 to 18.0	150	35	+/- 18	1050	50	21-043
MLFR-160818PD	8.0 to 18.0	150	35	+/- 18	1050	50	21-043



Dual Channel Band Reject Filters with Positive Input Digital Drivers (0° C to +65° C)

MLFRD-0206PD	2.0 to 6.0	120	5	+/- 10	450	50	21-086
MLFRD-0208PD	2.0 to 8.0	120	5	+/- 12	550	50	21-086
MLFRD-0618PD	6.0 to 18.0	100	15	+/- 20	1050	50	21-086
MLFRD-0818PD	8.0 to 18.0	100	15	+/- 18	1050	50	21-086

Ultra Notch Band Reject Filters with Positive Input Digital Drivers (0° C to +65° C)

Model	Frequency	3 dB	60 dB	Accuracy	Current	Current	Outline
Number	GHz	Bandwidth (MHz)	Bandwidth (MHz)	(MHz) *	+15 V (mA)	-15 V (mA)	Drawing
MLUN-0305PD	.35 to .52	50	4 @ 30dB	+/- 2	100	50	**
MLUN-0502PD	.50 to 2.0	80	5 @ 40dB	+/- 5	250	50	**
MLUN-0206PD	2.0 to 6.0	120	17	+/- 10	450	50	**
MLUN-0618PD	6.0 to 18.0	175	35	+/- 18	1050	50	21-156
MLUN-0218PD	2.0 to 18.0	175	5	+/- 25	1050	50	21-156

* Accuracy includes frequency drift and linearity errors over the temperature range.

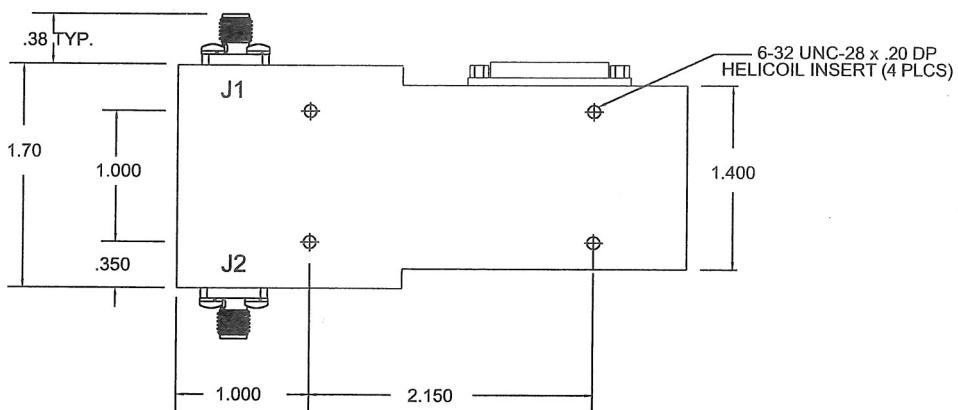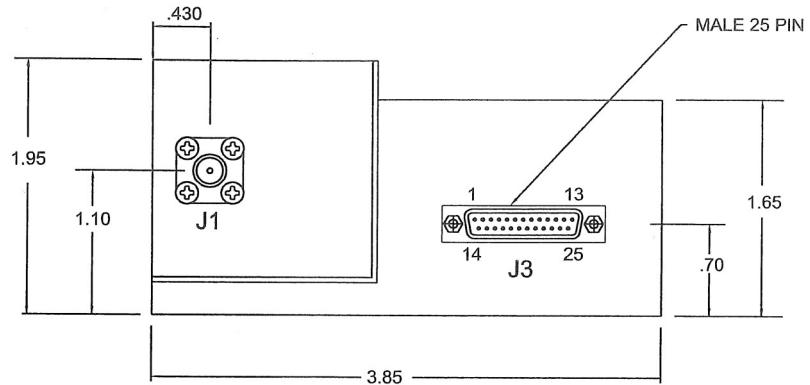

NOTES :



1. - DIMENSIONS ARE IN INCHES
 2. - SUPPLY & GROUND WIRES = 20-22 GAUGE
ALL OTHER WIRES = 24-26 GAUGE
 3. - THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE
 4. - LATCH/STROBE TTL 0 = DATA ACTIVE
 TTL 1 = DATA LATCHED
- (*) : TTL BAND SEL. 0=8-Fmax ; 1=2-8 GHz
* 000=2GHz ; 5FF=8GHz ; FFF=Fmax

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	SMA FEMALE	THD	RF IN
J2	SMA FEMALE	THD	RF OUT
J3	DB25 MALE	1	DATA BIT 0 (LSB)
J3	DB25 MALE	2	DATA BIT 1
J3	DB25 MALE	3	DATA BIT 2
J3	DB25 MALE	4	DATA BIT 3
J3	DB25 MALE	5	DATA BIT 4
J3	DB25 MALE	6	DATA BIT 5
J3	DB25 MALE	7	DATA BIT 6
J3	DB25 MALE	8	DATA BIT 7
J3	DB25 MALE	9	DATA BIT 8
J3	DB25 MALE	10	DATA BIT 9
J3	DB25 MALE	11	DATA BIT 10
J3	DB25 MALE	12	DATA BIT 11 (MSB)

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J3	DB25 MALE	13	N/C
J3	DB25 MALE	14	N/C
J3	DB25 MALE	15	N/C
J3	DB25 MALE	16	N/C
J3	DB25 MALE	17	LATCH/STROBE
J3	DB25 MALE	18	GROUND
J3	DB25 MALE	19	+SUPPLY VOLTAGE
J3	DB25 MALE	20	-SUPPLY VOLTAGE
J3	DB25 MALE	21	HEATER VOLTAGE
J3	DB25 MALE	22	HEATER RETURN
J3	DB25 MALE	23	FM COIL + **
J3	DB25 MALE	24	FM COIL - **
J3	DB25 MALE	25	TTL BAND SELECT *

* REQUIRED FOR DUAL OSC. ONLY
** NOT USED FOR FILTER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE : FRACTIONS DECIMALS ANGLES ± .xx +.00 -.00 ± .010		CONTRACT NO.		
		APPROVALS	DATE	
WEIGHT 19 oz.		DRAWN N.NGUYEN	7/22/10	
		ENGR. DS	7/22/10	
FINISH		MANUF.		
DO NOT SCALE DRAWING		O.A.		
 MICRO LAMBDA WIRELESS, INC. BANDPASS FILTER (1.7") WITH DIGITAL DRIVER				
		SIZE	CAGE No. 0RN63	DWG. NO. 21 - 040
				REV. A

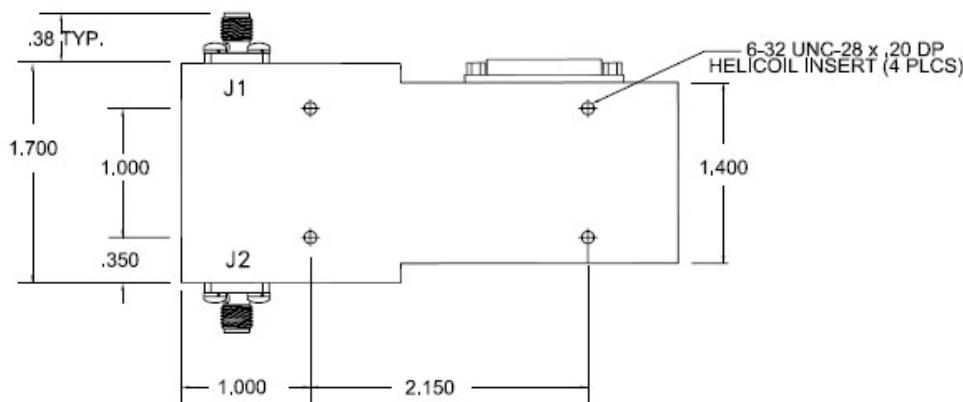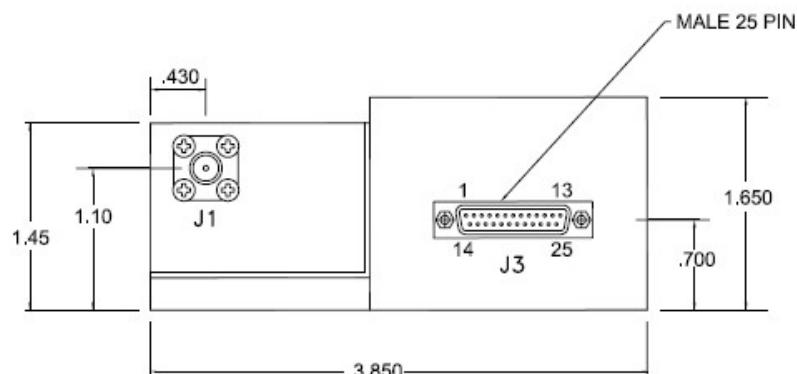

NOTES :

- 1.- DIMENSIONS ARE IN INCHES
- 2.- SUPPLY & GROUND WIRES = 20-22 GAUGE
ALL OTHER WIRES = 24-26 GAUGE
- 3.- THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE

4.- LATCH/STROBE TTL 0 = DATA ACTIVE
TTL 1 = DATA LATCHED

(*) : TTL BAND SEL. 0=8-Fmax ; 1=2-6 GHz
* 000=2GHz ; 5FF=8GHz ; FFF=Fmax

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	SMA FEMALE	THD	RF IN
J2	SMA FEMALE	THD	RF OUT
J3	DB25 MALE	1	DATA BIT 0 (LSB)
J3	DB25 MALE	2	DATA BIT 1
J3	DB25 MALE	3	DATA BIT 2
J3	DB25 MALE	4	DATA BIT 3
J3	DB25 MALE	5	DATA BIT 4
J3	DB25 MALE	6	DATA BIT 5
J3	DB25 MALE	7	DATA BIT 6
J3	DB25 MALE	8	DATA BIT 7
J3	DB25 MALE	9	DATA BIT 8
J3	DB25 MALE	10	DATA BIT 9
J3	DB25 MALE	11	DATA BIT 10
J3	DB25 MALE	12	DATA BIT 11 (MSB)

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J3	DB25 MALE	13	N/C
J3	DB25 MALE	14	N/C
J3	DB25 MALE	15	N/C
J3	DB25 MALE	16	N/C
J3	DB25 MALE	17	LATCH/STROBE
J3	DB25 MALE	18	GROUND
J3	DB25 MALE	19	+SUPPLY VOLTAGE
J3	DB25 MALE	20	-SUPPLY VOLTAGE
J3	DB25 MALE	21	HEATER VOLTAGE
J3	DB25 MALE	22	HEATER RETURN
J3	DB25 MALE	23	FM COIL + **
J3	DB25 MALE	24	FM COIL - **
J3	DB25 MALE	25	TTL BAND SELECT *

* REQUIRED FOR DUAL OSC. ONLY

** NOT USED FOR FILTER


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE : DECIMALS .000-.020 FRACTIONS $\pm \frac{1}{16}$ $\pm \frac{1}{32}$ $\pm \frac{1}{64}$		CONTRACT NO.	
		APPROVALS	DATE
		DRAWN N,NGUYEN	7/12/04
WEIGHT 15 oz.		ENGR.	
FINISH		MANUF.	
		O.Q.	
DO NOT SCALE DRAWING			



MICRO LAMBDA WIRELESS, INC.

BANDPASS FILTER (1.7" X 1.2") WITH DIGITAL DRIVER

SIZE	CAGE NO.	DWG. NO.	REV.
	0RN63	21 - 042	A

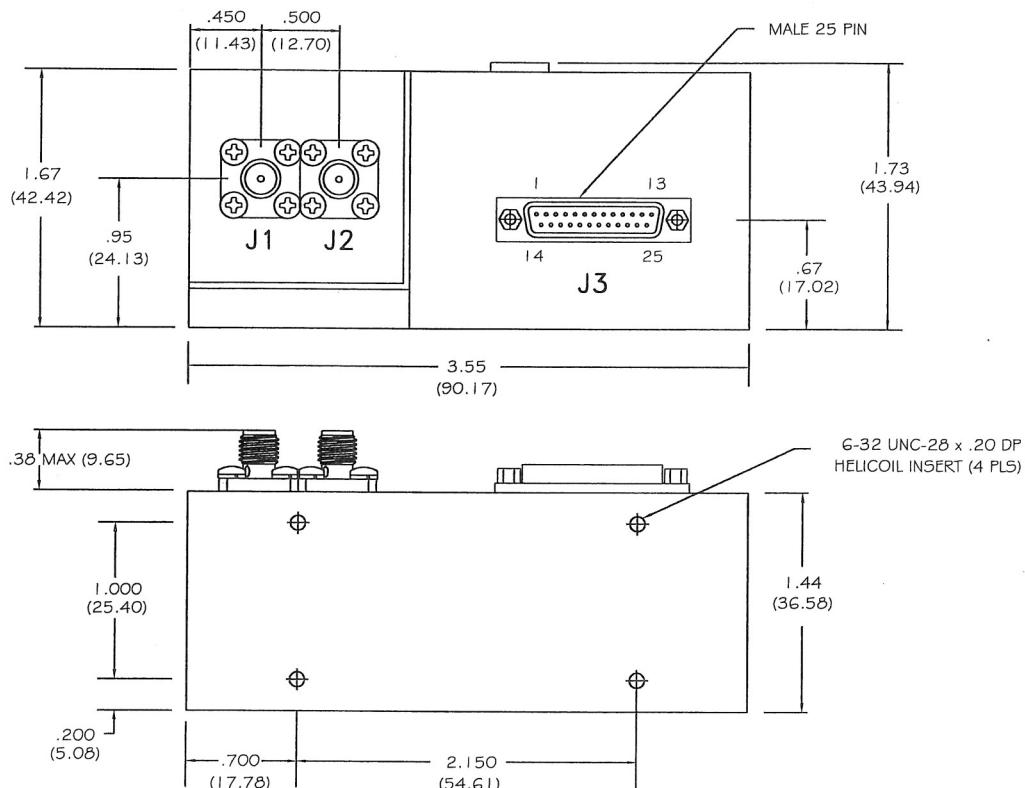

NOTES :

1. - DIMENSIONS ARE IN INCHES
2. - SUPPLY & GROUND WIRES = 20-22 GAUGE
ALL OTHER WIRES = 24-26 GAUGE
3. - THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE

4. - DIMENSIONS IN () ARE IN MM
 5. - LATCH/STROBE TTL 0 = DATA ACTIVE
TTL 1 = DATA LATCHED
- (*) : TTL FILTER SEL.
HIGH=FILTER SELECT/LOW=FILTER BYPASS

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	SMA FEMALE	THD	RF IN
J2	SMA FEMALE	THD	RF OUT
J3	DB25 MALE	1	DATA BIT 0 (LSB)
J3	DB25 MALE	2	DATA BIT 1
J3	DB25 MALE	3	DATA BIT 2
J3	DB25 MALE	4	DATA BIT 3
J3	DB25 MALE	5	DATA BIT 4
J3	DB25 MALE	6	DATA BIT 5
J3	DB25 MALE	7	DATA BIT 6
J3	DB25 MALE	8	DATA BIT 7
J3	DB25 MALE	9	DATA BIT 8
J3	DB25 MALE	10	DATA BIT 9
J3	DB25 MALE	11	DATA BIT 10
J3	DB25 MALE	12	DATA BIT 11 (MSB)

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J3	DB25 MALE	13	N/C
J3	DB25 MALE	14	N/C
J3	DB25 MALE	15	N/C
J3	DB25 MALE	16	N/C
J3	DB25 MALE	17	LATCH/STROBE
J3	DB25 MALE	18	GROUND
J3	DB25 MALE	19	+SUPPLY VOLTAGE
J3	DB25 MALE	20	-SUPPLY VOLTAGE
J3	DB25 MALE	21	HEATER VOLTAGE
J3	DB25 MALE	22	HEATER RETURN
J3	DB25 MALE	23	FM COIL + **
J3	DB25 MALE	24	FM COIL - **
J3	DB25 MALE	25	TTL FILTER SELECT *

* REQUIRED FOR DUAL OSC. ONLY
** NOT USED FOR FILTER



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE :		CONTRACT NO.	
FRACTIONS	DECIMALS	ANGLES	
xx	.020	xxx	.010
WEIGHT		APPROVALS	
1.7 oz. (482gr.)		DRAWN	N.NGUYEN
		CHECKED	5/13/09
FINISH		ISSUED	5/14/09
DO NOT SCALE DRAWING			



MICRO LAMBDA WIRELESS, INC.

BAND REJECT FILTER WITH 12 BIT DIGITAL DRIVER

SIZE	CAGE No	DWG. NO.	REV.
	ORNG63	21 - 043	B

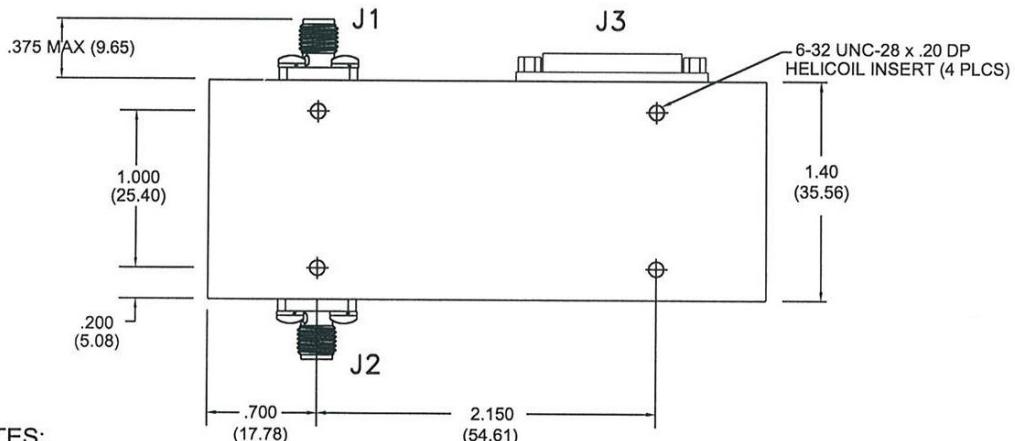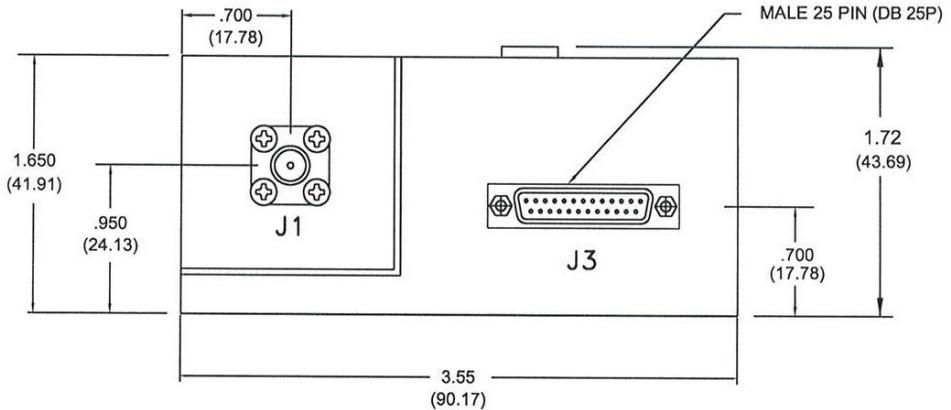

NOTES:

1. - DIMENSIONS ARE IN INCHES

2. - DIMENSIONS IN () ARE IN MM

3. - SUPPLY & GROUND WIRES = 20-22 GAUGE

ALL OTHER WIRES = 24-26 GAUGE

4. - THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE

5. - LATCH/STROBE TTL 0 = DATA ACTIVE

TTL 1 = DATA LATCHED

(*) : TTL BAND SEL. 0=8-Fmax ; 1=2-8 GHz

- 000=2 GHz ; 5FF=8 GHz ; FFF=Fmax

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	SMA	THD	RF IN
J2	SMA	THD	RF OUT
J3	DB25 MALE	1	DATA BIT 0 (LSB)
J3	DB25 MALE	2	DATA BIT 1
J3	DB25 MALE	3	DATA BIT 2
J3	DB25 MALE	4	DATA BIT 3
J3	DB25 MALE	5	DATA BIT 4
J3	DB25 MALE	6	DATA BIT 5
J3	DB25 MALE	7	DATA BIT 6
J3	DB25 MALE	8	DATA BIT 7
J3	DB25 MALE	9	DATA BIT 8
J3	DB25 MALE	10	DATA BIT 9
J3	DB25 MALE	11	DATA BIT 10
J3	DB25 MALE	12	DATA BIT 11 (MSB)


CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J3	DB25 MALE	13	N/C
J3	DB25 MALE	14	N/C
J3	DB25 MALE	15	N/C
J3	DB25 MALE	16	N/C
J3	DB25 MALE	17	LATCH/STROBE
J3	DB25 MALE	18	GROUND
J3	DB25 MALE	19	+ SUPPLY VOLTAGE
J3	DB25 MALE	20	- SUPPLY VOLTAGE
J3	DB25 MALE	21	HEATER VOLTAGE
J3	DB25 MALE	22	HEATER RETURN
J3	DB25 MALE	23	FM COIL + **
J3	DB25 MALE	24	FM COIL - **
J3	DB25 MALE	25	TTL BAND SELECT *

* REQUIRED FOR DUAL OSC. ONLY

** NOT USED FOR FILTER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES # .020 .010		CONTRACT NO.	
		APPROVALS	DATE
WEIGHT	16 oz. (454gr.)	DRAWN N.NGUYEN	6/11/09
FINISH	ISSUED <i>[Signature]</i> 6/11/09	CAGE No.	DWG. NO.
DO NOT SCALE DRAWING			
		SIZE	REV.
		0RN63	C

MICRO LAMBDA WIRELESS, INC.
1.4" (35.56 MM) FILTERS WITH DIGITAL DRIVER

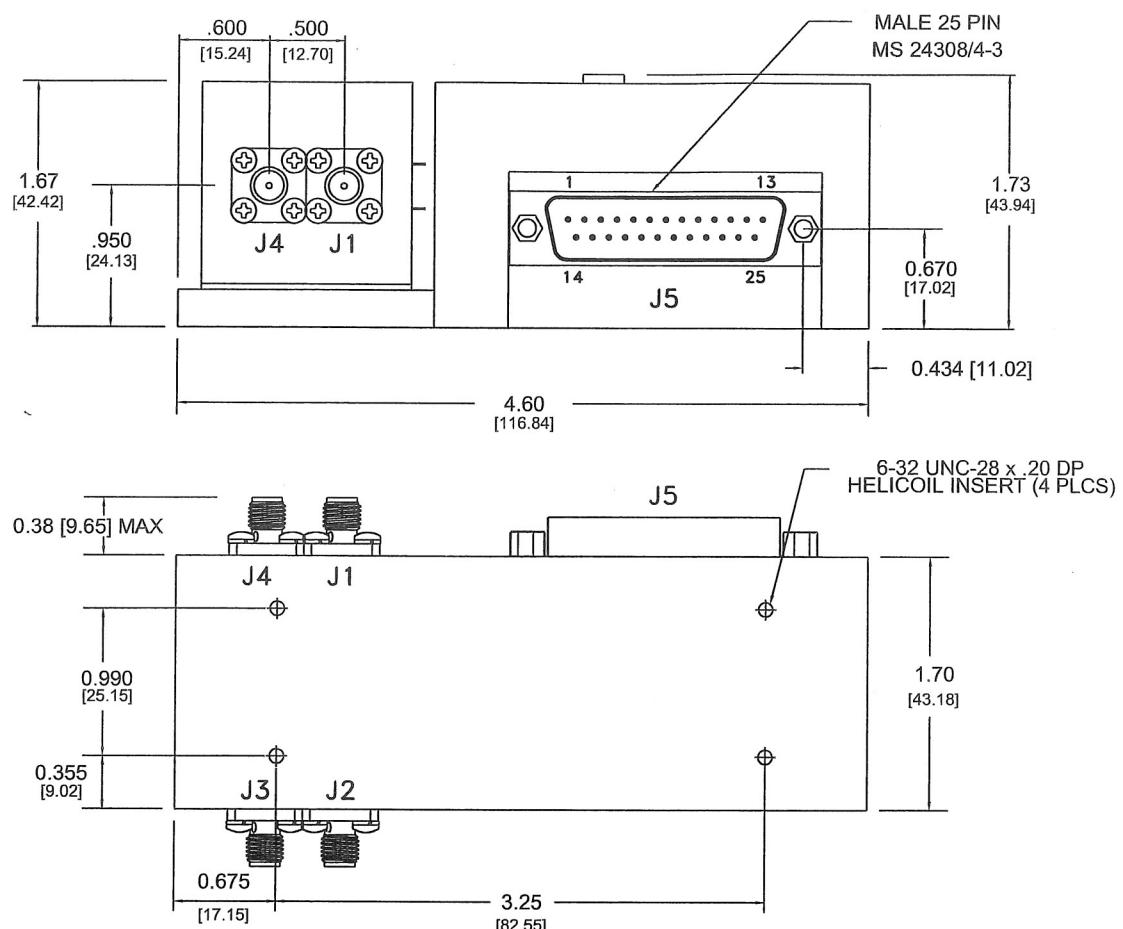

* POWER SUPPLY & GROUND WIRES=20-22 AWG

DATA 000= F-MIN

LATCH-EN 0 = DATA ACTIVE

FFF= F-MAX

1 = DATA LATCHED

* OTHERS=24-26 AWG

* DIMENSIONS ARE IN INCHES

* DIMENSIONS IN [] ARE IN MM.

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	SMA FEMALE	THD	RF IN
J2	SMA FEMALE	THD	RF OUT
J3	SMA FEMALE	THD	RF IN
J4	SMA FEMALE	THD	RF OUT
J5	DB25 MALE	1	DATA BIT 0 (LSB)
J5	DB25 MALE	2	DATA BIT 1
J5	DB25 MALE	3	DATA BIT 2
J5	DB25 MALE	4	DATA BIT 3
J5	DB25 MALE	5	DATA BIT 4
J5	DB25 MALE	6	DATA BIT 5
J5	DB25 MALE	7	DATA BIT 6
J5	DB25 MALE	8	DATA BIT 7
J5	DB25 MALE	9	DATA BIT 8
J5	DB25 MALE	10	DATA BIT 9
J5	DB25 MALE	11	DATA BIT 10

CONN.	TYPE	PIN #	FUNCTION
J5	DB25 MALE	12	DATABIT 11 (MSB)
J5	DB25 MALE	13	N/C
J5	DB25 MALE	14	N/C
J5	DB25 MALE	15	N/C
J5	DB25 MALE	16	N/C
J5	DB25 MALE	17	LATCH/STROBE
J5	DB25 MALE	18	GROUND
J5	DB25 MALE	19	+SUPPLY VOLTAGE
J5	DB25 MALE	20	-SUPPLY VOLTAGE
J5	DB25 MALE	21	HEATER VOLTAGE
J5	DB25 MALE	22	HEATER RETURN
J5	DB25 MALE	23	N/C
J5	DB25 MALE	24	N/C
J5	DB25 MALE	25	N/C

UNLESS OTHERWISE SPECIFIED DIMENSIONS
ARE IN INCHES
TOLERANCE ARE

FRACTIONS DECIMALS ANGLES
xx .020
xxx .010

WEIGHT
17 oz. (482gr.)

FINISH
DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS DATE

DRAWN N.NGUYEN 6/01/09

CHECKED


ISSUED



MICRO LAMBDA WIRELESS, INC.

DUAL FILTER WITH MIL. DIG. DRIVER

SIZE	CAGE No	DWG. NO.	21 - 086	REV A
	0RN63			

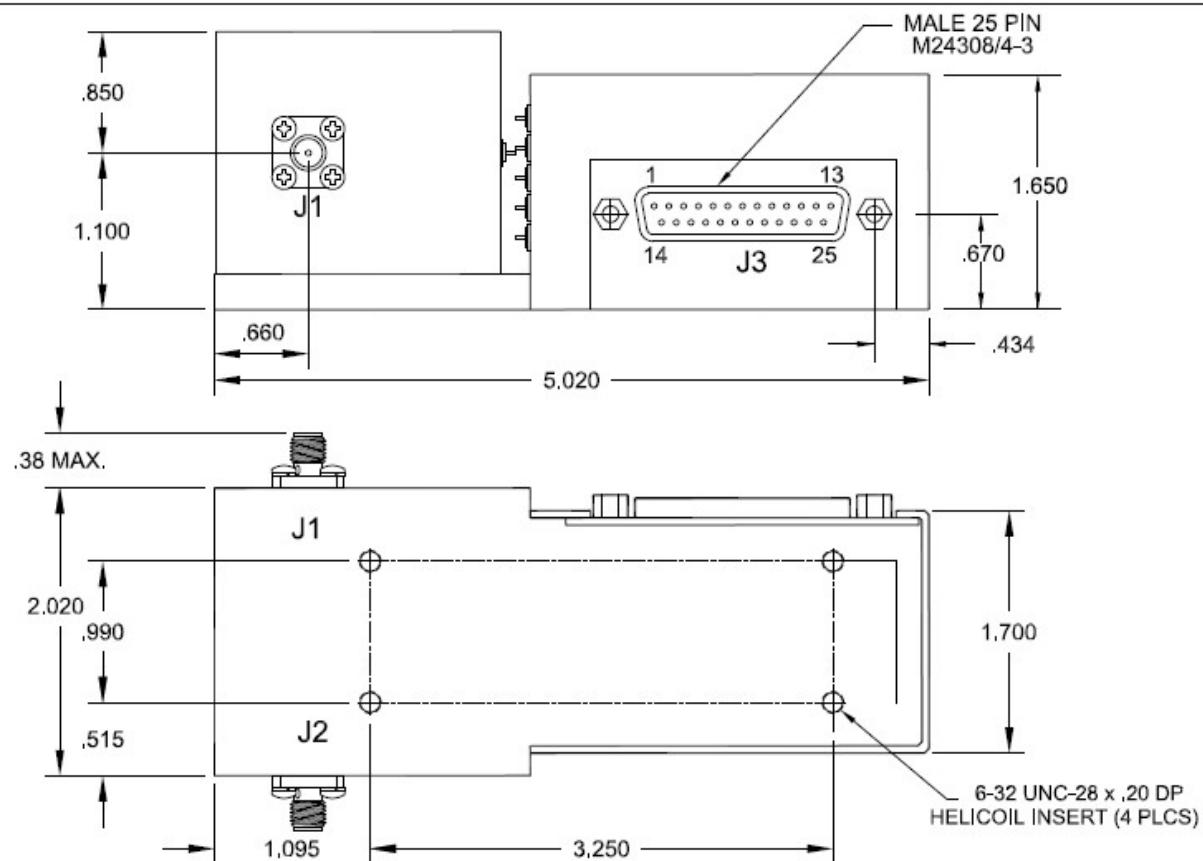

NOTES :

1. - DIMENSIONS ARE IN INCHES
2. - SUPPLY & GROUND WIRES = 20-22 GAUGE
ALL OTHER WIRES = 24-26 GAUGE
3. - THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE

4. - DIMENSIONS IN () ARE IN MM
4. - LATCH/STROBE TTL 0 = DATA ACTIVE
TTL 1 = DATA LATCHED
- (*) : TTL BAND SEL. 0=8-Fmax ; 1=2-8 GHz
* 000=2GHz ; 5FF=8GHz ; FFF=Fmax

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	K-CONN (FEM)	THD	RF IN
J2	K-CONN (FEM)	THD	RF OUT
J3	DB25 MALE	1	DATA BIT 0 (LSB)
J3	DB25 MALE	2	DATA BIT 1
J3	DB25 MALE	3	DATA BIT 2
J3	DB25 MALE	4	DATA BIT 3
J3	DB25 MALE	5	DATA BIT 4
J3	DB25 MALE	6	DATA BIT 5
J3	DB25 MALE	7	DATA BIT 6
J3	DB25 MALE	8	DATA BIT 7
J3	DB25 MALE	9	DATA BIT 8
J3	DB25 MALE	10	DATA BIT 9
J3	DB25 MALE	11	DATA BIT 10
J3	DB25 MALE	12	DATA BIT 11 (MSB)

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J3	DB25 MALE	13	N/C
J3	DB25 MALE	14	N/C
J3	DB25 MALE	15	N/C
J3	DB25 MALE	16	N/C
J3	DB25 MALE	17	LATCH/STROBE
J3	DB25 MALE	18	GROUND
J3	DB25 MALE	19	+SUPPLY VOLTAGE
J3	DB25 MALE	20	-SUPPLY VOLTAGE
J3	DB25 MALE	21	HEATER VOLTAGE
J3	DB25 MALE	22	HEATER RETURN
J3	DB25 MALE	23	FM COIL + **
J3	DB25 MALE	24	FM COIL - **
J3	DB25 MALE	25	TTL BAND SELECT *

* REQUIRED FOR DUAL OSC. ONLY

** NOT USED FOR FILTER


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE: FRACTIONS .XX .XX/256 .XXX/2048		CONTRACT NO:	
DECIMALS		ANGLES	
		APPROVALS	DATE
WEIGHT 20 oz.		DRAWN N. NGUYEN	4/20/10
		ENGR.	
FINISH		MANUF.	
DO NOT SCALE DRAWING		QA	



MICRO LAMBDA WIRELESS, INC.

BPF (2.0" X 1.7") WITH MILITARY 12 BIT DIGITAL DRIVER

SIZE	CAGE NO 0RN63	DWG. NO.	REV. A
		21 - 090	

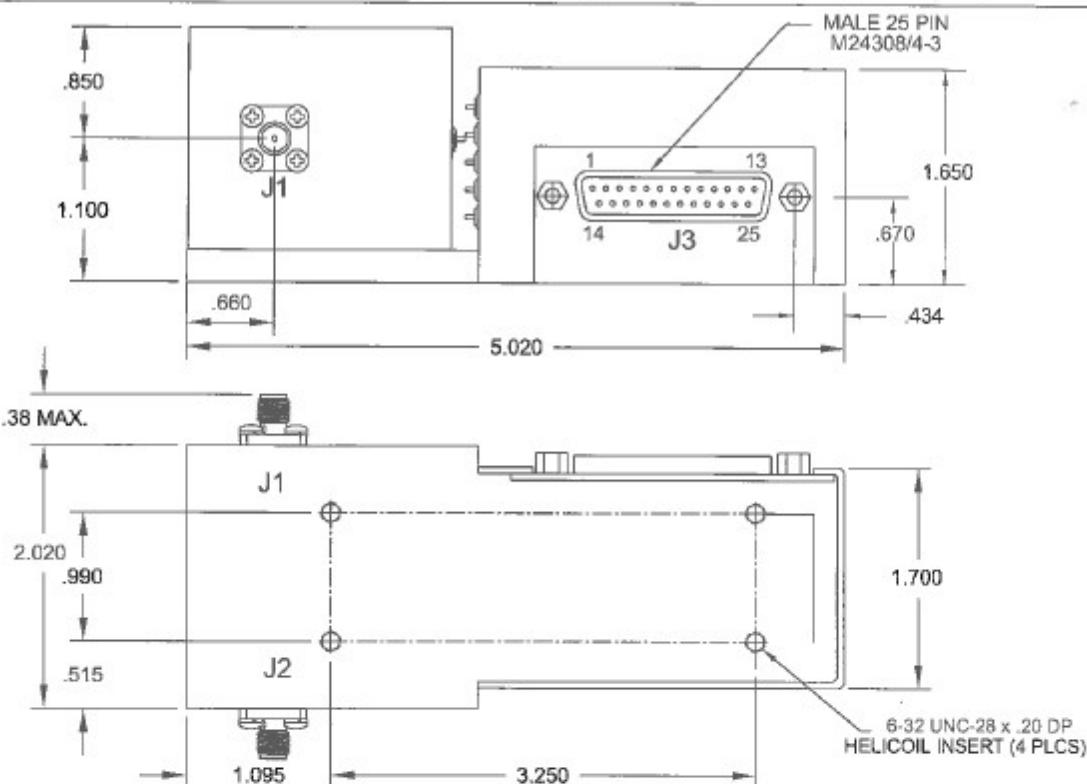

NOTES:

1. - DIMENSIONS ARE IN INCHES
2. - SUPPLY & GROUND WIRES = 20-22 GAUGE
ALL OTHER WIRES = 24-26 GAUGE
3. - THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE

4. - DIMENSIONS IN () ARE IN MM
4. - LATCH/STROBE TTL 0 = DATA ACTIVE
TTL 1 = DATA LATCHED
- (*) : TTL BAND SEL. 0=8-Fmax ; 1=2-8 GHz
* 000=2GHz ; 5FF=8GHz ; FFF=Fmax


CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	V-CONN (FEM)	THD	RF IN
J2	V-CONN (FEM)	THD	RF OUT
J3	DB25 MALE	1	DATA BIT 0 (LSB)
J3	DB25 MALE	2	DATA BIT 1
J3	DB25 MALE	3	DATA BIT 2
J3	DB25 MALE	4	DATA BIT 3
J3	DB25 MALE	5	DATA BIT 4
J3	DB25 MALE	6	DATA BIT 5
J3	DB25 MALE	7	DATA BIT 6
J3	DB25 MALE	8	DATA BIT 7
J3	DB25 MALE	9	DATA BIT 8
J3	DB25 MALE	10	DATA BIT 9
J3	DB25 MALE	11	DATA BIT 10
J3	DB25 MALE	12	DATA BIT 11 (MSB)

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J3	DB25 MALE	13	N/C
J3	DB25 MALE	14	N/C
J3	DB25 MALE	15	N/C
J3	DB25 MALE	16	N/C
J3	DB25 MALE	17	LATCH/STROBE
J3	DB25 MALE	18	GROUND
J3	DB25 MALE	19	+SUPPLY VOLTAGE
J3	DB25 MALE	20	-SUPPLY VOLTAGE
J3	DB25 MALE	21	HEATER VOLTAGE
J3	DB25 MALE	22	HEATER RETURN
J3	DB25 MALE	23	FM COIL + **
J3	DB25 MALE	24	FM COIL - **
J3	DB25 MALE	25	TTL BAND SELECT *

* REQUIRED FOR DUAL OSC. ONLY

** NOT USED FOR FILTER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS: 1/64, 1/32, 1/16, 1/8, 1/4, 1/2		CONTRACT NO.:	
		APPROVALS	DATE
WEIGHT	20.0Z.	ENGR: DS	10/5/15
FINISH		MANUF:	
MICRO LAMBDA WIRELESS, INC.			
BPF (2.0" X 1.7") WITH 12 BIT DIGITAL DRIVER & V CONN.			
DO NOT SCALE DRAWINGS		CAGE NO. ORN63	DRWG. NO. 99-0021-139

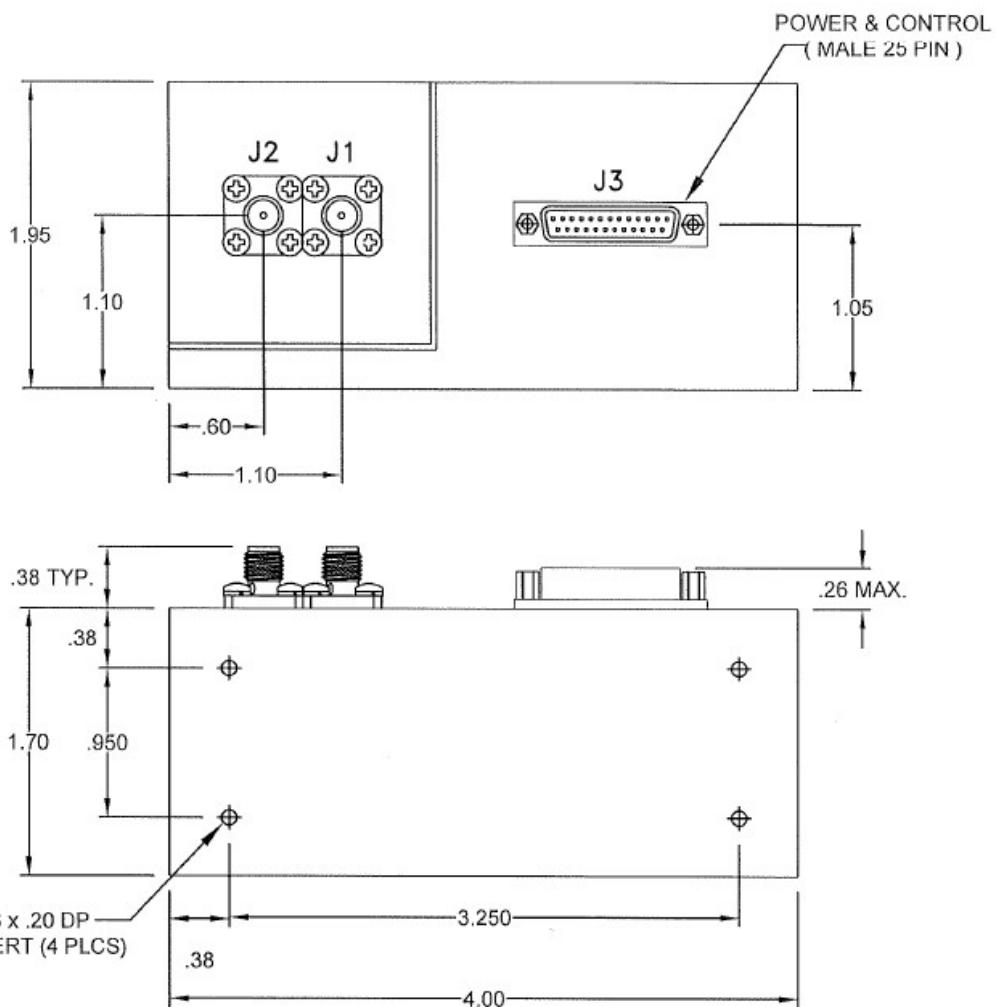

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	SMA	THD	RF IN
J2	SMA	THD	RF OUT
J3	MS 1	1	BIT 11 (MSB)
J3	MS 2	2	BIT 10
J3	MS 3	3	BIT 9
J3	MS 4	4	BIT 8
J3	MS 5	5	BIT 7
J3	MS 6	6	BIT 6
J3	MS 7	7	BIT 5
J3	MS 8	8	BIT 4
J3	MS 9	9	BIT 3
J3	MS 10	10	BIT 2
J3	MS 11	11	BIT 1
J3	MS 12	12	BIT 0 (LSB)

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J3	MS 13	13	N/C
J3	MS 14	14	+ SUPPLY V
J3	MS 15	15	N/C
J3	MS 16	16	- SUPPLY V
J3	MS 17	17	N/C
J3	MS 18	18	GND
J3	MS 19	19	N/C
J3	MS 20	20	GND
J3	MS 21	21	+ HEATER V
J3	MS 22	22	- HEATER V
J3	MS 23	23	N/C
J3	MS 24	24	DATA LATCH
J3	MS 25	25	N/C

UNLESS OTHERWISE SPECIFIED DIMENSIONS
ARE IN INCHES.
TOLERANCE ARE :
FRACTIONS .000-.020
DECIMALS .000-.010
ANGLES .000-.010

CONTRACT NO.



MICRO LAMBDA WIRELESS, INC.

APPROVALS	DATE	DRAWN N.NGUYEN 11/14/19	
		CHECKED	ISSUED 11/14/19
WEIGHT 19 oz.			
FINISH			
DO NOT SCALE DRAWING			

ULTRA NOTCH BRF (1.7") WITH DIGITAL DRIVER

SIZE CAGE No 0RN63 Dwg. No. 99 - 0021 - 156 REV. A