




Quick Installation Guide

5 Megapixel Day & Night Outdoor Network Camera

This document will guide you through the basic installation process for your new D-Link Network Camera.

DCS-7517

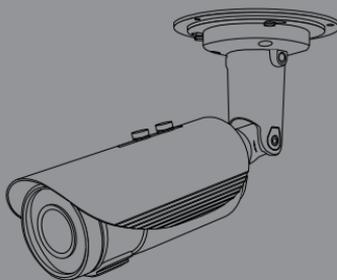

Quick Installation Guide
Краткое руководство по установке
Guía de Instalación Rápida
Guia de Instalação Rápida
快速安裝指南
Petunjuk Pemasangan Cepat

Documentation also available on CD
and via the D-Link Website

Quick Install Guide

This installation guide provides basic instructions for installing the Network Camera on your network. For additional information about how to use the camera, please see the User's Manual which is available on the CD included in this package or from the D-Link support website.

Installation Steps

1. Verify the package contents against the list below.
2. Hardware Overview
3. Hardware Installation
4. Configuration with Wizard
5. SD Card Installation
6. Mounting Instructions

Package Contents

- DCS-7517 5 Megapixel Day & Night Outdoor Network Camera
- Manual and Software on CD-ROM
- Quick Install Guide
- Power Adapter
- Cable Bundle
- RJ-45 Extension Connector
- Mounting Bracket and Screws
- Alignment Sticker
- Waterproof Cable Cover


If any of the above items are missing, please contact your reseller.

Safety Notice:


Installation and servicing should be done by certified technicians so as to conform to all local codes and prevent voiding your warranty.

Note: Users are advised to ensure that the weatherproof seals are secured firmly in place.

Hardware Overview

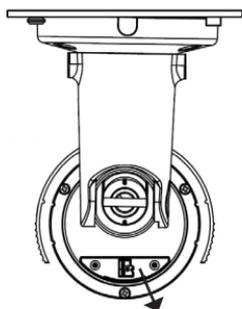


microSD Card Cover
Remove cover to insert/
remove the microSD card

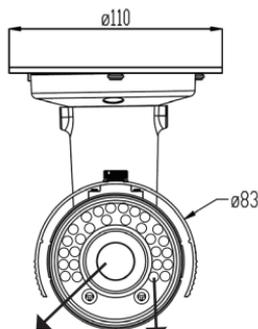

Camera Lens


IR LEDs
Provide illumination for
low-light environments

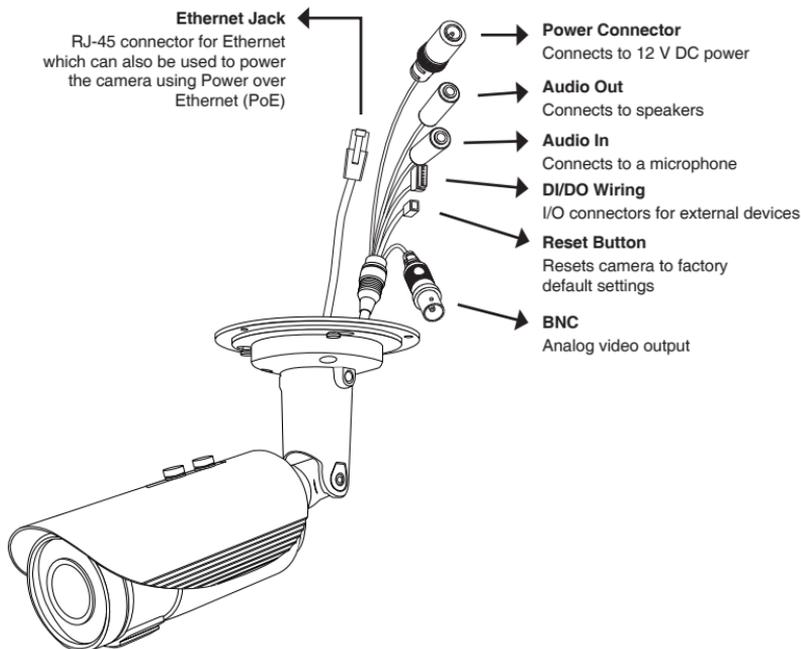

Hardware Installation


General Connection Using 12 V DC Power Adapter

1. Connect the network camera to a hub via an Ethernet cable.
2. Connect the supplied power cable from the camera to a power outlet.

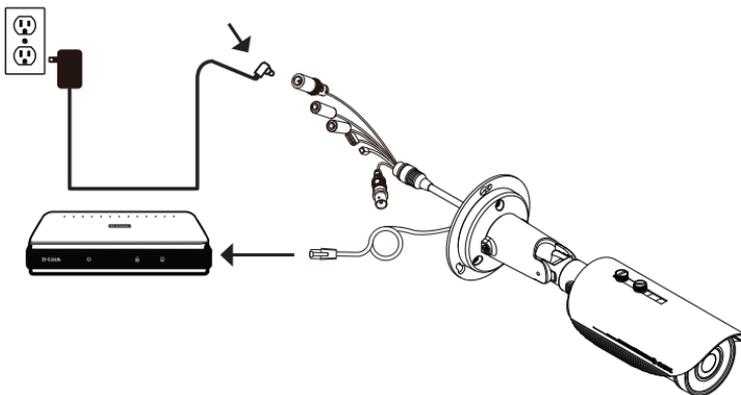

Connection with a PoE Hub


If you are using a PoE hub, connect the IP camera to the hub via an Ethernet cable, which will provide transmission of both power and data over a single cable.

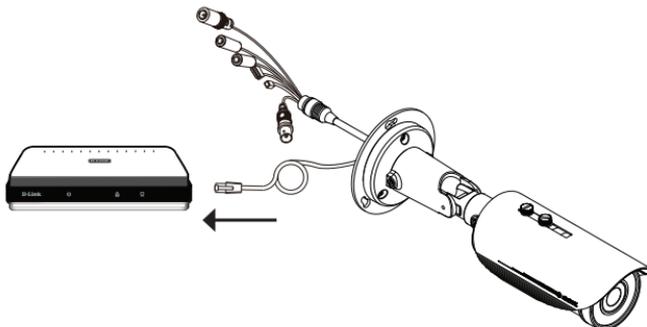

Configuration with Wizard

Insert the DCS-7517 CD into your computer's CD-ROM drive to begin the installation. If the Autorun function on your computer is disabled, or if the D-Link Launcher fails to start automatically, click **Start > Run**. Type **D:\autorun.exe**, where D: represents the drive letter of your CD-ROM drive.

The following window will open.

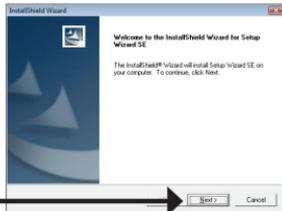

Click **Next** to continue.



Click **Yes** to accept the License Agreement.



To start the installation process, click **Next**.

Note: The installation may take several minutes to finish.



Click **Finish** to complete the installation.

Click on the **D-Link Setup Wizard SE** icon that was created in your Windows Start menu.

Start > D-Link > Setup Wizard SE



The Setup Wizard will appear and display the MAC address and IP address of your camera(s). If you have a DHCP server on your network, a valid IP Address will be displayed. If your network does not use a DHCP server, the network camera's default static IP (**192.168.0.66**) will be displayed.

Select your camera, then click the **Wizard** button to continue.



Enter the Admin ID and password. When logging in for the first time, the default Admin ID is **admin** with the password left blank.

Click **Next**, to proceed to the next page.



Select DHCP if your camera obtains an IP address automatically when it boots up. Select static IP if the camera will use the same IP address each time it is started.

Click **Next**, to proceed to the next page.




Take a moment to confirm your settings and click **Restart**.



Viewing Your Camera via a Web Browser

Click on the **D-Link Setup Wizard SE** icon that was created in your Windows Start menu (**Start > D-Link > Setup Wizard SE**).

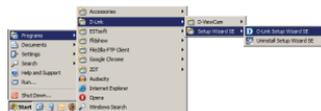

Select the camera and click the button labeled **"Link"** to access the web configuration.



The Setup Wizard will automatically open your web browser to the IP address of the camera.

Enter **admin** as the default username and leave the password blank.



Click **OK** to continue.

This section shows your camera's live video. You can select your video profile and view or operate the camera. For additional information about web configuration, please refer to the user manual included on the CD-ROM or the D-Link website.



microSD Card Installation


Open the microSD Card Cover

Unscrew the microSD card cover and pull it down to open it.

Install the microSD Card

Push the microSD card into the camera with the gold contacts oriented towards the base of the camera. To eject the microSD card, push the microSD card into the slot.

Note: Users are advised to ensure that the weatherproof seals are secured firmly in place.

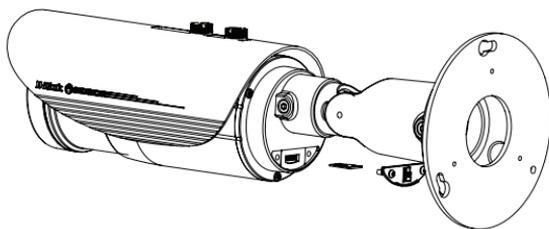

Mounting Instructions

It is highly recommended that you configure and test your camera before mounting it.

Place the alignment sticker where you want to position the camera. Make sure the camera base will be positioned so that the cable channel is on the bottom.


Use a 6 mm drill bit to make the required holes approximately 25 mm deep, then insert the wall anchors into the holes.

If you are running the camera cables through the wall, drill a hole in the center and pull the cables through the hole.


Use the screws provided to mount the camera to the wall.

If you are running the camera cables out the side of the camera, guide the camera cables through the cable channel on the base.



Connect the power and Ethernet cables, or just the Ethernet cable if you are using a PoE connection.

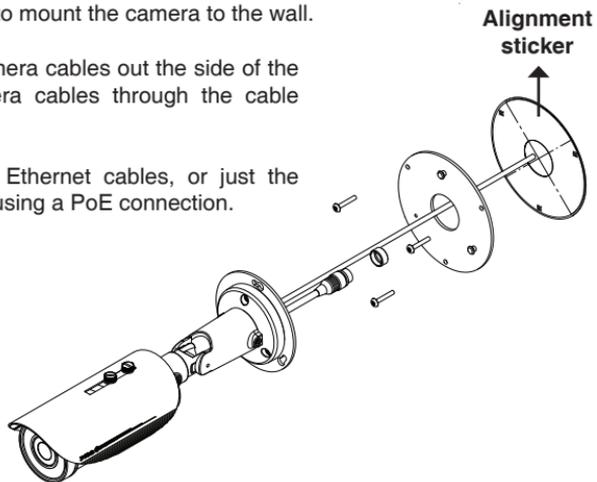

If the cable bundle is not required, it can be detached from the camera, and the socket sealed with a weatherproof cable cover.

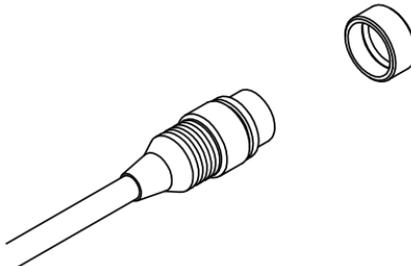

To adjust the camera's angle, turn the adjustment ring counterclockwise to loosen it, then move the camera to the desired position and angle. When you are finished, turn the adjustment ring right clockwise to tighten it.

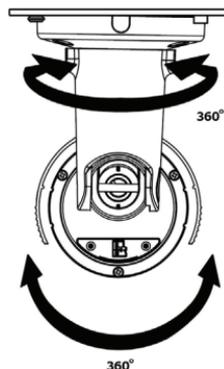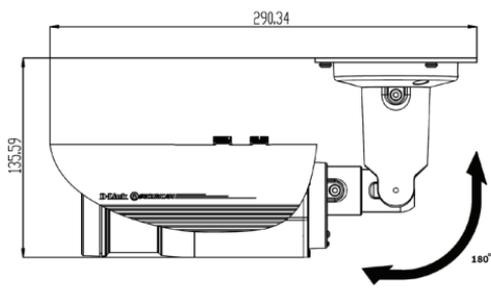

Additional Information

Additional help is available through our offices listed at the back of the User's Guide or online. To know more about D-Link products or marketing information, please visit the website <http://www.dlink.com>.

Warranty Information

Please visit <http://warranty.dlink.com/> for warranty information for your region.

Notes

D-Link[®]



Ver.1.00(WW)_130x183
2015/05/19