




CDC[®] PLATO[®] FLEXIBLE DISK SUBSYSTEM

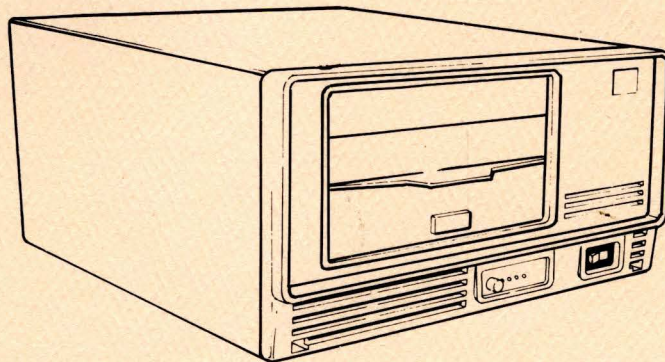

**HARDWARE MAINTENANCE MANUAL
(SITE AND SUPPORT INFORMATION)**

WARNING

This equipment has been certified to comply with the limits for a Class B computing device pursuant to Subpart J of Part 15 of FCC Rules. Only peripherals (computer input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this computer. Operation with non-certified peripherals is likely to result in interference to radio and TV reception.

This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a Class B computing device in accordance with the specifications in Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- reorient the receiving antenna
- relocate the computer with respect to the receiver
- move the computer away from the receiver
- plug the computer into a different outlet so that the computer and receiver are on different branch circuits.


If necessary, the user should consult the dealer or an experienced radio/ television technician for additional suggestions. The user may find the following booklet prepared by the Federal Communications Commission helpful:

"How to Identify and Resolve Radio-TV Interference Problems".

This booklet is available from the US Government Printing Office, Washington, DC 20402, Stock No. 004-000-00345-4.



CDC® PLATO® FLEXIBLE DISK SUBSYSTEM

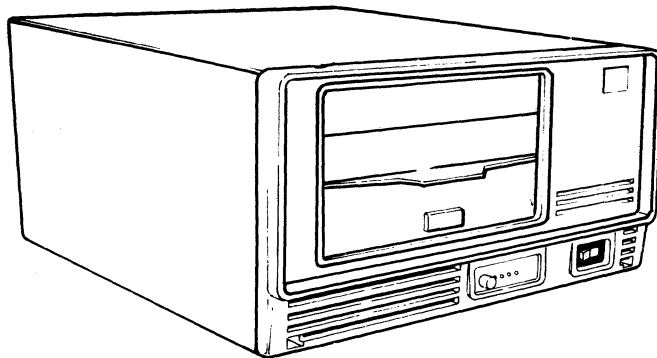

**HARDWARE MAINTENANCE MANUAL
(SITE AND SUPPORT INFORMATION)**

REVISION RECORD

REVISION	DESCRIPTION
01 (08-13-80)	Preliminary release.
A (10-03-80)	Final release. Includes changes per ECOs 14165, 14190, 14199, 14203, 14246, 14258, 14317, 14323, and 14328.
B-Interim (12-17-80)	Manual revised to incorporate ECO 14376.
C (01-23-81)	Manual revised to incorporate ECO's 14469, 14468, 14454, 14391, 14329, 14321, and 14279. Incorporates ECO 14376 (B-Interim) in its final form & makes technical corrections/changes.
D (03-02-81)	Manual revised to incorporate ECOs 14514 and 14571.
E-Interim (08-13-81)	Manual revised to incorporate ECO's 14539, 14591, 14582, 14613, 14663, and 14721.
F (10-08-81)	Manual revised to incorporate ECOs 14742, 14774, and 14838. Also includes technical changes to include media update and product name change.
G (01-19-82)	Manual revised to incorporate ECOs 14885, 14985, 14965, 14820, 14778. Also includes change in SAM 3, product name change.
H (11-23-82)	Manual revised to incorporate ECOs 15294, 15351, and 15462. FCC certification information also added.
J (05-11-83)	Manual revised to incorporate ECOs 14663 (Rev B), 14999, 15634, 15675, 15771, 15786, 15812 and 15867.

Publication No.

62949100

Address comments concerning this manual to:

Control Data Corporation
 Publications and Graphics Div.
 2401 North Fairview Avenue
 St. Paul, Minnesota 55113

REVISION LETTERS I, O, Q AND X ARE NOT USED

©1980, 1981, 1982, 1983, 1984, 1985

by Control Data Corporation
 Printed in the United States of America

or use Comment Sheet in
 the back of this manual.

REVISION RECORD (CONTD)

REVISION	DESCRIPTION
<p>K (08-16-83)</p>	<p>Manual revised to incorporate ECOs 15917, 15945, 16005 and 16060.</p>
<p>L (03-20-84)</p>	<p>Manual revised to incorporate ECO 16410.</p>
<p>M (03-29-85)</p>	<p>Manual revised to incorporate ECOs 16656, 16781, 16873, and 17061.</p>
<p>Publication No. 62949100</p>	

MANUAL TO EQUIPMENT LEVEL CORRELATION SHEET

This manual reflects the equipment configurations listed below.

EXPLANATION: Locate the equipment type and series number, as shown on the equipment FCO log, in the list below. Immediately to the right of the series number is an FCO number. If that number and all of the numbers underneath it match all of the numbers on the equipment FCO log, then this manual accurately reflects the equipment.

EQUIPMENT TYPE	SERIES	WITH FCO'S	COMMENTS
FA501-A	01	-	ECOs 14328, 14376, 14454
	01	-	ECO 14165 (S/N 141)
	02	-	ECO 14468 (S/N 274)
	03	14571	S/N 401
	04	-	ECO 14663 (S/N 701)
	05	-	ECO 14985 (S/N 1115)
	06	-	ECO 15771 (S/N 4635)
	07	-	
FA501-B	01	-	ECOs 14238, 14376, 14454
	01	-	ECO 14165 (S/N 141)
	02	14571	S/N 401
	03	-	ECO 14663 (S/N 701)
	04	-	ECO 14985 (S/N 1115)
	05	-	ECO 15771 (S/N 4635)
	06	-	
FA501-C	01	-	ECO 14985, 15043
	01	-	ECO 15771 (S/N 4635)
	02	-	
FA501-D	01	-	ECO 14985
	01	-	ECO 15771 (S/N 4635)
	02	-	
BR810-A	01	-	ECOs 14240, 14165, 14328, 14403
	01	-	ECO 14468 (S/N 274)
	02	-	ECO 14985 (S/N 391)
	03	-	
BR810-B	01	-	ECOs 14240, 14165, 14328
	01	-	ECO 14985 (S/N 391)
	02	-	

MANUAL TO EQUIPMENT LEVEL CORRELATION SHEET (CONTD)

EQUIPMENT TYPE	SERIES	WITH FCO'S	COMMENTS
XA243-A	01		
FT116-A	01		

LIST OF EFFECTIVE PAGES

New features, as well as changes, deletions, and additions to information in this manual are indicated by bars in the margins or by a dot near the page number if the entire page is affected. A bar by the page number indicates pagination rather than content has changed.

PAGE	REV	PAGE	REV	PAGE	REV
Cover	-	6A-5	F	7-49/7-50	F
WARNING		6A-6 thru 6A-8	G	7-51/7-52	G
Title Page	-	PROCEDURES		7-53 thru 7-55	H
iia thru iic	M	Section 6B		7-56 thru 7-59	K
iii/iv	J	6B-1	C	7-60/7-61	M
v/vi	M	6B-2	F	8-1	A
vii thru xi	G	6B-3/6B-4	A	Comment Sheet	M
xii	M	6B-5 thru 6B-9	M	Mailer	-
xiii/xiv	M	6B-10	A	Back Cover	-
PLATO HOTLINE	-				
1-1 thru 1-4	G				
1-5	F	PARTS DATA FOR			
2-1 thru 2-3	G	PREPRODUCTION			
2-4	F	UNITS ONLY			
3-1 thru 3-3	G	7-1/7-2	A		
3-4/3-5	M	7-3/7-4	J		
3-6 thru 3-8	G	7-5/7-6	G		
3-9	F	7-7	M		
4-1/4-2	F	7-8	A		
4-3	C	7-9	M		
4-4	A	7-10	A		
4-5	F	7-11 thru 7-16	C		
4-6/4-7	G	7-17 thru 7-20	E		
4-8	A				
4-9	F	PARTS DATA FOR			
4-10/4-11	A	PRODUCTION UNITS			
4-12	F	ONLY			
4-13	C	7-21/7-22	M		
4-14	F	7-23 thru 7-28	J		
4-15	G	7-29/7-30	M		
5-1	A	7-31/7-32	G		
5-2 thru 5-16.2	J	7-33 thru 7-38	L		
5-17	J	7-38.1/7-38.2	L		
5-18 thru 5-22	A	7-38.3 thru 7-38.8	M		
5-23 thru 5-25	K	7-39 thru 7-42	J		
6-1 thru 6-3	A				
6-4/6-5	F	COMMON PARTS DATA			
6-6	A	APPLICABLE TO BOTH			
6-7	F	PREPRODUCTION AND			
SAMS Section 6A		PRODUCTION UNITS			
6A-1	A	7-43 thru 7-47	D		
6A-2	F	7-48	J		
6A-3	C	7-48.1 thru 7-48.3	J		
6A-4	A	7-48.4 thru	M		
		7-48.16			



PREFACE

This manual provides information to aid in the installation, checkout, and maintenance of the CDC® PLATO® Flexible Disk Subsystem. Information is provided for both on-site and technical support use. The subsystem provides flexible disk storage capability to an Information Systems Terminal (IST-II and IST-III).

Product number correlation for the various subsystem configurations and associated memory options is as follows:

<u>Equipment Number</u>	<u>Description</u>
FA501-A	Primary Flexible Disk Subsystem, 60 Hz, 120 V ac.
BR810-A	Secondary Flexible Disk Drive, 60 Hz, 120 V ac.
FA501-B	Primary Flexible Disk Subsystem, 50 Hz, 220/240 V ac.
BR810-B	Secondary Flexible Disk Drive, 50 Hz, 220/240 V ac.
FA501-C	Control Data 110 Primary FD Subsystem, 60 Hz, 120 V ac.
FA501-D	Control Data 110 Primary FD Subsystem, 50 Hz, 220/240 V ac.
XA243-A	Additional 16K by 8-bit RAM Option (up to three RAM options may be added to the FA501-A/B). The FA501-C/D has 64K RAM standard.
FT116-A	Terminator assembly for IST parallel I/O channel.

Organization of this manual is divided into eight major sections:

- Section 1 - General Description
- Section 2 - Operation
- Section 3 - Installation and Checkout
- Section 4 - Theory of Operation
- Section 5 - Diagrams
- Section 6 - Maintenance
- Section 7 - Parts Data
- Section 8 - Wire Lists

Other manuals providing reference and operator information on the flexible disk subsystem, maintenance information on the flexible disk drive assembly, and maintenance information on the IST terminal are listed as follows. All manuals may be ordered from:

Control Data Corporation
Literature and Distribution Services
308 North Dale Street
St. Paul, Minnesota 55103

<u>Title</u>	<u>Publication Number</u>
PLATO® Flexible Disk Subsystem Operators Guide	62940005
9406 Flexible Disk Drive Assembly Hardware Maintenance Manual	77614903
Information Systems Terminal II Hardware Maintenance Manual (IST-II)	82100083
Information Systems Terminal III Hardware Maintenance Manual (IST-III)	62940007
Engineering Services Diagnostic Disk for PLATO® Flexible Disk Subsystem Operators Manual	62940015
Control Data 110 Microcomputer System Installation and Diagnostics Manual	62940024
Control Data 110 Software Users Manual	62940025

In addition to these publications, an instructional flexible disk and user's installation guide are available as follows:

Micro Plato Instructional Flexible Disk	76773000 A
Micro Plato User's Installation Guide	76368339

The disk and the guide may be ordered, using an Education Order Form, from:

Order Administrator
Education Company
8100 34th Avenue South
P.O. Box 0
Minneapolis, Minnesota 55440

Diagnostic disks to support CD110 and Micro Plato are available as follows:

CD110 Users Diagnostic Flexible Disk	66314929
Engineering Services Diagnostic Disk	76774999

Control Data Corporation
Software Development and Distribution (ARH230)
4201 Lexington Avenue North
Arden Hills, Minnesota 55112

Or telephone:

Gerald J. Ferber, ARH230,
Software Distribution
Phone 612-482-3744
Control Net 235-3747

The IST II and the IST III have been approved by the Federal Communications Commission (FCC) as not being harmful to the telephone network when connected directly to the telephone lines. Instructions for fully complying with Part 68, FCC Docket 19528 can be found in the Site and Support manuals that accompany the particular terminal being used.

CONTENTS

1. GENERAL DESCRIPTION

Subsystem Configuration	1-1
Primary Flexible Disk Subsystem	1-2
Control Data 110 Primary Flexible Disk Subsystem	1-2
Secondary Flexible Disk Drive	1-2
RAM Expansion Feature	1-2
ROM Expansion Feature (Future Availability)	1-2
Media	1-3
Equipment Specifications	1-4

2. OPERATION

Voltage Select Switch	2-1
Power On/Off Switch/Circuit Breaker	2-1
Device Address Strap (Primary Units Only)	2-2
Master Reset Switch (Primary Units Only)	2-2
Diagnostic Control Switches (Primary Units Only)	2-2
Switch 20	2-3
Switch 21	2-3
Switch 22	2-3
Switch 23	2-3
Switch 24 and 25	2-3
Switch 26	2-4
Switch 27	2-4
LED Indicators	2-4

3. INSTALLATION AND CHECKOUT

Packaging	3-1
Installation	3-1.1
Subsystem Installation	3-2
RAM Option Installation	3-6
Checkout	3-7

4. THEORY OF OPERATION

AC Power Entry Panel	4-2
Power Supply	4-2
Backplane	4-3
Flexible Disk Drive (FDD) Assembly	4-4
Controller Board (Primary Units Only)	4-6
Z80A Microprocessor	4-8
9517A-4 Direct-Memory-Access (DMA) Controller	4-8
1791A-02 Flexible Disk Controller (FDC)	4-9
2716 Erasable Programmable Read-Only Memory (EPROM)	4-9
Z80 Counter/Timer Circuit (CTC)	4-10
9519 Interrupt Controller	4-11

External Interface Pin Assignments	4-12
Internal Connector Pin Assignments	4-12

5. DIAGRAMS

Schematic Diagram, 9BED	5-2
Schematic Diagram 9BKD (PFDS Power Supply)	5-18
Schematic Diagram (9BMD) (FDD Controller Backplane)	5-21
50/60 Hz A.C. Power Wiring	5-22
Schematic Diagram (1AFD) (PFDS Power Supply)	5-23

6. MAINTENANCE

General Maintenance Information	6-1
Suggested Emergency Maintenance Procedure	6-1
Before Leaving for Customer Site	6-2
Upon Arriving at Customer Site	6-2
Safety Precautions	6-3
Maintenance Tools and Materials	6-3
MOS Circuit-Handling Precautions	6-3
Maintenance Aids	6-4
Location of Major Assemblies	6-4
Diagnostic and Corrective Maintenance	6-4
Diagnostic Self-Test Routines	6-4
LED Test	6-5
Test 0 - ROM Checksum	6-5
Test 1 - RAM Test	6-6
Test 2 - Interrupt Generator	6-6
Test 3 - Flexible Disk Controller	6-6
Test 4 - DMA Test	6-6
Test 5 - I/O Loopback Test	6-6
Test 6 - CTC Test	6-6
Test 7 - Writing and Reading the Disk	6-7
DIAG Flexible Disk Diagnostic Tests	6-7
Explanation of SAM Format	6-7
Organization of SAMs and Procedures	6-7
Procedure 1 - Power Application/Removal	6B-1
Procedure 2 - Flexible Disk Installation/ Removal	6B-2
Procedure 3 - Front Panel and Cabinet Hood Removal/Replacement	6B-4
Procedure 4 - Controller Board Removal/ Replacement	6B-5
Procedure 5 - Power Supply Removal/Replacement	6B-6
Procedure 6 - Disk Drive Unit Removal/ Replacement	6B-8

7. PARTS DATA

(Pre-Production Units Only)

SPL Primary Flexible Disk Subsystem	7-3
SPL Secondary Flexible Disk	7-5
Genealogy Chart Primary Flexible Disk Subsystem 60 Hz	7-7
Genealogy Chart Primary Flexible Disk Drive 60 Hz . .	7-8
Genealogy Chart Primary Flexible Disk Subsystem 50 Hz	7-9
Genealogy Chart Secondary Flexible Disk Drive 50 Hz	7-10
PLATO Flexible Disk (TLA)	7-11
AC Entry Assy, Flex Disk	7-17

(Production Units Only)

SPL FA501A/C (60 Hz Primary)	7-21
SPL FA501B/D (50 Hz Primary)	7-23
SPL BR810A (60 Hz Secondary)	7-25
SPL BR810B (50 Hz Secondary)	7-27
Genealogy Chart (60 Hz Primary)	7-29
Genealogy Chart (50 Hz Primary)	7-30
Genealogy Chart (60 Hz Secondary)	7-31
Genealogy Chart (50 Hz Secondary)	7-32
PLATO Flexible Disk (TLA)	7-33
CD110 Flexible Disk (TLA)	7-38.5
AC Entry Assembly	7-39

(Common Parts Data)

P.C. Card Assembly, 9BED (Disk Controller)	7-43
P.C. Card Assembly, 9BED-3 (Disk Controller)	7-48.4
P.C. Card Assembly, 9BED-4 (Disk Controller)	7-48.8
P.C. Card Assembly, 9BED w/Full Memory	7-48.12
Card Assembly Controller Module w/Full Memory	7-48.14
P.C. Card Assembly, 9BKD	7-48.16
P.C. Card Assembly, 1AFD	7-52
P.C. Card Assembly, 9BMD	7-60

8. WIRE LISTS

8-1

FIGURES

1. GENERAL DESCRIPTION

1-1 PLATO Flexible Disk Subsystem	1-1
1-2 PFDS Primary and Secondary Unit Details	1-3

2. OPERATION

2-1 Control and Indicator Locations	2-1
---	-----

3.	INSTALLATION AND CHECKOUT	
3-1	Flexible Disk Subsystem Packaging	3-2.1
3-2	Controller Board Switches and Indicators	3-4
3-3	I/O Cable and Terminator Installation	3-5
3-5	Power Supply Voltage Indicators	3-7
4.	THEORY OF OPERATION	
4-1	Major Elements of Subsystem	4-1
4-2	Subsystem Block Diagram	4-2
4-3	Drive Assembly Functional Block Diagram	4-5
4-4	Controller Board Block Diagram	4-7
4-5	External Wiring of the CTC for Head-Load Timing	4-10
4-6	External Wiring of the CTC for Real-Time Clock	4-11
4-7	Flexible Disk Interrupt Network	4-12
4-8	Internal Connector Pin Assignments	4-15
6.	MAINTENANCE	
6-1	Location of Assemblies in Subsystem	6-5
6-2	SAM Example	6-8
6B-1	Power On/Off Switch Location	6B-1
6B-2	Disk Installation/Removal	6B-2
6B-3	Front Panel and Cabinet Hood Mounting Details	6B-4
6B-4	Controller Board Layout	6B-5
6B-4.1	Controller Board Layout Model 9BED-4	6B-6
6B-5	Power Supply Voltage Adjustments	6B-7
6B-6	Disk Drive Unit Installation	6B-9
6B-7	Drive Pulley Details	6B-10

TABLES

1.	GENERAL DESCRIPTION	
1-1	Equipment Specifications	1-4
4.	THEORY OF OPERATION	
4-1	Parallel I/O Channel Pin Assignments	4-13
4-2	Secondary Drive Unit Channel Pin Assignments	4-14
7.	PARTS DATA	
7-1	Explanation of Column Headings on Assembly Parts Lists	7-1




Should difficulties be encountered in installing, testing, or running this equipment, you may obtain assistance by contacting your CDC sales representative for the telephone number applicable to your installation. After obtaining the number, write it here for future reference:

TELEPHONE NUMBER _____



This section provides a general description of the PLATO Flexible Disk Subsystem (PFDS) configuration including the related equipment specifications. The PFDS is a Z80 microprocessor-based programmable storage subsystem that is intended for use by an Information Systems Terminal. The subsystem interfaces with the terminal via the PLATO parallel I/O channel. Refer to figure 1-1 for an exterior view of the subsystem.

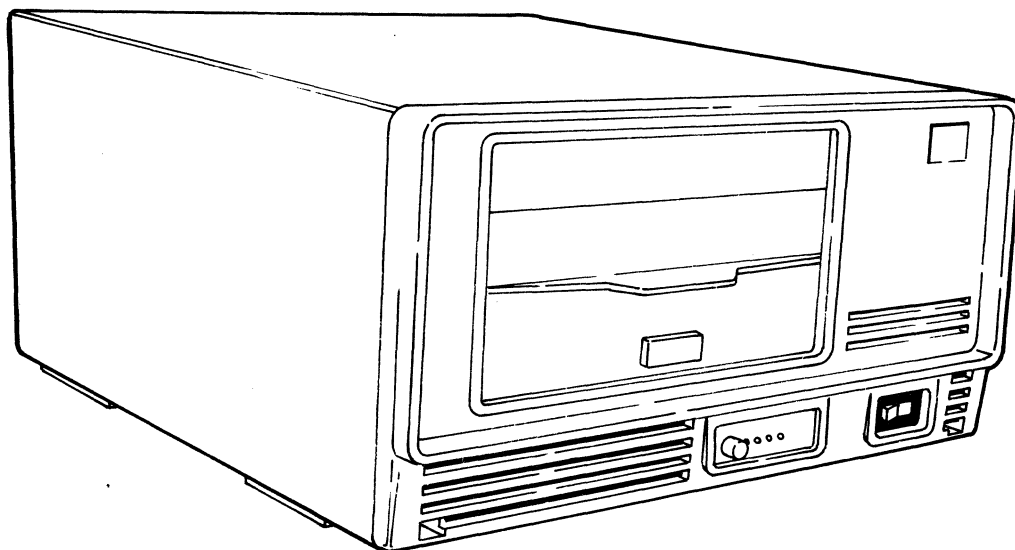

03892

Figure 1-1. PLATO Flexible Disk Subsystem

SUBSYSTEM CONFIGURATION

The PFDS is configured as two basic versions:

- Primary Flexible Disk Subsystem
- Secondary Flexible Disk Drive

Each version is available as either a 60-Hz or 50-Hz product/equipment. Refer to the preface for product/equipment number correlation.

The subsystem can consist of a single primary unit or a primary unit and one secondary unit. The two units (primary and secondary) are interfaced by attaching the signal lines of both 9406 Disk Drives together via a 50-pin interconnecting I/O cable. The net effect is that the controller logic board of the primary unit is interfaced to both 9406 Disk Drives connected in parallel as shown in figure 1-2.

PRIMARY FLEXIBLE DISK SUBSYSTEM

The Primary Flexible Disk Subsystem contains a CDC 9406 Flexible Disk Drive, a 50-Hz or 60-Hz ac power entry panel, a mother-board backplane, a dc power supply, and a Z80-based controller logic board.

CONTROL DATA 110 PRIMARY FLEXIBLE DISK SUBSYSTEM

The Control Data 110 Primary Flexible Disk Subsystem contains a CDC 9406 Flexible Disk Drive, a 50-Hz or 60-Hz ac power entry panel, a mother-board backplane, a dc power supply, and a Z80-based controller logic board with 64K of RAM.

SECONDARY FLEXIBLE DISK DRIVE

The Secondary Flexible Disk Drive is identical to a primary unit except that the Z80-based controller logic board is removed.


RAM EXPANSION FEATURE

The standard subsystem random-access memory consists of 16K 8-bit words in the FA501-A/B. The RAM size may be expanded to a total of 64K 8-bit words in 16K-word increments. Each 16K RAM option consists of eight 16-pin integrated circuits (ICs). IC sockets are provided on the controller logic board for installation of the RAM chips. The FA501-C/D has 64K as standard.

MEDIA

The recommended media for use in the subsystem is a good commercial flexible disk (double-sided, double-density). These flexible disks have the following characteristics:

- Index - 1
- Sectors - Programmable
- Cylinders - 77
- Tracks per cylinder - 1 for single-sided disk, 2 for double-sided disk.
- Surfaces - 2
- Tracks per inch 48
- Bits per inch - 6816 double density

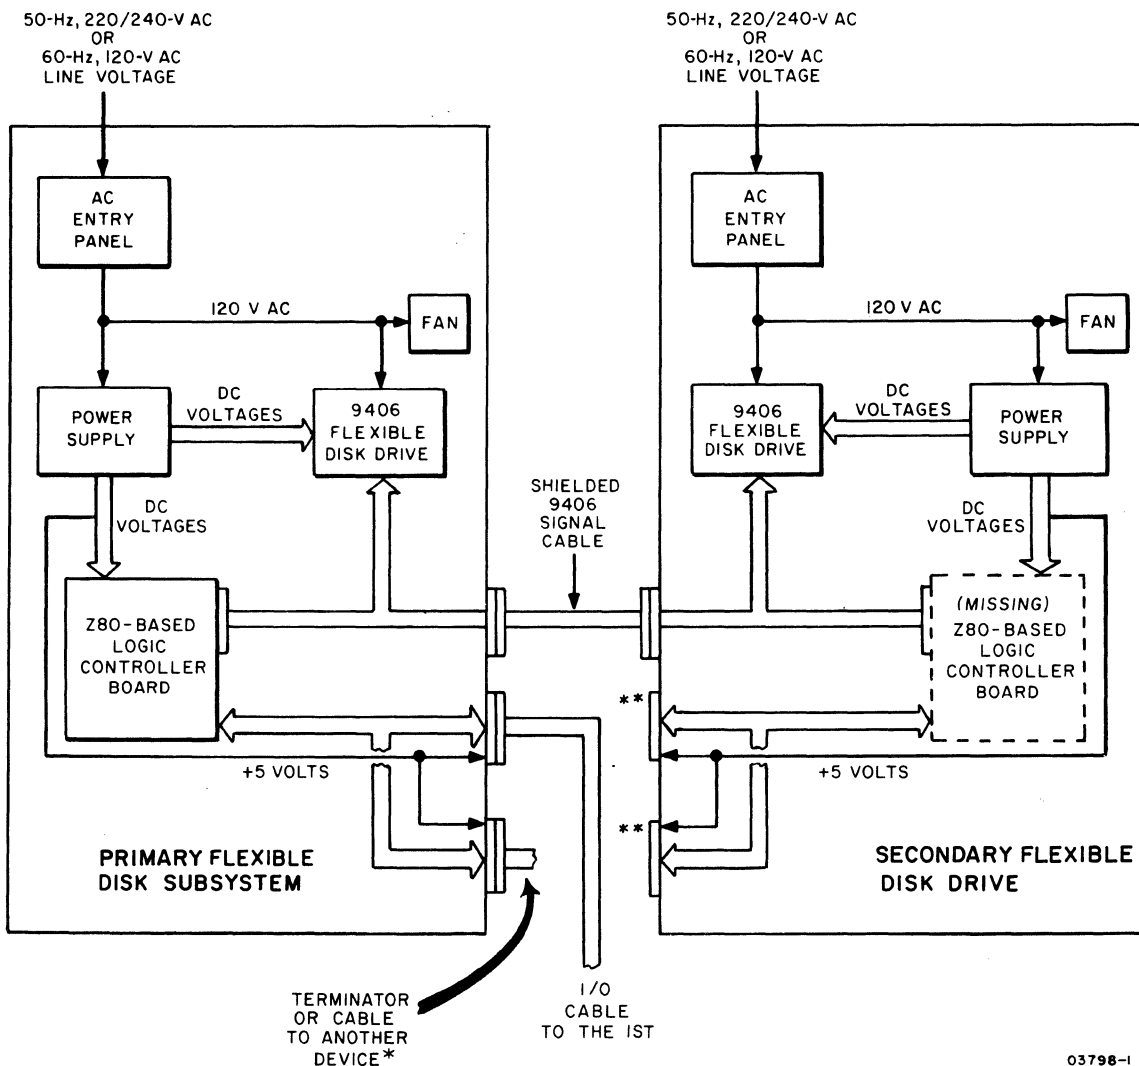

- *The other device could be another Primary Flexible Disk Subsystem, Graphic Printer, etc.
 **These connectors are not used.

Figure 1-2. PFDS Primary and Secondary Unit Details

EQUIPMENT SPECIFICATIONS

Equipment specifications for the subsystem are listed in table 1-1.

TABLE 1-1. EQUIPMENT SPECIFICATIONS

CHARACTERISTIC	SPECIFICATION
Dimensions: Height Width Depth	202.85 mm (7.99 in) 381 mm (14.99 in) 502.5 mm (19.78 in)
Weight: FA501-A/C (60-Hz primary) FA501-B/D (60-Hz primary) BR810-A (60-Hz secondary) BR810-B (50-Hz secondary)	16.78 kg (37 lb) maximum 20.19 kg (44.51 lb) maximum 16.33 kg (36 lb) maximum 19.73 kg (43.5 lb) maximum
Power Requirements: (Nominal) FA501-A/C FA501-B/D BR810-A BR810-B	120 V ac, 60 Hz, 1.4 A, 0.18 kW maximum 220/240 V ac, 50 Hz, 0.8 A, 0.19 kW maximum 120 V ac, 60 Hz, 1.2 A, 0.16 kW maximum 220/240 V ac, 50 Hz, 0.68 A, 0.16 kW maximum
Temperature: Operating Nonoperating Change/h	10°C to 32°C (50°F to 90°F) -34°C to 66°C (-30°F to 150°F) 6.7°C (12°F)
Relative Humidity: Operating Nonoperating Change/h	10% to 80% 5% to 95% 10%
Operating Altitude:	3000 m (9850 ft) maximum
Heat Dissipation (Air):	555 Btu/h (161.3 W) maximum, fan cooled

TABLE 1-1. EQUIPMENT SPECIFICATIONS (CONTD)

CHARACTERISTIC	SPECIFICATION
Disk Storage Capacity:*	<u>Double Density</u>
Bytes/Track	10 416
Bytes/Cylinder**	20 832
Bytes/Surface	802 032
Bytes/Disk**	1 604 064
Bits/Byte	8
Transfer Rate:*	<u>Double Density</u>
	500 k b/s
	62.5 bytes/s
Seek Time:	3 ms
Head Stabilization Time:	20 ms
Head Load Time:	40 ms
Disk Rotation:	360 r/min <u>+3.5%</u>
Latency:	
Maximum	166.7 ms
Average	83.3 ms
Recording Method:	Modified Frequency Modulation (MFM)
<p>*Storage capacity and data transfer rates are a function of the formatting used on the disk and the programming of the controller.</p> <p>**Applies to double-sided disk only.</p>	



This section describes the controls and indicators of the flexible disk subsystem. Locations are shown in figure 2-1. Refer to the Micro Plato user's installation guide and Micro Plato instructional flexible disk or the Control Data 110 Microcomputer System User Installation and Diagnostics Manual for information on associated operating programs (see preface for publication/part numbers).

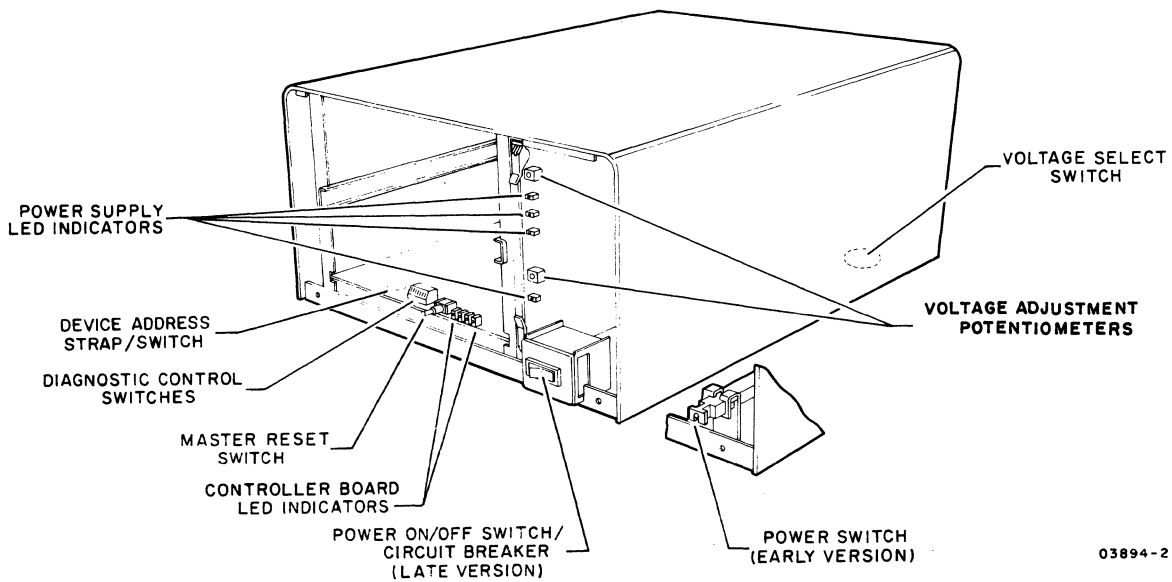


Figure 2-1. Control and Indicator Locations

VOLTAGE SELECT SWITCH

The voltage select switch is present on 220/240-V, 50-Hz units only. The switch is located on the bottom of the cabinet and selects taps on the transformer primary winding to match the input site voltage available. A metal plug covers the access hole.

POWER ON/OFF SWITCH/CIRCUIT BREAKER

Two versions of the Power On/Off switch/circuit breaker exist. Early units have the switch/circuit breaker mounted toward the

rear of the unit with a connecting rod attached to a push/pull control knob at the front of the unit. Power is applied by pulling the knob forward and power is removed by pressing the knob in. Later units have a rocker switch/circuit breaker mounted on the front of the unit.

A power application initializes all internal control logic circuits, and if bit 2⁷ of the diagnostic control switches is down, initiates the self-test diagnostics.

The circuit breaker provides necessary overload protection for the subsystem.

DEVICE ADDRESS STRAP (PRIMARY UNITS ONLY)

The subsystem device address is wired to position 7 by the device address strap at the front of the controller board. In early units the subsystem device address is established by a 10-position binary-coded-decimal rotary switch at the front of the controller board.

MASTER RESET SWITCH (PRIMARY UNITS ONLY)

Pressing the Master Reset switch reinitializes the operating program. Holding the switch pressed more than three seconds, reinitiates the self-test diagnostics (if selected), and reloads the operating program into RAM memory. The operating program is loaded from the flexible disk if available. If a flexible disk is not present, the flexible disk subsystem tries to load from the PLATO system.

DIAGNOSTIC CONTROL SWITCHES (PRIMARY UNITS ONLY)

There are eight switches on the front of the controller board that provide manual control of the program and self-test diagnostics. Diagnostic test descriptions are provided in section 6. Control functions selected by these switches are as follows:

SWITCH 2⁰ - Not used

SWITCH 2¹

- Up - Allows result of detailed memory test to be displayed in LEDs per switch 2² setting.
- Down - Bypasses displaying result of detailed memory test selected by switch 2².

SWITCH 2²

- Up - Allows failing memory IC within a RAM bank to be displayed in LEDs. Switch 2¹ must be in up position to view this display. Also note that for subsystems having more than 16K of RAM, failing memory bank must first be determined by having switch 2² down.
- Down - Allows failing memory bank to be displayed in LEDs. Switch 2¹ must be in up position to view this display.

SWITCH 2³

- Up - Bypasses test 7 (write/read on disk) of diagnostics.
- Down - Enables execution of diagnostic test 7.

SWITCH 2⁴ and 2⁵

These switches define what banks of RAM are installed:

<u>Switch 2⁵</u>	<u>Switch 2⁴</u>	<u>RAM BANKS AVAILABLE</u>	<u>ADDRESS RANGE (HEX)</u>
Down	Down	1 (16K)	4000 - 7FFF
Down	Up	1, 2 (32K)	4000 - BFFF
Up	Down	1, 2, 3 (48K)	4000 - FFFF
Up	Up	0, 1, 2, 3 (64K)	0000 - FFFF

All FA501-C/D units have 64K RAM; both switches 2⁴ and 2⁵ must be up.

SWITCH 26

- Up - Allows looping on diagnostic tests.
- Down - Does not loop on diagnostics.

SWITCH 27

- Up - Bypasses diagnostic test execution.
- Down - Enables execution of the diagnostics except when switch 20 is up.

LED INDICATORS

Primary units have four red LED indicators on the controller board that are visible through holes in the front panel. The LEDs are used by the self-test diagnostics to indicate detected errors. LED 2³ (leftmost) indicates a diagnostic error and LEDs 2⁰ through 2² identify the failing memory bank or IC as determined by the settings of switch 2⁰, 2¹, 2², and 2⁷ of the diagnostic control switches.* At successful completion of the diagnostics, LED 2⁰ is assigned as the power-on indicator. These LEDs are also user programmable.**

Both primary and secondary units have four red voltage LEDs on the power supply PC board. The front panel must be removed to view the indicators. These LEDs indicate presence of +24 V, +12 V, +5 V, and -5 V at the power supply outputs. Note that a lit LED does not conclusively indicate that the correct voltage is present, only that there is sufficient voltage to bias the device on.

Two adjustment potentiometers are also on the power supply PC board. These provide for adjusting the +24-V and +5-V power supply outputs.

*LEDs 2⁰ through 2² define which test section has failed. If diagnostic control switch 2¹ is up and there is a memory error, then LEDs 2⁰ through 2² identify the failing memory bank or IC depending on setting of switch 2².

**After completion of the self-test diagnostics, the operating system uses LED 2³ as an Error indicator, LED 2² as a Read indicator, LED 2¹ as a Write indicator, and LED 2⁰ as a Power-on indicator.

This section provides information on packaging, installation, and checkout of the flexible disk subsystem.

CAUTION

Control Data 110 Terminal Subsystem users must use installation, checkout, and diagnostics procedures described in Control Data 110 Microcomputer System User Installation and Diagnostics Manual.

CAUTION

Observe MOS circuit handling precautions (described in section 6 of this manual) when handling or packaging the controller board.

PACKAGING

The flexible disk subsystem is packaged for shipment using foam-in-place chemicals (figure 3-1). If the subsystem is to be reshipped it must be packaged as it was originally received from the factory. Use the existing packing materials or if not available, order new packing materials from CDC Corporate Traffic. Request pre-formed packing materials for the FA501/BR810 per packing instructions 41039800. Packaging materials may be obtained from:

Control Data Corporation
Corporate Traffic
8100 34th Avenue South
Minneapolis, Minnesota 55440

When returning other assemblies for repair, use the packaging material that the spared assembly was shipped in.

NOTE


When shipping any disk drive be sure to insert the cardboard head-protect flexible disk into the drive unit.

INSTALLATION

This subsection provides information for installing the flexible disk subsystem (primary and secondary units) and for field installation of the RAM options if applicable to the primary unit.

NOTE

Selective FCO CD14283 must be installed if the disk is to be used on an IST-II with a serial number below 3000. This FCO provides a new ROM with a disk loader. The part number for FCO CD14283 is 66202932.

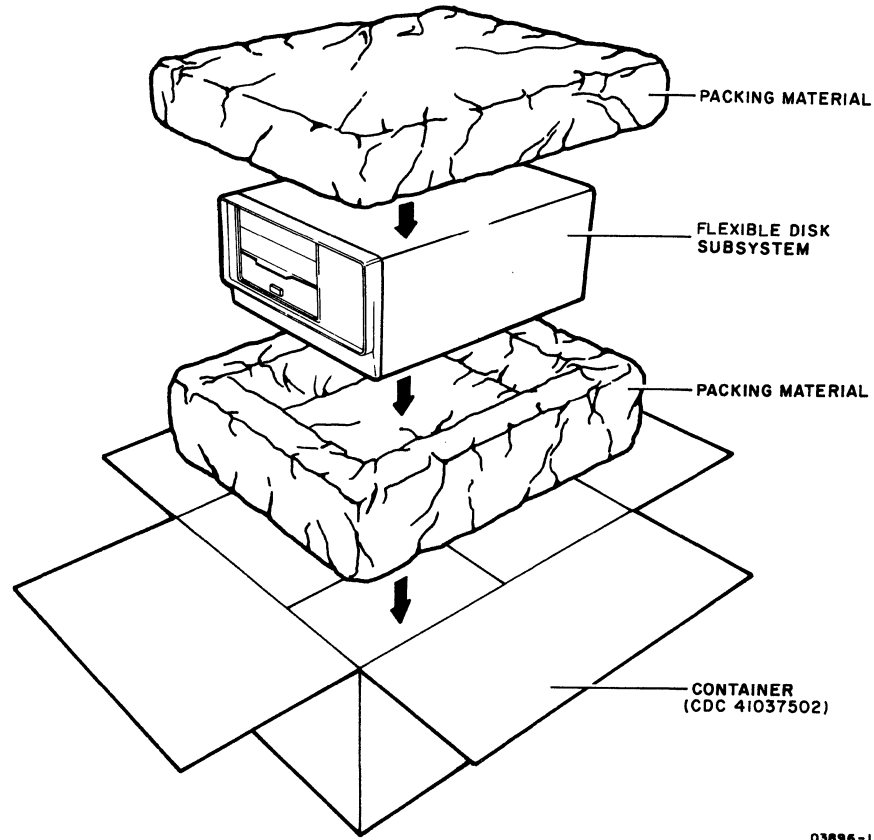

03896-1

Figure 3-1. Flexible Disk Subsystem Packaging

SUBSYSTEM INSTALLATION

Install the flexible disk subsystem per the following. Procedure numbers used in the steps refer to specific procedures contained in section 6B of this manual.

1. Unpackage subsystem (refer to figure 3-1), and move to desired location. Remove cardboard head-protective flexible disk from drive unit and store with subsystem packaging materials. Note that secondary unit may be stacked on top of primary unit or primary unit may be stacked on top of secondary unit or units may be placed side-by-side if desired.
2. Inspect for any shipping damage.
3. For 50-Hz units, verify that Voltage Select switch (bottom of cabinet, metal plug covers access hole) is set



correctly to match site ac primary input voltage as follows:

<u>Switch Position</u>	<u>Voltage Range</u>
120 V	Not Used
220 V	191 V to 235 V
240 V	208 V to 257 V

NOTE

Cover unused voltage designation on ID plate (figure 3-4) with black tape.

4. This step applies to primary flexible disk units only. Remove front panel of unit (procedure 3) and locate switches at front of controller board (figure 3-2).
 - Check that device address strap is wired to address 7 as in figure 6B-4. (Set device address switch to address 7 if unit has switch.)
 - Set Diagnostic Control Switches as follows:

Switch 2⁰ - Not used

Switch 2¹ - Down (bypasses displaying result of detailed memory test selected by switch 2²).

NOTE

Switch 2¹ must be down to display the failing test number in the LEDs. If a test 1 (memory test) failure is detected, place switch 2¹ up to display the specific memory bank or IC failure as selected by switch 2².

Switch 2² - Down (allows failing memory bank to be displayed in LEDs).


Switch 2³ - Up (disables running test 7 of resident diagnostics).

Switch 2⁴ and 2⁵ - For FA501-C/D set both switches up. For FA501-A/B set to RAM memory size available as follows (each XA243-A option adds 16K of RAM):

<u>Switch 2⁵</u>	<u>Switch 2⁴</u>	<u>RAM Size</u>
Down	Down	16K (Standard)
Down	Up	32K (Option)
Up	Down	48K (Option)
Up	Up	64K (Option)

Switch 26 - Down (does not loop on diagnostics).

Switch 27 - Down (enables running diagnostic tests).

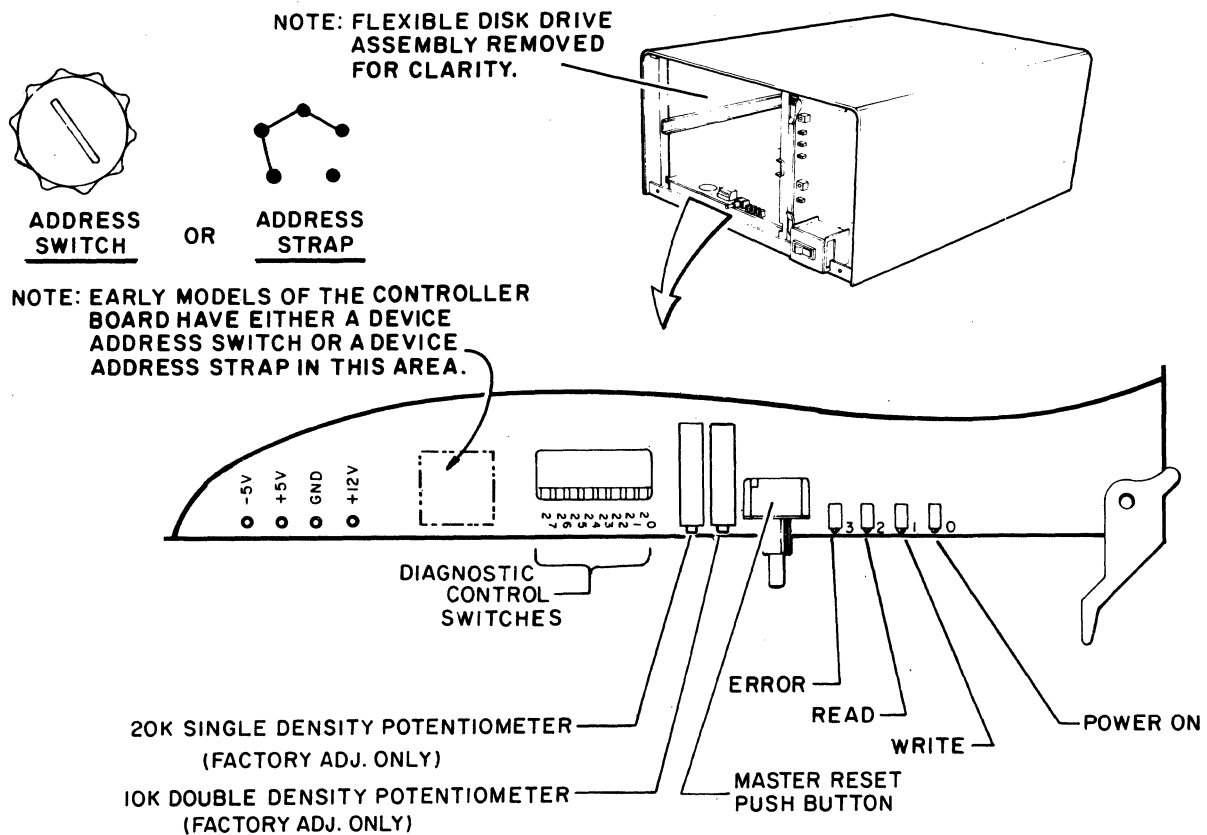

03897-3

Figure 3-2. Controller Board Switches and Indicators

5. Refer to figure 3-3 and install I/O cable and terminator assembly per the following as applicable:

NOTE

A standard 25-pin RS-232-C compatible cable CANNOT be substituted for the specified I/O cable.

- Primary flexible disk unit - If there are no other devices attached to IST parallel interface channel, connect 25-pin I/O cable (CDC 61408865 or 51942451) from parallel interface channel of IST terminal to either 25-pin I/O connector at rear of flexible disk unit. Connect terminator assembly (type FT116-A) to other 25-pin I/O connector of drive unit. Tighten retaining screws to hold cable connectors in place.

If other devices are already attached to IST parallel interface channel, remove terminator assembly from last device on channel and connect 25-pin I/O cable (CDC 61408865 or 51942451) between last device and either 25-pin connector at rear of flexible disk unit. Install the terminator assembly to other I/O connector of drive unit. Tighten retaining screws to hold cable connectors in place.

- Secondary flexible disk unit - Connect 50-pin I/O cable (CDC 61408976) between 50-pin connectors of primary and secondary flexible disk units. Note that 25-pin I/O connectors are not used on secondary unit.
- Verify that no flexible disk is installed in drive unit(s).

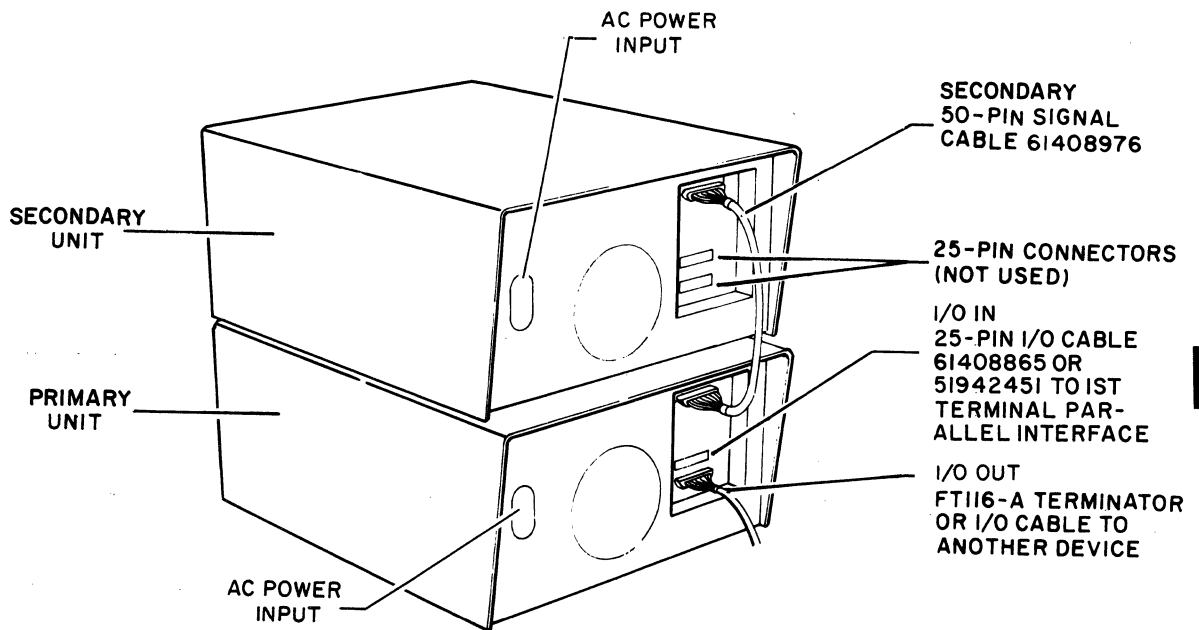


Figure 3-3. I/O Cable and Terminator Installation

6. Connect ac power cord to rear of unit, check that power on/off switch is in off position and plug ac line cord into site outlet.

WARNING

Applying improper voltage to the flexible disk subsystem can damage components. Read label on back of unit for proper voltage and frequency.

RAM OPTION INSTALLATION (Applies to FA501-A/B Only)

Perform the following steps to install a 16K by 8-bit RAM option (XA243-A). Up to three RAM options can be installed in a primary unit to expand the memory size to a total of 64K 8-bit words. Observe MOS circuit handling precautions described in section 6 when installing RAM ICs.

1. Remove controller board from unit.
2. Install RAM ICs in existing sockets on controller board as follows:
 - First RAM option in locations C1, C2A, C2B, C3, C4A, C4B, C5, and C6.
 - Second RAM option in locations D1, D2A, D2B, D3, D4A, D4B, D5, and D6.
 - Third RAM option in locations A1, A2A, A2B, A3, A4A, A4B, A5, and A6.
3. Set Diagnostic Controls Switches 2⁴ and 2⁵ to total RAM size available (see step 4 of Subsystem Installation for required switch settings).
4. Reinstall controller board in unit.
5. Affix FCO log and equipment identification tag to rear of unit as shown in figure 3-4.

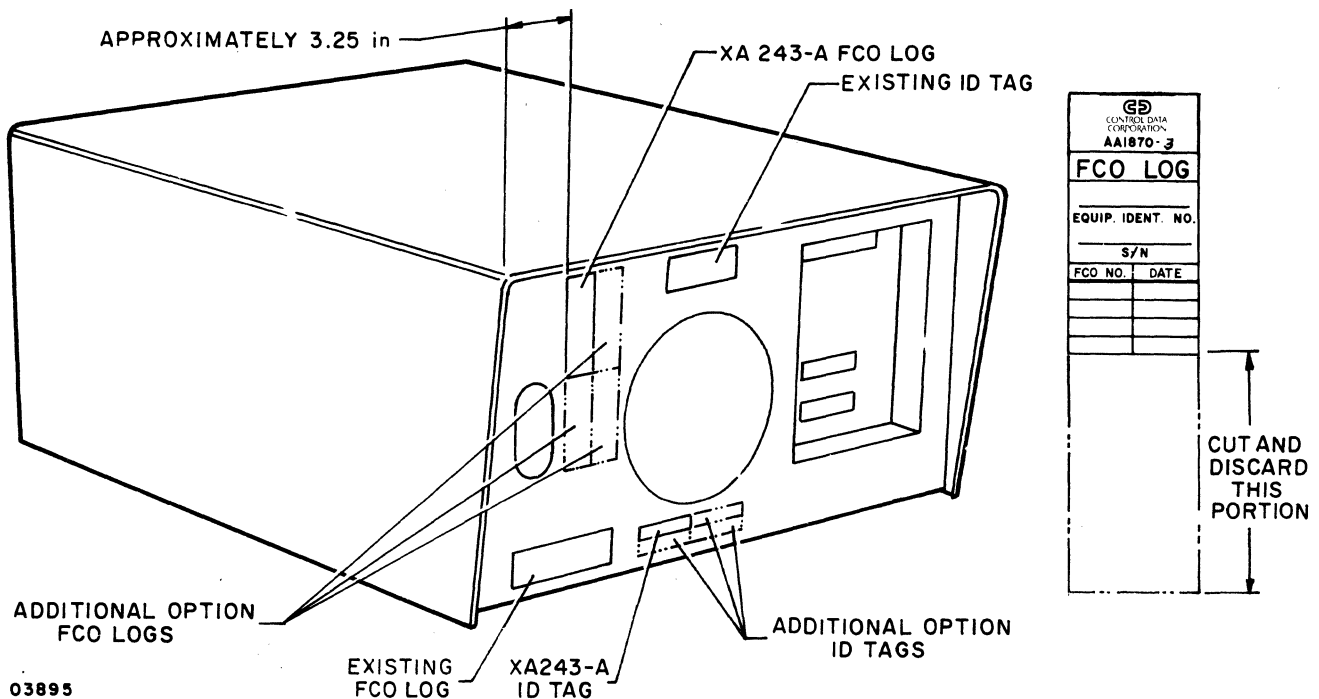


Figure 3-4. RAM Option FCO Log and ID Tag Placement

CHECKOUT

Perform the following steps to checkout the operational capability of the flexible disk subsystem including any installed options. If any problems are encountered, refer to the SAM listings in section 6A for corrective action.

1. Apply power to disk subsystem (procedure 1) and verify that four LEDs on power supply are lit (figure 3-5).
2. Observe four LEDs at front of controller board (figure 3-2). Immediately after turning power on (at start of diagnostic test execution) all four LEDs are turned on for a short period of time as an LED test. As the self-test diagnostic executes, the lower three LEDs indicate which test is in process. LED 2³ lit indicates a diagnostic test error. Note that with no flexible disk installed, LEDs 2⁰, 2¹, and 2² should be lit and LED 2³ should be unlit indicating that diagnostic is at test 7 but drive is not ready.

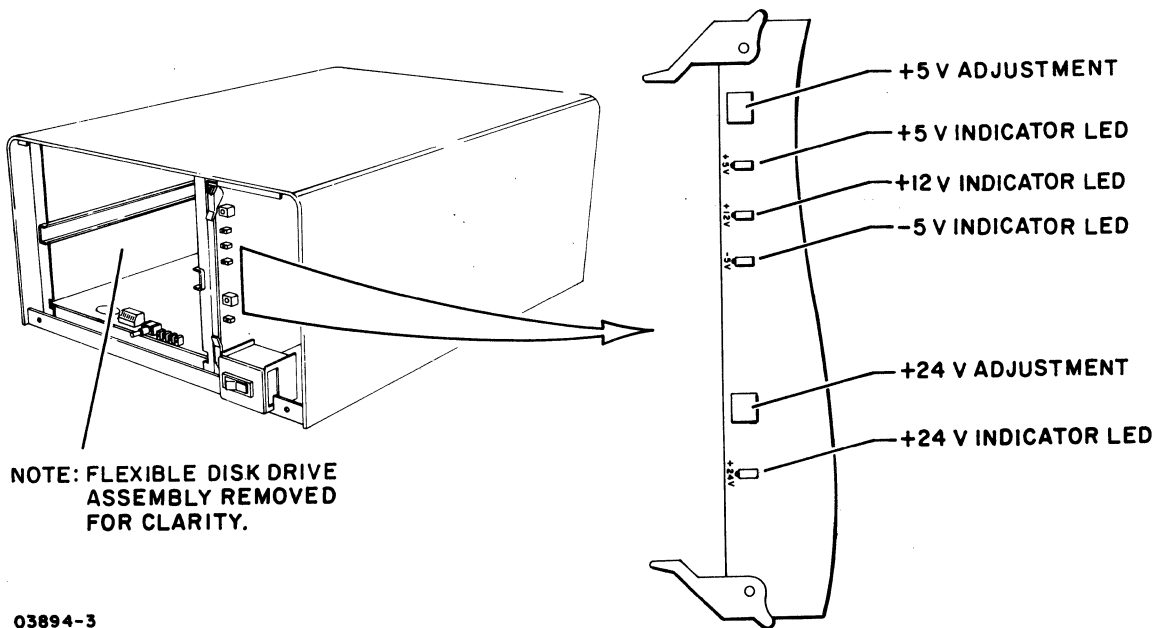


Figure 3-5. Power Supply Voltage Indicators

3. Install Micro Plato instructional flexible disk (CDC part number 76773000 A) in drive unit (procedure 2). This initiates write/read checks of test 7 (last resident diagnostic test). Upon successful completion, LED 2⁰ remains lit and functions as a power-on indicator.
4. Remove Micro Plato instructional flexible disk from drive unit.
5. Verify that power is applied to last peripheral device connected to parallel interface channel. Note that last device must be powered on for correct operation of parallel interface channel as this device provides +5 volts to terminator.
6. Load and execute DIAG Flexible Disk Diagnostics from IST terminal as follows:

NOTE

For FA501-A/B terminals, the DIAG Flexible Disk Diagnostics only work with terminals having a 16K memory option.

NOTE

There are two modes of operation in the flexible disk subsystem that allow the terminal to load information into subsystem memory. One mode is via DMA operations and the other mode is via interrupt routines. Both operating modes are tested by the DIAG Flexible Disk Diagnostics.

For terminal log-in or diagnostic loading problems, refer to the applicable terminal hardware maintenance manual (see preface for publication number).

- a. Log into PLATO system by use of procedures outlined in Information System Terminals II and III manuals (see Preface for publication numbers).
- b. Select the Flexible Disk Diagnostic found under DIAG.
- c. Follow the DIAG instructions for test desired.

7. After successful completion of preceding tests, check that all diagnostic control switches on controller board are set as required and reinstall front panel of unit (procedure 3). If Micro Plato instructional flexible disk (CDC part number 76773000 A) is being used, additional testing can be performed through use of stored programs on this disk. Refer to Micro Plato User's Installation Guide for test information (see preface for publication number).




This section provides a functional description of the five major elements of the flexible disk subsystem:

- AC Power Entry Panel
- Power Supply
- Backplane
- Flexible Disk Drive (FDD) Assembly
- Controller Board (Primary Units Only)

Also provided are the connector pin assignments for the external parallel I/O channel and secondary flexible disk unit interfaces, and the connector pin assignments for the internal signals of the flexible disk subsystem.

Refer to figure 4-1 for location of the major elements within the subsystem and to figure 4-2 for a block diagram of the subsystem configuration.

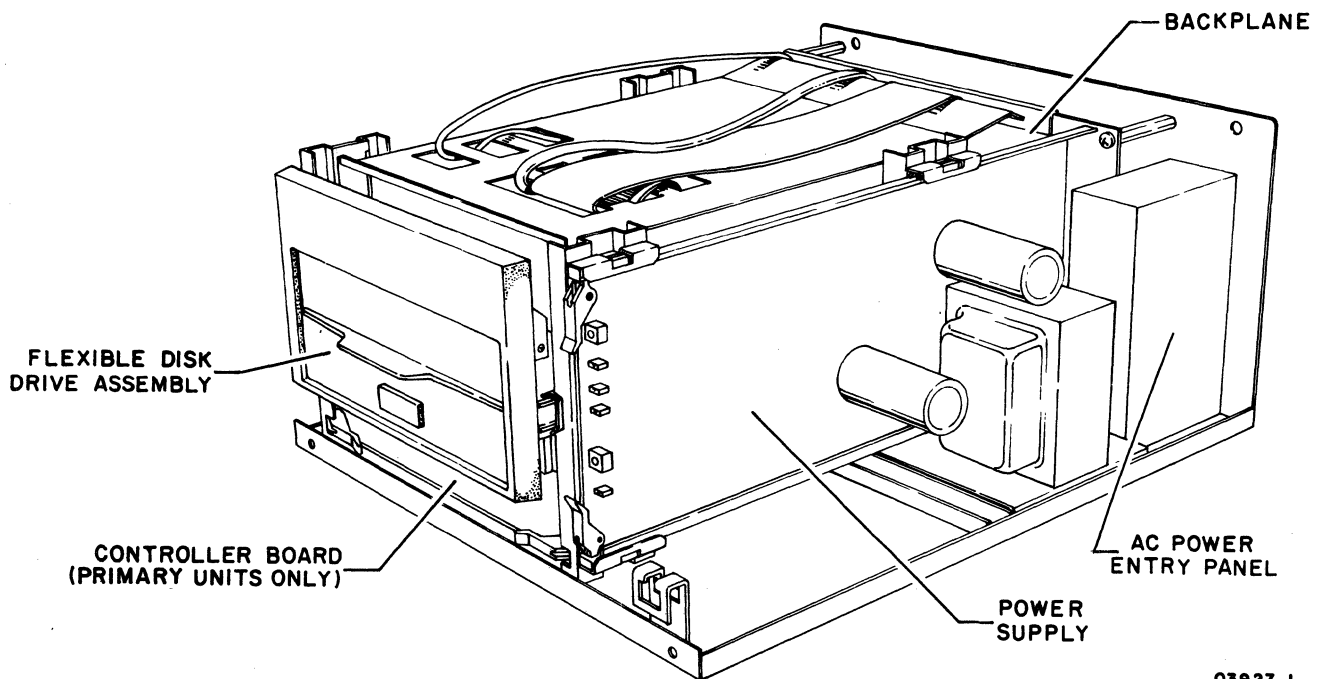

03927-1

NOTE: COVER AND FRONT
PANEL REMOVED
FOR CLARITY.

Figure 4-1. Major Elements of Subsystem

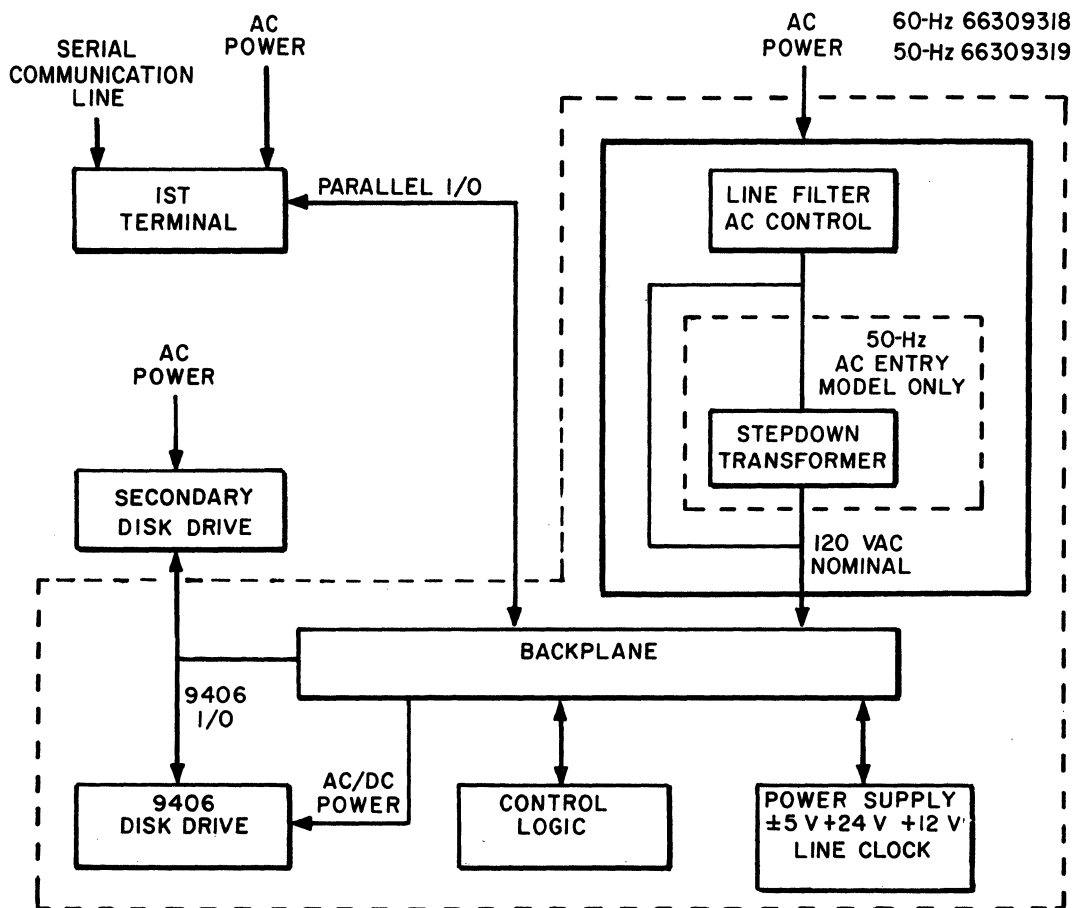


Figure 4-2. Subsystem Block Diagram

03797

AC POWER ENTRY PANEL

The ac power entry panel contains an RFI line filter and a detachable ac power cord. A separate ac power entry panel is used for the 60-Hz and 50-Hz equipments. The 50-Hz panel also contains a step-down transformer and a 220/240-volt selector switch. Early versions of both the 60-Hz and 50-Hz panels contained the primary power circuit breaker. Later versions have the circuit breaker mounted at the front of the unit.

POWER SUPPLY

The power supply is a switching supply contained on a single PC card. Input voltage is 120 V ac nominal. The 50-Hz units require an external step-down transformer (provided by the 50-Hz ac entry panel) to lower the 220-V/240-V ac input voltage to 120 V. The power supply provides the following nominal dc output voltages and full-load currents:

- +12 V at 0.45 A
- -5 V at 0.1 A
- +5 V at 5 A
- +24 V at 2 A

The power supply is divided into two basic sections, a +24-V section, and a logic voltage section for the +12-V, +5-V, and -5-V output voltages. All dc outputs have over-current protection and are not damaged by short circuits. The +5-V output has an over-voltage sensing circuit that shuts off all outputs when the +5-V output rises between +5.5 V to +6.0 V. No other outputs have over-voltage protection.

The input ac line voltage is full-wave rectified and is chopped at a high-frequency rate (25 to 40 kHz) through the primary of the input transformer by a switching transistor. The transformer steps down the high-frequency ac to the secondary windings. These ac voltages are then rectified and filtered to provide the various power supply outputs.

Voltage control is performed in each power supply section by a regulator IC that compares a sample of the output voltage to an internal reference voltage. A resulting error difference is used to control the conduction time of a switching transistor through an optical coupler. Only the +24-V and +5-V output voltages are sensed to control the switching transistor pulse width in their respective power supply section. All other outputs have 3-pin IC regulators to regulate their output voltages.

The power supply contains four red board-edge LEDs that indicate the presence of the +24-V, +12-V, +5-V, and -5-V outputs. Two adjustment potentiometers are also provided for adjusting the +24-V and +5-V outputs. Test points on the board edge of the controller board are to be used when performing the +5-V alignment procedure. The +12-V, +5-V, and -5-V test points are available on the controller board edge.

BACKPLANE

A printed-circuit mother-board backplane provides the internal signal and power connections for the various modules of the disk subsystem and provides the external I/O channel interface connections.

FLEXIBLE DISK DRIVE (FDD) ASSEMBLY

The flexible disk drive (FDD) assembly is a random-access, data-storage device that writes and reads data from a rotating flexible disk. All input/output data and control operations are performed under microprocessor control from the controller board. The basic function of the drive assembly is to indicate to the controller when it is ready for operation, and respond to controller commands to:

- Receive and generate control signals
- Position the read/write heads to selected tracks
- Write or read data on the flexible disk when selected

Signals received and transmitted by the FDD are shown in figure 4-3. All signals received by the FDD are gated with Unit Select so that no stepping, reading, or writing can be performed on an unselected FDD. Also, all signals generated within the FDD, except the Ready signal, are gated with Unit Select so that no signals can be transmitted from an unselected FDD.


Controller Step and Direction commands initiate a track-seek operation on a selected FDD. The FDD transmits Index pulses as long as it selected. The selected FDD also transmits a Track 00 signal to the controller whenever the read/write heads are at Track 00.

Positioning of the carriage-mounted read/write heads is accomplished by a band-driven stepper motor. Each step command increments the stepper motor which moves the band. The band increments the read/write heads one track position for each step command.

During a write operation, the selected FDD receives Head Select, Write Enable, Write Data, and Low Current (Track 43 or greater) signals. If a write fault occurs, a Write Fault signal is transmitted to the controller. During a read operation, the selected FDD receives a Head-Load command. The Write Enable line remains high thereby specifying a read operation and the FDD transmits Composite Read Data signals to the controller.

A read or write operation begins by placing the read/write heads in contact with the flexible disk with a Head-Load command at the desired track. To write on the disk, a Write Enable is sent by the controller to condition the write logic. The write current then in the head reverses polarity synchronously with

the low-to-high transitions of the Write-Data pulses from the controller. The current reversals cause magnetic flux reversals on the desired disk track. Erasure of previously recorded data is simultaneously accomplished during the writing operation in addition to a delayed-tunnel erase, which ensures disk interchangeability.

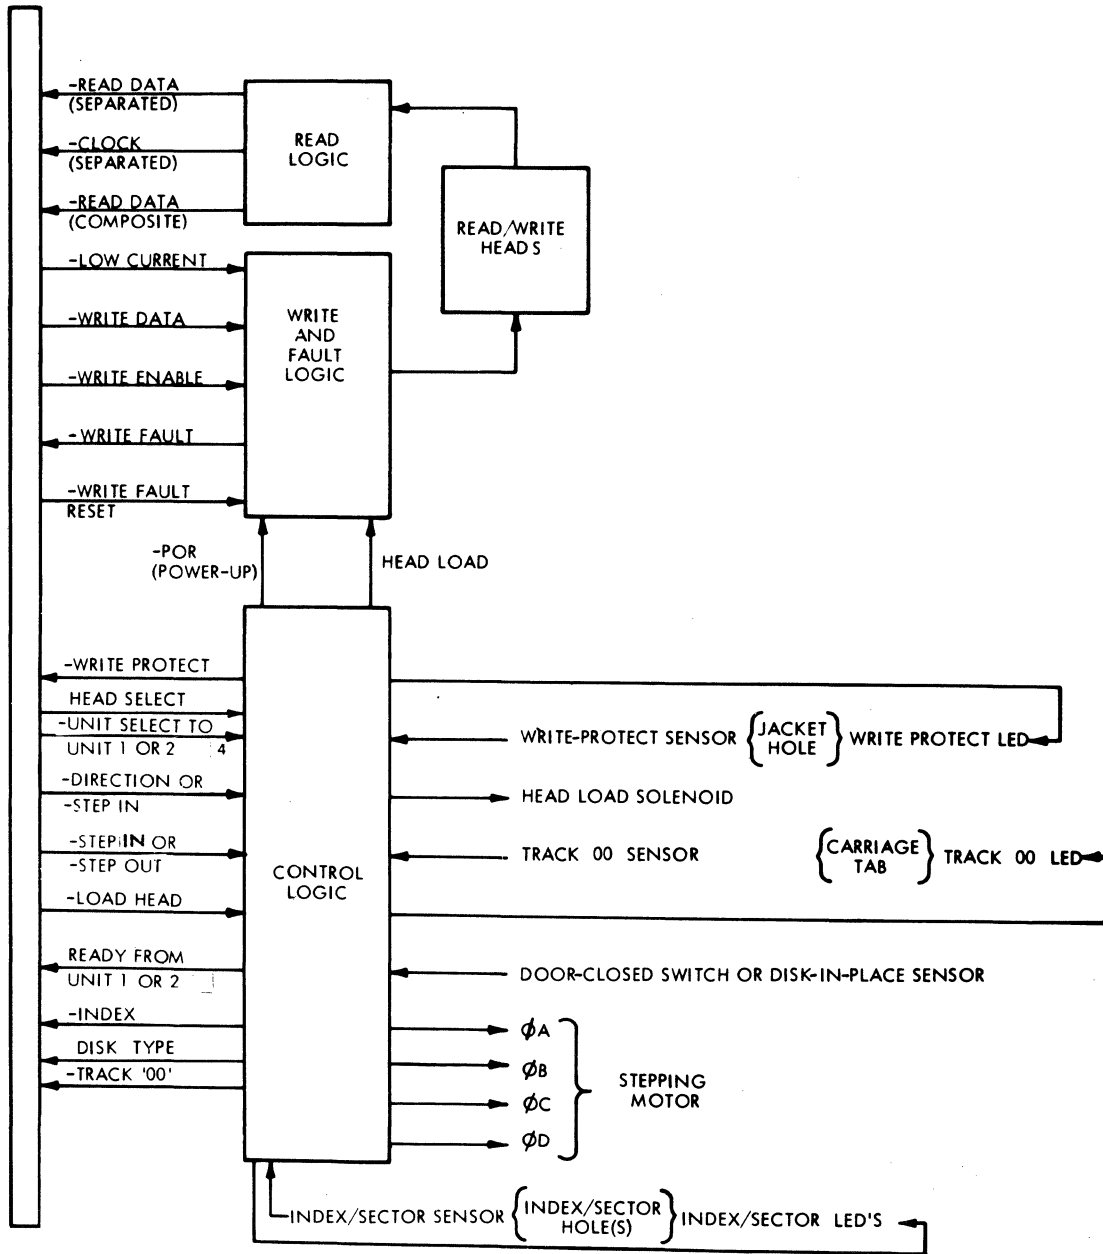

03856-1

Figure 4-3. Drive Assembly Functional Block Diagram

To read from the flexible disk, magnetized bits in the format of the pre-recorded data are sensed by the read/write heads. This signal is amplified, digitized, and transmitted to the controller.

Refer to the 9406 Flexible Disk Drive Assembly Hardware Maintenance manual for additional information (see preface for publication number).

CONTROLLER BOARD (PRIMARY UNITS ONLY)


The controller board is present only in the primary units. A single controller board provides control and directs all operations of both a primary and optional secondary unit. This is accomplished by interfacing the controller board to both 9406 Disk Drive assemblies (primary and secondary) connected in parallel via an external 50-pin signal cable.

Large-scale integrated circuits (LSI) are used in all major areas of the controller's operation. This includes:

- A Z80A microprocessor clocked at 4 MHz.
- A 9517A-4 direct-memory-access (DMA) controller.
- A 1791A-02 flexible-disk controller (FDC).
- Two 2716 (2K by 8-bit) erasable programmable read-only memories (EPROM).
- A Z80 Counter/timer circuit (CTC).
- A 9519A interrupt controller.
- 16K by 8-bit bytes of random access memory (RAM). IC sockets are available for expansion to 64K by 8-bits for the FA501-A/B.
- 64K by 8-bit bytes of random access memory (RAM) for the FA501-C/D.
- Three 74LS374 8-bit data latches for I/O data, status, and commands.

The controller board also includes eight switches that can be read by the microprocessor for control and option-available information, a device address strap for the PLATO parallel I/O channel, a master reset switch that provides its status to the control program, and four LEDs that provide visual status indications.

A detailed block diagram of the controller board is shown in figure 4-4. The following paragraphs describe the major logic circuits. Refer to the applicable vendor manuals for details of operation as required.

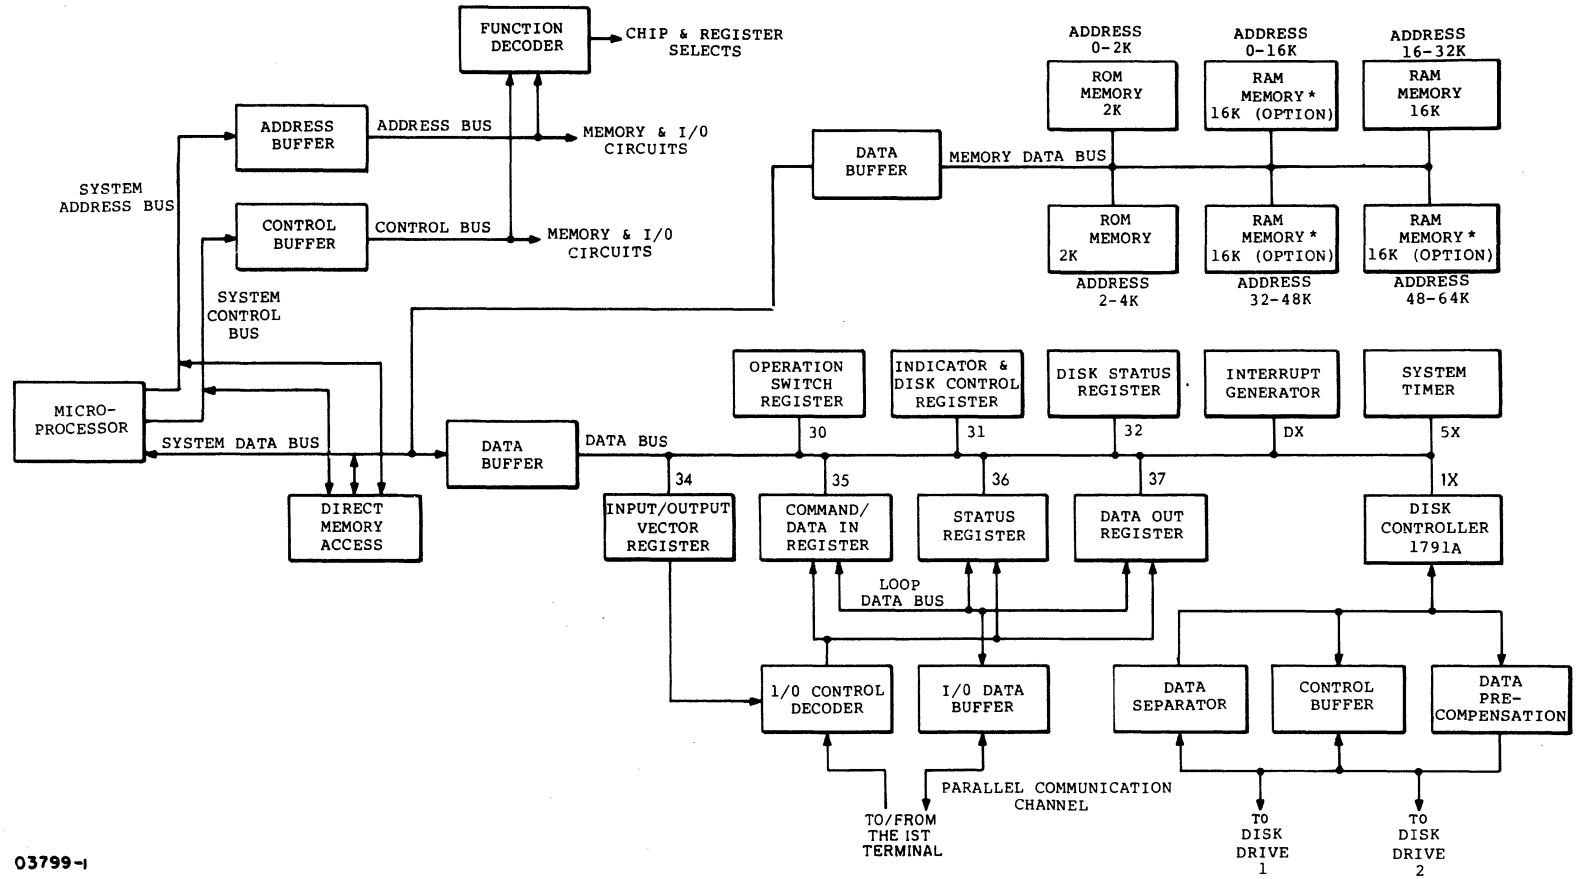

03799-1
 *STANDARD ON FA501-C/D

Figure 4-4. Controller Board Block Diagram

Z80A MICROPROCESSOR

A Z80A microprocessor is used as the major control element of the module. The Z80 provides three major buses (16-bit address bus, 8-bit bi-directional data bus, 13-line control bus); 158 different instructions; 208 bits of read/write memory; two sets of data, control, and address registers; an arithmetic and logic unit (ALU); and necessary instruction decode and control logic.

As each instruction is read from memory, it is placed in an instruction register and decoded. The internal control logic performs this function and then generates all the necessary control signals to read/write data from or to the registers, controls the ALU, and provides all required external control signals.

All instructions are executed by stepping through a specific series of basic control operations applicable to a given instruction.

Each basic control operation - such as OP code fetch, memory read, memory write, etc. - takes from three to six clock periods to complete and may be lengthened to synchronize the CPU to the speed of external devices. The additional clock periods are termed wait states and increase the total instruction execution time accordingly. The CPU examines the Wait line during T2 (and every subsequent TW) of each machine cycle and adds in a wait state of one clock period if the Wait signal is active.

Accessing RAM memory on the controller board does not require any addition of wait states. The EPROM memory, used only for the initial power-on diagnostics and autoload, requires the addition of one wait state for each memory reference. The 1791A flexible disk controller requires one wait state for each reference made to it by the Z80. The Write Fault Reset to the 9406 Flexible Disk Drive assembly requires one wait state.

9517A-4 DIRECT-MEMORY-ACCESS (DMA) CONTROLLER

The 9517A-4 direct-memory-access (DMA) controller is a peripheral interface IC that allows direct memory access to the subsystem RAM. Four independent DMA channels are provided. Each channel is designed to enable an external device to transfer information to or from the subsystem memory. In the flexible disk subsystem design, however, only three channels are wired for external device use. Channels 1 and 3 are both used by the 1791 flexible disk controller IC, and channel 2 is used by the PLATO parallel I/O channel. Channel 0 is not used.

Separate internal registers are provided in each channel for mode control, current address, base address, current word count, and base word count.

1791A-02 FLEXIBLE DISK CONTROLLER (FDC)

The 1791A-02 flexible disk controller (FDC) performs the functions of a flexible disk formatter and controller in a single integrated circuit. The FDC controls both single-density and double-density formatting. The FDC provides a 16-bit cyclic redundancy check (CRC) with the polynomial: $G(X) = X^{16} + X^{12} + X^5 + 1$. The IC is designed for bidirectional one's-complemented data transfers. Therefore, all commands sent to the FDC, and status read from the FDC, must be transmitted and received by the Z80 as one's-complemented data. Data is complemented when written on the flexible disk and complemented when read off the flexible disk. Therefore, true data written to the FDC is also read from the FDC as true data.

It is possible to read and write to/from the FDC on a byte-by-byte basis for single-density storage. However, to operate in double density it is necessary to use the 9517A-02 DMA controller to maintain the proper data rate for flexible disk read/write operations.

2716 ERASABLE PROGRAMMABLE READ-ONLY MEMORY (EPROM)

The 2716 EPROM is a 16 384-bit (2K by 8-bit) ultraviolet erasable and electrically programmable read-only memory. The read access time for the IC is 450 ns. The standard subsystem EPROMs uses memory addresses 0000_{16} through $0FFF_{16}$.

The stored program in the EPROMs provides subsystem diagnostics that include LED testing, ROM checksum, LSI device testing, memory testing, disk read/write testing, autoload, and initial PLATO parallel I/O channel interfacing with the host terminal.

Z80 COUNTER/TIMER CIRCUIT (CTC)

The Z80 counter/timer circuit is a programmable IC with four 8-bit internal independent channels that provide counting and timing functions under control of the Z80 microprocessor. The Z80 can configure the CTC channels to operate under various modes and conditions as required. In either timer or counter mode, an 8-bit, Z80-readable down-counter indicates the number of counts-to-go until zero. Interrupts can be programmed to occur on the zero count of any channel. The interrupt logic provides automatic interrupt vectoring.

All four of the counter timer circuits have external enables that can be selected by the Z80. Three of the counters have count-zero outputs. Two of the outputs are wired to the inputs of two of the other counters. This provides the ability to cascade the network into two 8-bit counters or essentially one 16-bit counter for each two CTCs used. Each of the CTCs used as an enable to one of the other has an external logic signal wired to its own input (figure 4-5). One external input is the Head-Down-Load (HDL) signal that indicates the disk was instructed to lower its read/write head. The counters can then be programmed to time out the mechanical delay that will take place in the 9406 drive (approximately 40 milliseconds). The zero-count output is sent to the 1791 flexible disk controller IC as a status bit. This status input means that the read/write head should be on the disk surface. This status bit is called Head-Load Timing (HLT).

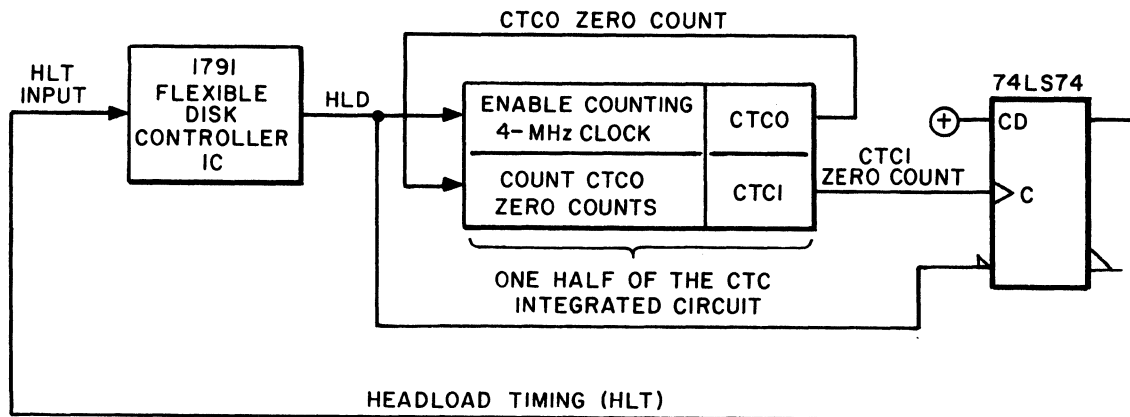


Figure 4-5. External Wiring of the CTC for Head-Load Timing

The other two CTCs of the integrated circuit are wired to allow them to be used for timing as a real-time clock. There is a circuit in the power supply that generates a pulse for every period of line voltage that occurs. This pulse is wired to the input of one of the CTCs (CTC2). The output of this CTC (CTC2) is wired as the input of the fourth CTC (CTC3). Together, these two CTCs provide a programmable down-counter 16 bits long (figure 4-6).

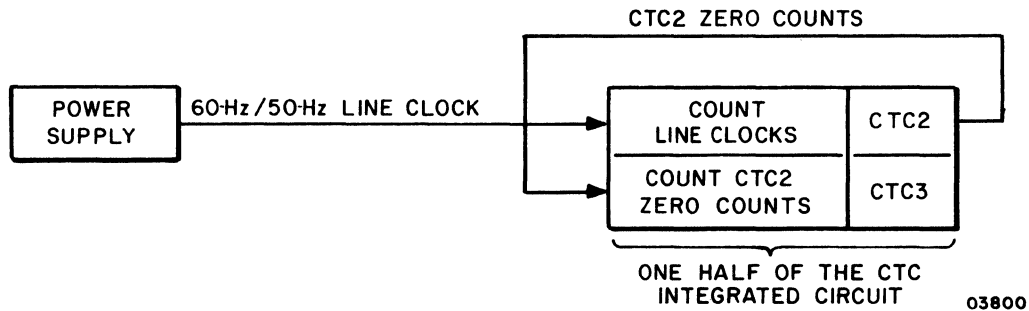


Figure 4-6. External Wiring of the CTC for Real-Time Clock


Note that it is possible to use the four CTC circuits in the CTC IC as four distinct timers by ignoring the input enables (selected only by program control) and use the four CTCs to count down the 4-MHz clock input to the IC.

9519 INTERRUPT CONTROLLER

The 9519 interrupt controller can manage up to eight maskable interrupt request inputs, resolve priorities, and supply up to four bytes of programmable response for each interrupt. The controller board only uses seven of these interrupts. They are:

- IREQ7 Not Used
- IREQ6 Line Clock
- IREQ5 DMA End of Processes
- IREQ4 1791 FDC Interrupt
- IREQ3 Parallel I/O Data Out (to the terminal)
- IREQ2 Parallel I/O Data In (from the terminal)
- IREQ1 Read Status (to the terminal)
- IREQ0 Write Command (from the terminal)

The interrupt network is shown in block diagram form in figure 4-7.

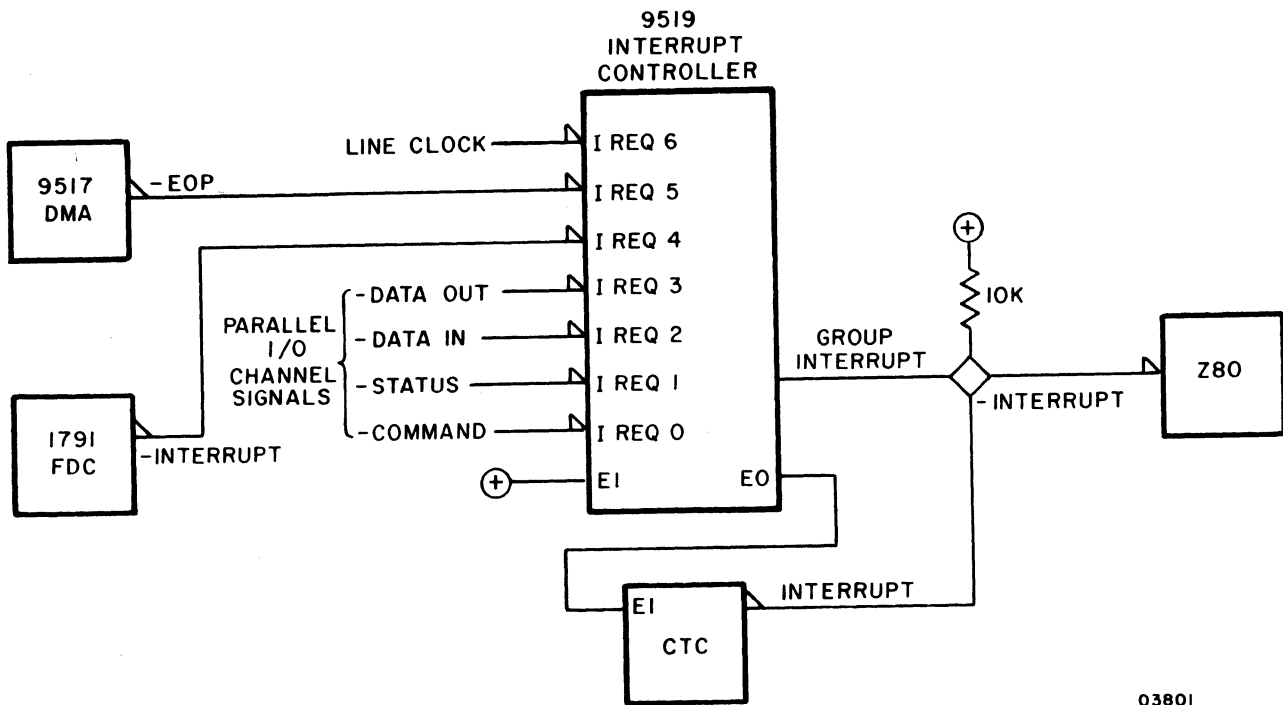

03801

Figure 4-7. Flexible Disk Interrupt Network

EXTERNAL INTERFACE PIN ASSIGNMENTS

Tables 4-1 and 4-2 list the external interface pin assignments for the parallel I/O channel and secondary drive unit channel, respectively. Both of the interfaces use standard TTL-to-TTL circuits and logic levels. For external signal definitions, refer to the applicable hardware maintenance manual listed in the preface.

INTERNAL CONNECTOR PIN ASSIGNMENTS

Figure 4-8 shows the internal connector pin assignments for the flexible disk subsystem. For signal definitions, refer to the 9406 Flexible Disk Drive Hardware Maintenance Manual (publication number is listed in the preface).


TABLE 4-1. PARALLEL I/O CHANNEL PIN ASSIGNMENTS

Signal	In/Out	Active Level	Pin Number
Data 20	Both	High	J6, J7-15
Data 21	Both	High	J6, J7-16
Data 22	Both	High	J6, J7-17
Data 23	Both	High	J6, J7-18
Data 24	Both	High	J6, J7-21
Data 25	Both	High	J6, J7-22
Data 26	Both	High	J6, J7-23
Data 27	Both	High	J6, J7-24
+5 V (Terminator only)			J6, J7-13
Address 2 ⁰	In	High	J6, J7-2
Address 2 ¹	In	High	J6, J7-3
Address 2 ²	In	High	J6, J7-4
Address 2 ³	In	High	J6, J7-5
Address 2 ⁴	In	High	J6, J7-6
Not Used (in this device)			J6, J7-7
Not Used (in this device)			J6, J7-9
-External Write	In	Low	J6, J7-8
-External Read	In	Low	J6, J7-10
-External Interrupt	Out	Low	J6, J7-12
Not Used (in this device)			J6, J7-11
Ground			J6, J7-1
Ground			J6, J7-14
Ground			J6, J7-19
Ground			J6, J7-20
Ground			J6, J7-25

TABLE 4-2. SECONDARY DRIVE UNIT CHANNEL PIN ASSIGNMENTS

Signal	In/Out	Active Level	Pin Number*
-Read Data Composite	In	Low	J5-2
-Head Load	Out	Low	J5-4
-Track 00	In	Low	J5-6
-Index	In	Low	J5-8
-Low Write Current	Out	Low	J5-10
-Step	Out	Low	J5-12
-Direction (Increase)	Out	Low	J5-14
-Write Enable	Out	Low	J5-16
-Write Data	Out	Low	J5-31
-Unit Select 1	Out	Low	J5-33
-Unit Select 2	Out	Low	J5-29
-Unit Ready Status 1	In	Low	J5-50
-Unit Ready Status 2	In	Low	J5-48
-Write Protect	In	Low	J5-42
-Head Select (low = head 1; high = head 0)	Out	Low	J5-40
-Write Fault	In	Low	J5-38
-Write Fault Reset	Out	Low	J5-36
-Diskette Type (Two Sided)	In	Low	J5-34

*Pins 1, 3, 5, 7, 9, 11, 13, 15, 17, 18, 20, 22, 24, 26, 28, 30, 32, 35, 37, 39, 41, 43, 45, 47, and 49 are at logic ground; pins 19, 21, 23, 25, 27, 44, and 46 are open.

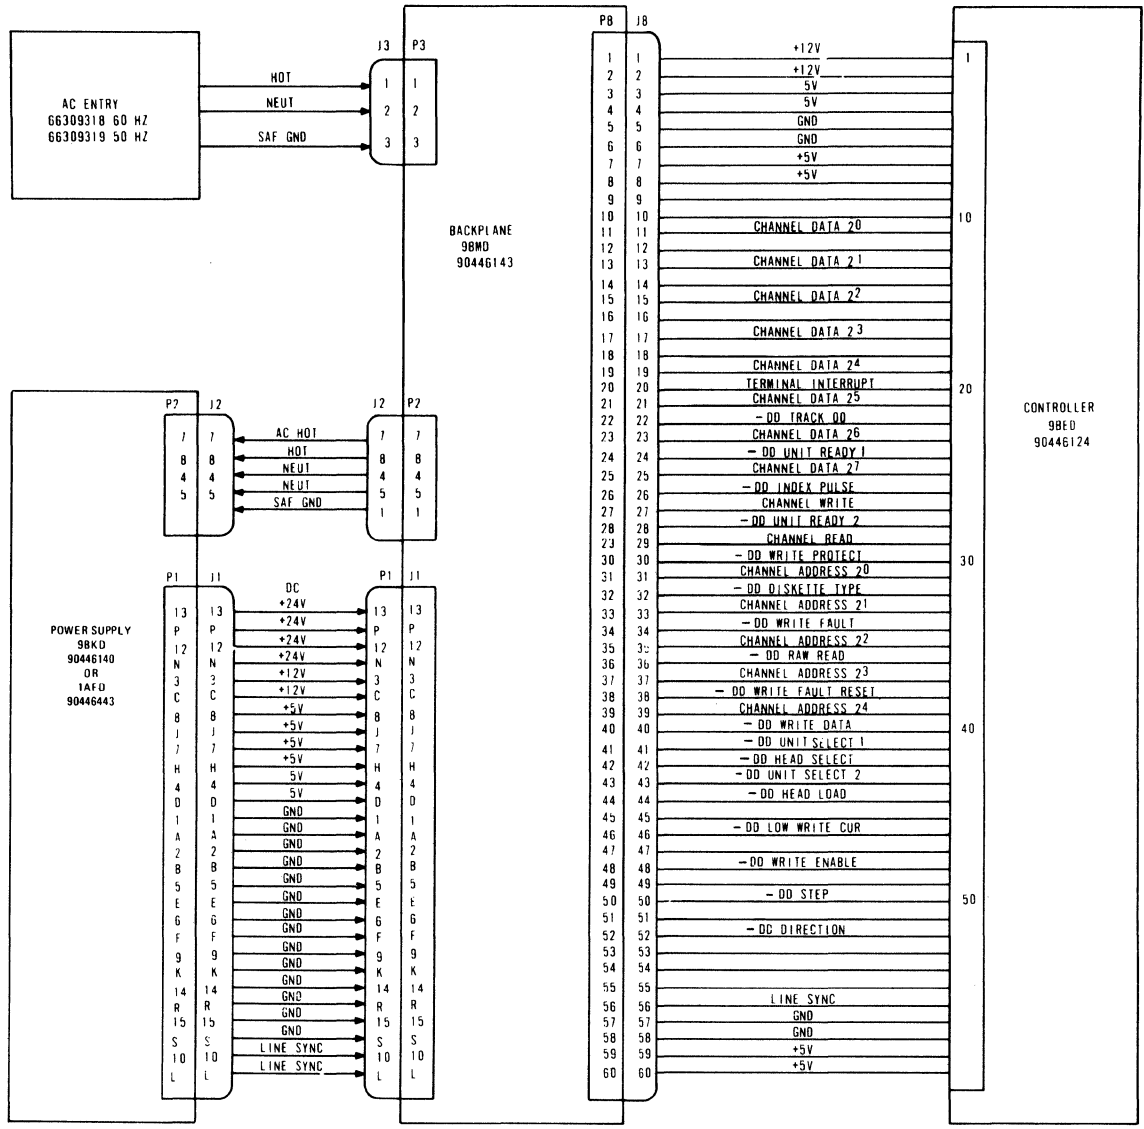

03932

Figure 4-8. Internal Connector Pin Assignments


DIAGRAMS

This section contains logic and schematic diagrams for the controller board (9BED), power supply (9BKD), backplane (9BMD), and ac power wiring of the flexible disk subsystem. For logic diagrams on the drive unit, refer to the 9406 Flexible Disk Drive Hardware Maintenance Manual (publication number is listed in the preface).


5-2

62949100 J

SHEET REVISION STATUS											REVISION RECORD														
18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP	
00	00	C	✓	00	00	✓	00	00	✓	00	00	✓	00	00	✓	00	00	✓	500	145	RELEASED CLASS	-	12/14/80	-	EE
A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	134	114	RELEASED CLASS	-	12/17/80	-	EE
A	A	A	A	A	A	A	B	A	A	A	A	A	A	A	A	A	B	B	149	69	REVISED PER ECO	EE	1/19/81	WJG	JAP
A	A	A	A	A	A	A	B	A	A	A	A	A	A	A	A	C	C	C	149	71	REVISED PER ECO	WJG	3-2-81	WJG	QAP
A	A	A	A	A	A	D	B	A	A	A	A	A	A	A	A	C	D	D	149	65	REVISED PER ECO	EE	1/8/82	EE	WJG
A	A	A	A	A	A	D	B	A	A	A	A	A	A	A	A	C	E	E	149	85	ADD OPTIONAL RAM NOTE	EE	1-11-82	WJG	WJG
F	F	F	A	A	A	D	B	F	F	A	A	A	A	F	A	F	F	F	157	71	REVISED PER ECO	EE	3/10/83	EE	

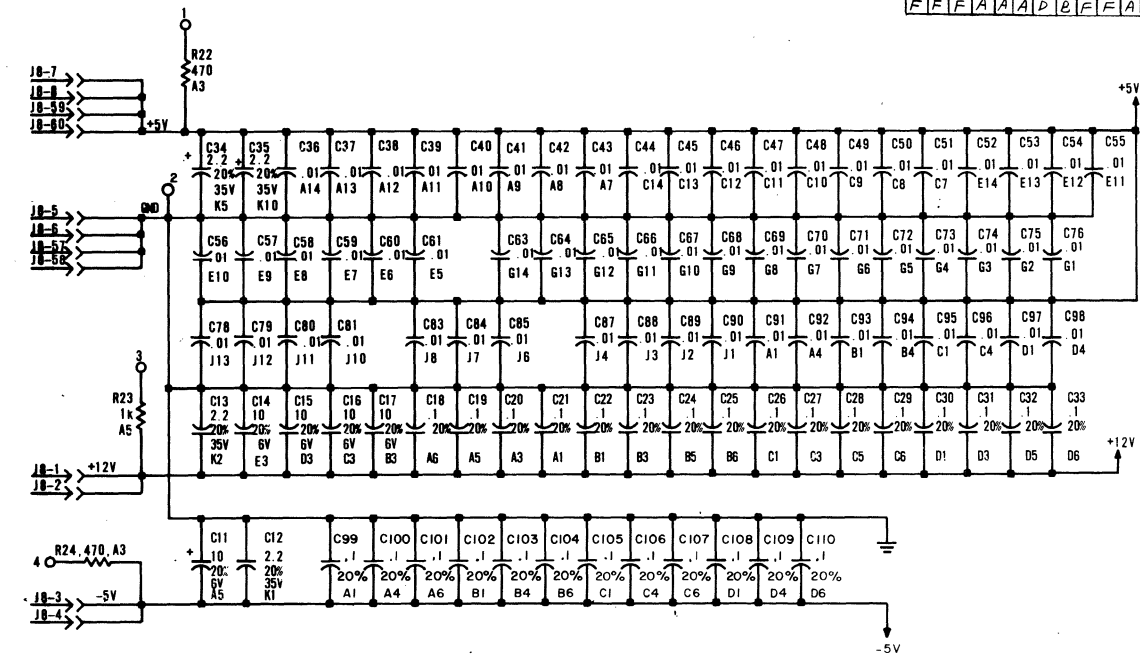


SPARES

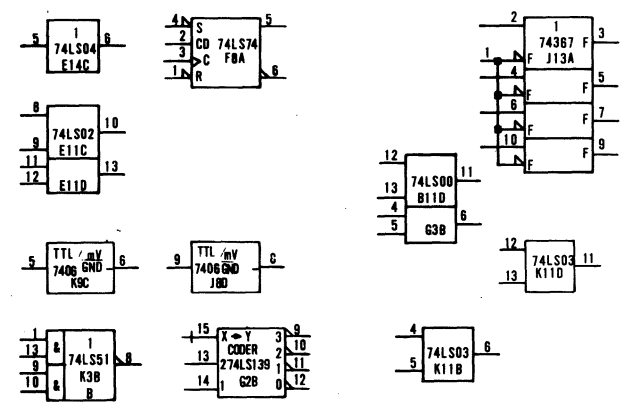


NOTES:

- OPTIONAL RAM EXPANSION IS STANDARD ON FA501 C/D.
- 1. UNLESS OTHERWISE SPECIFIED POWER AND GROUND PINS OF INTEGRATED CIRCUITS ARE AS LISTED BELOW:
 14 PIN INTEGRATED CKTS: PIN 14 = +5V, PIN 7 = GND.
 16 PIN INTEGRATED CKTS: PIN 16 = +5V, PIN 8 = GND.
 24 PIN INTEGRATED CKTS: PIN 24 = +5V, PIN 12 = GND.
- 2. CONTROL BLOCK INPUTS ARE SHOWN ONLY ONCE, BUT ARE CONNECTED IDENTICALLY TO MUX LOCATED AT B7 & C7
- 3. CONTROL BLOCK INPUTS ARE SHOWN ONLY ONCE, BUT ARE CONNECTED IDENTICALLY TO MEM LOCATED AT A1, A2, A3, A4, A5, & A6
- 4. CONTROL BLOCK INPUTS ARE SHOWN ONLY ONCE, BUT ARE CONNECTED IDENTICALLY TO MEM LOCATED AT B1, B2, B3, B4, B5, & B6
- 5. CONTROL BLOCK INPUTS ARE SHOWN ONLY ONCE, BUT ARE CONNECTED IDENTICALLY TO MEM LOCATED AT C1, C2, C3, C4, C5 & C6
- 6. CONTROL BLOCK INPUTS ARE SHOWN ONLY ONCE, BUT ARE CONNECTED IDENTICALLY TO MEM LOCATED AT D1, D2, D3, D4, D5, & D6
- 7. UNLESS OTHERWISE NOTED ALL LEADS TO BE P N19171201

REFERENCE DRAWING		CONTROL DATA		TITLE	
DETAIL	90446258	FA501 BR810		SCHEMATIC DIAGRAM, 9BED	
ASSY	90446284	FIRST USED ON	Mory Dietz	10/15/80	
	90446396	CHKD	10/15/80		
	90446570	ENGR	10/15/80		
	90446571	MFG	12/14/80		
COMPONENTS, EXCEPT AS NOTED		APPR	12/14/80		
RES	± 5%	TOLERANCE	VALUE	RATING	
CAP	+80 -20%	OHMS	1/4 W	25V	
CODE IDENT		DRAWING NO		SCALE	
15920		C 90446258		CROSS REF NO	
SHEET 1		OF 18			

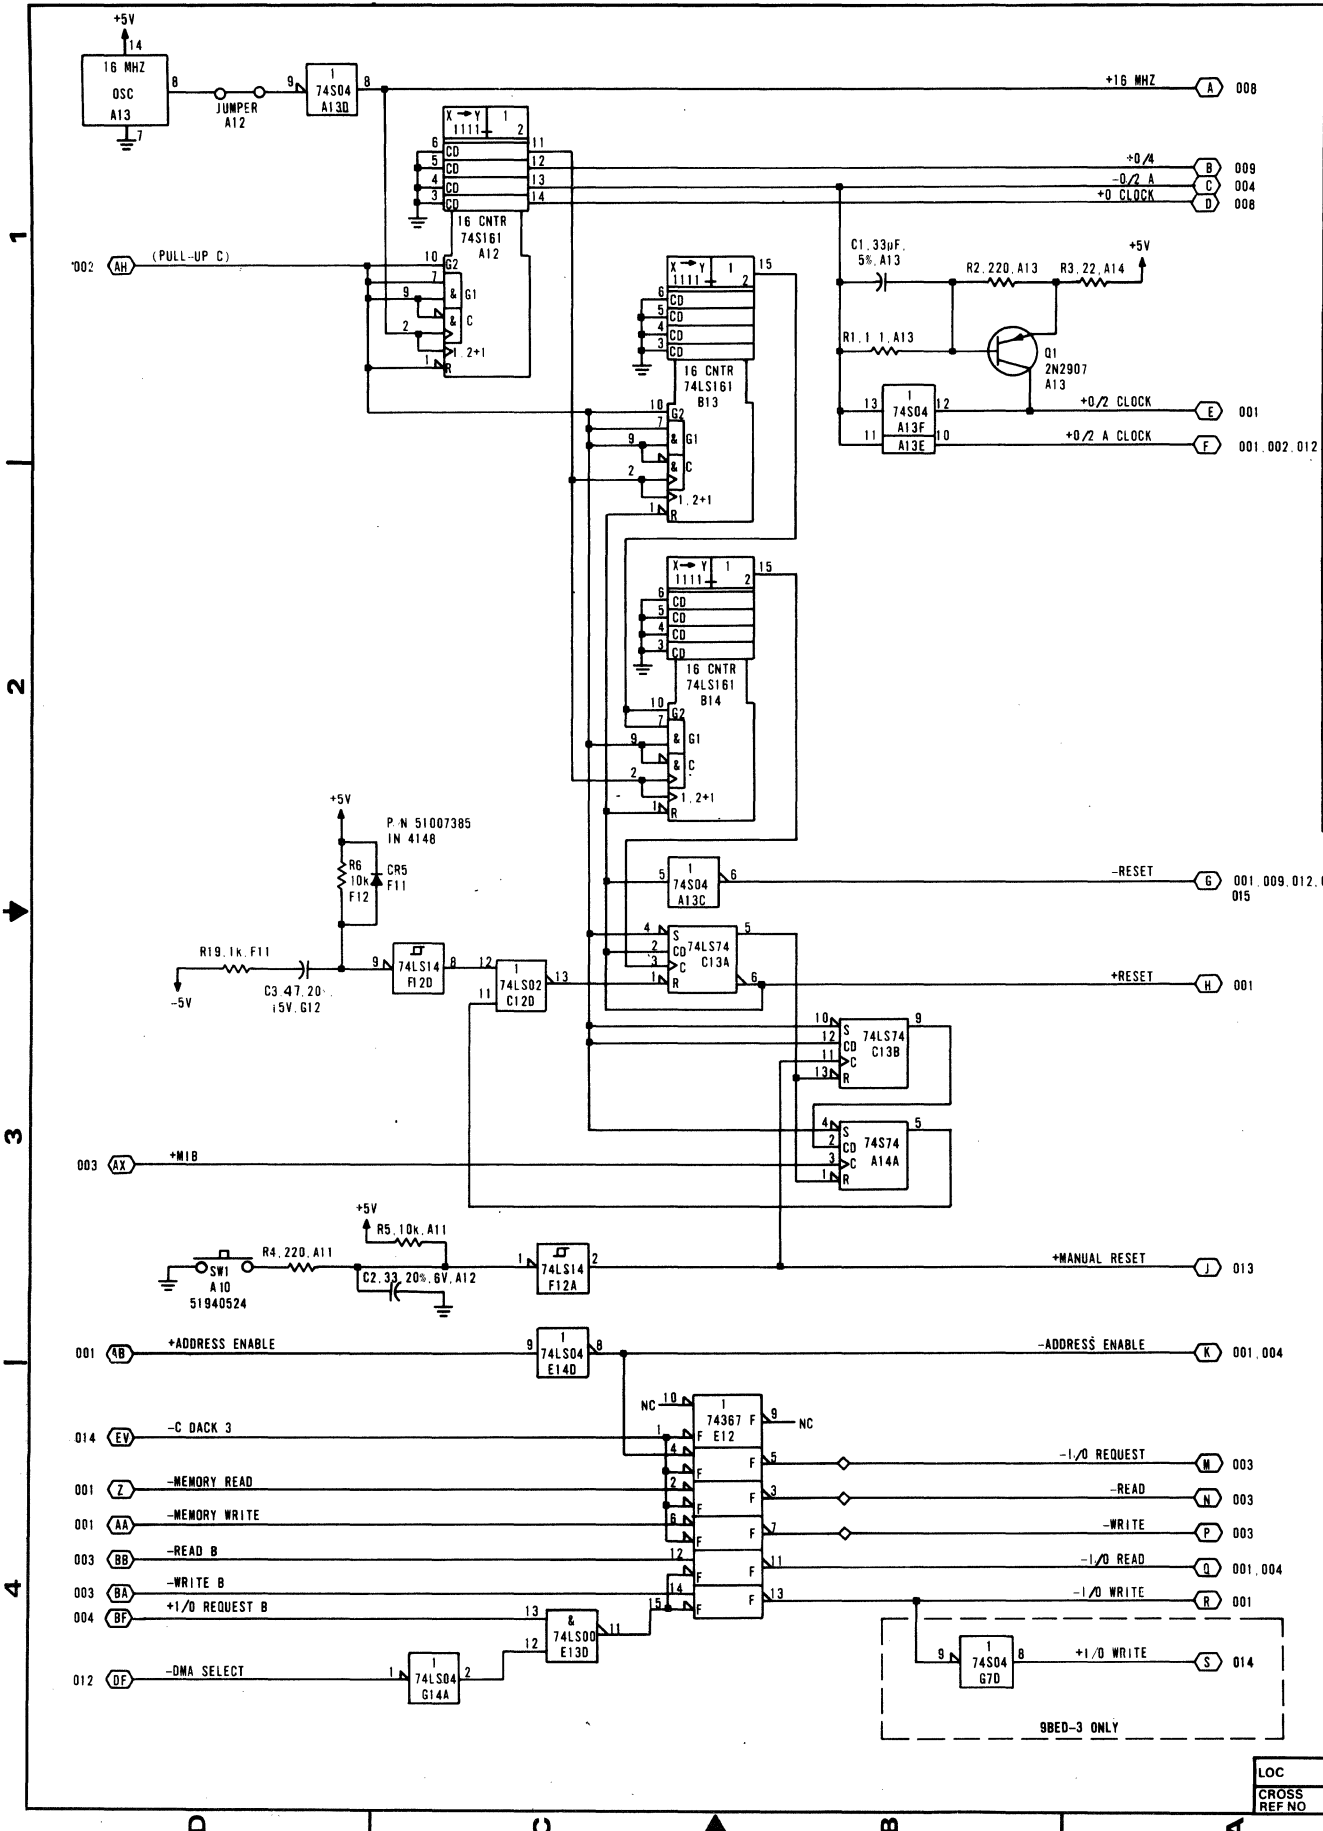


LOC	
CROSS REF NO	000

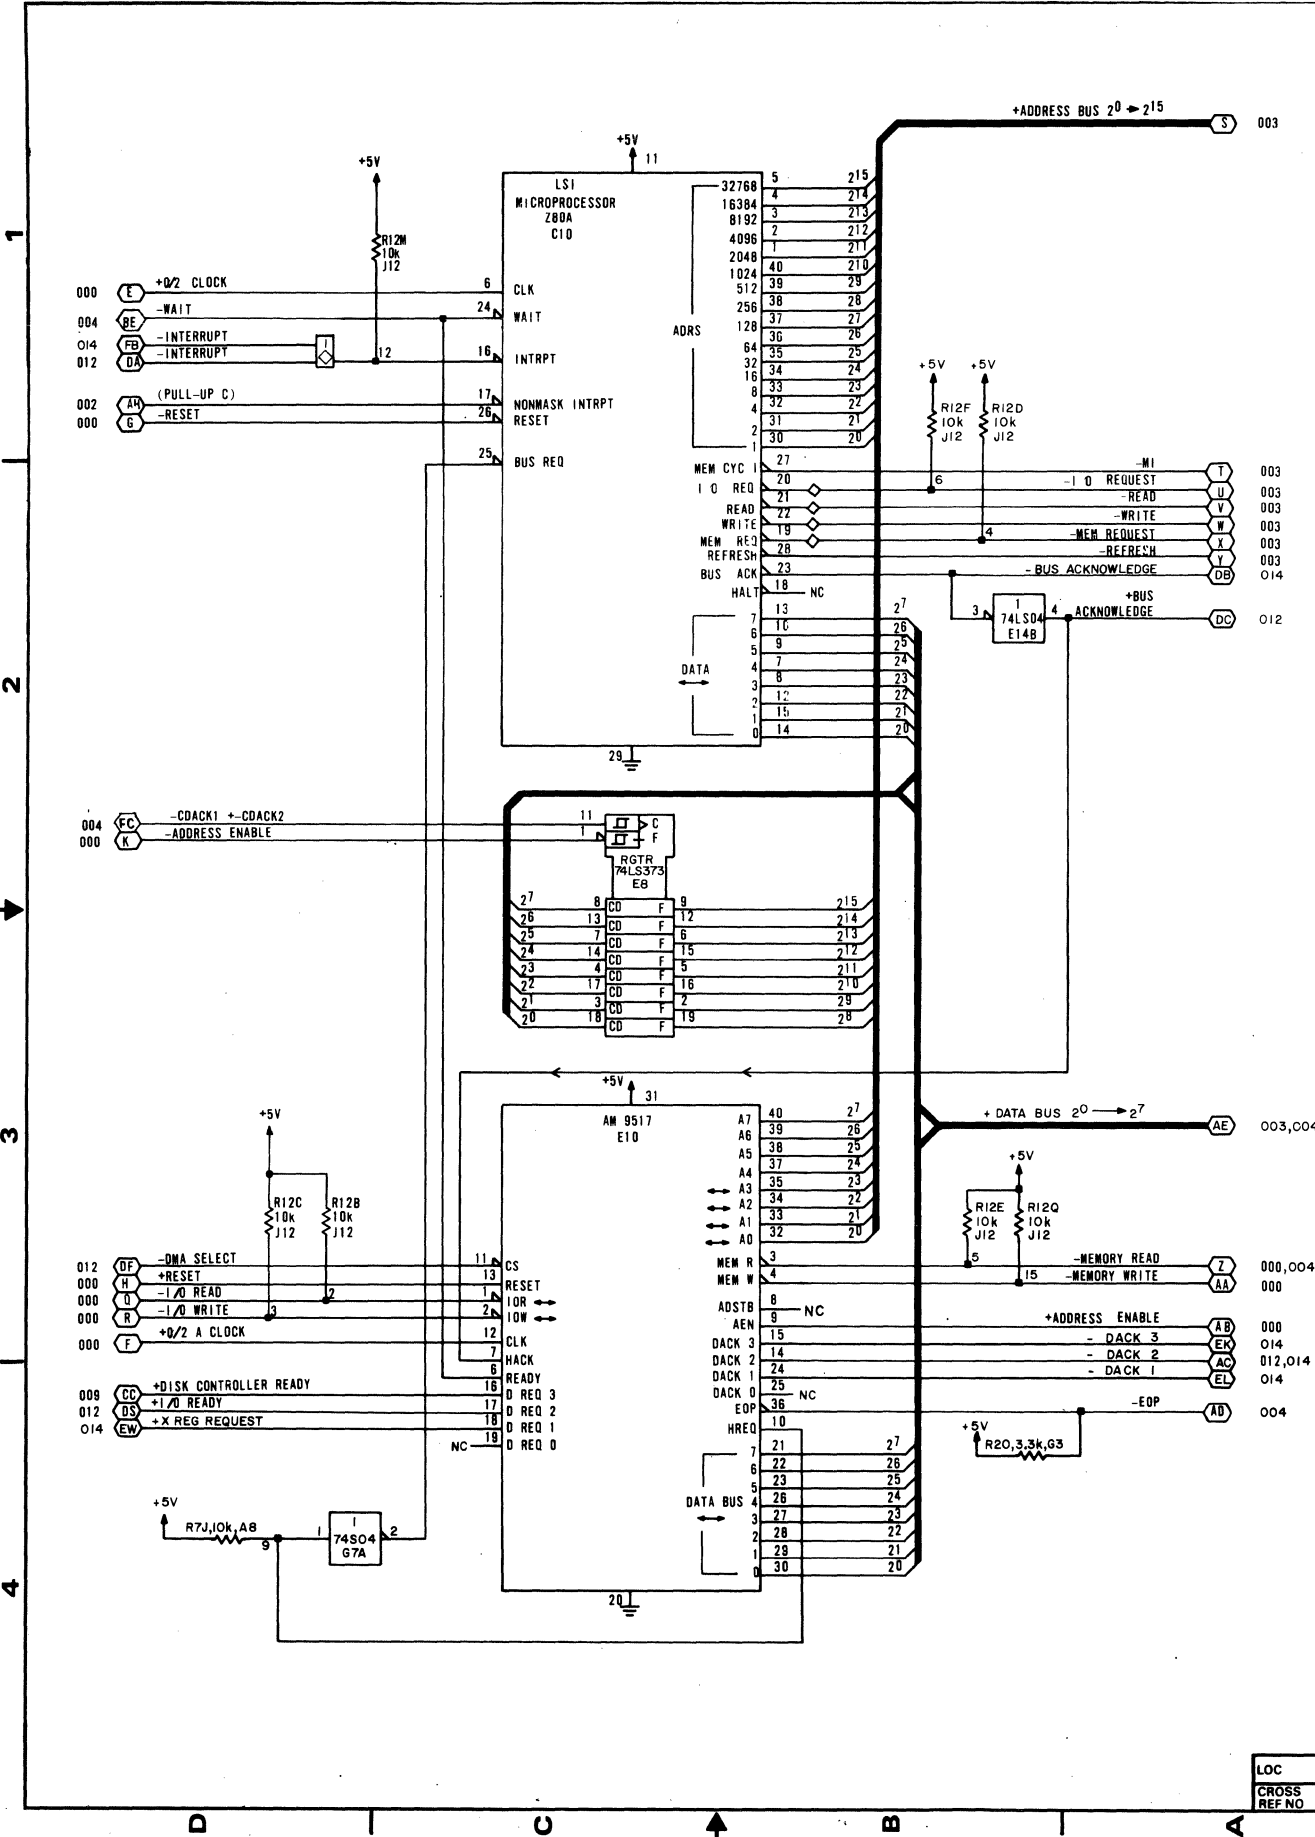


1
2
3
4

REV	F
DWG NO	90446258
CROSS REF NO	002
SHEET	4
CODE IDENT	15920
SCHEMATIC DIAGRAM, 9BED	
	

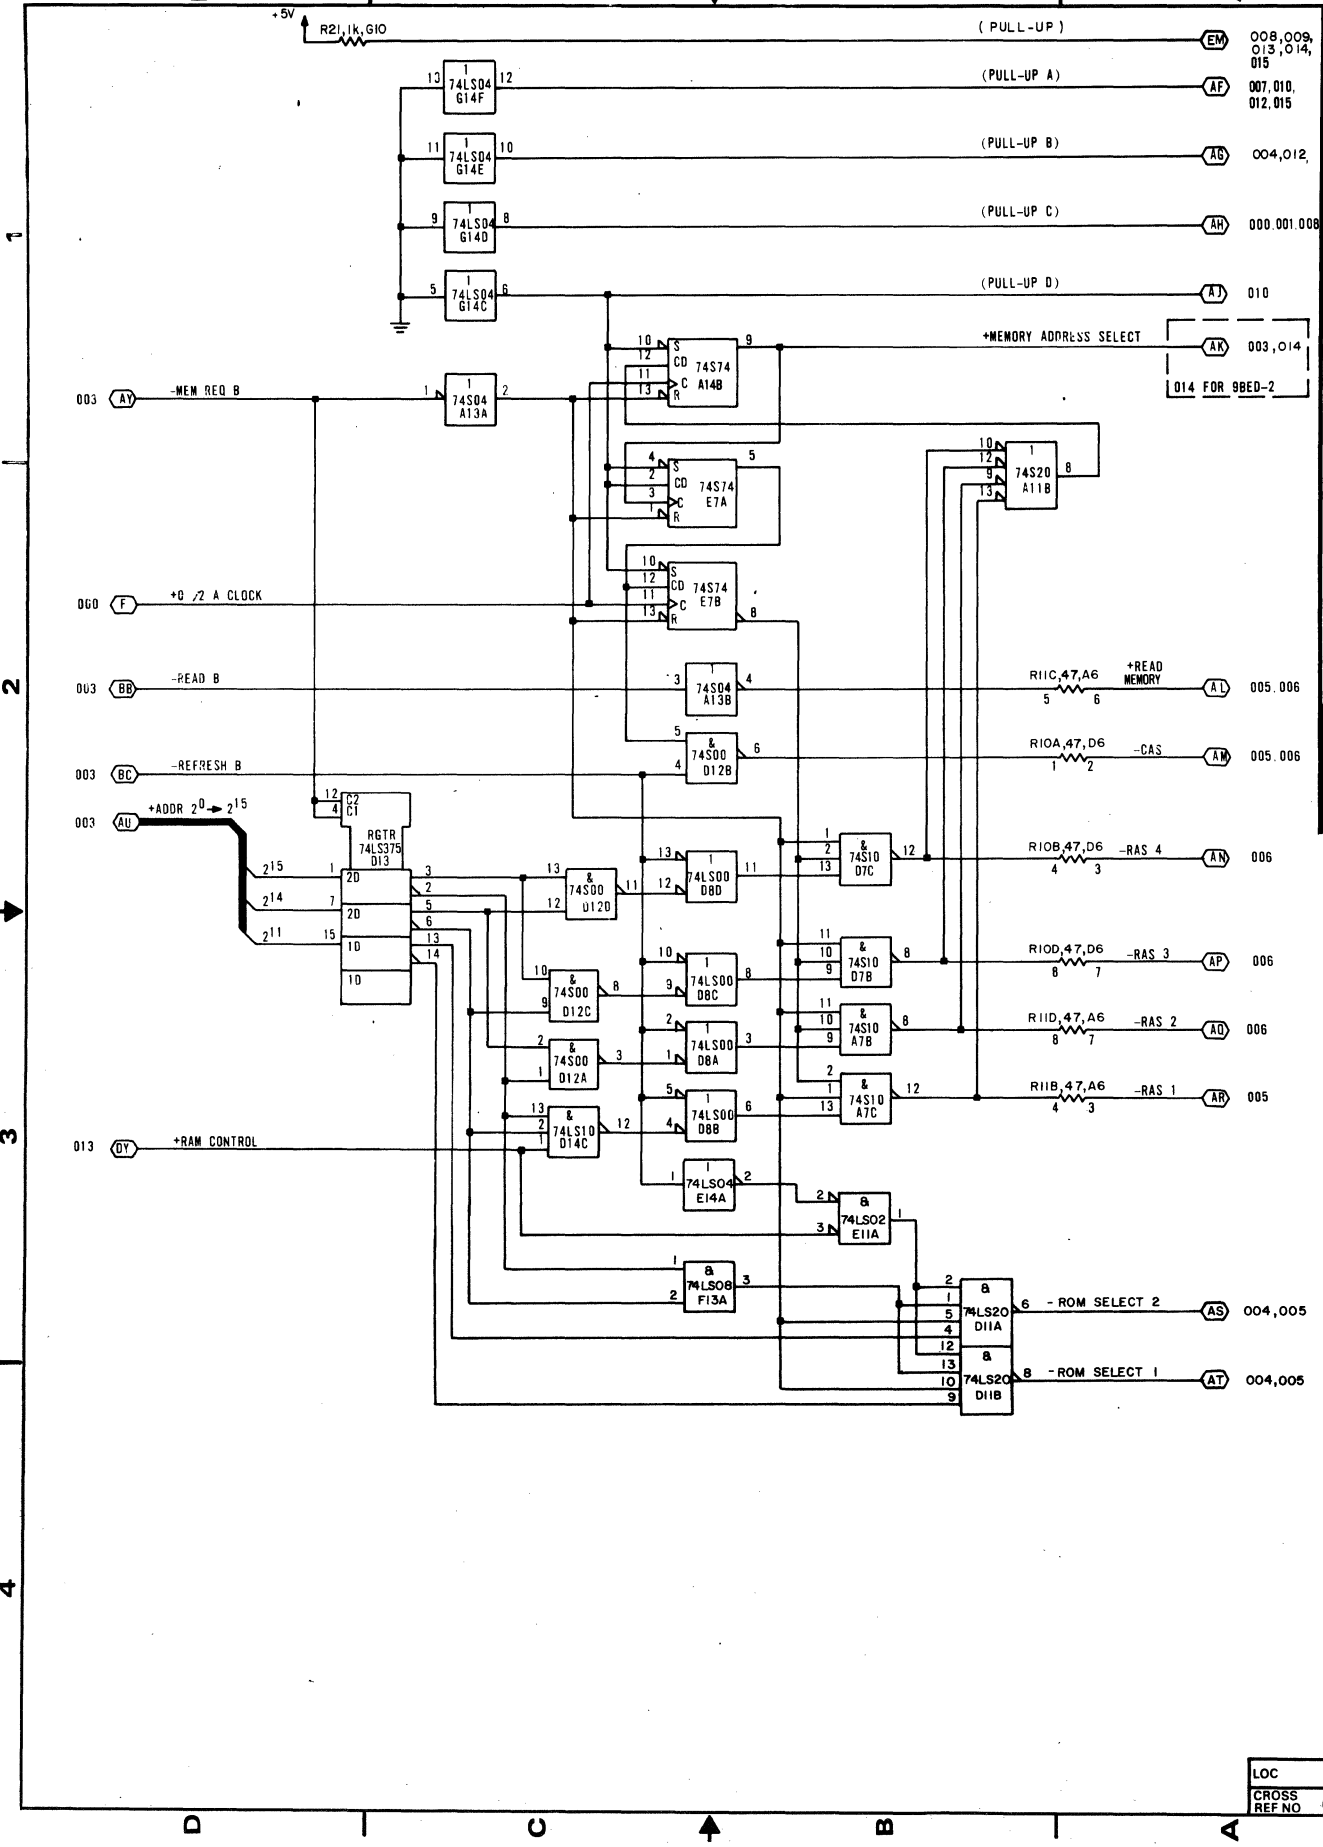

LOC
CROSS REF NO 002

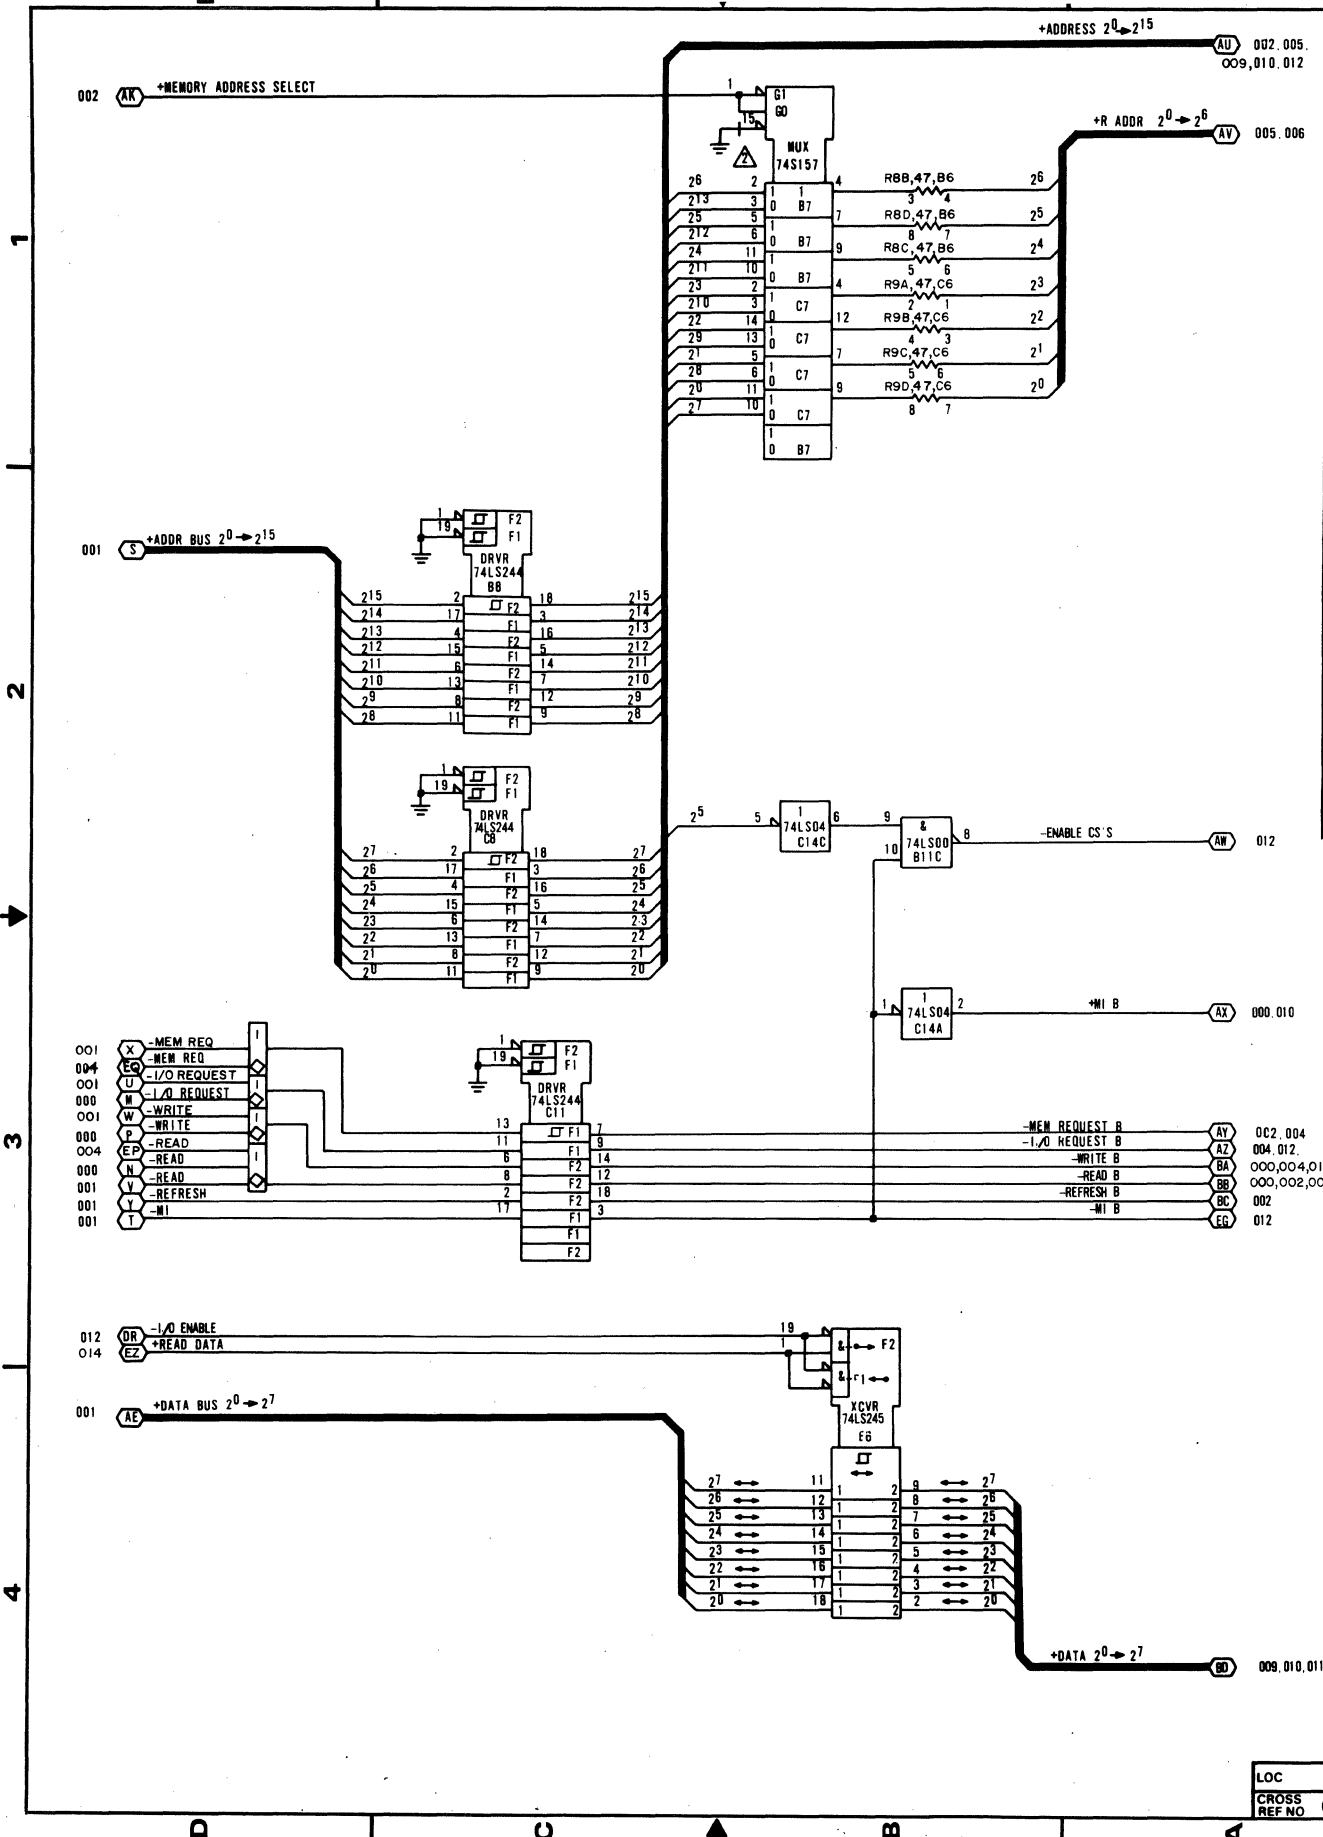


REV	A
DWG NO	90446258
CODE IDENT	C
CROSS REF NO	003
SHEET	5


SCHEMATIC DIAGRAM, 98BD

LOC

CROSS REF NO 003

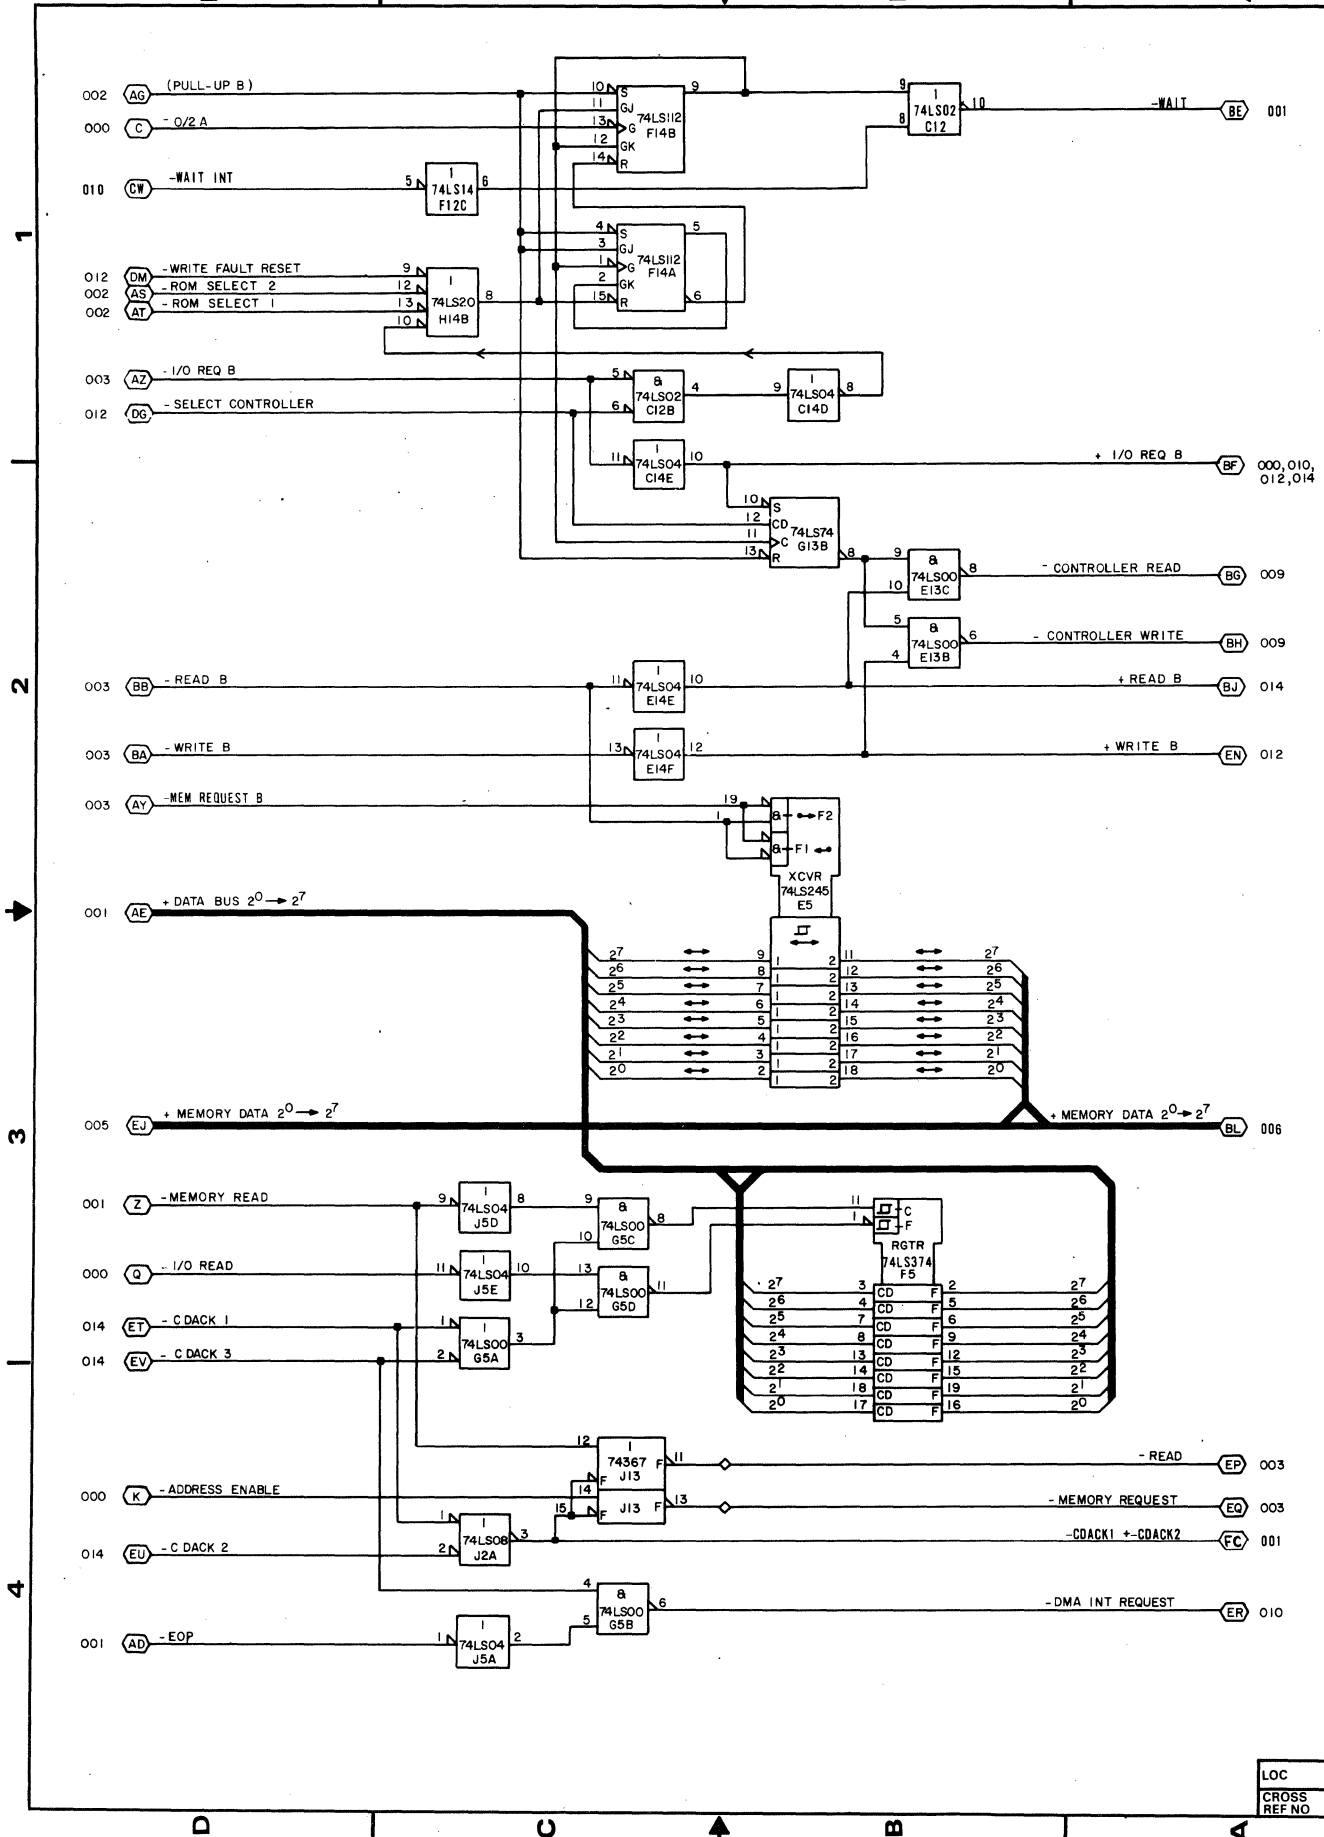


1
2
3
4

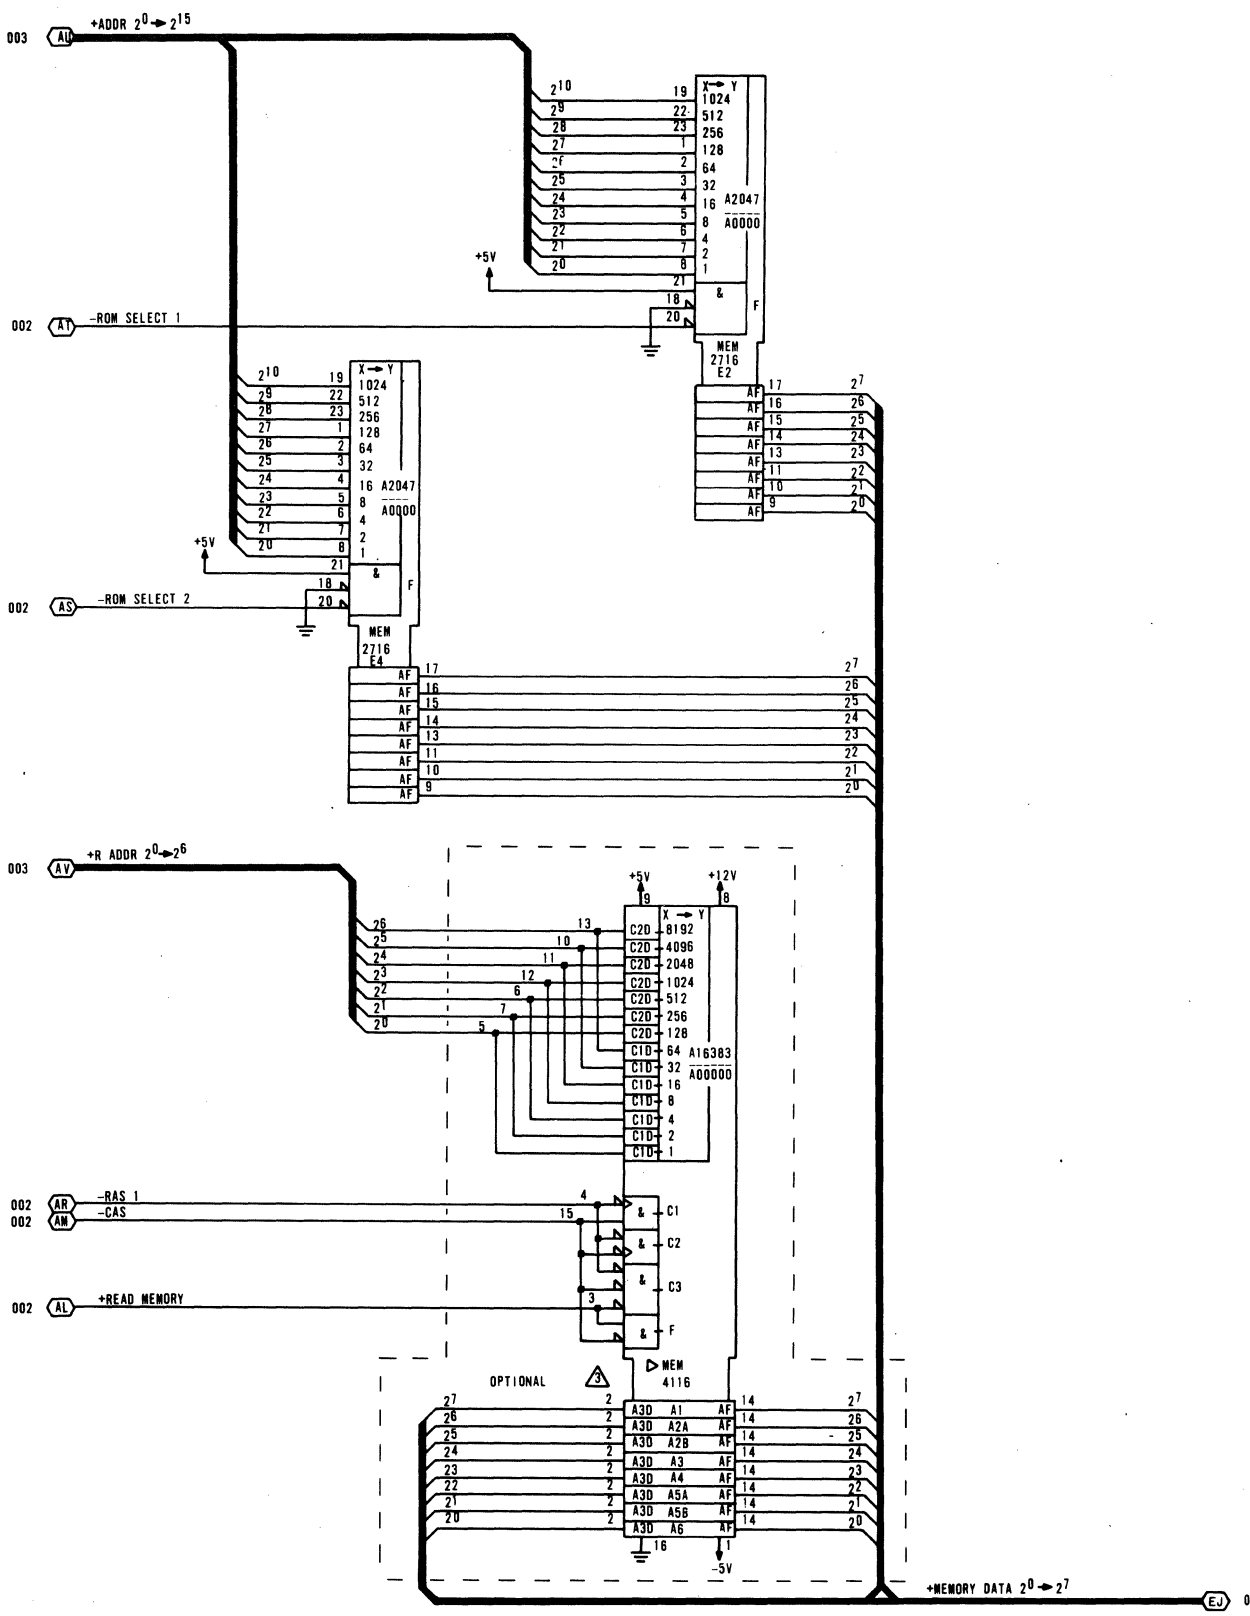

REV	A
DWG NO	90446258
CODE IDENT	C
15920	
CROSS REF NO	005
SHEET	7
SCHEMATIC DIAGRAM, 9BED	
GDC CORPORATION	


LOC
CROSS REF NO 005

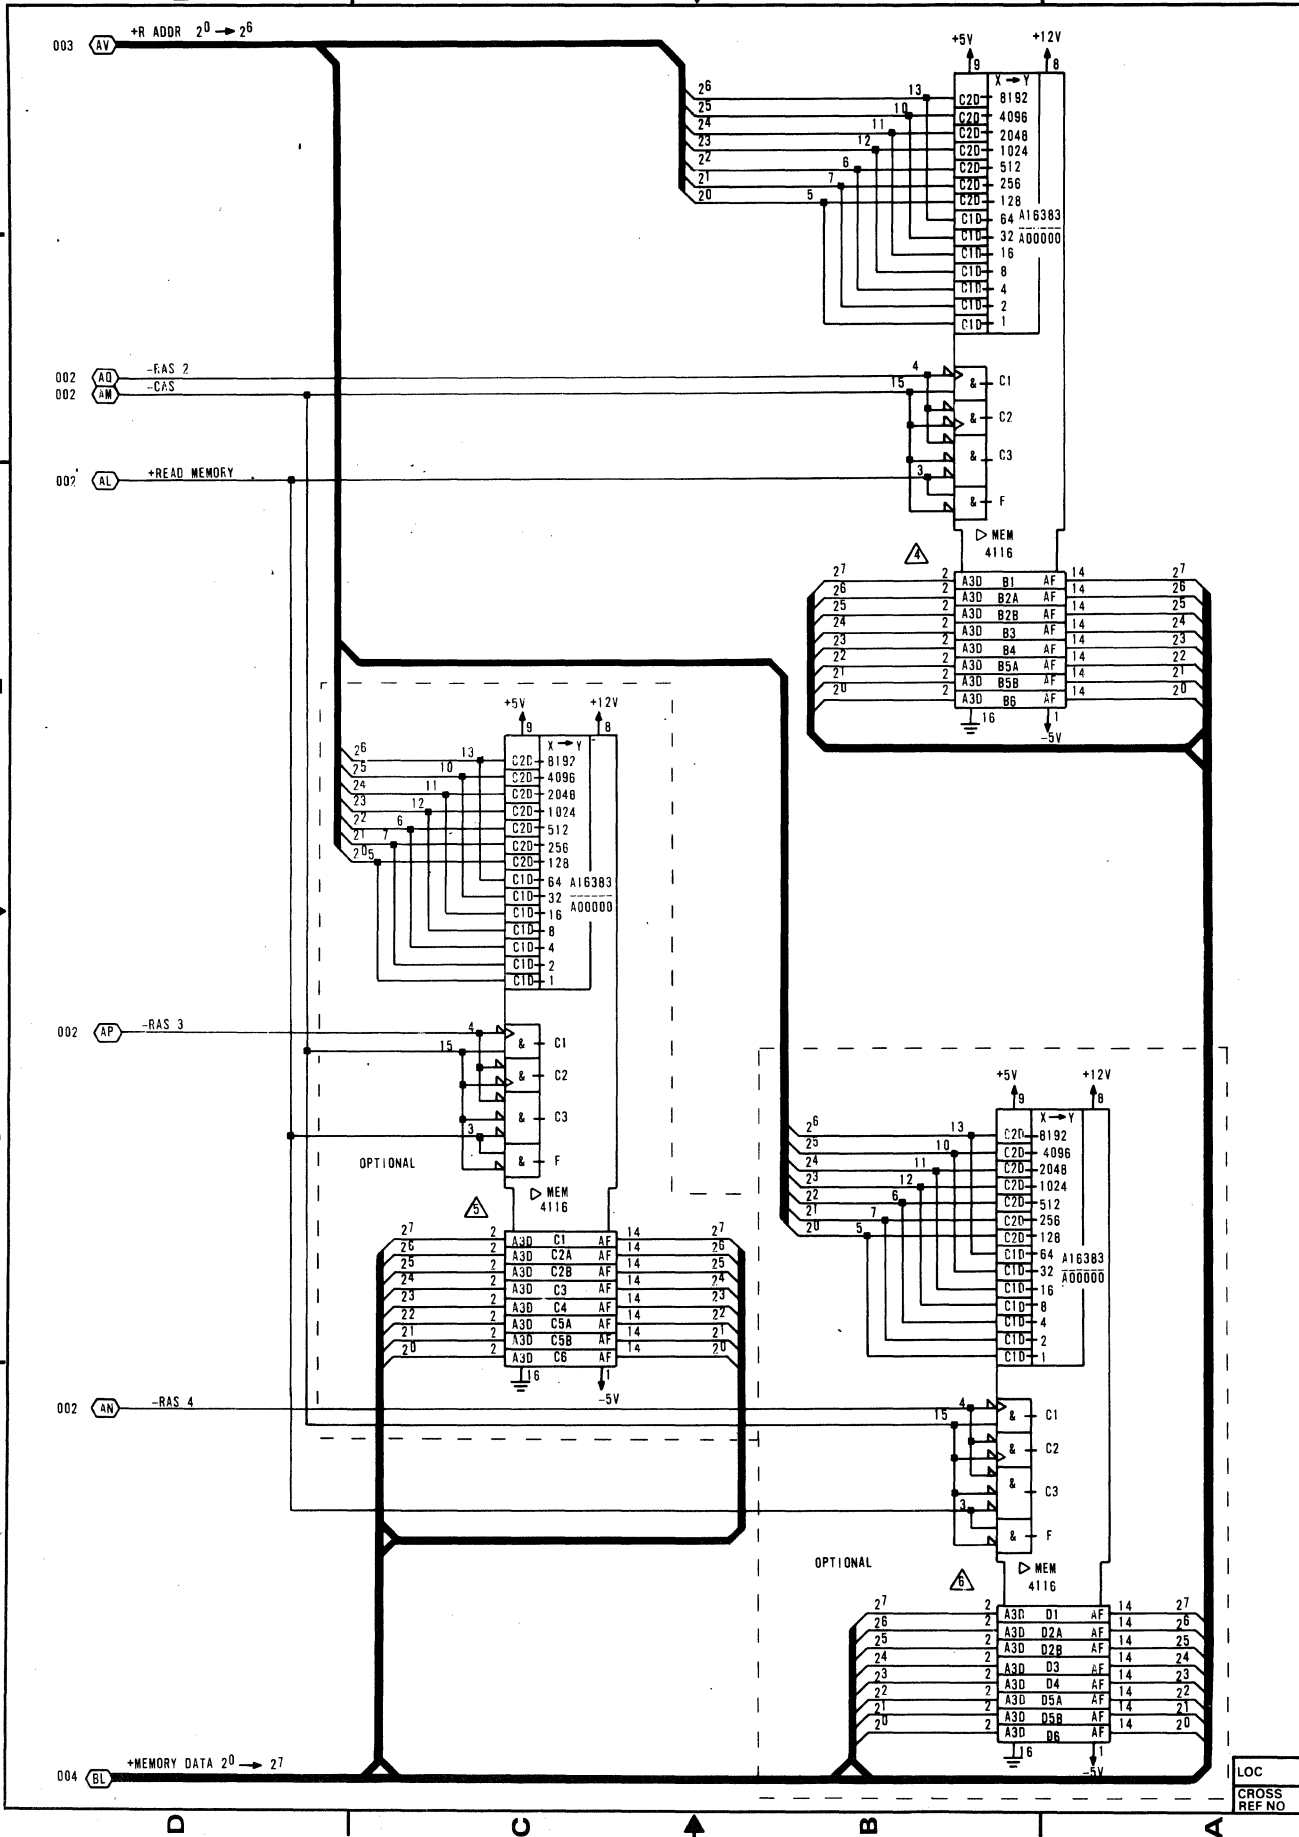



1
 2
 3
 4

003 AV +R ADDR 2⁰ → 2⁶
 002 AD -EAS 2
 2M -CAS
 002 AL +READ MEMORY
 002 AP -RAS 3
 002 AN -RAS 4
 004 BL +MEMORY DATA 2⁰ → 2⁷


D C B A

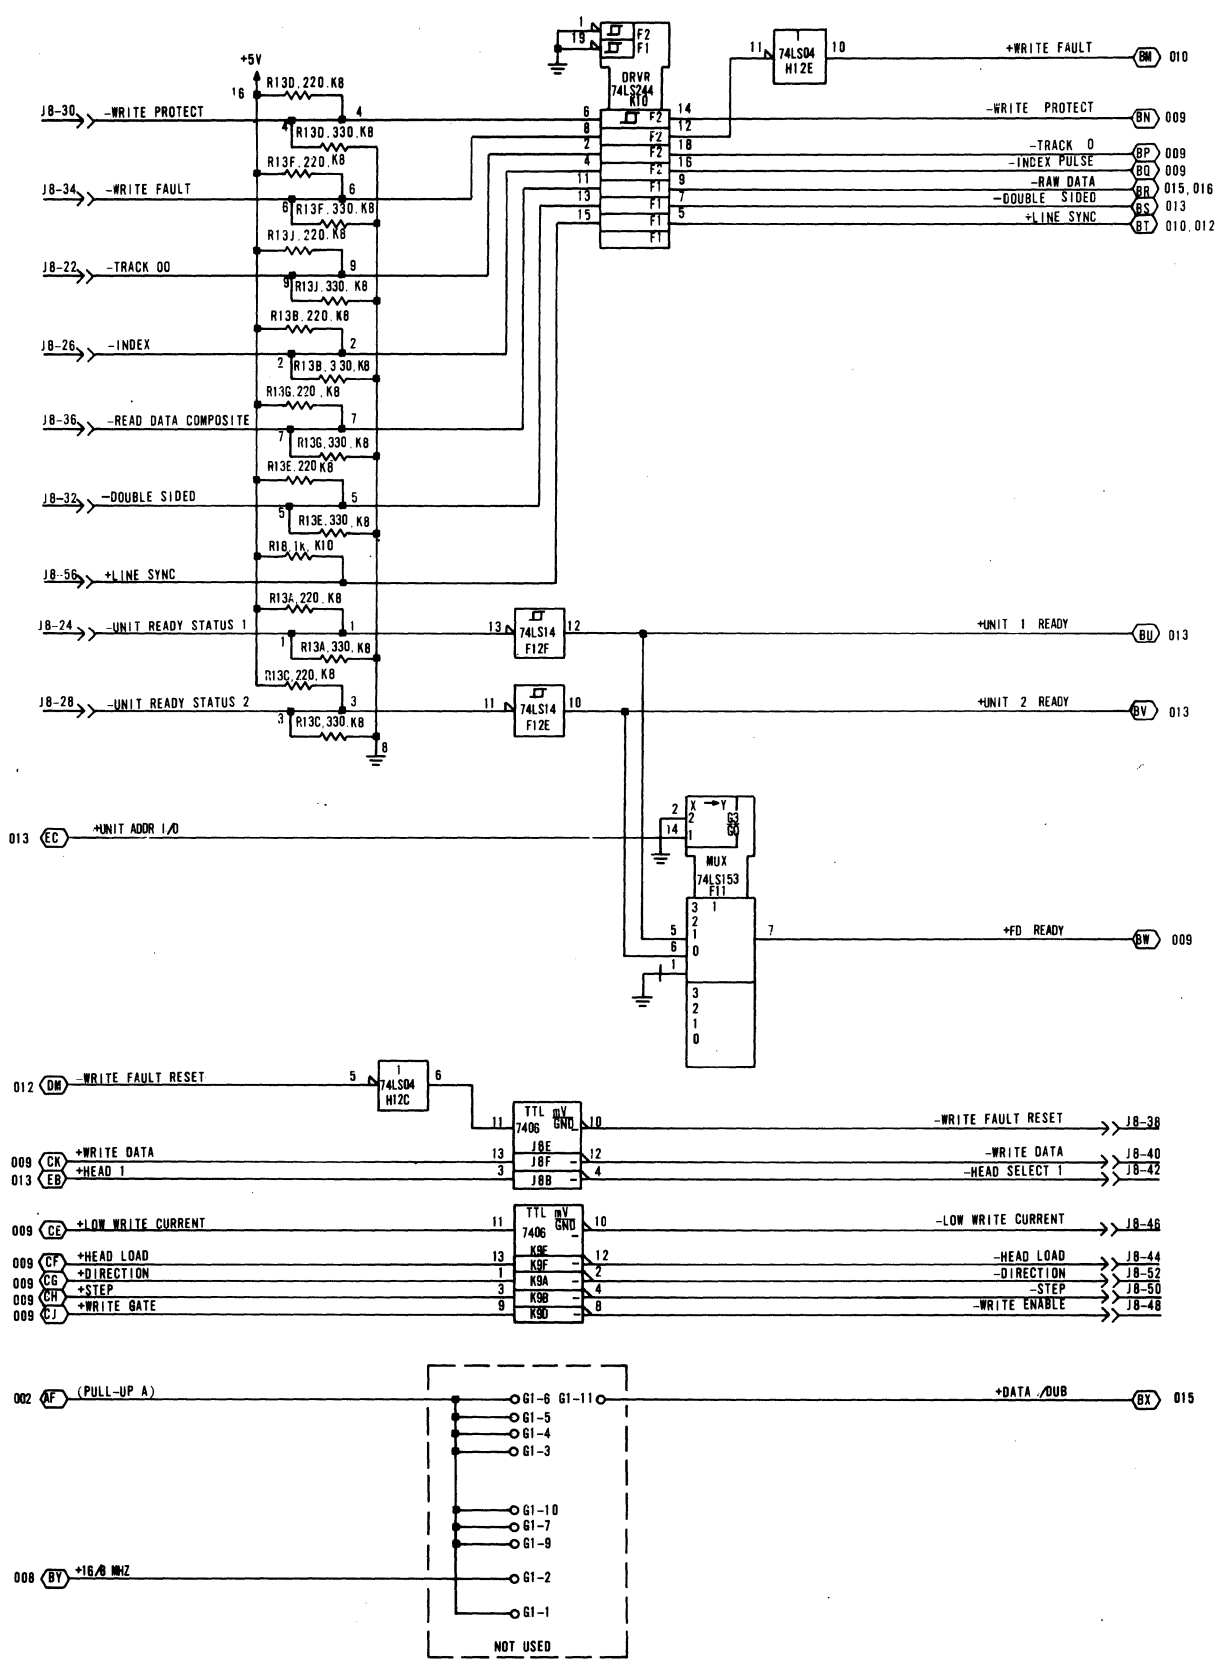

REV	F
DWG NO	90446258
CROSS REF NO	008
SHEET	10
CODE IDENT	15920
SCHEMATIC DIAGRAM, 9BED	

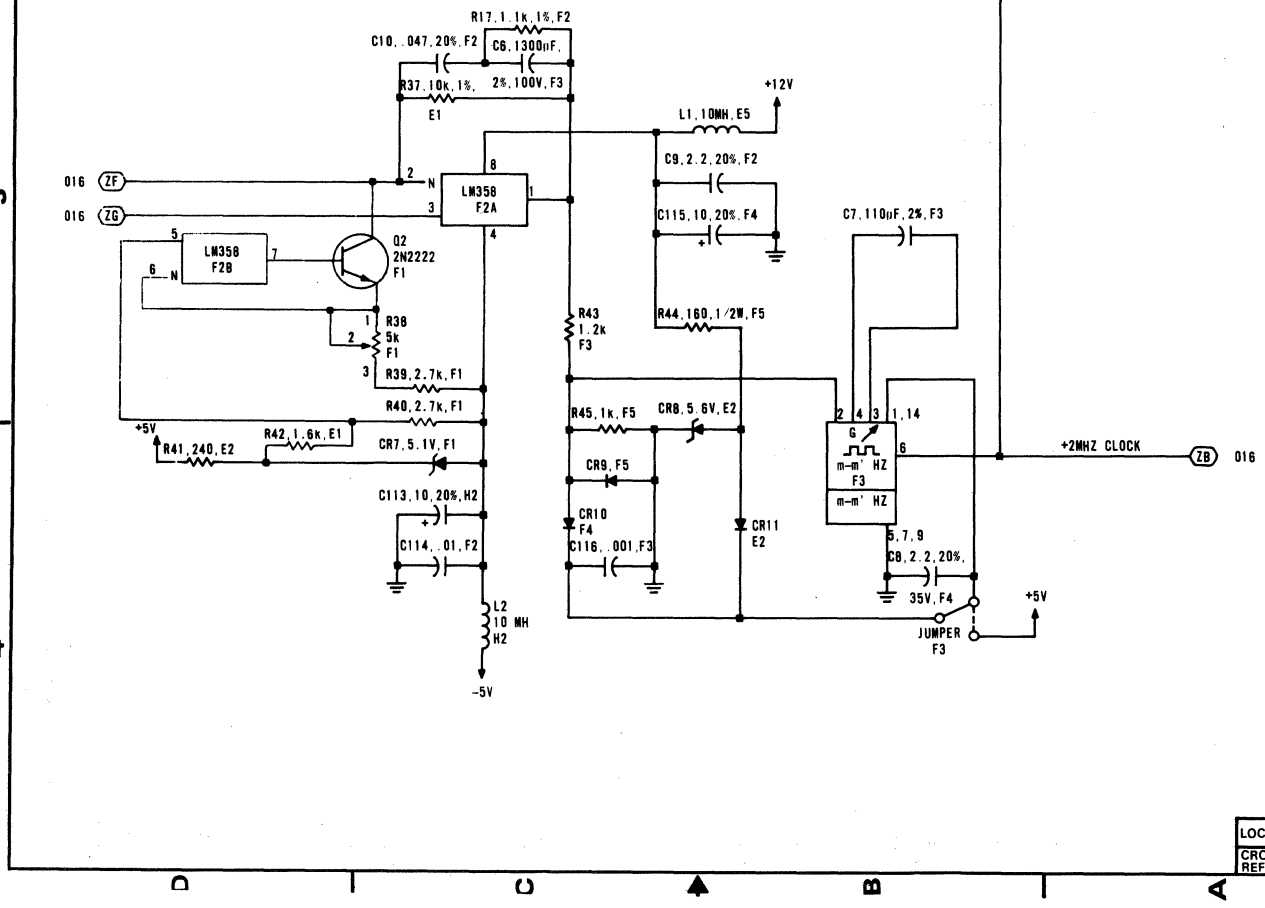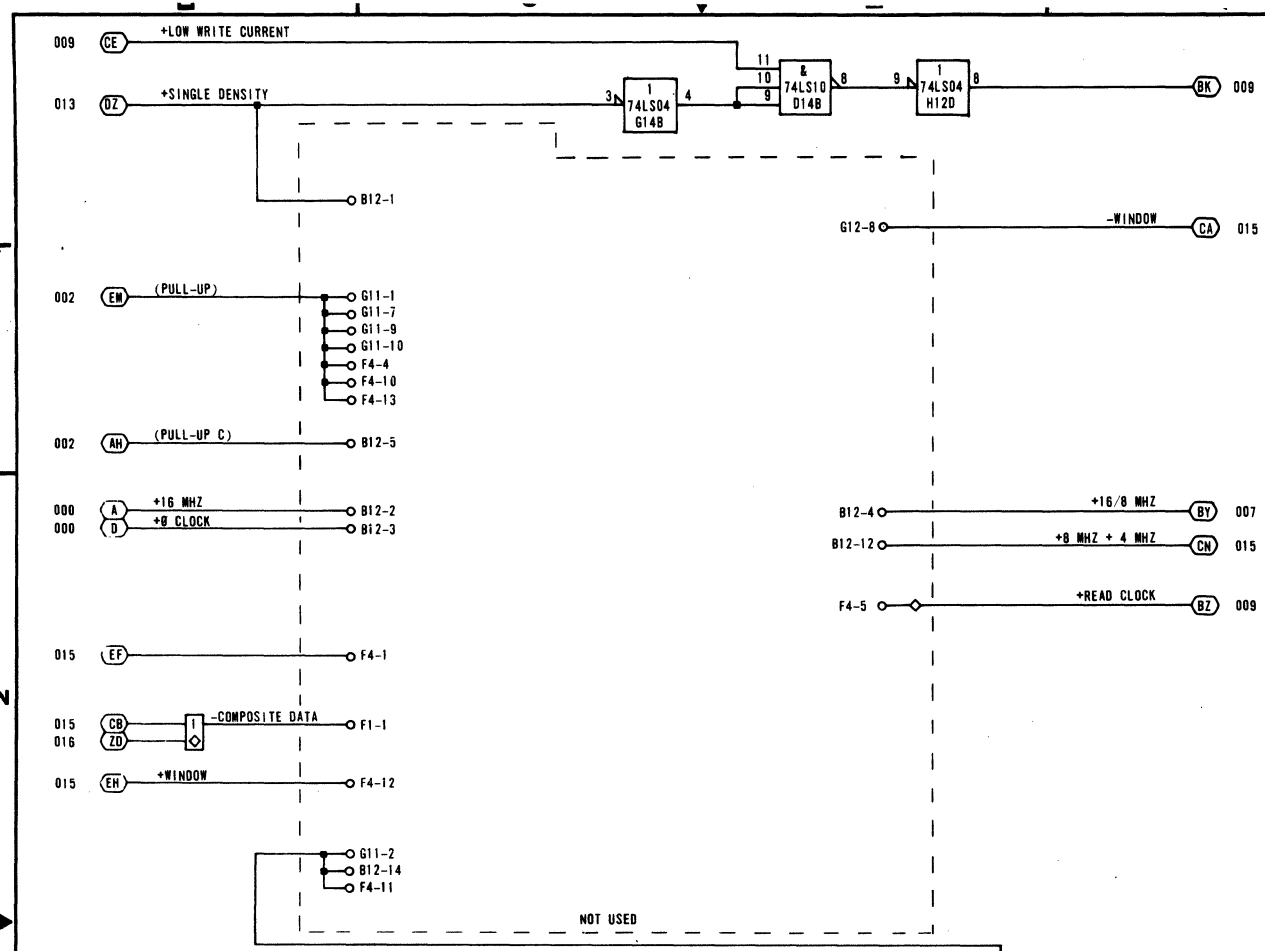



LOC
CROSS REF NO 008

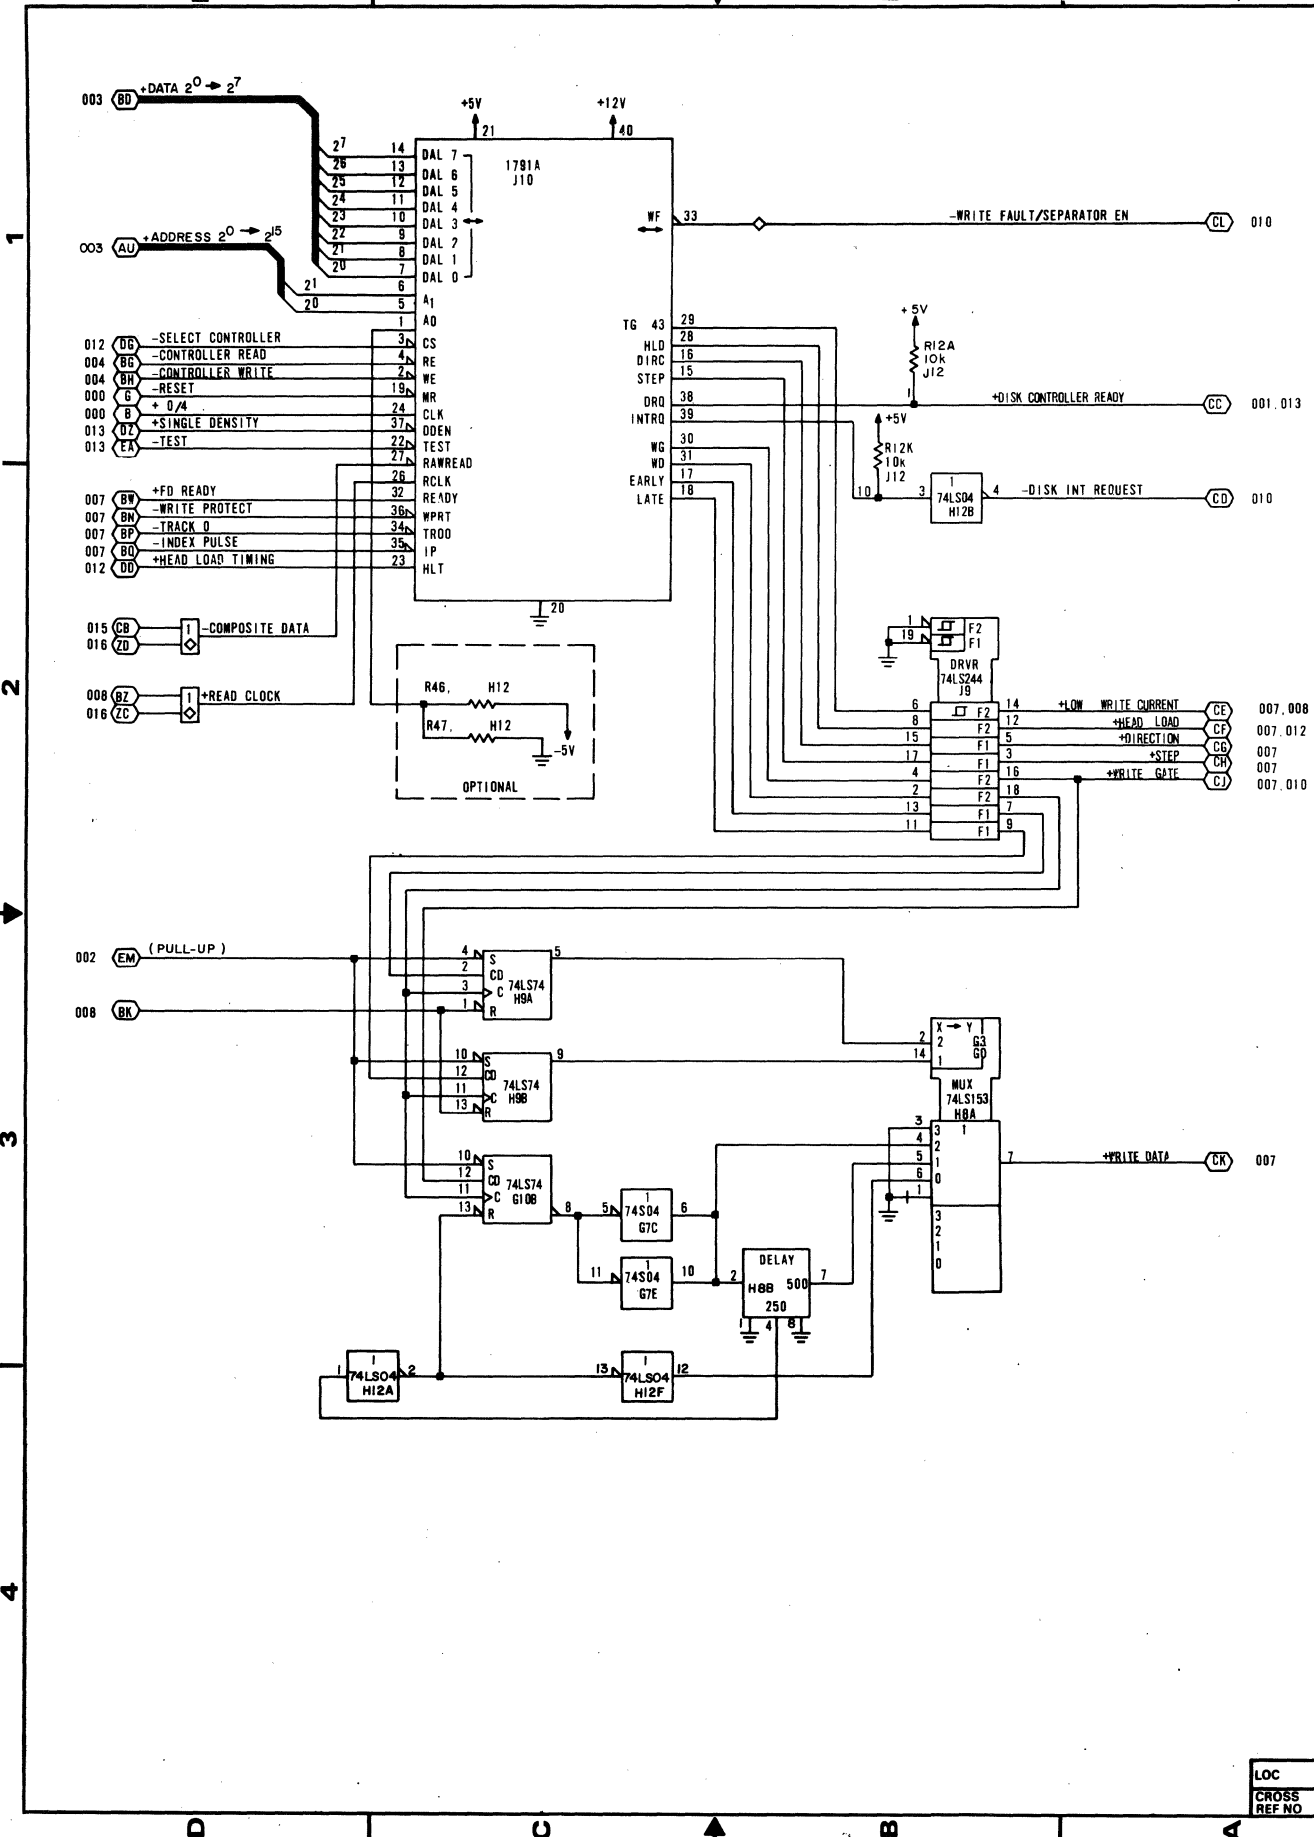

REV	B
DWG NO	90446258
CROSS REF NO	009
SHEET	11
CODE IDENT	C
15920	
SCHEMATIC DIAGRAM, 9BED	
GENERAL DATA CORPORATION	


LOC
CROSS REF NO 009

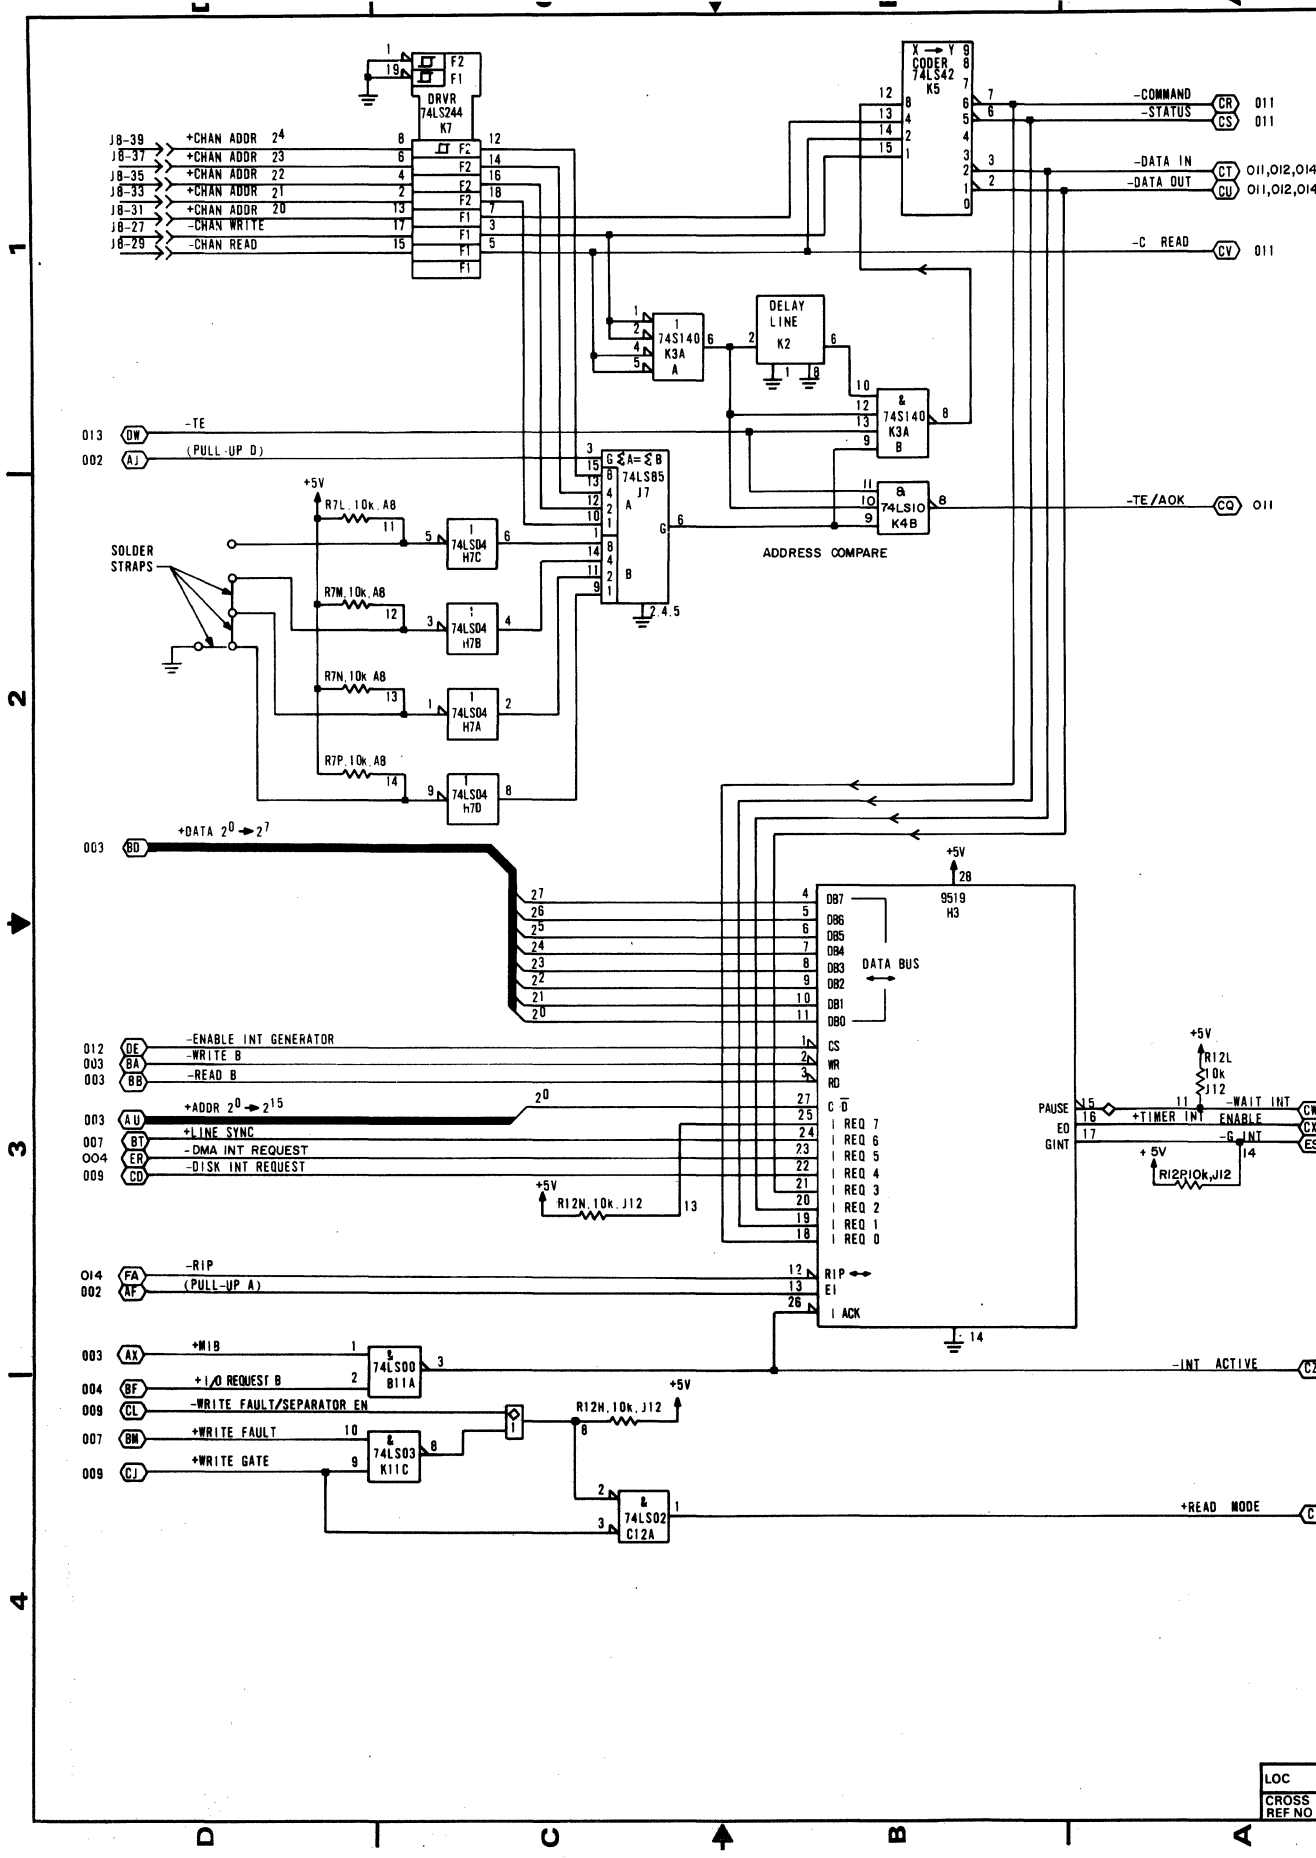

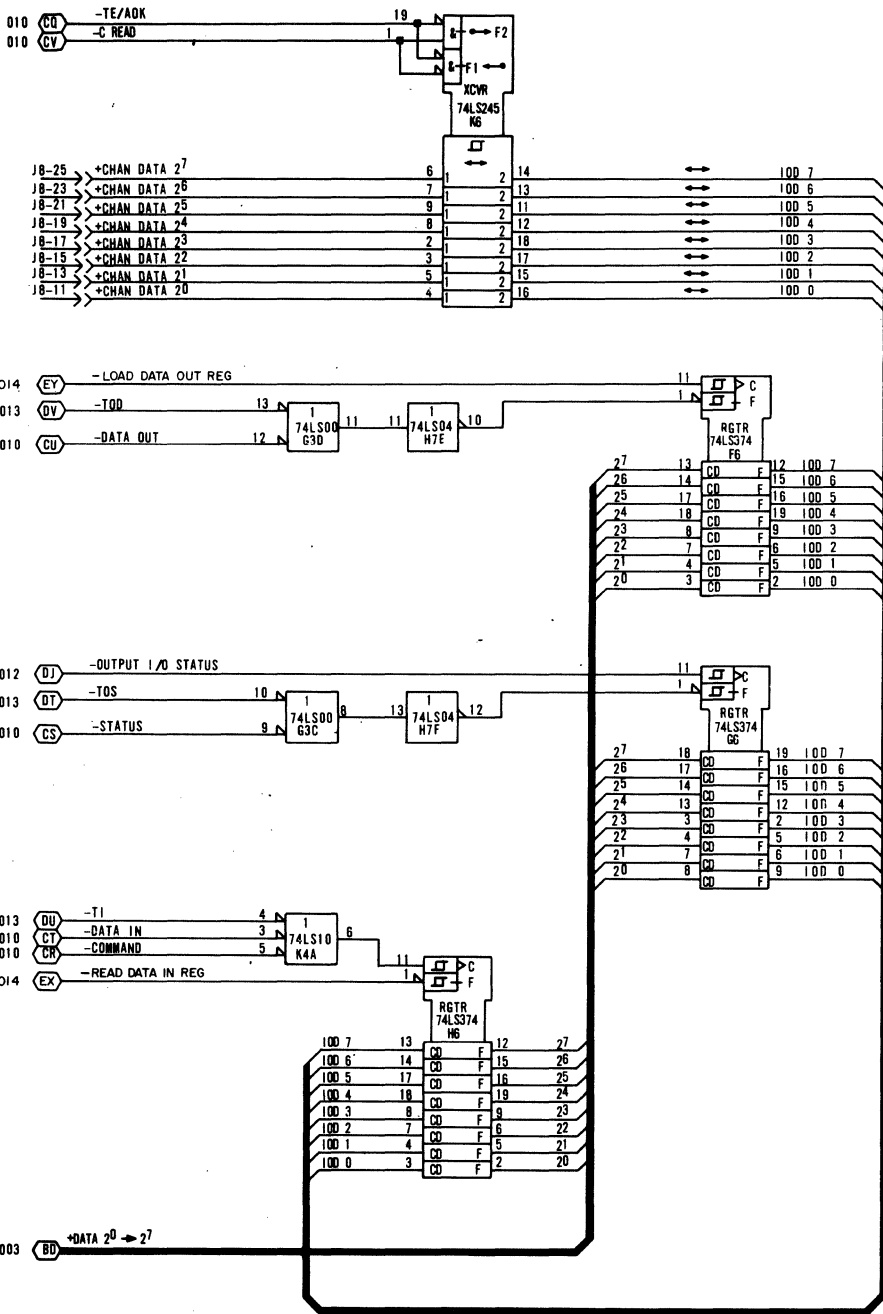


REV	7
DWG NO	90446258
CROSS REF. NO	011
SHEET	13
CODE IDENT	15920
SCHEMATIC DIAGRAM, 9BED	
GE GENERAL ELECTRIC CORPORATION	

LOC
CROSS REF NO 011


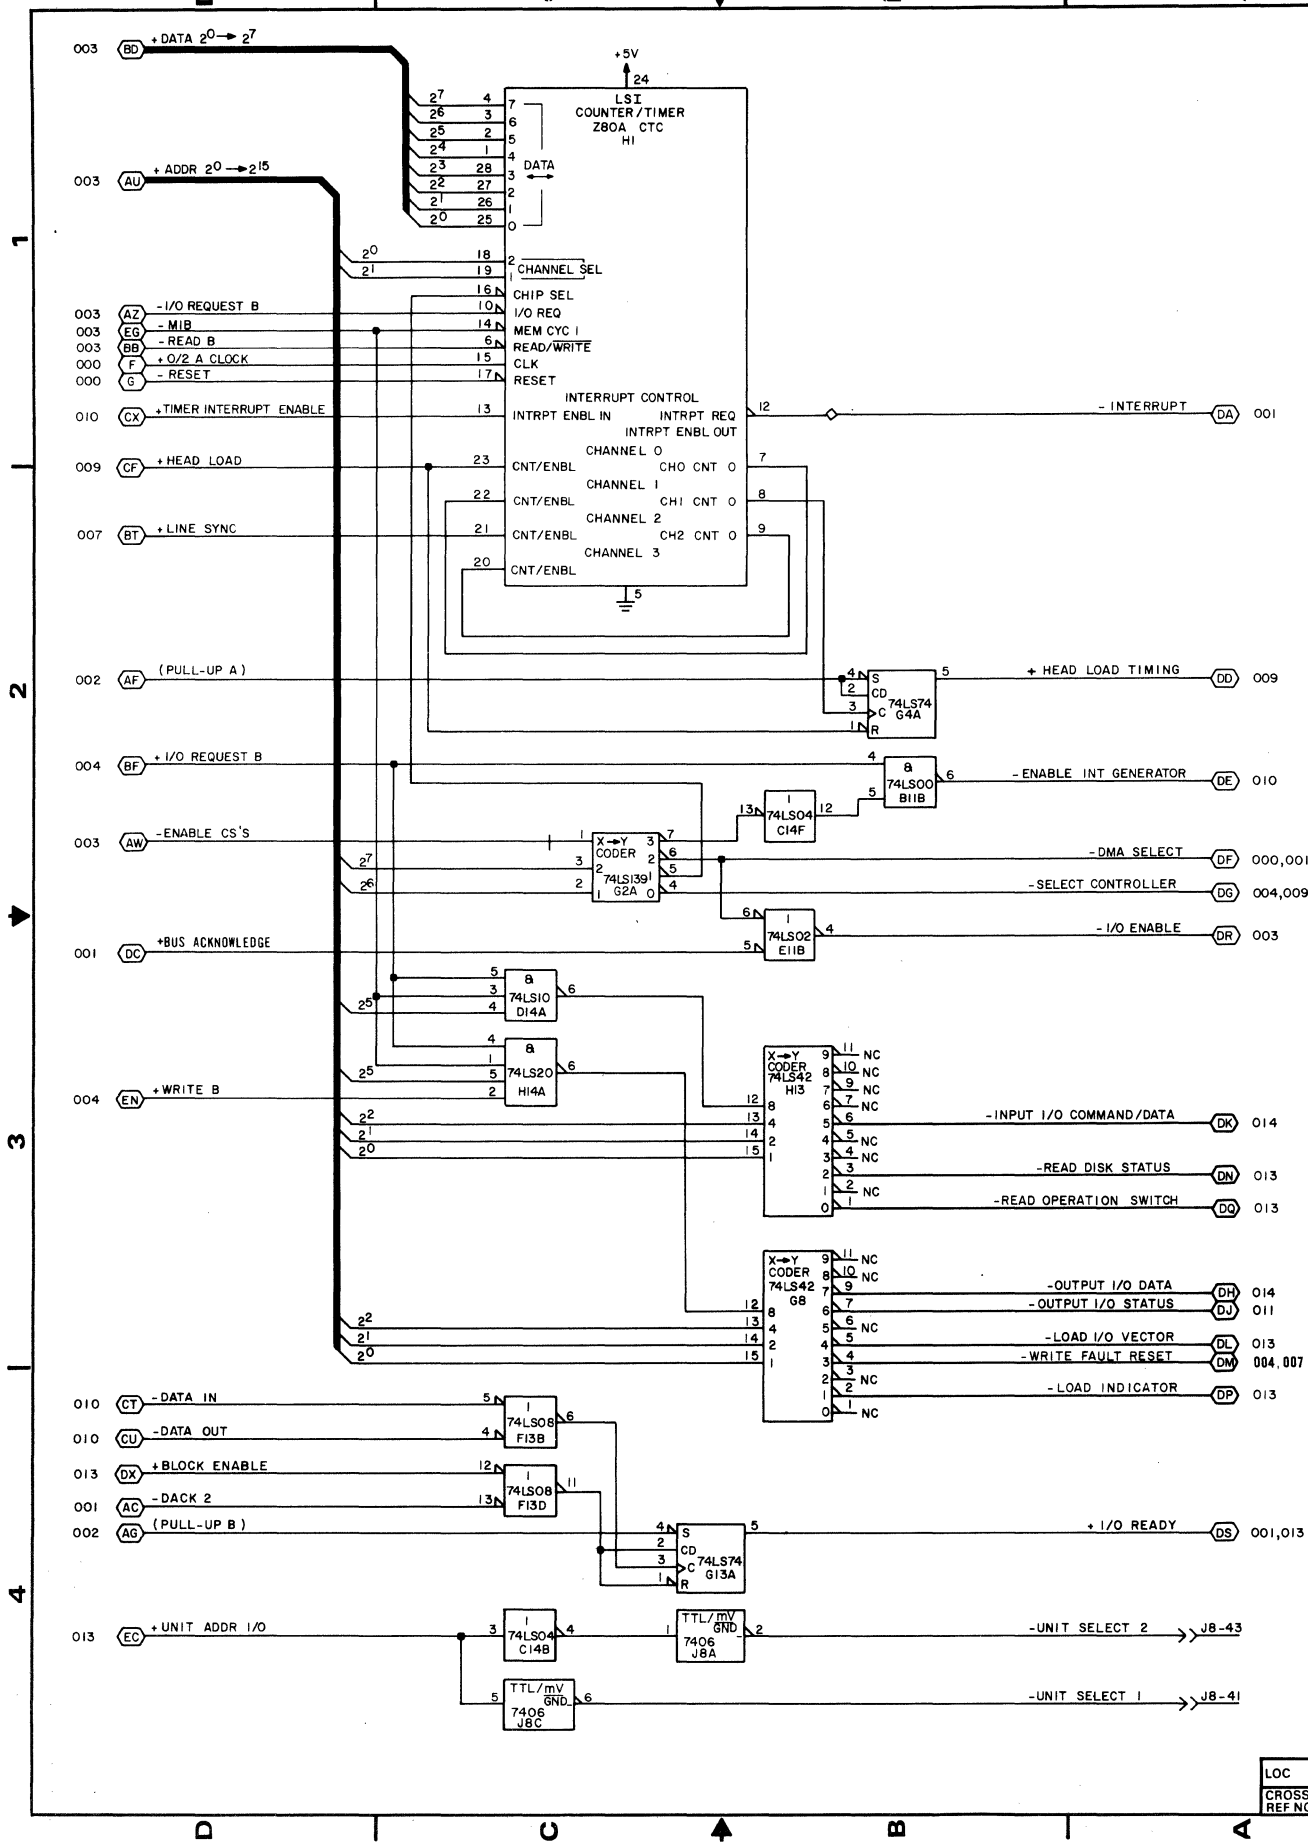


LOC	
CROSS REF NO	012


1
2
3
4

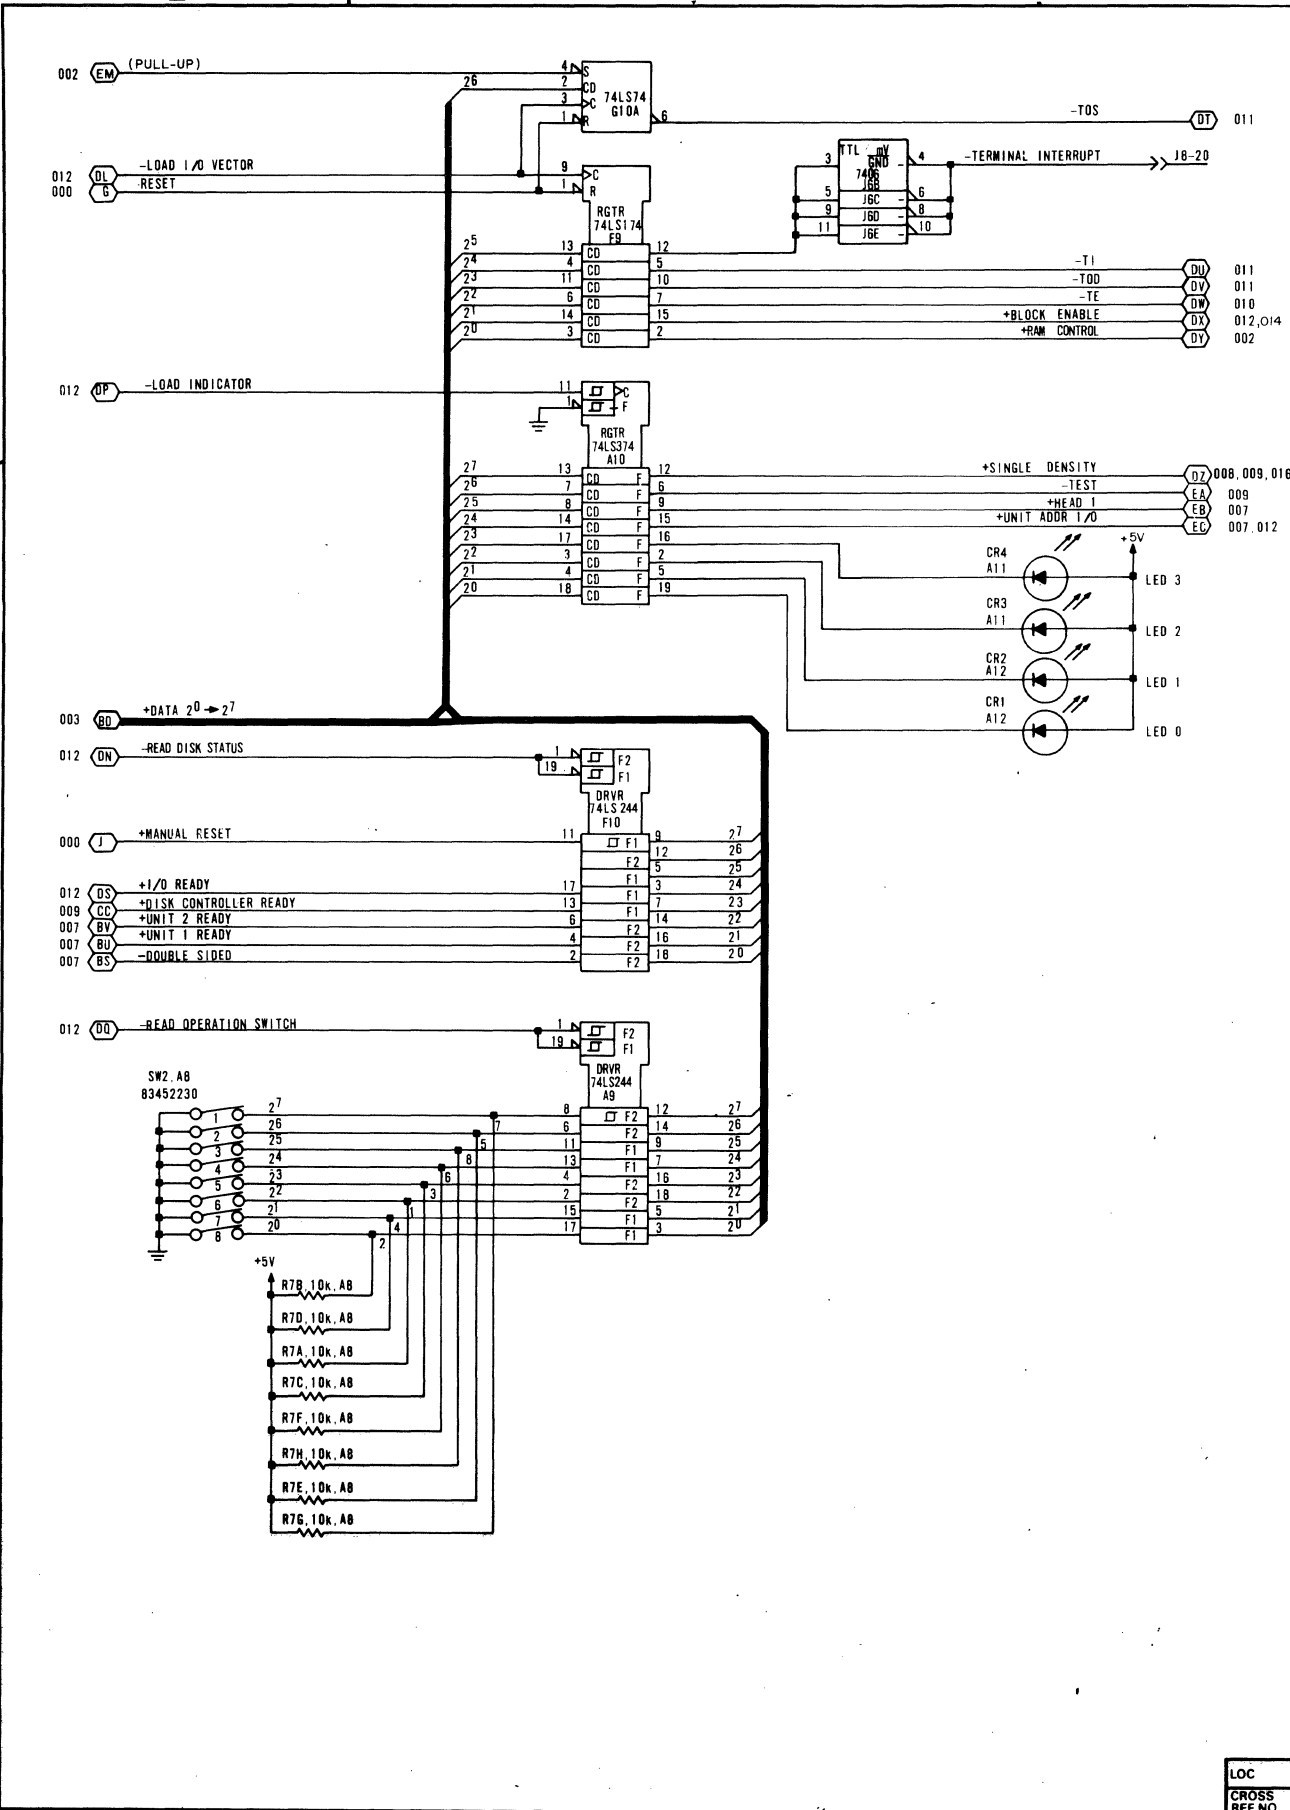

REV	A
DWG NO	90446258
CROSS REF NO	013
SHEET	15
CODE IDENT	15920
SCHEMATIC DIAGRAM, 9BED	
GDD CORPORATION	
LOC	
CROSS REF NO	013

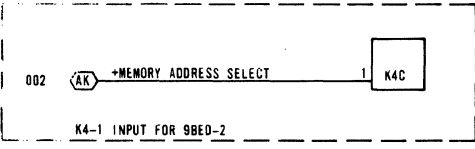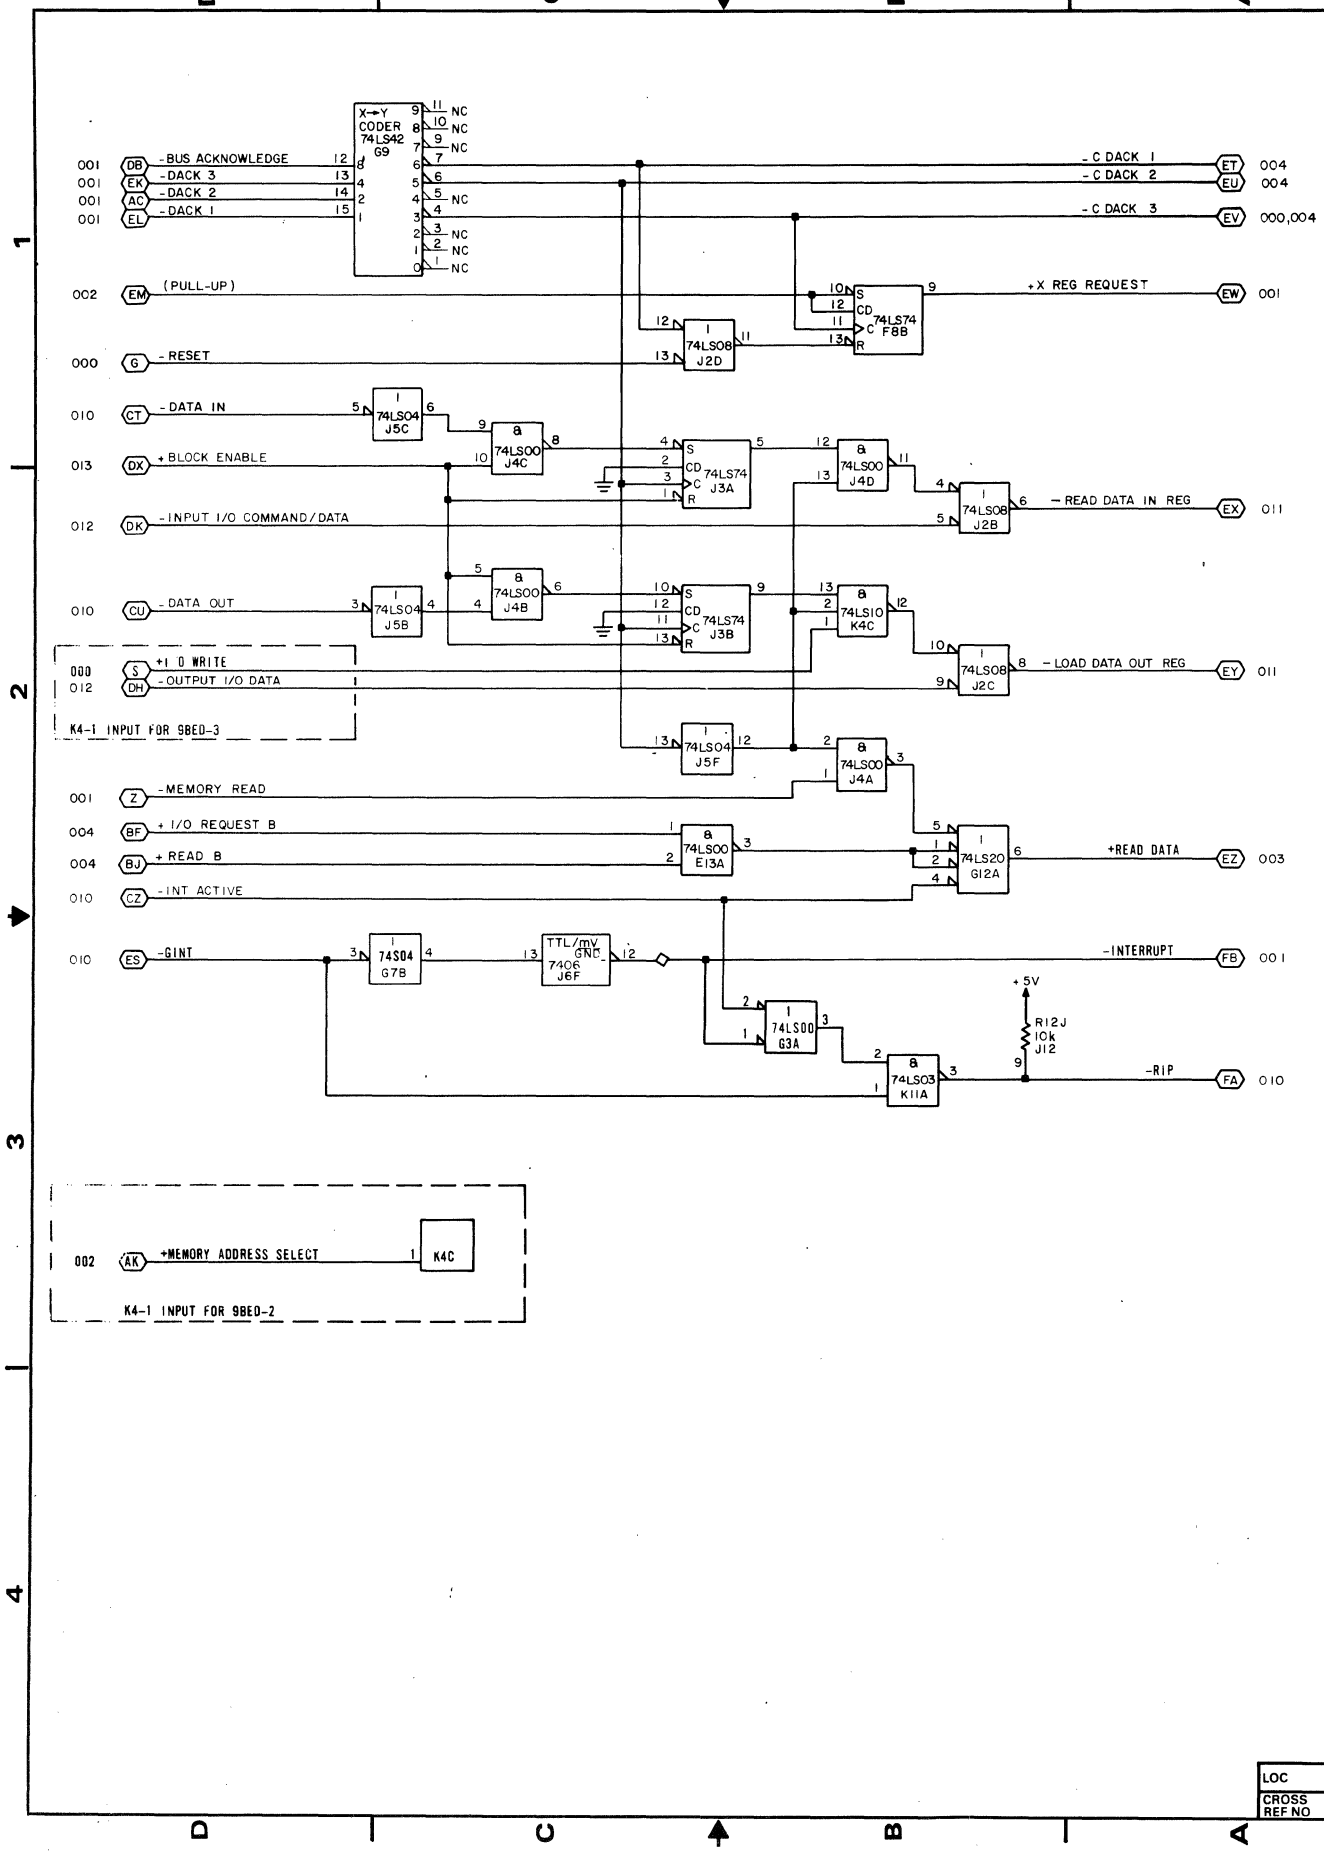


LOC	
CROSS REF NO	014

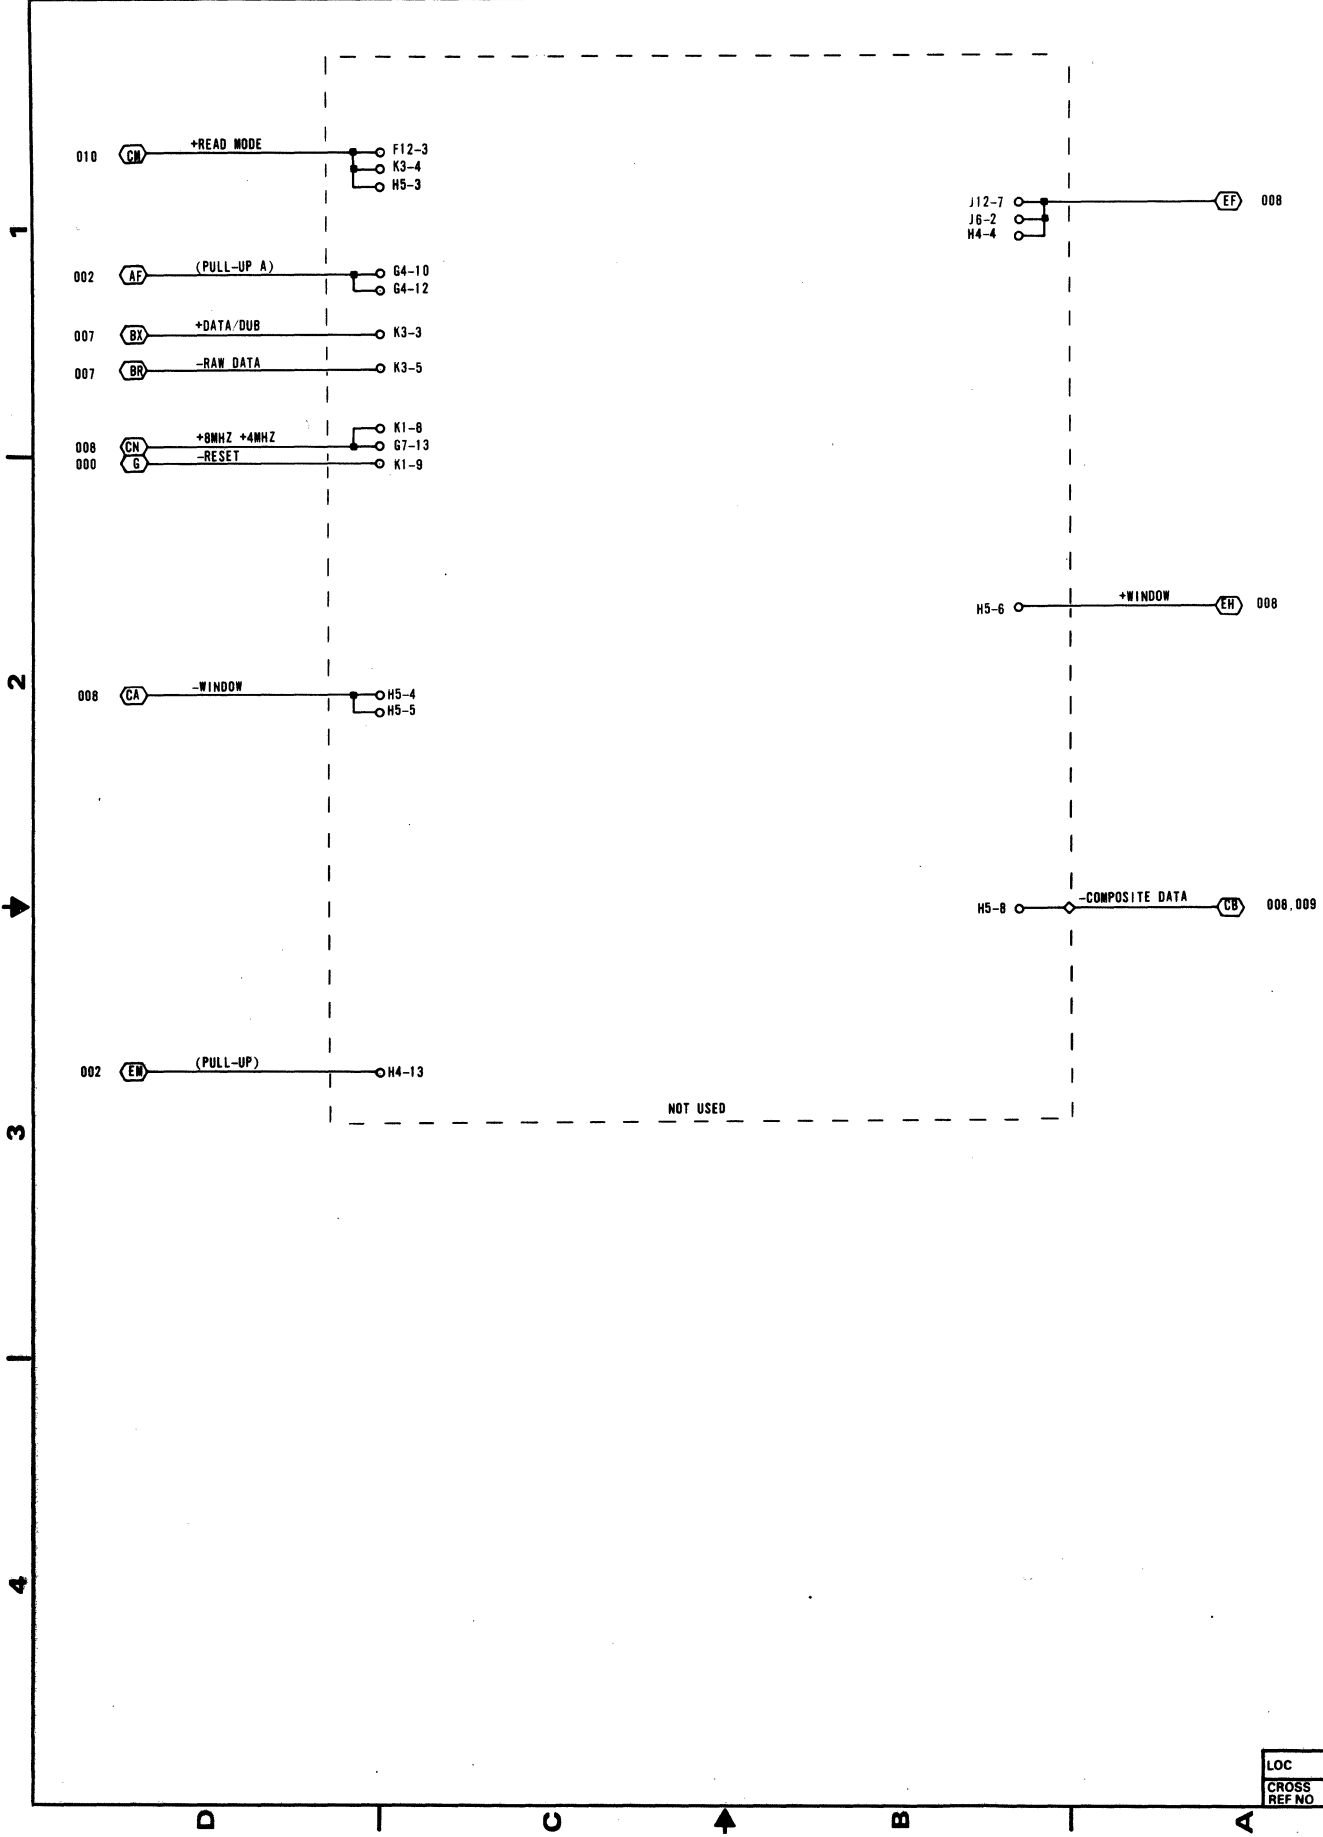

REV	F
DWG NO	90446258
CODE IDENT	C
15920	
CROSS REF. NO	015
SHEET	17
SCHEMATIC DIAGRAM, 9BED	
GD CONTROL DATA CORPORATION	

LOC
CROSS REF NO 015

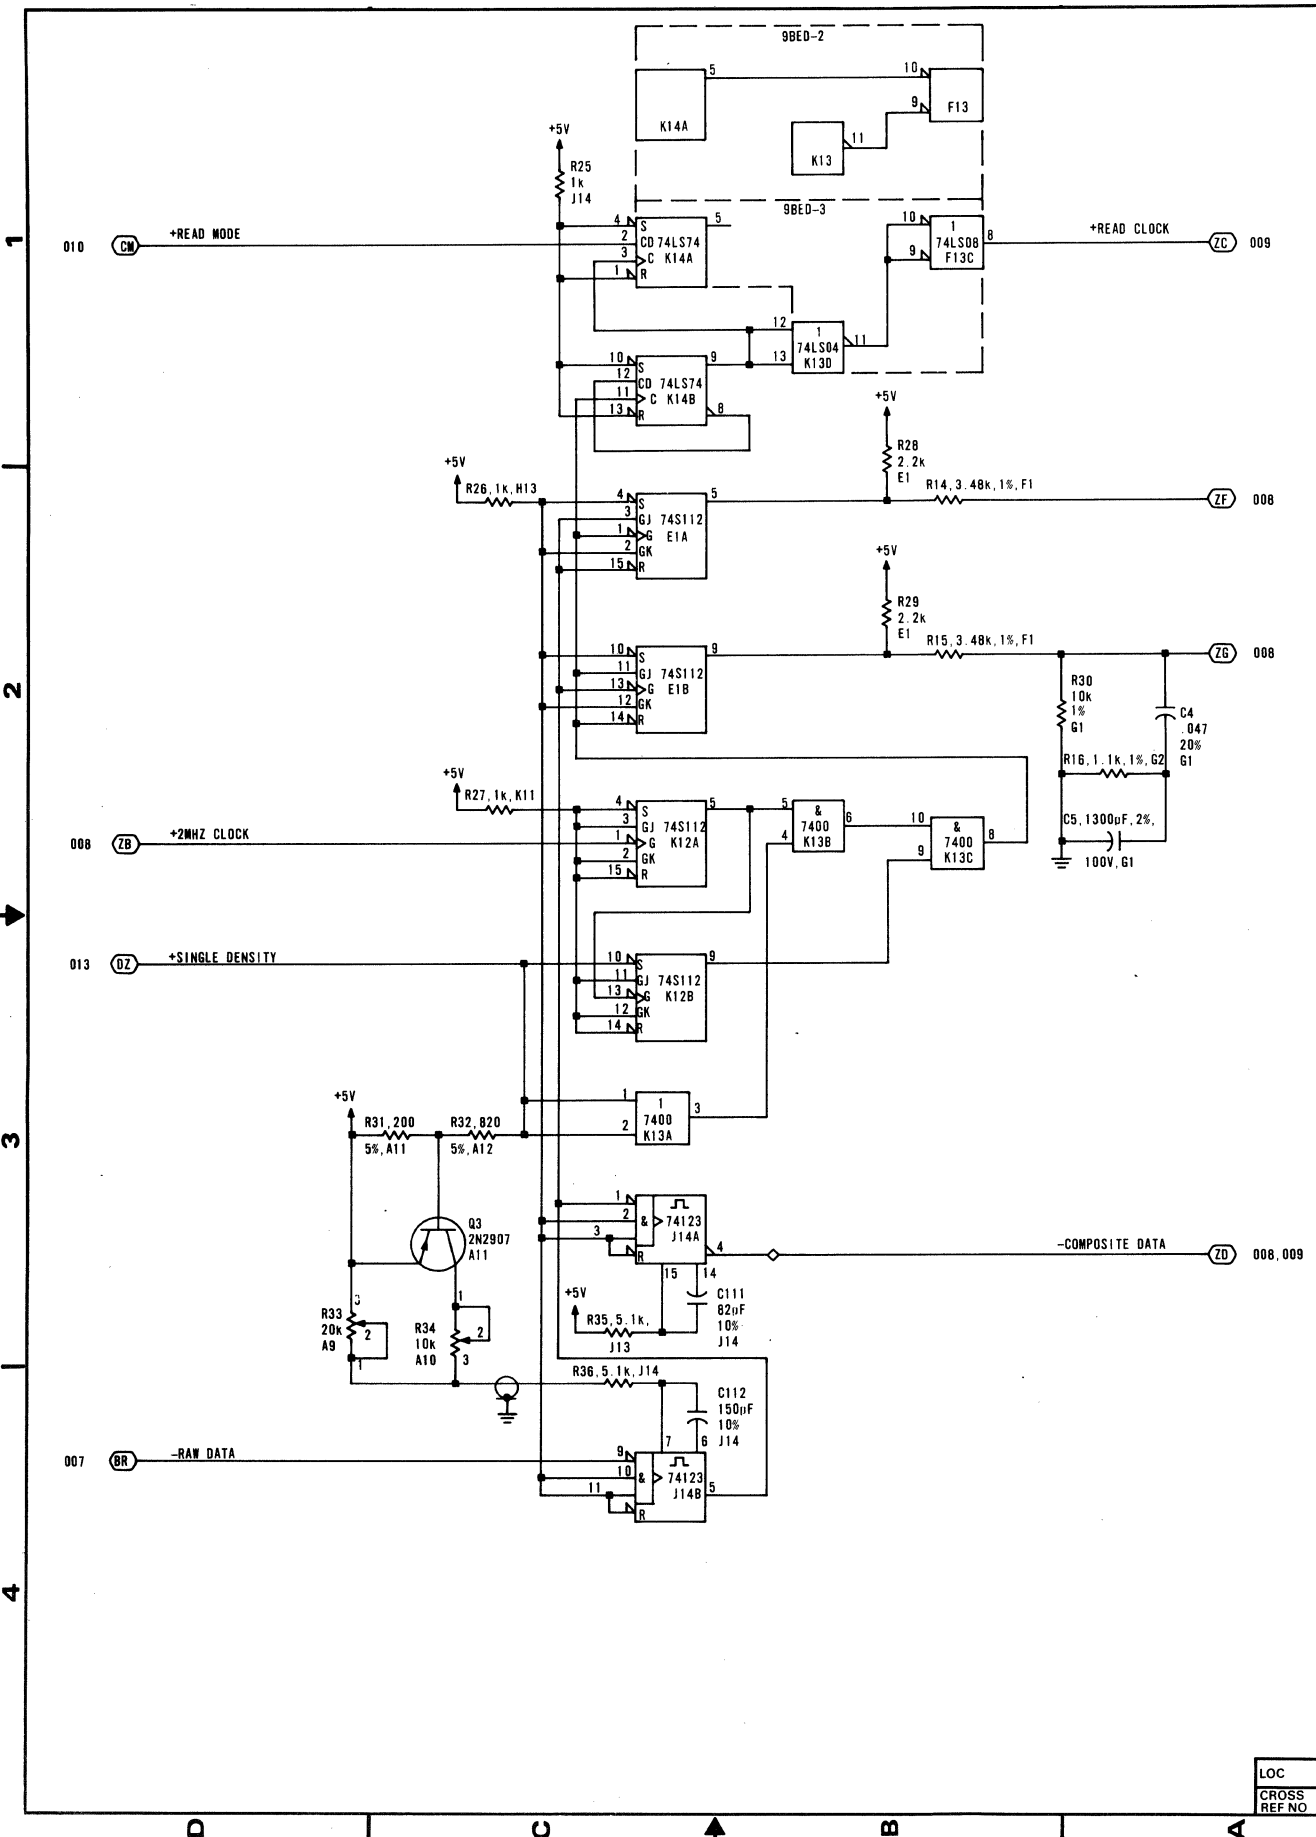


REV	F
DWG NO	90446258
CROSS REF NO	016
SHEET	18
CODE IDENT	C
	15920
SCHEMATIC DIAGRAM, 9BED	
GDS	

LOC	
CROSS REF NO	016

5-18

62949100

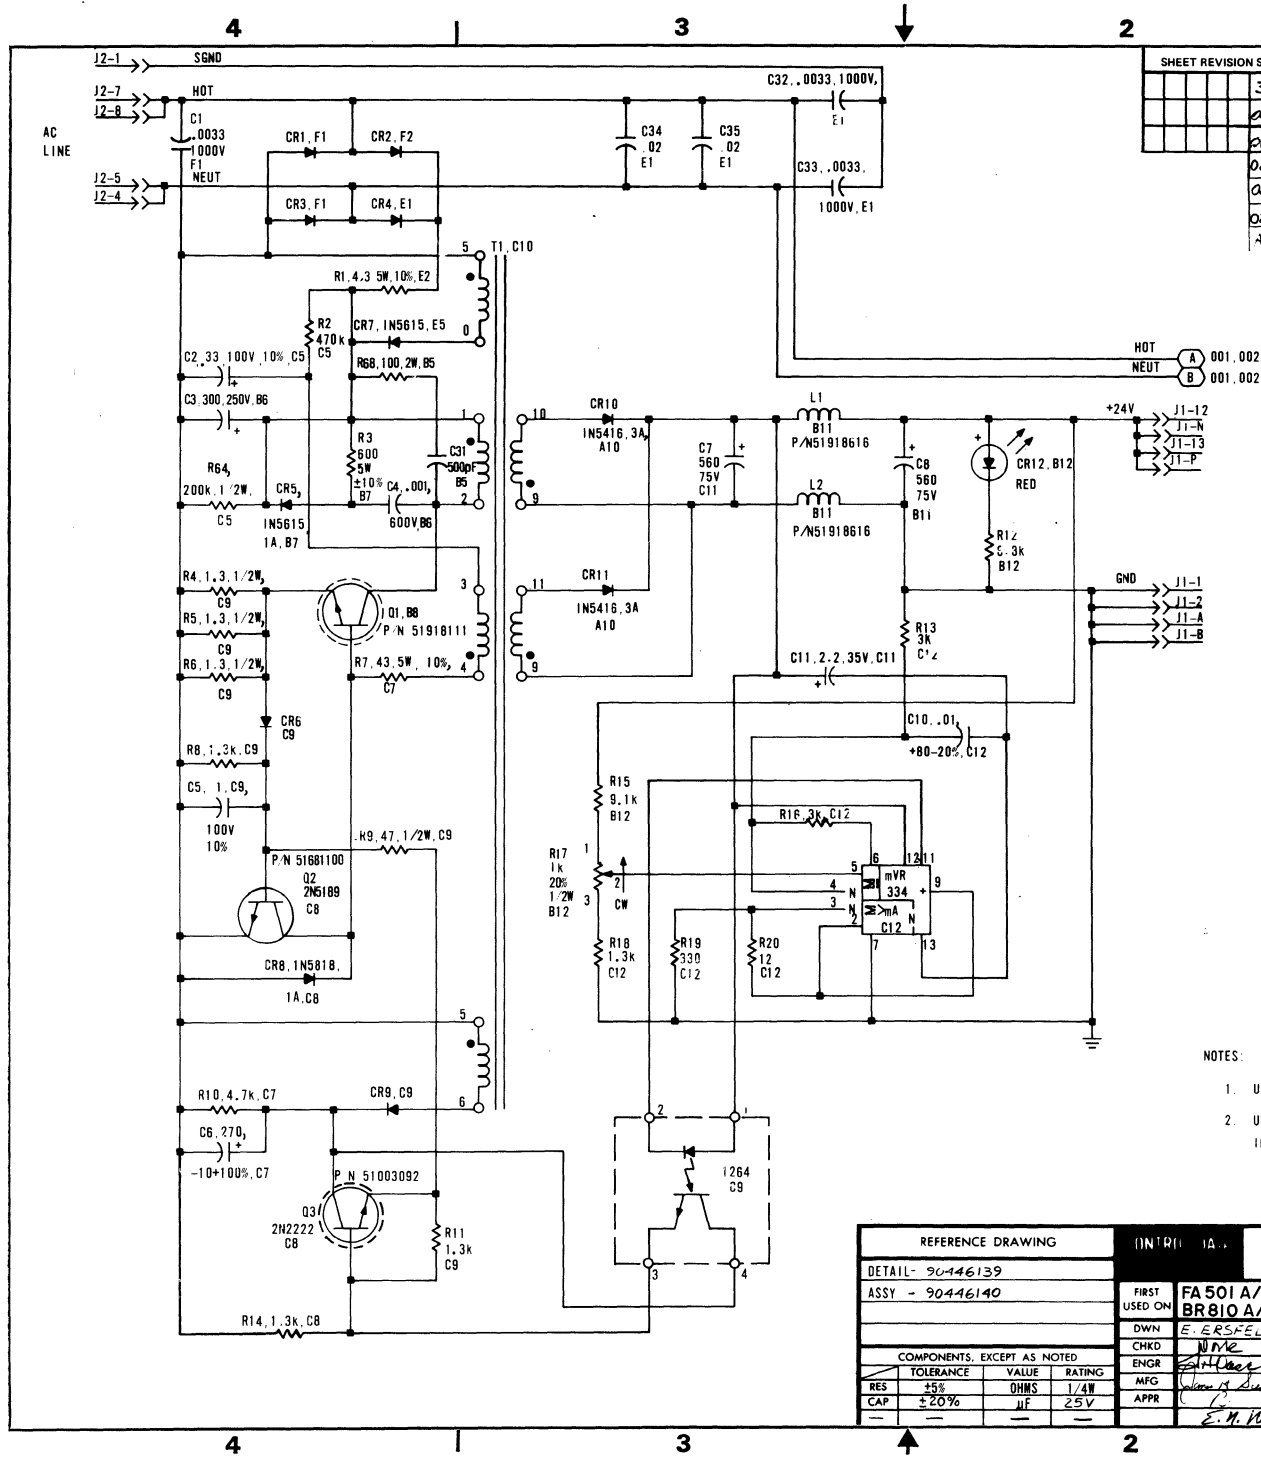

SHEET REVISION STATUS				REVISION RECORD					
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP			
3	2	1	REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP
00	00	00	00	00	RELEASED CLASS 'B'		11/20/79		
01	01	01	01	01	REVISED PER ECO	EE	12/19/80		
02	02	02	02	02	REVISED PER ECO	EE	4/28/80		
02	02	03	03	03	REVISED PER ECO	EE	5/28/80		
02	02	04	04	04	CHANGE C34-C35 TO .02	DS	6/4/80		

- NOTES:
- UNLESS OTHERWISE NOTED ALL LEADS TO BE P N 19171201.
 - UNLESS OTHERWISE NOTED ALL DIODES TO BE P N 95637304 IN4004 1V.1A.

REFERENCE DRAWING		IN 19171A		TITLE	
DETAIL - 90446139		FIRST USED ON		SCHEMATIC DIAGRAM, 9BKD	
ASSY - 90446140		FA 501 A/B		(PFDS POWER SUPPLY)	
		BR 810 A/B			
COMPONENTS, EXCEPT AS NOTED		DWN E. ERSFELD 10-12-79			
		CHKD NME 10-19-79			
		ENGR [Signature] 10/25/79			
		MFG [Signature] 10/27/79			
		APPR [Signature] 6-25-80			
RES ±5% TOLERANCE		VALUE		CODE IDENT 15920	
CAP ±20% TOLERANCE		OHMS		DRAWING NO 90446138	
		RATING		SCALE	
		1/4W		CROSS REF NO 000	
		25V		SHEET 1 OF 3	

D

C

↑

A

90446138

REV 1
 DWG NO 90446138
 CODE IDENT 19920
 CROSS REF NO 001 SHEET 2

SCHEMATIC DIAGRAM
 9BKD

002
 002

002
 002

002
 002

002
 002

002
 002

002
 002


002
 002

002
 002


002
 002

002
 002

002
 002

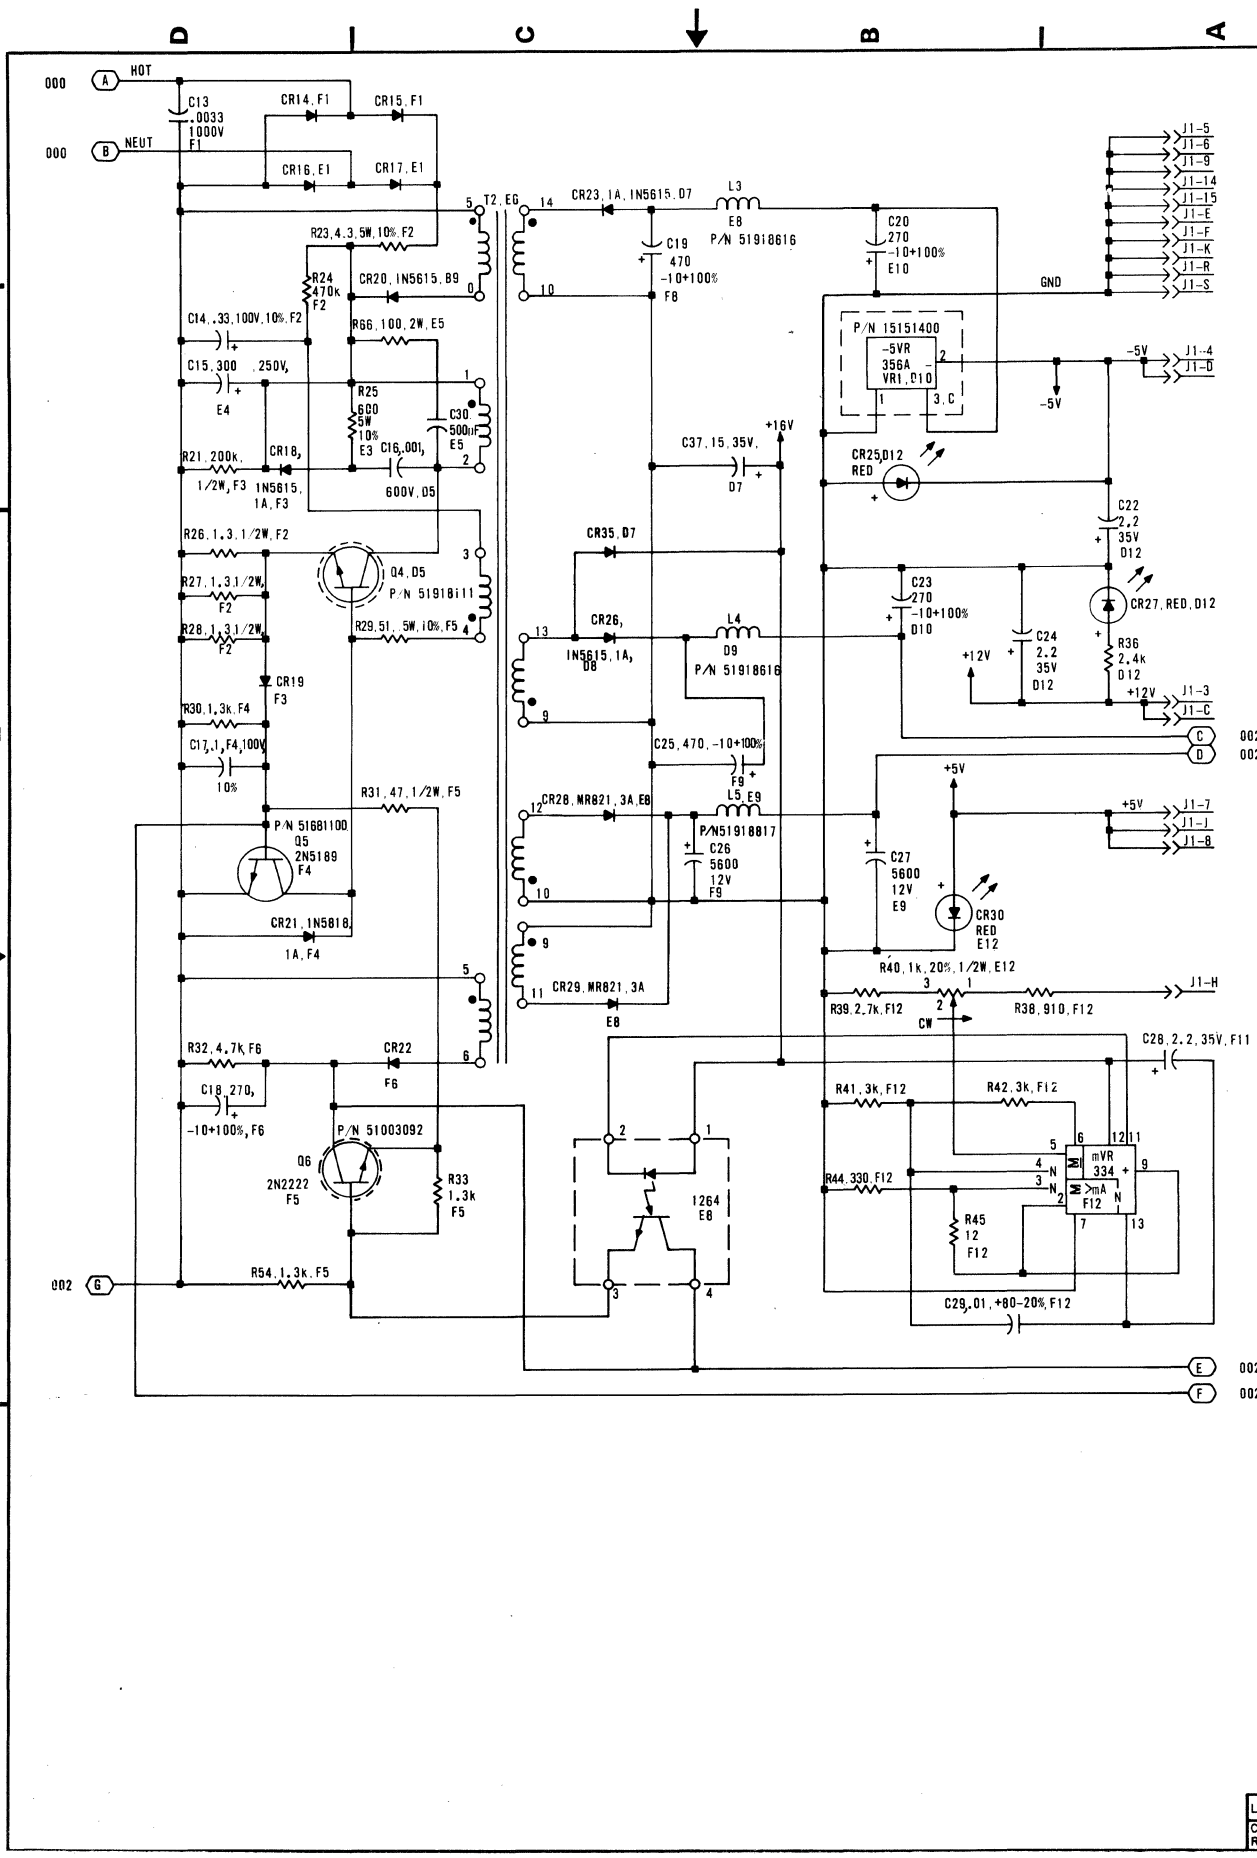

LOC
 CROSS REF NO 001

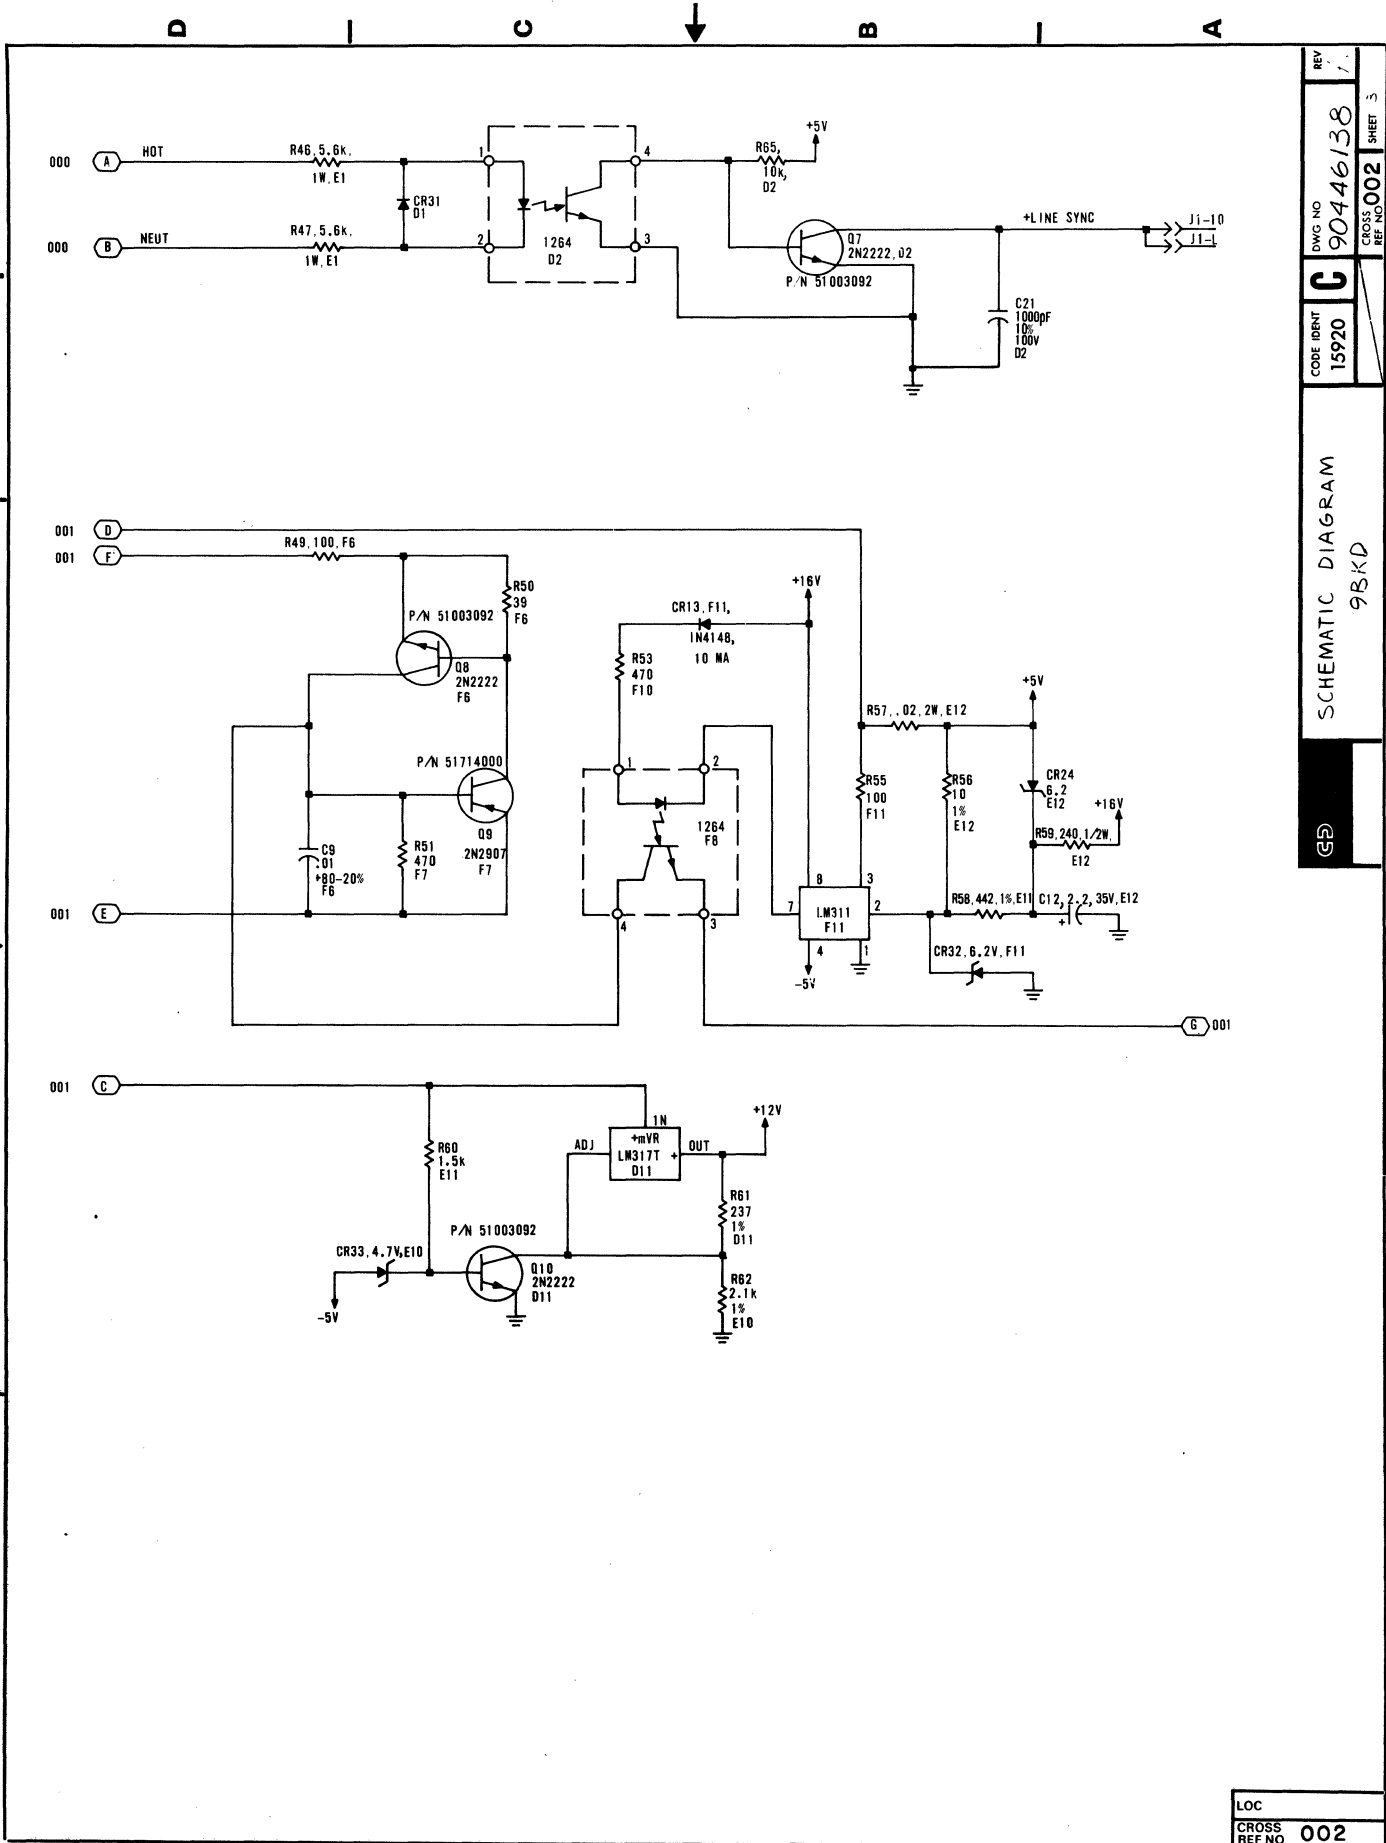


REV	1.
DWG NO	90446138
CODE IDENT	C
CROSS REF NO	002
SHEET	3
SCHEMATIC DIAGRAM	
98KD	

LOC	
CROSS REF NO	002

62949100

5-21

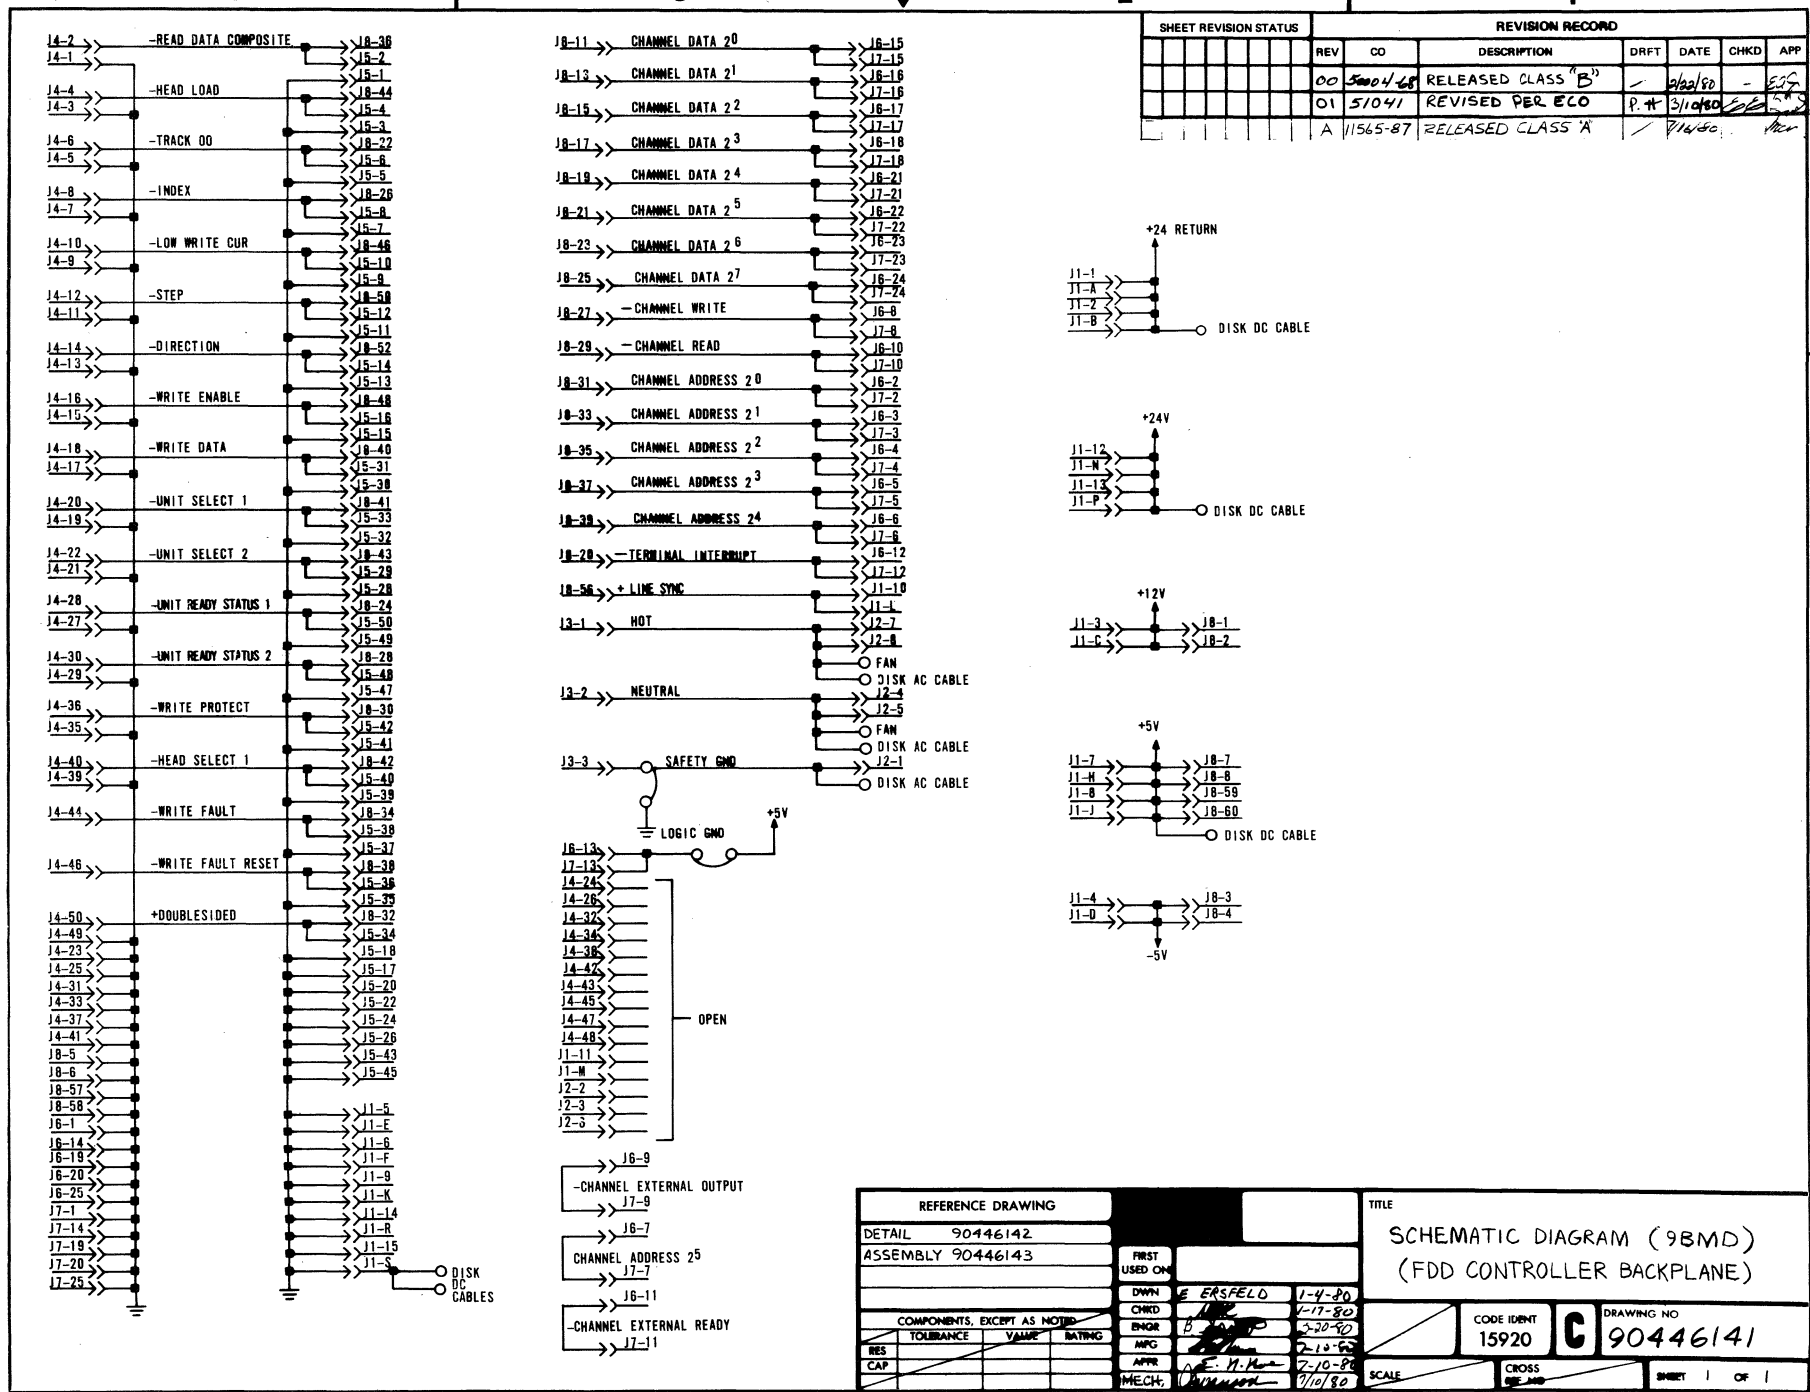

SHEET REVISION STATUS				REVISION RECORD			
REV	CD	DESCRIPTION	DRFT	DATE	CHKD	APP	
00	5004/68	RELEASED CLASS 'B'		9/22/80			
01	5104/81	REVISED PER ECO	P.H.	3/10/80			
A	11565-87	RELEASED CLASS 'A'		7/16/80			

REFERENCE DRAWING				TITLE	
DETAIL	90446142			SCHEMATIC DIAGRAM (9BMD)	
ASSEMBLY	90446143			(FDD CONTROLLER BACKPLANE)	
COMPONENTS, EXCEPT AS NOTED		FIRST USED ON			
TOLERANCE	VALUE	DWN	E. ERSFELD	1-4-80	
RES		CHKD	B. J. J.	1-17-80	
CAP		ENGR	J. J. J.	2-20-80	
		MFG	E. H. M.	7-10-80	
		APPR			
		MECH			
		SCALE	CROSS	DRAWING NO	
				15920	90446141
				SHEET 1 OF 1	

D
C
B
A


1

2


3

4

REVISION RECORD			
REV	CD	DESCRIPTION	DATE
A	12754-78	RELEASED CLASS A	4-3-80

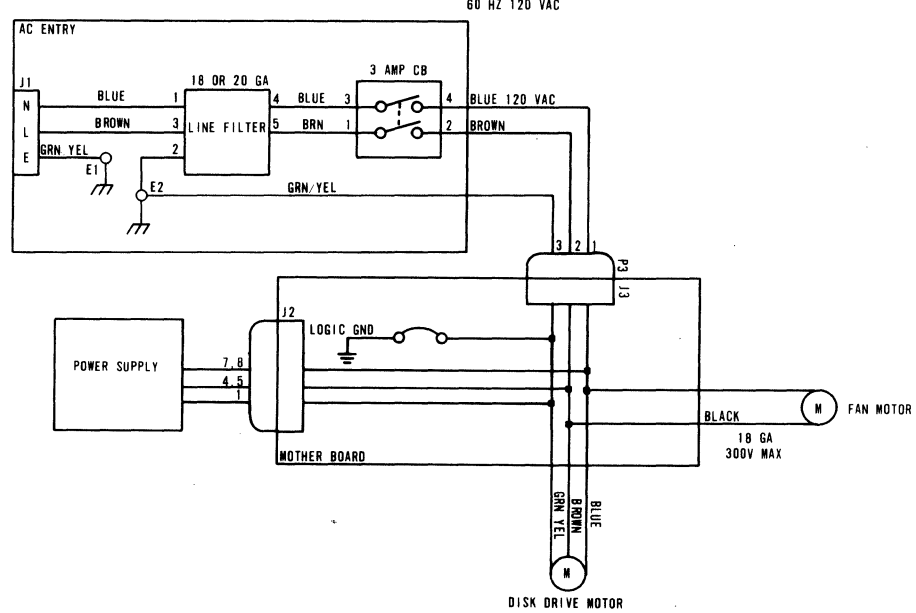

NOTE:
1. ALL WIRES ARE 18 GA. 600V UNLESS OTHERWISE MARKED

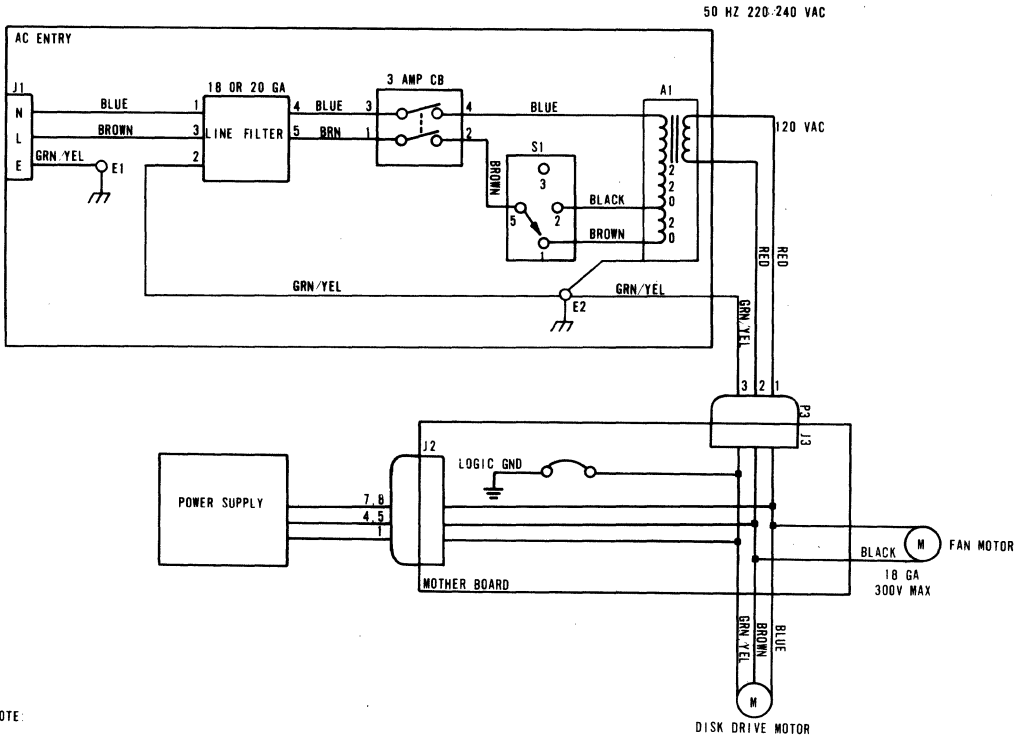

TITLE		50/60 HZ A.C. POWER WIRING			
DRAWING NO		62201057			
CODE IDENT		C			
15920		SHEET 1 OF 1			
SCALE		CROSS REF NO			
REFERENCE DRAWING	FA501-A/B	9-2-80	9-3-80	9-3-80	9-3-80
FIRST USED ON	M. DIETZ	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN
DESIGN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN
ENGR	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN
CHKD	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN
APPR	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN	M. J. ALLEN
COMPONENTS, EXCEPT AS NOTED	VALUE	RATING			
RES					
CAP					

1


2

3

4

62949100 K


5-23

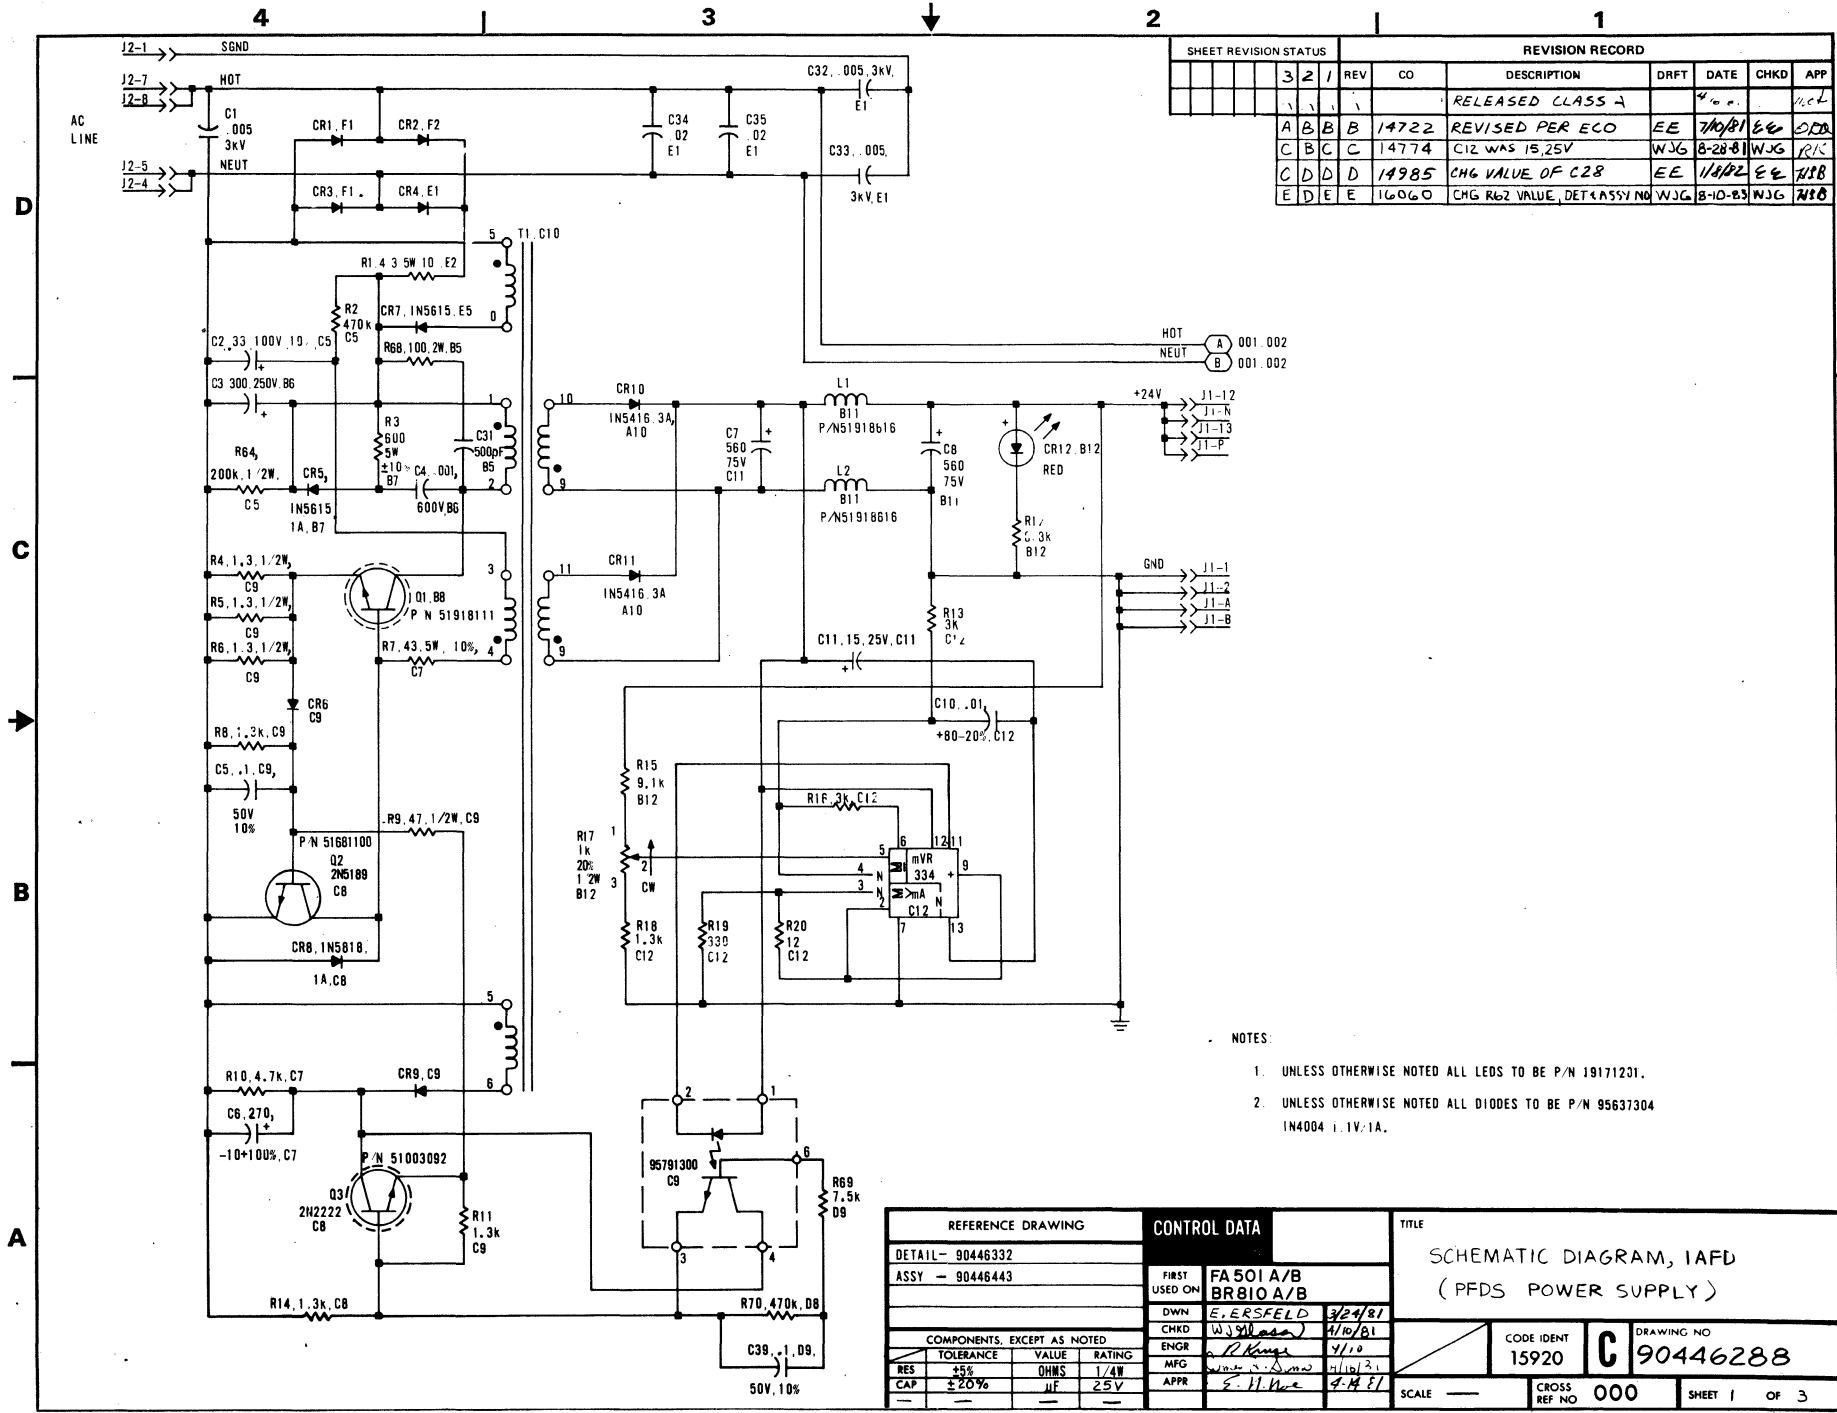

SHEET REVISION STATUS				REVISION RECORD				
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP		
3	2	1						
A	B	B	1972	REVISD PER ECO	EE	7/10/81	EE	
C	B	C	1977	C12 WAS 15,25V	WJG	8-28-81	WJG	
C	D	D	1985	CHG VALUE OF C28	EE	11/10/82	EE	
E	D	E	1986	CHG R62 VALUE, DET ASSY NO	WJG	8-10-83	WJG	

- NOTES:
- UNLESS OTHERWISE NOTED ALL LEADS TO BE P/N 19171231.
 - UNLESS OTHERWISE NOTED ALL DIODES TO BE P/N 95637304 IN4004 1V:1A.

REFERENCE DRAWING		CONTROL DATA		TITLE	
DETAIL - 90446332	ASSY - 90446443	FIRST USED ON	FA 501 A/B BR810 A/B	SCHEMATIC DIAGRAM, 1AFD (PFDS POWER SUPPLY)	
COMPONENTS, EXCEPT AS NOTED		DWN	E. ERSFELD	3/24/81	
TOLERANCE		CHKD	W. J. G.	4/10/81	
RES ±5%	VALUE OHMS	ENGR	R. King	4/10	
CAP ±20%	RATING 1/4W	MFG	W. J. G.	4/10/81	
	25V	APPR	E. H. W.	4/8/81	
CODE IDENT		DRAWING NO		SCALE	
15920		C 90446288		CROSS REF NO 000	
SHEET 1		OF 3			

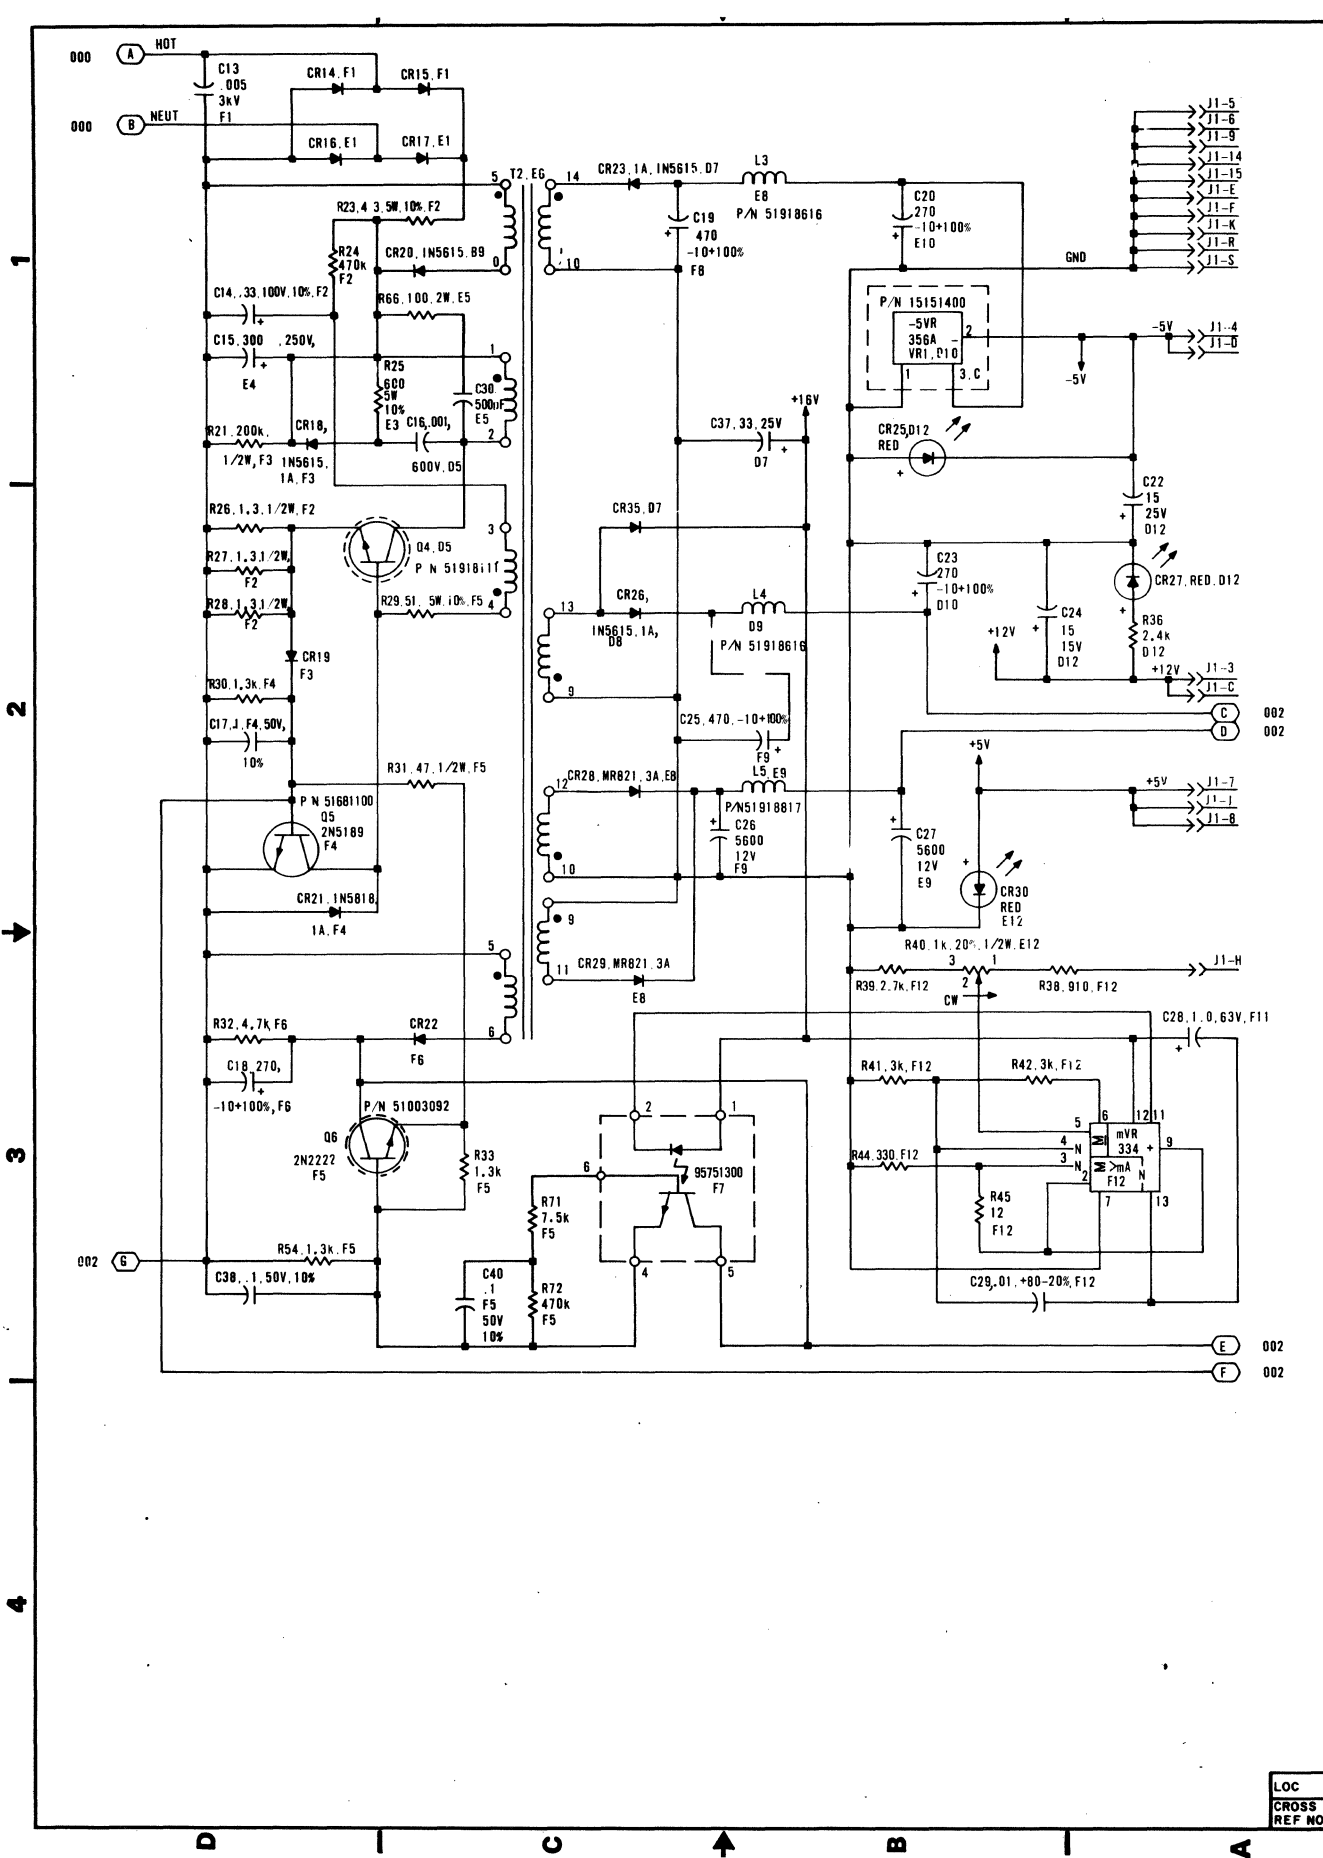


REV	D
DWG NO	90446288
CODE IDENT	C
15920	
CROSS REF NO	001
SHEET	2

CONTROL DATA

SCHEMATIC DIAGRAM, IA/FD

LOC

CROSS REF NO 001

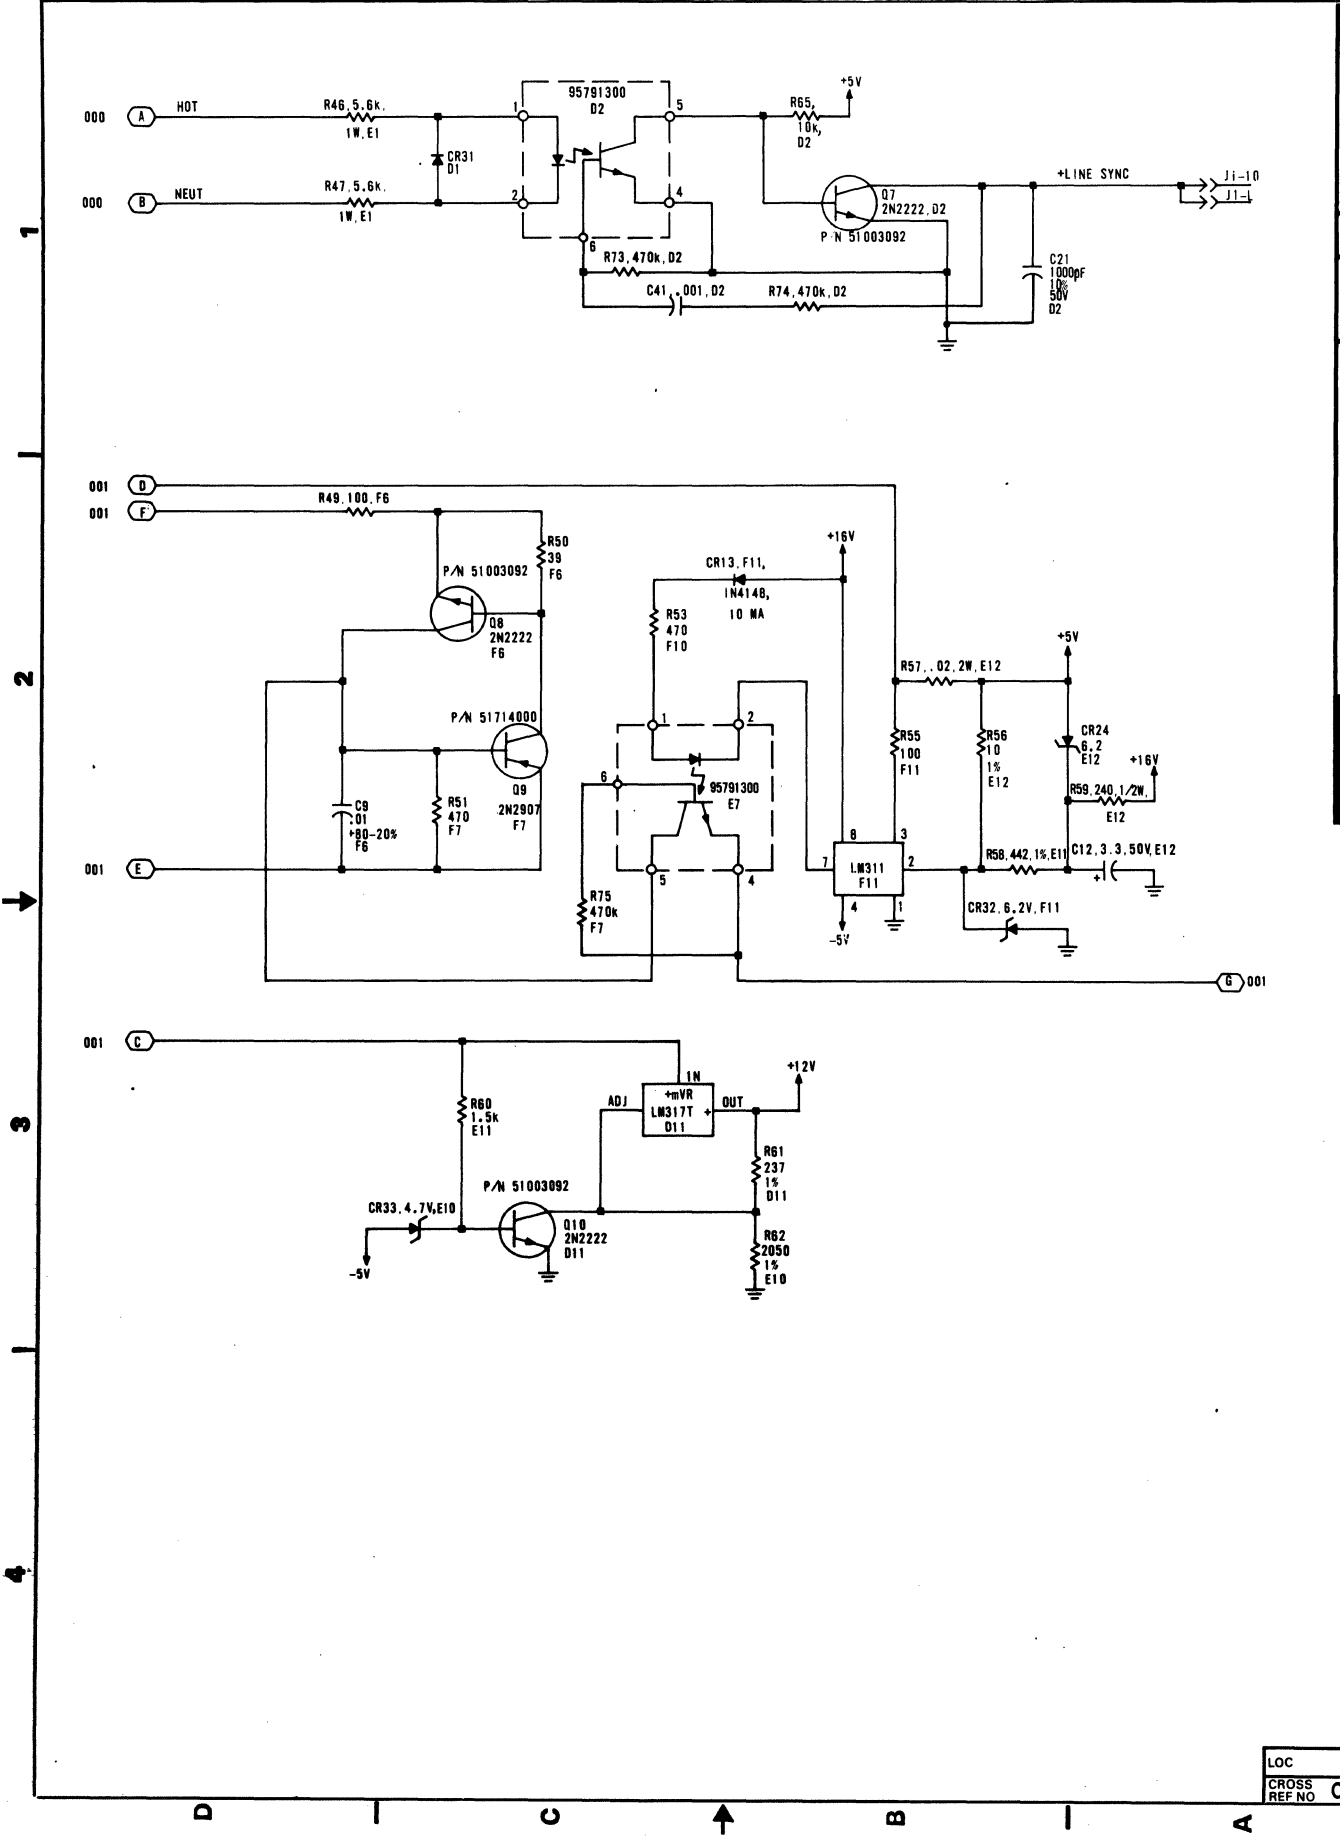

LOC
 CROSS REF. NO 002

This section provides information necessary to perform on-site maintenance on the flexible disk subsystem. The material presented assumes familiarity with the PLATO system and basic maintenance techniques including use of common CE tools and test equipment. The maintenance information covers checks, adjustments, removal, and replacement of the field-replaceable components as directed by the associated structured analysis method (SAM) listings for the subsystem. Information is organized under the following major headings:

- General Maintenance Information
- Diagnostic and Corrective Maintenance

GENERAL MAINTENANCE INFORMATION

The following paragraphs provide information that the customer engineer should be familiar with before performing maintenance on the terminal. Topics discussed are:

- Suggested Emergency Maintenance Procedure
- Safety Precautions
- Maintenance Tools and Materials
- MOS Circuit-Handling Precautions
- Maintenance Aids
- Location of Major Assemblies

SUGGESTED EMERGENCY MAINTENANCE PROCEDURE

The following procedure provides suggested steps for the customer engineer (CE) to follow when responding to a customer request for maintenance on the subsystem.

Before Leaving For Customer Site

Before leaving for the customer site, the CE should call the customer and talk to the person operating the subsystem at the time the malfunction occurred, then:

1. Determine the following:
 - a. Type of symptoms subsystem exhibited to indicate that a malfunction occurred.
 - b. Whether subsystem is operating and what symptoms, if any, are present when an attempt is made to operate.
2. Decide course of action to take, for example:
 - a. Go to customer site and begin troubleshooting.
 - b. Deduce that subsystem itself is probably not at fault and most likely cause of problem is either terminal communication lines or a power reduction or loss. In either case, CE can notify responsible party (common carrier or customer) of problem.
 - c. Decide that an error in operating procedure, rather than equipment failure, is probably cause of malfunction, and notify customer of correct operating procedure.
3. If a site maintenance trip is required, CE should try to determine a probable cause for failure and gather necessary tools, manuals, and spare parts that may be needed.

Upon Arriving At Customer Site

Upon arriving at the customer site, the CE should locate the appropriate supervisory personnel and again talk to the subsystem operator concerning the malfunction, then:

1. Visually inspect subsystem for correct input/output and power cable connections.
2. Verify that a malfunction does exist, and then begin to troubleshoot subsystem.

3. After source of malfunction is corrected, CE should:
 - a. Run diagnostic self-test routines and appropriate PLATO DIAG tests to ensure that subsystem is operational.
 - b. Demonstrate to customer that subsystem is now operating properly within system.

SAFETY PRECAUTIONS

WARNING

Observe the following safety precautions at all times. Failure to do so may cause equipment damage and/or personal injury.

- Hazardous voltages exist in the subsystem. Do not attempt repair unless qualified to do so.
- Exercise caution any time checks or adjustments are being made to terminal when power is applied.
- Always turn power off and disconnect ac power cord when removing/replacing components or cables.

MAINTENANCE TOOLS AND MATERIALS

The maintenance procedures require the use of metric tools and common CE test equipment. No special materials are required.

MOS CIRCUIT-HANDLING PRECAUTIONS

Special handling procedures are necessary for printed-circuit cards containing metal-oxide semiconductor (MOS) integrated circuits. These ICs are susceptible to damage from static electricity. Observe the following precautions when handling the controller board:

- Turn power off before removing/installing or otherwise connecting/disconnecting any circuits.

- Ensure that any item that comes in contact with card is electrically grounded.
- Touch metal chassis frame to bleed off any accumulated static charge before handling card and continue to touch chassis while removing/installing card.
- Handle card only by a noncircuit portion. Connector pins and circuit paths must not be touched.
- Place card in a special conductive envelope whenever card is removed from chassis.

MAINTENANCE AIDS

There is no scheduled maintenance for the subsystem. In the event of failure, the primary maintenance aids are the voltage LED indicators, self-test routines, and DIAG Flexible Disk Diagnostic tests. These aids in conjunction with the SAM troubleshooting listings are structured to isolate the failure to a field-replaceable component/assembly and to provide a procedure number reference to the applicable maintenance procedure to be used for correcting the malfunction. Refer to the Diagnostic and Corrective Maintenance heading for organization of this material.

LOCATION OF MAJOR ASSEMBLIES

Figure 6-1 shows the location of the major assemblies within the subsystem.

DIAGNOSTIC AND CORRECTIVE MAINTENANCE


The following paragraphs describe routines tests, and procedures used to maintain the subsystem.

- Diagnostic Self-Test Routines
- Engineering Services Diagnostic Disk
- DIAG Flexible Disk Diagnostic Disk Tests
- Explanation of SAM Format
- Organization of SAMs and Procedures

DIAGNOSTIC SELF-TEST ROUTINES

The subsystem contains nine diagnostic tests stored in ROM. The starting address is at 0000₁₆. Diagnostic execution is under control of the diagnostic control switches on the controller

board. Status of the diagnostic tests is indicated by the four LEDs also located on the controller board. Refer to section 2 for a detailed description of the diagnostic control switches and LED indicators. The following paragraphs provide a description of the various test routines.

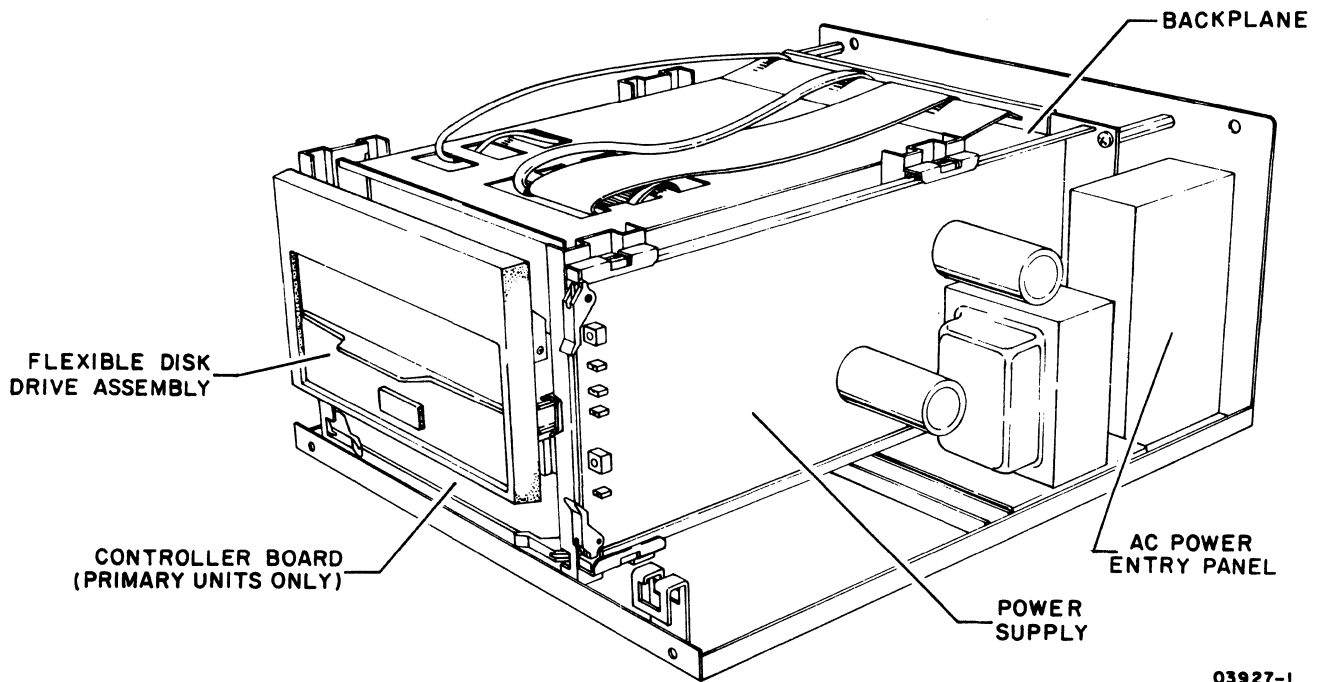

03927-1

NOTE: COVER AND FRONT
PANEL REMOVED
FOR CLARITY.

Figure 6-1. Location of Assemblies in Subsystem

LED Test

All four LEDs light momentarily following a power application and after a master reset to test the indicators.

Test 0 - ROM Checksum

The ROM checksum routine tests ROM for the correct checksum value of the stored contents.

Test 1 - RAM Test

Test 1 checks RAM memory (as specified by the diagnostic control switches) for correct operation. This test uses the diagnostic control switches and LEDs to isolate to a failing RAM chip. The first level of error detection is to a specific RAM bank, then to the failing chip within that bank.

Test 2 - Interrupt Generator

Test 2 checks for interrupts by performing writes and reads to the available registers in the interrupt controller IC.

Test 3 - Flexible Disk Controller

Test 3 checks the flexible disk controller IC by performing writes and reads to all available registers in the IC.

Test 4 - DMA Test

Test 4 reads data from the flexible disk controller IC data register to memory using DMA channels 1 and 3.

Test 5 - I/O Loopback Test

Test 5 tests the basic I/O capabilities by interfacing the input/output registers and transferring data via the I/O data bus and checking status.

Test 6 - CTC Test

Test 6 checks the counter/timer circuit by loading a count value and determining that the proper interrupt is generated at count 0.

Test 7 - Writing and Reading the Disk

Test 7 checks for a ready disk drive, then seeks side 1, track 76, last sector and executes writes and reads using the disk DMA channel. This surface area is reserved on all disks; therefore, no alteration is made to stored disk data.

ENGINEERING SERVICES DIAGNOSTIC DISK

This disk provides off-line testing that is similar to the diagnostics found in DIAG. For additional information on diagnostics and where to order the disks, refer to manual titled Engineering Services Diagnostics Disk for PLATO Disk (see Preface for publication number).

DIAG FLEXIBLE DISK DIAGNOSTIC TESTS

Testing can be performed using downline-loaded diagnostics from the PLATO system. Use lesson DIAG to call up the flexible disk diagnostic tests. This diagnostic loads and tests information via the terminal parallel I/O channel. Two modes are tested, DMA operations and interrupt routines. Refer to checkout information in section 3 for details of diagnostic operation.

EXPLANATION OF SAM FORMAT


A SAM listing is a specialized format used to present troubleshooting information in a logical manner. Figure 6-2 illustrates the basic SAM format. Any applicable assumptions or advisory information is provided in the header information of the SAM.

To interpret a SAM, start at the top of the page and determine the response for the first question posed. Then follow the appropriate dashed line beneath the Y or N response. Answer the next question, etc. until the action numbers are reached. Perform the action(s) listed in that column in numerical order to correct the problem.

ORGANIZATION OF SAMs AND PROCEDURES

The SAMs and maintenance procedures are organized in two separate subsections of this manual as follows:

- SAM Listings (section 6A)
- Maintenance Procedures (section 6B)

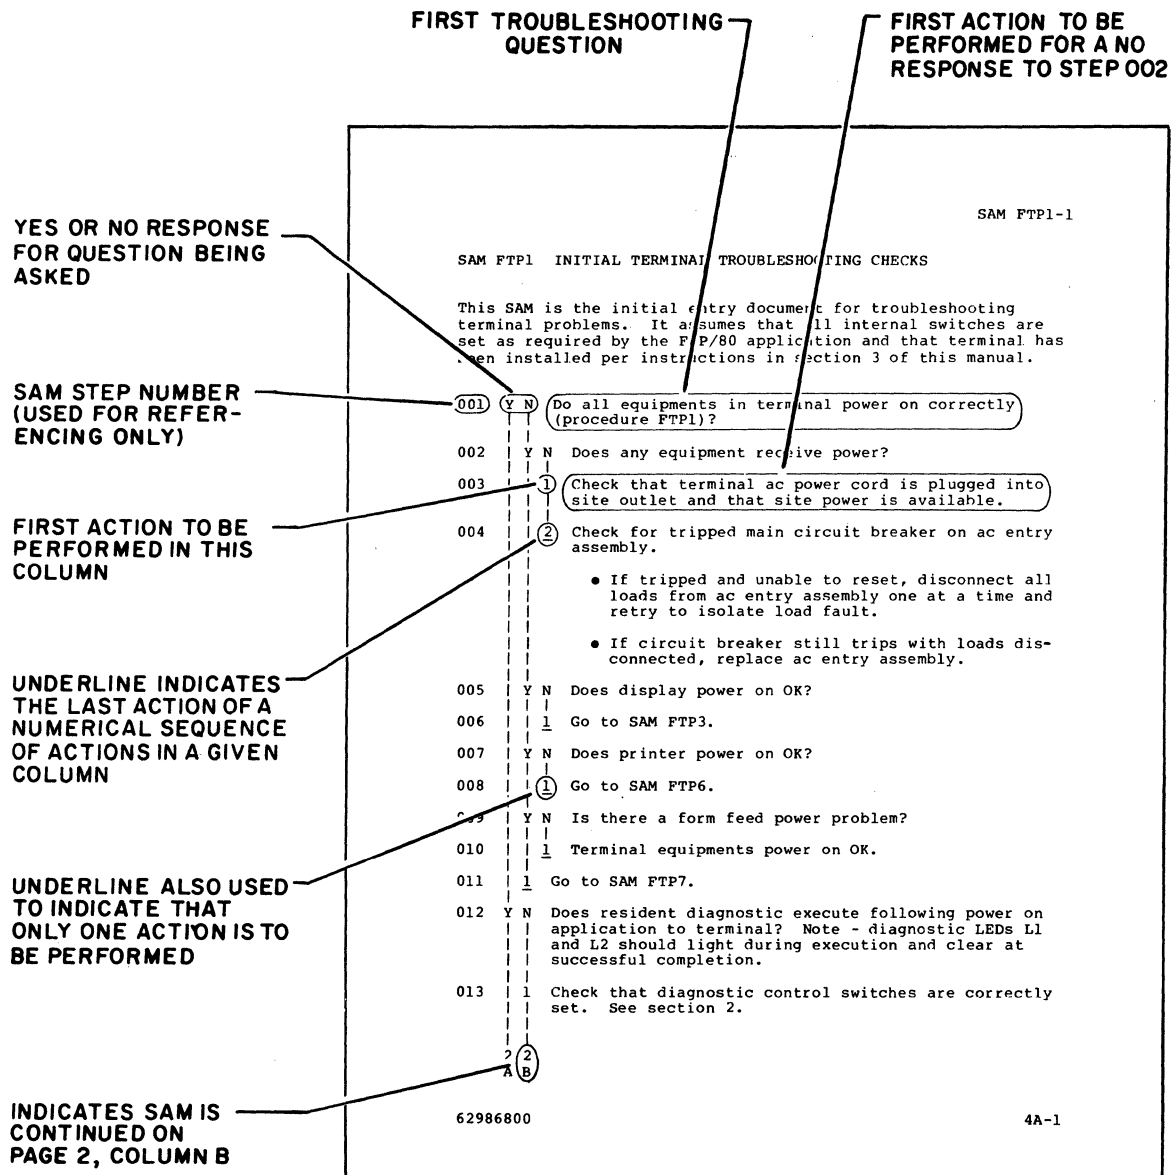

03680

Figure 6-2. SAM Example

**SAMS
SECTION 6A**



SAM 1 POWER FAULT ISOLATION

This SAM assumes that the ac power cord is plugged into a live site outlet and is firmly seated at the rear ac connector of the unit.

- 001 Y N Does unit circuit breaker trip when power is applied?
Allow time to cool and retry before proceeding with additional steps.
- 002 Y N Are fan and drive motor running?
- 003 1 Check that connector J3 from ac entry panel is plugged into backplane.
- 004 2 Check internal ac wiring connections (see ac power wiring schematic in section 5).
- 005 3 Check power cord for continuity.
- 006 4 Check/replace circuit breaker.
- 007 5 Replace fan or drive unit (procedure 6) as applicable.
- 008 Y N Are all LEDs on power supply lit?
- 009 1 Replace power supply (procedure 5).
- 010 1 Check that correct power supply voltages are present. Voltages should be:

- +5 V ± 0.1 V
 - -5 V ± 0.1 V
 - +12 V ± 0.1 V
 - +24 V ± 0.5 V
- Test points at front edge of controller board.
Check at J4 of drive unit (see procedure 5)

NOTE

The +5-V and +24-V outputs are adjustable. Refer to procedure 5. If correct voltages are not obtained, replace power supply (procedure 5).

2 2
A B

	A	B	
	<u>1</u>	<u>1</u>	
011	Y	N	Is Power indicator (LED 20) lit on controller board (primary units only)?
012		<u>1</u>	Replace controller board (procedure 4).
013		<u>1</u>	Internal power checks are OK.
014	<u>1</u>		Check internal wiring visually for shorts.
015	<u>2</u>		Unseat power supply board and retry. If circuit breaker no longer trips, replace power supply (procedure 5).
016	<u>3</u>		Unseat controller board (primary units only) and retry. If circuit breaker no longer trips, replace controller board (procedure 4).
017	<u>4</u>		Disconnect J4 from disk drive unit and retry. If circuit breaker no longer trips, replace disk drive unit (procedure 6).
018	<u>5</u>		Refer to ac power wiring schematic in section 5 and disconnect wiring/connectors from ac entry panel, line filter, and transformer back to circuit breaker to isolate load fault. Replace defective item.

SAM 2 INTERNAL DIAGNOSTIC CHECKS (MASTER UNITS ONLY)

This SAM isolates faults detected by the internal diagnostic tests. Refer to sections 2 and 3 for information on Diagnostic Control Switches and LED Indicators, and to the Diagnostic Self-Test Routines heading in section 6 for test descriptions.

001 Y N Do all four LEDs at front of controller board light momentarily following a power application or a master reset?

002 | 1 If no LEDs light, check for power fault per SAM 1.

003 | 2 Replace controller board (procedure 4).

004 N Y Is Error LED (2³) lit and other LEDs off? (Indicates a ROM Checksum Test 0 error.)

005 | 1 Replace ROM chips, Z80 chip, or controller board (procedure 4).

006 N Y Is Error LED (2³) and Power LED (2⁰) lit? (Indicates a RAM memory Test 1 error.)

NOTE

Verify that switches 2⁴ and 2⁵ are set correctly for number of RAM banks present. See section 3, Sub-system Installation.

007 | 1 Replace controller board (procedure 4), or isolate and replace bad RAM chip as follows:

- o Place switch 2¹ up and switch 2² down to display failing RAM bank in LEDs 2⁰ through 2² (bank 0 is row A, bank 1 is row B, bank 2 is row C, and bank 3 is row D).
- o Place switch 2² up to display failing bit (chip) within bank in LEDs 2⁰ through 2² (bit 0 is at location 6, bit 7 is at location 1. See figure 6B-4 for board layout).
- o Replace failing RAM chip and rerun internal diagnostic tests.

2
A

- A
1
|
- 008 N Y Is Error LED (2³) and Write LED (2¹) lit? (Indicates an Interrupt Generator Test 2 error.)
| |
- 009 | 1 Replace controller board (procedure 4). Problem with 9519 Interrupt Controller IC or support logic.
| |
- 010 N Y Is Error LED (2³), Write LED (2¹), and Power LED (2⁰) lit? (Indicates a Flexible Disk Controller Test 3 error.)
| |
- 011 | 1 Replace controller board (procedure 4). Problem with 1791 Flexible Disk Controller IC or support logic.
| |
- 012 N Y Is Error LED (2³) and Read LED (2²) lit? (Indicates a DMA Test 4 error.)
| |
- 013 | 1 Replace controller board (procedure 4). Problem with 9517 DMA IC or support logic.
| |
- 014 N Y Is Error LED (2³), Read LED (2²), and Power LED (2⁰) lit? (Indicates an I/O Loopback Test 5 error.)
| |
- 015 | 1 Replace controller board (procedure 4). Problem with support logic.
| |
- 016 N Y Is Error LED (2³), Read LED (2²), and Write LED (2¹) lit? (Indicates a CTC Test 6 error.)
| |
- 017 | 1 Replace controller board (procedure 4). Problem with Z80 CTC IC.
| |
- 018 N Y Is Error LED (2³), Read LED (2²), Write LED (2¹), and Power LED (2⁰) lit? (Indicates a Writing and Reading the Disk Test 7 error.)
| |
- 019 | 1 Verify correct diagnostic control switch settings (see section 3 of manual).
| |
- 020 | 2 Verify that flexible disk is properly formatted.
| |
- 021 | 3 Verify that flexible disk is Write Protected (slot covered). If not Write Protected, set diagnostic control switch 2³ up.
| |
- 022 | 4 Replace controller board (procedure 4).
| |
- 023 | 5 Replace disk drive unit (procedure 6).
| |

3
A

	A	B	
		<u>2</u>	
024	N	Y	Is Error LED (23) off, and Read LED (22), Write LED (21), and Power LED (20) lit? (Indicates that controller logic is communicating with drive unit, but test is not complete).
025		<u>1</u>	Check that flexible disk is installed in drive unit (procedure 2) and access door is closed.
026		<u>2</u>	Replace controller board (procedure 4).
027		<u>3</u>	Disconnect secondary unit (if applicable).
028		<u>4</u>	Replace disk drive unit (procedure 6)
029	N	Y	Is Power LED (20) lit and other LEDs off?
030		<u>1</u>	Indicates successful completion of resident diagnostic.
031		<u>1</u>	Diagnostic test error. Begin at step 001 of this SAM to isolate failure.

SAM 3 DIAG FLEXIBLE DISK DIAGNOSTIC CHECKS

This SAM provides fault isolation information for problems detected by the DIAG Flexible Disk Diagnostics. Use of this SAM assumes that the internal self-test diagnostics execute without error. Refer to section 3, Checkout, for the procedure to be used to load and execute the DIAG Flexible Disk Diagnostics.

001	N Y	Is there a terminal log-in or diagnostic loading problem?
002	<u>1</u>	Refer to applicable terminal hardware maintenance manual for troubleshooting information (see preface for publication number).
003	N Y	Is there a Disk System Not Ready to Load or Incorrect Load message displayed?
004	1	Try loading again by entering option 10 of display prompts.
005	2	Check that power is applied to flexible disk subsystem and last peripheral device connected to parallel I/O channel.
006	3	Check that no flexible disk is installed in drive unit of primary or secondary and perform a long master reset (press and hold Master Reset switch longer than three seconds). (1)
007	4	Check that device address strap/switch of flexible disk subsystem is set correctly.
008	5	Check seating of I/O cable between terminal and flexible disk subsystem and check that terminator is installed at last peripheral device.
009	6	Reseat controller board.
010	7	Replace controller board (procedure 4).
011	<u>8</u>	Refer to applicable terminal hardware maintenance manual for troubleshooting information (see preface for publication number).
012	N Y	Is there a Bad Seek message displayed?
	2 2	
	A B	

A	B	
1	1	
013	1	Verify that side of flexible disk entered for seek and track number are valid.
014	2	Check that a correctly formatted flexible disk is being used.
015	3	Possible bad flexible disk, try a different one.
016	4	Reseat controller board.
017	5	Replace controller board (procedure 4).
018	6	Replace disk drive unit (procedure 6).
019	7	Refer to applicable terminal hardware maintenance manual for additional troubleshooting information.
020	N Y	Does a switch-test error message appear?
021	1	Verify that switch being toggled is one being referenced on terminal.
022	2	Verify that toggling switch does not change switch position indicated on terminal.
023	3	Reseat controller board.
024	4	Replace controller board (procedure 4).
025	N Y	Does a send-interrupt-to-terminal error message appear?
026	1	Reseat controller board.
027	2	Check seating of parallel I/O cable and terminator assembly.
028	3	Verify correct terminal operation. If other devices are connected to parallel I/O channel, verify that interrupts work correctly to those devices.
029	4	Replace controller board (procedure 4).
030	N Y	Does an index-pulse error message appear?
031	1	Reseat controller board.
032	2	Replace controller board (procedure 4).
033	2	Replace power supply (procedure 5).
3	3	
A	B	

	A	B	
	2	2	
034	N	Y	Does a line-sync error message appear?
035		1	Reseat controller board.
036		2	Check seating of internal cable connectors.
037		3	Replace controller board (procedure 4).
038		4	Replace power supply (procedure 5).
039	N	Y	Is there a test-disk error (wrong density, number of sides, etc.)?
040		1	Check flexible disk part number to ensure disk being test has assumed characteristics (density, number of sides, etc.).
041		2	Reseat controller board.
042		3	Replace controller board (procedure 4).
043		4	Replace disk drive unit (procedure 6).
044	N	Y	Does error occur during read-a-sector test?
045		1	Try another flexible disk to verify that media is okay.
046		2	Replace controller board (procedure 4).
047		3	Replace disk drive unit (procedure 6).
048	N	Y	Does a device-address error message appear?
049		1	Ensure that device-address entry being made matches setting of device-address strap/switch.
050		2	Replace controller board (procedure 4).
051	1		DIAG Flexible Disk Diagnostics executed OK.

(1) If a long master reset or power application is performed with a system flexible disk installed, internal diagnostics will autoloading from disk instead of terminal. Therefore, flexible disk must be removed from drive unit(s), or Switch 23, or Switch 27 must be up in order to bypass test 7 or to bypass internal diagnostic execution, respectively.

**PROCEDURES
SECTION 6B**



Procedure 1 - Power Application/Removal

This procedure assumes that the flexible disk subsystem is plugged into the site ac outlet.

WARNING

Applying improper voltage to the flexible disk subsystem can damage components. Read label on back of unit for proper voltage and frequency.

NOTE

Correct operation of the IST parallel interface channel requires that power be applied to the last peripheral device on the channel. Last device supplies +5 V to the terminator.

1. First apply power to terminal. Then apply power to disk subsystem by pulling forward on Power On/Off switch connecting rod (early units) or by pressing Power ON/OFF switch to ON position (later units). See figure 6B-1.

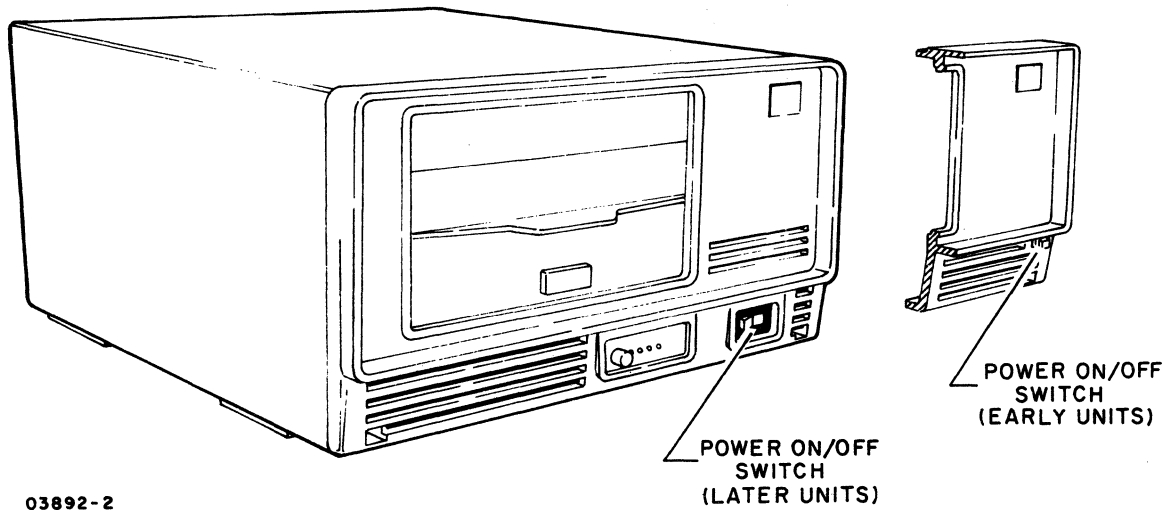


Figure 6B-1. Power On/Off Switch Location

2. Power on is indicated by LED 20 being lit (primary units only).

3. Remove power by pushing Power On/Off switch connecting rod in (early units) or by pressing Power On/Off switch to Off position (later units).

Procedure 2 - Flexible Disk Installation/Removal

Install flexible disk in drive unit per the following:

1. Apply power to disk subsystem (procedure 1).
2. Press door latch to open access door (figure 6B-2).

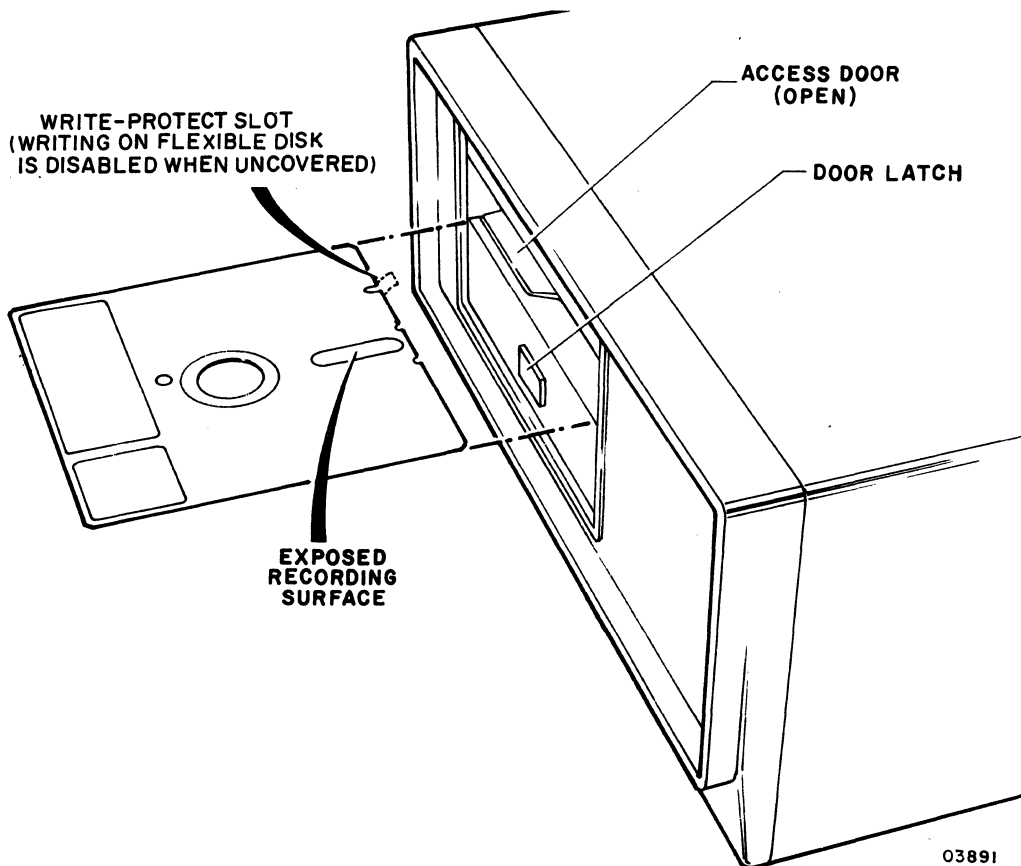


Figure 6B-2. Disk Installation/Removal

3. Remove flexible disk from storage envelope.

NOTE

If information is to be written onto disk, Write-Protect slot must be covered with tape that is opaque to infrared light.

4. Hold flexible disk so that Write-Protect slot is to left and slide disk into drive unit until solidly seated.
5. Close drive access door by pressing down on door until latched.
6. To remove disk, press door latch to open door and remove disk from drive. Place flexible disk in storage envelope.

NOTE


Care should be taken in handling the flexible disks. Recommendations are:

- Do not use lead or grease pencils when writing on flexible disk jacket label as these items deposit flakes. Remove flexible disk before writing on jacket.
- Do not fasten paper clips to flexible disk jacket edges.
- Do not touch disk surface exposed by jacket slot.
- Do not attempt to clean disk surface in any manner.
- Keep flexible disk away from magnetic fields and ferromagnetic materials that may be magnetized.
- Protect flexible disk from liquids, dust, and metallic substances.
- Always place flexible disk in its protective jacket when not in use.
- Store flexible disks loosely in a vertical position, not stacked.

Procedure 3 - Front Panel and Cabinet Hood Removal/Replacement

To remove the front panel or cabinet hood, refer to figure 6B-3 and perform the following:

1. Turn subsystem power off (procedure 1).
2. To remove front panel, remove two screws from panel and tip bottom of panel forward to release.
3. To reinstall front panel, engage retaining slots at top of panel, then tip panel down and install mounting screws.
4. To remove cabinet hood, first remove front panel, then remove four screws from Nylon feet at bottom of unit and two screws at rear of unit.
5. When reinstalling cabinet hood, install two screws at rear of unit first before installing bottom screws and Nylon feet.

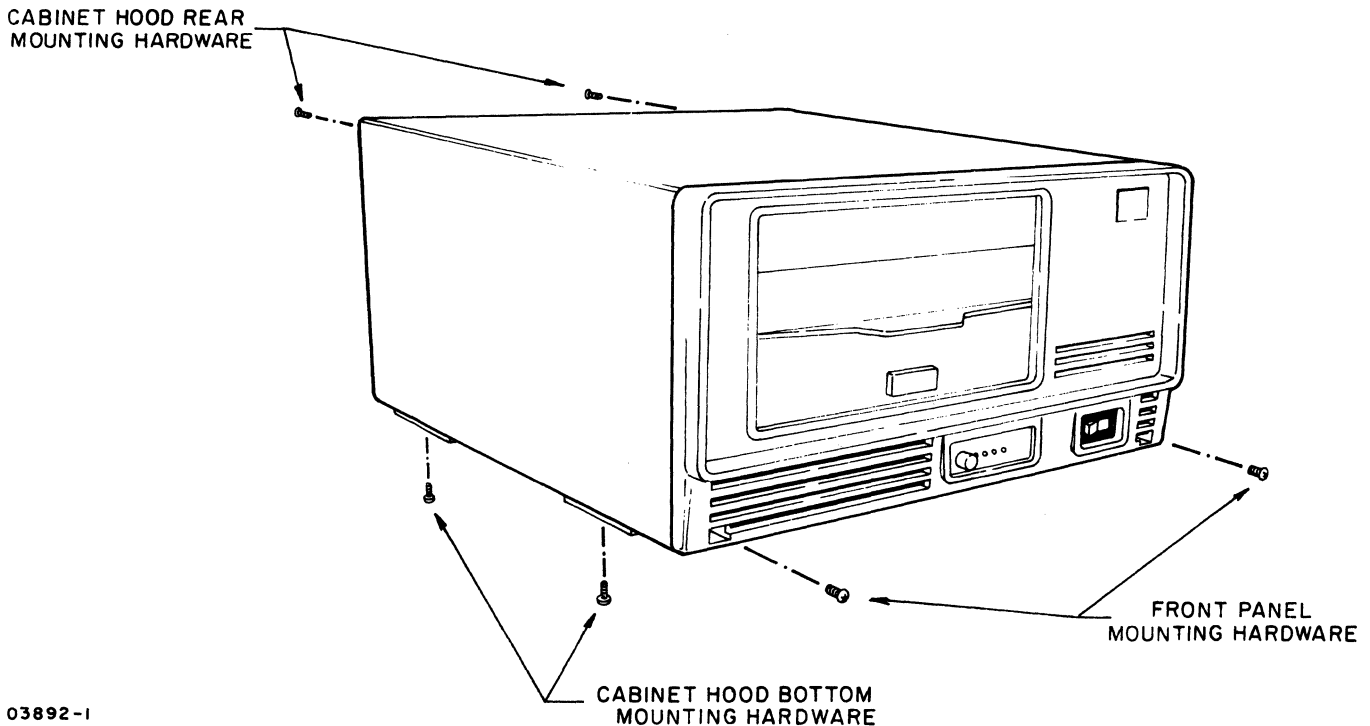

03892-1

Figure 6B-3. Front Panel and Cabinet Hood Mounting Details

Procedure 4 - Controller Board Removal/Replacement

Perform the following steps to remove/replace the controller board and/or RAM, EROM, and Z80 chips. See figure 6B-4 for board layout of model 9BED-3, or figure 6B-4.1 for model 9BED-4.

1. Turn subsystem power off (procedure 1).
2. Remove front panel (procedure 3).
3. Release controller board extractors and slide pc board out of unit.
4. Remove master reset push button and install on replacement board. This button is eccentric which allows for some adjustment. This adjustment is performed in step 6 of this procedure.

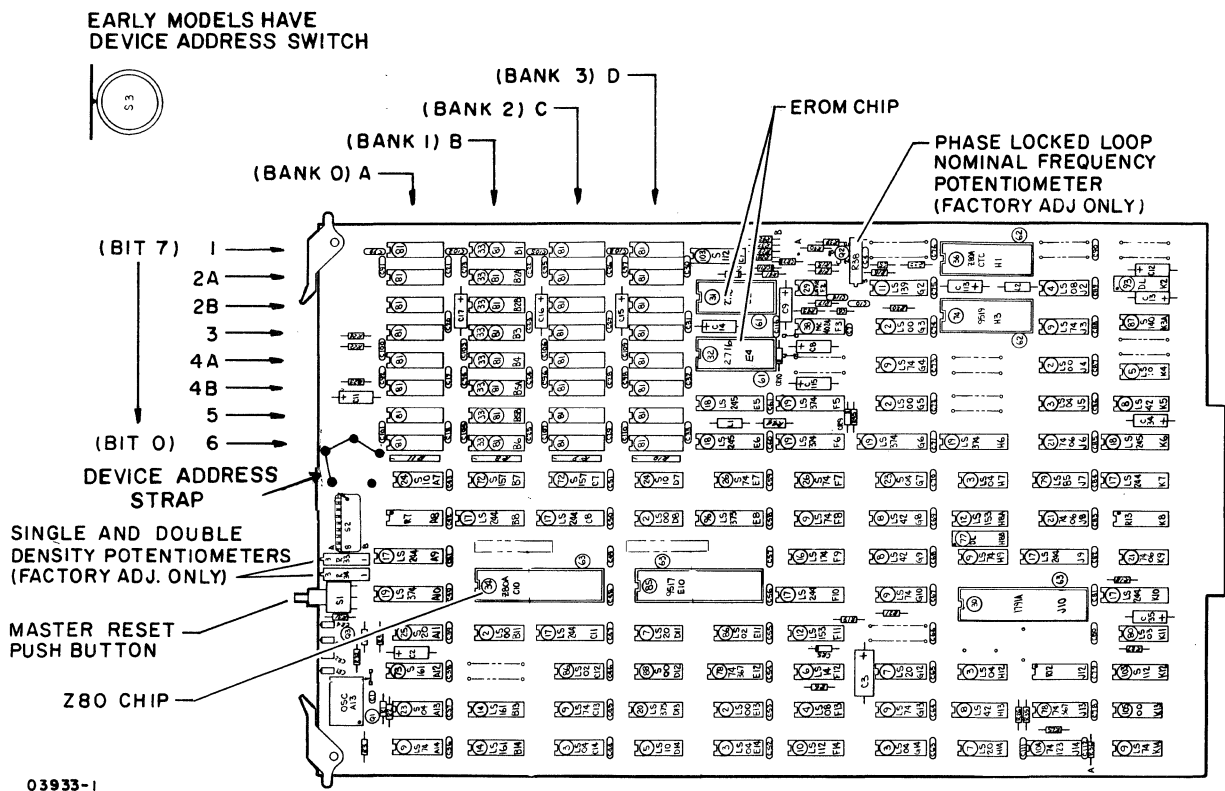


Figure 6B-4. Controller Board Layout


5. When installing a replacement controller board, verify that device address strap* is wired to 7 and diagnostic

*If unit has device address switch, it must be set to address 7. Model 9BED-4 has no switches or strapping.

control switches are set correctly for subsystem operation (see section 3 for switch settings). For FA501-A/B only, if RAM options are installed on a controller board that is being replaced, transfer RAM chips to new controller board. Locations for RAM options are:

- 1st RAM option - locations C1, C2A, C2B, C3, C4A, C4B, C5, and C6.
- 2nd RAM option - locations D1, D2A, D2B, D3, D4A, D4B, D5, and D6.
- 3rd RAM option - locations A1, A2A, A2B, A3, A4A, A4B, A5, and A6.

6. Slide controller board in and replace front panel (procedure 3).
7. Rotate master reset push button unit until best fit is achieved.

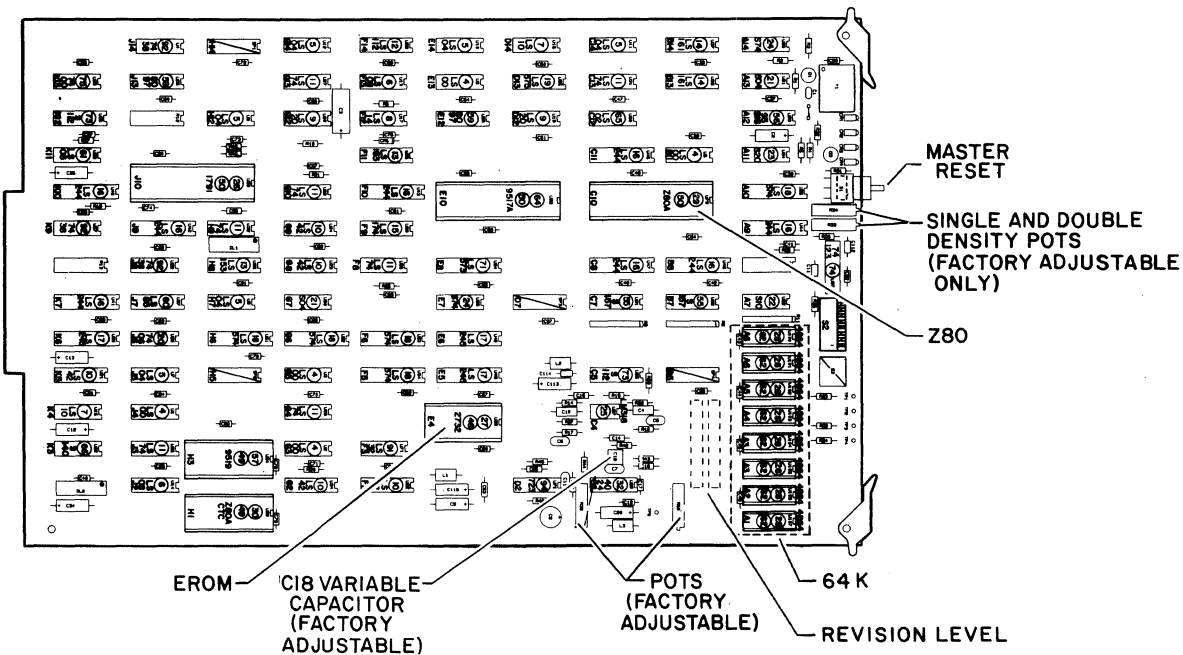

05553


Figure 6B-4.1. Controller Board Layout Model 9BED-4

Procedure 5 - Power Supply Removal/Replacement

This procedure describes removal/replacement of the power supply assembly. See figure 6B-5.

1. Turn subsystem power off (procedure 1).
2. Remove front panel (procedure 3).

3. Release power supply board extractors and slide assembly out of unit.
4. After installing a replacement power supply assembly, perform voltage adjustments as follows:
 - o +5-V Adjustment
 - a. Connect meter leads as follows:
 - Primary units - Attach meter leads to +5-V and GND test points at left front edge of controller board.
 - Secondary units - Remove disk drive unit from cabinet by pulling drive unit forward until free of slides. Set drive unit on its side, rotated to the left, to allow access to connector J4 at rear of drive PC board. Check that board connectors are seated firmly. Connect + meter lead to J4 pin 2 (+5 V) and - meter lead to J4 pin 3 (ground)
 - b. Apply power to unit.
 - c. Adjust top potentiometer on power supply board for +5 V ± 0.1 V.

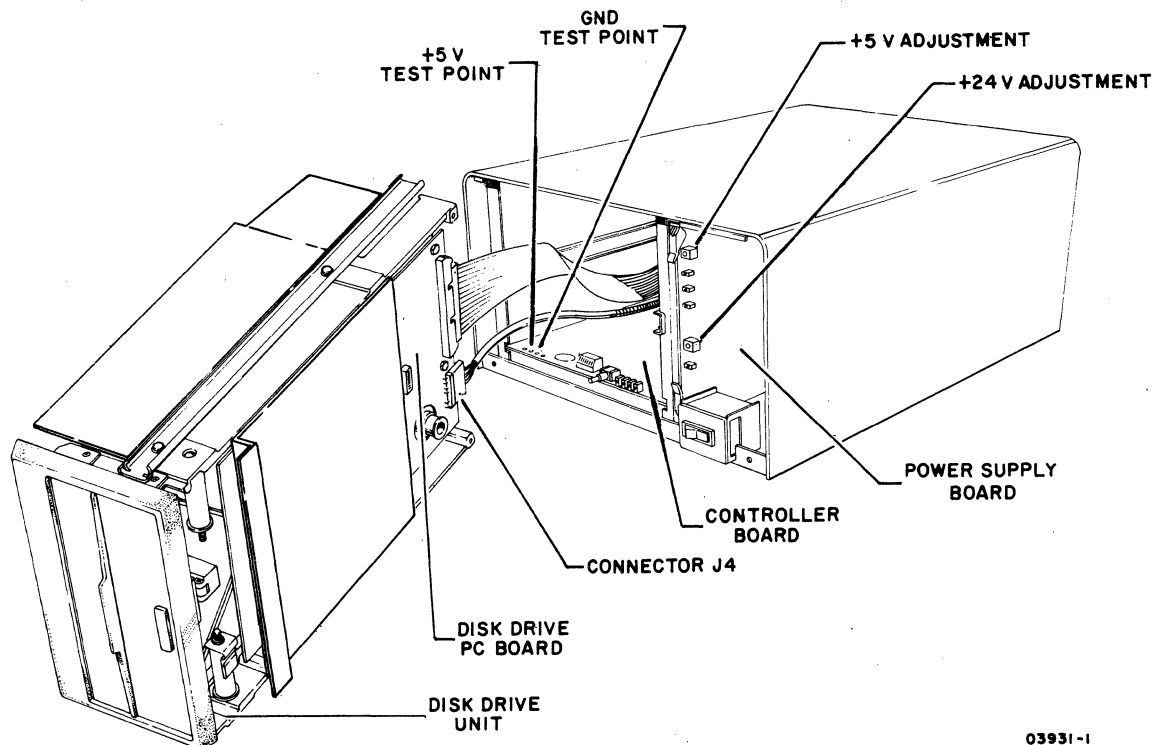

03931-1

Figure 6B-5. Power Supply Voltage Adjustments

- o +24-V Adjustment
 - a. Turn power off.
 - b. Remove disk drive unit from cabinet by pulling drive unit forward until free of slides but cables remain firmly attached. Set drive unit on its side, rotated 90° to the left, to allow access to connector J4 at rear of drive PC board.
 - c. Connect + meter lead to J4 pin 4 (+24 V) and - lead to J4 pin 6 (+24-V return).
 - d. Apply power to unit.
 - e. Adjust bottom potentiometer on power supply board for +24 V +0.5 V.
 - f. Turn power off, disconnect meter leads, and reinstall drive unit. Check that cables do not bind when installing drive unit.

Procedure 6 - Disk Drive Unit Removal/Replacement

Refer to figure 6B-6 and perform the following steps to remove/replace the disk drive unit.


1. Turn subsystem power off (procedure 1).
2. Remove front panel (procedure 3).

CAUTION

Do not set disk drive unit down with PC board at bottom. Damage to PC components may occur.


3. Remove disk drive unit from cabinet by pulling drive unit forward until free of slides. Set drive unit on its side and disconnect three cables from rear of unit.
4. Remove slides and shields (figure 6B-6) from existing drive unit. The shields are to be installed on the replacement drive as follows:
 - o When replacement drive is a primary unit (FA501-A/B/C/D Primary Flexible Drive), both side and bottom shields must be replaced.

- o When using the secondary unit as the replacement (BR801-A,B Secondary Flexible Drive), only the side shield must be replaced (figure 6B-6).
5. Verify that drive pulley on replacement drive unit is installed correctly for 50-Hz/60-Hz operation as required. Pulley must be reversed to change the rotating speed of drive unit. Refer to figure 6B-7 for details.
 6. Verify that Unit Select switch (DIP switches 1, 2, 3, and 4) and Ready switch (DIP switches 5, 6, 7, and 8) are set as follows:
 - o Primary Unit - DIP switch 1 and 5 ON, remaining switches OFF.
 - o Secondary Unit - DIP switch 2 and 6 ON, remaining switches OFF.
 7. Remove cardboard head-protective flexible disk from drive unit if replacement unit is being installed.

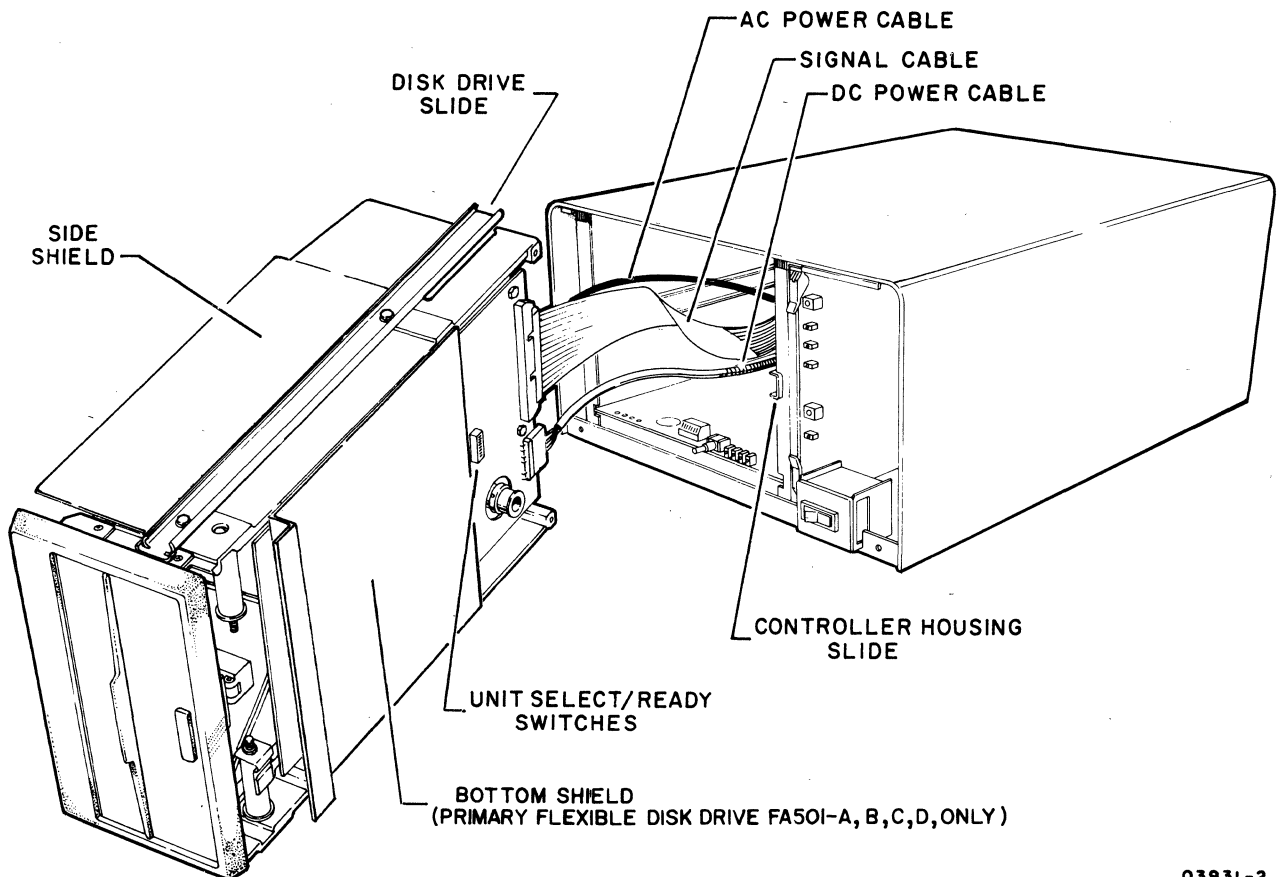

03931-2

Figure 6B-6. Disk Drive Unit Installation

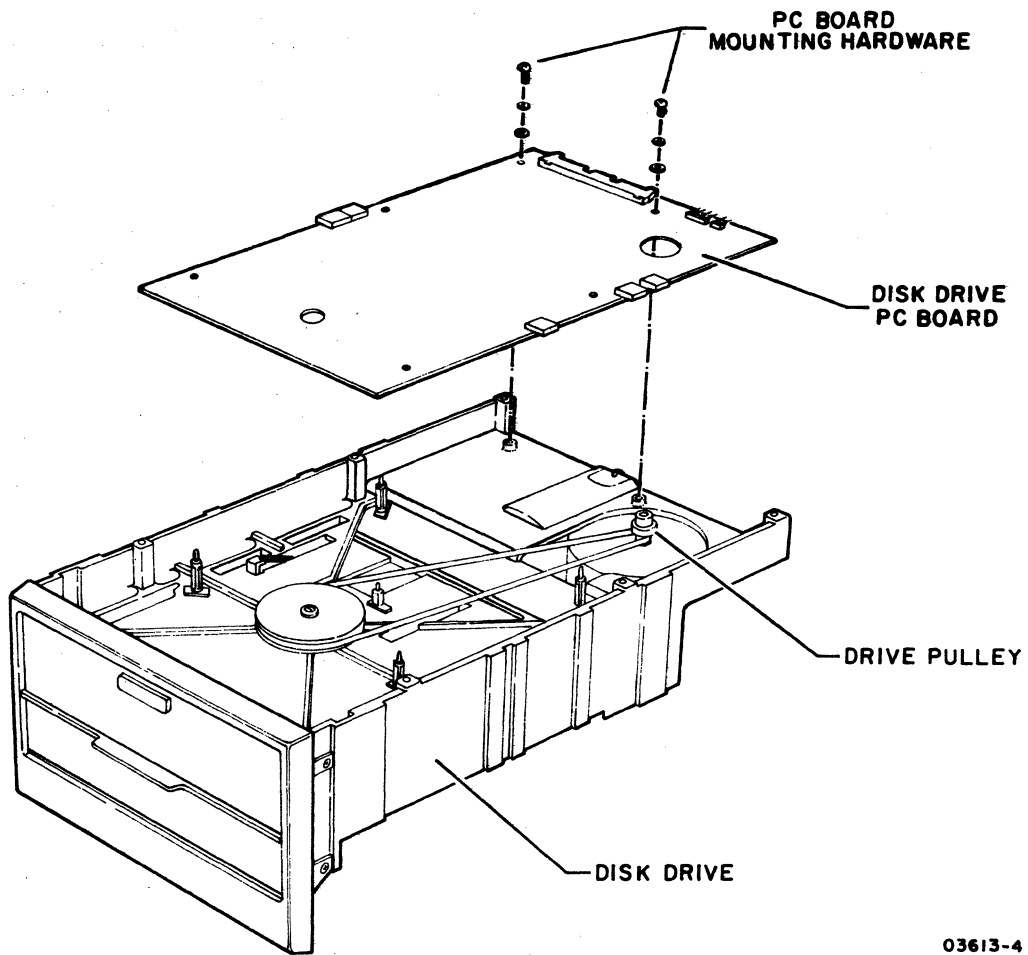

Note - Refer to the 9406 Flexible Disk Drive Assembly Hardware Maintenance manual for additional information if needed (see preface for publication number).

Figure 6B-7. Drive Pulley Details

This section contains the spare parts lists, genealogy charts, and assembly drawings for the flexible disk subsystem. Parts data for the 9406 Flexible Disk Drive unit is contained in a separate publication (see the preface for publication number).

NOTE

Parts list information is provided under separate dividers for the pre-production and production units. Common parts list information is also provided under a separate divider.

Table 7-1 explains the column headings on the assembly parts lists.

TABLE 7-1. EXPLANATION OF COLUMN HEADINGS ON ASSEMBLY PARTS LISTS

COLUMN HEADING	EXPLANATION
FIND NO.	Identifies an electrical or mechanical part on an assembly drawing. If more than one listing appears for a find number, refer to LI, WK IN, and WK OUT.
LI (Line Item)	Gives a chronological or historical record of the addition of a new part to a find number. For example, 01 indicates that the part was the first one used, and 02 indicates the second, etc. See also WK IN and WK OUT.
PART NUMBER	Gives the Control Data Corporation part identification. Use this number when ordering replacements.
CD (Check Digit)	Gives the information-control system a means of cross-checking the correctness of a part number.
QUANTITY	Lists the total number of a part required to complete an assembly. The vertical line near the center of the column acts as a decimal point. Numbers to the left of the line are whole numbers. Those to the right of the line are tenths, hundredths, and thousandths.
U/M (Unit of Measure)	Indicates how the information-control system counts or supplies a part.
PART DESCRIPTION	Describes the physical appearance, type, or name of a part.
MC (Material Code)	Supplies additional descriptive data to the information-control system.
YLD (Yield)	A 2-digit number that indicates the usable portion of any quantity of parts expressed as a percentage.
ECO NO. IN	Engineering Change Order that adds a new part to an assembly. See also WK IN.
ECO NO. OUT	Engineering Change Order that deletes a part from an assembly. See also WK OUT.
S/N (Serial Number)	Used to specify an ECO's effectivity by serial number.
WK IN (Week In)	Lists the date when manufacturing begins using a new part and when it is available for parts replacement. For example, 7222 means a part is available of the 22nd week of 1972.
WK OUT (Week Out)	Lists the date when manufacturing no longer uses a part in building an assembly. See also WK IN. Do not order a part after its week-out date.

0643-2A



PARTS DATA FOR PRE-PRODUCTION UNITS ONLY



DWN	R. Trautman	P/AD	CONTROL DATA	TITLE	SPL	PREFIX	DOCUMENT NO.	REV.
CHKD	R. Trautman	2-6-80		PRIMARY FLEXIBLE DISK SUBSYSTEM	SPL		66308923	J
ENG	P. Trautman	2-6-80		FIRST USED ON				
MFG	N/A			FA501A/B			SHEET	1 OF 3
APPR	E. N. Hor	7-16-80	CODE IDENT					
	R. Trautman	2-16-80	15920					

SHEET REVISION STATUS										REVISION RECORD				
3	2	1	REV	ECO	DESCRIPTION	DRFT	DATE	APP						
			00	00	00	00	50004-62	RELEASED CLASS B		2/1/80	WBA			
			01	01	01	01	51009	ADDED F/N 18 & NOTE 9		2/13/80	WBA	PRM		
			02	01	02	02	51011	F/N 18 WAS 66312007		2/14/80	WJG	PRM		
			03	03	03	03	51168	F/N 12 WAS 66139318 F/N 13 WAS 66139319		7/17/80	D.S.	PRM		
			A	A	A	A	11565-88	RELEASED CLASS "A"		7/23/80	WBA	MCT		
			B	A	B	B	14165	REVISED PER ECO		9/1/80	WBA	PRM		
			C	C	C	C	14376	REVISED PER ECO		11/2/81	EE	JUP		
			D	D	D	D	14571	CHG 1, 15, 19, DELETE NOTE 3		3-2-81	WJG	PRM		
			E	D	E	E	14721	F/N 16 WAS 90446140		7/13/81	EE	PRM		
			F	D	F	F	14663	ADDED F/N 20		7/14/81	EE	PRM		
			G	G	G	G	14838	ADDED NOTE 10		10/12/81	EE	PRM		
			G	H	H	H	14820	REVISED PER ECO		11-3-81	Rp	PRM		
			J	J	J	J	15867	INACTIVE, SERVICE USE ONLY, SUPERSEDED BY 46313407		5-28-83	MEB	PRM		

INACTIVE

NOTES:

EQUIPMENT	EQUIPMENT CONFIGURATOR	TOP LEVEL ASSEMBLY
FA501A 60HZ	15632205	15632209
FA501B 50HZ	15632206	15632210

THIS SPL APPLIES ONLY TO A/B01 EQUIPMENTS

DETACHED LISTS

AA3186 REV. 8 71

PRINTED IN U.S.A.

	CODE IDENT	SHEET	PREFIX	DOCUMENT NO.	REV.
	15920	2	SPL	66308923	J

NOTES:

- These parts are the total required for a unit with no options installed.
- A unit could have 3 RAM options of 8 RAM ICs for each option for a total of 32 RAM ICs in the unit.

4. Find Numbers 1 thru 7 and 19 are for the 98ED Controller Board.
5. Use Find Number 8 for the FA501A (60HZ unit and use Find Number 9 for the FA501B (50HZ unit).
6. Find Number 10 is for the 50HZ AC Entry only.
8. Find Number 11 is the signal cable used to connect the Primary Flexible Disk Subsystem to the IST Terminal.
9. One of these devices is required on the last device on the Plato IST Parallel I/O channel daisy chain configuration.
10. Original production units were built with P/N 90446140. Current production units are built with P/N 90446290. These cards are interchangeable.

AA3185

PRINTED IN U.S.A.

CONTROL DATA			CODE IDENT		SHEET		DOCUMENT NO.		REV					
			15420		3		SPL 66308723		J					
FIND NO.	PART IDENTIFICATION	QUANTITY REQUIRED										UNIT OF MEAS	NOMENCLATURE OR DESCRIPTION	SPECIFICATIONS, NOTES, OR MATERIAL
		60 HZ	50 HZ											
1	66312070	1	1										2716 2KX8 ROM	△4
2	15153821	8	8										4116 16K RAM	△4
3	15163201	1	1										Z80 Processor	△4
4	15163444	1	1										FD1791 Disk Controller	△4
5	15163458	1	1										9517 DMA	△4
6	15163459	1	1										9519 Interrupt Cont.	△4
7	15164429	1	1										Z80A-CTC	△4
8	15165425	1	0										60Hz Power Cord	△5
9	15165426	0	1										50Hz Power Cord	△5
10	51918789	0	1										Step down Transformer	△6
11	61408865	1	1										25 Pin I/O Cable	△8
12	95587103	1	1										Circuit Breaker	
13	15164356	1	1										Line Filter	
14	77618000	1	1										Flexible Disk Assembly	
15	90446284	1	1										98ED Controller Board	
16	90446290	1	1										1AFD Power Supply	△10
17	90446143	1	1										98MD Backplane	
18	15632316	1	1										FT116A Terminator	△9
19	66312071	1	1										2716 2KX8 Rom	
20	71493364	1	1										SCR Shoulder Nylon	


AA3181 REV. 8/71

PRINTED IN U.S.A.

DWN	R Trautman	2-80	CONTROL DATA	TITLE	PREFIX	DOCUMENT NO.	REV.					
CHKD	R Trautman	2-6-80		SPL SECONDARY FLEXIBLE DISK	SPL	66308921	E					
ENG	P. Blazynski	2-1-80		FIRST USED ON								
MFG	N/A			BR810A/B								
APPR	S. H. Moore	7-16-80	CODE IDENT			SHEET	1 of 3					
	R. H. Dea	7-16-80	15920									
SHEET REVISION STATUS				REVISION RECORD								
				3	2	1	REV	ECO	DESCRIPTION	DRFT	DATE	APP
				00	00	00	00	500044	Released Class B		2/9/80	PRM
				01	00	01	01	51004	F/N 4 WAS 51897345	WJG	2-11-80	PRM
				02	01	02	02	51114	F/N 4 WAS 51940854	WJG	6-6-80	PRM
				03	03	03	03	51168	F/N 5 WAS 66309319 F/N 6 WAS 66309318	WJG	7-18-80	PRM
				A	A	A	A	11565-88	RELEASED CLASS 'A'		7-23-80	MSR
				B	A	B	B	14165	REVISED PER ECO	WJG	9-15-80	MSR
				C	A	C	C	14721	F/N 9 WAS 90446140	EE	7/31/81	MSR
				D	D	D	D	14838	ADDED F/N 8 AND NOTE 5	EE	11/2/81	MSR
				E	D	E	E	14820	REVISED PER ECO	WJG	11-5-81	MSR
NOTES:												
EQUIPMENT			EQUIPMENT CONFIGURATOR				TOP LEVEL ASSEMBLY					
BR810A 60HZ			15632207				15632211					
BR810B 50HZ			15632208				15632212					
THIS SPL APPLIES ONLY TO A/B/D1 EQUIPMENTS.											DETACHED LISTS	






AA3180 REV. 8/71

PRINTED IN U.S.A.

	CODE IDENT	SHEET	PREFIX	DOCUMENT NO.	REV.
	15920	2	SPL	66308921	D
NOTES:					
1. These parts are the total required for a unit with no options installed					
2. Use find number 1 (60HZ Power Cord) for the BR810A (60HZ unit) and find number 2 (50HZ Power Cord) for the BR810B (50HZ unit).					
3. Use find number 3 for the 50HZ AC Entry only.					
4. Find number 4 is the Signal Cable used to connect the BR810A or BR810B to the FA501A or FA501B.					
5. Original production units were built with P/N 90446140. Current production units are built with P/N 90446290. These cards are interchangeable.					


AA3185

PRINTED IN U.S.A.

CONTROL DATA		CODE IDENT		SHEET		SPL		DOCUMENT NO.		REV.		
		15920		3		SPL		66308921		E		
FIND NO.	PART IDENTIFICATION	QUANTITY REQUIRED								UNIT OF MEAS	NOMENCLATURE OR DESCRIPTION	SPECIFICATIONS, NOTES, OR MATERIAL
		60 HZ	50 HZ									
1	15165425	1	0								60Hz Power Cord	
2	15165426	0	1								50Hz Power Cord	
3	51918789	0	1								Step down Transformer	
4	61408976	1	1								Secondary Signal Cable	
5	95587103	1	1								Circuit Breaker	
6	15164356	1	1								Line filter	
7	77618000	1	1								Flexible Disk Assembly	
8	90446140	REF	REF								9BKD Power Supply	
9	90446290	1	1								1AFD Power Supply	Interchangable with F/N 8
10	90446143	1	1								9BMD Backplane	

62949100 M

7-7

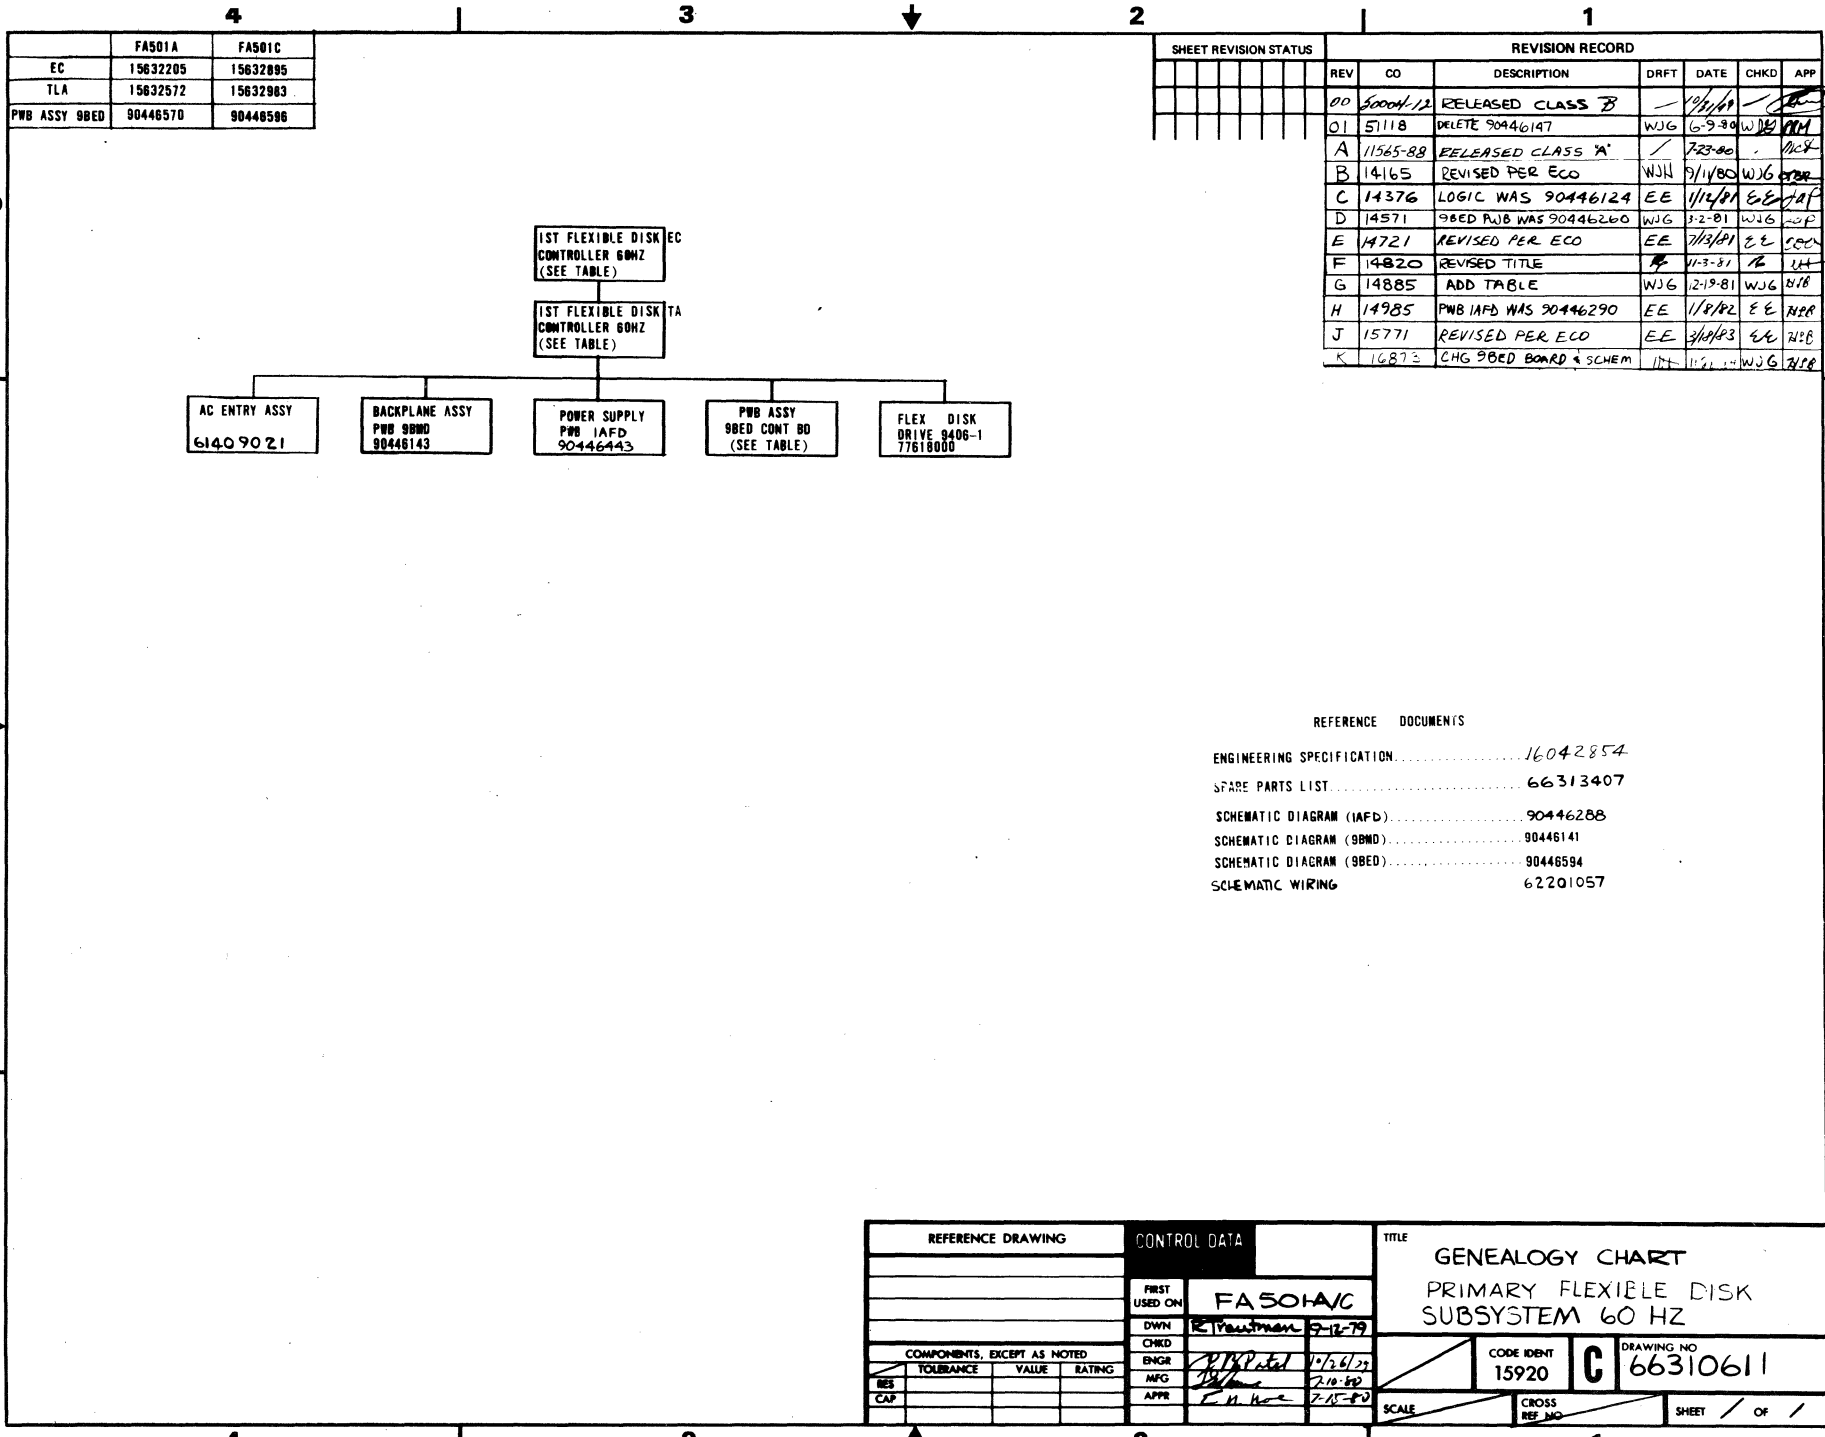

	FA501A	FA501C
EC	15632205	15632895
TLA	15632572	15632893
PWB ASSY 98ED	90446570	90446596

SHEET REVISION STATUS				REVISION RECORD					
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP			
00	50004-12	RELEASED CLASS B		10/1/80					
01	5118	DELETE 90446147	WJG	6-9-80	WJG	WJG			
A	11565-88	RELEASED CLASS 'A'		7-23-80					
B	14165	REVISED PER ECO	WJH	9/11/80	WJG	WJG			
C	14376	LOGIC WAS 90446124	EE	1/12/81	EE	EE			
D	14571	98ED PWB WAS 90446260	WJG	3-2-81	WJG	WJG			
E	14721	REVISED PER ECO	EE	7/13/81	EE	EE			
F	14820	REVISED TITLE	EE	11-3-81	EE	EE			
G	14885	ADD TABLE	WJG	2-19-81	WJG	WJG			
H	14985	PWB 1AFD WAS 90446290	EE	1/18/82	EE	EE			
J	15771	REVISED PER ECO	EE	3/10/83	EE	EE			
K	16873	CHG 98ED BOARD & SCHEM	WJG	11-21-84	WJG	WJG			


REFERENCE DOCUMENTS

ENGINEERING SPECIFICATION.....	16042854
SPARE PARTS LIST.....	66313407
SCHEMATIC DIAGRAM (1AFD).....	90446288
SCHEMATIC DIAGRAM (98MD).....	90446141
SCHEMATIC DIAGRAM (98ED).....	90446594
SCHEMATIC WIRING.....	62201057

REFERENCE DRAWING		CONTROL DATA		TITLE	
		FA501A/C		GENEALOGY CHART	
		E. P. Newman 7-12-79		PRIMARY FLEXIBLE DISK	
		10/26/79		SUBSYSTEM 60 HZ	
COMPONENTS, EXCEPT AS NOTED				CODE IDENT	DRAWING NO
TOLERANCE	VALUE	RATING	15920	C	66310611
RES					
CAP					
			SCALE	CROSS REF NO	SHEET / OF /

66310611

SHEET REVISION STATUS				REVISION RECORD					
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP			
00	5004/12	RELEASED CLASS B	✓	09/79					
01	51118	DELETE 90446147	WJG	6-9-80	WJG				
A	11565-88	RELEASED CLASS 'A'	✓	7-27-80					

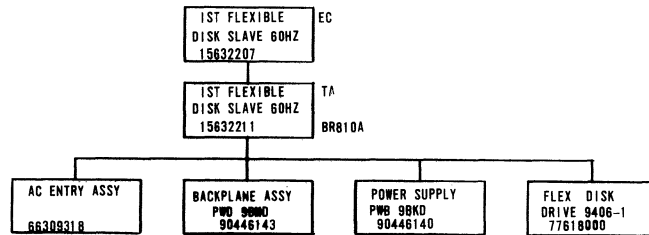


REFERENCE DOCUMENTS

ENGINEERING SPECIFICATION.....16342254
 SPARE PARTS LIST.....66308921
 SCHEMATIC DIAGRAM (98KD).....90446138
 SCHEMATIC DIAGRAM (98MD).....90446141

REFERENCE DRAWING				TITLE	
				GENEALOGY CHART	
				PLATO SLAVE FLEXIBLE DISK DRIVE 60HZ	
FIRST USED ON				BR810A	
DWN				R. Trautman 9-12-79	
CHKD					
ENGR				M. J. D. 11-26-79	
MFG				P. J. 2-10-80	
APPR				H. K. 7-15-80	
COMPONENTS, EXCEPT AS NOTED					
RES	TOLERANCE	VALUE	RATING	CODE IDENT	DRAWING NO
CAP				15920	66310612
SCALE				CROSS REF. NO.	SHEET / OF /

62949100 M

7-9

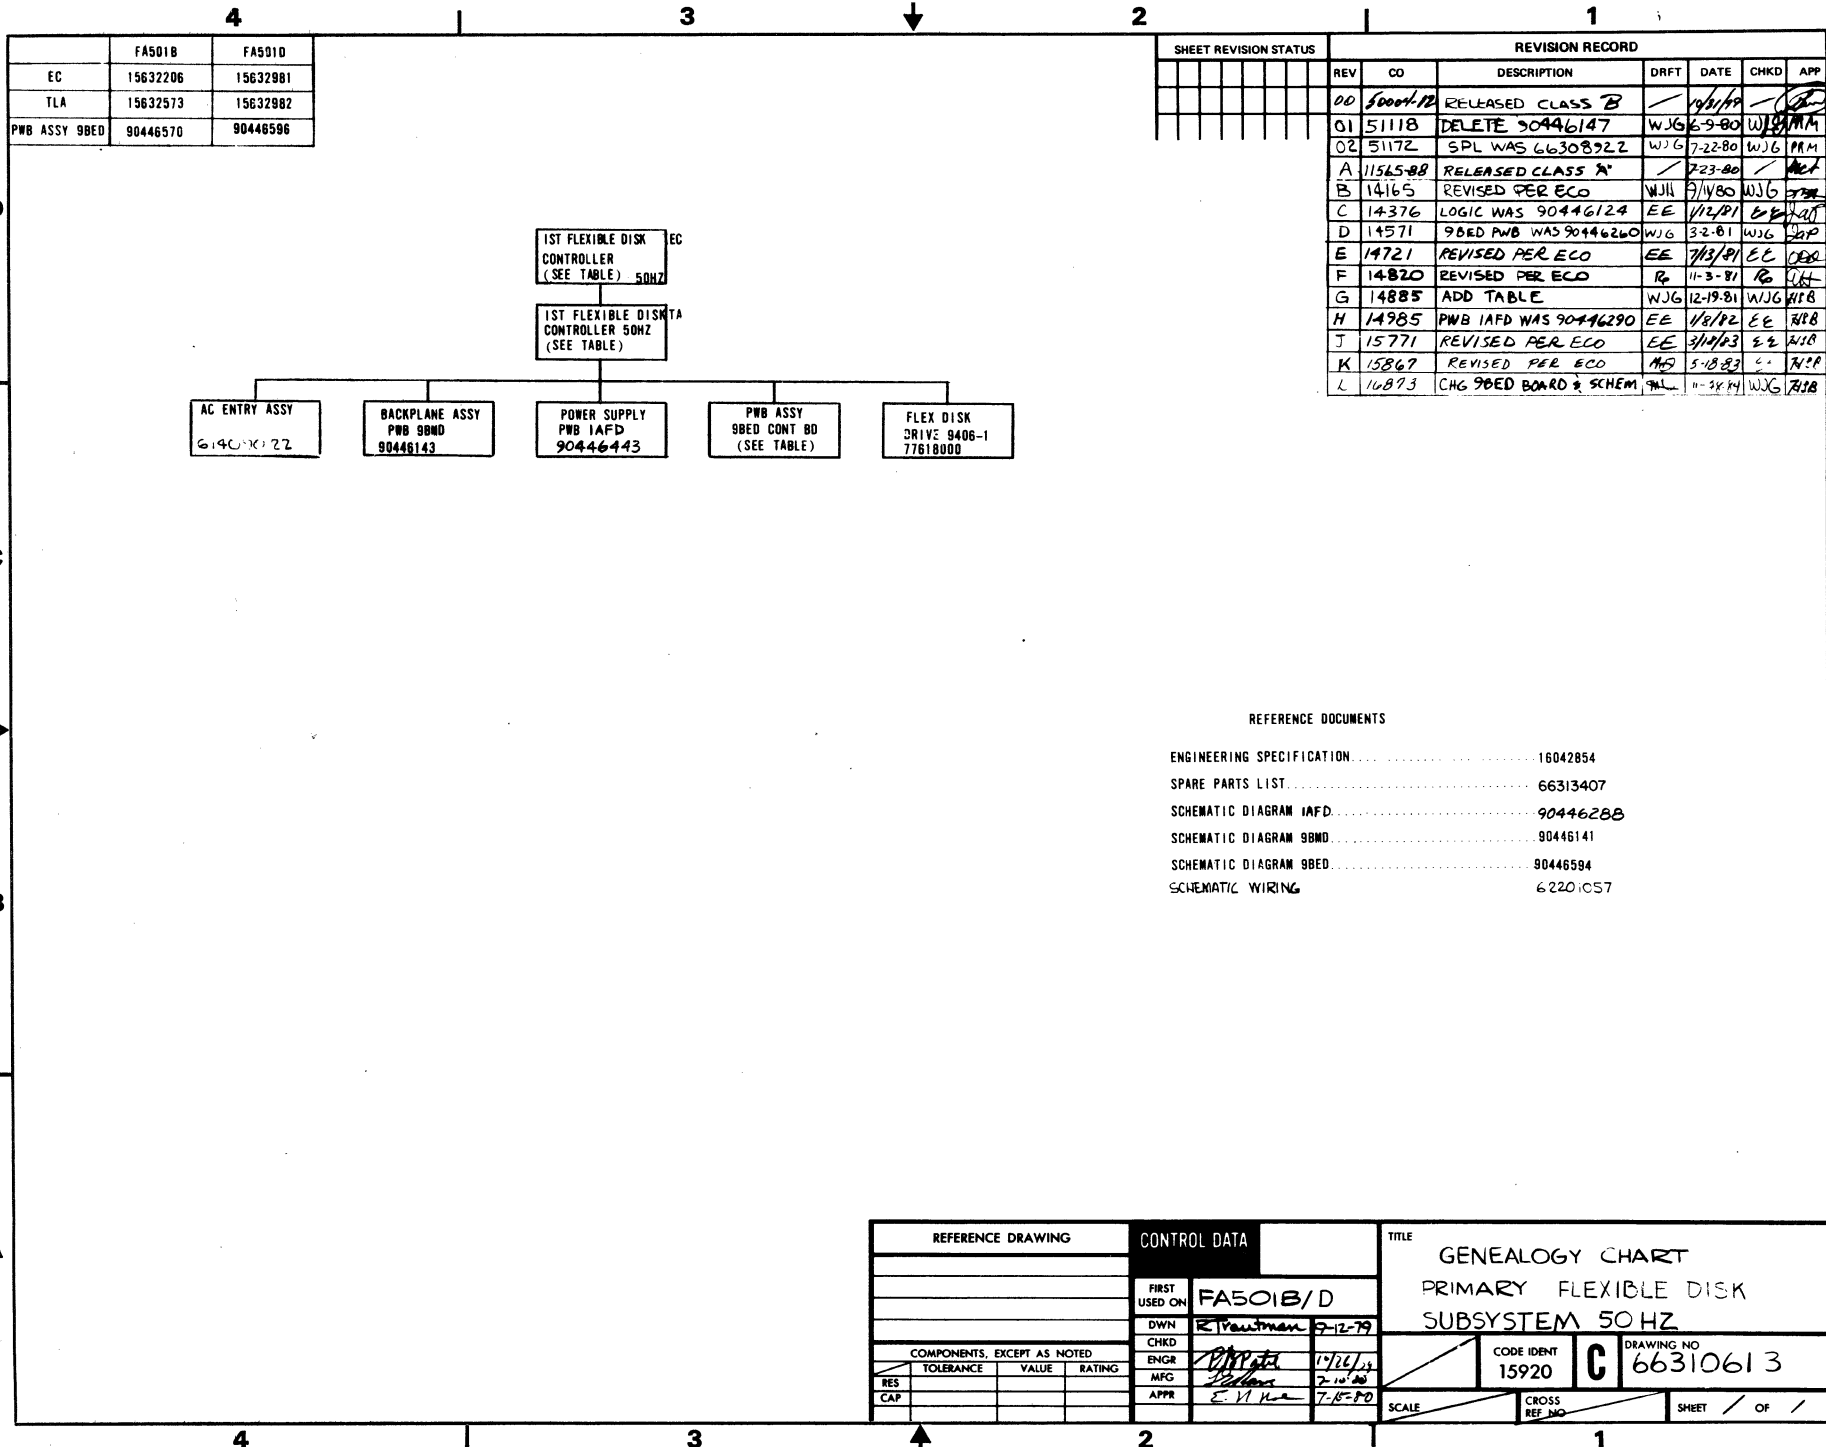

	FA501B	FA501D
EC	15632206	15632981
TLA	15632573	15632982
PWB ASSY 9BED	90446570	90446596


SHEET REVISION STATUS		REVISION RECORD					
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP	
00	50004-12	RELEASED CLASS B		1/21/79			
01	51118	DELETE 90446147	WJG	6-9-80	WJG	MM	
02	51172	SPL WAS 66308922	WJG	7-22-80	WJG	MM	
A	11565-88	RELEASED CLASS A		2-23-80			
B	14165	REVISED PER ECO	WJH	9/1/80	WJG	MM	
C	14376	LOGIC WAS 90446124	EE	1/2/81	EE	MM	
D	14571	9BED PWB WAS 90446260	WJG	3-2-81	WJG	MM	
E	14721	REVISED PER ECO	EE	7/13/81	EE	MM	
F	14820	REVISED PER ECO	R	11-3-81	R	MM	
G	14885	ADD TABLE	WJG	12-19-81	WJG	MM	
H	14985	PWB IAFD WAS 90446290	EE	1/8/82	EE	MM	
J	15771	REVISED PER ECO	EE	3/10/83	EE	MM	
K	15867	REVISED PER ECO	MM	5-18-83	MM	MM	
L	16893	CHG 9BED BOARD & SCHEM	WJG	11-28-84	WJG	MM	

REFERENCE DOCUMENTS

ENGINEERING SPECIFICATION	16042854
SPARE PARTS LIST	66313407
SCHEMATIC DIAGRAM IAFD	90446288
SCHEMATIC DIAGRAM 9BND	90446141
SCHEMATIC DIAGRAM 9BED	90446594
SCHEMATIC WIRING	62201057

REFERENCE DRAWING		CONTROL DATA		TITLE	
		FIRST USED ON		GENEALOGY CHART	
		DWN		PRIMARY FLEXIBLE DISK	
		CHKD		SUBSYSTEM 50 HZ	
		ENGR		CODE IDENT	DRAWING NO
		MFG		15920	C 66310613
		APPR		SCALE	CROSS REF NO
COMPONENTS, EXCEPT AS NOTED				SHEET / OF /	
RES	TOLERANCE	VALUE	RATING		
CAP					

SHEET REVISION STATUS				REVISION RECORD					
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP			
00	50007-12	RELEASED CLASS B		1/23/80					
01	51118	DELETE 90446147	WJG	8-9-80					
02	51172	SPL WAS 66308920	WJG	7-22-80					
A	115-05-88	RELEASED CLASS A							

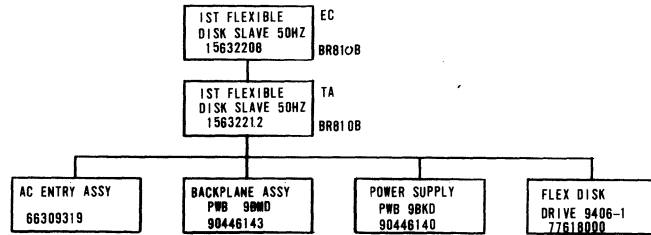

REFERENCE DOCUMENTS

- ENGINEERING SPECIFICATION.....16042854
- SPARE PARTS LIST.....66308921
- SCHEMATIC DIAGRAM (9BKD).....90446138
- SCHEMATIC DIAGRAM (9BMD).....90446141

REFERENCE DRAWING				UNIT	IN	TITLE	
				FIRST USED ON		GENEALOGY CHART	
				DWN		PLATO SLAVE FLEXIBLE DISK DRIVE 50HZ	
				CHKD		CODE IDENT	
				ENGR		C	
				MFG		DRAWING NO	
				APPR		66310614	
COMPONENTS, EXCEPT AS NOTED				SCALE		CROSS REF NO	
RES	TOLERANCE	VALUE	RATING			SHEET / OF /	
CAP							


62949100 C

7-11

15632209	CONTROLLER 60 HZ
15632210	CONTROLLER 50 HZ
15632211	SLAVE 60 HZ
15632212	SLAVE 50 HZ

21602289512

SHEET REVISION STATUS		REVISION RECORD						
REV	ECO	DESCRIPTION	DRPT	DATE	CHKD	APP		
01	00	RELEASED CLASS 2						
01	01	REVISED PER ELO		WJG	17-80			
01	02	50986 P/N 33 WAS 91522017		WJG	11/80			
02	03	51072 CHANGE TITLE		WJG	3-3-80			
04	04	51128 ADD P/N'S 34, 35, 36		DS	5/19/80			
A	A	RELEASED CLASS A						
B	B	INACTIVE SERVICE USE ONLY SUPERSEDED BY 1563252715		WJG	9/1/80			

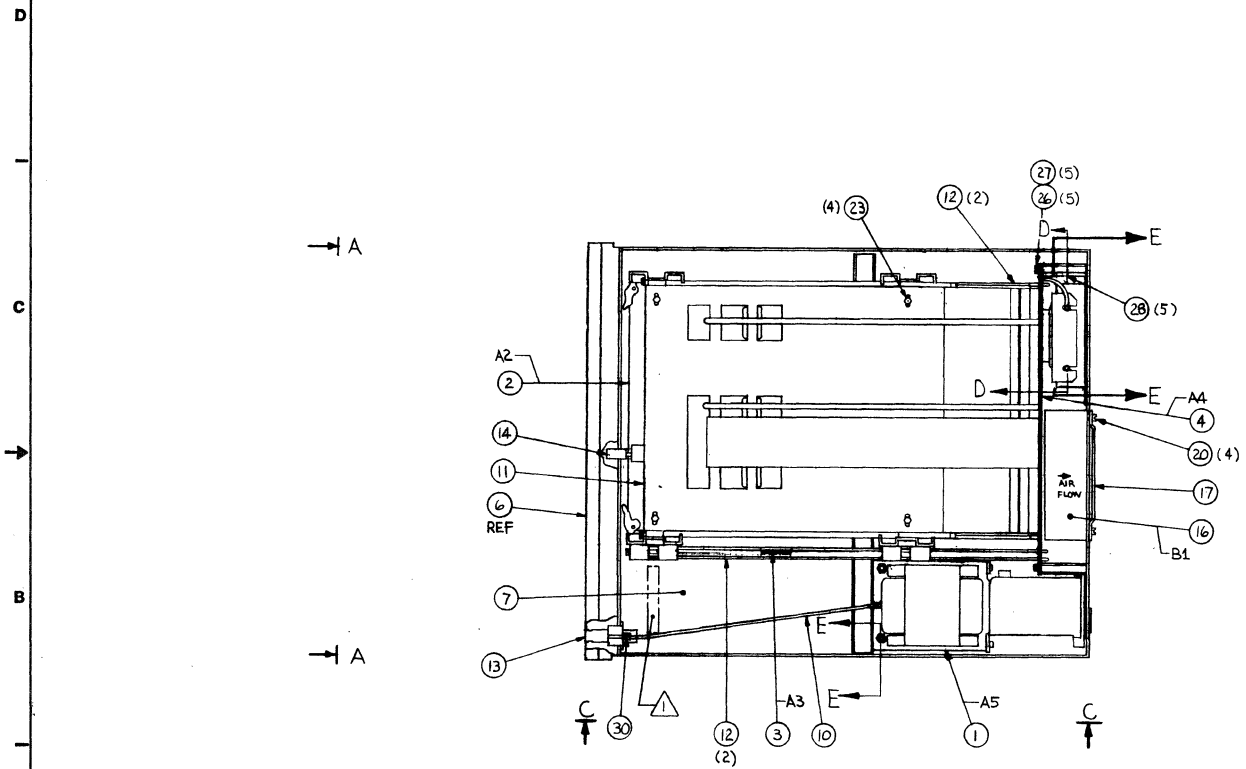

(TOP VIEW SHOWN WITH ITEMS 5, 8, 9, & 18 REMOVED)


- NOTES:
- 1. MARK "ASSY 156322XX" IN AREA SHOWN PER CDC SPEC 10121508.
 - 2. CONNECT SUBASSEMBLIES AS FOLLOWS:
 - PLUG A4P1 INTO A1J9
 - PLUG A4P2 INTO A1J4
 - PLUG A4P3 INTO A1J1
 - PLUG A4P4 INTO B1J1
 - PLUG A5P1 INTO A4J3

INACTIVE
METRIC

APL 15632209 THRU 15632212 DETACHED LIST	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC		TITLE	
	TOLERANCES	FINISH	PLATO FLEXIBLE DISK (TLA)	
	± PLANS	± PLANS	PROJECT NO.	FASO1
	± ANGLES	± ANGLES	DESIGNED BY	11/29/80
DO NOT SCALE DRAWING	DATE	APPROVED	10-25-79	15920
			22-2-80	D
			7-17-80	15632209 THRU 15632212
			7-2-80	DRAWING NO
				15632212
				SCALE 1/2
				SHEET 1 OF 2

PL160220912

REVISION RECORD					
REV	ECO	DESCRIPTION	DEFT	DATE	CHKD APP

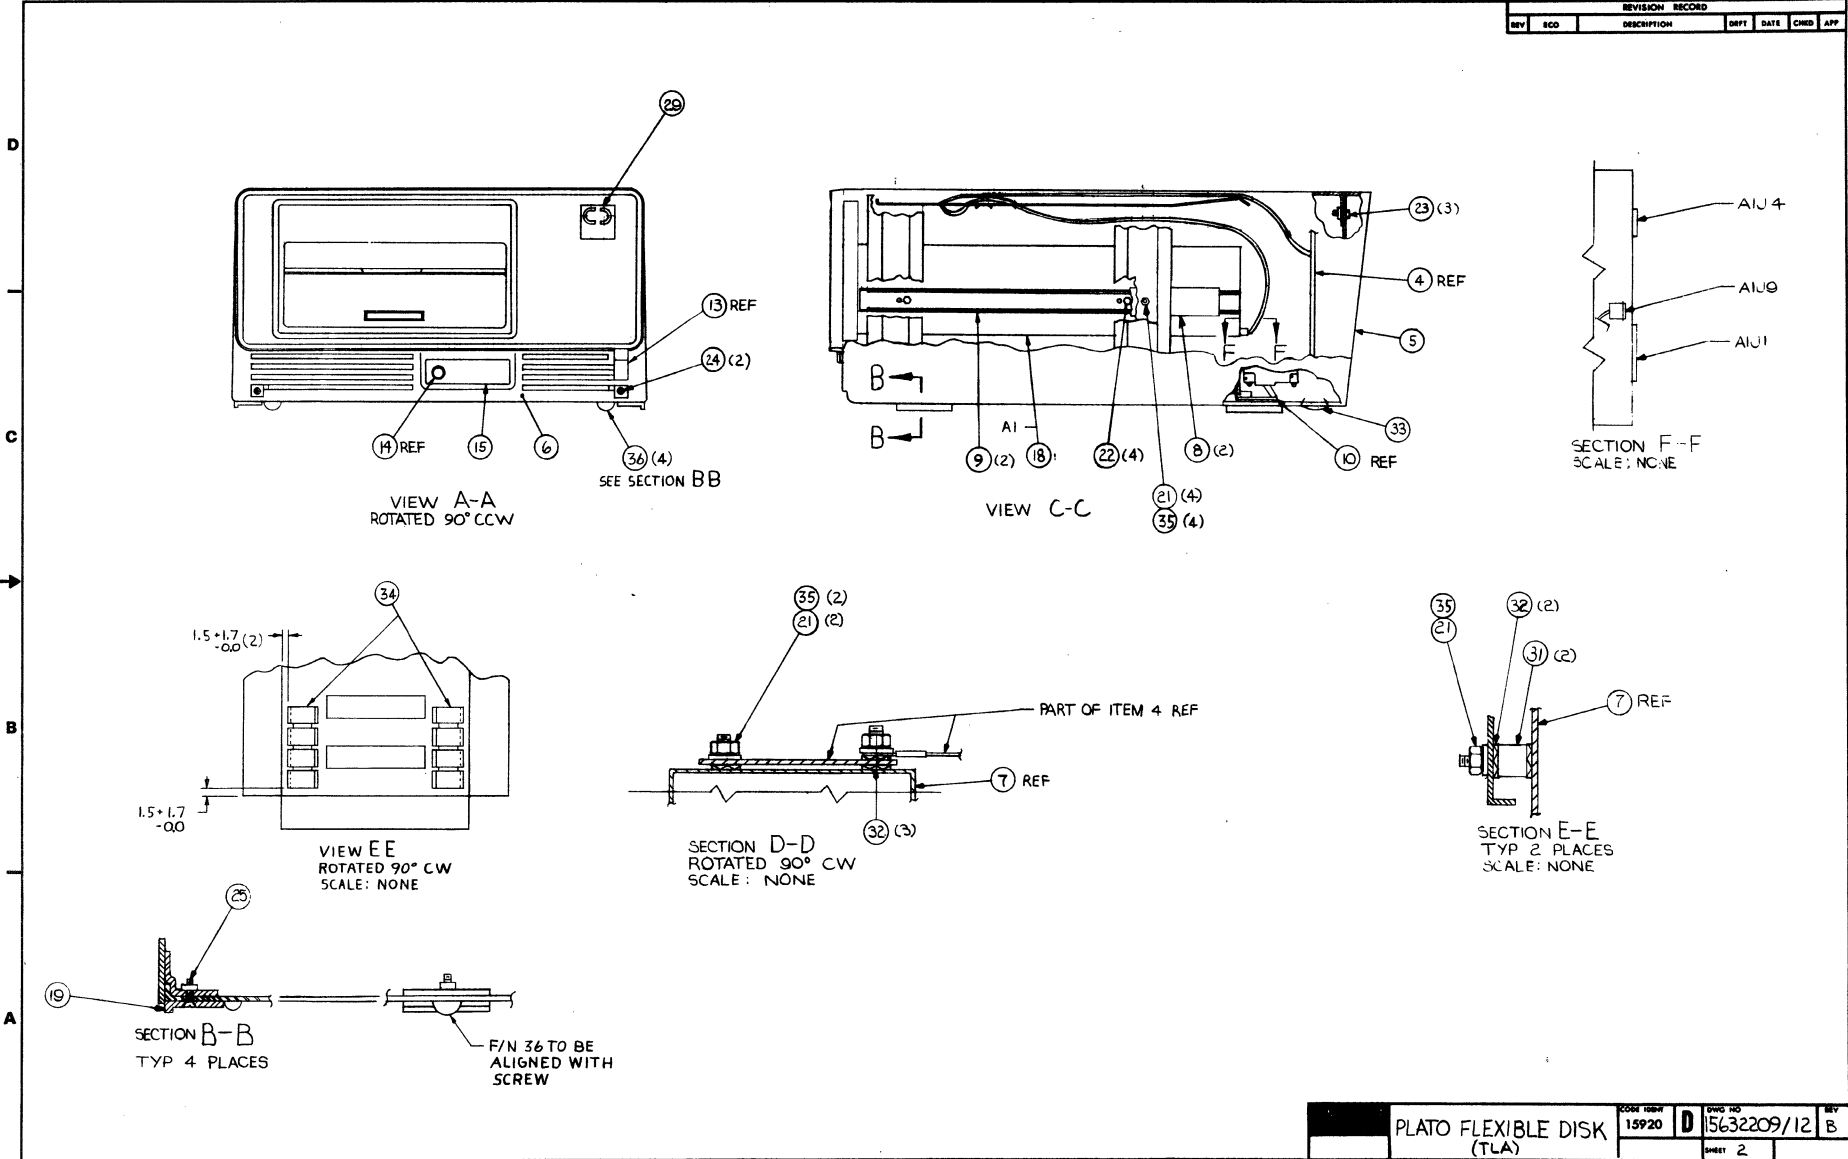

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
09-04-80	1	00014165

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
0860	15632209	1	B	D	REPLACED BY 15632572 14165	G	INA	09-04-80	FA501A	09-04-80		
TPIND NO	LI	PART NUMBER	CD	REV.	DESCRIPTION	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	66309318	5	1	PC REPLACED BY 61409021 14165	A						
002	01	90446124	1	1	PC CD ASSY 9BED DISK CONTR	S						
003	01	90446140	7	1	PC CD ASSY 9BKD PWR SPLY	A						
004	01	90446143	1	1	PC CD ASSY 9BMD BACKPLANE	A						
005	01	71493032	8	1	PC COVER METAL AL	P						
006	01	71493037	7	1	PC FACE PLATE (SM) PAINTED	P						
007	01	71493050	0	1	PC BASE METAL CRS	P						
008	01	71492950	2	2	PC TRACK DISK MTG	P						
009	01	71492951	0	2	PC SLIDE DISK MTG	P						
010	01	71492954	4	1	PC ROD ACTUATOR	P						
011	01	71492955	1	1	PC PANEL CABLE SUPPORT	P						
012	01	71492966	8	4	PC GUIDE CARD	P						
013	01	71493189	6	1	PC BUTTON, HINGED #PLATIC-BLK)	P						
014	01	71492968	4	1	PC BUTTON SWITCH	P						
015	01	71493053	4	1	PC PANEL SWITCH/INDICATOR	P						
016	01	51886600	9	1	PC FAN, 50CFM 115V 50/60HZ 1PH	P						
017	01	94375401	0	1	PC GUARD, FAN 50/60HZ	P						
018	01	77618000	2	1	PC FLOPPY DISK ASSY	V						
019	01	71493064	1	4	PC FOOT	P						
020	01	91976649	3	4	PC MSCR PAN PHL M4X40MM	B						
021	01	91975724	5	8	PC NUT HEXAGON SZ 5MM	B						

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
09-04-80	2	00014165

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
0860	15632209	1	B	D	REPLACED BY 15632572 14165	G	INA	09-04-80	FA501A	09-04-80		
TPIND NO	LI	PART NUMBER	CD	REV.	DESCRIPTION	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
022	01	15164911	8	4	PC MSCR HEX-LK PLN M4X8MM STL ZP	B						
023	01	15164917	5	7	PC MSCR HEX-LK PLN M5X8MM STL Z	B						
024	01	91976758	2	2	PC MSCR PNH M5X10MM	B						
025	01	91976864	8	4	PC MSCR MACH FLH M5X10MM	B						
026	01	91976652	7	5	PC MSCR PAN PHL M5X10MM	B						
027	01	91975706	2	5	PC WASHER LK METRIC M5	B						
028	01	71493078	1	5	PC STANDOFF HEX METRIC CRS	B						
029	01	51918435	2	1	PC EMBLEM, CDC ID	P						
030	01	51918188	7	1	PC SPG, COMP	P						
031	01	93109381	9	2	PC STOFF, NO. 1/4 .250L RD ZINC	B						
032	01	91975684	1	7	PC WSHR METRIC SZ 5 SCREW	B						
033	01	93522018	6	1	PC PLUG, SNAP BUTTON 1/4 DIA HO	P						
034	01	94374900	2	125	PC STRIP CONTACT	P						
035	01	09040204	1	8	PC WSHR, NO. 10 DISHED LOCK STL	B						
036	01	51805700	5	4	PC BUMPER SELF STICKING	P						
0036 TOTAL LINES												

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
09-08-80	1	00014165

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
0860	15632210	9	B	D	REPLACED BY 15632573 14165	G	INA	09-04-80	FA501B	09-08-80				
FIND NO	LI	PART NUMBER	CD	AM	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	66309319	3		1		PC REPLACED BY 61409022 14165	A						
002	01	90446124	1		1		PC CD ASSY 9BED DISK CONTR	S						
003	01	90446140	7		1		PC CD ASSY 9BKD PWR SPLY	A						
004	01	90446143	1		1		PC CD ASSY 9BMD BACKPLANE	A						
005	01	71493032	8		1		PC COVER METAL AL	P						
006	01	71493037	7		1		PC FACE PLATE (SM) PAINTED	P						
007	01	71493050	0		1		PC BASE METAL CRS	P						
008	01	71492950	2		2		PC TRACK DISK MTG	P						
009	01	71492951	0		2		PC SLIDE DISK MTG	P						
010	01	71492954	4		1		PC ROD ACTUATOR	P						
011	01	71492955	1		1		PC PANEL CABLE SUPPORT	P						
012	01	71492966	8		4		PC GUIDE CARD	P						
013	01	71493189	6		1		PC BUTTON, HINGED #PLATIC-BLK)	P						
014	01	71492968	4		1		PC BUTTON SWITCH	P						
015	01	71493053	4		1		PC PANEL SWITCH/INDICATOR	P						
016	01	51886600	9		1		PC FAN, 50CFM 115V 50/60HZ 1PH	P						
017	01	94375401	0		1		PC GUARD, FAN 50/60HZ	P						
018	01	77618000	2		1		PC FLOPPY DISK ASSY	V						
019	01	71493064	1		4		PC FOOT	P						
020	01	91976649	3		4		PC MSCR PAN PHL M4X40MM	B						
021	01	91975724	5		8		PC NUT HEXAGON SZ 5MM	B						

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
09-08-80	2	00014165

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
0860	15632210	9	B	D	REPLACED BY 15632573 14165	G	INA	09-04-80	FA501B	09-08-80				
FIND NO	LI	PART NUMBER	CD	AM	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
022	01	15164911	8		4		PC MSCR HEX-LK PLN M4X8MM STL ZP	B						
023	01	15164917	5		7		PC MSCR HEX-LK PLN M5X8MM STL Z	B						
024	01	91976758	2		2		PC MSCR PNH M5X10MM	B						
025	01	91976864	8		4		PC MSCR MACH FLH M5X10MM	B						
026	01	91976652	7		5		PC MSCR PAN PHL M5X10MM	B						
027	01	91975706	2		5		PC WASHER LK METRIC M5	B						
028	01	71493078	1		5		PC STANDOFF HEX METRIC CRS	B						
029	01	51918435	2		1		PC EMBLEM, CDC ID	P						
030	01	51918188	7		1		PC SPG, COMP	P						
031	01	93109381	9		2		PC STOFF, NO.1/4 .250L RD ZINC	B						
032	01	91975684	1		7		PC WSHR METRIC SZ 5 SCREW	B						
033	01	93522018	6		1		PC PLUG, SNAP BUTTUN i 1/4 DIA HO	P						
034	01	94374900	2		125		PC STRIP CONTACT	P						
035	01	09040204	1		8		PC WSHR, NO.10 DISHED LOCK STL	B						
036	01	51805700	5		4		PC BUMPER SELF STICKING	P						
							0036 TOTAL LINES							

BUILD ARC 440										ASSEMBLY PARTS LIST				PRINT DATE	PAGE	FILE CHANGE NO.
										REPLACED BY 15632574 14165				09-08-80	1	00014165
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION				MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	15632211	7	B	D					G	INA	09-04-80	BR810A	09-08-80			
TRFIND NO	LI	PART NUMBER	CD	AM	QUANTITY	U/M	PART DESCRIPTION			MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	66309318	5		1		PC	REPLACED BY 61409021 14165	A							
003	01	90446140	7		1		PC	CD ASSY 9BKD PWR SPLY	A							
004	01	90446143	1		1		PC	CD ASSY 9BMD BACKPLANE	A							
005	01	71493032	8		1		PC	COVER METAL AL	P							
006	01	71493037	7		1		PC	FACE PLATE (SM) PAINTED	P							
007	01	71493050	0		1		PC	BASE METAL CRS	P							
008	01	71492950	2		2		PC	TRACK DISK MTG	P							
009	01	71492951	0		2		PC	SLIDE DISK MTG	P							
010	01	71492954	4		1		PC	ROD ACTUATOR	P							
011	01	71492955	1		1		PC	PANEL CABLE SUPPORT	P							
012	01	71492966	8		2		PC	GUIDE CARD	P							
013	01	71493189	6		1		PC	BUTTON, HINGED #PLATIC-BLK)	P							
014	01	71492968	4		1		PC	BUTTON SWITCH	P							
015	01	71493054	2		1		PC	PANEL SWITCH INDICATOR	P							
016	01	51886600	9		1		PC	FAN, 50CFM 115V 50/60HZ 1PH	P							
017	01	94375401	0		1		PC	GUARD, FAN 50/60HZ	P							
018	01	77618000	2		1		PC	FLOPPY DISK ASSY	V							
019	01	71493064	1		4		PC	FOOT	P							
020	01	91976649	3		4		PC	MSCR PAN PHL M4X40MM	B							
021	01	91975724	5		8		PC	NUT HEXAGON SZ 5MM	B							
022	01	15164911	8		4		PC	MSCR HEX=LK PLN M4X8MM STL ZP	B							

BUILD ARC 440										ASSEMBLY PARTS LIST				PRINT DATE	PAGE	FILE CHANGE NO.
										REPLACED BY 15632574 14165				09-08-80	2	00014165
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION				MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	15632211	7	B	D					G	INA	09-04-80	BR810A	09-08-80			
TRFIND NO	LI	PART NUMBER	CD	AM	QUANTITY	U/M	PART DESCRIPTION			MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
023	01	15164917	5		7		PC	MSCR HEX=LK PLN MSX8MM STL Z	B							
024	01	91976758	2		2		PC	MSCR PNH MSX10MM	B							
025	01	91976864	8		4		PC	MSCR MACH FLH MSX10MM	B							
026	01	91976652	7		5		PC	MSCR PAN PHL MSX10MM	B							
027	01	91975706	2		5		PC	WASHER LK METRIC M5	B							
028	01	71493078	1		4		PC	STANDOFF HEX METRIC CRS	B							
029	01	51918435	2		1		PC	EMBLEM, CDC ID	P							
030	01	51918188	7		1		PC	SPG, COMP	P							
031	01	93109381	9		2		PC	STOFF, NO. 1/4 .250L RD ZINC	B							
032	01	91975684	1		7		PC	WSHR METRIC SZ 5 SCREW	B							
033	01	93522018	6		1		PC	PLUG, SNAP BUTTON 1/4 DIA HO	P							
034	01	94374900	2		125		PC	STRIP CONTACT	P							
035	01	09040204	1		8		PC	WSHR, NO. 10 DISHED LOCK STL	B							
036	01	51805700	5		4		PC	BUMPER SELF STICKING	P							
0035 TOTAL LINES																

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
09-08-80	1	00014165


DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
0860	15632212	5	B	D	REPLACED BY 15632575 14165	G	INA	09-04-80	BR810B	09-08-80				
FIND NO	LI	PART NUMBER	CD	REV.	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	66309319	3		1		PC REPLACED BY 61409022 14165	A						
003	01	90446140	7		1		PC CD ASSY 9BKD PWR SPLY	A						
004	01	90446143	1		1		PC CD ASSY 9BMD BACKPLANE	A						
005	01	71493032	8		1		PC COVER METAL AL	P						
006	01	71493037	7		1		PC FACE PLATE (SM) PAINTED	P						
007	01	71493050	0		1		PC BASE METAL CRS	P						
008	01	71492950	2		2		PC TRACK DISK MTG	P						
009	01	71492951	0		2		PC SLIDE DISK MTG	P						
010	01	71492954	4		1		PC ROD ACTUATOR	P						
011	01	71492955	1		1		PC PANEL CABLE SUPPORT	P						
012	01	71492966	8		2		PC GUIDE CARD	P						
013	01	71493189	6		1		PC BUTTON, HINGED #PLATIC-BLK)	P						
014	01	71492968	4		1		PC BUTTON SWITCH	P						
015	01	71493054	2		1		PC PANEL SWITCH INDICATOR	P						
016	01	51886600	9		1		PC FAN, 50CFM 115V 50/60HZ 1PH	P						
017	01	94375401	0		1		PC GUARD, FAN 50/60HZ	P						
018	01	77618000	2		1		PC FLOPPY DISK ASSY	V						
019	01	71493064	1		4		PC FOOT	P						
020	01	91976649	3		4		PC MSCR PAN PHL M4X40MM	B						
021	01	91975724	5		8		PC NUT HEXAGON SZ 5MM	B						
022	01	15164911	8		4		PC MSCR HEX-LK PLN M4X8MM STL ZP	B						

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
09-08-80	2	00014165

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
0860	15632212	5	B	D	REPLACED BY 15632575 14165	G	INA	09-04-80	BR810B	09-08-80				
FIND NO	LI	PART NUMBER	CD	REV.	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
023	01	15164917	5		7		PC MSCR HEX-LK PLN M5X8MM STL Z	B						
024	01	91976758	2		2		PC MSCR PNH M5X10MM	B						
025	01	91976864	8		4		PC MSCR MACH FLH M5X10MM	B						
026	01	91976652	7		5		PC MSCR PAN PHL M5X10MM	B						
027	01	91975706	2		5		PC WASHER LK METRIC M5	B						
028	01	71493078	1		5		PC STANDOFF HEX METRIC CRS	B						
029	01	51918435	2		1		PC EMBLEM, CDC ID	P						
030	01	51918188	7		1		PC SPG, COMP	P						
031	01	93109381	9		2		PC STOFF, NO. 1/4 .250L RD ZINC	B						
032	01	91975684	1		7		PC WSHR METRIC SZ 5 SCREW	B						
033	01	93522018	6		1		PC PLUG, SNAP BUTTON 1/4 DIA HO	P						
034	01	94374900	2		125		PC STRIP CONTACT	P						
035	01	09040204	1		8		PC WSHR, NO. 10 DISHED LOCK STL	B						
036	01	51805700	5		4		PC BUMPER SELF STICKING	P						
0035 TOTAL LINES														

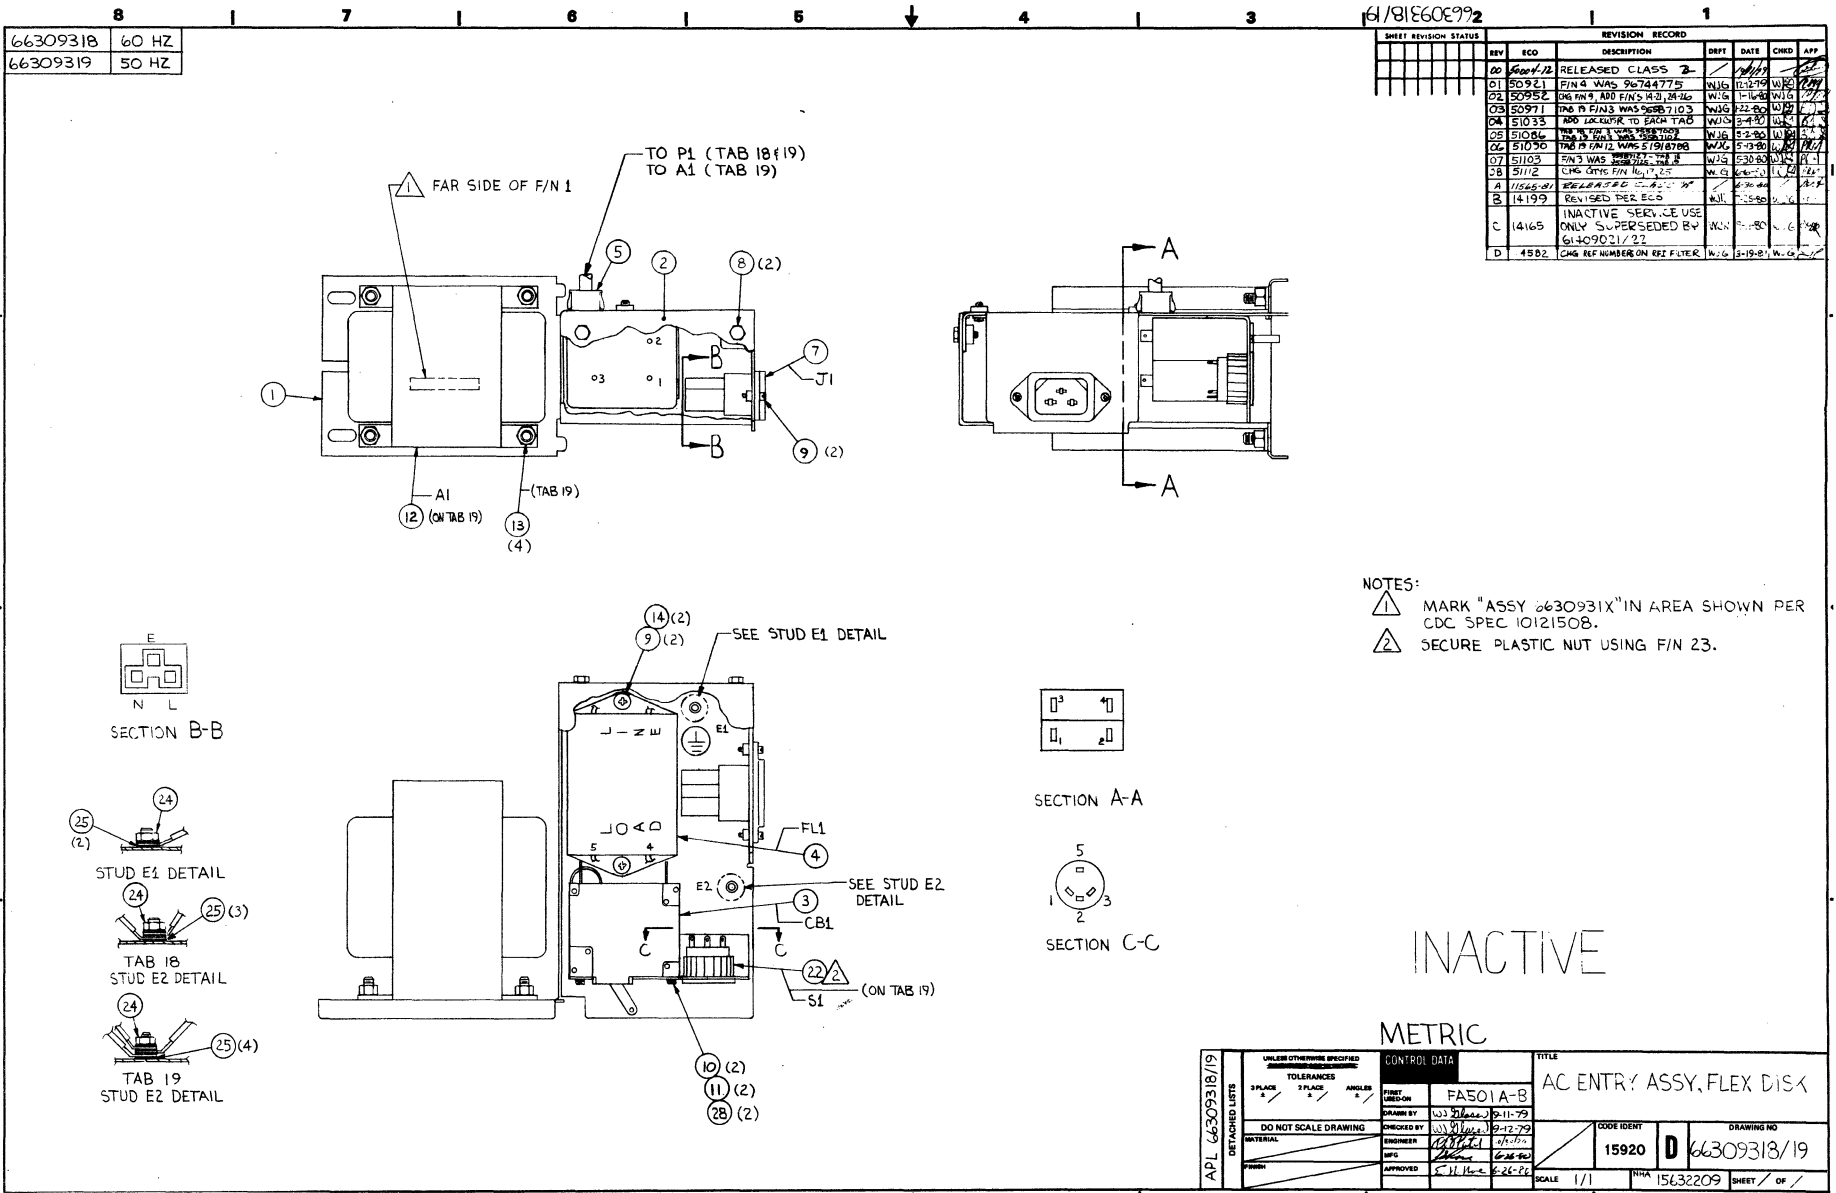

SHEET REVISION STATUS		REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	CHEK	APP	
00	66309318	RELEASED CLASS 2					
01	60921	F/N 4 WAS 96744775	WJG	10-19-79	WJG		
02	60952	CG F/N 4 ADD F/N'S 43, 2436	WJG	1-16-80	WJG		
03	60971	THE P F/N'S WAS 9687103	WJG	2-20-80	WJG		
04	61033	ADD LEADWR TO EACH TAB	WJG	3-4-80	WJG		
05	61046	TAB 18 F/N 1 WAS 9687102	WJG	3-20-80	WJG		
06	61090	TAB 18 F/N 2 WAS F1918789	WJG	5-23-80	WJG		
07	61103	F/N'S WAS 9687102, 282	WJG	5-30-80	WJG		
08	61112	CHG CTRIC F/N 10, 17, 25	WJG	6-10-80	WJG		
A	11545-01	RELEASED CLASS 2	WJG	6-30-80	WJG		
B	14199	REVISED PER EGS	WJG	7-28-80	WJG		
C	14165	INACTIVE SEE USE ONLY SUPERSEDED BY 61409021/22	WJG	7-30-80	WJG		
D	4582	CHG REF NUMBER ON REF F LITER	WJG	8-19-81	WJG		

NOTES:
 △ MARK "ASSY 6630931X" IN AREA SHOWN PER CDC SPEC 10121508.
 △ SECURE PLASTIC NUT USING F/N 23.

INACTIVE

METRIC

APL 66309318/19 DETACHED LISTS	UNLESS OTHERWISE SPECIFIED TOLERANCES PER ASME Y14.5			CONTROL DATA		TITLE	
	3 PLACE FRACTION	3 PLACE DECIMAL	ANGLES ±	FAST LINES ON DIMENSION	FA501 A-B	CODE IDENT	DRAWING NO
DO NOT SCALE DRAWING	ENGINEER	DESIGNED BY	DATE	19-12-79	15920	D	66309318/19
APPROVED	DATE	DATE	DATE	6-26-81	SCALE	1/1	N/A 15632209 SHEET / OF /

BUILD ARC 230

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-12-81	1	00014582

DIV	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE					
0860	66309318	5	D	D	REPLACED BY 61409021 14165	A	INA	09-04-80	FA501A	03-12-81					
Y	P	NO.	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
	001	01		71492952	8	1		PC BRACKET SWITCH/FILTER/XFORM	P						
	002	01		71492953	6	1		PC COVER SWITCH/FILTER	P						
	003	01		95587103	3	1		PC CB D-P 250 VAC 3 AMP	P						
	004	01		15164356	6	1		PC FILTER RFI	P						
	005	01		15012408	9	1		PC RSHG, SNAP-IN .500 M/H .38ID	B						
	007	01		44674034	2	1		PC CONN POWER RECEP	P						
	008	01		15164917	5	2		PC MSCR HEX-LK PLN M5X8MM STL Z	B						
	009	01		91976625	3	4		PC MSCR PAN PHL M3X6MM	B						
	010	01		10125803	6	2		PC WSHR, NO.6 SPG LOCK STL ZP	B						
	011	01		10127111	2	2		PC MSCR PAN PHL 6-32X.250 STL ZP	B						
	014	01		91975669	2	2		PC WSHR METRIC SCREW SZ 3	B						
	015	01		44674036	7	3		PC CONN PWR RECPT	P						
	016	01		51797218	8	4		PC LUG, NO.10 CRMP-R 22-18AWG	B		14199	14199		8030	
	016	02		51797218	8	3		PC LUG, NO.10 CRMP-R 22-18AWG	B					8030	
	017	01		24534707	5	249		FT SLVG, 3/16 HT/SHRINK BLK UL	B		14199	14199		8030	
	017	02		51758103	9	249		FT INS SLV+CLR,PVC HEAT SHRINK	B					8030	
	018	01		51906200	4	3		PC CONT, SKT 20-14GA .130IT STR	P						
	019	01		52810001	9	333		FT WIR 18GA STRD BRN 600V UL PVC	W		14199	14199		8030	
	019	02		52810001	9	458		FT WIR 18GA STRD BRN 600V UL PVC	W					8030	
	020	01		52810005	0	708		FT WIR 18GA STRD GRN 600V UL PVC	W		14199	14199		8030	
	020	02		52810005	0	833		FT WIR 18GA STRD GRN 600V UL PVC	W					8030	
	021	01		51906001	6	1		PC CONN, 3 SKT PLUG FIG 1 NYLON	P						
	024	01		91975724	5	2		PC NUT HEXAGON SZ 5MM	B						

BUILD ARC 230

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-12-81	2	00014582

DIV	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE					
0860	66309318	5	D	D	REPLACED BY 61409021 14165	A	INA	09-04-80	FA501A	03-12-81					
Y	P	NO.	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
	025	01		91975671	8	6		PC WASHER EX TOOTH SZ 5	B						
	026	01		61408888	8	REF		PC REPLACED BY 61409023 14165	D						
	027	01		52810006	8	417		FT WIR 18GA STRD BLU 600V UL PVC	W		14199			8030	
	028	01		10125605	5	2		PC WSHR, NO.6 TYP A PLN STL ZP	B		14199			8030	
								0027 TOTAL LINES							

BUILD ARC 230

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-12-81	1	00014582

QTY	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE					
0860		D	REPLACED BY 61409022 14165	A	INA	09-04-80	FA501B	03-12-81					
PRD NO.	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	71492952	8	1		PC BRACKET SWITCH/FILTER/XFORM	P						
002	01	71492953	6	1		PC COVER SWITCH/FILTER	P						
003	01	95587103	3	1		PC CB D-P 250 VAC 3 AMP	P						
004	01	15164356	6	1		PC FILTER RFI	P						
005	01	15012408	9	1		PC BSMG, SNAP-IN .500 M/H .38ID	B						
007	01	44674034	2	1		PC CONN POWER RECEP	P						
008	01	15164917	5	2		PC MSCR HEX-LK PLN M5X6MM STL Z	B						
009	01	91976625	3	4		PC MSCR PAN PHL M3X6MM	B						
010	01	10125803	6	2		PC WSHR, NO.6 SPG LOCK STL ZP	B						
011	01	10127111	2	2		PC MSCR PAN PHL 6-32X.250 STL ZP	B						
012	01	51918789	2	1		PC XFMR STEP DOWN 220/240V	P						
013	01	15165001	7	4		PC NUT METRIC HEX-LK M5	B						
014	01	91975669	2	2		PC WSHR METRIC SCREW SZ 3	B						
015	01	44674036	7	3		PC CONN PWR RECPT	P						
016	01	51797218	8	3		PC LUG, NO.10 CRMP-R 22-18AWG	B						
017	01	24534707	5	583	FT	SLVG, 3/16 HT/SHRINK BLK UL	B						8030
017	02	51758103	9	249	FT	INS SLV+CLR,PVC HEAT SHRINK	B	14199		14199		8030	
018	01	51906200	4	1		PC CONT, SKT 20-14GA .130IT STR	P						
019	01	52810001	9	250	FT	WIR 18GA STRD BRN 600V UL PVC	W						8030
019	02	52810001	9	458	FT	WIR 18GA STRD BRN 600V UL PVC	W	14199		14199		8030	
020	01	52810005	0	708	FT	WIR 18GA STRD GRN 600V UL PVC	W						8030
020	02	52810005	0	833	FT	WIR 18GA STRD GRN 600V UL PVC	W	14199		14199		8030	

BUILD ARC 230

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-12-81	2	00014582

QTY	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE					
0860		D	REPLACED BY 61409022 14165	A	INA	09-04-80	FA501B	03-12-81					
PRD NO.	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
022	01	51918969	0	1		PC SWITCH VOLTAGE SELECTOR	P						
023	01	51873600	4	001	OZ	VARNISH INSUL RED GLPT	B						
024	01	91975724	5	2		PC NUT HEXAGON SZ 5MM	B						
025	01	91975671	8	6		PC WASHER EX TOOTH SZ 5	B						
026	01	61408889	6	REF		PC REPLACED BY 61409024 14165	D						
028	01	10125605	5	2		PC WSHR, NO.6 TYP A PLN STL ZP	B	14199				8030	
029	01	51758101	3	188	FT	INS SLV CLR PVC HEAT SHRINK	B	14199				8030	
0029 TOTAL LINES													



PARTS DATA FOR PRODUCTION UNITS ONLY



DWN	W. Glaser	8/80	CONTROL DATA	TITLE	SPL 50/60 HZ PRIMARY FLEXIBLE DISK SUBSYSTEM	PREFIX	DOCUMENT NO.	REV.
CHKD	D. Land	8/70				SPL	66313407	N
ENG	J. H. H. H.	8/70		FIRST USED ON	FA501A-D			
MFG	J. H. H. H.	8/70		CODE IDENT	15920		SHEET	1 of 4
APPR	J. H. H. H.	8/70						

SHEET REVISION STATUS				REVISION RECORD						
4	3	2	1	REV	ECO	DESCRIPTION	DRFT	DATE	APP	
-	A	A	A	A	1275476	RELEASED CLASS A		9-3-80	WCH	
-	B	A	B	B	14292	ADD F/N 16	DS	9-80	JBR	
-	C	C	C	C	14376	REVISED PER ECO	EE	11/2/81	JAP	
-	D	D	D	D	14571	CHG F/N 1,12,17, DELETE NOTE 3	WJG 3-2-81	3-2-81	JAP	
-	E	D	E	E	14663	ADDED F/N 18	EE	7/16/81	JAP	
-	F	F	F	F	14838	ADDED F/N 19 AND NOTE 7	EE	11/2/81	UE	
-	F	G	G	G	14820	REVISED PER ECO	RT 11-3-81	11-81	JN	
-	H	H	H	H	14885	ADD FAS01K CONFIG	WJG 12-19-81	12-21-81	JAB	
-	J	J	J	J	14985	REVISED PER ECO	EE	1/14/82	JAB	
-	K	J	K	K	15771	CHANGED F/N 12 & 20	EE	3/14/83	JAB	
	L	L	L	L	15867	REVISED & ADDED 347 PER ECO	MD	5-18-83	JAB	
	L	M	L	M	16656	CHANGED F/N 9	EE	6/22/84	JAB	
	N	N	N	N	16873	REVISED PER ECO	MD	8-28-84	JAB	

NOTES: 1. Quantities shown are those used per equipment. Quantities used for FA501A are under Heading A. FA501B are under Heading B. FA501C are under Heading C. FA501D are under Heading D.

EQUIPMENT	EQUIPMENT CONFIGURATOR	TOP LEVEL ASSY
FA501A 60 HZ	15632205	15632572
FA501B 50 HZ	15632206	15632573
FA501C 60 HZ (CD110)	15632205	15632563
FA501D 50 HZ (CD110)	15632981	15632982

DETACHED LISTS

AA3180 REV. 8 71

PRINTED IN U.S.A.

 CONTROL DATA CORPORATION	CODE IDENT	SHEET	PREFIX	DOCUMENT NO.	REV.
	15920	2	SPL	66313407	N

NOTES:

- These parts are the total required for a unit with no options installed.
- The FA501A/B could have 3 RAM options of 8 RAM IC's for each option for a total of 32 RAM IC's in the unit. This is standard equipment for the FA501C/D.

4. Find Numbers 1 thru 7,17,26 and 27 are for the 9BED Controller Board.
5. Find Number 9 is the signal cable used to connect the Primary Flexible Disk Subsystem to the IST Terminal.
6. One of these devices is required on the last device on the Plato IST Parallel I/O channel daisy chain configuration.
7. Original production units were built with P/N 90446140. Current production units are built with P/N 90446443. These cards are interchangeable.

AA3180

PRINTED IN U.S.A.

CONTROL DATA		CODE IDENT		SHEET 4		SPL		DOCUMENT NO. 66313407		REV. N		
FIND NO.	PART IDENTIFICATION	QUANTITY REQUIRED								UNIT OF MEAS	NOMENCLATURE OR DESCRIPTION	SPECIFICATIONS, NOTES, OR MATERIAL
		A	B	C	D							
21	15165426	0	1	0	1						50 HZ POWER CORD	
22	61409022	0	1	0	1						AC ENTRY ASSY 50 HZ	USED ON SERIES CODES B02/DO1 AND LATER
23	51918789	0	1	0	0						STEP DOWN TRANSFORMER	USED ON SERIES CODES B01 ONLY
24	95587103	1	1	0	0						CIRCUIT BREAKER	USED ON SERIES CODES A01 AND B01 ONLY
25	15164356	1	1	0	0						LINE FILTER	USED ON SERIES CODES A01 AND B01 ONLY
26	66312072	0	0	1	1						2732 4KX8 CODE E-ROM	USED ON 9BED-4 ONLY
27	15123244	0	0	8	8						64KX1 DRAM	USED ON 9BED-4 ONLY
28	90446596	0	0	1	1						9BED-4 CONTROLLER BOARD	Interchangeable with F/N 20

AA3181 REV. 8/71

PRINTED IN U.S.A.

CONTROL DATA		CODE IDENT		SHEET 3		SPL		DOCUMENT NO. 66313407		REV. N		
FIND NO.	PART IDENTIFICATION	QUANTITY REQUIRED								UNIT OF MEAS	NOMENCLATURE OR DESCRIPTION	SPECIFICATIONS, NOTES, OR MATERIAL
		A	B	C	D							
1	66312070	1	1	1	1						2716 2KX8 ROM	USED ON 9BED-3 AND PRIOR
2	15153821	8	8	32	32						4116 16K RAM	USED ON 9BED-3 AND PRIOR
3	15163201	1	1	1	1						Z80 Processor	
4	15163444	1	1	1	1						FD1791 Disk Controller	
5	15163458	1	1	1	1						9517 DMA	
6	15163459	1	1	1	1						9519 Interrupt Cont.	
7	15164429	1	1	1	1						Z80A-CTC	
8	15165425	1	0	1	0						60HZ Power Cord	
9	51942451	1	1	1	1						25 Pin I/O Cable	
10	96837907	1	1	1	1						Circuit Breaker	
11	77618000	1	1	1	1						Flexible Disk Assembly	
12	90446570	1	1	0	0						9BED-3 Controller Board	
13	90446140	REF	REF	0	0						9BKD Power Supply	
14	90446143	1	1	1	1						9BMD Backplane	
15	15632316	1	1	1	1						F116A Terminator	
16	61409021	1	0	1	0						AC Entry Assy 60 HZ	USED ON SERIES CODES A02/CO1 AND LATER
17	66312071	1	1	1	1						2716 2KX8 Rom	USED ON 9BED-3 AND PRIOR
18	71493364	1	1	1	1						SCR Shoulder Nylon	
19	90446443	1	1	1	1						1AFD Power Supply	Interchangeable with F/N 13
20	90446571	0	0	1	1						Controlled Board w/Full Memory	Interchangeable with F/N 28

AA3181 REV. 8/71

PRINTED IN U.S.A.

DWN	W. Glaser	8/80	CONTROL DATA	TITLE	SPL 50 HZ	PREFIX	DOCUMENT NO.	REV.
CHKD	D. [unclear]	8-80		PRIMARY	FLEXIBLE DISK SUBSYSTEM	SPL	66313408	K
ENG	J. [unclear]	7-2-80		FIRST USED ON				
MFG	[unclear]	4-3-80						
APPR	S. H. [unclear]	8-3-80	CODE IDENT	FA501B/D			SHEET 1 of 3	
	[unclear]	9-3-80	15920					

SHEET REVISION STATUS				REVISION RECORD						
3	2	1	REV	ECO	DESCRIPTION	DRFT	DATE	APP		
	A	A	A	A	12754-76	RELEASED CLASS "A"		2-3-80	act	
	B	B	B	B	14376	REVISED PER ECO	EE	1/12/81	jaif	
	C	C	C	C	14571	CHG F/N 1,13,17, DELETE NOTE 3	WJG 3-2-81	3-2-81		
	L	C	D	D	14663	ADDED F/N 18	EE	7/16/81	EE	
	E	E	E	E	14838	ADDED F/N 19 AND NOTE 7	EE	10/12/81	EE	
	E	F	F	F	14820	REVISED PER ECO	WJG 11-3-81	11-6-81	EE	
	G	G	G	G	14885	ADD FA501D CONFIG	WJG 12-21-81	12-21-81	WJG	
	H	H	H	H	14985	REVISED PER ECO	EE	1/2/82	WJG	
	J	H	J	J	15771	CHANGED F/N 13 & 20	EE	3/11/83	WJG	
	K	K	K	K	15867	INACTIVE, SERVICE USE ONLY, SUPERSEDED BY 66313407	MD	5/11/83	WJG	

INACTIVE

NOTES: 1. Quantities shown are those used per equipment. Quantities used for FA501B are under Heading A. Quantities used for FA501D are under Heading B.

EQUIPMENT	EQUIPMENT CONFIGURATOR	TOP LEVEL ASSY
FA501B 50 HZ	15632206	15632573
FA501D 50 HZ (CD110)	15632981	15632982

DETACHED LISTS

AA318C REV. 8 71

PRINTED IN U.S.A.

	CODE IDENT	SHEET 2	PREFIX	DOCUMENT NO.	REV.
	15920		SPL	66313408	K

NOTES:

- These parts are the total required for a unit with no options installed.
- The FA501B could have 3 RAM options of 8 RAM IC's for each option for a total of 32 RAM IC's in the unit. This is standard equipment for the FA501D.
4. Fine Numbers 1 thru 7 and 17 are for the 98ED Controller Board.

5. Find Number 10 is the signal cable used to connect the Primary Flexible Disk Subsystem to the IST Terminal.

6. One of these devices is required on the last device on the PLATO IST Parallel I/O Channel daisy chain configuration.

7. Original production units were built with P/N 90446140. Current production units are built with P/N 90446443. These cards are interchangeable.

AA318B


PRINTED IN U.S.A.

CONTROL DATA			CODE IDENT 15920		SHEET 3		DOCUMENT NO. 66313408		REV.			
FIND NO.	PART IDENTIFICATION	QUANTITY REQUIRED								UNIT OF MEAS	NOMENCLATURE OR DESCRIPTION	SPECIFICATIONS, NOTES, OR MATERIAL
		A	B									
1	66312070	1	1								2716 2KXB ROM	△4
2	15153821	8	32								4116 16K RAM	△4
3	15163201	1	1								Z80 Processor	△4
4	15163444	1	1								FD1791 Disk Controller	△4
5	15163458	1	1								9517 DMA	△4
6	15163459	1	1								9519 Interrupt Cont.	△4
7	15164429	1	1								Z80A-CTC	△4
8	15165426	1	1								50HZ Power Cord	
9	61409022	1	1								AC Entry Assy	
10	61408865	1	1								25 pin I/O Cable	△5
11	96837907	1	1								Circuit Breaker	
12	77618000	1	1								Flexible Disk Assy	
13	90446570	1	0								9BED-3 Controller Board	
14	90446140	REF	REF								9BKD Power Supply	△7
15	90446143	1	1								9BMD Backplane	
16	15632316	1	1								FT116A Terminator	△6
17	66312071	1	1								2716 2KX8 Rom	△4
18	71493364	1	1								SCR Shoulder Nylon	
19	90446443	1	1								1AFD Power Supply	Interchangable with F/N 14
20	90446571	0	1								Controller Board	W/Full Memory

AA2181 REV. 8/71

PRINTED IN U.S.A.

DWN	W. Glaser	8/80	CONTROL DATA	TITLE	60 HZ	PREFIX	DOCUMENT NO.	REV.				
CHKD	D. Saab	8/80		SPL	SECONDARY FLEXIBLE DISK	SPL	66313409	E				
ENG	J. P. Kelly	8/80		FIRST USED ON								
MFG	J. P. Kelly	8/80		BR810A			SHEET	1 of 3				
APPR	E. H. H. H.	9-3-80	CODE IDENT									
	AK H. H. H.	9/9/80	15920									
SHEET REVISION STATUS					REVISION RECORD							
				3	2	1	REV	ECO	DESCRIPTION	DRFT	DATE	APP
				A	A	A	A	12754-76	RELEASED CLASS 'A'	/	9-3-80	Met
				B	A	B	B	14292	ADD F/N 7	DS	9-80	STW
				C	C	C	C	14838	ADDED F/N 8 AND NOTE 3	EE	11-2-81	RLH
				D	C	D	D	14820	REVISED PER ECO	Re 11-3-81	11-6-81	RLH
				E	E	E	E	14999	F/N 8 WAS 90446290	EE	2/18/82	RLH
NOTES:												
EQUIPMENT CONFIGURATOR - 15632207												
TOP LEVEL ASSEMBLY ----- 15632574												
												DETACHED LISTS

 CONTROL DATA CORPORATION	CODE IDENT	SHEET	PREFIX	DOCUMENT NO.	REV.
	15920	2	SPL	66313409	E
NOTES: <ol style="list-style-type: none"> These parts are the total required for a unit with no options installed. Find number 2 is the Signal Cable used to connect the BR810A or BR810B to the FAS01A or FAS01B. Original production units were built with P/N 90446140. Current production units are built with P/N 90446443. These cards are interchangeable. 					
A43185 PRINTED IN U.S.A.					


DWN	W. Glaser	8/80	CONTROL DATA	TITLE	50 HZ	PREFIX	DOCUMENT NO.	REV.
CHKD	D. Bond	8-80		SPL SECONDARY FLEXIBLE DISK		SPL	66313410	D
ENG	E. J. Bond	8/80		FIRST USED ON				
MFG		8-80		BR810B				SHEET 1 of 3
APPR	E. J. Bond	8-80	CODE IDENT					
		8/80	15920					

SHEET REVISION STATUS										REVISION RECORD					
3	2	1	REV	ECO	DESCRIPTION	DRFT	DATE	APP							
A	A	A	A	12754-76	RELEASED CLASS "A"	/	9-3-80	Net							
B	B	B	B	14838	ADDED FN 8 AND NOTE 3	EE	10/24/81	EE							
C	B	C	C	14820	REVISED PER ECO	ET 11-3-81	11-3-81	Net							
D	D	D	D	14999	FN 8 WAS 90446290	EE	2/10/82	Net							

NOTES:
EQUIPMENT CONFIGURATOR - 15632208
TOP LEVEL ASSEMBLY ----- 15632575

DETACHED LISTS

443180 REV. 8 71


	CODE IDENT	SHEET 2	PREFIX	DOCUMENT NO.	REV.
	15920		SPL	66313410	D

NOTES:

- These parts are the total required for a unit with no options installed.
- Find number 3 is the Signal Cable used to connect the BR810A or BR810B to the FA501A or FA501B.
- Original production units were built with P/N 90446140. Current production units are built with P/N 90446443. These cards are interchangeable.

62949100 M

7-29

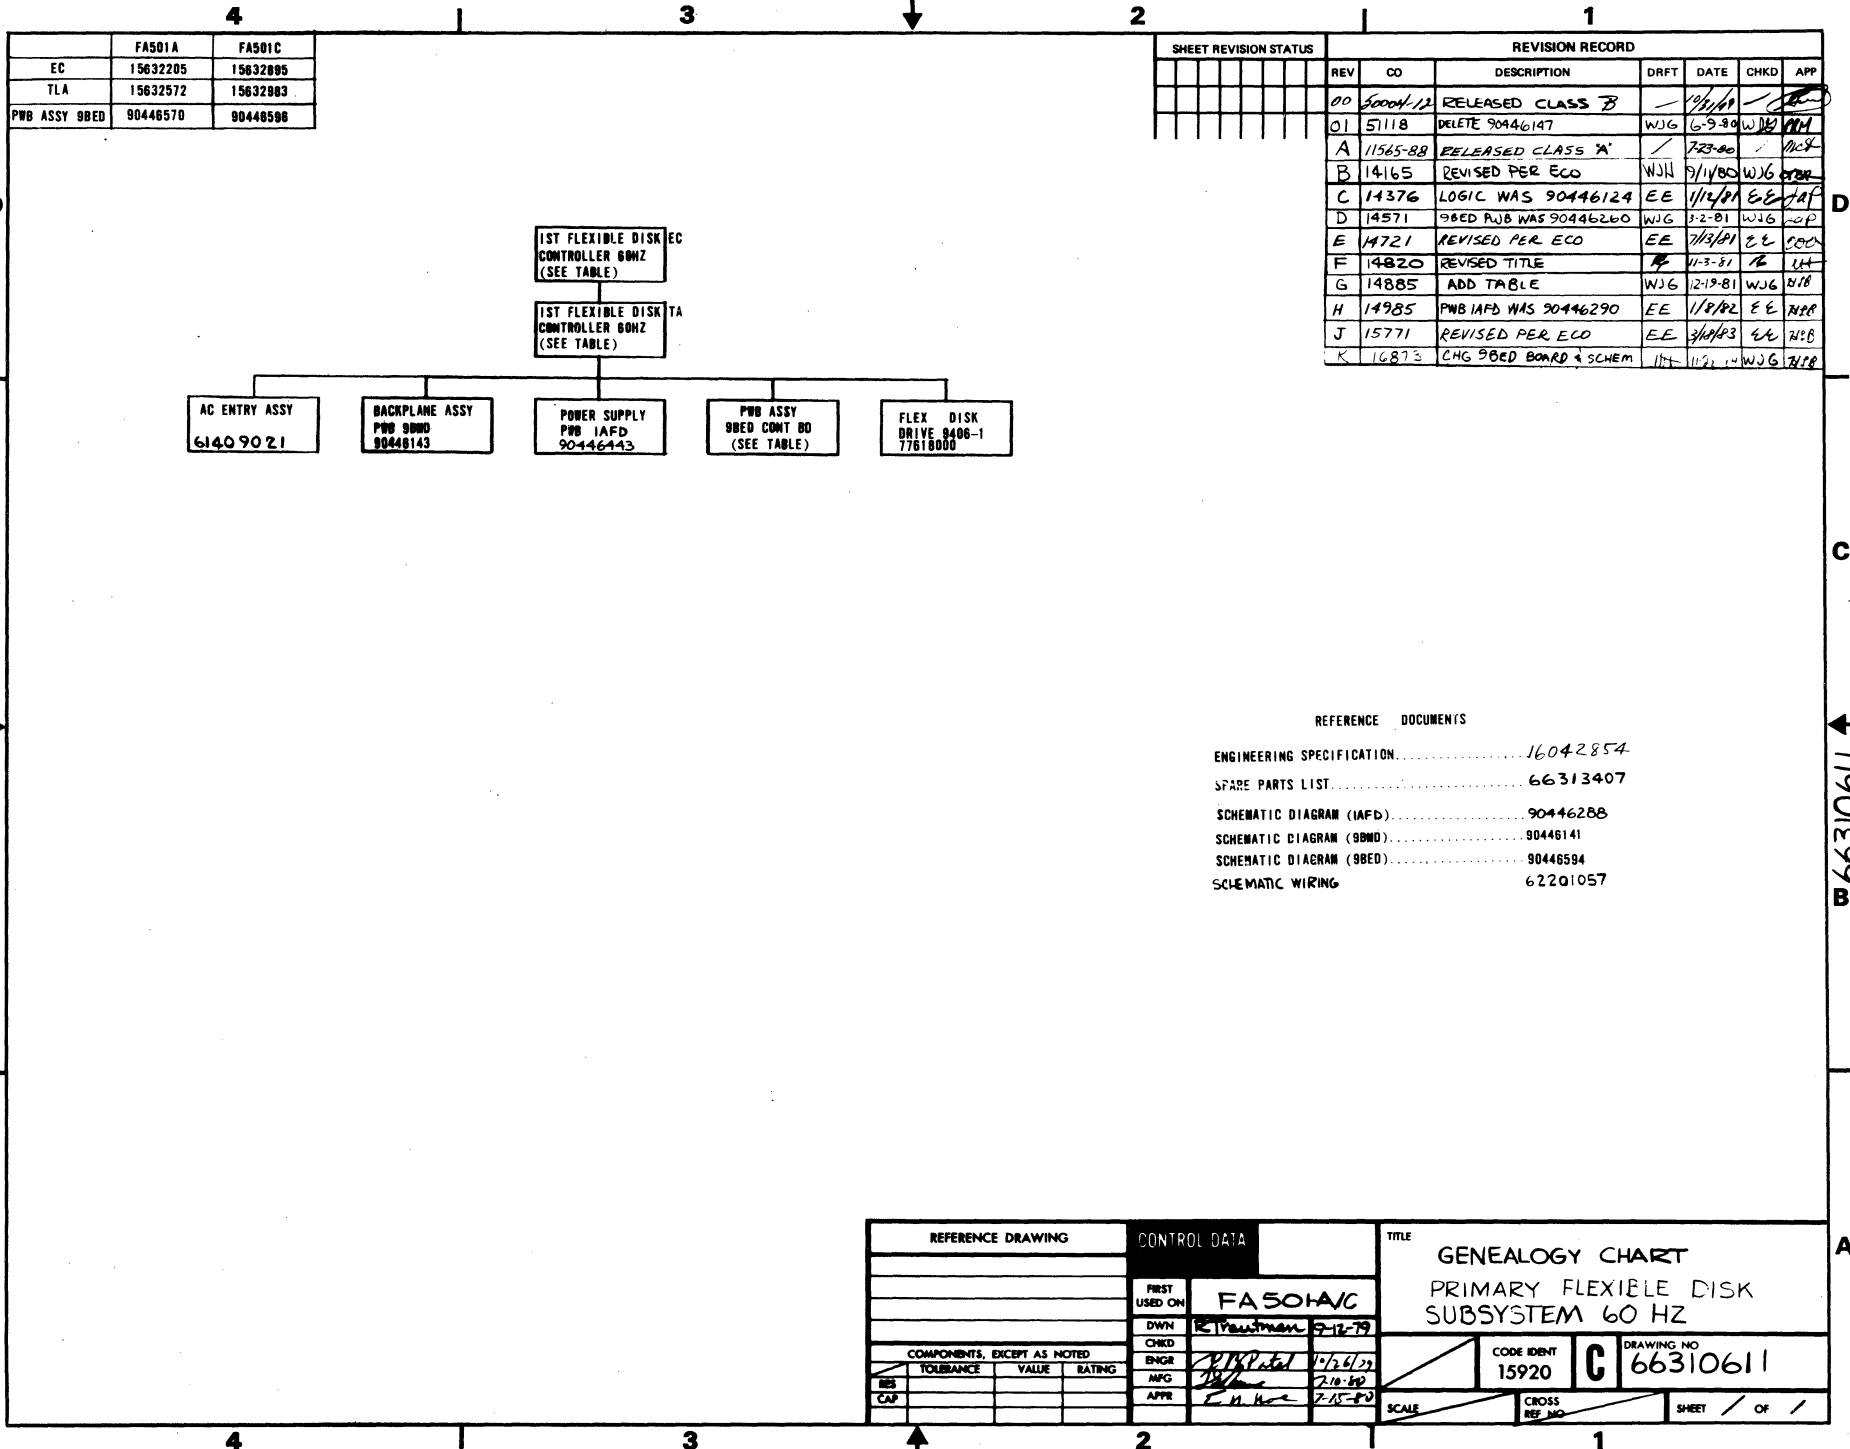

	FA501A	FA501C
EC	15632205	15632895
TLA	15632572	15632983
PWB ASSY 9BED	90446570	90446596

SHEET REVISION STATUS		REVISION RECORD				
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP
00	9004-12	RELEASED CLASS B		7/2/81		
01	5118	DELETE 90446147	WJG	6-9-80	WJG	WJG
A	11565-88	RELEASED CLASS 'A'		7-23-80		WJG
B	14165	REVISED PER ECO	WJH	9/14/80	WJG	WJG
C	14376	LOGIC WAS 90446124	EE	11/2/81	EE	JAF
D	14571	9BED PWB WAS 90446260	WJG	3-2-81	WJG	WJG
E	14721	REVISED PER ECO	EE	7/13/81	EE	WJG
F	14820	REVISED TITLE	WJG	11-3-81	WJG	WJG
G	14885	ADD TABLE	WJG	12-19-81	WJG	WJG
H	14985	PWB 1AFD WAS 90446290	EE	1/8/82	EE	WJG
J	15771	REVISED PER ECO	EE	3/18/83	WJG	WJG
K	16873	CHG 9BED BOARD & SCHEM	WJG	11-21-83	WJG	WJG


REFERENCE DOCUMENTS

ENGINEERING SPECIFICATION.....	16042854
SPARE PARTS LIST.....	66313407
SCHEMATIC DIAGRAM (1AFD).....	90446288
SCHEMATIC DIAGRAM (9BND).....	90446141
SCHEMATIC DIAGRAM (9BED).....	90446594
SCHEMATIC WIRING.....	62201057

REFERENCE DRAWING	CONTROL DATA	TITLE
	FIRST USED ON	GENEALOGY CHART
	DWN	PRIMARY FLEXIBLE DISK SUBSYSTEM 60 HZ
	CHKD	REVISIONS 9-12-79
	ENGR	7/25/83
	MFG	2-10-80
	APP	7-15-80
COMPONENTS, EXCEPT AS NOTED		CODE IDENT
TOLERANCE	VALUE	RATING
RES		
CAP		
SCALE		CROSS REF NO
SHEET		OF

	FA501B	FA501D
EC	15632206	15632981
TLA	15632573	15632982
PWB ASSY 9BED	90446570	90446596

SHEET REVISION STATUS		REVISION RECORD					
REV	CO	DESCRIPTION	DFT	DATE	CHKD	APP	
00	5004-12	RELEASED CLASS B	/	10/1/79	/	[Signature]	
01	5118	DELETE 90446147	WJG	6-9-80	WJG	PRM	
02	5117Z	SPL WAS 6630892Z	WJG	7-22-80	WJG	PRM	
A	11565-88	RELEASED CLASS A	/	7-23-80	/	[Signature]	
B	14165	REVISED PER ECO	WJH	9/11/80	WJG	[Signature]	
C	14376	LOGIC WAS 90446124	EE	11/2/81	EE	[Signature]	
D	14571	9BED PWB WAS 90446260	WJG	3-2-81	WJG	[Signature]	
E	14721	REVISED PER ECO	EE	7/13/81	EE	[Signature]	
F	14820	REVISED PER ECO	R	11-3-81	R	[Signature]	
G	14885	ADD TABLE	WJG	12-19-81	WJG	[Signature]	
H	14985	PWB IAFD WAS 90446290	EE	1/8/82	EE	[Signature]	
J	15771	REVISED PER ECO	EE	3/14/83	EE	[Signature]	
K	15867	REVISED PER ECO	MD	5-18-83	MD	[Signature]	
L	16873	CHG 9BED BOARD & SCHEM	MD	11-28-84	WJG	[Signature]	

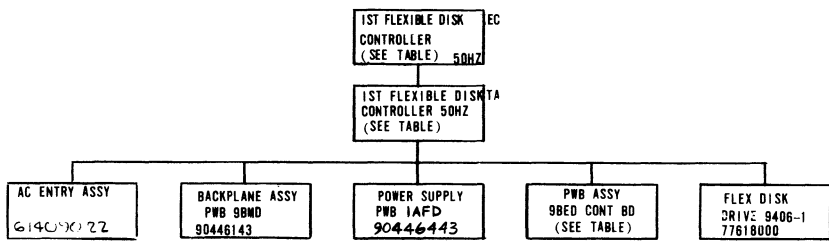

REFERENCE DOCUMENTS

ENGINEERING SPECIFICATION.....	16042854
SPARE PARTS LIST.....	66313407
SCHEMATIC DIAGRAM IAFD.....	90446288
SCHEMATIC DIAGRAM 9BMD.....	90446141
SCHEMATIC DIAGRAM 9BED.....	90446594
SCHEMATIC WIRING.....	62201057

REFERENCE DRAWING		CONTROL DATA		TITLE	
		FIRST USED ON		GENEALOGY CHART	
		FA501B/D		PRIMARY FLEXIBLE DISK	
		DWN		SUBSYSTEM 50 HZ	
		R. Trautman 9-12-79			
		CHRD			
		ENGR			
		MFG			
		APPR			
COMPONENTS, EXCEPT AS NOTED				CODE IDENT	
RES	TOLERANCE	VALUE	RATING	15920	
CAP				DRAWING NO	
				66310613	
				SCALE	
				CROSS REF NO	
				SHEET / OF /	

66310613

62949100 G

C

B

A

7-31


4

3

2

1

SHEET REVISION STATUS				REVISION RECORD					
REV	CO	DESCRIPTION	DRFT	DATE	CHKD	APP			
00	5000412	RELEASED CLASS B		7/8/79					
01	51118	DELETE 90446147	WJG	6-9-80	WJG	WJG			
A	11565-88	RELEASED CLASS 'A'		7-23-80					
B	14165	REVISED PER ECO	WJG	9/11/80	WJG	WJG			
C	14721	REVISED PER ECO	EE	7/13/81	EE	EE			
D	14820	REVISED PER ECO	W	11-3-81	W	W			
E	14985	PWB IAFD WAS 90446290	EE	1/1/82	EE	EE			

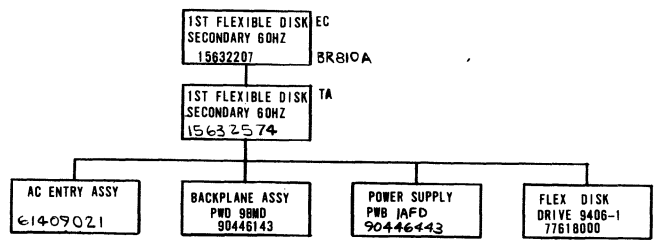

REFERENCE DOCUMENTS

- ENGINEERING SPECIFICATION..... 16042854
- SPARE PARTS LIST..... 66313409
- SCHEMATIC DIAGRAM (IAFD)..... 90446288
- SCHEMATIC DIAGRAM (98MD)..... 90446141
- SCHEMATIC WIRING..... 62201057

D

C

B

A

66310612

REFERENCE DRAWING			CONTROL DATA			TITLE GENEALOGY CHART SECONDARY FLEXIBLE DISK DRIVE 60HZ		
COMPONENTS, EXCEPT AS NOTED			FIRST USED ON	BRB10A		CODE IDENT		DRAWING NO
RES	TOLERANCE	VALUE	CHKD	R. Vautman 7-12-79		15920	C	66310612
CAP			ENGR	M. J. [Signature] 5-26-80				
			MFG	[Signature] 7-10-80				
			APPR	H. [Signature] 7-15-80				
SCALE						CROSS REF. NO.		SHEET / OF /

4

3


2

1

7-32

62949100 G

SHEET REVISION STATUS				REVISION RECORD				
REV	CD	DESCRIPTION	DRFT	DATE	CHKD	APP		
00	5000-12	RELEASED CLASS B		11/1/79				
01	51118	DELETE 90446147	WJG	6-9-80	WJG			
02	51172	SPL WAS 66308920	WJG	7-22-80	WJG			
A	11565-88	RELEASED CLASS A		7-27-80		Act		
B	14 05	REVISED PER ECO	WJG	7-1-80	WJG			
C	14721	REVISED PER ECO	EE	7/3/81	EE			
D	14820	REVISED PER ECO	R	11-3-81	R			
E	14985	PWB IAFD WAS 90446290	EE	1/8/82	EE		N-5	

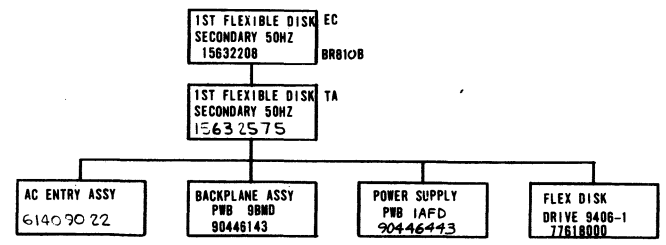

REFERENCE DOCUMENTS

- ENGINEERING SPECIFICATION.....16042854
- SPARE PARTS LIST.....1-1-810
- SCHEMATIC DIAGRAM (IAFD).....90446288
- SCHEMATIC DIAGRAM (9BMD).....90446141
- SCHEMATIC WIRING.....8226.057

REFERENCE DRAWING			CONTROL DATA		TITLE GENEALOGY CHART SECONDARY FLEXIBLE DISK DRIVE 50HZ		
COMPONENTS, EXCEPT AS NOTED			FIRST USED ON	BR810B		CODE IDENT	DRAWING NO.
RES	TOLERANCE	VALUE	DWN	E. Proutman 9-12-79		15920	C 66310614
CAP			CHKD	J. H. New 7-15-80			
			ENGR	J. H. New 7-15-80			
			MFG	J. H. New 7-15-80			
			APPR	J. H. New 7-15-80			
SCALE						CROSS REF. NO.	SHEET / OF /

66310614

15632572	PRIMARY	60 HZ
15632573	PRIMARY	50 HZ
15632574	SECONDARY	60 HZ
15632575	SECONDARY	50 HZ

SHEET REVISION STATUS		REVISION RECORD					
NO.	REV.	ECO.	DESCRIPTION	DRPT.	DATE	CHKD.	APP.
A	A		RELEASED CLASS A				
B	B	1432 B	C/F/N 29, ADD F/N 37, D/L J	WJG	11-10-81	WJG	
C	C	1437 G	D/L CHANGE ONLY	EE	11/21/81	EE	
D	D	1439 I	REVISED PER ECO	WJG	11/21/81	WJG	
E	E	1444 A	REVISED PER ECO	EE	11/21/81	EE	
F	F	1457 I	W/G F/N 2 C/D 28 72, 173	WJG	3-2-81	WJG	
G	G	14507	ADD FREQUENCY CONVERSION	DS	3-12-81	DS	
H	H	1459 I	ADD F/N 44, 45	DS	3-24-81	DS	
J	J	14535	ADD F/N 46, C/F/N 38, 9, 37	WJG	4-27-81	WJG	
K	K	14663	REVISED PER ECO	EE	11/11/81	EE	
L	L	14732	D/L W/G ONLY	WJG	8-26-81	WJG	
M	M	4820	REVISED PER ECO	WJG	11-3-81	WJG	
N	N	14855	REVISED PER ECO	EE	11-15-81	EE	
P	P	14985	D/L CHANGE ONLY	EE	11/22/81	EE	
R	R	14984	D/L CHANGE ONLY	RH	11-22-81	RH	
T	T	15289	REVISED PER ECO	PKK	11-22-81	PKK	
U	U	15786	REVISED PER ECO	WJG	3-22-81	WJG	
V	V	15771	D/L CHANGE ONLY	EE	11/21/81	EE	
W	W	15812	REVISE F/N 14	WJG	4-5-81	WJG	
Y	Y	16410	UPGRADE PARTS, F/N 50 ADDED, W/G	EE	1/15/82	EE	


FREQUENCY CONVERSION PROCEDURE

THIS PROCEDURE IS TO BE USED TO CONVERT THE F50 UNIT FROM 60 HZ OPERATION TO 50 HZ OPERATION OR VICE VERSA. THIS IS ACCOMPLISHED BY REVERSING THE DUAL-DIAMETER REVERSIBLE PULLEY ON THE SPINDLE-MOTOR SHAFT USING THE FOLLOWING STEPS:


- 1 REMOVE AC POWER
- 2 DISCONNECT I O CABLE FROM J1
- 3 DISCONNECT HARNESS FROM CONNECTORS ON PRINTED-CIRCUIT BOARD
- 4 REMOVE TWO SCREWS FROM PRINTED-CIRCUIT BOARD ADJACENT TO CONNECTOR J1
- 5 REMOVE PRA BY DETACHING IT FROM THE FOUR PUSH-IN CLIPS
- 6 REMOVE THE BELT FROM THE SPINDLE-MOTOR PULLEY (ACCESSIBLE FROM THE UNDER SIDE OF THE UNIT)
- 7 LOOSEN SETSCREW AND REMOVE PULLEY
- 8 REVERSE PULLEY AND REPLACE ON THE MOTOR SHAFT
- 9 POSITION PULLEY ALLOWING TOLERANCE OF 0.050 IN (1.29 mm) ±0.010 (0.254 mm) BETWEEN SHOULDER OF MOTOR MOUNTING SCREWS AND PULLEY
- 10 TIGHTEN DOWN SETSCREW
- 11 REPLACE BELT
- 12 TO REPLACE PRINTED-CIRCUIT BOARD PUSH CLIPS THROUGH PRINTED-CIRCUIT BOARD
- 13 REPLACE TWO SCREWS ADJACENT TO CONNECTOR J1
- 14 RECONNECT HARNESS AND I O CABLE

CAUTION

IT IS IMPORTANT THAT THE NEW OPERATING FREQUENCY BE MARKED ON THE UNIT'S RATING NAMEPLATE. USE A 3/8 INCH x 3/8 INCH CURVED LABEL. REMARK THE UNIT'S RATING NAMEPLATE WITH THE CORRECT FREQUENCY.



DRIVE-PULLEY REVERSAL

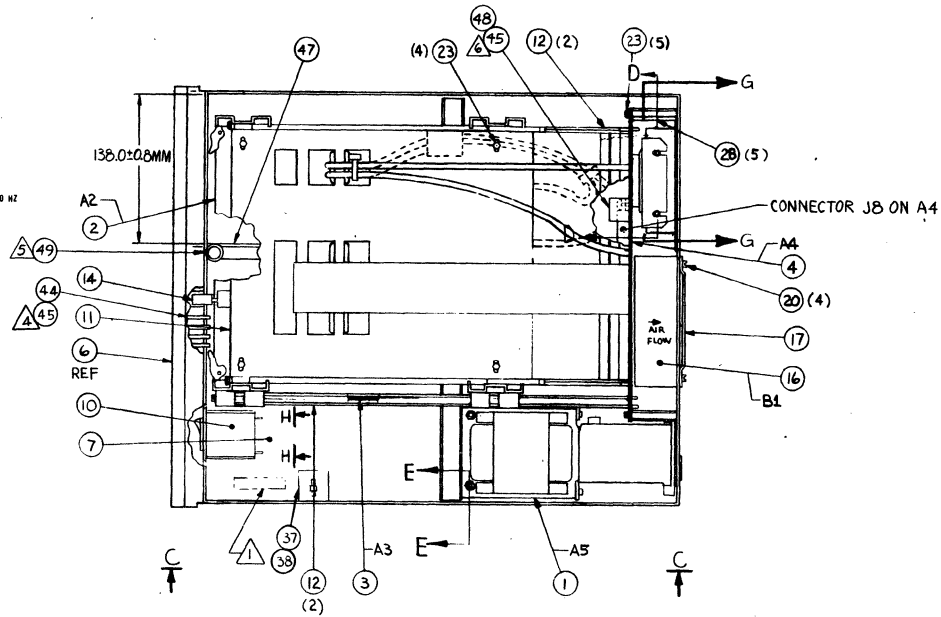

(TOP VIEW SHOWN WITH ITEMS 5, 8, 9, & 18 REMOVED)


NOTES:

- 1 MARK "ASSY 1563257X" IN AREA SHOWN PER CDC SPEC 1012150B.
- 2 CONNECT SUBASSEMBLIES AS FOLLOWS:
PLUG A4P1 INTO AJ9
PLUG A4P2 INTO AJ4
PLUG A4P3 INTO AJ1
PLUG A4P4 INTO BJ1
PLUG A5P3 INTO AJ3
- 3 MARK NO'S ONLY PER CDC SPEC 1012150B, .12 HIGH, WHITE, IN LOCATION APPROX AS SHOWN.
- 4 OPTIC RODS (F/N 44) TO BE INSTALLED FROM BACK OF FACE PLATE (F/N 6). INSTALL RODS UNTIL THEY ARE FLUSH WITH FRONT OF FACE PLATE, THEN APPLY VERY SMALL AMOUNT (LESS THAN A DROP) OF ADHESIVE (F/N 45) AROUND EACH ROD, ON BACKSIDE OF FACE PLATE. WIPE OFF EXCESS.
- 5 TIGHTEN SCREW F/N 49 BY HAND, DO NOT USE ANY TOOLS.
- 6 APPLY ONE DROP OF ADHESIVE (F/N 45) BETWEEN GUIDE (F/N 48) AND CONNECTOR (JB) MOUNTING TAB. WIPE OFF ANY EXCESS THAT MAY APPEAR AFTER INSTALLATION.


METRIC

APL 15632572 THRU 15632575 DETACHED LISTS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCH			CONTROL DATA		TITLE	
	PLATE	TOLERANCES	FINISH	ITEM	FAS01A/B		
	DO NOT SCALE DRAWING	ENGINEER	CHECKED BY	DATE	15632572 THRU 15632575		
	APPROVED	DATE	SCALE	1/2	DRAWING NO. 15632572 THRU 15632575		
				CODE IDENT	15920	D	15632205/08
				SHEET	1		OF 2


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	CHKD APP

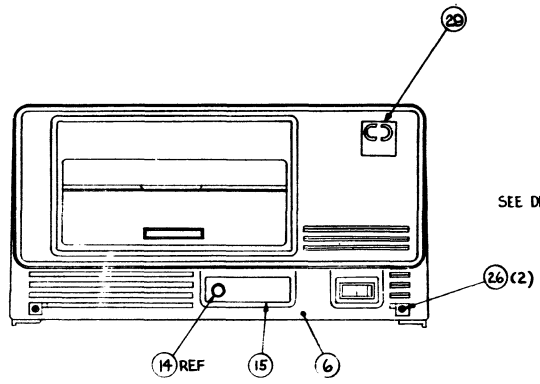


VIEW A-A
ROTATED 90° CCW

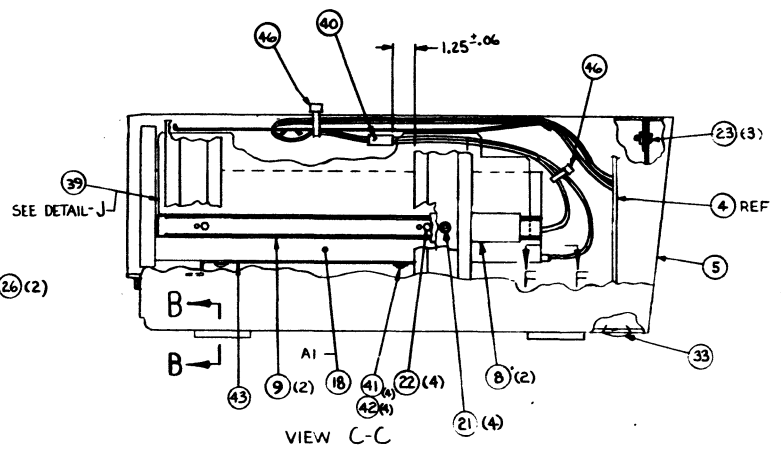


VIEW C-C




SECTION F-F
SCALE: NONE




VIEW G-G
ROTATED 90° CW
SCALE: NONE

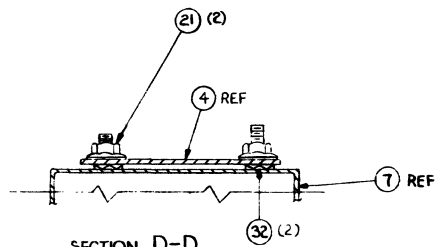


SECTION D-D
ROTATED 90° CW
SCALE: NONE




SECTION E-E
TYP 2 PLACES
SCALE: NONE



SECTION B-B
TYP 4 PLACES



VIEW H-H
SCALE: NONE



DETAIL - J
SCALE: NONE

PLATO FLEXIBLE DISK (TLA)	FORM 15920	D	15632572/75	REV
	2			

BUILD APC 440

ASSEMBLY PARTS LIST

										PRINT DATE	PAGE	REV CHANGE NO.		
										12-19-83	1	00016410		
QTY	ASSEMBLY NUMBER	CD	REV	DWG	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. DESP.	PLT DATE				
0360	15632572		Y	D	FD SBS, PRIMARY 60HZ (TA)	G	REL	09-03-83	FA501A	12-19-83				
PHO NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WE IN	WE OUT	
001	01	61409021	5	1		PC AC ENTRY, FLEX DISK 60HZ	A							
002	03	90446284	3	1		PC REPLACED BY 90446970 15771	N		14571	15771		8113	8314	
002	04	90446570	5	1		PC CD ASSY 9REN-1	N		15771			8314		
003	03	90446441	4	1		PC PC CD ASSY 1AFD	A		14995			8209		
004	01	90446141	1	1		PC CD ASSY 9BMD BACKPLANE	A							
005	01	71423032	4	1		PC COVER METAL AL	P							
004	01	71423185	4	1		PC FACE PLATE	P							
007	01	71423185	4	1		PC BASE	P							
005	02	71423795	1	2		PC TRACK DISK MTG	P		14539			8143		
007	02	71423796	5	2		PC SLIDE DISK MTG	P		14539			8143		
010	01	96837907	3	1		PC CKT BRKR MAGNETIC 3.0 AMPS	P							
011	01	71422955	1	1		PC PANEL CABLE SUPPORT	P							
012	01	71422966	4	4		PC GUIDE CARD	P							
014	02	71422966	4	1		PC BUTTON SWITCH	P		15812	15812		8321	8321	
014	03	61409606	3	1		PC SWITCH BUTTON ASSY	N					8321		
015	01	71423055	2	1		PC PANFL SWITCH IND	P							
014	01	51886400	0	1		PC FAN, 50CFM 1PH 115VAC 57/60HZ	P							
017	01	94375401	0	1		PC GUARD, FAN 50/60HZ	P							
018	01	77618000	2	1		PC FLEX DISK DRV, 9406 2-SIDED	P							
019	02	71493350	4	4		PC FOOT	P		14853			8147		
020	01	91976649	3	4		PC MSCR PAN PHL MAX40MM STL ZP	B							
021	01	91975724	5	8		PC NUT, HEX M5 STL ZP	B		15786			8320		

BUILD APC 440

ASSEMBLY PARTS LIST

										PRINT DATE	PAGE	REV CHANGE NO.		
										12-17-83	2	00016410		
QTY	ASSEMBLY NUMBER	CD	REV	DWG	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. DESP.	PLT DATE				
0360	15632572		Y	D	FD SBS, PRIMARY 60HZ (TA)	G	REL	09-03-83	FA501A	12-19-83				
PHO NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WE IN	WE OUT	
021	02	15165001	7	8		PC NUT, HEX/FLG-LK M5 STL ZP	R		15786			8320		
022	01	15164911	4	4		PC MSCR HEX/W-LK PLN MAX8MM STL	B							
023	02	15164917	5	12		PC MSCR HEX/W-LK PLN M5X8MM STL	B		15289			8238		
025	01	91976864	4	4		PC MSCR FLT PHL M5X10MM STL ZP	B							
026	02	91976657	7	2		PC MSCR PAN PHL M5X10MM STL ZP	B		15289			8238		
028	01	71493078	1	5		PC STANDOFF HEX METRIC CRS	P							
027	03	51918435	2	1		PC EMBLEM, CDC ID	P		14742			8136		
031	01	93109381	2	2		PC STOFF, NO. 1/4 .250L RD ZINC	P							
032	01	91975684	1	6		PC WSHR, M5 EXT/T SST PASS	B			15786		8320	8320	
032	02	91975671	4	6		PC WSHR, M5 EXT/T SPG-STL ZP	R		15786			8320		
033	01	93522018	4	1		PC PLUG, SNAP BUTTON 1 1/4 DIA HD	P							
034	01	94374900	2	125		PC STRIP CONTACT	P							
035	01	09040204	1	8		PC WSHR, NO. 10 DISHED LOCK STL	B			15786		8320		
037	01	62044200	4	1		PC CLAMP-CABLE ADHESIVE RACK	R							
038	04	94277400	1	1		PC STRAP, CBL TIE TYP-1 TO 5/8	R		14539			8143		
037	02	71493794	4	1		PC SHIELD	P		14539			8143		
040	02	94952302	1	1		PC CLIP, CORD TYP-1 NYL 404-BACK	P		14747A			8136		
041	01	10127103	9	4		PC MSCR PAN PHL 4-40X.312 STL ZP	B		14454			8041		
042	01	10126400	0	4		PC WSHR, 1/4 EXT/T LK STL ZP	B		14454			8041		
043	01	71493769	6	1		PC SHIELD	P		14454			8041		
044	01	71423797	7	4		PC ROD OPTIC	P		14591			8114		

BUILD APC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
12-17-93	3	00016410

REV.	ASSEMBLY NUMBER	CD	REV.	QTY.	DESCRIPTION	REV.	STATUS	STATUS DATE	ENG. DESP.	FILE DATE			
0060	15632972	2	Y	D	FD SBS, PRIMARY 60HZ (1A)	G	REL	07-03-80	FA901A	12-19-83			
PHONO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	REV.	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WE IN	WE OUT
045	01	94850711	6		001	OZ SEAL, EASTMAN (010)	B		14591	16410		8114	8403
045	02	95033915	0		001	OZ BONDING AGENT ETHYL 102	B		16410			8403	
046	01	94277411	8	7		PC STRAP, CBL TIF TYP-1 TO 1-1/8	B		14539A			8133	
047	01	71493354	6	1		PC RAIL SUPPORT PC CD	P		14663			8133	
048	01	71493360	7	1		PC GUIDE-PC COMM	P		14663			8133	
049	01	71493364	5	1		PC SCREW SHLDR NYLON	P		14663			8133	
050	01	91976507	3	1		PC HSCR PAN SLT HEXAGON NYL NAT	B		14663	16410		8133	8403
						0050 TOTAL LINES							

BUILD APC 440

ASSEMBLY PARTS LIST

PRINT DATE		PAGE		FILE CHANGE NO.									
12-19-83		1		0016410									
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	15632573	U	Y	D	FD SBS, PRIMARY 50HZ (TA)	G	REL	09-03-80	FA501B	12-19-83			
FIND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WE IN	WE OUT
001	01	61409022	7	1		PC AC ENTRY, FLEX DISK 50HZ	A						
002	03	90446284	7	1		PC REPLACED BY 90446570 15771	N	14571	15771			8113	8314
002	04	90446570	7	1		PC CD ASSY 98ED-3	N	15771				R314	
003	03	90446443	7	1		PC PC CD ASSY 1AFD	A	14985				8209	
004	01	90446143	1	1		PC CD ASSY 98MD BACKPLANE	A						
005	01	71493032	7	1		PC COVER METAL AL	P						
006	01	71493185	4	1		PC FACE PLATE	P						
007	01	71493188	7	1		PC BASE	P						
008	02	71493295	1	2		PC TRACK DISK MTG	P	14539				R143	
009	02	71493296	9	2		PC SLIDE DISK MTG	P	14539				R143	
010	01	76837907	7	1		PC CKT BRKP MAGNETIC 3.0 AMPS	P						
011	01	71492955	1	1		PC PANEL CABLE SUPPORT	P						
012	01	71492966	7	4		PC GUIDE CARD	P						
014	02	71492968	4	1		PC BUTTON SWITCH	P		15912			R321	8321
014	03	61409606	7	1		PC SWITCH BUTTON ASSY	N	15812				R321	
015	01	71493055	7	1		PC PANEL SWITCH 1MD	P						
016	01	51886600	9	1		PC FAN, 50CFM 1PH 115VAC 57/60HZ	P						
017	01	94375401	0	1		PC GUARD, FAN 50/60HZ	P						
019	01	77618000	7	1		PC FLEX DISK DRV, 7476 2-SIDED	P						
019	02	71493350	4	4		PC FOOT	P	14853				R147	
020	01	91976640	7	4		PC MSCR PAN PHL M4X40MM STL ZP	B						
021	01	91975724	7	7		PC NUT, HEX M5 STL ZP	B		15786				8320

BUILD APC 440

ASSEMBLY PARTS LIST

PRINT DATE		PAGE		FILE CHANGE NO.									
12-19-83		2		0016410									
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	15632573	U	Y	D	FD SBS, PRIMARY 50HZ (TA)	G	REL	09-03-80	FA501B	12-19-83			
FIND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WE IN	WE OUT
021	02	15165001	7	8		PC NUT, HEX/FLG-LK M5 STL ZP	B	15786				8320	
022	01	15164911	7	4		PC MSCR HEX/W-LK PLN M4X8MM STL	B						
023	02	15164917	7	12		PC MSCR HEX/W-LK PLN M5X8MM STL	B	15289				R238	
025	01	91976864	7	4		PC MSCR FLT PHL M5X10MM STL ZP	B						
026	02	91976652	7	2		PC MSCR PAN PHL M5X10MM STL ZP	B	15299				R238	
028	01	71493078	1	7		PC STANDOFF HEX METRIC CRS	P						
029	03	51918435	7	1		PC EMBLEM, CDC ID	P	14742				R136	
031	01	93109381	9	2		PC STOFF, NO.1/4 .250L RD ZINC	P						
032	01	91975684	1	6		PC WSHR, M5 EXT/T SST PASS	B		15786			R320	8320
032	02	91975671	0	6		PC WSHR, M5 EXT/T SPG-STL ZP	B	15786				R320	
033	01	93522018	6	1		PC PLUG, SNAP BUTTON 1 1/4 DIA HD	P						
034	01	74374900	7	125		PC STRIP CONTACT	P						
035	01	09040704	1	8		PC WSHR, NO.10 DISHED LOCK STL	B		15786			8320	
037	01	62044700	4	1		PC CLAMP-CABLE ADHESIVE BACK	B						
038	04	74277400	1	1		PC STRAP, CBL TIE TYP-1 TO 9/8	B	14539				R143	
039	02	71493294	4	1		PC SHIELD	P	14539				R143	
040	02	94952302	1	1		PC CLIP, CORD TYP-3 NYL AD4-BACK	P	14742A				R136	
041	01	10127103	9	4		PC MSCR PAN PHL 4-40X.312 STL ZP	R	14454				R041	
042	01	10126400	0	4		PC WSHR, (4) EXT/T LK STL ZP	B	14454				R041	
043	01	71493269	6	1		PC SHIELD	P	14454				R041	
044	01	71493297	7	4		PC RND OPTIC	P	14591				R114	

BUILD APC 440

ASSEMBLY PARTS LIST

PRINT DATE: 12-17-83
 PAGE: 3
 PRE CHANGE NO.: 0016410

DEV.	ASSEMBLY NUMBER	CD	REV.	QTY.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. DESP.	PRE DATE			
0860	15632573	0	Y	D	FD SBS, PRIMARY 50HZ (TA)	G	REL	07-03-80	FA5018	12-19-83			
LINE NO.	LT	PART NUMBER	CD	QUANTITY	U/R	PART DESCRIPTION	MC	YLD	DCO. NO. IN	DCO. NO. OUT	S/N	WH IN	WH OUT
045	01	94850711	A	001	02	SEAL, EASTMAN (910)	B		14591	16410		8114	8403
045	02	95033915	0	001	02	BONDING AGENT ETHYL 132	B		16410			8403	
046	01	94277411	0	2		PC STRAP, CBL TIE TYP-1 TO 1-1/8	B		14539A			8133	
047	01	71493354	A	1		PC RAIL SUPPORT PC CD	P		14663			8133	
048	01	71493360	1	1		PC GUIDE-PC CONN	P		14663			8133	
049	01	71493364	4	1		PC SCREW SHLDR NYLON	P		14663			8133	
050	01	91976507	1	1		PC WSCR PAN SLT MAX10MM NYL NAT	B		14663	16410		8133	8403
0050 TOTAL LINES													

ASSEMBLY PARTS LIST

QTY	REV.	ASSEMBLY NUMBER	CD	REV.	QTY	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. DESP.	FILE DATE		
0360		15632574	B	Y	D	FD SBS, SECONDARY 60HZ (TA)	G	REL	09-03-80	BR810A	12-19-83		
ITEM NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YTD	ECO. NO. IN	ECO. NO. OUT	S/N	WE IN	WE OUT
001	01	61409021	5	1		PC AC ENTRY, FLEX DISK 60HZ	A						
003	03	90446443	5	1		PC PC CD ASSY 1AFD	A		14995			R209	
004	01	90446143	1	1		PC CD ASSY 98MD BACKPLANE	A						
005	01	71493037	R	1		PC COVER METAL AL	P						
005	01	71493185	4	1		PC FACE PLATE	P						
007	01	71493188	R	1		PC BASE	P						
008	02	71493295	1	2		PC TRACK DISK MTG	P		14539			R143	
009	02	71493296	9	2		PC SLIDE DISK MTG	P		14539			R143	
010	01	96837907	3	1		PC CRT BRKR MAGNETIC 3.0 AMP	P						
011	01	71492955	1	1		PC PANEL CABLE SUPPORT	P						
012	02	71492966	R	4		PC GUIDE CARD	P		14994			R204	
014	01	71492968	4	1		PC BUTTON SWITCH	P			15912			R321
015	01	71493054	2	1		PC PANEL SWITCH INDICATOR	P						
016	01	51806600	9	1		PC FAN, 90CFM 1PH 115VAC 57/60HZ	P						
017	01	94375401	0	1		PC GUARD, FAN 90/60HZ	P						
018	01	77618000	2	1		PC FLEX DISK DRV, 9406 2-SIDED	P						
019	02	71493350	4	4		PC FOOT	P		14853			R147	
020	01	91976649	1	4		PC NSCR PAN PHL MAX40MM STL ZP	B						
021	01	91975724	5	8		PC NUT, HEX M5 STL ZP	B			15786		R320	R320
021	02	15165001	7	R		PC NUT, HEX/FLG-LK M5 STL ZP	R		15786			R320	
022	01	15164911	R	4		PC NSCR HEX/M-LK PLN MAX39MM STL	R						

ASSEMBLY PARTS LIST

QTY	REV.	ASSEMBLY NUMBER	CD	REV.	QTY	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. DESP.	FILE DATE		
0860		15632574	B	Y	D	FD SBS, SECONDARY 60HZ (TA)	G	REL	09-03-80	BR810A	12-19-83		
ITEM NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YTD	ECO. NO. IN	ECO. NO. OUT	S/N	WE IN	WE OUT
023	02	15164917	5	12		PC NSCR HEX/M-LK PLN MAX38MM STL	B		15289			R238	
025	01	91976664	R	4		PC NSCR FLT PHL MAX10MM STL ZP	B						
026	02	91976652	7	2		PC NSCR PAN PHL MAX10MM STL ZP	B		15289			R238	
028	01	71493078	1	4		PC STANDOFF HEX METRIC CRS	P						
029	03	51918435	2	1		PC EMBLEM, CDC ID	P		14742			R136	
031	01	93109381	9	2		PC STUFFING, 1/4" 250L RD ZINC	P						
032	01	91975684	1	6		PC WSHR, M5 EXT/T SST PASS	B			15786		R320	R320
032	02	91975671	R	6		PC WSHR, M5 EXT/T SPG-STL ZP	B		15786			R320	
033	01	93522018	6	1		PC PLUG, SNAP BUTTON 1 L/4 STA HD	P						
034	01	94374900	2	125		PC STRIP CONTACT	P						
035	01	09040204	1	R		PC WSHR, NO.10 DISHED LOCK STL	B			15786			R320
037	01	62044200	4	1		PC CLAMP-CABLE ADHESIVE BACK	B						
038	04	94277400	1	1		PC STRAP, CBL TIE TYP-1 TO 5/8	B		14539			R143	
039	02	71493294	4	1		PC SHIELD	P		14539			R143	
040	02	94952302	1	1		PC CLIP, CORD TYP-3 NYL ADH-BACK	P		14742A			R136	
046	01	94277411	R	2		PC STRAP, CBL TIE TYP-1 TO 1-1/8	R		14539A			R133	
						0037 TOTAL LINES							

BUILD APC 440

ASSEMBLY PARTS LIST

PRINT DATE 12-17-83 PAGE 1 PRE CHANGE NO. 0019910

DIV.	ASSEMBLY NUMBER	CD	REV.	QTY.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	PRE DATE			
0960	15632575	5	Y	D	FD SBS, SECONDARY 50HZ (T4)	G	REL	09-23-87	BR810R	12-19-83			
ITEM NO	LT	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WR IN	WR OUT
001	01	61409022	3	1		PC AC ENTRY, FLEX DISK 50HZ	A						
003	03	90446443	5	1		PC PC CD ASSY 1AFO	A		149A5			R209	
004	01	90446143	1	1		PC CD ASSY 9RMD BACKPLANE	A						
005	01	71493037	R	1		PC COVER METAL AL	P						
005	01	71493185	A	1		PC FACE PLATE	P						
007	01	71493188	R	1		PC BASE	P						
008	02	71493795	1	2		PC TRACK DISK MTG	P		14539			R143	
009	02	71493796	0	2		PC SLIDE DISK MTG	P		14539			R143	
010	01	96837907	3	1		PC CKT BRKR MAGNETIC 3.0 AMPS	P						
011	01	71492955	1	1		PC PANEL CABLE SUPPORT	P						
012	02	71492968	R	4		PC GUIDE CARD	P		149A4			R204	
014	01	71492968	A	1		PC BUTTON SWITCH	P			15912			8321
015	01	71493054	7	1		PC PANEL SWITCH INDICATOR	P						
015	01	91886600	9	1		PC FAN, 90CFM 1PH 119VAC 57/60HZ	P						
017	01	94375401	0	1		PC GUARD, FAN 90/60HZ	P						
018	01	77618000	7	1		PC FLEX DISK DRV, 9406 2-SIDED	P						
019	02	71493350	A	4		PC FOOT	P		14853			R147	
020	01	91976449	1	4		PC MSCR PAN PHL M4X4MM STL ZP	B						
021	01	91975724	5	R		PC NUT, HEX M5 STL ZP	B			15786			8320
021	02	15165001	7	R		PC NUT, HEX/FLG-LR M5 STL ZP	B		15786			R320	
022	01	15164911	0	4		PC MSCR HEX/W-LK PLN M4X4MM STL	R						

BUILD APC 440

ASSEMBLY PARTS LIST

PRINT DATE 12-17-83 PAGE 2 PRE CHANGE NO. 0019910

DIV.	ASSEMBLY NUMBER	CD	REV.	QTY.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	PRE DATE			
0960	15632575	5	Y	D	FD SBS, SECONDARY 50HZ (T4)	G	REL	09-03-87	BR810R	12-19-83			
ITEM NO	LT	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WR IN	WR OUT
023	02	15164917	5	12		PC MSCR HEX/W-LK PLN M5X8MM STL	B		15289			R238	
025	01	91976864	R	4		PC MSCR FLT PHL M5X10MM STL ZP	B						
026	02	91976657	7	2		PC MSCR PAN PHL M5X10MM STL ZP	R		15289			R238	
028	01	71493078	1	5		PC STANDOFF HEX METRIC CRS	P						
029	03	51918435	7	1		PC EMBLEM, CDC ID	P		14742			R136	
031	01	93109381	7	2		PC STOFF, NO. 1/4 .250L RD ZINC	P						
032	01	91975684	1	6		PC WSHR, M5 EXT/T SST PASS	B			15786			8320
032	02	91975671	R	6		PC WSHR, M5 EXT/T SPG-STL ZP	B		15786			R320	
033	01	93522018	6	1		PC PLUG, SNAP BUTTON 1 1/4 DIA HD	P						
034	01	94374900	2	125		PC STRIP CONTACT	P						
035	01	09040204	1	R		PC WSHR, NO. 10 DISHD LOCK STL	B			15786			8320
037	01	62044200	4	1		PC CLAMP-CABLE ADHESIVE BACK	B						
038	04	94277400	1	1		PC STRAP, CBL TIE TYP-1 TO 5/8	B		14539			R143	
039	02	71493294	4	1		PC SHIELD	P		14539			R143	
040	02	94952302	1	1		PC CLIP, CORD TYP-3 NYL ADH-BACK	P		14742A			R136	
046	01	94277411	R	2		PC STRAP, CBL TIE TYP-1 TO 1-1/8	B		14539A			R133	
0037 TOTAL LINES													

62949100 M

2862951 2

15632982	PRIMARY	50 HZ
15632983	PRIMARY	60 HZ

SUBMIT REVISION STATUS		REVISION RECORD						
REV	BY	DCD	DESCRIPTION	DEPT	DATE	CHKD	APP	
A	A	15920	RELEASED CLASS A	EE	1/1/78	EE	APF	
A	B	19905	M/L CHANGE ONLY	EE	1/1/78	EE	APF	
C	C	15289	REVISED PER ECO	MY	8-22-77	MY		
C	D	15009	REVISED P/L ONLY	DC	1-28-78	WJG		
E	E	15206	REVISED TER & D	MD	11-8-77	MD		
E	F	15771	M/L CHANGE ONLY	EE	1/1/78	EE	APF	
E	G	15012	REVISE FIN 14	WJG	8-29-77	WJG		
E	H	16410	CONFORMANCE WITH DRAWING	EE	1/1/78	EE	APF	
E	J	16272	DO NOT SCALE DRAWING	EE	1/1/78	EE	APF	
E	K	16273	M/L CHANGE FIN 2	APF	12-11-77	WJG		



FREQUENCY CONVERSION PROCEDURE

THIS PROCEDURE IS TO BE USED TO CONVERT THE F50 UNIT FROM 60 HZ OPERATION TO 50 HZ OPERATION OR VICE VERSA. THIS IS ACCOMPLISHED BY REVERSING THE DUAL-DIAMETER REVERSIBLE PULLEY ON THE SPINDLE-MOTOR SHAFT USING THE FOLLOWING STEPS:

1. REMOVE AC POWER
2. DISCONNECT I/O CABLE FROM J1
3. DISCONNECT HARNESS FROM CONNECTORS ON PRINTED-CIRCUIT BOARD
4. REMOVE TWO SCREWS FROM PRINTED-CIRCUIT BOARD ADJACENT TO CONNECTOR J1.
5. REMOVE PWA BY DETACHING IT FROM THE FOUR PUSH-IN CLIPS
6. REMOVE THE BELT FROM THE SPINDLE-MOTOR PULLEY (ACCESSIBLE FROM THE UNDER SIDE OF THE UNIT)
7. LOOSEN SETSCREW AND REMOVE PULLEY
8. REVERSE PULLEY AND REPLACE ON THE MOTOR SHAFT
9. POSITION PULLEY ALLOWING TOLERANCE OF 0.000 IN (2.28 MM) ±0.010 (0.254 MM) BETWEEN SHOULDER OF MOTOR MOUNTING SCREWS AND PULLEY.
10. TIGHTEN DOWN SETSCREW
11. REPLACE BELT
12. TO REPLACE PRINTED-CIRCUIT BOARD, PUSH CLIPS THROUGH PRINTED-CIRCUIT BOARD
13. REPLACE TWO SCREWS ADJACENT TO CONNECTOR J1
14. RECONNECT HARNESS AND I/O CABLE

CAUTION

IT IS IMPORTANT THAT THE NEW OPERATING FREQUENCY BE MARKED ON THE UNIT'S RATING NAMEPLATE. USE A 3/8 INCH x 3/8 INCH GUMMED LABEL. REMARK THE UNIT'S RATING NAMEPLATE WITH THE CORRECT FREQUENCY.

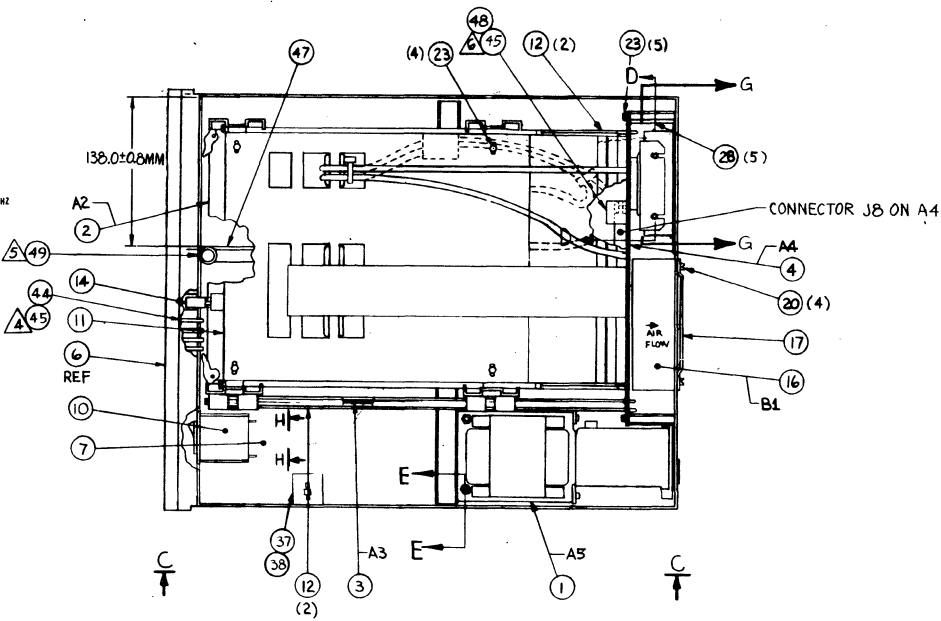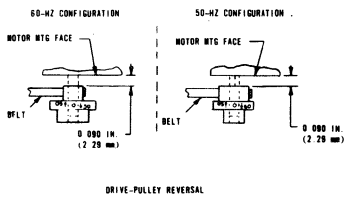

(TOP VIEW SHOWN WITH ITEMS 5, 8, 9, & 18 REMOVED)

- NOTES:**
2. CONNECT SUBASSEMBLIES AS FOLLOWS:
 PLUG A4P1 INTO AJJ9
 PLUG A4P2 INTO AJJ4
 PLUG A4P3 INTO AJJ1
 PLUG A4P4 INTO BJJ1
 PLUG A5P3 INTO AJJ3
 3. MARK NO'S ONLY PER CDC SPEC 10121508, .12 HIGH, WHITE, IN LOCATION APPROX AS SHOWN.
 4. OPTIC RODS (F/N 44) TO BE INSTALLED FROM BACK OF FACE PLATE (F/N 6). INSTALL RODS UNTIL THEY ARE FLUSH WITH FRONT OF FACE PLATE, THEN APPLY VERY SMALL AMOUNT (LESS THAN A DROP) OF ADHESIVE (F/N 45) AROUND EACH ROD, ON BACKSIDE OF FACE PLATE. WIPE OFF EXCESS.
 5. TIGHTEN SCREW F/N 49 BY HAND, DO NOT USE ANY TOOLS.
 6. APPLY ONE DROP OF ADHESIVE (F/N 45) BETWEEN GUIDE (F/N 48) AND CONNECTOR (J8) MOUNTING TAB. WIPE OFF ANY EXCESS THAT MAY APPEAR AFTER INSTALLATION.


METRIC

APL 15632982 THRU 15632983 DEFINING LETTERS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCH	TITLE CD110 FLEXIBLE DISK (TLA)
	PLANE TOLERANCES FINISH ANGLES	DATE FASOIC/D
	DO NOT SCALE DRAWING	DESIGNED BY CHECKED BY DRAWN BY DATE
	SCALE 1/2	CODE DEPT 15920 D
	ISSUED BY 15632981 15632985	DRAWING NO 15632982 THRU 15632983
		SHEET 1 OF 2


7-38.3

2862E951 Z


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	CHKD APP

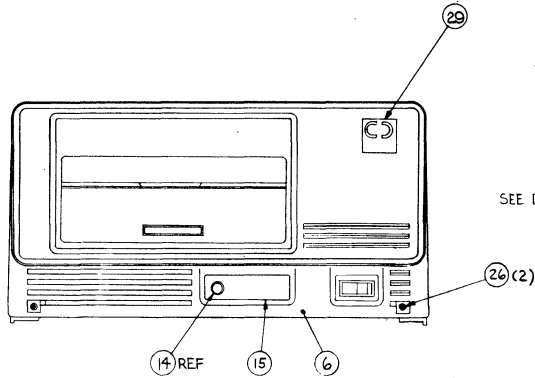


VIEW A-A
ROTATED 90° CCW

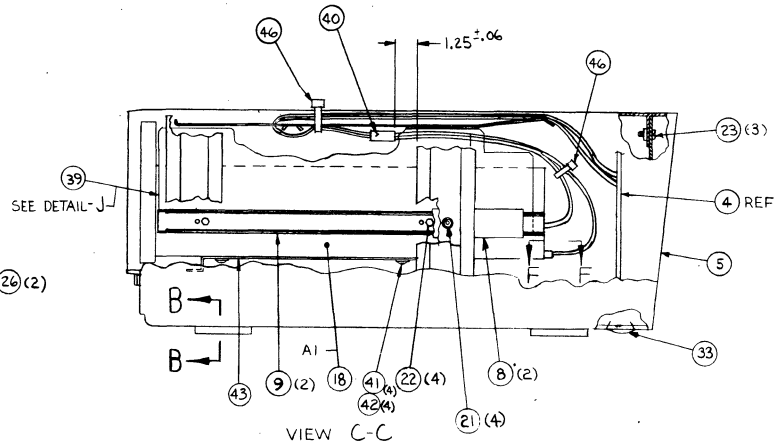


VIEW C-C




SECTION F-F
SCALE: NONE




VIEW G-G
ROTATED 90° CW
SCALE: NONE

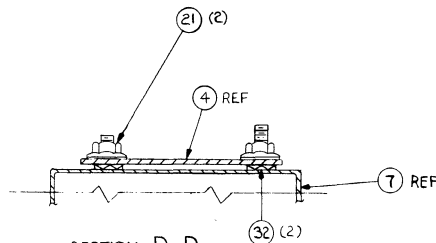


SECTION D-D
ROTATED 90° CW
SCALE: NONE




SECTION E-E
TYP 2 PLACES
SCALE: NONE



SECTION B-B
TYP 4 PLACES



VIEW H-H
SCALE: NONE



DETAIL - J
SCALE: NONE

CONTROL DATA	CD110 FLEXIBLE DISK (TLA)	SCALE IDENT	15920	DWG NO	15632982	REV	E

ASSEMBLY PARTS LIST

BUILD ARC 440										PRINT DATE		PAGE		FILE CHANGE NO.					
										12-04-84		1		00016873					
DIV. ASSEMBLY NO. CD REV. DWG.										DESCRIPTION		MC STATUS		STATUS DATE		ENG. RESP.		FILE DATE	
0860 15632982 3 K 0										FDD, CD110 PRIMARY 50HZ (TA)		G REL		12-18-81		FA501D		12-04-84	
TRND NO.	U	PART NO.	CD	REV.	DWG.	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT				
001	01	61409022	3			1		PC AC ENTRY, FLEX DISK 50HZ	A										
002	01	90446396	5			1		PC REPLACED BY 90446571 15771	A			15771	15771		8314				
002	02	90446571	3			1		PC REPLACED BY 90446596 16873	S			16873	16873		8314				
002	03	90446596	0			1		PC CD ASSY 98E0-4 DISK CONTRLR	S						8450				
003	02	90446443	5			1		PC PC CD ASSY 1AFD	A			14985			8209				
004	01	90446143	1			1		PC CD ASSY 98MD BACKPLANE	A										
005	01	71493032	8			1		PC COVER METAL AL	P										
006	01	71493185	4			1		PC FACE PLATE	P										
007	01	71493188	8			1		PC BASE	P										
008	01	71493295	1			2		PC TRACK DISK MTG	P										
009	01	71493296	9			2		PC SLIDE DISK MTG	P										
010	01	96837907	3			1		PC CKT BRKR MAGNETIC 3.0 AMPS	P										
011	01	71492955	1			1		PC PANEL CABLE SUPPORT	P										
012	01	71492966	8			4		PC GUIDE CARD	P										
014	02	71492968	4			1		PC BUTTON SWITCH	P			15812	15812		8321				
014	03	61409606	3			1		PC SWITCH BUTTON ASSY	N						8321				
015	01	71493055	9			1		PC PANEL SWITCH 1ND	P										
016	01	51886600	9			1		PC FAN, 50CFM 1PH 115VAC 50/60HZ	P										
017	01	94375401	0			1		PC GUARD, FAN 50/60HZ	P										
018	01	77618000	2			1		PC FLEX DISK DRV, 9406 2-SIDED	P										
019	01	71493350	4			4		PC FOOT	P										
020	01	91976649	3			4		PC MSCR PAN PHL MAX40MM STL ZP	B										

ASSEMBLY PARTS LIST

BUILD ARC 440										PRINT DATE		PAGE		FILE CHANGE NO.					
										12-04-84		2		00016873					
DIV. ASSEMBLY NO. CD REV. DWG.										DESCRIPTION		MC STATUS		STATUS DATE		ENG. RESP.		FILE DATE	
0860 15632982 3 K 0										FDD, CD110 PRIMARY 50HZ (TA)		G REL		12-18-81		FA501D		12-04-84	
TRND NO.	U	PART NO.	CD	REV.	DWG.	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT				
021	01	91975724	5			8		PC NUT, HEX M5 STL ZP	B			15786	15786		8320				
021	02	15165001	7			8		PC NUT, HEX/FLG-LK M5 STL ZP	B						8320				
022	01	15164911	8			4		PC MSCR HEX/W-LK PLN M4X8MM STL	B										
023	02	15164917	5			12		PC MSCR HEX/W-LK PLN M5X8MM STL	B			15289			8238				
025	01	91976864	8			4		PC MSCR FLT PHL M5X10MM STL ZP	B										
026	02	91976652	7			2		PC MSCR PAN PHL M5X10MM STL ZP	B			15289			8238				
028	01	71493078	1			5		PC STANDOFF HEX METRIC CRS	P										
029	01	51918435	2			1		PC EMBLEM, CDC ID	P										
031	01	93109381	9			2		PC STOFF, NO. 1/4 .250L RD ZINC	P										
032	01	91975684	1			6		PC WSHR, M5 EXT/T SST PASS	B			15786	15786		8320				
032	02	91975671	8			6		PC WSHR, M5 EXT/T SPG-STL ZP	B						8320				
033	01	93522018	6			1		PC PLUG, SNAP BUTTON 1 1/4 DIA HD	P										
034	01	94374900	2			125		PC STRIP CONTACT	P										
035	01	09046204	1			8		PC WSHR, NO. 10 DISHED LOCK STL	B			15786			8320				
036	01	51805700	5			4		PC BUMPER SELF STICKING	P			15669			8301				
037	01	62044200	4			1		PC CLAMP-CABLE ADHESIVE BACK	B										
038	01	94277400	1			1		PC STRAP, CBL TIE TYP-1 TO 5/8	B										
039	01	71493294	4			1		PC SHIELD	P										
040	01	94952302	1			1		PC CLIP, CORD TYP-3 NYL ADH-BACK	P										
041	01	10127103	9			4		PC MSCR PAN PHL 4-40X.312 STL ZP	B										
042	01	10126400	0			4		PC WSHR, (4) EXT/T LK STL ZP	B										
043	01	71493269	6			1		PC SHIELD	P										

ASSEMBLY PARTS LIST

BUILD ARC 440										PRINT DATE 12-04-84		PAGE 1		FILE CHANGE NO. 00016873	
DESCRIPTION										STATUS DATE		ENG. RESP.		FILE DATE	
FDD, CD110 PRIMARY 60HZ (TA)										REL		FA501C		12-04-84	
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	QTY	K	D	U/M	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
0860	15632983	1													
001	01				5					A					
002	01				5					A		15771			8314
002	02				3					S	15771	16873			8450
002	03				0					S	16873				
003	02				5					A	14985				8209
004	01				1					A					
005	01				8					P					
006	01				4					P					
007	01				8					P					
008	01				1					P					
009	01				9					P					
010	01				3					P					
011	01				1					P					
012	01				8					P					
014	02				4					P		15812			8321
014	03				3					N	15812				
015	01				9					P					
016	01				9					P					
017	01				0					P					
018	01				2					P					
019	01				4					P					
020	01				3					B					

ASSEMBLY PARTS LIST

BUILD ARC 440										PRINT DATE 12-04-84		PAGE 2		FILE CHANGE NO. 00016873	
DESCRIPTION										STATUS DATE		ENG. RESP.		FILE DATE	
FDD, CD110 PRIMARY 60HZ (TA)										REL		FA501C		12-04-84	
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	QTY	K	D	U/M	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
0860	15632983	1													
021	01				5					B		15786			8320
021	02				7					B					
022	01				8					B					
023	02				5		12			B	15289				8238
025	01				8					B					
026	02				7					B	15289				8238
028	01				1					P					
029	01				2					P					
031	01				9					P					
032	01				1					B		15786			8320
032	02				8					B	15786				8320
033	01				6					P					
034	01				2			125		P					
035	01				1					B		15786			8320
036	01				5					P		15669			8301
037	01				4					B					
038	01				1					B					
039	01				4					P					
040	01				1					P					
041	01				9					B					
042	01				0					B					
043	01				6					P					

ASSEMBLY PARTS LIST

BUILD ARC 440										PRINT DATE		PAGE		FILE CHANGE NO.				
										12-04-84		3		00016873				
FDD, CD110 PRIMARY 60HZ (TA)										STATUS		STATUS DATE		ENG. RESP.		FILE DATE		
										G REL		12-18-81		FA501C		12-04-84		
TRND NO.	U	PART NO.	CD	M	QTY	U/M	PART DESCRIPTION				MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT	
044	01	71493297	7		4		PC ROD OPTIC											
045	01	94850711	6			001	OZ SEAL, EASTMAN (910)							16410				8403
045	02	95033915	0			001	OZ BONDING AGENT ETHYL 10Z						16410				8403	
046	01	94277411	8		2		PC STRAP, CBL TIE TYP-1 TO 1-1/8											
047	01	71493354	6		1		PC RAIL SUPPORT PC CD											
048	01	71493360	3		1		PC GUIDE-PC CCNN											
049	01	71493364	5		1		PC SCREW SHLDR NYLON											
050	01	91976507	3		1		PC MSCR PAN SLT M3X10MM NYL NAT							16410				8403
0052 TOTAL LINES																		

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-31-83	1	00015812

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	15632983	1	0	D	FDD, CD110 PRIMARY 60HZ (TA)	0	REL	12-18-81	FA501C	03-31-83			
FIND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	61409021	5	1		PC AC ENTRY, FLEX DISK 60HZ	A						
002	01	90446396	5	1		PC REPLACED BY 90446571 15771	S			15771	15771		8314
002	02	90446571	3	1		PC CD ASSY CONT MOD W/FULL MEM	S		15771			8314	
003	01	90446290	0	1		PC REPLACED BY 90446443 14985	A			14985	14985		8209
003	02	90446443	5	1		PC PC CD ASSY 1APD	A		14985			8209	
004	01	90446143	1	1		PC CD ASSY 98MD BACKPLANE	A						
005	01	71493032	8	1		PC COVER METAL AL	P						
006	01	71493185	4	1		PC FACE PLATE	P						
007	01	71493188	8	1		PC BASE	P						
008	01	71493295	1	2		PC TRACK DISK MTG	P						
009	01	71493296	9	2		PC SLIDE DISK MTG	P						
010	01	96837907	3	1		PC CKT BRKR MAGNETIC 3.0 AMPS	P						
011	01	71492955	1	1		PC PANEL CABLE SUPPORT	P						
012	01	71492966	8	4		PC GUIDE CARD	P						
014	02	71492968	4	1		PC BUTTON SWITCH	P		15812	15812		8321	8321
014	03	61409606	3	1		PC SWITCH BUTTON ASSY	N		15812			8321	
015	01	71493055	9	1		PC PANEL SWITCH 1ND	P						
016	01	51886600	9	1		PC FAN, 50CFM 1PH 115VAC 50/60HZ	P						
017	01	94375401	0	1		PC GUARD, FAN 50/60HZ	P						
018	01	77618000	2	1		PC FLEX DISK DRV, 9406 2-SIDED	V						
019	01	71493350	4	4		PC FOOT	P						
020	01	91976649	3	4		PC MSCR PAN PHL M4X40MM STL ZP	B						

BUILD ARC 440

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-31-83	2	00015812

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	15632983	1	0	D	FDD, CD110 PRIMARY 60HZ (TA)	0	REL	12-18-81	FA501C	03-31-83			
FIND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
021	01	91975724	5	8		PC NUT, HEX M5 STL ZP	B			15786			8320
021	02	15165001	7	8		PC NUT, HEX/PLG=LK M5 STL ZP	B		15786			8320	
022	01	15164911	8	4		PC MSCR HEX/W-LK PLN M4X8MM STL	B			15289			8238
023	01	15164917	5	4		PC MSCR HEX/W-LK PLN M5X8MM STL	B		15289			8238	
023	02	15164917	5	12		PC MSCR HEX/W-LK PLN M5X8MM STL	B			15289			8238
024	01	91976758	2	5		PC MSCR PAN PHL M5X10MM SST PASS	B			15289			8238
025	01	91976864	8	4		PC MSCR FLT PHL M5X10MM STL ZP	B			15289			8238
026	01	91976652	7	5		PC MSCR PAN PHL M5X10MM STL ZP	B		15289			8238	
026	02	91976652	7	2		PC MSCR PAN PHL M5X10MM STL ZP	B			15289			8238
027	01	91975706	2	5		PC WSHR, M5 LOCK SST PASS	B			15289			8238
028	01	71493078	1	5		PC STANDOFF HEX METRIC CRS	P						
029	01	51918435	2	1		PC EMBLEM, CDC ID	P						
031	01	93109381	9	2		PC STOFF, NO. 1/4 .250L RD ZINC	P						
032	01	91975684	1	6		PC WSHR, M5 EXT/T SST PASS	B			15786			8320
032	02	91975671	8	6		PC WSHR, M5 EXT/T SP6-STL ZP	B		15786			8320	
033	01	93522018	6	1		PC PLUG, SNAP BUTTON 1 1/4 DIA HO	P						
034	01	94374900	2	125		PC STRIP CONTACT	P						
035	01	09040204	1	8		PC WSHR, NO. 10 DISHED LOCK STL	B			15786			8320
036	01	51805700	5	4		PC BUMPER SELF STICKING	P			15669			8301
037	01	62044200	4	1		PC CLAMP-CABLE ADHESIVE BACK	B						
038	01	94277400	1	1		PC STRAP, CBL TIE TYP-1 TO 5/8	B						
039	01	71493294	4	1		PC SHIELD	P						
040	01	94952302	1	1		PC CLIP CORD TYPE 3 NYLON	P						

BUILD ARC 440








ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-31-83	3	00015812

DIV.		ASSEMBLY NUMBER		CD	REV.	DWG.	DESCRIPTION			MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
0860		15632983		1	G	D	FDD, CD110 PRIMARY 60HZ (TA)			G	REL	12-18-81	FA501C	03-31-83		
TP	LN	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION			MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
041	01		10127103	9	4		PC MSCR PAN PHL 4-40X.312 STL ZP			B						
042	01		10126400	0	4		PC WSHR, (4) EXT/T LK STL ZP			B						
043	01		71493269	6	1		PC SHIELD			P						
044	01		71493297	7	4		PC ROD OPTIC			P						
045	01		94850711	6	001		OZ SEAL, EASTMAN CLR (910)			B						
046	01		94277411	8	2		PC STRAP, CBL TIE TYP-1 TO 1-1/8			B						
047	01		71493354	6	1		PC RAIL SUPPORT PC CD			P						
048	01		71493360	3	1		PC GUIDE-PC CONN			P						
049	01		71493364	5	1		PC SCREW SHLDR NYLON			P						
050	01		91976507	3	1		PC MSCR PAN SLT M3X10MM NYL NAT			B						
							0055 TOTAL LINES									

P/N	HZ	LENGTH A (MM)
61409021	60	50.0 ± 6
61409022	50	50.0 ± 6

SHEET REVISION STATUS		REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	CHG	APP	NAME
A	12737-74	RELEASED CLASS A					
B	14321	REVISED PER ECO					
C	14582	CHG REF NUMMS ON RT FILTER					
D	15229	REVISED PER ECO					
E	15351	REVISED PER ECO					
F	15442	REVISED PER ECO					
G	15509	CHG FIN 3, 14					
H	15624	PL CHANGE ONLY, F/N 30					
J	15786	REVISED PER ECO					

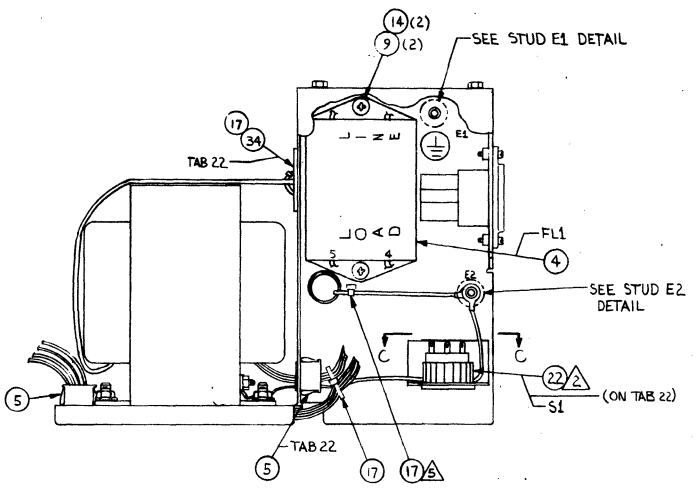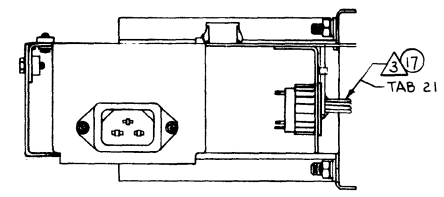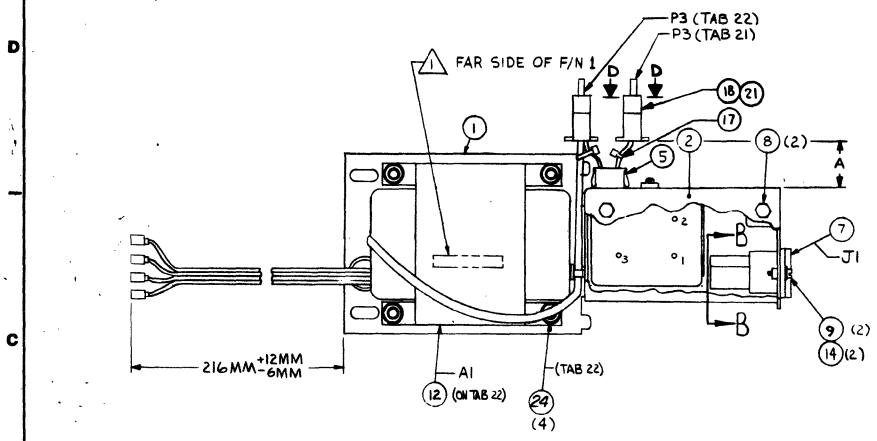

- NOTES:
- 1 MARK "ASSY 6140902X" IN AREA SHOWN PER CDC SPEC 10121508.
 - 2 SECURE PLASTIC NUT USING F/N 23.
 - 3 ON TAB 21, CENTER WIRES AND STRAP AS SHOWN.
 - 4 CLIP OFF TAB.
 - 5 INSTALL AROUND ALL WIRES GOING TO P3 TO ALLOW P3 TO STICK OUT 50 ± 6 MM.

UNLESS OTHERWISE SPECIFIED		TOLERANCES		CONTROL DATA		TITLE	
3 PLAGE	3 PLAGE	ANGLES		FA501-A/B		AC ENTRY ASSY, FLEX DISK	
DO NOT SCALE DRAWING		DESIGNED BY		15920		15920	61409021/22
		ENGINEER					
		APPROVED					

BUILD ARC 230

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-02-83	1	00015786

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	61409021	5	J	D	AC ENTRY, FLEX DISK 60HZ	A	REL	09-03-80	FA501A	03-02-83			
TP/IND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	71492952	B	1		PC BRACKET SWITCH/FILTER/XFORM	P						
002	01	71492953	B	1		PC COVER SWITCH/FILTER	P						
004	01	15164356	B	1		PC FILTER RFI	P						
005	01	15012408	B	2		PC 95HG, SNAP-IN .500 M/M .38ID	B						
007	01	44674034	B	2		PC CONN POWER RECEP	P						
008	01	15164917	B	2		PC MSCR HEX/M-LK PLN M5X8MM STL	B						
009	01	91976625	B	3		PC MSCR PAN PHL M3X6MM STL ZP	B		15509	15509		8243	8243
009	02	91976626	B	1		PC MSCR PAN PHL M3X8MM STL ZP	B					8243	
010	01	51809101	B	2	020	FT TAPE-WIRE MARKING CHAR 1	B						
011	01	51809103	B	8	020	FT TAPE-WIRE MARKING CHAR 3	B						
014	01	91975669	B	2	2	PC WSHR, M3 EXT/T SPG-STL ZP	B		15509	15509		8243	8243
014	02	91975669	B	2	4	PC WSHR, M3 EXT/T SPG-STL ZP	B					8243	
015	01	44674036	B	7	3	PC CONN PWR RECPT	P						
016	01	51797218	B	8	3	PC LUG, 22-18GA SS10 INS-RING	B						
017	01	94277400	B	1	1	PC STRAP, CBL TIE TYP-1 TO 5/8	B		15351	15351		8234	8234
017	02	94277400	B	1	3	PC STRAP, CBL TIE TYP-1 TO 5/8	B					8234	
018	01	51906200	B	4	3	PC CONT, SKT 20-14AWG SN STRIP	P						
019	01	52810001	B	9	2 833	FT WIR 18GA STRD BRN 600V UL PVC	W						
020	01	52810020	B	9	833	FT WIR 18GA STRD GRN/YEL 600V UL	W						
021	01	51906001	B	6	1	PC CONN, PLUG 3 CKT NYL/NAT F-1	P						
024	01	91975724	B	5	2	PC NUT, HEX M5 STL ZP	B		15786	15786		8320	8320
024	02	15165001	B	7	2	PC NUT, HEX/FLG-LK M5 STL ZP	B					8320	
025	01	91975671	B	8	6	PC WSHR, M5 EXT/T SPG-STL ZP	B			15786			8320

BUILD ARC 230

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-02-83	2	00015786

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	61409021	5	J	D	AC ENTRY, FLEX DISK 60HZ	A	REL	09-03-80	FA501A	03-02-83			
TP/IND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
025	02	91975671	B	3		PC WSHR, M5 EXT/T SPG-STL ZP	B		15786			8320	
026	01	61409023	B	1	REF	PC W/L AC ENTRY 60HZ	D						
027	01	52810006	B	8	2 833	FT WIR 18GA STRD BLU 600V UL PVC	W						
028	01	93083004	B	7	2	PC SPLICES 22-16	W						
029	01	62201057	B	7	REF	PC SCH DIAG 50/60HZ	D						
030	01	95643231	B	4	4	PC LUG, Q-CONN 22-18AWG FIG 5	P		15634	15634		8313	8313
030	02	95643248	B	8	4	PC CONN QUICK CONN 22-18 1.00L	P					8313	
031	01	51809102	B	0	020	FT TAPE-WIRE MARKING CHAR 2	B						
032	01	51809104	B	6	020	FT TAPE-WIRE MARKING CHAR 4	B						
033	01	24528636	B	4	333	FT TBG, NO. 2 INS BLK UL PVC	B						
						0033 TOTAL LINES							

BUILD ARC 230

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-01-83	1	00015786

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	61409022	3	J	D	AC ENTRY, FLEX DISK 50HZ	A	REL	09-03-80	FA501A	03-01-83			
TPIND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	71492952	8	1		PC BRACKET SWITCH/FILTER/XFORM	P						
002	01	71492953	6	1		PC COVER SWITCH/FILTER	P						
004	01	15164356	6	1		PC FILTER RFI	P						
005	01	15012408	9	3		PC BSHG, SNAP-IN .500 M/H .38ID	B						
007	01	44674034	2	1		PC CONN POWER RECEP	P						
008	01	15164917	5	2		PC MSCR HEX/W-LK PLN MSX8MM STL	B						
009	01	91976625	3	4		PC MSCR PAN PHL M3X6MM STL ZP	B		15509	15509		8243	8243
009	02	91976626	1	4		PC MSCR PAN PHL M3X8MM STL ZP	B						
010	01	51809101	2		020	FT TAPE-WIRE MARKING CHAR 1	B						
011	01	51809103	8		020	FT TAPE-WIRE MARKING CHAR 3	B						
012	01	51918789	2	1		PC XFMR STEP DOWN 220/240V	P						
013	01	09040204	1	4		PC WSHR, NO.10 DISHED LOCK STL	B			15786			8320
014	01	91975669	2	2		PC WSHR, M3 EXT/T SPG-STL ZP	B		15509	15509		8243	8243
014	02	91975669	2	4		PC WSHR, M3 EXT/T SPG-STL ZP	B						
015	01	44674036	7	3		PC CONN PWR RECPT	P						
016	01	51797218	8	2		PC LUG, 22-18GA SS10 INS-RING	B						
017	01	94277400	1	1		PC STRAP, CBL TIE TYP-1 TO 5/8	B		14321	14321		8041	8041
017	02	94277400	1	2		PC STRAP, CBL TIE TYP-1 TO 5/8	B		15351	15351		8234	8234
017	03	94277400	1	4		PC STRAP, CBL TIE TYP-1 TO 5/8	B					8234	8234
019	01	52810001	9	2		FT WIR 18GA STRD BRN 600V UL PVC	W						
020	01	52810020	9		250	FT WIR 18GA STRD GRN/YEL 600V UL	W						
022	01	51918969	0	1		PC SWITCH VOLTAGE SELECTOR	P						
023	01	51873600	4		001	OZ VARNISH INSUL RED GLPT	B						

BUILD ARC 230


ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-01-83	2	00015786

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	61409022	3	J	D	AC ENTRY, FLEX DISK 50HZ	A	REL	09-03-80	FA501A	03-01-83			
TPIND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
024	01	91975724	5	6		PC NUT, HEX M5 STL ZP	B		15786	15786		8320	8320
024	02	15165001	7	6		PC NUT, HEX/FLG-LK M5 STL ZP	B					8320	8320
025	01	91975671	8	6		PC WSHR, M5 EXT/T SPG-STL ZP	B		15786	15786		8320	8320
025	02	91975671	8	4		PC WSHR, M5 EXT/T SPG-STL ZP	B					8320	8320
026	01	61409024	9		REF	PC W/L AC ENTRY 50HZ	D						
027	01	52810006	8	1	166	FT WIR 18GA STRD BLU 600V UL PVC	W						
028	01	93083004	7	2		PC SPLICES 22-16	W						
029	01	51758101	3		188	FT INS SLV CLR PVC HEAT SHRINK	B						
030	01	95643231	4	4		PC LUG, Q-CONN 22-18AWG FIG 5	P		15634	15634		8313	8313
030	02	95643248	8	4		PC CONN QUICK CONN 22-18 1.00L	P						
031	01	62201057	7		REF	PC SCH DIAG 50/60HZ	D						
032	01	51809102	0		020	FT TAPE-WIRE MARKING CHAR 2	B						
033	01	51809104	6		020	FT TAPE-WIRE MARKING CHAR 4	B						
034	01	62044200	4	1		PC CLAMP-CABLE ADHESIVE BACK	B						
0037 TOTAL LINES													



COMMON PARTS DATA APPLICABLE
TO BOTH PRE-PRODUCTION
AND PRODUCTION UNITS

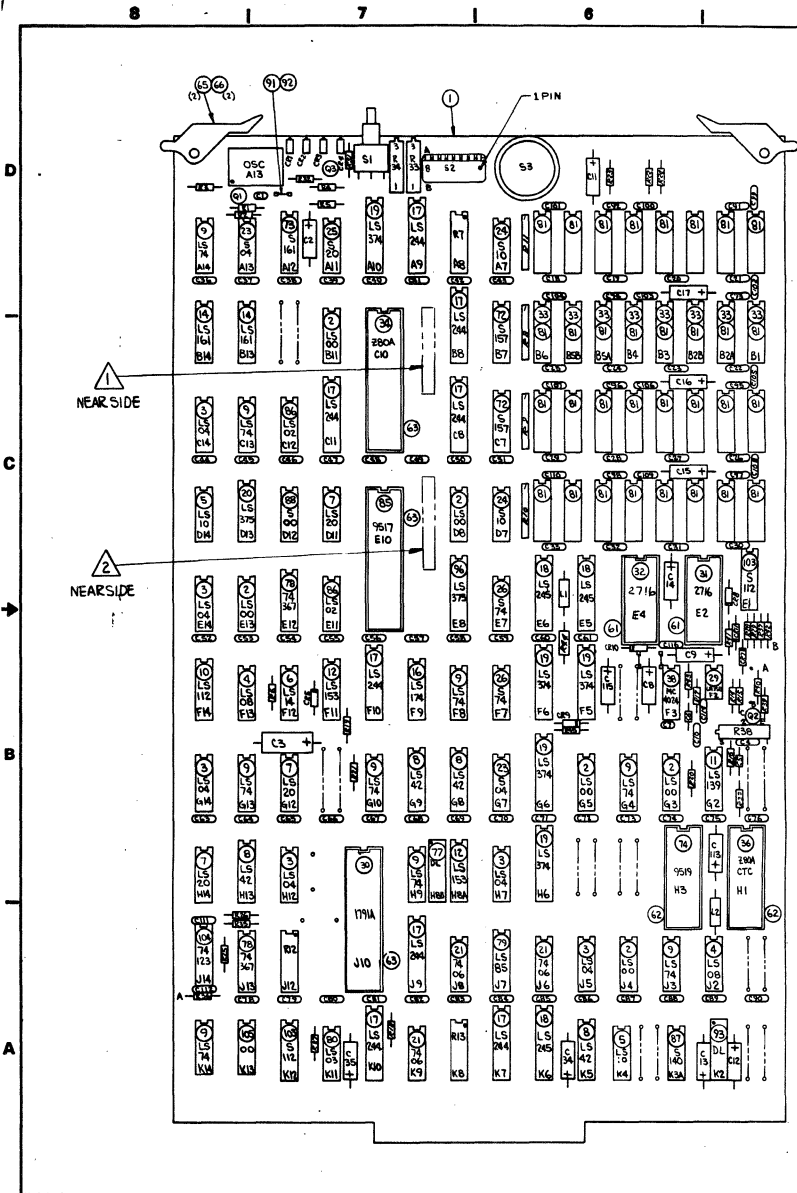

CROSS REFERENCE TABLE

CIND NUMBER	REFERENCE DESIGNATION
37	OSC
39	S2
41	R3
42	R2,R4
44	R1
47	R5,R6
48	R13
51	C36 THRU C61 C63 THRU C76 C78 THRU C98,C114
53	C8,C9,C12,C13,C34,C35
54	C11,C14,C15,C16,C17,C113,C115
55	C3
56	C1
57	CR1 CR2 CE3 CR4
58	CR5 CR9,CR10,CR11
59	Q1,Q3
60	S1
69	C2
70	R8,R9,R10,R11
71	S3
75	C18 THRU C33 C37 THRU C110
82	R7,R12
83	R41
90	R16,R19,R21,R23,R25,R26,R27,R28
97	R20
102	C7
106	R33
107	R34
108	R38
110	Q2
111	R16,R17
112	R14,R15
113	R35,R36
114	R28,R29
115	R30,R37
116	R39,R40
117	R43
118	R32
119	R31
120	R42
121	R44
122	C116
124	CE8
125	C5,C6
126	C4,C10
127	C112
129	C111
130	L1,L2
131	R22,R24
132	CR7

REVISION RECORD

REV	ECO	DESCRIPTION	DEPT	DATE	CHKD	APP
07	51243	REPLACED 'A' SIZE ASSY DWG WITH 'D' SIZE PER ECO	WJH	12-9-80	WJG	[Signature]
08	51245	REVISED PER ECO	WJH	12-10-80	WJG	[Signature]
09	51253	CHG P/N 98 SCHEMATIC	WJG	12-10-80	WJG	[Signature]
A	12947-04	RELEASED CLASS. 'A'	EE	11-10-80	WJG	[Signature]
B	14449	PL CHANGE ONLY	EE	11-10-80	WJG	[Signature]
C	14514	ADD NOTE 4 END INS	WJG	12-30-80	WJG	[Signature]
D	14571	INACTIVE CHANGE BY TAPPA	WJG	12-31-80	WJG	[Signature]

- NOTES:**
- ▲ MARK ASSY. NO., REV LEVEL, AND LOC CODE IN AREA SHOWN. MARK PER CDC SPEC IOI21508, CHARACTER HEIGHT .12 (10 PT) COLOR WHITE.
 - ▲ MARK SERIAL NUMBER IN AREA SHOWN PER RVLOPS P&P NO. 80:20:34 AND PER MARKING REQUIREMENTS IN NOTE (1) ONE.
 - 3. FIND NUMBERS, ELEMENT IDENTIFIERS, AND REFERENCE DESIGNATIONS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON PART.
 - 4. AFTER ALIGNING R33,R34 AND R38, SEAL THEM WITH GLYPTAL CDC P/N 51873600.

CHANGE TABLE

DELETIONS	ADDITIONS
CUT FOIL:	ADD WIRE SOLDER SIDE
1)K3 B-4 S.S.	1)K4-11 TO K3A-13
2)R42-B S.S.	2)R42-B TO R40-A
3)R33-1 S.S.	3)R80-A TO F2-5
4)R36-A S.S.	4)R38-2 TO F2-6
	5)F2-7 TO Q2-13
	6)ADD CENTER CONDUCTOR COAX FROM R33-2 TO R36-A
	7)ADD BRAID SHIELD COAX FROM S2-8A TO J14-B

INACTIVE

CONTROL DATA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCES: PLACE PLACE ANGLES

FASOIA

W GLASSER 11-80

D. SAND 11-80

ENGINEER L. WILSON 11-80

MFL 12-19-80

APPROVED J. H. M. 12-17-80

MECH. [Signature] 12-17-80

TITLE

P.C. CARD ASSEMBLY, 98BD (DISK CONTROLLER)

CODE IDENT 15920 D 90446260

SCALE 2/1

SHEET 1 OF 1

BUILD ARC 214

ASSEMBLY PARTS LIST

										PRINT DATE	PAGE	FILE CHANGE NO.	
										02-05-81	1	14671 0014514	
REV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE	ENG. DESP.	FILE DATE		
0860	90446260	3	D	D	PW BD ASSY 9BED <i>REPLACED BY 90446284</i>		S	DEL	12-17-80	FA501A	02-05-81		
Y PRD NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	90446259	5	1		PC PW BD 9BED	P						
002	01	15144900	6	6		PC IC 74LS00 140LS QUAD 2-1NP	P						
003	01	15145100	2	6		PC IC 74LS04 146LS TTL HEX INV	P						
004	01	15145400	6	2		PC IC 74LS08 201LS Q2INP AND	P						
005	01	15145600	1	2		PC IC 74LS10 141LS TTL 3I/P NAND	P						
006	01	15148500	0	1		PC IC 74LS14 943LS TTL 6 ND RCVR	P						
007	01	15145900	5	3		PC IC 74LS20 208LS TTL 4I/P NAND	P						
008	01	15147600	9	4		PC IC TYPE 74LS42	P						
009	01	15146300	7	9		PC IC 74LS74 175LS F/F DUAL D	P						
010	01	15146500	2	1		PC IC 74LS112 243LS TTL DUAL F/F	P						
011	01	15146600	0	1		PC IC 74LS139 538LS DECODER 10F4	P						
012	01	15148700	6	2		PC IC 74LS153 TTL DUAL 4I/P	P						
014	01	15146800	6	2		PC IC 74LS161 158LS 4BIT COUNTER	P						
016	01	15147500	1	1		PC IC 74LS174 TTL 6 BIT 16 PIN	P						
017	01	15163414	4	8		PC IC 74LS244 OCTAL BFR 3-S OP	P						
018	01	15163324	5	3		PC IC 74LS245 OCTAL BUS XCEIVER	P						
019	01	15163404	5	5		PC IC 74LS374 OCTAL D-EDGE F-F	P						
020	01	15163232	0	1		PC IC 74LS375 TTL 4-BIT	P						
021	01	96744155	1	3		PC IC 7406 DRVR HEX INV BUFFER	P						
023	01	88883700	2	2		PC IC 74S04 146S TTL HEX INVTR	P						
024	01	88884200	2	2		PC IC 74S10 141S TTL 3 3-IN NAND	P						

BUILD ARC 214

ASSEMBLY PARTS LIST

										PRINT DATE	PAGE	FILE CHANGE NO.	
										02-05-81	2	14671 0014514	
REV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE	ENG. DESP.	FILE DATE		
0860	90446260	3	D	D	PW BD ASSY 9BED <i>REPLACED BY 90446284</i>		S	DEL	12-17-80	FA501A	02-05-81		
Y PRD NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
025	01	88885300	9	1		PC IC 74S20 TTL DUAL 4 I/P	P						
026	01	88923000	9	2		PC I C 74S74 TTL DUAL	P						
029	01	15157100	7	1		PC IC LM358N 344 DUAL OP-AMP	P						
030	01	15163444	1	1		PC IC FD1791	P						
031	01	66312068	1	1		PC FLEXIBLE DISK CODED E-ROM	G						
032	01	66312069	9	1		PC FLEXIBLE DISK CODED E-ROM	G						
033	01	15153821	2	8		PC IC 4116 MOS 16384-BIT RAM	P						
034	01	15163201	5	1		PC IC Z80A MOS 8BIT RROCESSOR	P						
036	01	15164429	1	1		PC IC Z80A-CTC SILICON GATE NMOS	P						
037	01	51904109	9	1		PC OSCILLATOR TTL D I P	P						
038	01	15105700	7	1		PC IC 4024 582 TTL DL/V CONT MVB	P						
039	01	83452230	2	1		PC SWITCH DUAL 8POS .88 FIG 2	P						
041	01	94402116	1	1		PC RES FM 22 OHM 1/4W CARBON	P						
042	01	94402140	1	2		PC RES FM 220 OHM 1/4W CARBON	P						
044	01	94402157	5	1		PC RES FM 1.1K OHM 1/4W CARBON	P						
047	01	94402180	7	2		PC RES FM 10K OHM 1/4W CARBON	P						
048	01	95894500	8	1		PC RES MOD 16 PINS 28 RESISTORS	P						
051	01	51001120	8	62		PC CAP CER F-2 .01UF +80-20P 25V	P						
053	01	24504333	6	6		PC CAP FXD TANT 2.2UF 20P 35VDCW	P						
054	01	24504369	0	7		PC CAP FXD TANT 10UF 20P 15VDCW	P						
055	01	24504373	2	1		PC CAP FXD TANT 47UF 20P 15VDCW	P						

BUILD ARC 214

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
02-05-81	3	14571

REV.	ASSEMBLY NUMBER	CD.	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
0860	90446260	3	DL	D	PW BD ASSY 9BED ^{REPLACED BY 90446264}	S	PCMA	12-17-80	FA501A	02-05-81				
T	REV. NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
056	01		75887677	5	1		PC CAP CER 33PF 5P	P						
057	01		19171201	7	4		PC LIGHT IND	P						
058	01		51007385	1	4		PC DIO IN4148 10MA MICRO SIL 30V	P						
059	01		51714000	0	2		PC XSTR 2N2907 PNP SIL	P						
060	01		51940524	5	1		PC SWITCH PUSH BUTTON RT ANGLE	P						
061	01		51848404	3	2		PC SOCKET, IC 24 POS D-I-L TIN	P						
062	01		51848405	0	2		PC SOCKET, IC 28 POS D-I-L TIN	P						
063	01		51848406	8	3		PC SOCKET, IC 40 POS D-I-L TIN	P						
065	01		82311900	3	2		PC INJECTOR-EJECTOR, NATURAL PCB	P						
066	01		93533118	1	2		PC ROLLPIN, .125D X .250L STL ZP	B						
069	01		24504320	3	1		PC CAP TANT 6DCWV 33UF 20P	P						
070	01		94375122	2	4		PC RES BSIP NTWK 470HM 3P	P						
071	01		94789205	5	1		PC SWITCH ROTARY PC 10 POS	P						
072	01		15117400	0	2		PC IC TTL 8MUX 2-1 A 1895 DIC16	P						
073	01		15150400	8	1		PC IC 93S16 TTL 4BIT	P						
074	01		15163459	9	1		PC IC 9519 INT CONT	P						
075	01		94354826	3	28		PC CAP FXD CER 0.10UF 50V	P						
077	01		51918283	6	1		PC DELAY LINE TAP 100 OHM FIG 5	P						
078	01		15140400	1	2		PC IC DM 8097 HEX BUFFER TRI STA	P						
079	01		15147200	8	1		PC IC 74LS85 COMP TTL 4 BIT	P						
080	01		15145200	0	1		PC IC 74LS03 202LS TTL4 2-I NAND	P						

BUILD ARC 214

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
02-05-81	4	14571

REV.	ASSEMBLY NUMBER	CD.	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
0860	90446260	3	DL	D	PW BD ASSY 9BED ^{REPLACED BY 90446264}	S	PCMA	12-17-80	FA501A	02-05-81				
T	REV. NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
081	01		51848401	9	32		PC SOCKET, IC 16 POS D-I-L TIN	P						
082	01		75738666	9	2		PC RES PAK 10.0K OHM 1.50W FIG 2	P						
083	01		94402141	9	1		PC RES FM 240 OHM 1/4W CARBON	P						
085	01		15163458	1	1		PC IC 9517A MULTIMODE DMA CONT	P						
086	01		15145000	4	2		PC IC 74LS02 148LS Q2INP NOR	P						
087	01		15158700	3	1		PC IC T74S140 TTL DUAL 4 I/P GAT	P						
088	01		88884500	5	1		PC IC 74S00 140S TTL QD 2IN NAND	P						
090	01		94402156	7	8		PC RES FM 1K OHM 1/4W CARBON	P						
091	01		51903400	3	2		PC PIN, .025 IN SQ PC MTG 2A	P						
092	01		77612624	5	1		PC CONNECTOR, JUMPER	P						
093	01		51918281	0	1		PC DELAY LINE TAP 200 OHM FIG 3	P						
094	01		90446122	5	REF		PC SCH DIAG 9BED	D						
094	02		90446258	7	REF		PC SCH DIAG 9BED	D		14469	14469		8103	8103
095	01		16033200	3	REF		PC FABRICATION SPEC 70 PAK	D						
096	01		15163434	2	1		PC IC 74LS373 OCTAL D LATCH	P						
097	01		94402168	2	1		PC RES FM 3.3K OHM 1/4W CARBON	P						
102	01		94227227	9	1		PC CAP 110 PF DIPPED MICA	P						
103	01		15158600	5	2		PC IC 74S112 TTL DUAL J-K NET	P						
104	01		50254300	2	1		PC IC 74123 193 TTL 2 RETGR MVB	P						
105	01		66299099	3	1		PC IC 7400 TTL QUAD 2-IN NAND	P						
106	01		51908710	0	1		PC RES CERM VAR 20K OHM 10P 3/4W	P						

BUILD ARC 214

ASSEMBLY PARTS LIST

PRINT DATE: 02-05-81
 PAGE: 5
 FILE CHANGE NO.: ~~0014514~~ 14571


QTY	U	PART NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	DWG. RESP.	FILE DATE
0860		90446260	3	D	D	PW BD ASSY 98ED REPLACED BY 90146284	S	REL	12-17-80	FA501A	02-05-81
T	QTY	U	PART NUMBER	CD	REV.	DESCRIPTION	MC	STATUS	STATUS DATE	DWG. RESP.	FILE DATE
	107	01	51908709	2		PC RES VAR 10K OHM		P			
	108	01	51908708	4		PC RES CER VAR 5K OHM 10P 3/4W		P			
	110	01	51003092	7		PC XSTR 2N2222 HI SPEED NPN SIL		P			
	111	01	94360304	3		PC RES 1100 OHMS 1/4W 1P		P			
	112	01	94360352	2		PC RES 3480 OHMS 1/4W 1P		P			
	113	01	94402173	2		PC RES FM 5.1K OHM 1/4W CARBON		P			
	114	01	94402164	1		PC RES FM 2.2K OHM 1/4W CARBON		P			
	115	01	94360400	9		PC RES FXD FM 10.0K OHM 1P 1/4W		P			
	116	01	94402166	6		PC RES FM 2.7K OHM 1/4W CARBON		P			
	117	01	94402158	3		PC RES FM 1.2KOHM 1/4W CARBON		P			
	118	01	94402154	2		PC RES FM 820 OHM 1/4W CARBON		P			
	119	01	94402139	3		PC RES FM 200 OHM 1/4W CARBON		P			
	120	01	94402161	7		PC RES FM 1.6K OHM 1/4W CARBON		P			
	121	01	24500144	1		PC RES FXD COMP 160 OHMS 1/2W 5P		P			
	122	01	94842154	0		PC CAP FXD CER .001UF 10P 1000V		P			
	124	01	15101109	5		PC DIO 1N752A 400MW ZEN VR 5.6V		P			
	125	01	94227253	5		PC CAP 1300 PF DIPPED MICA		P			
	126	01	94354824	8		PC CAP CER 0.047 UF TYPE 1 20P		P			
	127	01	94240423	7		PC CAP CER 150PF 50V 10P		P			
	129	01	94240421	1		PC CAP CER 82 PF 50V		P			
	130	01	94356324	7		PC INDUCTOR 10 MH		P			

BUILD ARC 214

ASSEMBLY PARTS LIST

PRINT DATE: 02-05-81
 PAGE: 6
 FILE CHANGE NO.: ~~0014514~~ 14571

QTY	U	PART NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	DWG. RESP.	FILE DATE
0860		90446260	3	D	D	PW BD ASSY 98ED REPLACED BY 90146284	S	REL	12-17-80	FA501A	02-05-81
T	QTY	U	PART NUMBER	CD	REV.	DESCRIPTION	MC	STATUS	STATUS DATE	DWG. RESP.	FILE DATE
	131	01	94402148	4		PC RES FM 470 OHM 1/4W CARBON		P			
	132	01	15101108	7		PC DIO 1N751A 400MW ZEN VR 5.1V		P			
	133	01	51850400	6		1083 FT CABLE RAD/FRQ 26GA STRD RG		W			
	135	01	51873600	4		015 OZ VARNISH INSUL RED GLPT		B	14514		8105
						0109 TOTAL LINES					

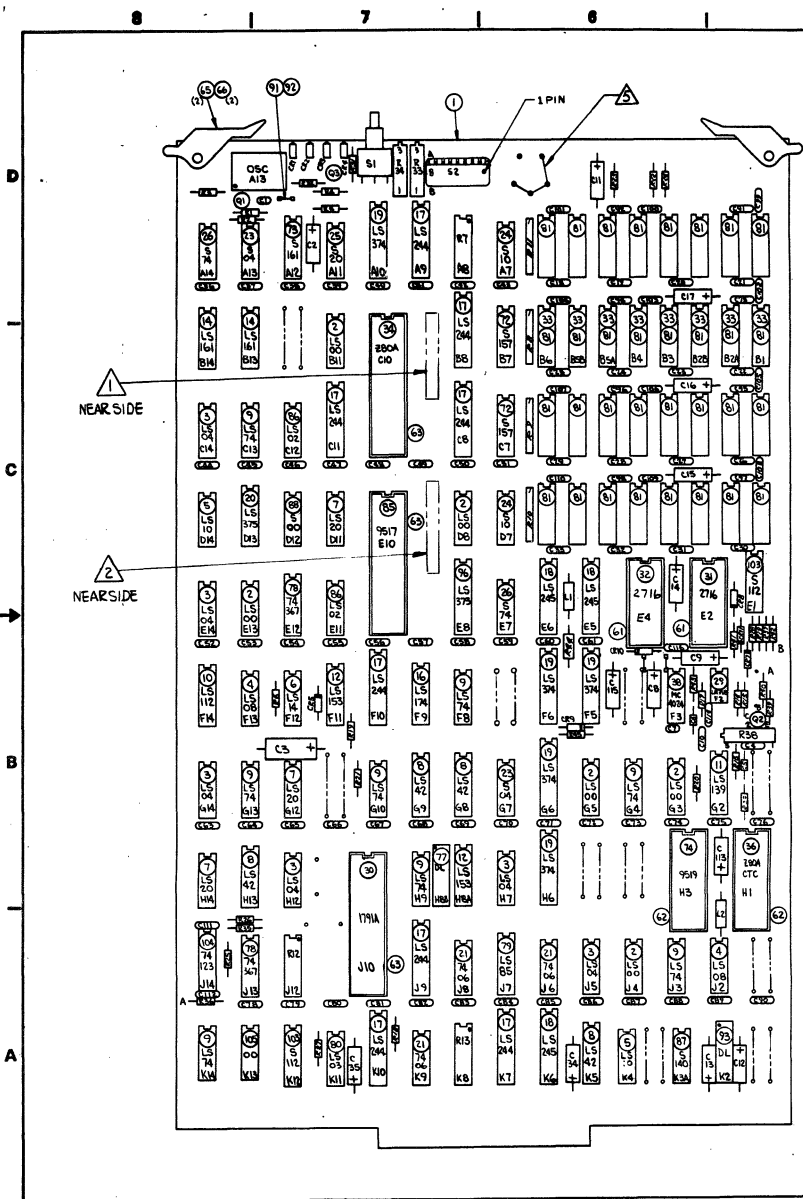

FIND NUMBER	REFERENCE DESIGNATION
37	OSC
39	S2
41	R3
42	R2, R4
44	R1
47	R5, R6
48	R13
51	C36 THRU C61 C63 THRU C76 C78 THRU C98, C114
53	C8, C9, C12, C13, C34, C35
54	C11, C14, C15, C16, C17, C113, C115
55	C3
56	C1
57	CR1 CR2 CR3 CR4
58	CR5 CR9, CR10, CR11
59	Q1, Q3
60	S1
69	C2
70	R8, R9, R10, R11
75	C18 THRU C33 C97 THRU C110
82	R7, R12
83	R41
90	R18, R19, R21, R23, R25, R26, R27, R45
97	R20
102	C7
106	R33
107	R34
108	R38
110	Q2
111	R16, R17
112	R14, R15
113	R35, R36
114	R28, R29
115	R30, R37
116	R39, R40
117	R43
118	R32
119	R31
120	R42
121	R44
122	C116
124	C28
125	C5, C6
126	C9, C10
127	C112
129	C111
130	L1, L2
131	R22, R24
132	CR7

REV	ECO	DESCRIPTION	DIFF	DATE	CHNG	APP
A	14940-1-3	RELEASED CLASS "A"		5-27-71		
B	14965	REVISED PER BCO	EE	1/18/76	EE	
C	15351	ADDED ITEM 8 TO CHG TABLE	RK	5-27-73	WJG	
D	15475	CHG F/N 16	RH	1-17-82		
E	15771	INACTIVE, REPLACED BY 90446284	EE	3/18/84	EE	

- NOTES:
- 1. MARK ASSY NO. AND REV LEVEL .12 HIGH, WHITE IN AREA SHOWN PER CDC SPEC 1012150B.
 - 2. MARK SERIAL NUMBER IN AREA SHOWN PER RVL0PS P&P NO. 80:20:34 AND PER MARKING REQUIREMENTS IN NOTE (1) ONE.
 - 3. FIND NUMBERS, ELEMENT IDENTIFIERS, AND REFERENCE DESIGNATIONS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON PART.
 - 4. AFTER ALIGNING R33, R34 AND R38, SEAL THEM WITH GLYPTAL CDC P/N 51873600.
 - 5. SOLDER 226A. BUSS WIRE (F/N 136) IN THIS CONFIGURATION.

DELETIONS		ADDITIONS	
CUT FOIL:		ADD WIRE SOLDER SIDE	
1) K3 B-4	S.S.	1) K4-11 TO K3A-13	
2) R42-B	S.S.	2) R42-B TO R40-A	
3) R35-1	S.S.	3) R40-A TO F2-5	
4) R36-A	S.S.	4) R38-2 TO F2-6	
		5) F2-7 TO Q2-B	
		6) ADD CENTER CONDUCTOR	
		COAX FROM R33-2 TO	
		R36-A	
		7) ADD BRAID SHIELD	
		COAX FROM 52-8A TO	
		J14-B	
		8) E10-19 TO E10-20	

INACTIVE

APL90446284 DETACHED LISTS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES		CONTROL DATA		TITLE	
	FRAMES	ANGLES	PART LAYER ON	FAS01A	P.C. CARD ASSEMBLY, 9BED (DISK CONTROLLER)	
	DO NOT SCALE DRAWING	ENGINEER	W. J. HERMAN	2-24-81	CODE IDENT	DRAWING NO
	MATERIAL	APPROVED			15920	D 90446284
FINISH	MECH			SCALE 2/1	NHA	SHEET 1 OF 1

BUILD ARC 214

ASSEMBLY PARTS LIST

PRINT DATE 03-09-83 PAGE 1 FILE CHANGE NO. 00015771

DIV.		ASSEMBLY NUMBER		CD	REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE		ENG. RESP.	FILE DATE	
0860		90446284		3	F	D	REPLACED BY 90446570 15771		N	INA	03-04-83		FA501A	03-09-83	
TRFIND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT		
001	01	90446259	5	1		PC PW RD 9BED	P								
002	01	15144900	6	6		PC IC 74LS00 140LS TTL 4 2IN NND	P								
003	01	15145100	2	6		PC IC 74LS04 146LS TTL HEX INVTR	P								
004	01	15145400	6	2		PC IC 74LS08 201LS TTL 4 2IN AND	P								
005	01	15145600	1	2		PC IC 74LS10 141LS TTL 3 3IN NND	P								
006	01	15148500	0	1		PC IC 74LS14 943LS TTL HEX NAND	P								
007	01	15145900	5	3		PC IC 74LS20 208LS TTL 2 4IN NND	P								
008	01	15147600	9	4		PC IC TYPE 74LS42	P								
009	01	15146300	7	8		PC IC 74LS74 175LS TTL 2 D F/F	P								
010	01	15146500	2	1		PC IC 74LS112 243LS TTL DUAL F/F	P								
011	01	15146600	0	1		PC IC 74LS139 538LS DECODER 10F4	P								
012	01	15148700	6	2		PC IC 74LS153 TTL DUAL 4I/P	P								
014	01	15146800	6	2		PC IC 74LS161 159LS TTL 4B CNTR	P								
016	01	15147500	1	1		PC IC 74LS174 519LS TTL 6B LATCH	P		15675	15675		8325	8325		
016	02	95965100	1	1		PC IC 74LS174 68IT LATCH	P								
017	01	15163414	4	8		PC IC 74LS244 TTL 8 3-STATE DRVR	P								
018	01	15163324	5	3		PC IC 74LS245 TTL 8 BUS XCEIVER	P								
019	01	15163404	5	5		PC IC 74LS374 TTL 8 D FLIP/FLOP	P								
020	01	15163232	0	1		PC IC 74LS375 TTL 4-BIT	P								
021	01	96744155	1	3		PC IC 7406 DRVR HEX INV BUFFER	P								
023	01	88883700	2	2		PC IC 74S04 146S TTL HEX INVTR	P								

BUILD ARC 214

ASSEMBLY PARTS LIST

PRINT DATE 03-09-83 PAGE 2 FILE CHANGE NO. 00015771

DIV.		ASSEMBLY NUMBER		CD	REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE		ENG. RESP.	FILE DATE	
0860		90446284		3	F	D	REPLACED BY 90446570 15771		N	INA	03-04-83		FA501A	03-09-83	
TRFIND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT		
024	01	88884200	2	2		PC IC 74S10 141S TTL 3 3-IN NAND	P								
025	01	88885300	9	1		PC IC 74S20 208S TTL 2 4-IN NAND	P								
026	01	88923000	9	2		PC IC 74S74 175S TTL 2 D-TYP F-F	P								
029	01	15157100	7	1		PC IC LM358N 344 DUAL OP-AMP	P								
030	01	15163444	1	1		PC IC FD1791	P								
031	01	66312070	7	1		PC FLEX DISK CODED E-ROM	G								
032	01	66312071	5	1		PC FLEX DISK CODED E-ROM	G								
033	01	15153821	2	8		PC IC 4116 MOS 16384-BIT RAM	P								
034	01	15163201	5	1		PC IC 780A MOS 8BIT PROCESSOR	P								
036	01	15164429	1	1		PC IC 280A-CTC SILICON GATE NMOS	P								
037	01	51904109	9	1		PC OSC, TTL DIP 16.000MHZ 500MH	P								
038	01	15105700	7	1		PC IC 4024 582 TTL DL/V CONT MVB	P								
039	01	83452230	2	1		PC SWITCH DUAL 8POS .88 FIG 2	P								
041	01	94402116	1	1		PC RES FXD C FM 22 OHM 5P 1/4W	P								
042	01	94402140	1	2		PC RES FXD C FM 220 OHM 5P 1/4W	P								
044	01	94402157	5	1		PC RES FXD C FM 1.1K OHM 5P 1/4W	P								
047	01	94402180	7	2		PC RES FXD C FM 10K OHM 5P 1/4W	P								
048	01	95894500	8	1		PC RES MOD 16 PINS 28 RESISTORS	P								
051	02	19115400	4	62		PC CAP FXD CEP .01UF +80-20P 50V	P		14856			8148			
053	01	24504333	6	6		PC CAP FXD TANT 2.2UF 20P 35VDCW	P								
054	01	24504369	0	7		PC CAP FXD TANT 10UF 20P 15VDCW	P								

ASSEMBLY PARTS LIST

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	90446284	3	E	D	REPLACED BY 90446570 15771	N	INA	03-04-83	FA501A	03-09-83			
TRFIND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
055	01	24504373	2	1		PC CAP FXD TANT 47UF 20P 15VDCW	P						
056	01	75887677	5	1		PC CAP CER 33PF 5P	P						
057	01	19171201	7	4		PC LIGHT IND	P						
058	01	51007385	1	4		PC DIO 1N4148 SIL MICRO 30V 10MA	P						
059	01	51714000	0	2		PC XSTR, 2N2907 BI-POLAR PNP SI	P						
060	01	51940524	5	1		PC SWITCH PUSH BUTTON RT ANGLE	P						
061	01	51848404	3	2		PC SOCKET, IC 24-POS DIL F-1 SN	P						
062	01	51848405	0	2		PC SOCKET, IC 28-POS DIL F-1 SN	P						
063	01	51848406	8	3		PC SOCKET, IC 40-POS DIL F-1 SN	P						
065	01	82311900	3	2		PC INJECTOR-EJECTOR, NATURAL PCB	P						
066	01	93533118	1	2		PC ROLLPIN, .1250 X .250L STL ZP	B						
069	01	24504320	3	1		PC CAP FXD TANT 33UF 20P 6VDCW	P						
070	01	94375122	2	4		PC RES 85IP NTWK 470HM 3P	P						
072	01	15117400	0	2		PC IC TTL 8MUX 2-1 A 1895 DIC16	P						
073	01	15150400	8	1		PC IC 93S16 TTL 4BIT	P						
074	01	15163459	9	1		PC IC 9519 INT CONT	P						
075	01	94354826	3	28		PC CAP FXD CER 0.10UF 50V	P						
077	01	51918283	6	1		PC DELAY LINE TAP 100 OHM FIG 5	P						
078	01	15140400	1	2		PC IC DM 8097 HEX BUFFER TRI STA	P						
079	01	15147200	8	1		PC IC 74LS85 COMP TTL 4 BIT	P						
080	01	15145200	0	1		PC IC 74LS03 202LS TTL4 2-I NAND	P						

ASSEMBLY PARTS LIST

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	90446284	3	E	D	REPLACED BY 90446570 15771	N	INA	03-04-83	FA501A	03-09-83			
TRFIND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
081	01	51848401	9	32		PC SOCKET, IC 16-POS DIL F-1 SN	P						
082	01	75738666	9	2		PC RES 16PIN DIP 10K R 2P 1.5W 2	P						
083	01	94402141	9	1		PC RES FXD C FM 240 OHM 5P 1/4W	P						
085	01	15163458	1	1		PC IC 9517A MULTIMODE DMA CONT	P						
086	01	15145000	4	2		PC IC 74LS02 148LS TTL 4 2IN NOR	P						
087	01	15158700	3	1		PC IC 74S140 TTL 2 4IN NAND 8FR	P						
088	01	88884500	5	1		PC IC 74S00 140S TTL 4 2-IN NAND	P						
090	01	94402156	7	8		PC RES FXD C FM 1.0K OHM 5P 1/4W	P						
091	01	51903400	3	2		PC PIN, .025 IN SQ PC, NTG 2A	P						
092	01	77612624	5	1		PC CONNECTOR, JUMPER	P						
093	01	51918281	0	1		PC DELAY LINE TAP 200 OHM FIG 3	P						
094	01	90446258	7	REF		PC SCH DIAG 9RED	U						
095	01	16033200	3	REF		PC FAB SPEC, MULTI-LAYER PWR	U						
096	01	15163434	2	1		PC IC 74LS373 8 D XPARENT LATCH	P						
097	01	94402168	2	1		PC RES FXD C FM 3.3K OHM 5P 1/4W	P						
102	01	94227227	9	1		PC CAP 110 PF DIPPED MICA	P						
103	01	15158600	5	2		PC IC 74S112 243S TTL 2 J-K F/F	P						
104	01	50254300	2	1		PC IC 74123 193 TTL 2 RETGR MVB	P						
105	01	66299099	3	1		PC IC 7400 TTL QUAD 2-IN NAND	P						
106	01	51908710	0	1		PC RES CERM VAR 20K OHM 10P 3/4W	P						
107	01	51908709	2	1		PC RES VAR 10K OHM	P						

BUILD ARC 214


ASSEMBLY PARTS LIST

BUILD ARC 214											ASSEMBLY PARTS LIST			PRINT DATE	PAGE	FILE CHANGE NO.						
0860											94446284			3	F	0	REPLACED BY 94446570 15771	N	INA	03-04-83	FA501A	03-09-83
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION			MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE										
FIND NO	LI	PART NUMBER	CD	IN	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT								
108	01	51908708	4		1		PC RES CER VAR 5K OHM 10P 3/4W	P														
110	01	51003092	7		1		PC XSTR, 2N2222 HI-SPEED NPN SI	P														
111	01	94360304	3		2		PC RES FXD FM 1100 OHM 1P 1/4W	P														
112	01	94360352	2		2		PC RES FXD FM 3480 OHM 1P 1/4W	P														
113	01	94402173	2		2		PC RES FXD C FM 5.1K OHM 5P 1/4W	P														
114	01	94402164	1		2		PC RES FXD C FM 2.2K OHM 5P 1/4W	P														
115	01	94360400	9		2		PC RES FXD FM 10.0K OHM 1P 1/4W	P														
116	01	94402166	6		2		PC RES FXD C FM 2.7K OHM 5P 1/4W	P														
117	01	94402158	3		1		PC RES FXD C FM 1.2K OHM 5P 1/4W	P														
118	01	94402154	2		1		PC RES FXD C FM 820 OHM 5P 1/4W	P														
119	01	94402139	3		1		PC RES FXD C FM 200 OHM 5P 1/4W	P														
120	01	94402161	7		1		PC RES FXD C FM 1.6K OHM 5P 1/4W	P														
121	01	24500144	1		1		PC RES FXD COMP 160 OHM 5P 1/2W	P														
122	01	94842154	0		1		PC CAP FXD CEP .001UF 10P 1000V	P														
124	01	15101109	5		1		PC DIO 1N752A 400MH ZEN VR 5.6V	P														
125	01	94227253	5		2		PC CAP 1300 PF DIPPED MICA	P														
126	01	94354824	8		2		PC CAP CER 0.047 UF TYPE 1 20P	P														
127	01	94240423	7		1		PC CAP FXD CEP 150PF 10P 50VDCW	P														
129	01	94240421	1		1		PC CAP FXD CER 82PF 10P 50VDCW	P														
130	01	94356324	7		2		PC INDUCTOR 10 MH	P														
131	01	94402148	4		2		PC RES FXD C FM 470 OHM 5P 1/4W	P														

BUILD ARC 214

ASSEMBLY PARTS LIST

BUILD ARC 214											ASSEMBLY PARTS LIST			PRINT DATE	PAGE	FILE CHANGE NO.						
0860											94446284			3	F	D	REPLACED BY 94446570 15771	N	INA	03-04-83	FA501A	03-09-83
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION			MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE										
FIND NO	LI	PART NUMBER	CD	IN	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT								
132	01	15101108	7		1		PC DIO 1N751A 400MH ZEN VR 5.1V	P														
133	01	51850400	6		1	083	FT CABLE RAD/FRQ 26GA STRD RG	W														
135	01	51873600	4		015		OZ VARNISH INSUL RED GLPT	B														
136	01	24501801	5		333		FT WIRE BUSS 22AWG SOLID CU/SN	W		14965			8204									
							0100 TOTAL LINES															

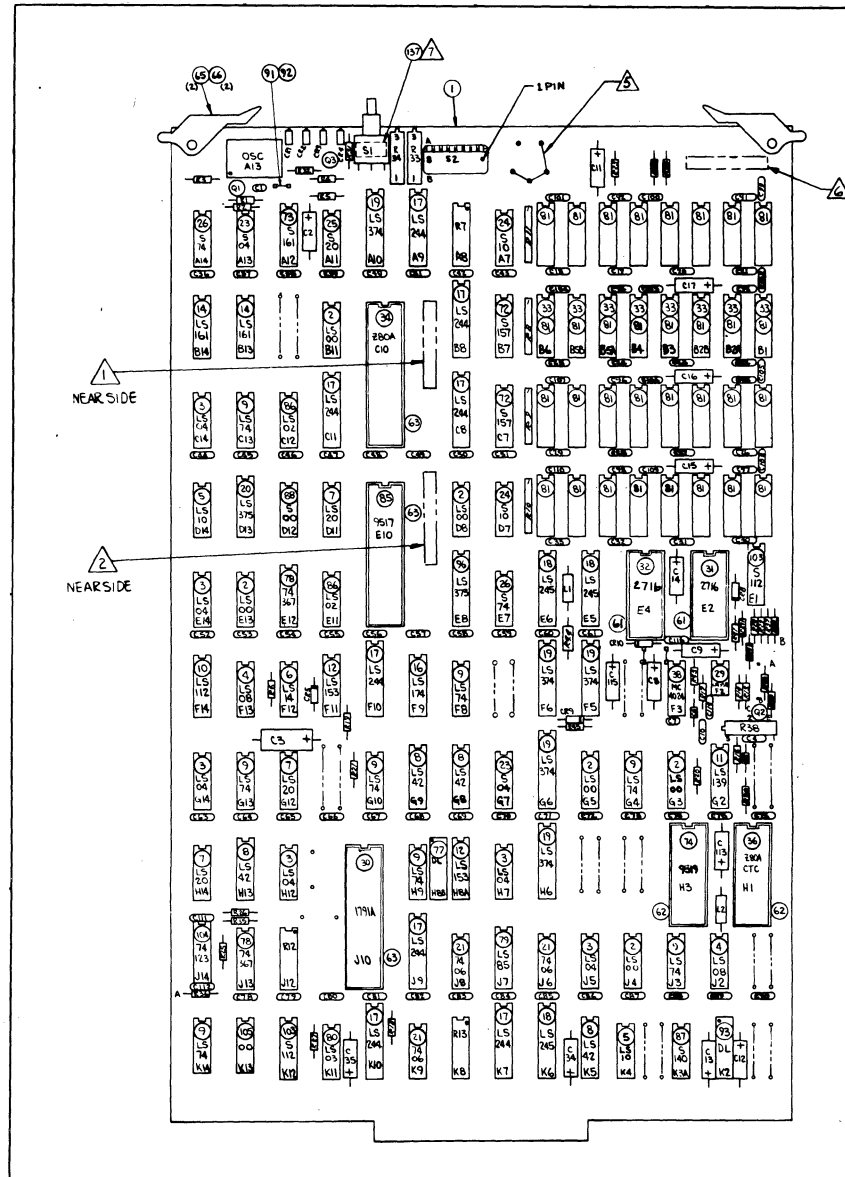

SHEET REVISION STATUS		REVISION RECORD				
REV	ECO	DESCRIPTION	DRW 1	DATE	CHD	APVD
A	1512-44	Released Class "A"		2-22-83		J.W.
B	1/63/10	INACTIVE, SERVICE USE ONLY, SUPERSEDED BY 9044 8576	EE	1/16/83	53	1/15
C	1/68/73					1/28

CROSS REFERENCE TABLE	
RND NUMBER	REFERENCE DESIGNATION
37	OSC
39	S2
41	R3
42	R2,R4
44	R1
47	R5,R6
48	R15
51	C36 THRU C41, C63 THRU C76, C78 THRU C98,C116
53	C8,C9,C7,C13,C24,C35
54	C11,C14,C15,C16,C17,C113,C115
55	C3
56	C1
57	CR1,CR2,CR3,CR4
58	CR5 CR9,CR10,CR11
59	Q1,Q3
60	S1
63	C2
70	R8,R9,R10,R11
75	C18 THRU C33,C39 THRU C110
82	R7,R12
83	R41
90	R18,R19,R21,R23,R25,R26,R27,R46
97	R20
102	C7
106	R33
107	R34
108	R35
110	Q2
111	R16,R17
112	R14,R15
113	R35,R36
114	R28,R29
115	R30,R37
116	R39,R40
117	E43
118	E32
119	E31
120	R42
121	E44
122	C116
124	CP8
125	C5,C6
126	C4,C10
127	C112
129	C111
130	L1,L2
131	R22,R24
132	CR7

CHANGE TABLE	
DELETIONS	ADDITIONS
CUT FOHL:	ADD WIRE SOLDER SIDE
1)K3-B-4 S.S.	1)K4-11 TO K3A-13
2)R42-B S.S.	2)R42-B TO R40-A
3)R33-1 S.S.	3)R40-A TO F2-5
4)R36-A S.S.	4)R36-2 TO F2-6
5)R4-1 S.S.	5)F2-7 TO Q2-B
6)F13-10 S.S.	6)ADD CENTER DRAINAGE CONX FROM R33-2 TO R36-A
	7)ADD BRAID SHIELD CONX FROM S2-8A TO J14-B
	8)E10-19 TO E10-20
	9)E12-13 TO G7-9
	10)G7-8 TO K4-1
	11)F13-9 TO F13-10

- NOTES:
- MARK ASSEMBLY NUMBER, REVISION LEVEL AND LOCATION IN AREA SHOWN. MARK PER CDC SPECIFICATION 10121508, CHARACTER HEIGHT .12 (10 POINT), COLOR WHITE.
 - MARK SERIAL NUMBER IN AREA SHOWN PER RVLOPS P & P NO. 80:20:34 AND PER MARKING REQUIREMENTS IN NOTE (1) ONE.
 - FIND NUMBERS, ELEMENT IDENTIFIERS AND REFERENCE DESIGNATIONS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON PART.
 - AFTER ALIGNING R33, R34, AND R38, SEAL THEM WITH GLYPTAL CDC P/N 51873800.
 - SOLDER 22 GAUGE BUSS WIRE (F/N 136) IN THIS CONFIGURATION.
 - IDENTIFY BOARD TYPE AS 9BED-3 PER SPECIFICATION IN NOTE 1.
 - BEFORE MOUNTING S1 INSTALL F/N 137 ON BOTTOM SIDE OF SWITCH TO KEEP SWITCH PARALLEL TO BOARD.

INACTIVE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN TOLERANCES PLACE PLACE ANGLES	DRW: <i>[Signature]</i> WJZ CHKD: <i>[Signature]</i> WJZ ENGR: <i>[Signature]</i> WJZ MFG: <i>[Signature]</i> WJZ APVD: <i>[Signature]</i> WJZ MATERIAL: <i>[Signature]</i> WJZ	CONTROL DATA CORPORATION
TITLE: P.C. CARD ASSEMBLY 9BED-3 (DISK CONTROLLER)		
PART: APL 90448570		SIZE: D 15920
DETACHED LISTS		SCALE: 2/11 NHA 15632572
THIRD ANGLE PROJECTION		SHEET 1 OF 1

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE		PAGE		FILE CHANGE NO.	
REPLACED BY 90446556 16873										11-08-84		3		00016873	
REPLACED BY 90446556 16873										11-08-84		FA501A		11-08-84	
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
T/NO	U	PART NO.	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT	WK IN	WK OUT
C56	C1	75887677	5	1		PC CAP CER RAD 33PF 5P 50VCCW	P								
C57	C1	19171201	7	4		PC LIGHT IND	P								
C58	C1	51007385	1	4		PC DIC 1N4148 SIL MICRO 30V 10MA	P								
C59	C1	51714000	0	2		PC XSTR, 2N2907 BI-PCLAR PNP SI	P								
C60	C1	51940524	5	1		PC SW, PCM-PB SPDT R-ANGLE FIG-1	P								
C61	C1	51E48404	3	2		PC SOCKET, IC 24-PCS DIL F-1 5N	P								
C62	C1	51E48405	0	2		PC SOCKET, IC 28-PCS DIL F-1 5N	P								
C63	C1	51E48406	8	3		PC SOCKET, IC 40-PCS DIL F-1 5N	P								
C65	C1	82311900	3	2		PC INJECTOR-EJECTOR, NATURAL PCR	P								
C66	C1	93533118	1	2		PC ROLLPIN, .1250 X .25CL STL ZP	P								
C69	C1	24504320	3	1		PC CAP FXD TANT 33UF 20P 6VDCW	P								
C70	C1	54375122	2	4		PC RES 8SIP ATWK 47 OHM 3P 1/4W	P								
C72	C1	15117400	0	2		PC IC TTL 8MUX 2-1 A 1895 CICI6	P								
C73	C1	15150400	8	1		PC IC 93S16 TTL 4BIT	P								
C74	C1	151E3459	9	1		PC IC 9519 INT CONT	P								
C75	C1	54354926	3	28		PC CAP F-K CER .104F 20P 50V I	P								
C77	C1	51918283	6	1		PC DELAY LINE TAP 100 OHM FIG 5	P								
C78	C1	15140400	1	2		PC IC DM 8097 HEX BUFFER TRI STA	P								
C79	C1	15147200	8	1		PC IC 74LS85 CCMP TTL 4 BIT	P								
C80	C1	15145200	0	1		PC IC 74LS03 2C2LS TTL 4 2IN AND	P								
C81	C1	51E48401	9	32		PC SOCKET, IC 16-PCS DIL F-1 5N	P								

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE		PAGE		FILE CHANGE NO.	
REPLACED BY 90446556 16873										11-08-84		4		00016873	
REPLACED BY 90446556 16873										11-08-84		FA501A		11-08-84	
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
T/NO	U	PART NO.	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT	WK IN	WK OUT
C82	C1	75738666	9	2		PC RES 16PIN DIP 10K R 2P 1.5W 2	P								
C83	C1	94402141	9	1		PC RES FXD C FH 240 OHM 5P 1/4W	P								
C85	C1	151E3458	1	1		PC IC 9517A MULTIMODE DMA CONT	P								
C86	C1	15145000	4	2		PC IC 74LS02 148LS TTL 4 2IN NOR	P								
C87	C1	15158700	3	1		PC IC 74S140 TTL 2 4IN NAND 8FR	P								
C88	C1	88884500	5	1		PC IC 74S00 14CS TTL 4 2-IN NAND	P								
C90	C1	94402156	7	8		PC RES FXD C FH 1.0K OHM 5P 1/4W	P								
C91	C1	51903400	3	2		PC PIN, .025 IN SQ PC MTG 2A	P								
C92	C1	77612624	5	1		PC CONNECTOR, JUMPER	P								
C93	C1	51918281	0	1		PC DELAY LINE TAP 200 OHM FIG 3	P								
C94	C1	90446298	7	REF		PC SCH DIAG 9BED	D								
C95	C1	16033200	3	REF		PC FAB SPEC, MULTI-LAYER PWB	D								
C96	C1	151E3434	2	1		PC IC 74LS373 8 D XPARENT LATCH	P								
C97	C1	94402168	2	1		PC RES FXD C FH 3.3K OHM 5P 1/4W	P								
102	C1	94227227	9	1		PC CAP DIP MICA 110PF 2P 300V	P								
103	C1	15158600	5	2		PC IC 74S112 243S TTL 2 J-K F/F	P								
104	C1	90294300	2	1		PC IC 74123 193 TTL 2 RETOR MVB	P								
105	C1	66299099	3	1		PC IC 7400 TTL QUAD 2-IN NAND	P								
106	C1	51908710	0	1		PC RES CERM VAR 20K OHM 10P 3/4W	P								
107	C1	51908709	2	1		PC RES CERM VAR 10K OHM 10P 3/4W	P								
108	C1	51908708	4	1		PC RES CERM VAR 5K OHM 10P 3/4W	P								

ASSEMBLY PARTS LIST


BUILD ARC 214										PRINT DATE		PAGE		FILE CHANGE NO.	
REPLACED BY 90446596 16873										11-08-84		5		00016873	
REPLACED BY 90446596 16873										11-08-84		FA501A		11-08-84	
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
0860	90446570	5	C	D		N	INA	11-08-84	FA501A	11-08-84					
TRND NO.	U	PART NO.	CD	QTY	U/M	PART DESCRIPTION	MC	YLD							
110	01	51003092	7	1		PC XSTR 2N2222 HI-SPEED NPN SIL	P								
111	01	94360304	3	2		PC RES FXD FM 1100 OHM 1P 1/4W	P								
112	01	94360352	2	2		PC RES FXD FM 3480 OHM 1P 1/4W	P								
113	01	94402173	2	2		PC RES FXD C FM 5.1K OHM 5P 1/4W	P								
114	01	94402164	1	2		PC RES FXD C FM 2.2K OHM 5P 1/4W	P								
115	01	94360400	9	2		PC RES FXD FM 10.0K OHM 1P 1/4W	P								
116	01	94402166	6	2		PC RES FXD C FM 2.7K OHM 5P 1/4W	P								
117	01	94402158	3	1		PC RES FXD C FM 1.2K OHM 5P 1/4W	P								
118	01	94402154	2	1		PC RES FXD C FM 820 OHM 5P 1/4W	P								
119	01	94402139	3	1		PC RES FXD C FM 200 OHM 5P 1/4W	P								
120	01	94402161	7	1		PC RES FXD C FM 1.6K OHM 5P 1/4W	P								
121	01	24900144	1	1		PC RES FXD COMP 160 OHM 5P 1/2W	P								
122	01	94842154	0	1		PC CAP FXD CER .001UF 10P 1000V	P								
124	01	15101109	5	1		PC DIO 1N752A 400PW ZEN VR 5.6V	P								
125	01	94227253	5	2		PC CAP DIP MICA 1300PF 2P 100V	P								
126	01	94354824	8	2		PC CAP M-K CER .047UF 20P 50V I	P								
127	01	94240423	7	1		PC CAP FXD CER 150PF 10P 50VDCW	P								
129	01	94240421	1	1		PC CAP FXD CER 82PF 10P 50VDCW	P								
130	01	94356324	7	2		PC INDUCTOR 10 MH	P								
131	01	94402148	4	2		PC RES FXD C FM 470 OHM 5P 1/4W	P								
132	01	15101108	7	1		PC DIO 1N751A 400PW ZEN VR 5.1V	P								

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE		PAGE		FILE CHANGE NO.	
REPLACED BY 90446596 16873										11-08-84		6		00016873	
REPLACED BY 90446596 16873										11-08-84		FA501A		11-08-84	
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
0860	90446570	5	C	D		N	INA	11-08-84	FA501A	11-08-84					
TRND NO.	U	PART NO.	CD	QTY	U/M	PART DESCRIPTION	MC	YLD							
133	01	51850400	6	1	083	FT CABLE RAD/FRQ 26GA STRD RG	W								
135	01	51873600	4		015	OZ VARNISH INSUL RED GLPT	B								
136	01	24901801	5		333	FT WIRE, BUSS 22AWG SOLID CU/5N	W								
137	01	75312014	6		021	FT TAPE URETHANE FCAM PRESL SENS	B				16310			8343	
						0109 TOTAL LINES									

296597706

SHEET REVISION STATUS		REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE	CHGD	APVD
00	296597706	Released Class "B"	J.S	6-22-84		R4 C
01	52418	CHG P/N 27	J.S	8-9-84		R4 C
02	52421	ADD NOTE G & POLARITY MARKS	W.J.G	8-9-84		R4 C
A	14802-03	RELEASED CLASS "A"		3-17-86		R4 C
B	17061	P/N 105 WAS 94402166	J.S	2-12-85		R4 C

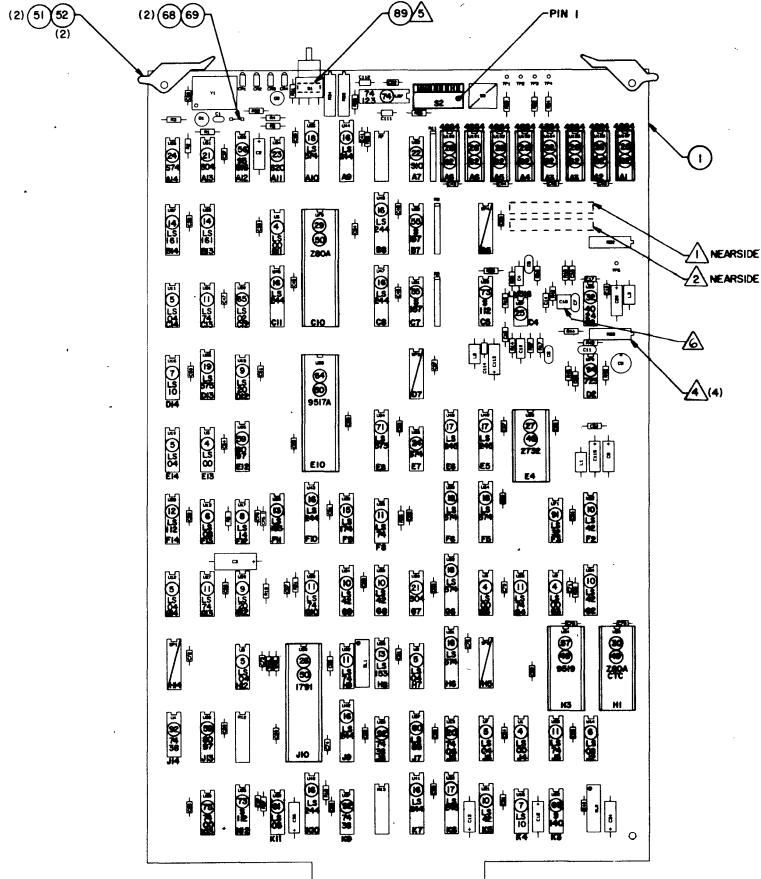

CROSS REFERENCE	
Find No.	Reference Designation
31	Y1
33	S2
34	R3
35	R2,R4
36	R1
37	R5,R6
38	R13
39	C17,C19,C36 THRU C52,C54 THRU C61,C63,C64,C66 THRU C76,C96,C97,C98,C114,C79 THRU C34
40	C9,C12,C13,C34,C35
41	C20,C13,C115
42	C3
43	C1
44	CR1,CR2,CR3,CR4
45	CR5
46	Q1,Q3
47	S1
53	C2
54	R8,R9,R11
56	DL1
63	R7,R12
67	R18,R19,R21,R23,R25,R26,R27,R39
70	DL2
72	R20
76	R33
77	R34
78	R16,R17
79	R14,R15
80	R35,R36
81	R32
82	R31
83	C5,C6
84	C4,C10
85	C12
86	C11
87	L1,L3
88	R22,R24
90	C18

CROSS REFERENCE	
Find No.	Reference Designation
93	C14,C15,C16,C53,C65,C95
95	R50
96	R38
97	C7,C11
98	L2
99	R43
100	R45
101	R30,R37
102	R42,R44
103	C8
104	R48
105	R49

- NOTES:
- ▲ MARK ASSEMBLY NUMBER, REVISION LEVEL AND LOCATION CODE IN AREA SHOWN. MARK PER CDC SPECIFICATION 10121508, CHARACTER HEIGHT .12 (10 POINT), COLOR WHITE.
 - ▲ MARK SERIAL NUMBER IN AREA SHOWN PER RYLOPS P & P NO. 80-20/34 AND PER MARKING REQUIREMENTS IN NOTE (1) ONE.
 - 3. FIND NUMBERS, ELEMENT IDENTIFIERS AND REFERENCE DESIGNATIONS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON PART.
 - ▲ AFTER ALIGNING R33, R34, R38 AND R50, SEAL THEM WITH GLYPTAL CDC P/N 51873600, (F/N 106).
 - ▲ BEFORE MOUNTING S1, INSTALL F/N 89 ON BOTTOM SIDE OF SWITCH TO KEEP SWITCH PARALLEL TO BOARD.
 - ▲ TO BE INSTALLED BY HAND (CANNOT BE AQUEOUS CLEANED)

CHANGE TABLE	
Deletions	Additions

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN ——— TOLERANCES	OWN	5/11	5/11	CONTROL DATA CORPORATION	TITLE
	CHGD	5/11	5/11		
PLACE PLACE ANGLES	ENGR	5/11	5/11	PRINTED WIRING ASSEMBLY	9BED-4 (DISK CONTROLLER)
± ± ±	MFG	5/11	5/11		
MATERIAL	APVD	5/11	5/11	SIZE	D 15920
FINISH	MECH	5/11	5/11	FSCM NO	90446596
THIRD ANGLE PROJECTION	EQUIP	5/11	5/11	SCALE	1/1 NHA 15632572
APL 90446596	DETACHED LISTS	FASO1-A		SHEET	1 OF 1

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE	PAGE	FILE CHANGE NO.			
										02-04-85	1	00017061			
CD ASSY 98E0-4 DISK CONTRLR										STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
										S	08-17-84	FA501A	02-04-85		
TRND NO.	U	PART NO.	CD	REV.	DWG.	QUANTITY	U/M	DESCRIPTION	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	90446595	2			1		PC PH 80 98E0-4 DISK CONTRLR		P					
002	01	90446594	5	REF				PC SCH DIAG 98E0-4 DISK CONTRLR		D					
003	01	16033200	3	REF				PC FAB SPEC, MULTI-LAYER PWB		D					
004	01	15144900	6			5		PC IC 74LS00 140LS TTL 4 2IN NND		P					
005	01	15145100	2			6		PC IC 74LS04 146LS TTL HEX INVTR		P					
006	01	15145400	6			2		PC IC 74LS08 201LS TTL 4 2IN AND		P					
007	01	15145600	1			2		PC IC 74LS10 141LS TTL 3 3IN NND		P					
008	01	15148500	0			1		PC IC 74LS14 943LS TTL HEX NAND		P					
009	01	15145900	5			2		PC IC 74LS20 208LS TTL 2 4IN NND		P					
010	01	15147600	9			5		PC IC 74LS42 507LS TTL 4-10 DCDR		P					
011	01	15146300	7			7		PC IC 74LS74 179LS TTL 2 D F/F		P					
012	01	15146500	2			1		PC IC 74LS112 243LS TTL DUAL F/F		P					
013	01	15148700	6			2		PC IC 74LS153 TTL DUAL 41/P		P					
014	01	15146800	6			2		PC IC 74LS161 158LS TTL 4B CNTR		P					
015	01	95965100	1			1		PC IC 74LS174 TTL 6B D-TYP LATCH		P					
016	01	15163414	4			8		PC IC 74LS244 TTL 8 3-STATE DRVR		P					
017	01	15163324	5			3		PC IC 74LS245 TTL 8 BUS XCEIVER		P					
018	01	15163404	5			5		PC IC 74LS374 TTL 8 D FLIP/FLOP		P					
019	01	15163232	0			1		PC IC 74LS375 TTL 4-BIT		P					
020	01	96744155	1			1		PC IC 7406 200 TTL HEX INVTR 0-C		P					
021	01	88883700	2			2		PC IC 74S04 146S TTL HEX INVTR		P					

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE	PAGE	FILE CHANGE NO.			
										02-04-85	2	00017061			
CD ASSY 98E0-4 DISK CONTRLR										STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
										S	08-17-84	FA501A	02-04-85		
TRND NO.	U	PART NO.	CD	REV.	DWG.	QUANTITY	U/M	DESCRIPTION	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
022	01	88884200	2			1		PC IC 74S10 141S TTL 3 3-IN NAND		P					
023	01	88885300	9			1		PC IC 74S20 208S TTL 2 4-IN NAND		P					
024	01	88923000	9			2		PC IC 74S74 175S TTL 2 D-TYP F-F		P					
025	01	15164406	9			1		PC IC LM318 AMP		P					
026	01	15163444	1			1		PC IC FD1791		P					
027	01	66312072	3			1		PC FLEX DISK CODED E-ROM		G					
028	01	15123244	4			8		PC IC 64KXI DRAM 15 OHMS		P					
029	01	15163201	5			1		PC IC 280A MOS 8BIT PPROCESSOR		P					
030	01	15164429	1			1		PC IC 280A-CTC SILICON GATE NMOS		P					
031	01	91904109	9			1		PC OSC. TTL DIP 16.000MHZ 500MW		P					
032	01	15105700	7			1		PC IC 4024 582 TTL DL/V CONT MVB		P					
033	01	83452230	2			1		PC SWITCH DUAL 8POS .88 FIG 2		P					
034	01	94402116	1			1		PC RES FXD C FM 22 OHM 5P 1/4W		P					
035	01	94402140	1			2		PC RES FXD C FM 220 OHM 5P 1/4W		P					
036	01	94402157	5			1		PC RES FXD C FM 1.1K OHM 5P 1/4W		P					
037	01	94402180	7			2		PC RES FXD C FM 10K OHM 5P 1/4W		P					
038	01	95894500	8			1		PC RES MOD 16 PINS 28 RESISTORS		P					
039	01	19115400	4			61		PC CAP FXD CER .01UF +80-20P 50V		P					
040	01	24504333	6			5		PC CAP FXD TANT 2.2UF 20P 35VDCW		P					
041	01	24504369	0			3		PC CAP FXD TANT 10UF 20P 15VDCW		P					
042	01	24504373	2			1		PC CAP FXD TANT 47UF 20P 15VDCW		P					

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE		PAGE		FILE CHANGE NO.								
										02-04-85		3		00017061								
										STATUS DATE		ENG. RESP.		FILE DATE								
										08-17-84		FA501A		02-04-85								
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	DESCRIPTION					MC	STATUS	ECO. NO. IN		ECO. NO. OUT		S/N		WK IN		WK OUT		
0860	90446596	0	B	D	CD ASSY 98ED-4 DISK CONTRLR					S	REL	08-17-84		FA501A		02-04-85						
T/RD NO.	U	PART NO.	CD	QTY	U/M	PART DESCRIPTION					MC	YLD	ECO. NO. IN		ECO. NO. OUT		S/N		WK IN		WK OUT	
043	01	75887677	5	1		PC	CAP CER RAD 33PF 5P 50VDCW	P														
044	01	19171201	7	4		PC	LIGHT IND	P														
045	01	51007385	1	1		PC	DIC 1N4148 SIL MICRO 30V 10MA	P														
046	01	51714000	0	2		PC	XSTR, 2N2907 BI-POLAR PNP SI	P														
047	01	51940524	5	1		PC	SW, MOM-PB SPDT R-ANGLE FIG-1	P														
048	01	51848404	3	1		PC	SOCKET, IC 24-POS DIL F-1 SN	P														
049	01	51848405	0	2		PC	SOCKET, IC 28-POS DIL F-1 SN	P														
050	01	51848406	8	3		PC	SOCKET, IC 40-POS DIL F-1 SN	P														
051	01	82311900	3	2		PC	INJECTOR-EJECTOR, NATURAL PCB	P														
052	01	93533118	1	2		PC	ROLLPIN, .1250 X .250L STL ZP	P														
053	01	24504320	3	1		PC	CAP FXD TANT 33UF 20P 6VDCW	P														
054	01	94375122	2	3		PC	RES 85IP NTWK 47 OHM 3P 1/4W	P														
055	01	15117400	0	2		PC	IC 74S157/93S22 189S TTL MUX	P														
056	01	15150400	8	1		PC	IC 93S16 TTL 4BIT	P														
057	01	15163459	9	1		PC	IC 9519 INT CONT	P														
058	01	51918283	6	1		PC	DELAY LINE TAP 100 OHM FIG 5	P														
059	01	15140400	1	2		PC	IC DM 8097 HEX BUFFER TRI STA	P														
060	01	15147200	8	1		PC	IC 74LS85 COMP TTL 4 BIT	P														
061	01	15145200	0	1		PC	IC 74LS03 202LS TTL 4 2IN NND	P														
062	01	51848401	9	8		PC	SOCKET, IC 16-POS DIL F-1 SN	P														
063	01	75738666	9	2		PC	RES 16PIN DIP 10K R 2P 1.5W 2	P														

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE		PAGE		FILE CHANGE NO.								
										02-04-85		4		00017061								
										STATUS DATE		ENG. RESP.		FILE DATE								
										08-17-84		FA501A		02-04-85								
DIV.	ASSEMBLY NO.	CD	REV.	DWG.	DESCRIPTION					MC	STATUS	ECO. NO. IN		ECO. NO. OUT		S/N		WK IN		WK OUT		
0860	90446596	0	B	D	CD ASSY 98ED-4 DISK CONTRLR					S	REL	08-17-84		FA501A		02-04-85						
T/RD NO.	U	PART NO.	CD	QTY	U/M	PART DESCRIPTION					MC	YLD	ECO. NO. IN		ECO. NO. OUT		S/N		WK IN		WK OUT	
064	01	15163458	1	1		PC	IC 9517A MULTIPODE DMA CONT	P														
065	01	15145000	4	1		PC	IC 74LS02 148LS TTL 4 2IN NOR	P														
066	01	15158700	3	1		PC	IC 74S140 TTL 2 4IN NAND BFR	P														
067	01	94402156	7	8		PC	RES FXD C FM 1.0K OHM 5P 1/4W	P														
068	01	51903400	3	2		PC	PIN, .025 IN SQ PC MTG 2A	P														
069	01	77612624	5	1		PC	CONN, JUMPER FIG-3 .200SP AU	P														
070	01	51918281	0	1		PC	DELAY LINE TAP 200 OHM FIG 3	P														
071	01	15163434	2	1		PC	IC 74LS373 8 D XPARENT LATCH	P														
072	01	94402168	2	1		PC	RES FXD C FM 3.3K OHM 5P 1/4W	P														
073	01	15158600	5	2		PC	IC 74S112 243S TTL 2 J-K F/F	P														
074	01	50254300	2	1		PC	IC 74123 193 TTL 2 RETGR MVB	P														
075	01	66299099	3	1		PC	IC 7400 TTL QUAD 2-IN NAND	P														
076	01	51908710	0	1		PC	RES CERM VAR 20K OHM 10P 3/4W	P														
077	01	51908709	2	1		PC	RES CERM VAR 10K OHM 10P 3/4W	P														
078	01	94360304	3	2		PC	RES FXD FM 1100 OHM 1P 1/4W	P														
079	01	94360352	2	2		PC	RES FXD FM 3480 OHM 1P 1/4W	P														
080	01	94402173	2	2		PC	RES FXD C FM 5.1K OHM 5P 1/4W	P														
081	01	94402154	2	1		PC	RES FXD C FM 820 OHM 5P 1/4W	P														
082	01	94402139	3	1		PC	RES FXD C FM 200 OHM 5P 1/4W	P														
083	01	94227253	5	2		PC	CAP DIP MICA 1300PF 2P 100V	P														
084	01	94240444	3	2		PC	CAP FXD CER 47K PF 10P 50VDCW	P														

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE	PAGE	FILE CHANGE NO.			
										02-04-85	5	00017061			
CD ASSY 98ED-4 DISK CONTRLR										STATUS DATE	ENG. RESP.	FILE DATE			
										08-17-84	FA501A	02-04-85			
TRND NO.	U	PART NO.	CD	REV.	DWG.	QUANTITY	U/M	DESCRIPTION	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
085	01	94240423	7			1		PC CAP FXD CER 150PF 10P 50VDCM	P						
086	01	94240421	1			1		PC CAP FXD CER 82PF 10P 50VDCM	P						
087	01	94356324	7			2		PC INDUCTOR 10 MH	P						
088	01	94402148	4			2		PC RES FXD C FM 470 OHM 5P 1/4W	P						
089	01	75312014	6			021		FT TAPE URETHANE FOAM PRESU SENS	B						
090	01	10353601	7			1		PC CAP VAR CER 10PF-45PF 100VDCM	P						
091	01	15146200	9			1		PC IC 74LS32 218LS TTL 4 2IN OR	P						
092	01	15158300	2			3		PC IC 7438 204 TTL 4 2IN NAND BF	P						
093	01	19115401	2			6		PC CAP FXD CER .1UF +80-20P 50V	P						
094	01	51718400	8			1		PC IC 723C 334 VOLTAGE REGULATOR	P						
095	01	51908704	3			1		PC RES CERM VAR 200 OHM 10P 3/4W	P						
096	01	51908706	8			1		PC RES CERM VAR 1K OHM 10P 3/4W	P						
097	01	94227226	1			2		PC CAP DIP MICA 100PF 2P 300VDCM	P						
098	01	94356318	9			1		PC INDUCTOR 3.3 M H	P						
099	01	94360300	1			1		PC RES FXD FM 1000 OHM 1P 1/4W	P						
100	01	94360321	7			1		PC RES FXD FM 1650 OHM 1P 1/4W	P						
101	01	94360446	2			2		PC RES FXD FM 30.1K OHM 1P 1/4W	P						
102	01	94360363	9			2		PC RES FXD FM 4530 OHM 1P 1/4W	P						
103	01	94395509	6			1		PC CAP AL ELEC 22UF -10+75P 25V	P						
104	01	94402108	8			1		PC RES FXD C FM 10 OHM 5P 1/4W	P						
105	01	94402160	9			1		PC RES FXD C FM 1.5K OHM 5P 1/4W	P						
											17061	8506			

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE	PAGE	FILE CHANGE NO.			
										02-04-85	6	00017061			
CD ASSY 98ED-4 DISK CONTRLR										STATUS DATE	ENG. RESP.	FILE DATE			
										08-17-84	FA501A	02-04-85			
TRND NO.	U	PART NO.	CD	REV.	DWG.	QUANTITY	U/M	DESCRIPTION	MC	STATUS	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
105	02	94402158	3			1		PC RES FXD C FM 1.2K OHM 5P 1/4W	P		17061				
106	01	51873600	4			025		OZ VARNISH INSUL RED GLPT	B						
0107 TOTAL LINES															
											17061	8506			


DWN	W. Glaser	11/81	CONTROL DATA	TITLE	CARD ASSEMBLY 9BED CONT MODULE W/FULL MEMORY	PREFIX	DOCUMENT NO.	REV.
CHKD	D. Sand	11/81				A	90446396	C
ENG	N. J. ...	12-3-81						
MFG	J. ...	12-81			FIRST USED ON	NHA		
APPR	E. H. ...	12-11-81		CODE IDENT	FA501C/D	15632982	SHEET	1 OF 2
ES	R. F. ...	12-7-81	15920		15632983			

SHEET REVISION STATUS				REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	APP				
A	A	13920-68		12-18-81	MCA				
B	B	15229	EE	6/4/82	SR				
C	C	15771	EE	3/1/83	HJB				
INACTIVE									

NOTES:

- 1 Mark "Assy 90446396" in area shown per CDC SPEC 10121508.
- 2 Mount F/N 2 in sockets located at A1-A6, C1-C6, and D1-D6 on F/N 1.

APL 90446396
DETACHED LISTS

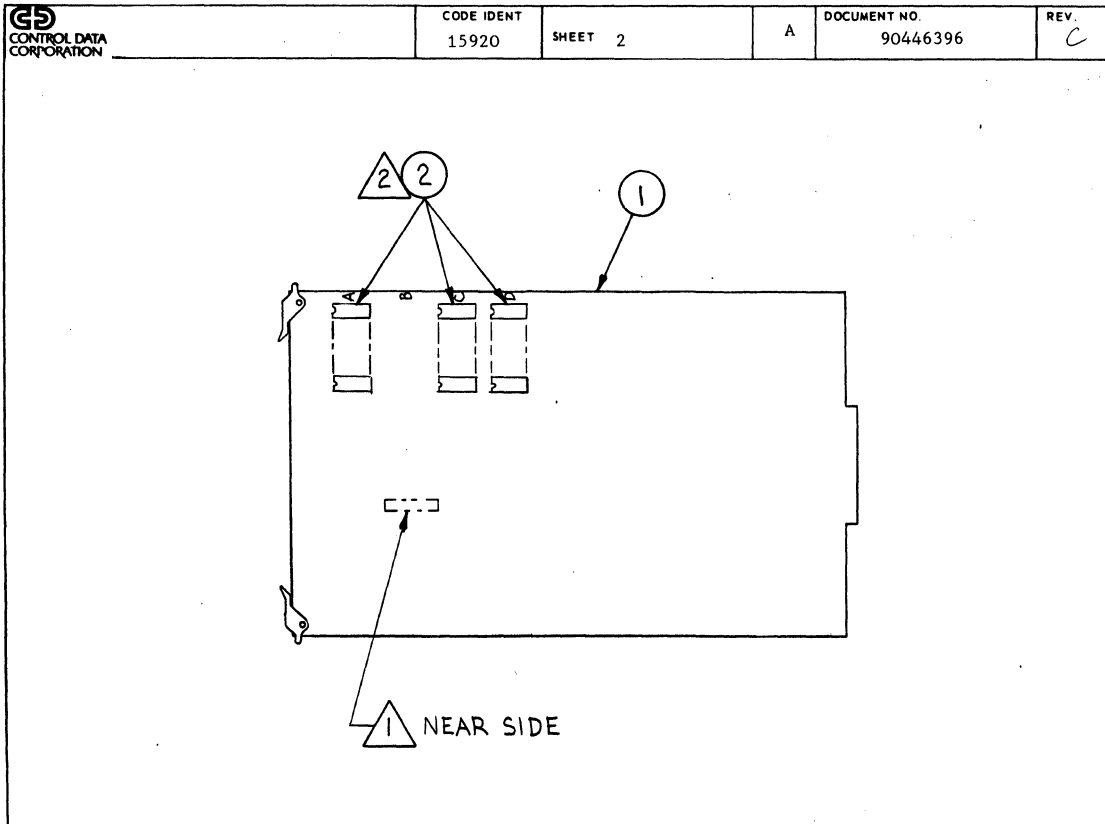

BUILD ARC 214

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
03-09-83	1	00015771

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	90446396	5	C	A	REPLACED BY 90446571 15771	S	INA	03-04-83	FA501C/D	03-09-83			
TRIND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	90446284	3	1		PC REPLACED BY 90446570 15771	N						
002	01	15153821	2	24		PC IC 4116 MOS 16384-BIT RAM	P						
003	01	10121508	5	REF		PC MARKING* INK STP-STENCIL-S/C	D						
						0003 TOTAL LINES							

DWN	B. Graf	2/83	 CONTROL DATA CORPORATION	TITLE	CARD ASSEMBLY CONTROLLER MODULE W/FULL MEMORY	PREFIX	DOCUMENT NO.	REV.	
CHKD	<i>W. J. [unclear]</i>	2-10-83		A	90446571	B			
ENG	<i>H. B. [unclear]</i>	2-11-83		FIRST USED ON	FA501C/D	NHA	15632982	SHEET	1 of 2
MFG	<i>[unclear]</i>	2-21-83		CODE IDENT	15920	15632983			
APPR	<i>[unclear]</i>	2-21-83		MECH	<i>[unclear]</i>	2-14-83			

SHEET REVISION STATUS										REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE	APP									
A	A	15152-45	/	2-22-83	<i>[unclear]</i>									
B	B	16873	INACTIVE, SERVICE USE ONLY, SUPERCEDED BY 90446596	11-30-83	<i>[unclear]</i>									
INACTIVE														


NOTES

1 Mark "Assy 90446571" in area shown per CDC SPEC 10121508.

2 Mount F/N 2 in sockets located at A1-A6, C1-C6 and D1-D6 on F/N 1.

APL 90446571
DETACHED LISTS


AA3180 REV. 8-71 PRINTED IN U.S.A.

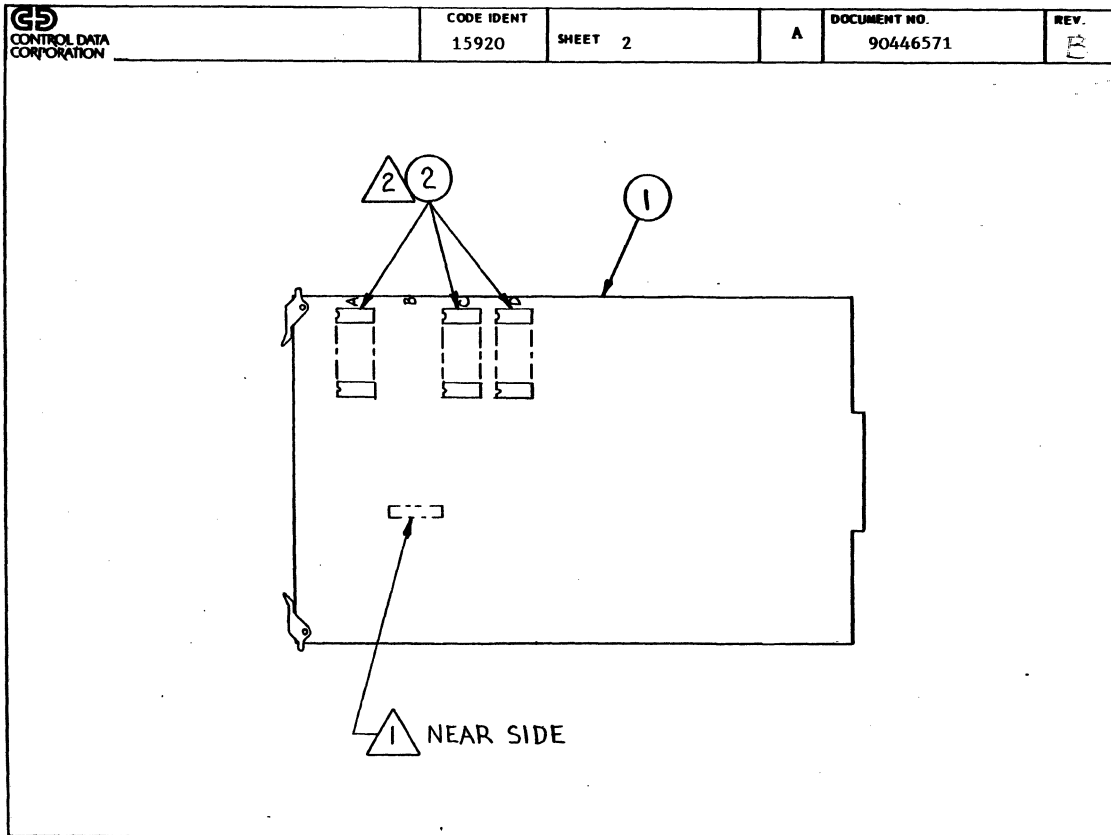

ASSEMBLY PARTS LIST

BUILD ARC 214										PRINT DATE	PAGE	FILE CHANGE NO.				
DIV.		ASSEMBLY NO.		REV.	DWG.	DESCRIPTION				MC	STATUS	11-08-84	1	CC016873		
0860		90446571		3	R A	REPLACED BY 90446556 16873				5	INA	11-08-84	FA501C/C	11-08-84		
T/NO	U	PART NO.	CD	QTY	U/M	PART DESCRIPTION				MC	YLD	ECC. NO. IN	ECC. NO. OUT	S/N	WK IN	WK OUT
001	C1	90446570	5	1		PC REPLACED BY 90446596 16873					R					
002	C1	15153821	2	24		PC IC 4116 MCS 16384-BIT RAM					P					
						0002 TOTAL LINES										

SHEET REVISION STATUS		REVISION RECORD					
REV	ECO	DESCRIPTION	DFT	DATE	CHKD	APP	
00	5104-9	RELEASED CLASS B		7/27/70			
03	51071	REVISED & REDRAWN	WJK	5-8-80			
04	5109	F/NB WAS 948421B7	D.S.	6/4/80	WJG		
05	51123	ADD NOTE 7, DELETE F/N 44	WJK	6-3-80			
A	15679	RELEASED CLASS A		6-3-80			
B	14279	F/N B3 WAS 94850716	WJK	7-3-80			
C	14809	F/N NOTE 3, ADD NOTE B19	WJK	7-29-80			
D	14823	CHG F/N 23	WJK	8-13-80			
E	14838	INACTIVE, SERVICE USE ONLY REPLACED BY 90446140	EE	11/11/80	EE		

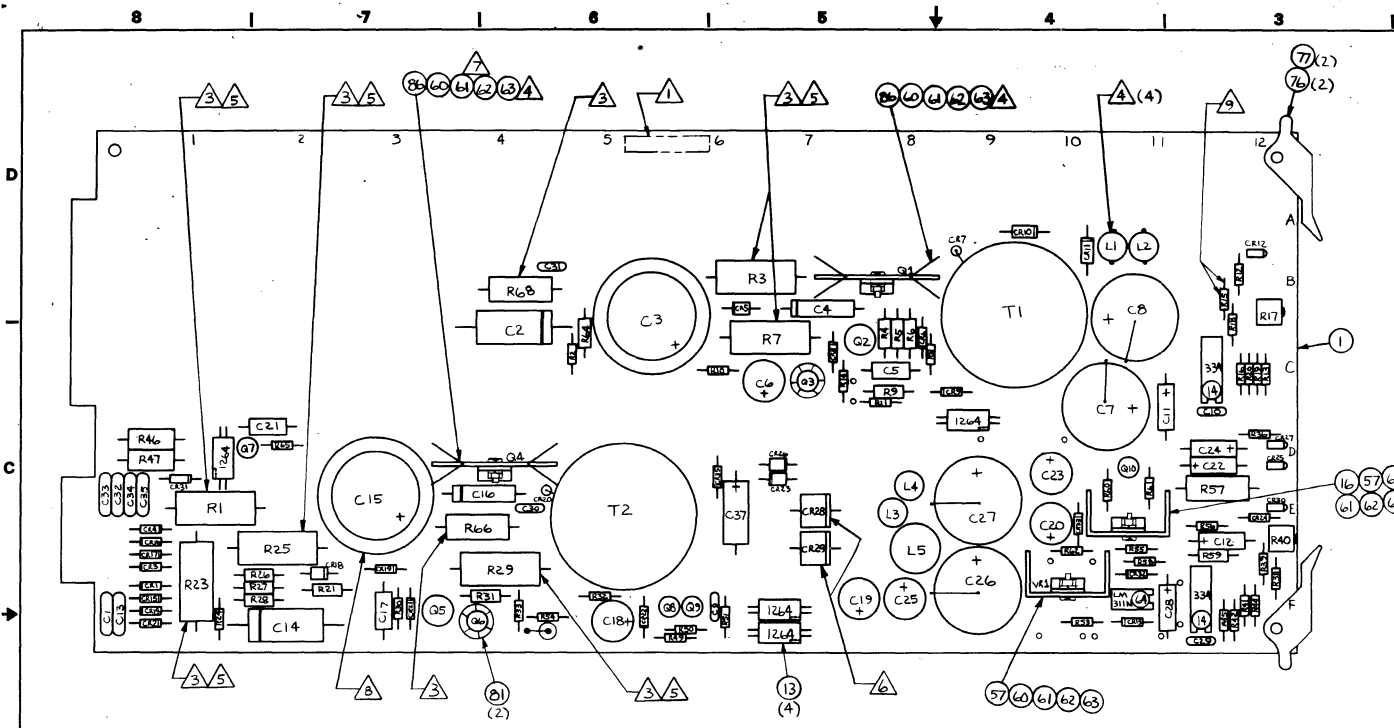

- Ⓐ CAPACITOR C15 MUST BE MOUNTED VERTICAL, PERPENDICULAR TO BOARD PLANE.
- Ⓓ RESISTOR R15 MUST BE MOUNTED APPROX. .25 INCH FROM BOARD SURFACE. SEE DETAIL. ONE RESISTOR LEG FACING NUMERICS ON BOARD TO BE RAISED.

NOTES:
 1. APPLY ASSY NO., REV LEVEL, LOC CODE, AND DATE CODE IN AREA SHOWN. MARK PER CDC SPEC 10121508; CHARACTER HEIGHT .12 (12 PT) COLOR WHITE.

2. FIND NUMBERS, ELEMENT IDENTIFIERS, AND REFERENCE DESIGNATIONS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON PART

Ⓒ MOUNT RESISTORS .350 INCH OFF BOARD. USE TUBING F/N 82 .60 INCH ON EACH LEAD.



Ⓓ APPLY F/N 83 BETWEEN COMPONENT SIDE OF BOARD & L1, L2, L3 & L4 TO KEEP STATIONARY. APPLY F/N 83 TO PROTRUDING TABS (2) ON F/N 86 ON SOLDER SIDE OF PCB (2 PLACES).

Ⓔ RESISTORS TO BE INSTALLED WITH PROTRUSION TOWARD THE BOARD.

Ⓕ MOUNT DIODES .300 MIN .500 MAX OFF P.C. BOARD.

Ⓖ BEND HEAT SINK FIN STRAIGHT TO KEEP FROM SHORTING TO CR20. (.294 FIN FROM BOTTOM)

CHANGE TABLE	
DELETIONS	ADDITIONS



CROSS REFERENCE TABLE	
FIND NO	REFERENCE DESIGNATION
2	T1
3	T2
4	Q1, Q4
5	Q2, Q5
6	Q3, Q6, Q7, Q8, Q10
7	Q9
8	CR1 THRU CR4, CR6, CR9, CR14 THRU CR17, CR19, CR22, CR31, CR35
9	CR5, CR7, CR18, CR20, CR23, CR26
10	CR28, CR29
11	CR12, CR25, CR27, CR30
12	CR24, CR32
15	CR13
17	VR1
18	L1, L2, L3, L4
19	LS
20	C3, C15
21	C2, C14
22	C4, C16
23	C5, C17, C38
24	C6, C18, C20, C23
25	C1, C13, C32, C33
26	C7, C8
27	C24, C27
28	C9, C10, C29
29	C30, C31
31	C11, C12, C22, C24, C28
33	R41
34	R46, R47
35	R1, R23
36	R3, R25
37	R4, R5, R6, R26, R27, R28
38	R7
39	R8, R11, R14, R18, R30, R33, R54
40	R10, R32
41	R21, R53
42	R39
43	R2, R24
45	R40
46	R20, R45
47	R42
48	R46, R48
49	R12
50	R13, R16, R41, R42
51	R17, R40
52	R38
53	R34
54	R59
56	R43
58	R15
65	R50
66	R49, R55
67	R56
68	CR33
70	R58
71	R57
72	C19, C25
73	R21, R44
78	R9, R31
79	R19, R44
80	CR10, CR11
84	CR8, CR21
85	C21
87	R29
88	C34, C35
89	C37

INACTIVE

CONTROL DATA		TITLE	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	FA501-A/B	P.C. CARD ASSEMBLY, 9BKD	
TOLERANCES	FA501-A/B		
3 PLACE	10/10/80		
2 PLACE	5-9-80		
ANGLES	5-10-80		
DO NOT SCALE DRAWING	5-12-80		
DRAWN BY	5-18-80		
ENGINEER	5-18-80		
CHKD BY	5-18-80		
APPROVED	5-18-80		
SCALE NONE	15632209	SHEET 1 OF 1	

BUILD ARC 210

ASSEMBLY PARTS LIST

										PRINT DATE	PAGE	FILE CHANGE NO.			
										10-01-81	1	00014838			
DIV	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION				MC	STATUS	STATUS DATE	ING. RESP.	FILE DATE		
0860	90446140	7	E	D	REPLACED BY 90446290 14838				A	INA	09-23-81	FA501A/B	10-01-81		
1	PND NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01		90446139	9	1		PC	PW BD 9BKD PWR SPLY	P						
002	01		51940599	7	1		PC	TRANSFORMER FLYBACK 25KHZ	P						
003	01		51940598	9	1		PC	TRANSFORMER FLYBACK 25KHZ	P						
004	01		51918111	9	2		PC	XSTR NPN 400V 8A TO 220	P						
005	01		51681100	7	2		PC	XSTR 2N5189 NPN SIL	P						
006	01		51003092	7	5		PC	XSTR 2N2222 HI SPEED NPN SIL	P						
007	01		51714000	6	1		PC	XSTR 2N2907 PNP SIL	P						
008	01		95637304	7	14		PC	DIO IN4004 400PIV SIL 1.1V/1A	P						
009	01		95691500	3	6		PC	RECT. 1N5615 F-R SIL 1 AMP	P						
010	01		77835261	7	2		PC	POWER DIODE FAST RECOVER	P						
011	01		19171201	7	4		PC	LIGHT IND	P						
012	01		15101110	3	2		PC	DIO 1N753A 400MW ZEN VR 6.2V	P						
013	01		15165538	8	4		PC	ISOLATOR OPTICALLY COUPLED	P						
014	01		51718400	8	2		PC	IC 723C 334 VOLTAGE REGULATOR	P						
015	01		51007385	1	1		PC	DIO IN4148 10MA MICRO SIL 30V	P						
016	01		15163403	7	1		PC	IC LM317 ADJ +V RGLTR TO-220	P						
017	01		15151400	7	1		PC	IC UA7900-5 356A NEG V RGLTR	P						
018	01		51918616	7	4		PC	INDUCTOR	P						
019	01		51918617	5	1		PC	INDUCTOR	P						
020	01		51918627	4	2		PC	CAP ALUM ELECT 300UF 250V 15P	P						
021	01		24506816	8	2		PC	CAP FXD MYL .33UF 10P 100VDC	P						

BUILD ARC 210

ASSEMBLY PARTS LIST

										PRINT DATE	PAGE	FILE CHANGE NO.			
										10-01-81	2	00014838			
DIV	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION				MC	STATUS	STATUS DATE	ING. RESP.	FILE DATE		
0860	90446140	7	E	D	REPLACED BY 90446290 14838				A	INA	09-23-81	FA501A/B	10-01-81		
1	PND NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
022	01		36180753	0	2		PC	CAP FXD MYL .001MFD 600V	P						
023	01		51839147	9	2		PC	CAP FXD CER .100UF 10P 100VDC	P						
023	02		51839147	9	3		PC	CAP FXD CER .100UF 10P 100VDC	P		14523	14523		8106	8106
024	01		95691133	3	4		PC	CAP ELEC 270UF -10+100P 25VDC	P						
025	01		94842188	0	4		PC	CAP FXD CER .0033UF 6MV 1000V	P						
026	01		94397161	4	2		PC	CAP AL ELECT 560UF OHM 75V	P						
027	01		94397162	2	2		PC	CAP AL ELECT 5600UF OHM 12V	P						
028	01		51001120	8	3		PC	CAP CER F-2 .01UF +80-20P 25V	P						
029	01		94842145	8	2		PC	CAP FXD CER 50PF 20P 1K	P						
031	01		24504333	6	5		PC	CAP FXD TANT 2.2UF 20P 35VDC	P						
033	01		94360236	7	1		PC	RES FXD FM 237 OHM 1P 1/4W	P						
034	01		24507181	6	2		PC	RES FXD COMP 5600 OHM 5P 1W	P						
035	01		95596503	3	2		PC	RES FXD WW 4.3 OHM 10P 5WATT	P						
036	01		95596520	7	2		PC	RES FXD WW 600 OHM 10P 5WATT	P						
037	01		65019518	3	6		PC	RES CARB COMP 1/2W 1.3 OHMS	P						
038	01		95596511	6	1		PC	RES FXD WW 43 OHM 10P 5WATT	P						
039	01		94402159	1	7		PC	RES FM 1.3K OHM 1/4 W CARBON	P						
040	01		94402172	4	2		PC	RES FM 4.7K OHM 1/4W CARBON	P						
041	01		94402148	4	2		PC	RES FM 470 OHM 1/4W CARBON	P						
042	02		94402166	6	1		PC	RES FM 2.7K OHM 1/4W CARBON	P						
043	01		94402220	1	2		PC	RES FM 470K OHM 1/4W CARBON	P						

BUILD ARC 210

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
10-01-81	3	00014838

DIV	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	90446140	7	E	D	REPLACED BY 90446290 14838	A	INA	09-23-81	FA501A/B	10-01-81			
T/PND NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
045	01	94402160	9	1		PC RES FM 1.5K OHM 1/4W CARBON	P						
046	01	94402110	4	2		PC RES FM 12 OHM 1/4W CARBON	P						
047	01	94360331	6	1		PC RES FXD FM 2100 OHM 1P 1/4W	P						
048	01	24504839	2	2		PC RES FXD COMP 100 OHM 5P 2WATT	P						
049	01	94402176	5	1		PC RES FM 6.8K OHM 1/4W CARBON	P						
050	01	94402167	4	4		PC RES FM 3K OHM 1/4W CARBON	P						
051	01	51918846	0	2		PC RES VAR CER 1K OHM 20P 1/2W	P						
052	01	94402155	9	1		PC RES FM 9100HM 1/4W CARBON	P						
053	01	94402165	8	1		PC RES FM 2.4K OHM 1/4W CARBON	P						
054	01	24500148	2	1		PC RES FXD COMP 240 OHM 5P 1/2W	P						
056	01	94402180	7	1		PC RES FM 10K OHM 1/4W CARBON	P						
057	01	51918101	0	2		PC HT/SK PLSTC SEMI FIG1 AND2	P						
058	01	94402179	9	1		PC RES FM 9.1K OHM 1/4W CARBON	P						
060	01	51003962	1	001		OZ PASTE, HEAT XPR CMPD NON-COND	B						
061	01	10127103	9	4		PC MSCR PAN PHL 4-40X.312 STL ZP	B						
062	01	10126400	0	4		PC WSHR, NO.4 EXT/T LK STL ZP	B						
063	01	10125103	1	4		PC NUT, HEX 4-40 MSCR STL ZP	B						
064	01	15163443	3	1		PC IC LM311N VOLT COMP HI IMP	P						
065	01	94402122	9	1		PC RES FM 390HM 1/4W CARBON	P						
066	01	94402132	8	2		PC RES FM 100 OHM 1/4W CARBON	P						
067	01	94360100	5	1		PC RES FXD FM 10 OHM 1P 1/4W	P						

BUILD ARC 210

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
10-01-81	4	00014838

DIV	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	90446140	7	E	D	REPLACED BY 90446290 14838	A	INA	09-23-81	FA501A/B	10-01-81			
T/PND NO.	U	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
068	01	15101107	9	1		PC DIO 1N750A 400MW ZEN VR 4.7V	P						
069	01	16006500	9	REF		PC FABRICATION SPECIFICATION	D						
070	01	94360262	3	1		PC RES FXD FM 442 OHM 1P 1/4W	P						
071	01	51903001	9	1		PC RES FXD WW .02 OHM 5P 2WATT	P						
072	01	95691135	8	2		PC CAP ELEC 470UF -10+100P 25VDC	P						
073	01	17720519	2	2		PC RES FXD COMP 0.2MEG .5W 5P	P						
075	01	90446138	1	REF		PC SCH DIAG 9BKD PWR SPLY	D						
076	01	87311900	3	2		PC INJECTOR-EJECTOR, NATURAL PCB	P						
077	01	93533118	1	2		PC ROLLPIN, .1250 X .250L STL ZP	B						
078	01	24500131	8	2		PC RES FXD COMP 47 OHM 5P 1/2W	P						
079	01	94402144	3	2		PC RES FM 330 OHM 1/4W CARBON	P						
080	01	95691506	0	2		PC RECT, 1N5416 F-R SIL 3 AMP	P						
081	01	51719600	2	2		PC HEAT SINK ELCTR COMP FAN TOP	P						
082	01	51797418	4	1		FT TBG INS .059 DIA T/W	B						
083	01	94850716	5	050		OZ SEAL, 3M (4400)	B						
083	02	62019900	0	050		OZ EPOXY, 2-PART 5-MINUTE CLEAR	B		14279	14279		8040	8040
084	01	12081500	6	2		PC DIO SIL SCHOTTKY PWR .55V/1A	P						
085	01	51839124	8	1		PC CAP FXD CER 1000PF 10P 100VDC	P						
086	01	51906601	3	2		PC HT SINK, SEMI FIG 3 ALUM BLK	P						
087	01	95596512	4	1		PC RES FXD WW 51 OHM 10P 5W	P						
088	01	94842184	7	2		PC CAP FXD CER .02UF *80*20P 1K	P						

BUILD ARC 210

ASSEMBLY PARTS LIST

DIV		ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
0860		90446140	7	E	D	REPLACED BY 90446290 14838	A	INA	09-23-81	FAS01A/B	10-01-81		
PRD NO.	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
069	01	24504343	5	1	PC	CAP FXD TANT 15UF 20P 35VDCW	P						
						0085 TOTAL LINES							

BUILD ARC 210

ASSEMBLY PARTS LIST

BUILD ARC 210										PRINT DATE		PAGE		FILE CHANGE NO.				
										01-13-82		1		00014985				
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION					MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
086U	90446290	0	H	D	REPLACED BY 90446443 14985					A	INA	01-08-82	FA501A	01-13-82				
TRFND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION					MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT	
001	01	90446289	2	1		PC REPLACED BY 90446332 14778					P							
001	02	90446332	0	1		PC PW BD 1AFD PWR SPLY					P		14778	14778			8143	8143
002	01	51940599	7	1		PC TRANSFORMER FLYBACK 25KHZ					P							
003	01	51940598	9	1		PC TRANSFORMER FLYBACK 25KHZ					P							
004	01	51918111	9	2		PC XSTR NPN 400V 8A TO 220					P							
005	01	51681100	7	2		PC XSTR 2N5189 NPN SIL					P							
006	01	51003092	7	5		PC XSTR 2N2222 HI SPEED NPN SIL					P							
007	01	51714000	0	1		PC XSTR 2N2907 PNP SIL					P							
008	01	95637304	7	14		PC DIO IN4004 400PIV SIL 1.1V/1A					P							
009	01	95691500	3	6		PC RECT. 1N5615 F-R SIL 1 AMP					P							
010	01	77835261	7	2		PC POWER DIODE FAST RECOVER					P							
011	01	19171201	7	4		PC LIGHT IND					P							
012	01	50240108	6	2		PC DIODE SIL ZEN 6.2V IN753A					P							
013	01	95791300	7	4		PC OPTICAL ISOLATOR					P							
014	01	51718400	8	2		PC IC 723C 334 VOLTAGE REGULATOR					P							
015	01	51007385	1	1		PC DIO IN4148 10MA MICRO SIL 30V					P							
016	01	15163403	7	1		PC IC LM317 ADJ +V RGLTR TO=220					P							
017	01	15151400	7	1		PC IC UA7900=5 356A NEG V RGLTR					P							
018	01	51918616	7	4		PC INDUCTOR					P							
019	01	51918617	5	1		PC INDUCTOR					P							
020	01	51918627	4	2		PC CAP ALUM ELECT 300UF 250V 15P					P							

BUILD ARC 210

ASSEMBLY PARTS LIST

BUILD ARC 210										PRINT DATE		PAGE		FILE CHANGE NO.				
										01-13-82		2		00014985				
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION					MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE				
086U	90446290	0	H	D	REPLACED BY 90446443 14985					A	INA	01-08-82	FA501A	01-13-82				
TRFND NO	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION					MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT	
021	01	24506816	8	2		PC CAP FXD MYL .33UF 10P 100VDC					P							
022	01	36180753	0	2		PC CAP FXD MYL .001MFD 600V					P							
023	01	94240448	4	5		PC CAP CER 100000PF 50V 10P					P							
024	01	95691133	3	4		PC CAP ELEC 270UF +10-100P 25VDC					P							
025	01	94842168	0	4		PC CAP FXD CER .0033UF 6MV 1000V					P							
025	02	51001214	9	4		PC CAP FXD CER .005UF 20P 3000V					P		14722	14722			8127	8127
026	01	94397161	4	2		PC CAP AL ELECT 560UF OHM 75V					P							
027	01	94397162	2	2		PC CAP AL ELECT 5600UF OHM 12V					P							
028	01	51001120	8	3		PC CAP CER F=2 .01UF +80-20P 25V					P							
028	02	19115400	4	3		PC CAP FXD CER .01MF +80-20P 50V					P		14856	14856			8148	8148
029	01	94842145	8	2		PC CAP FXD CER 500PF 20P 1K					P							
031	01	94400612	1	5		PC CAP FXD AL 15UF +100-10P 20V					P							
031	02	94400612	1	4		PC CAP FXD AL 15UF +100-10P 20V					P		14774	14774			8133	8133
033	01	94360236	7	1		PC RES FXD FM 237 OHM 1P 1/4W					P							
034	01	24507181	6	2		PC RES FXD COMP 5600 OHM 5P 1W					P							
035	01	95596503	3	2		PC RES FXD WW 4.3 OHM 10P 5WATT					P							
036	01	95596520	7	2		PC RES FXD WW 600 OHM 10P 5WATT					P							
037	01	65019518	3	6		PC RES CARB COMP 1/2W 1.3 OHMS					P							
038	01	95596511	6	1		PC RES FXD WW 43 OHM 10P 5WATT					P							
039	01	94402159	1	7		PC RES FM 1.3K OHM 1/4 W CARBON					P							
040	01	94402172	4	2		PC RES FM 4.7K OHM 1/4W CARBON					P							
041	01	94402148	4	2		PC RES FM 470 OHM 1/4W CARBON					P							

BUILD ARC 210

ASSEMBLY PARTS LIST

										PRINT DATE	PAGE	FILE CHANGE NO.		
										01-13-82	3	00014985		
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION			MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
086U	90446290	D	H	D	REPLACED BY 90446443 14985			A	INA	01-08-82	FAS01A	01-13-82		
FOUND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
042	01	94402166	6	1		PC	RES FM 2.7K OHM 1/4W CARBON	P						
043	01	94402220	1	7		PC	RES FM 470K OHM 1/4W CARBON	P						
048	01	94402160	9	1		PC	RES FM 1.5K OHM 1/4W CARBON	P						
048	01	94402110	4	2		PC	RES FM 12 OHM 1/4W CARBON	P						
047	01	94360331	6	1		PC	RES FXD FM 2100 OHM 1P 1/4W	P						
048	01	24504839	2	2		PC	RES FXD COMP 100 OHM 5P 2WATT	P						
04Y	01	94402176	5	1		PC	RES FM 6.8K OHM 1/4W CARBON	P						
050	01	94402167	4	4		PC	RES FM 3K OHM 1/4W CARBON	P						
051	01	51918846	0	2		PC	RES VAR CER 1K OHM 20P 1/2W	P						
052	01	94402155	9	1		PC	RES FM 910OHM 1/4W CARBON	P						
053	01	94402165	8	1		PC	RES FM 2.4K OHM 1/4W CARBON	P						
054	01	24500148	2	1		PC	RES FXD COMP 240 OHM 5P 1/2W	P						
056	01	94402180	7	1		PC	RES FM 10K OHM 1/4W CARBON	P						
057	01	51918101	0	2		PC	HT/SK PLSTC SEMI FIG1 AND2	P						
058	01	94402179	9	1		PC	RES FM 9.1K OHM 1/4W CARBON	P						
060	01	51003962	1		001	OZ	PASTE, HEAT XPR CMPD NON-COND	B						
061	01	10127103	9	4		PC	MSCR PAN PHL 4-40X.312 STL ZP	B						
062	01	10126400	0	4		PC	WSHR, NO.4 EXT/T LK STL ZP	B						
063	01	10125103	1	4		PC	NUT, HEX 4-40 MSCR STL ZP	B						
064	01	15163443	3	1		PC	IC LM311N VOLT COMP HI IMP	P						
068	01	94402122	9	1		PC	RES FM 390HM 1/4W CARBON	P						

BUILD ARC 210

ASSEMBLY PARTS LIST


										PRINT DATE	PAGE	FILE CHANGE NO.		
										01-13-82	4	00014985		
DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION			MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
086U	90446290	D	H	D	REPLACED BY 90446443 14985			A	INA	01-08-82	FAS01A	01-13-82		
FOUND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
066	01	94402132	8	2		PC	RES FM 100 OHM 1/4W CARBON	P						
067	01	94360100	5	1		PC	RES FXD FM 10 OHM 1P 1/4W	P						
068	01	50240105	2	1		PC	DIODE SIL ZEN 4.7V	P						
069	01	16006500	9		REF	PC	FABRICATION SPECIFICATION	D						
070	01	94360262	3	1		PC	RES FXD FM 442 OHM 1P 1/4W	P						
071	01	51903001	9	1		PC	RES FXD WW .02 OHM 5P 2WATT	P						
072	01	95691135	8	2		PC	CAP ELEC 470UF -10+100P 25VDC	P						
073	01	17720519	2	2		PC	RES FXD COMP 0.2MEG .5W 5P	P						
078	01	90446288	4		REF	PC	SCH DIAG 1APD (PFDS PWR SUP)	D						
076	01	82311900	3	2		PC	INJECTOR-EJECTOR, NATURAL PCB	P						
077	01	93533118	1	2		PC	ROLLPIN, .125D X .250L STL ZP	B						
078	01	24500131	8	2		PC	RES FXD COMP 47 OHM 5P 1/2W	P						
07Y	01	94402144	3	2		PC	RES FM 330 OHM 1/4W CARBON	P						
080	01	95691506	0	2		PC	RECT, 1N5416 F-R SIL 3 AMP	P						
081	01	51719600	2	2		PC	HEAT SINK ELCTR COMP FAN TOP	P						
082	01	51797418	4	1		FT	TBG INS .059 DIA T/W	B						
083	01	62019900	0		050	OZ	EPOXY, 2-PART 5-MINUTE CLEAR	B						
084	01	12081500	6	2		PC	DIO SIL SCHOTTKY PWR .55V/1A	P						
088	01	94240401	3	2		PC	CAP CER 1000PF 50V 10P	P						
086	01	51906601	3	2		PC	HT SINK, SEMI FIG 3 ALUM BLK	P						
087	01	95596512	4	1		PC	RES FXD WW 51 OHM 10P 5W	P						

BUILD ARC 210

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
01-13-82	5	00014985

DIV.		ASSEMBLY NUMBER		CD	REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
086U		90446290		0	H	D	REPLACED BY 90446443 14985		A	INA	01-08-82	FA901A	01-13-82		
T	P	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
088	01		94842184	7	2		PC CAP FXD CER .02UF +80-20P 1K		P						
089	01		94400619	6	1		PC CAP ELEC 6-63VDC		P						
090	01		94402177	3	2		PC RES FM 7.5K OHM 1/4W CARBON		P						
091	01		16042865	2	REF		PC PLATO FLEX DISK SUBSYS		D		14754			8130	
092	01		94400603	0	1		PC CAP FXD ALUM 3.3UF 50V		P		14774			8133	
							0090 TOTAL LINES								

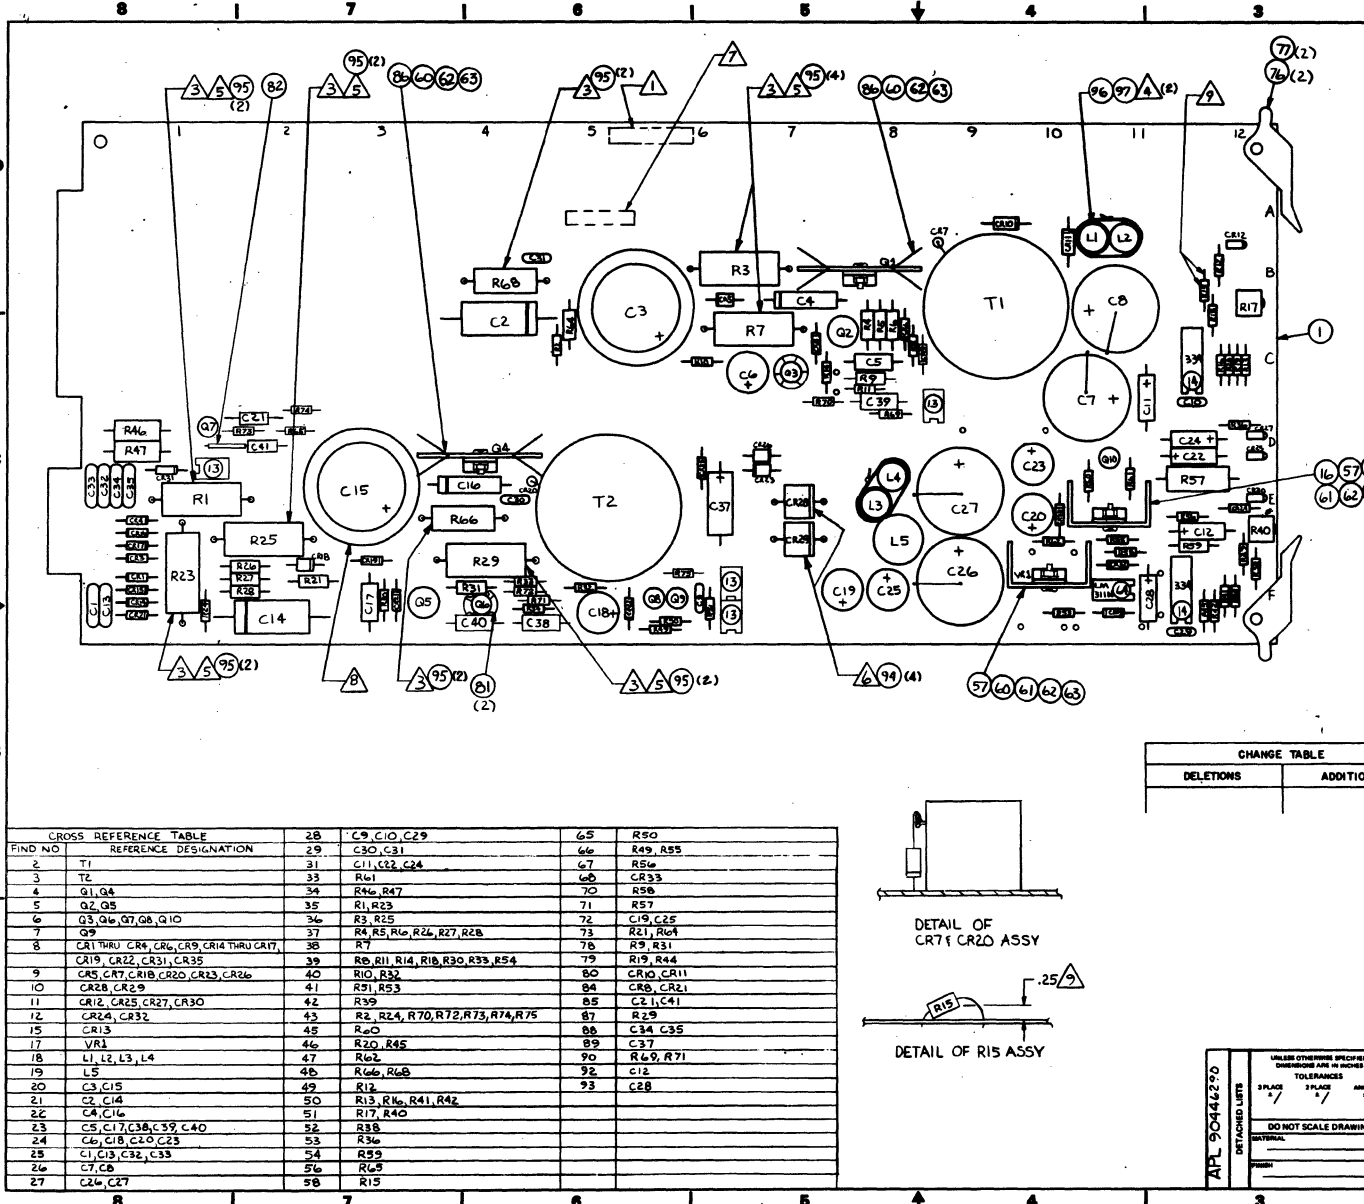


SHEET REVISION STATUS		REVISION RECORD					
REV	ECO	DESCRIPTION	DEPT	DATE	CHKD	APP	
A	3920-76	RELEASED CLASS 'A'		1-8-72		MBP	
B	18945	ADDED F/N 94 & 95		DC	4/17/73	CS, RDP	
C	16 #60	REVISE F/N 47		4	9-7-75	MBP, RDP	
D	18005	AFL CHANGES		WJG	10-10-83	WJG, RDP	

- Ⓐ CAPACITOR C15 MUST BE MOUNTED VERTICAL; (PERPENDICULAR TO BOARD PLANE).
 - Ⓙ RESISTOR R15 MUST BE MOUNTED APPROX. .25 INCH FROM BOARD SURFACE. SEE DETAIL. ONE RESISTOR LEG FACING NUMERIC ON BOARD TO BE RAISED.
- NOTES:
- ① MARK ASSY NO. AND REVISION LEVEL .12 HIGH, WHITE, IN AREA SHOWN PER CDC SPEC 10121508.

2. FIND NUMBERS, ELEMENT IDENTIFIERS, AND REFERENCE DESIGNATIONS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON PART
- ③ MOUNT RESISTORS .250 MIN. .350 MAX OFF BD.
- ④ F/N 96 TO BE II-STP-LEVEL ON ONE COMPONENT OF EACH PAIR L1, L2 AND L3, L4. PAIRS TO BE HELD TOGETHER BY F/N 97.
- ⑤ RESISTORS TO BE INSTALLED WITH PROTRUSION TOWARD THE BOARD.
- ⑥ MOUNT DIODES .300 MIN. .500 MAX OFF P.C. BOARDS.
- ⑦ MARK SERIAL NUMBER IN AREA SHOWN PER RYLOPS P/P NO. 80:20:34 AND PER MARKING REQMT'S IN NOTE (1) ONE.

CHANGE TABLE	
DELETIONS	ADDITIONS



CROSS REFERENCE TABLE		28	C9, C10, C29	65	R50
FIND NO	REFERENCE DESIGNATION	29	C30, C31	66	R49, R55
2	T1	31	C11, C22, C24	67	R56
3	T2	33	R61	68	CR33
4	Q1, Q4	34	R46, R47	70	R58
5	Q2, Q5	35	R1, R23	71	R57
6	Q3, Q6, Q7, Q8, Q10	36	R3, R25	72	C19, C25
7	Q9	37	R4, R5, R16, R24, R27, R28	73	R21, R64
8	CR1 THRU CR4, CR6, CR9, CR14 THRU CR17, CR19, CR22, CR31, CR35	38	R7	76	R9, R31
9	CR5, CR7, CR8, CR20, CR23, CR26	39	R6, R11, R14, R18, R30, R33, R54	79	R19, R44
10	CR28, CR29	40	R10, R32	80	CR10, CR11
11	CR12, CR25, CR27, CR30	41	R51, R53	84	CR8, CR21
12	CR14, CR32	42	R39	85	C21, C41
15	CR13	43	R2, R24, R70, R72, R73, R74, R75	87	R29
17	VR1	45	R60	88	C34, C35
18	L1, L2, L3, L4	46	R20, R45	89	C37
19	L5	47	R62	90	R69, R71
20	C3, C15	48	R66, R68	92	C12
21	C2, C14	49	R12	93	C28
22	C4, C16	50	R13, R16, R41, R42		
23	C5, C17, C36, C39, C40	51	R17, R40		
24	C6, C18, C20, C23	52	R38		
25	C1, C13, C32, C33	54	R59		
26	C7, C8	56	R65		
27	C24, C27	58	R15		

AFL 90444290 DETACHED LISTS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTROL DATA		TITLE	
	3 PLACE	3 PLACE	ANGLES	SHEET NUMBER	P.C. CARD ASSEMBLY, 1A FD	
	1/16	1/16	1/16	103 57	FASO-A/B/C/D BR10-A/B	
DO NOT SCALE DRAWING			DESIGNED BY	DATE	CODE	DRAWING NO
			10/1/72	1-1-72	15920	D 90446443
			APPROVED	DATE	SCALE	SHEET 1 OF 1
			MECH	1-7-72	NONE	15632209

BUILD ARC 220

ASSEMBLY PARTS LIST

PRINT DATE: 08-09-83 PAGE: 1 FILE CHANGE NO.: 0016005A

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	90446443	5	D	D	PC CD ASSY 1AFD	A	REL	01-00-82	FASOIA/D	08-09-83			
TRND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
001	01	90446332	0	1		PC PW 8D 1APD PWR SPLY	P						
002	01	51940599	7	1		PC TRANSFORMER FLYBACK 25KHZ	P						
003	01	51940598	9	1		PC TRANSFORMER FLYBACK 25KHZ	P						
004	01	51918111	9	2		PC XSTR NPN 400V 8A TO 220	P						
005	01	51681100	7	2		PC XSTR 2N5189 NPN SIL	P						
006	01	51003092	7	5		PC XSTR 2N2222 HI-SPEED NPN SIL	P						
007	01	51714000	0	1		PC XSTR, 2N2907 BI-POLAR PNP SI	P						
008	01	95637304	7	14		PC RECT, SIL IN4004 1A 400V MIN	P						
009	01	95691500	3	6		PC RECT, SIL IN5615 1A 200V F=R	P						
010	01	77835261	7	2		PC DIO MR821 PWR RECT 100WIV 5IO	P						
011	01	19171201	7	4		PC LIGHT IND	P						
012	01	50240108	6	2		PC DIO IN753A ZEN 6.2V 5P 20MA	P						
013	01	95791300	7	4		PC OPTICAL ISOLATOR	P						
014	01	51718400	8	2		PC IC 723C 334 VOLTAGE REGULATOR	P						
015	01	51007385	1	1		PC DIO IN4148 SIL MICRO 30V 10MA	P						
016	01	15163403	7	1		PC IC LM317 317 ADJ POS V RGLTR	P						
017	01	15151400	7	1		PC IC UA7905 356A NEG V RGLTR	P						
018	01	51918616	7	4		PC IND, RF-CHOKE 100UH 1.5A F-1	P						
019	01	51918617	5	1		PC IND, RF-CHOKE 70UH 7A F-1	P						
020	01	51918627	4	2		PC CAP ALUM ELECT 300UF 250V 15P	P						
021	01	24506816	8	2		PC CAP FXD MYL .33UF 10P 100VDCV	P						

BUILD ARC 220

ASSEMBLY PARTS LIST

PRINT DATE: 08-09-83 PAGE: 2 FILE CHANGE NO.: 0016005A

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE			
0860	90446443	5	D	D	PC CD ASSY 1AFD	A	REL	01-00-82	FASOIA/D	08-09-83			
TRND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
022	01	36180753	0	2		PC CAP MYL FM .001UF 10P 600VDCV	P						
023	01	94240448	4	5		PC CAP FXD CER 100KPF 10P 50VDCV	P						
024	01	95691133	3	4		PC CAP ELECT 270UF -10+100P 25V	P						
025	01	51001214	9	4		PC CAP FXD CER .005UF 20P 3000V	P						
026	01	94397161	4	2		PC CAP AL ELEC 560UF-10+100P 75V	P						
027	01	94397162	2	2		PC CAP AL ELEC 5600UF-10+100 12V	P						
028	01	19115400	4	3		PC CAP FXD CER .01UF +80-20P 50V	P						
029	01	94842145	8	2		PC CAP FXD CER 500PF 20P 1K	P						
031	01	94400612	1	3		PC CAP AL ELEC 15UF-10+100P 25V	P						
033	01	94360236	7	1		PC RES FXD FM 237 OHM 1P 1/4W	P						
034	01	24507181	6	2		PC RES FXD COMP 5600 OHM 5P 1W	P						
035	01	95596503	3	2		PC RES FXD WW 4.3 OHM 10P 5WATT	P						
036	01	95596520	7	2		PC RES FXD WW 600 OHM 10P 5WATT	P						
037	01	65019518	3	6		PC RES CARB COMP 1/2W 1.3 OHMS	P						
038	01	95596511	6	1		PC RES FXD WW 43 OHM 10P 5WATT	P						
039	01	94402159	1	7		PC RES FXD C FM 1.3K OHM 5P 1/4W	P						
040	01	94402172	4	2		PC RES FXD C FM 4.7K OHM 5P 1/4W	P						
041	01	94402148	4	2		PC RES FXD C FM 470 OHM 5P 1/4W	P						
042	01	94402166	6	1		PC RES FXD C FM 2.7K OHM 5P 1/4W	P						
043	01	94402220	1	7		PC RES FXD C FM 470K OHM 5P 1/4W	P						
045	01	94402160	9	1		PC RES FXD C FM 1.5K OHM 5P 1/4W	P						

BUILD ARC 220

ASSEMBLY PARTS LIST

PRINT DATE: 08-09-83 PAGE: 3 FILE CHANGE NO.: 0016005A

DIV.		ASSEMBLY NUMBER		CD	REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE		ENG. RESP.	FILE DATE	
0860		90446443		5	D	D	PC CD ASSY 1AFD		A	REL	01-08-82		FA501A/D	08-09-83	
TRND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT	
046	01	94402110	4	2		PC RES FXD C FM 12 OHM 5P 1/4W		P							
047	01	94360331	6	1		PC RES FXD FM 2100 OHM 1P 1/4W		P		16060	16060		8330	8330	
047	02	94360330	8	1		PC RES FXD FM 2050 OHM 1P 1/4W		P							
048	01	24504039	2	2		PC RES FXD COMP 100 OHM 5P 2WATT		P							
049	01	94402176	5	1		PC RES FXD C FM 6.8K OHM 5P 1/4W		P							
050	01	94402167	4	4		PC RES FXD C FM 3.0K OHM 5P 1/4W		P							
051	01	51918046	0	2		PC RES VAR CRM 1K R 20P 1/2W 1		P							
052	01	94402155	9	1		PC RES FXD C FM 910 OHM 5P 1/4W		P							
053	01	94402165	8	1		PC RES FXD C FM 2.4K OHM 5P 1/4W		P							
054	01	24500148	2	1		PC RES FXD COMP 240 OHM 5P 1/2W		P							
056	01	94402180	7	1		PC RES FXD C FM 10K OHM 5P 1/4W		P							
057	01	51918101	0	2		PC HT/SK, SEMICNDCT FIG-18 AL/BL		P							
058	01	94402179	9	1		PC RES FXD C FM 9.1K OHM 5P 1/4W		P							
060	01	51003962	1	001		OZ PASTE, HEAT XFR CMPD NON-COND		B							
061	01	10127103	9	4		PC MSCR PAN PHL 4-40X.312 STL ZP		B		16005	16005		8350	8350	
061	02	10127103	9	2		PC MSCR PAN PHL 4-40X.312 STL ZP		B							
062	01	10126400	0	4		PC WSHR, (4) EXT/T LK STL ZP		B							
063	01	10125103	1	4		PC NUT, HEX 4-40 MSCR STL ZP		B							
064	01	15103443	3	1		PC IC LM311N 311 VOLT COMPARATOR		P							
065	01	94402122	9	1		PC RES FXD C FM 39 OHM 5P 1/4W		P							
066	01	94402132	8	2		PC RES FXD C FM 100 OHM 5P 1/4W		P							
067	01	94360100	5	1		PC RES FXD FM 10 OHM 1P 1/4W		P							

BUILD ARC 220

ASSEMBLY PARTS LIST

PRINT DATE: 08-09-83 PAGE: 4 FILE CHANGE NO.: 0016005A

DIV.		ASSEMBLY NUMBER		CD	REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE		ENG. RESP.	FILE DATE	
0860		90446443		5	D	D	PC CD ASSY 1AFD		A	REL	01-08-82		FA501A/D	08-09-83	
TRND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT	
068	01	50240105	2	1		PC DIO INT50A ZEN 4.7V 5P 20MA		P							
069	01	16006500	9	REF		PC FABRICATION SPECIFICATION		D							
070	01	94360262	3	1		PC RES FXD FM 442 OHM 1P 1/4W		P							
071	01	51903001	9	1		PC RES FXD WW .02 OHM 5P 2WATT		P							
072	01	95691135	8	2		PC CAP ELECT 470UF -10+100P 25V		P							
073	01	17720519	2	2		PC RES FXD COMP 0.2MEG .5W 5P		P							
075	01	90446208	4	REF		PC SCH DIAG 1AFD (PFDS PWR SUP)		D							
076	01	02311900	3	2		PC INJECTOR-EJECTOR, NATURAL PCB		P							
077	01	93533110	1	2		PC ROLLPIN, .1250 X .250L STL ZP		B							
078	01	24500131	8	2		PC RES FXD COMP 47 OHM 5P 1/2W		P							
079	01	94402144	3	2		PC RES FXD C FM 330 OHM 5P 1/4W		P							
080	01	95691506	0	2		PC RECT, SIL INS616 3A 100V F-R		P							
081	01	51719600	2	2		PC HEAT SINK ELCTRN COMP FAN TOP		P							
082	01	51797410	4	062		FT T80 INS .059 DIA T/W		B							
083	01	62019900	0	050		OZ EPOXY, 2-PART 5-MINUTE CLEAR		B			16005			8350	
084	01	12081500	6	2		PC DIO SIL SCHOTTKY PWR .55V/1A		P							
085	01	94240401	3	2		PC CAP FXD CER 1000PF 10P 50VDCW		P							
086	01	51906601	3	2		PC HT/SK, SEMICNDCT FIG-1 AL/BLK		P		16005	16005		8350	8350	
086	02	51906604	7	2		PC HT/SK, SEMICNDCT FIG-1 AL/BLK		P							
087	01	95596512	4	1		PC RES FXD WW 51 OHM 10P 5WATT		P							
088	01	94842104	7	2		PC CAP FXD CER .02UF +80-20P 1K		P							


BUILD ARC 220

ASSEMBLY PARTS LIST

PRINT DATE	PAGE	FILE CHANGE NO.
08-09-83	5	0016005A

DIV.		ASSEMBLY NUMBER		REV.	DWG.	DESCRIPTION		MC	STATUS	STATUS DATE	ENG. RESP.	FILE DATE		
0860		90446443		5	D	D	PC CD ASSY 1AFD	A	REL	01-08-82	FA50/A/D	08-09-83		
TYPE	LI	PART NUMBER	CD	QUANTITY	U/M	PART DESCRIPTION		MC	YLD	ECO. NO. IN	ECO. NO. OUT	S/N	WK IN	WK OUT
	089	01	94400619	6	1	PC CAP AL ELEC 33UF-10+100P 25V		P						
	090	01	94402177	3	2	PC RES FXD C FM 7.5K OHM 5P 1/4W		P						
	091	01	16042865	2	REF	PC PLAYO FLEX DISK SUBSYS		D						
	092	01	94400603	0	1	PC CAP AL ELEC 3.3UF-10+100P 50V		P						
	093	01	94400600	6	1	PC CAP AL ELEC 1.0UF-10+100P 63V		P						
	094	01	94864844	9	4	PC SPACER, NYLON .400		B		15945			8325	
	095	01	94864845	6	16	PC SPACER, NYLON .500		B		15945			8325	
	096	01	24528638	0	166	FT TBG, SZ 3/8 INSUL BLK UL PVC		B		16005A			8350	
	097	01	94277400	1	2	PC STRAP, CBL TIE TYP-1 TO 5/8		B		16005A			8350	
						0094 TOTAL LINES								

7-60

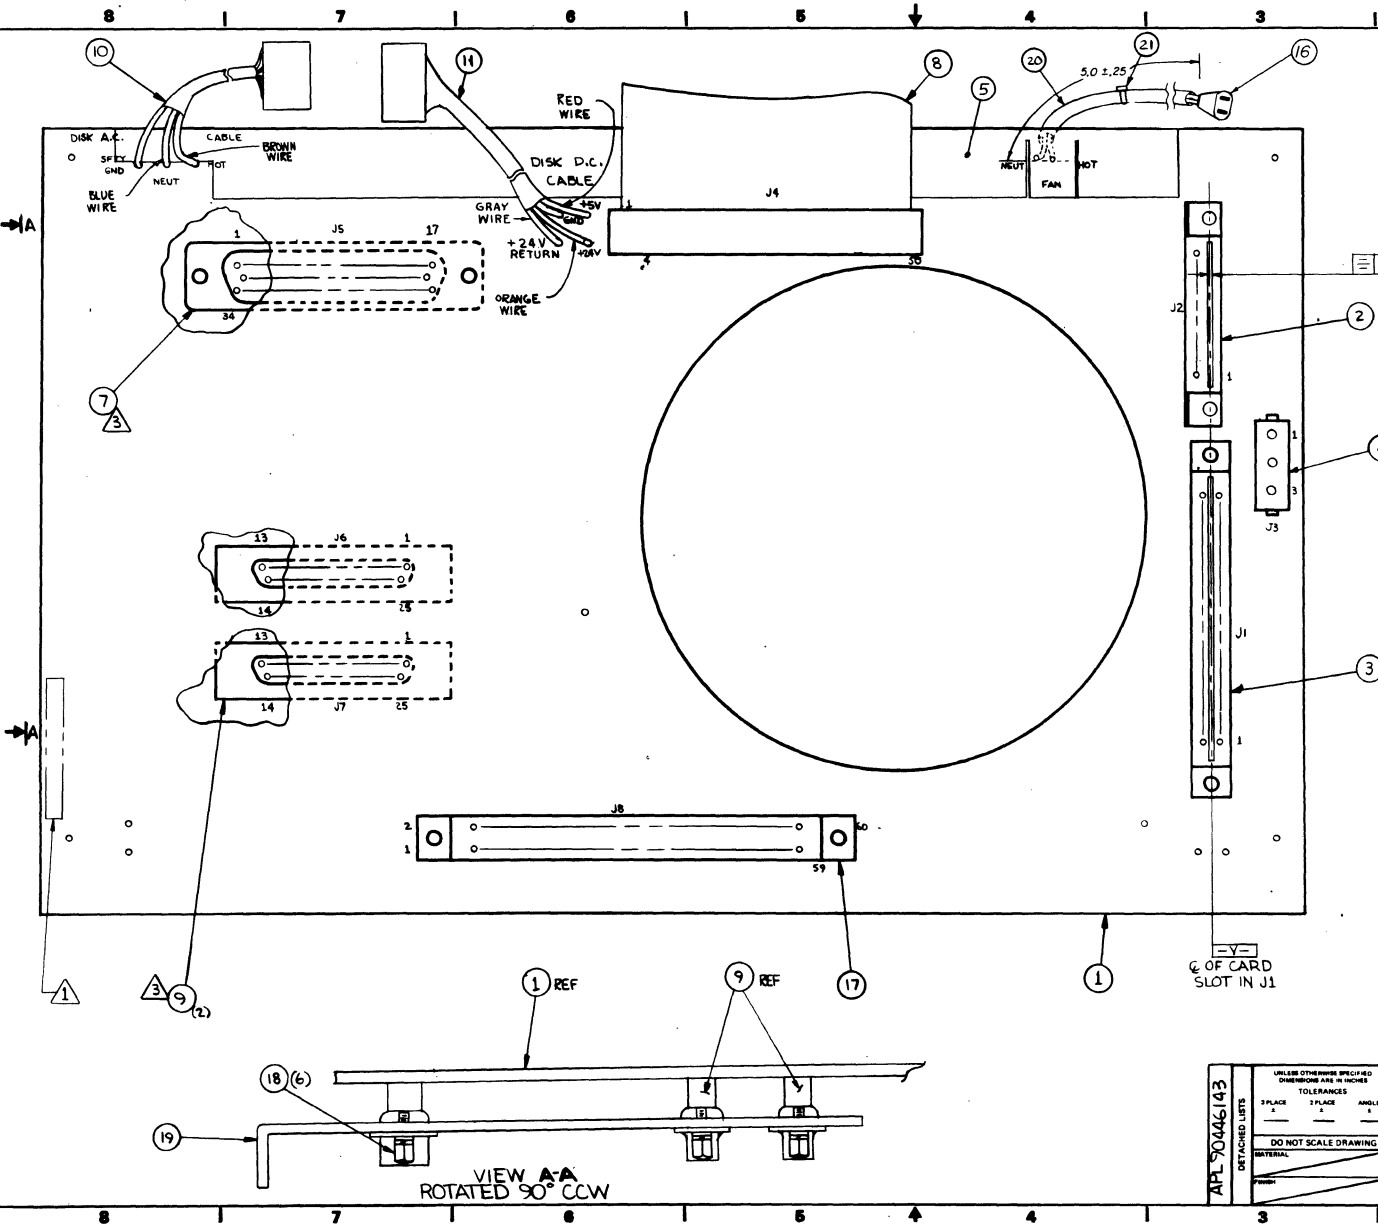

SHEET REVISION STATUS		REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE	CHNG	APP
01	50917	REVISED & REDRAWN PER ECO	WJH	4-28-80	1	
02	51063	ADD -Y- TOL	WJH	5-14-80	1	
03	51098	ADD FIN 5	WJH	5-14-80	1	
04	51126	REVISED PER ECO	WJH	6-17-80	1	
05	51127	REVISED PER ECO	DS	6-17-80	1	
06	51148	ADD DIM ON PAN LOAD	DS	6-24-80	1	
A	1145-87	INCREASED CLR 3 A				
B	14203	PL CHANGE ONLY	DS	7-5-80	1	
C	15294	REVISED FAN CABLE	MIA	5-24-81	1	
D	15917	REVISED PER ECO	M.D.	6-13-83	4	
E	16781	DELETED FIN 12	EE	7/1/84	1	

- NOTES:
- 1. APPLY ASSY NO., REV LEVEL, LOC CODE, AND DATE CODE IN AREA SHOWN. MARK PER CDC SPEC 10121508; CHARACTER HEIGHT .12 (12 PT) COLOR WHITE.
 - 2. FIND NUMBERS, ELEMENT IDENTIFIERS, AND REFERENCE DESIGNATIONS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON PART.
 - 3. CONNECTORS J6 & J7 R/N 9, J5 R/N 7 TO BE MOUNTED ON SOLDER SIDE OF BOARD IN AREA SHOWN.

APL 90446143 DETACHED LISTS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTROL DATA		TITLE
	2 PLACE	3 PLACE	ANGLES	FIRST LETTER	FAS01A
	TOLERANCES			DRAWN BY	WJH/ERMA 12-79
	DO NOT SCALE DRAWING			CHECKED BY	DAK
MATERIAL			ENGINEER	PZ/TKL/ML 1-80	CODE IDENT
			DATE	7-11-80	15920
			APPROVED	7-10-80	D
			INCL. IN	7-10-80	90446143
					SCALE 2/1
					SHEET 1 OF 1

62949100 M

ASSEMBLY PARTS LIST

DIV.	ASSEMBLY NUMBER	CD	REV.	DWG.	DESCRIPTION	MC	STATUS	STATUS DATE	ENG. RESP.	PLS DATE			
0860	90446143	1	E	D	CD ASSY 98MD BACKPLANE	A	REL	07-16-80	FA501A	07-05-84			
TRND NO	LI	PART NUMBER	CD	QTY	U/M	PART DESCRIPTION	MC	VLD	ECO. NO. IN	ECO. NO. OUT	I/M	WE IN	WE OUT
001	01	90446142	3	1		PC PW BD 98MD BACKPLANE	P						
002	01	51940558	3	1		PC CONN, PC BRD EDGE 8PIN UL	P						
003	01	51940578	1	1		PC CONN, PC BRD EDGE 30PIN	P						
004	01	51906101	4	1		PC CONN, PC-MTD 3 PIN NYL/SN F-1	P						
005	01	71493161	5	1		PC CHANNEL, EXTRUDED PLASTIC	P						
007	02	10129640	8	1		PC CONN RCPT, 50 SKT HSG PC-MTG	P		14203			8047	
008	01	61408892	0	1		PC CABLE SIGNAL PLATO FD	G						
009	02	10129648	1	2		PC CONN PLUG, 25 PIN HSG PC-MTG	P		14203			8047	
010	01	61408891	2	1		PC CABLE AC PLATO FD SUBSYSTEM	G						
011	01	61408890	4	1		PC CABLE DC PLATO FD SUBSYSTEM	G						
012	01	24501808	0	250	FT	WIRE, BUSS 20AWG SOLID CU/SN	W			16781			8435
016	02	65642201	1	1		PC CORD, 24.5IN FEM-RCPT 2-CNDCT	P			15294			8312
016	03	61409511	5	1		PC CABLE ASSY AC MUFFIN FAM	G		15294	15917		8312	8337
016	04	65642201	1	1		PC CORD, 24.5IN FEM-RCPT 2-CNDCT	P		15917			8337	
017	01	51863202	1	1		PC CONN, 60POS BD-EDGE FIG-1 AU	P						
018	02	18252501	4	6		PC SCR-LOCK, CONNECTOR CONFIG-B	P		14453			8051	
019	01	71493091	4	1		PC PLATE, I/O CONNECTOR	P						
020	01	24528645	5	375	FT	TBG, SZ 04 INSUL CLR UL PVC	B		15917			8337	
021	01	94277400	1	1		PC STRAP, CBL TIE TYP-1 TO 5/8	B		15917			8337	
0019 TOTAL LINES													

No wire lists are contained in this manual. The following wire list document numbers are provided for reference purposes if needed.

<u>Title</u>	<u>Document Number</u>	
	<u>Preproduction Units</u>	<u>Production Units</u>
60-Hz AC Entry Panel Wiring	61408888	61409023
50-Hz AC Entry Panel Wiring	61408889	61409024
DC Cable Wiring (Backpanel)	61408890	61408890
AC Cable Wiring (Backpanel)	61408891	61408891
Signal Cable Wiring (Backpanel)	61408892	61408892



COMMENT SHEET

MANUAL TITLE: PLATO® Flexible Disk Subsystem
Hardware Maintenance Manual

PUBLICATION NO.: 62949100

REVISION: M

NAME: _____

COMPANY: _____

STREET ADDRESS: _____

CITY: _____ STATE: _____ ZIP CODE: _____

This form is not intended to be used as an order blank. Control Data Corporation welcomes your evaluation of this manual. Please indicate any errors, suggested additions or deletions, or general comments below (please include page number references).

STAPLE

STAPLE

FOLD

FOLD



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 8241 MINNEAPOLIS, MINN.

POSTAGE WILL BE PAID BY
CONTROL DATA CORPORATION
Technical Publications Department
2401 North Fairview Avenue
St. Paul, Minnesota 55113



CUT ALONG LINE

FOLD

FOLD

03377

CORPORATE HEADQUARTERS, P.O. BOX 0, MINNEAPOLIS, MINN. 55440
SALES OFFICES AND SERVICE CENTERS IN MAJOR CITIES THROUGHOUT THE WORLD

LITHO IN U.S.A.



CONTROL DATA CORPORATION