

Features


Figure 1: 4100ES Cabinets are available with one, two, or three bays

Master Controller (top) bay:

- Models available with Color ES Touch Screen Display (shown in Figure 1), Monochrome 2 line x 40 Character Display, or Monochrome InfoAlarm Display
- 32-Bit Master Controller with color-coded operator interface including raised switches for high-confidence feedback
- Dual configuration program CPU, convenient service port access, and capacity for up to 3000 addressable points
- CPU assembly includes 2 GB dedicated compact flash memory for on-site system programming and information storage
- ES Power Supply (ES-PS) and charger with onboard alarm relay, programmable auxiliary power output and provisions for one 4 in. x 10 in. or two 4 in. x 5 in. compatible option cards such as IDNet2 addressable device interface, Conventional NAC or Addressable IDNAC SLC modules; refer to 579-1288AC installation instructions for additional details

Network compatibility:

Compatible with Autocall ES Net Fire Alarm Network

Standard addressable interfaces include:

- 250 point addressable IDNet 2 SLC channel with electrically isolated dual short circuit isolating loops that supports TrueAlarm analog sensors and IDNet communications monitoring and control devices
- Remote annunciator module support through RUI+ (remote unit interface) communications port

Optional modules include:

- Building Network Interface Module (BNIC) for Ethernet connectivity options, refer to data sheet [AC4100-0061](#)

- Electrically isolated output IDNet 2 (two loop) and IDNet 2+2 (four loop) modules with short circuit isolation output loops allowing use with either shielded or unshielded, twisted or untwisted single pair wiring
- Fire Alarm Network Interfaces, DACTs, city connections, and up to five RS-232 ports for printers and terminals
- IP communicator compatibility. Use IP Communicator Cards (IPC) for central station reporting, refer to data sheet [AC2080-0090](#)
- IDNAC signalling line circuits (SLCs) for addressable appliance control
- Alarm relays, auxiliary relays, additional power supplies, IDC modules, NAC expansion modules
- VESDA Air Aspiration Systems interface, ASHRAE BACnet Interface
- LED/switch modules and panel mount printers
- Emergency communications systems (ECS) equipment; 8 channel digital audio or 2 channel analog audio
- 8-point zone/relay module, each point is selectable as an IDC input or relay output. Class A IDCs require two points (one out and one return). Relays rated for 2 A @ 30 VDC (resistive) and configurable as either normally open or normally closed.
- Compatible with Autocall remotely located 4009 IDNet NAC Extenders, up to ten for each IDNet SLC

Listings information*

- UL 864, Fire Detection and Control (UOJZ), Smoke Control Service (UUKL), Releasing Device Service (SYZV), Emergency Communication and Relocation Equipment (UOQY)
- UL 1076, Proprietary Alarm Units - Burglar (APOU)
- UL 2017, Process Management Equipment (QVAX), Emergency Alarm System Control Units (FSZI)
- UL 1730, Smoke Detector Monitor (UULH)
- UL 2572, Mass Notification Systems (PGWM)
- CAN/ULC-S527 Control Units for Fire Alarm Systems (UOJZ7), Releasing Device Service (SYZV7)
- CAN/ULC-S559 Central Station Fire Alarm System Units (DAYR7)
- ULC/ORD-C1076 Proprietary Burglar Alarm Units and Systems (APOU7)
- ULC/ORD-C100 Smoke Control System Equipment (UUKL7)

Software Feature Summary
CPU provides dual configuration programs

- Two programs allow for optimal system protection and commissioning efficiency with one active program and one reserve
- Downtime is reduced because the system stays running during download

PC based programmer features

- Convenient front panel accessed Ethernet port for quick and easy download of site-specific programming
- Modifications can be uploaded as well as downloaded for greater service flexibility
- Firmware enhancements are made through software downloads to the on-board flash memory

Operator interface features

- TrueAlarm individual analog sensing with front panel information and selection access
- "Dirty" TrueAlarm sensor maintenance alerts, service and status reports including "almost dirty"
- TrueAlarm magnet test indication appears as distinct "test abnormal" message on display when in test mode

* At the time of publication, models with Color ES Touch Screen Display have UL and ULC Listing only. Additional listings may be applicable; contact your local product supplier for the latest status.

- TrueAlarm sensor peak value performance report
- **Install Mode** allows grouping of multiple troubles for uninstalled modules and devices into a single trouble condition, typical with future phased expansion; with future equipment and devices grouped into a single trouble, operators can more clearly identify events from the commissioned and occupied areas
- Module level ground fault searching assists installation and service by locating and isolating modules with grounded wiring
- **Recurring Trouble Filtering** allows the panel to recognize, process, and log recurring intermittent troubles, such as external wiring ground faults, but only sends a single outbound system trouble to avoid nuisance communications
- **WALKTEST** silent or audible system test performs an automatic self-resetting test cycle

Introduction

4100ES Series Fire Detection and Control Panels provide extensive installation, operator, and service features with point and module capacities suitable for a wide range of system applications. An on-board Ethernet port provides fast external system communications to expedite installation and service activity. Dedicated compact flash memory archiving provides secure on-site system information storage of electronic job configuration files.

Modular design

A wide variety of functional modules are available to meet specific system requirements. Selections allow panels to be configured for either Stand-Alone or Networked fire control operation. InfoAlarm Command Center options provide convenient expanded display content, detailed on data sheet *AC4100-1045*.

Module Bay Description

The Master Controller Bay (top) includes a standard multi-featured ES power supply, the master controller board, expansion space for optional features, and operator interface equipment.

The Expansion Bays include a Power Distribution Interface (PDI) for new 4 in. x 5 in. flat design option modules and also accommodate 4100-style modules.

The Battery Compartment (bottom) accepts two batteries, up to 50 Ah, to be mounted within the cabinet without interfering with module space.

Figure 2 identifies bay locations using a three bay cabinet for reference.

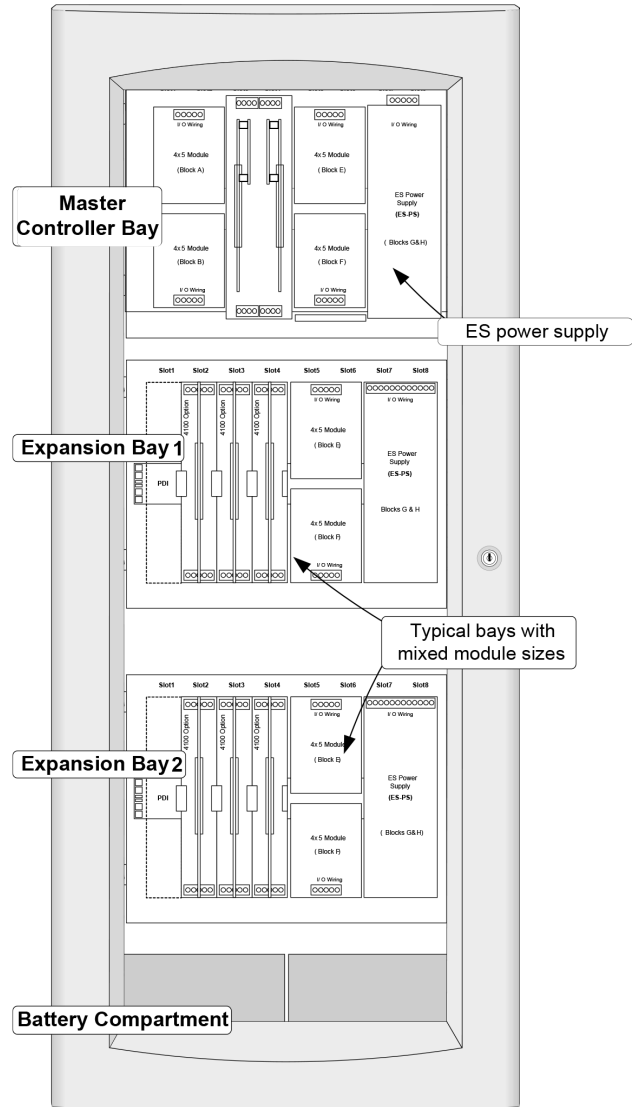


Figure 2: 4100ES Module Bay Reference

Mechanical Description

- Boxes can be close-nipped; each box provides convenient stud markers for drywall thickness and nail-hole knockouts for quicker mounting
- Smooth box surfaces are provided for locally cutting conduit entrance holes exactly where required
- The latching dress panel (retainer) assembly easily lifts off for internal access
- NACs can be mounted directly on power supply assemblies providing minimized wiring loss, compact size, and readily accessible terminations
- Packaging supports traditional 4100-style motherboard with daughter cards
- Modules are power-limited except as noted, such as relay modules
- The NEMA 1/IP30 box is ordered separately and available for early installation
- Doors are available with tempered glass inserts or solid; boxes and doors are available in platinum or red
- Boxes and door/retainer assemblies are ordered separately per system requirements; refer to data sheet AC4100-0037 for details

Operator Interface Detail Reference

4100ES Fire Alarm Control Units are provided with either an enhanced Color ES Touch Screen Display or a basic Monochrome 2 Line by 40 Character operator interface depending on the model selected. The following illustrations highlight the primary functions of each.

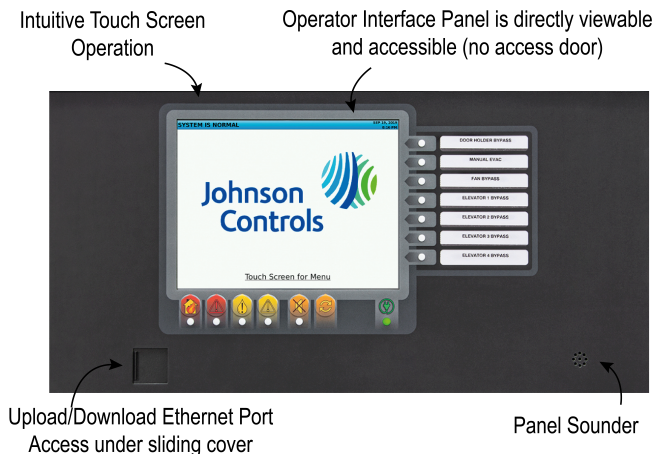


Figure 3: ES Touch Screen Display Interface

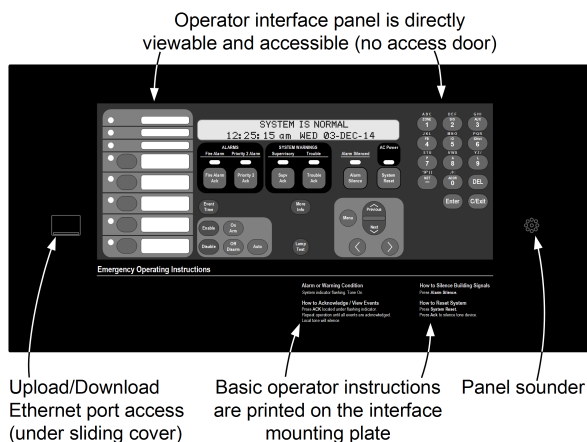


Figure 4: 2 x 40 Operator Interface

Compatible Peripheral Devices

The 4100ES is compatible with an extensive list of remote peripheral devices including printers, CRT/keyboards (up to five total), and both conventional and addressable devices including TrueAlarm analog sensors and TrueAlert addressable appliances.

Master Controller Bay Module Details

Master Controller and Motherboard

- Master Controller mounts in Slot 2 of a two slot motherboard and provides one Class B or Class A, RUI+ communications channel configurable for isolated or un-isolated operation
- Slot 1 of the motherboard is primarily for an optional network interface card, or secondarily for the A100-6038 dual RS-232 board
- RUI+ and RUI communications controls up to 31 remote devices per master controller at up to 2500 ft (762 m) for single run, or 10,000 ft (3048 m) total if wiring is Class B and T-tapped; if more distance is required, up to four total RUI channels are supported; add up to three A100-1291 RUI Expansion Modules (A100-1291 provides unisolated RUI communications)
- Compatible RUI+ and RUI remote equipment includes: MINIPLEX transponders, A4603-9101 LCD Annunciators, A602-9101 Status Command Units (SCU), A602-9102 Remote Command Units (RCU), A602 Series LED Annunciator Panels, A100 Series 24 I/O and LED/Switch modules, (A602 series annunciators require un-isolated communications)
- Up to four RUI channels (combination of built-in RUI+ and optional RUI modules) are supported per master controller
- Open slot space on the left of the CPU motherboard is available for either another dual slot motherboard, or for one or two block modules, see Figure 14

ES-PS Master Controller Power Supply

- Rating is up to 9.5 A total without a fan or up to 12.7A total with a fan using Special Application appliances; or up to 5 A total with Regulated 24 DC appliance loads.
- Outputs are power-limited, except for battery charger and city circuits.
- Provides system power, battery charging, auxiliary power, auxiliary relay, earth detection, electrically isolated IDNet 2 communications channel for 250 points (A100-3117), three 3 A conventional NACs (A100-5450) or three 3 A IDNAC addressable SLCs (A100-5451), two block spaces for compatible optional modules and provisions for either an optional City Connect Module or an optional Alarm Relay Module (City Connect or Alarm Relay module requires one available block space).
- **IDNet 2 SLC Output** (A100-3109 and A100-3117) provides an electrically isolated Class B or Class A communications channel with dual short circuit isolating loops for up to 250 addressable devices, as described in Addressable Device Control (requires one block space from ES-PS power supply or Master Controller bay).
- **Conventional NAC Module** (A100-5450) provides three outputs individually selectable as a Conventional NAC (Class B or Class A) or an Auxiliary Power output. When mounted on the ES-PS power supply, each NAC is rated at 3 A for Special Application appliances (9 A max per card) or 2 A for Regulated 24 DC loads (4 A max per card). NAC operation supports synchronized strobe or SmartSync horn/strobe operation over two wires. Auxiliary power outputs are rated for 3 A continuous duty. The total auxiliary power output per power supply is limited to 5 A (requires one block space).
- **IDNAC Addressable Notification SLC Module** (A100-5451) provides three 3 A IDNAC addressable notification SLCs compatible with both TrueAlert ES and TrueAlert addressable notification appliances and remote 4009 IDNAC Repeaters used to extend power and wiring distances (requires two block spaces).
- **DCAI (Dual Class A IDNAC Isolator) Module** (A100-6103) creates two Class A outputs from one IDNAC SLC Class B Input; up to two can

be connected to one IDNAC SLC, with up to 6 total per ES-PS power supply; total Class A output loop current is limited to the 3 A rating of the IDNAC SLC (requires one block space).

- **Battery Charger** is dual rate, temperature compensated, and charges up to 50 Ah sealed lead-acid batteries mounted in the battery compartment (33 Ah for single bay cabinets); also is UL and ULC listed for charging up to 110 Ah batteries mounted in an external cabinet, refer to data sheet AC2081-0012 for details.
- **Battery and Charger Monitoring** includes battery charger status and low or depleted battery conditions; status information provided to the master controller includes analog values for: battery voltage, charger voltage and current, actual system voltage and current, individual NAC currents, and individual IDNAC SLC currents.
- **Low Battery Cutout** is selectable for each ES-PS power supply.
- **2 A Programmable Output** is selectable for conventional SNAC or Auxiliary power operation.
 - SNAC operation supports conventional non-synchronous NAC operation to provide supervised reverse polarity for sounder base power, Suppression Release Peripheral (SRP) power, or other coded NAC operation requirements.
 - Auxiliary (AUX) power operation can be used for sounder base power, four-wire detector power, or door holder; relay is selectable as N.O. or N.C. and rated for 2 A @ 32 VDC and 30 VAC (resistive); supervised AUX operation does not require an end-of-line relay to provide Power-Limited operation.
- **Auxiliary Relay** is selectable as N.O. or N.C., rated 2 A @ 32 VDC or 30 VAC (resistive), and is programmable as a trouble relay, either normally energized or normally de-energized, or as an auxiliary control.
- **Optional City Connect Module** (A100-6031, with disconnect switches, or A100-6032, without disconnect switches) can be selected for conventional dual circuit city connections (requires one block space).
- **Optional Alarm Relay Module** (A100-6033) provides three Form C relays that are used for Alarm, Trouble, and Supervisory, rated 2 A resistive @ 32 VDC (requires one block space).

IDNet SLC for Addressable Device Communications

Overview

The 4100ES provides standard addressable device communications for IDNet compatible devices and accepts optional modules for communications with compatible devices. Using a two wire communications circuit, individual devices such as manual fire alarm stations, TrueAlarm sensors, conventional IDC zones, and sprinkler waterflow switches can be interfaced to the addressable controller to communicate their identity and status.

Addressability allows the location and condition of the connected device to be displayed on the operator interface LCD and on remote system annunciators. Additionally, control circuits (fans, dampers, etc.) may be individually controlled and monitored with addressable devices.

Addressable Operation

Each addressable device on the communication channel is continuously interrogated for status condition such as: normal, off-normal, alarm, supervisory, or trouble. Both Class B and Class A operation are available. Sophisticated poll and response communication techniques ensure supervision integrity and allow for "T-tapping" of the circuit for Class B operation. Devices with LEDs pulse the LED to indicate receipt of a communications poll and can be turned on steady from the panel.

IDNet Channel Capacity

The CPU bay ES-PS provides an IDNet 2 signaling line circuit (SLC) that supports up to 250 addressable monitor and control points intermixed on the same pair of wires. IDNet 2 and IDNet 2+2 Module SLCs are isolated from other system reference voltages to reduce common mode

noise interaction with adjacent system wiring. Additional 250 address IDNet 2 or IDNet 2+2 Modules are available, see .

Table 1: IDNet 2, and IDNet 2+2 SLC Wiring Common Specifications

Specification	Description	
Maximum Distance from Control Panel per Device Load	1 to 125	4000 ft (1219 m); 50 ohms
	126 to 250	2500 ft (762 m); 35 ohms
Connections	Terminals for 18 to 12 AWG (0.82 mm ² to 3.31 mm ²)	

Table 2: IDNet Specifications

Specification	Description	
Wire Type	New Installation	Shielded twisted pair (STP)
	Retrofit Only	Unshielded twisted pair (UTP)
Total Wire Length Allowed With "T" Taps for Class B Wiring	Up to 10,000 ft (3 km); 0.58 μF	

Note: For retrofit installations consult with your local Autocall product supplier, restrictions may apply.

Table 3: IDNet 2 and IDNet 2+2 Wiring Specifications

Specification	Description	
Wire Type	New Installation	Unshielded twisted pair (UTP)
	Retrofit Only	Shielded or unshielded, twisted or untwisted wire
Total Wire Length Allowed With "T" Taps for Class B Wiring	Up to 12,500 ft (3.8 km); 0.60 μF	
Maximum Capacitance Between IDNet 2 Channels	1 μF	
IDNet 2 and IDNet 2+2 Module Compatibility: IDNet communicating devices and TrueAlarm sensors including QuickConnect and QuickConnect2 sensors		

Note: For retrofit installations consult with your local Autocall product supplier, restrictions may apply.

TrueAlarm System Operation

Addressable device communications include operation of TrueAlarm smoke and temperature sensors. Smoke sensors transmit an output value based on their smoke chamber condition and the CPU maintains a current value, peak value, and an average value for each sensor. Status is determined by comparing the current sensor value to its average value. Tracking this average value as a continuously shifting reference point filters out environmental factors that cause shifts in sensitivity.

Programmable sensitivity of each sensor can be selected at the control panel for different levels of smoke obscuration (shown directly in percent) or for specific heat detection levels. To evaluate whether the sensitivity should be revised, the peak value is stored in memory and can be easily read and compared to the alarm threshold directly in percent.

CO sensor bases combine an electrolytic CO sensing module with a TrueAlarm analog sensor to provide a single multiple sensing assembly using one system address. The CO sensor can be enabled/disabled, used in LED/Switch modes and custom control, and can be made public for communication across a fire alarm Network. Refer to data sheet AC4098-0052 for details.

TrueAlarm heat sensors can be selected for fixed temperature detection, with or without rate-of-rise detection. Utility temperature sensing is also available, typically to provide freeze warnings or alert to HVAC system problems. Readings can be selected as either Fahrenheit or Celsius.

TrueSense Early Fire Detection

Multi-sensor A4098-9754 provides photoelectric and heat sensor data using a single 4100ES IDNet address. The panel evaluates smoke activity, heat activity, and their combination, to provide TrueSense early detection. For more details on this operation, refer to data sheet AC4098-0024.

Diagnostics and Default Device Type

Sensor Status

TrueAlarm operation allows the control panel to automatically indicate when a sensor is almost dirty, dirty, and excessively dirty. The NFPA 72 requirement for a test of the sensitivity range of the sensors is fulfilled by the ability of TrueAlarm operation to maintain the sensitivity level of each sensor. CO Sensors track their 10 year active life status providing indicators to assist with service planning. Indicators occur at: 1 year, 6 months, and when end of life is reached.

Modular TrueAlarm sensors

TrueAlarm sensors use the same base and different sensor types (smoke or heat sensor) and can be easily interchanged to meet specific location requirements. This allows intentional sensor substitution during building construction when conditions are temporarily dusty. Instead of covering smoke sensors (causing them to be disabled), heat sensors may be installed without reprogramming the control panel. The control panel will indicate an incorrect sensor type, but the heat sensor will operate at a default sensitivity to provide heat detection for building protection at that location.

IDNAC SLC for Addressable Notification Appliance Communications

IDNAC Addressable notification appliance communications

include operation of TrueAlert and TrueAlert ES Visible only (V/O, strobe), Audible only (A/O, horn), Audible/Visible (A/V, horn/strobe), and strobes of Speaker/Visible (S/V) notification appliances. (S/V appliances require separate speaker wiring.) IDNAC SLC addressable communications allow each horn and strobe to be individually controlled using a single two-wire circuit, confirms the wiring connections to the individual notification appliance's electronic circuit, and confirms communications between each appliance and the fire alarm control unit. Addressable communications increases supervision integrity versus conventional notification systems by providing supervision beyond the circuit wiring to each individual appliance and by constantly verifying the ability of each appliance to communicate with the control panel.

Individual Appliance Status and Settings

The fire alarm control panel monitors and records each addressable notification appliance status, type of appliance, and its configured appliance settings. A fault in any individual appliance automatically reports a trouble condition to the control panel.



Figure 5: TrueAlert ES Addressable Appliance Reference

Virtual NACs Provide Control Convenience

For control convenience, IDNAC notification appliances can be grouped into *Virtual NACs* (VNACs) for group control, grouping that can be made across SLCs, not defined by their wiring connection.

Panel Control Convenience

Applicable operation settings for each appliance can be programmed *without having to replace appliances or remove them from the wall or ceiling*. An appliance's VNAC notification zone can be easily changed through programming without having to add additional circuits, conduit, and wiring. Audible and visible appliances for non-Fire Emergency Communications notification can be programmed to operate separately *on the same pair of wires as the fire alarm notification appliances*. The result is lower installation, retrofit, and overall life-cycle cost of ownership compared with traditional conventional notification systems.

Installation, Retrofit, and Life-Cycle Cost Benefits

With each addressable appliance capable of being controlled separately on the same two-wire IDNAC SLC, installation time and expense for both retrofit and new construction can be significantly reduced. When Class B wiring is used, wiring can be "T-tapped" allowing more savings in distance, wire, conduit (size and utilization), and overall installation efficiency.

Location Information, Diagnostics and Troubleshooting

Each addressable notification appliance has its own 40 character custom label to identify the location of the appliance and to aid in troubleshooting fault conditions. In conventional notification systems, conventional appliances are not capable of communicating with the control panel. Fault reporting on a conventional system is limited to the circuit wiring and the entire area (zone) covered by appliances on the notification appliance circuit (NAC) making it much more difficult and costly to locate and correct the source of a problem. Using the TrueAlert *magnet test* allows each appliance to individually identify its candela setting and address and to briefly operate if desired, and using the *TrueAlert ES Appliance Self-Test feature provides detailed performance verification per appliance*.

TrueAlert ES Appliance Self-Test Operation

On-Board Test Sensors

TrueAlert ES appliances are equipped with on-board sensors to detect strobe and/or horn output allowing efficient and unobtrusive Self-Testing. When **Automatic Self-Test** is initiated from the control panel, each appliance within the selected VNAC group will briefly operate and then report its Self-Test status to the control panel, all within several seconds. Silent Self-Test can be selected to test only visible appliance if desired. The control panel is in a trouble condition during testing and in the event of an alarm, Self-Test is automatically terminated.

Additionally, Automatic Self-Test can be scheduled to occur at a convenient time on a regular basis .

Automatic Self-Test

Automatic Self-Test results are communicated to the control panel with a time and date stamp and are stored in memory. Results are viewable at the front panel display and printed reports can be generated from the panel service port.

Individual Self-Test

Individual Self-Test is selected from the control panel when individual appliances need to be observed to operate. Each appliance in the selected VNAC group will turn on its LED until individually activated by applying a magnet. After performing the individual test, the appliance LED turns off to indicate completion. Results are recorded the same as during the automatic test.

TrueAlert ES Appliance Self-Test Last Test Results Report Example

Service Port				Page 1	
REPORT 10 TrueAlertES Self-Test Report				12:34:56pm	WED 03-DEC-14
Point ID	Custom Label	Date	Visual	Audible	
T1-1-1	VO FIRST FLOOR (up to 40 characters)	03-DEC-14	NO OUT	N/A	
T1-2-5	AV FIRST FLOOR EAST WING	03-DEC-14	NO OUT	NORMAL	
T7-3-55	AO SECOND FLOOR EAST WING	03-DEC-14	N/A	NO OUT	
T8-2-45	AV SECOND FLOOR ROOM 29	03-DEC-14	NOT TST	N/A	
T8-2-60	AV SECOND FLOOR ROOM 22	03-DEC-14	NORMAL	NORMAL	
T1-2-4	AO FIRST FLOOR ROOM 17	03-DEC-14	N/A	UNSUPP	
TRUEALERT_ES SELF-TEST REPORT COMPLETED					
Press RETURN for next Screen OR CTRL-X to abort					

Results Description

- **NORMAL** = Works correctly
- **NO OUT** = No Output, no light or sound was detected
- **NOT TST** = No result. Either the appliance did not return a result before the test ended or the test was conducted as silent (strokes only) and audible appliance was not activated
- **N/A** = Not applicable (no strobe, on audible only, etc.)
- **UNSUPP** = Appliance not compatible with Self-Test (TrueAlert addressable appliance not TrueAlert ES addressable appliance)

Note: Additional TrueAlert ES Self-Test information is detailed in ES Operating Instructions 579-197AC shipped with the panel.

TrueAlert ES Appliance Self-Test All Test Results Report Example

Service Port				Page 1	
REPORT 10 TrueAlertES Self-Test Report				12:34:56pm	WED 03-DEC-14
Point ID	Custom Label	Date	Visual	Audible	
T1-1-1	VO FIRST FLOOR	03-DEC-14	NO OUT	N/A	
T1-2-5	AV FIRST FLOOR EAST WING	03-DEC-14	NO OUT	NORMAL	
T1-2-6	AV FIRST FLOOR NORTH ENTRANCE	30-OCT-14	NO OUT	NORMAL	
T7-3-55	AO SECOND FLOOR EAST WING	03-DEC-14	N/A	NO OUT	
T8-2-45	AV SECOND FLOOR ROOM 29	03-DEC-14	NOT TST	N/A	
T1-1-11	AV FIRST FLOOR SOUTH ENTRANCE	30-OCT-14	NORMAL	NORMAL	
T8-2-60	AV SECOND FLOOR ROOM 22	03-DEC-14	NORMAL	NORMAL	
T1-2-4	AO FIRST FLOOR ROOM 17	03-DEC-14	N/A	UNSUPP	
T1-2-7	AO FIRST FLOOR ROOM 12	30-OCT-14	N/A	UNSUPP	
T8-3-43	AV SECOND FLOOR ROOM 25	30-OCT-14	UNSUPP	UNSUPP	
TRUEALERT_ES SELF-TEST REPORT COMPLETED					
Press RETURN for next Screen OR CTRL-X to abort					

TrueAlert ES Appliance Self-Test Individual Appliance Report Example

CUSTOM LABEL	
4-1-2	AV
POINT ADDRESS: 4-1-2	Type: AV
CARD: 4 CHANNEL: 1 DEVICE: 2	
EXTENDED POWER SUPPLY	
UNIT NUMBER: 2	RUI NUMBER: LOCAL
PRIMARY STATUS	NORMAL
AUDIBLE GROUP CONFIG:	0 0 0
VISUAL GROUP CONFIG:	0 0 0
STYLE:	INDOOR
OPERATION:	GENERAL EVAC
CANDELA RATING	15 CD
COLOR LENS	YES
TONE TYPE	BROADBAND
CODING TYPE	TEMPORAL
VOLUME	HIGH
LAST TEST TIME:	MON 02-JUN-14 01:00 AM
LAST VISUAL TEST:	NORMAL
LAST AUDIBLE TEST:	NORMAL
LAST TEST VOLUME:	NORMAL
DEVICE TEST TROUBLE:	NORMAL

IDNAC SLC Hardware Reference

ES-PS Power Supplies

ES-PS Power Supplies configured with an IDNAC card provide three, 3 A IDNAC SLCs for control and power to TrueAlert ES and TrueAlert addressable notification appliances. Both power supplies incorporate an efficient switching design that provides a regulated output of 29 VDC, even during battery operation. With 29 VDC minimum output at the panel, addressable notification SLCs can support wiring distances two to three times farther than available with conventional notification, or support more appliances per SLC, or work with smaller gauge wiring, or combinations of these benefits, all resulting in installation and maintenance savings with high assurance that appliances that operate during normal system testing will operate during worst case alarm conditions.

IDNAC SLC Appliance Wiring Reference

IDNAC SLC Capacity

Up to 127 addresses and up to 139 unit loads (appliances are typically one unit load, devices such as Isolators may require more than one load, refer to individual device data sheet for specific information)

Table 4: IDNAC SLC Appliance Wiring Reference

Specification	Rating
Recommended wire type	Unshielded twisted pair (UTP)
Maximum wire length allowed with "T-Taps" for Class B wiring, per SLC	10,000 ft (3048 m)
Maximum wire length per SLC to any appliance	4000 ft (1219 m)
Appliance Supervisory Current	1 unit load = 0.8 mA per appliance
Wiring connections	Terminals for 18 to 12 AWG (0.82 mm ² to 3.31 mm ²)
Installation Instructions (see for more information)	579-1015AC

8-Point Zone/Relay Module Details

- **Select as IDC or Relay;** configure up to eight Class B IDCs, or up to four Class A IDCs; or up to eight Relay outputs rated 2 A resistive @ 30 VDC (N.O. or N.C.); or combinations of IDCs and Relays; each zone is separately configurable as an IDC or Relay output
- **IDC Support:** each IDC supports up to 30, two-wire devices. Zone relay modules may be powered directly from the control unit power supply or through the optional 25 VDC regulator module where required for two-wire detector compatibility. Refer to 2-Wire Detector Compatibility document 579-832AC for additional details.
- **IDC EOL resistor values are selectable as:** 3.3 kΩ, 2 kΩ, 2.2 kΩ, 3.4 kΩ, 3.9 kΩ, 4.7 kΩ, 5.1 kΩ, 5.6 kΩ, 6.34/6.8 kΩ, and 3.6 kΩ + 1.1 kΩ; see instructions for more details

Color ES Touch Screen Display

The Color ES Touch Screen Display interface offers intuitive operation similar to a tablet or smart phone. With a larger area format versus an individual text line display, more information is available at a glance, and minimal key presses are needed to access detailed information.

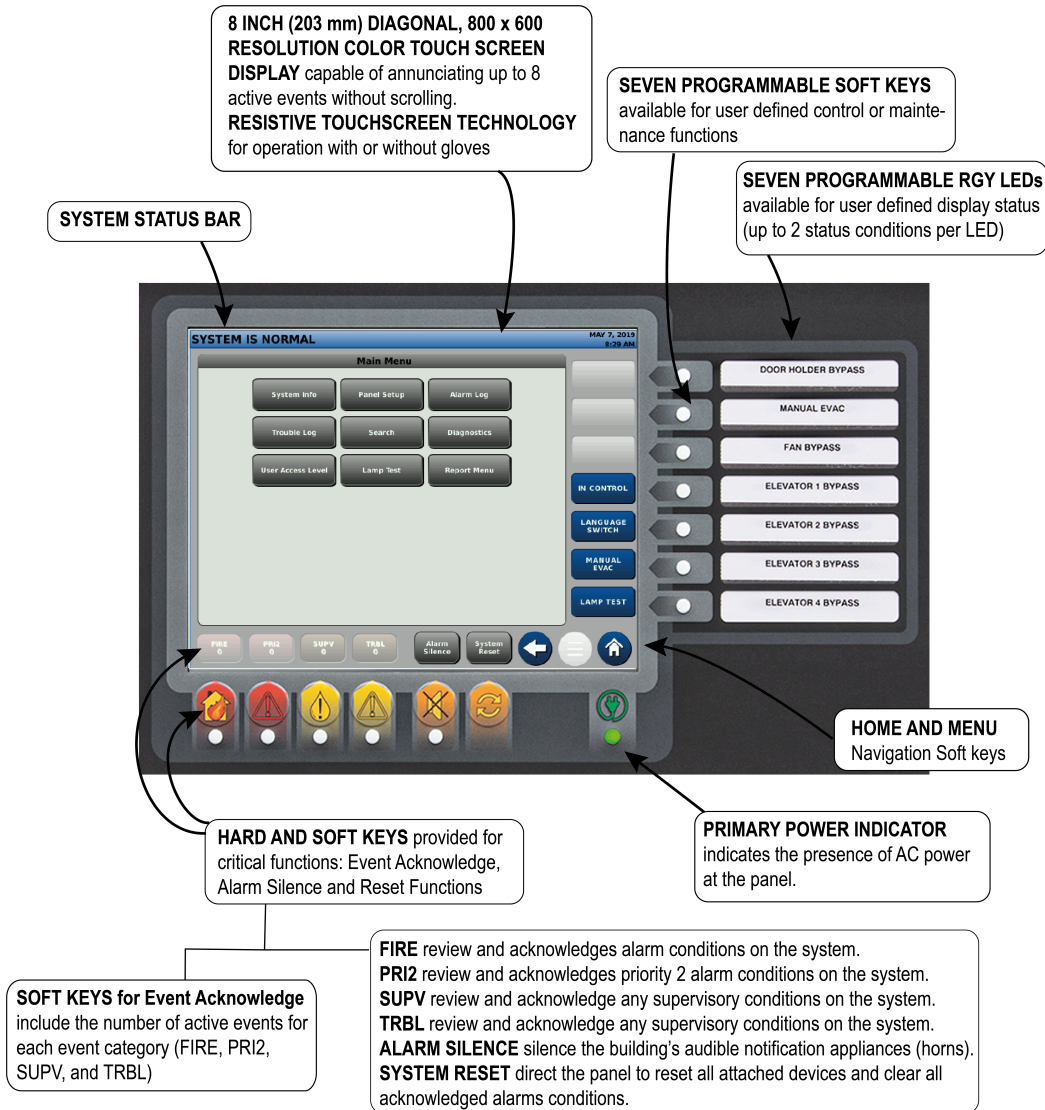


Figure 6: ES Touch Screen Display Operator Interface

Features

ES Touch Screen Displays provide customized operating experience

- Event activity display choices include: First 8 Events; or First 7 Events with emphasis on Most Recent; or First 6 Events with emphasis on First and Most Recent (individually selectable for each event type)
- System reports are easily viewable; logs can be read with minimal scrolling
- Up to two languages are available per system, easily selected by programmable key press
- Information sent to Remote ES Touch Screen Displays can be vectored by point or zone
- Both Hard and Soft keys available for critical functions: Event Acknowledge, Alarm Silence, and Reset Functions
- Resistive touchscreen technology allows operation with or without gloves
- Seven programmable RGY LEDs available for user-defined display status (up to 2 status conditions per LED)
- Seven programmable Soft keys available for user-defined control or maintenance functions
- PRI2 Soft key label can be changed to CO to annunciate Carbon Monoxide detection status
- ES Touch Screen Display can be programmed to report individual points or groups of points as a single zone
- Supports ability to display a custom watermark background file of a company logo or other desired display content

Display properties

- 8 inch (203 mm) diagonal, 800 x 600 resolution color touch screen display capable of annunciating up to 8 active events without scrolling
- Bright white LED backlighting provides efficient and long lasting illumination; backlight is dim in quiescent state, automatically switches to full power on touch or on event activity in system.

Description

ES Touch Screen Displays for 4100ES fire alarm systems provide a large display with extended information content, dual language support including UTF-8 character languages, and an intuitive control key interface per the following:

- Up to 10 ES Touch Screen Displays are supported per 4100ES control panel; able to allow one ES Touch Screen Display to take-control and to designate access levels for interfaces not in-control; programmable LEDs can be assigned to in-control status indications
- Menu-driven format conveniently prompts operators for the next action required
- Direct point callup displays individual points alphabetically and then homes in on the logical choice as more point information is entered
- Event categories are color coded for quick visual representation; Red for Alarm and Priority 2 Events; Yellow for Supervisory and Trouble events
- Date formats are either MM/DD/YY or DD/MM/YY
- Time formats are either 24 hour or 12 hour with AM/PM
- System Normal screen supports a color background (watermark) for company name, company logo, or other desired display content

Example Display Screens

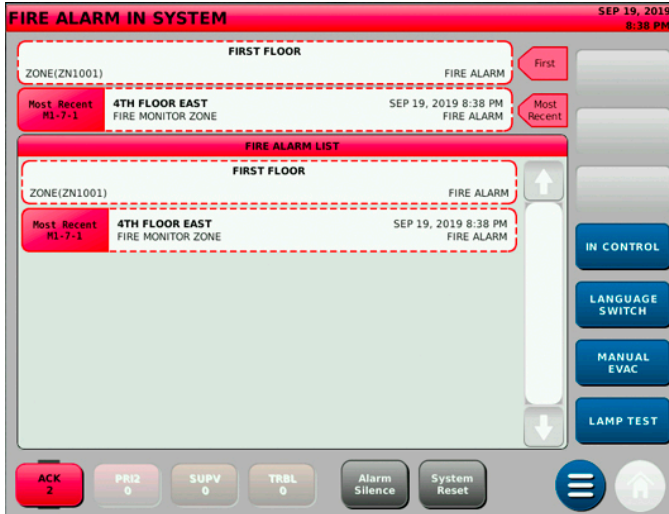


Figure 7: First and Most Recent Alarm Display



Figure 8: Main Menu



Figure 9: First Eight Active Trouble Events List



Figure 10: Direct Point Callup

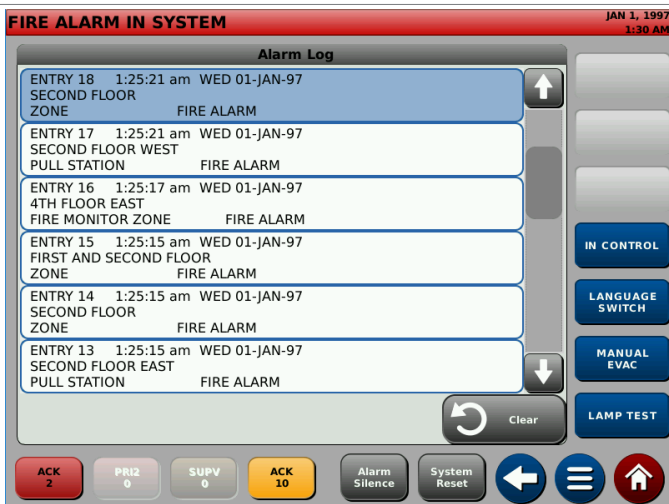


Figure 11: Alarm History Log

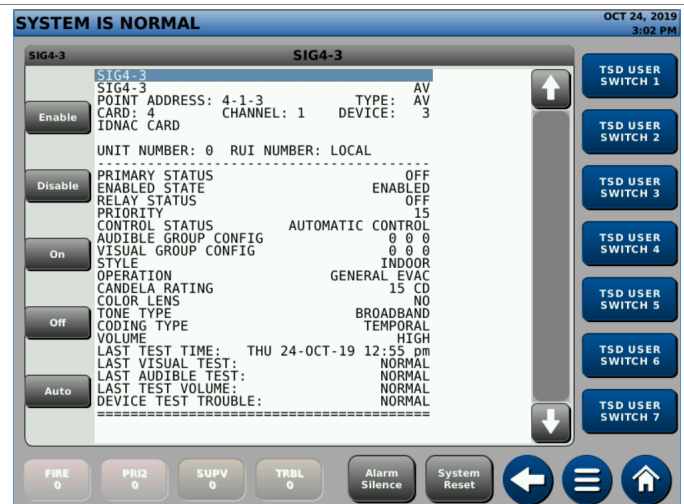


Figure 12: Detailed Point Status Screen for TrueAlert ES Appliance

Specifications

Table 5: General ES Touch Screen Display Specifications

Specification	Rating
Resolution	800 x 600 Pixels (RGB)
Size / Type	8 inch (203 mm) Diagonal / Color Touch Screen
Touch Screen Technology	Resistive
Event Display	Up to 8 Events without scrolling
Normal Screen Custom Watermark File Format	680 x 484 Pixels: BMP, JPG, TIFF, GIF or PNG file format
Environmental	Operating Temperature: 32°F to 120°F (0°C to 49°C)
	Operating Humidity: Up to 93% RH, non-condensing @ 90°F (32°C) maximum

Operator Interface with Monochrome 2 x 40 LCD

With the locking door closed, the glass window allows viewing of the display, status LEDs, and available operator switches. Features include a two-line by 40-character, wide viewing angle (super-twist) LCD with status LEDs and switches as shown in Figure 13.

LED indicators describe the general category of activity being displayed with the LCD providing more detail. For the authorized user, unlocking the door provides access to the control switches and allows further inquiry by scrolling the display for additional detail.

- Convenient and extensive operator information is provided using a logical, menu-driven display
- Multiple automatic and manual diagnostics for maintenance reduction
- Alarm and Trouble History Logs (up to 1000 entries for each, 2000 total events) are available for viewing from the LCD, or capable of being printed to a connected printer, or downloaded to a service computer
- Convenient PC programmer label editing
- Password access control


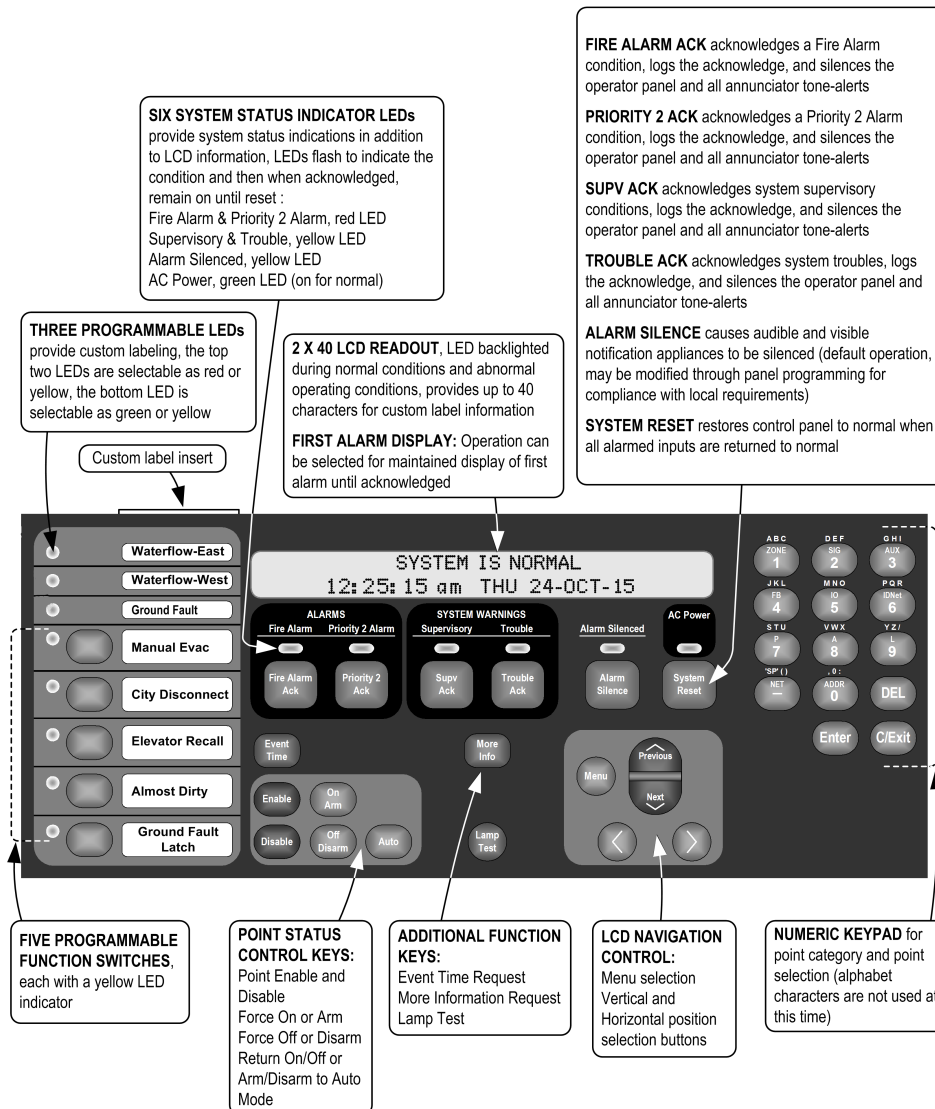


Figure 13: Operator Interface

Expansion Bay Module Loading Reference

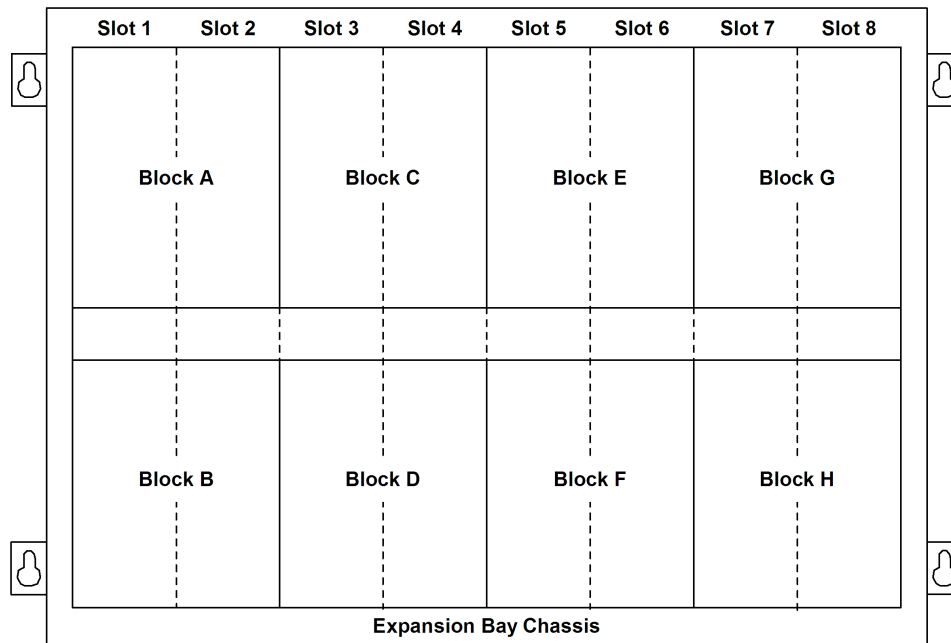

Size Definitions: Block = 4 in. W x 5 in. H (102 mm x 127 mm) card area
 Slot = 2 in. W x 8 in. H (51 mm x 203 mm) motherboard with daughter card

Table 6: Expansion bay loading reference

Description		Mounting
IDNet 2, IDNet 2+2 Modules		1 Block
Four 2 A Relays	NON Power-limited	1 Block
Four 10 A Relays		4 in., 2 Slots
Eight 3 A Relays		1 Block
VESDA Interface		2 in., 1 Slot
Class B IDC		2 in., 1 Slot
Class A IDC		2 in., 1 Slot
NAC Card		1 Block
IDNAC Card		2 Blocks (on ES Power Supply only)
ES-PS		Blocks G & H ONLY
ES-PS Configured as backup		Blocks E & F ONLY
ES-XPS		2 Blocks

Mounting and Master Controller Bay Module Reference

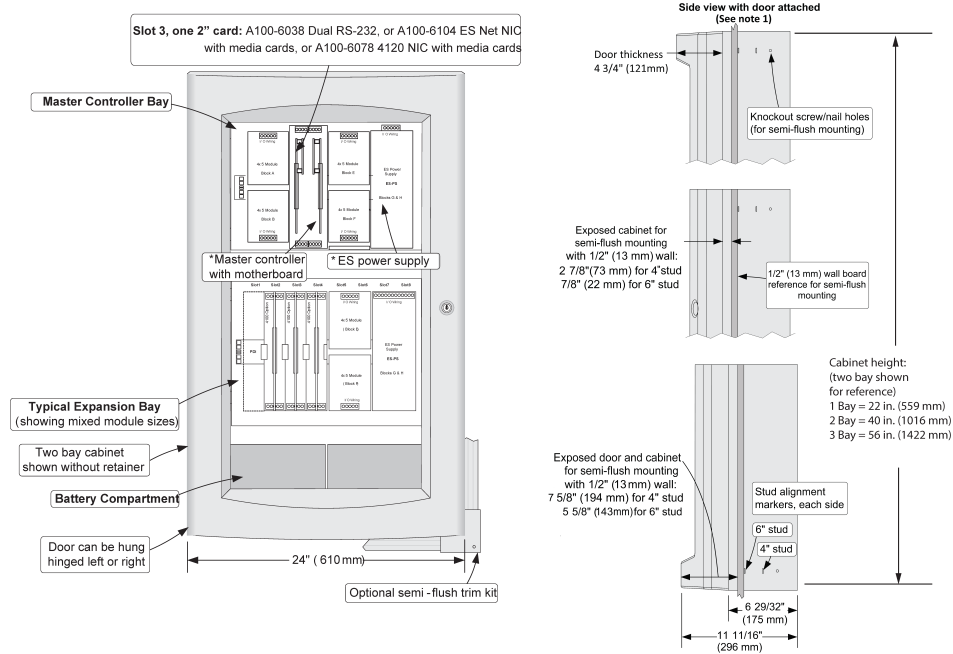


Figure 14: Mounting and CPU Bay Module Reference

Note:

1. Side View dimensions are shown with minimal cabinet and door protrusion from the exterior wall. For 6 in. stud construction with minimum protrusion shown, the door will open 90 degrees. To allow the door to open 180 degrees, the exposed cabinet dimension from the exterior wall must be a minimum of 3 in. (76 mm) for both 4 in. and 6 in. stud construction.
2. Asterisks (*) in Figure 14 indicate supplied modules.
3. A system ground must be provided for earth detection and transient protection devices. This connection shall be made to an approved, dedicated earth connection per NFPA 70, article 250, and NFPA 780.

General Specifications

Table 7: ES Power Supply Specifications (ES-PS and ES-XPS)

Specifications	Rating
AC Input Power	120 to 240 VAC
120 VAC	3.72 A
220 to 240 VAC	1.82 A
Total DC Output Power Capacity	
Without Fan	9.5 A
With A100-5131 Fan and A100-5451 IDNAC Module(s)	9.7 A
With A100-5131 Fan (without A100-5451 IDNAC Module)	12.7 A
With Regulated 24V Appliance Loads (with or without A100-5131 Fan)	5.0 A
Special Application Appliance Loads: supports full total DC output power capacity ratings above	Autocall horns, strobes, and combination horn/strobes and speaker/strobes (contact your Autocall product representative for compatible appliances)
Regulated 24V Appliances: reduces total DC output power capacity to 5.0 A	Power for other UL listed appliances; use associated external synchronization modules where required
Auxiliary Power Tap	2 A maximum (taken from total output power capacity)
NACs Programmed for Auxiliary Power	3 A maximum per NAC, 5 A maximum total (taken from total output power capacity)
Battery Charger (ES-PS only)	Sealed Lead-Acid Batteries
Battery Ah Capacity	UL/ULC listed for battery charging of up to 110 Ah (batteries larger than 50 Ah require a remote battery cabinet)
Charger characteristics and performance	Temperature compensated, dual rate, recharges depleted batteries within 48 hours
Environmental	
Operating Temperature	32°F to 120°F (0°C to 49°C)
Operating Humidity	Up to 93% RH, non-condensing @ 90°F (32°C) maximum
Option Card Mounting	2 vertical blocks are available fore compatible modules; refer to 579-1288AC installation instructions for additional details

Note:

- Battery charger is only available on the ES-PS power supply.
- When an ES-PS is used to power Flex-35 or Flex-50 Amplifiers the ES-PS battery charger is not available.

Master Controller Selection Information

Note for Table 8

- Supervisory and alarm currents are without IDNet devices. Add IDNet device currents separately.

Table 8: 4100ES Master Controller Selection

Model	Description	Includes	Listings	Supv.	Alarm
A100-9701	ES-PS Master Controller with 2x40 Display - English	Master Controller – English, 2x40 Display, CPU Card, IDNet 2 Card supports up to 250 addressable/analog points, ES Power Supply (120 V to 240 V 50/60 Hz, 24 V Aux. Relay, 24 V Aux. Power Tap/Simple NAC, 110 Ah Battery Charger) and external RUI+ (isolated or un-isolated) communications interface.	UL/ULC, FM	277 mA (See note)	321 mA (See note)
A100-9702	ES-PS Master Controller with 2x40 Display - Canadian French	Same as A100-9701 above except with Canadian French user interface.	ULC, FM		
A100-9706	ES-PS Master Controller with ES Touch Screen Display	Same as A100-9701 above except with Color ES Touch Screen Display user interface. For dual language support, desired language is switch selectable.	UL/ULC	362 mA (See note)	441 mA (See note)
A100-9709	ES-PS Master Controller without Display - English	Same as A100-9701 above except with no 2x40 Display or user interface.	UL/ULC, FM	277 mA (See note)	321 mA (See note)

Note:

- The Master Controller current draw specifications do not include IDNet, NAC, or IDNAC current draws. These must be added separately as required.
- International orders may substitute MX Loop Module (A100-3118) in place of IDNet 2 Module (A100-3117). Refer to data sheet AC4100-0059 for more details. The A100-3118 provides the same module and specifications as the A100-6077 but is dedicated as a Master Controller feature selection.
- At the time of publication English and Canadian French languages are available for ES Touch Screen Display models. Contact your local Autocall product supplier for the latest status and availability for other languages.

Table 9: Master Controller Accessories

SKU	Description
A100-2300	Expansion Bay Assembly; order for each required expansion bay (not required for A100-9121)
A100-2303	Legacy Module Stabilizer Bracket, used when expansion bays have legacy slot style modules

Table 10: ES Touch Screen Display User Interface Upgrade Kit

SKU	Panel type	Description
A100-7165	4100ES or 4010ES	New ES Touch Screen Display User Interface for upgrading an existing 4100ES 2x40 LCD or InfoAlarm User Interface, or for upgrading an existing 4010ES InfoAlarm User Interface to a new ES Touch Screen Display User Interface

Additional 4100ES and Network Product Reference

Table 11: Additional 4100ES and Network Product Reference

Subject	Data Sheet
Serial DACT (SDACT) for 4100ES, 4010ES, 4007ES	AC2080-0009
IP Communicator Modules and Accessories	AC2080-0090
Battery and Battery Cabinet Reference for 4100ES	AC2081-0006
110 Ah Batteries and Cabinets for 4100ES	AC2081-0012
4009 IDNet NAC Extender	AC4009-0002
4009 IDNAC Repeater	AC4009-0004
External 110 Ah Battery Charger for 4100ES, 4010ES	AC4081-0002
Graphic I/O Modules for 4100ES, 4010ES, 4007ES	AC4100-0005
Interface to VESDA Air Aspiration Detection Systems	AC4100-0026
4100ES LED/Switch Modules & Printer	AC4100-0032
Master Clock Interface	AC4100-0033
4100ES Enclosures	AC4100-0037
4100ES Extinguishing Release Applications	AC4100-0040
BACpac Ethernet Module	AC4100-0051
Building Network Interface Card (BNIC)	AC4100-0061
Emergency Voice/Alarm Communications Equipment with ES-PS Power Supplies	AC4100-1034
MINIPLX Transponders with ES-PS Power Supplies	AC4100-1035
4100ES Remote Annunciator Panels with ES-PS Power Supplies	AC4100-1039
Remote ES Touch Screen Displays for 4100ES and 4010ES Panels	AC4100-1070
ES Net Network Products and Specifications	AC4100-1076
NDU with ES-PS Power Supplies for ES Net	AC4100-1077
TrueSite Workstation	AC4190-0016
TrueSite Incident Commander	AC4190-0020
Network System Integrator (NSI) for ES Net Networks	AC4190-0026
24-Pin Dot Matrix Fire Alarm System Remote Printer	AC4190-0027
SCU/RCU Annunciators for 4007ES, 4010ES, 4100ES	AC4602-0001
LCD Annunciator for 4100ES	AC4603-0001