

## DEM-310GT-AOK

1.25Gbps SFP Transceiver

### Features

- Operating data rate up to 1.25Gbps
- 1310nm FP LD Laser Transmitter
- 10Km with 9 /125  $\mu$ m SMF
- Single 3.3V Power supply and TTL Logic interface
- Duplex LC Connector Interface
- Hot Pluggable
- Compliant with specifications for IEEE802.3Z
- Operating Temperature: 0°C ~+ 70°C
- Compliant with MSA SFP Specification



### Product Description

Add-on Computers DEM-310GT-AOK is a single-mode transceiver small form factor pluggable module for bi-directional serial optical data communications such as Gigabit Ethernet 1000BASE-LX and Fiber Channel 1x SM-LX-L FC-PI. This module is designed for single-mode fiber and operates at a nominal wavelength of 1310nm.

The transmitter section uses a multiple quantum well laser and is a class 1 laser compliant, according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

The DEM-310GT-AOK is designed to be compliant with SFF-8272 SFP Multi-source Agreement (MSA).

## Regulatory Compliance

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>500 V) Isolation with the case
Electromagnetic Interference (EMI)	FCC Part 15 Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class I laser product. Compatible with T <sub>μ</sub> V standards
Component Recognition	UL and CUL	UL file E317337
Green Products	RoHS	RoHS6

## Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	TST	-40	+85	°C
Supply Voltage	VCC	-0.5	3.6	V

## Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	TOP	0		+70	°C
Power Supply Voltage	VCC	3.15	3.3	3.45	V
Power Supply Current	ICC			300	mA
Surge Current	ISurge			+30	mA
Baud Rate			1.25		GBaud


## Performance Specifications - Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
<b>Transmitter</b>						
LVPECL Inputs(Differential)	Vin	400		2500	mVp	AC coupled inputs
Input Impedance (Differential)	Zin	85	100	115	ohms	Rin > 100 kohms @ DC
Tx_DISABLE Input Voltage - High		2		3.45	V	
Tx_DISABLE Input Voltage -Low		0		0.8	V	
Tx_FAULT Output Voltage -- High		2		Vcc+0.3	V	Io = 400µA; Host Vcc
Tx_FAULT Output Voltage --Low		0		0.5	V	Io = -4.0mA
<b>Receiver</b>						
LVPECL Outputs (Differential)	Vout	400	800	1200	mVpp	AC coupled outputs
Output Impedance (Differential)	Zout	85	100	115	ohms	
Rx_LOS Output Voltage - High		2		Vcc+0.3	V	Io = 400µA; Host Vcc
Rx_LOS Output Voltage -Low		0		0.8	V	Io = -4.0mA
MOD_DEF ( 0:2 )	VoH	2.5			V	With Serial ID
	VoL	0		0.5	V	

## Optical and Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
9µm Core Diameter SMF	L		10		Km
Data Rate			1.25		Gbps
<b>Transmitter</b>					
Centre Wavelength	$\lambda_C$	1260	1310	1360	nm
Spectral Width (RMS)	$\sigma$			3	nm
Average Output Power	P <sub>Out</sub>	-10		-3	dBm
Extinction Ratio	EX	9			dB
Rise/Fall Time(20%~~80%)	tr/tf			1.2	ns
Output Optical Eye	IUT-T G.957 Compliant				
Data Input Swing Differential	V <sub>IN</sub>	500		2000	mV
Input Differential Impedance	Z <sub>IN</sub>	90	100	110	$\Omega$
TX Disable	Disable		2.0	VCC+0.3	V
	Enable		0	0.8	
TX_Fault	Fault		2.0	VCC+0.3	V
	Normal		0	0.8	
TX_Disable Assert Time	t <sub>off</sub>			10	us
<b>Receiver</b>					
Centre Wavelength	$\lambda_C$	1100		1600	nm
Receiver Sensitivity	P <sub>IN</sub>			-20	dBm
Output Differential Impedance	P <sub>IN</sub>	90	100	110	$\Omega$
Data Output Swing Differential	V <sub>OUT</sub>	370		2000	mV
Rise/Fall Time	Tr/tf			2.2	ns
LOS De-Assert	LOSD			-24	dBm
LOS Assert	LOSA	-40			dBm
LOS	High		2.0	VCC+0.3	V
	Low		0	0.8	

## Mechanical Specifications

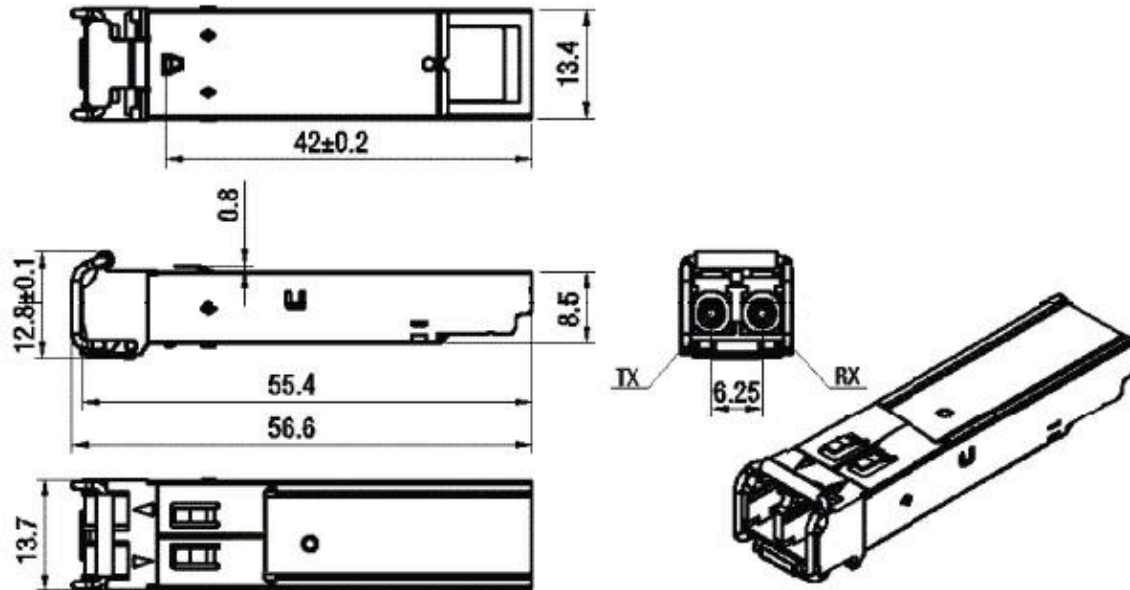

DEM-310GT-AOK  
D-LINK, 1000Base-LX SFP SMF  
1310NM 10KM REACH LC



NETWORK TRANSCEIVERS - MEMORY UPGRADES

## Contact Information

Add-On Computer, Inc. is a leading supplier of Memory Upgrade, Network Transceivers and Network connectivity products to Channel Partners, Resellers and OEMs, with more than seventeen years of direct industry experience. Add-On Computer (ACP) has been the exclusive supplier to Ingram Micro's "Memory Upgrades" program for the past nine years.

Add-On Computer maximizes profitable opportunities for our partners. Our ability to source product worldwide, ensures that our pricing will always be competitive. Offering turnkey solutions, Add-On Computer has forged a reputation as a solutions provider, delivering high quality, cost effective product in a timely and reliable manner.

Corporate offices:

**Add-On Computer**

34A Mauchly

Irvine, CA 92618

Tel: 877-292-1701

Fax: 949-861-2812

Email: [sales@addoncomputer.com](mailto:sales@addoncomputer.com)

Email: [support@addoncomputer.com](mailto:support@addoncomputer.com)

Web: <http://www.addoncomputer.com>