

# MW883UST Digital Projector




## Features

- Inner reflection design of ultra short throw projector
- 0.24 Throw ratio
- Corner fit, Surface fit, 2D keystone image correction.
- Dual HDMI port. Support MHL.
- LAN control, LAN display
- FW upgradable via LAN, HDMI power on
- Wall mount included

## Box Contents

- Remote Control w/ Battery ..... RCS011
- Power Cord (by region) ..... 2.9M
- User Manual CD ..... \*1
- Quick Start Guide ..... \*1
- Warranty Card (by region) ..... \*1
- VGA(D-sub 15pin) Cable ..... \*1
- Wall mount kit (installation guide) ..... \*1

## Dimension

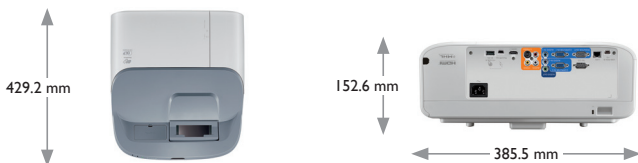


## Optional Accessories

- Spare Lamp Kit ..... 5J.JDM05.001
- Wall Mount ..... WM04G4
- 3D Glasses ..... DGD24



Because it matters

## Input and Output Terminals

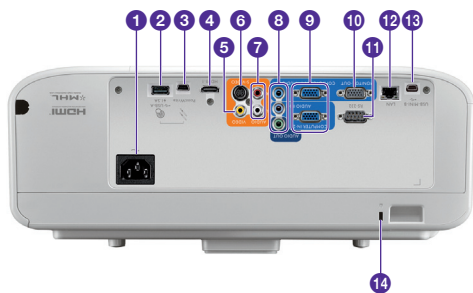

- 1 AC power jack
- 2 USB Type A port (Power for Touch kit)
- 3 PointWrite port (PointWrite kit is required)
- 4 HDMI-input port
- 5 Video input jack
- 6 S-Video input jack
- 7 Audio (L/R) input jacks
- 8 Audio output jacks
- 9 RGB (PC)/Component Video (YPbPr/YCbCr) signal input jacks
- 10 RGB signal output jack
- 11 RS232 control port
- 12 RJ45 LAN input jack
- 13 USB Mini-B port
- 14 Kensington anti-theft lock slot

## Product Specifications

<b>Projection System</b>	DLP	
<b>Native Resolution</b>	WXGA(1280*800)	
<b>Brightness</b>	3300AL	
<b>Contrast Ratio</b>	10,000:1	
<b>Display Color</b>	1.07 Billion Colors	
<b>Lens</b>	F2.5,f=5.1mm	
<b>Aspect Ratio</b>	Native 16:10 (5 aspect ratio selectable)	
<b>Throw Ratio</b>	0.24	
<b>Image Size (Diagonal)</b>	86"-140"/300"	
<b>Zoom Ratio</b>	Fix	
<b>Lamp Type</b>	240W	
<b>Lamp Mode (Normal/Eco/SmartEco/LampSave)*</b>	2500/4000/6000 hours	
<b>Keystone Adjustment</b>	2D,Vertical +/- 30 degrees, Horizontal +/-25 degree	
<b>Projection Offset</b>	130%(±5%)	
<b>Resolution Support</b>	VGA(640 x 480) to UXGA(1600 x 1200)	
<b>Horizontal Frequency</b>	15~102KHz	
<b>Vertical Scan Rate</b>	23~120Hz	
<b>Compatibility</b>	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
<b>Interface</b>	Computer in (D-sub 15pin)	x 2(Shared with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI/MHL	x 2(HDMI 2 with MHL)
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Audio L/R	x 1
	Speaker	10W x 2
	USB (Type mini B)	x 2(FW download/PointWrite)
	USB(Type A)	x 2 (USB display/USB reader/5V/2A power supply)
	RJ45	x 1 (LAN Control & LAN Display)
	RS232 (DB-9pin)	x 1
	IR Receiver	x1 (Front)
<b>Dimensions</b>	Dimensions(W x H x D)	38.9*133.4*43.1mm(w Mirror)
	Weight	8.0KG(w/o wall mount)
<b>Power</b>	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	typical 410W, Network standby <6W, Standby <0.5W
<b>Audible Noise</b>	37/33 dBA (Normal/Economic mode)	
<b>On-Screen Display Languages</b>	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
<b>Picture Modes</b>	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2	

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

## Logistics information

Product Code	9HJDN77.14E
EAN Code	471 8755 05773 1
Dimensions Single Carton (cm)	590*500*533
Carton Weight (kg)	6,2
Pallet Size Block (cm)	1200*1000*1719



BenQ Europe B.V.  
Meerenakkerweg 1-17  
5652 AR Eindhoven  
The Netherlands  
Tel: +31 88 8889200  
Fax: +31 88 8889299

© 2015 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301



Because it matters