

S-Video Video Extender over Cat 5 with Audio

SVIDUTPEXTA

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

*actual product may vary from photos




Packaging Contents

- 2 x S-Video Extenders (local and remote ends)
- 1 x 20cm S-Video cable
- 1 x Installation/Mounting Kit
- 1 x User Manual

System Requirements

- An S-Video video Source
- An RCA component audio source
- Input and Output S-Video cables
- Input and Output RCA component audio cables
- A display with an available S-Video input

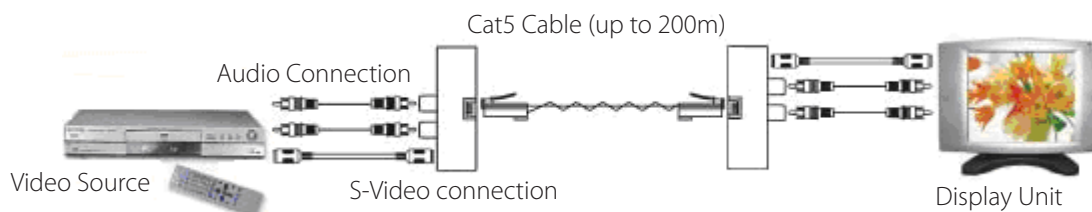

Basic Setup


1. Connect the S-Video cable to the output on the back of the audio/video source.
2. Connect the opposite end of the S-Video cable used in Step 1 to the SVIDUTPEXT local unit (marked VIDEO).
3. Connect an audio RCA component cable to the output ports located on the audio/video source.
4. Connect the opposite end of the component audio cable to the audio ports on the local SVIDUTPEXT unit (marked as L - Audio - R).
5. Connect the Cat5 cable to the RJ45 port on the local SVIDUTPEXT unit.
6. Connect the opposite end of the Cat5 cable to the RJ45 port on the remote SVIDUTPEXT unit.
7. Connect a second S-Video cable to the designated port on the remote SVIDUTPEXT unit (marked VIDEO).
8. Connect the remaining end of the second S-Video cable to the monitor/display. For further instructions on how to locate the S-Video port, please refer to the documentation that accompanied the display at the time of purchase.
9. Connect an audio RCA component cable to the audio ports located on the remote SVIDUTPEXT unit.
10. Connect the opposite end of the component audio cable to the audio output ports located on the audio output device (i.e. Stereo receiver, television etc.).

Specifications

Local Unit Connectors	1x S-Video (4 pin; Mini-DIN) Female 1x Stereo Audio (2 x RCA) Female 1x RJ-45 Female
Remote Unit Connectors	1x S-Video (4 pin; Mini-DIN) Female 1x Stereo Audio (2 x RCA) Female 1x RJ-45 Female
Audio Support	Yes
Dimensions (LxWxH)	110 x 77 x 24mm
Weight	460g
Maximum Resolution	480i / 480p
Maximum Distance	660 ft / 200 m

Pin Definition:

Pin	Color	Function
1	W / O	S-Video
2	O	S-Video
3	W / G	S-Video
4	B	Audio R
5	W / B	Audio R
6	G	S-Video
7	W / BR	Audio L
8	BR	Audio L



FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.