


### Overview

#### HP ProLiant XL230a Gen9 Server

The HP ProLiant XL230a Server delivers 2P performance, while taking advantage of the Apollo 6000 System's modular flexibility and rack-scale efficiency. This server leverages Intel's latest Xeon E5-2600 v3 series processors increasing performance up to 70%, and DDR 4 HP SmartMemory, which boosts bandwidth and efficiency up to 50% over previous generation servers.

The modular HP Apollo a6000 Chassis accommodates up to 10 hot-swap server trays, with the flexibility to choose from the HP ProLiant XL230a or the HP ProLiant XL220a server trays to meet workload needs while lowering TCO.

Rack scale power efficiency is fueled by an external power shelf, with easy Advanced Power Management for rack, chassis, server and component level management

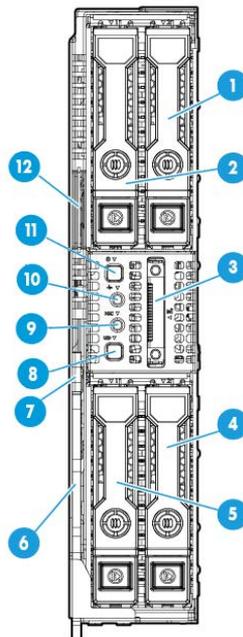


#### Item Description

##### Front View Item Description


1. Drive box 1, drive bay 2
2. Drive box 1, drive bay 1
3. SUV connector
4. Drive box 2, drive bay 2
5. Drive box 2, drive bay 1
6. Server tray release lever
7. Server tray release latch
8. Power Button /Power LED
9. Health LED
10. NIC status LED
11. UID button
12. Serial label pull tab

### Standard Features

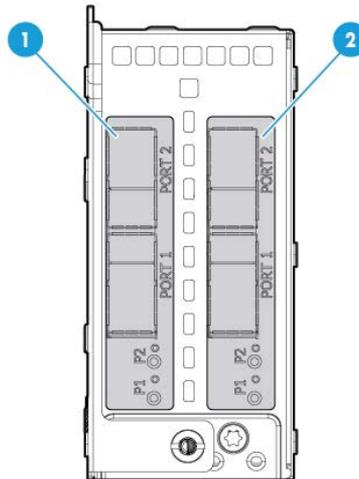

#### IO Module View Item Description

1. x16 FlexibleLOM
2. x8 FlexibleLOM

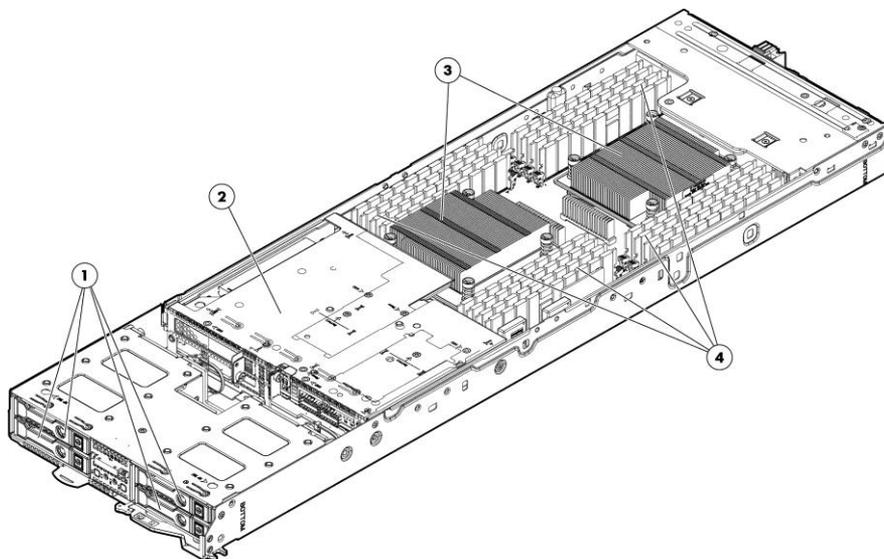

#### Top View Item Description

1. SFF hard drive bays
2. Internal PCI Express x16 slot option
3. Support for 2 Intel Xeon E5-2600 v3 series processors
4. Support for 16 DDR4 DIMMs

**NOTE:** For the Standard Features shipped in the Factory Integrated Models, please see the "Configuration Information - Factory Integrated Models" section.

### Standard Features

#### Processor

One of the following depending on Model

#### E5-2600 v3 series Processors

Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
E5-2698v3	2.3GHz	16	40MB	135W	9.6GT/s	2133
E5-2695v3	2.3GHz	14	35MB	120W	9.6GT/s	2133
E5-2690v3	2.6GHz	12	30MB	135W	9.6GT/s	2133
E5-2683v3	2.0GHz	14	35MB	120W	9.6GT/s	2133
E5-2680v3	2.5GHz	12	30MB	120W	9.6GT/s	2133
E5-2670v3	2.3GHz	12	30MB	120W	9.6GT/s	2133
E5-2660v3	2.6GHz	10	25MB	105W	9.6GT/s	2133
E5-2650v3	2.3GHz	10	25MB	105W	9.6GT/s	2133
E5-2650Lv3	1.8GHz	12	25MB	65W	9.6GT/s	2133
E5-2640v3	2.6GHz	8	20MB	90W	8.0GT/s	1866
E5-2630v3	2.4GHz	8	20MB	85W	8.0GT/s	1866
E5-2630Lv3	1.8GHz	8	25MB	55W	8.0GT/s	1866
E5-2620v3	2.4GHz	6	15MB	85W	8.0GT/s	1866
E5-2609v3	1.9GHz	6	15MB	85W	8.0GT/s	1600
E5-2603v3	1.6GHz	6	15MB	85W	6.4GT/s	1600

#### Chipset

Intel® C610 Series Chipset

**NOTE:** For more information regarding Intel® chipsets, please see the following URL:  
<http://www.intel.com/products/server/chipsets/>.

#### On System Management Processor

HP iLO (Firmware: HP iLO 4)

**NOTE:** For more information, visit: <http://www.hp.com/go/ilo>.

#### Memory Protection

Advanced ECC (multi-bit error protection)  
 Memory Online Spare Mode (Rank Spare Mode)

#### Memory

Type HP SmartMemory  
 DDR4 Load Reduced (LRDIMM), or Registered (RDIMM)

DIMM Slots Available 16 DIMM Slots available

Maximum (LRDIMM) (per server tray) 512GB (16 x 32GB)

**NOTE:** HP memory from previous generation servers are not fully compatible with the HP ProLiant XL230a Gen9 Server.

**NOTE:** HP memory from previous generation servers are not fully compatible with the HP ProLiant XL230a Gen9 Server.

**NOTE:** To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at:  
[http://h18000.www1.hp.com/products/quickspecs/14225\\_div/14225\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14225_div/14225_div.html).

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://h22195.www2.hp.com/MemoryTool/Home/Legal>

#### Network Controller

##### Ethernet Options

HP FlexFabric 10Gb 2P 534FLR-SFP+ Adptr  
 HP FlexFabric 10Gb 2P 533FLR-T Adptr  
 HP Apollo 6000 Dual 1GbE 364i FIO Kit

### Standard Features

HP FlexFabric 10Gb 2P 556FLR-SFP+ Adptr  
 HP Ethernet 1Gb 4-port 366FLR Adapter  
 HP Ethernet 10Gb 2P 561FLR-T Adptr

#### InfiniBand Options

HP IB FDR/EN 40Gb 2P 544+FLR-QSFP Adptr  
 HP IB QDR/EN 10Gb 2P 544+FLR-QSFP Adptr  
 HP IB FDR 2P 545FLR-QSFP Adptr

#### Riser Options to support FlexibleLOM cards

HP Apollo 6000 Dual FlexibleLOM Riser

**NOTE:** The HP Apollo Dual FlexibleLOM Riser Kit (757401-B21) is required to order the FlexibleLOM options.

Expansion Slots	Expansion Slot #	Technology	Bus Width*	Connector Width	Form Factor
	1	PCIe 3.0	x16	x16	Low profile
	FlexibleLOM 1	PCIe 3.0	x16	N/A	FlexibleLOM
	FlexibleLOM 2	PCIe 3.0	x8	N/A	FlexibleLOM

\*Indicates the number of physical electrical lanes running to the connector.

**NOTE:** Expansion slot 1 requires ordering Apollo 6000 PCIe x16 Riser Kit 788126-B21

**NOTE:** FlexibleLOM slots 1 and 2 require ordering HP Apollo 6000 Dual FlexibleLOM Riser 757401-B21

### HP Server ROM

HP ROM (Read Only Memory) is now digitally signed using the HP Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HP ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HP ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

The HP ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (Integrated PCI devices and optional PCIe cards).
- Customer-specific BIOS configuration (using the HP ROM-Based Setup Utility (RBSU)).

**NOTE:** For further information, please refer to the HP RBSU (ROM based setup utility) user guide: [www.hp.com/support/rbsu](http://www.hp.com/support/rbsu).

### HP Server Unified Extensible Firmware Interface (UEFI) or Legacy Mode

HP's ProLiant System BIOS is an EDK2 UEFI solution, and adheres to the latest revisions of UEFI Class 2 specifications which supports both legacy boot and UEFI boot operation. The HP ProLiant XL230a Gen9 defaults to UEFI boot operation and can be factory or field configured for Legacy boot operation.

**NOTE:** For UEFI boot operation, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** For more information on HP's ProLiant System BIOS and UEFI, see the UEFI Information Library: <http://www.hp.com/go/uefi/docs>.

### Standard Features

**NOTE:** HP Legacy FIO Mode Setting (758959-B22) can be selected to configure the system in UEFI mode in the factory.

To modify the server configuration ROM default settings, press F9 in the HP ProLiant POST screen to enter the UEFI System Utilities screen. By default, the System Utilities menus are in the English language.

UEFI enables numerous new capabilities, including both industry standard functionality and features specific to HP ProLiant servers. Following are some of the features that UEFI enables and that the HP ProLiant XL230a Gen9 can support when configured for UEFI boot operation:

- Secure Boot - A new feature in which the system firmware, option card firmware, operating systems, and software collaborate to greatly enhance platform security.
- Operating system specific functionality - Microsoft Windows 2012 supports several features only when installed in UEFI mode.
- Support for > 2.2 TB (using GPT) boot drives - Such drives could previously only be used for boot drives when using RAID solutions such as HP Smart Array.
- UEFI Shell - Provides a pre-boot environment for running scripts and tools. The HP ProLiant UEFI Shell provides both standard capabilities as well as numerous enhancements.
- PXE boot support for IPv6 networks.
- PXE Multicast Boot allowing for faster PXE deployments for large numbers of servers.
- Boot support for option cards that only support a UEFI option ROM.

**NOTE:**

- When the server is configured for UEFI Boot Mode, PXE servers must be configured with a UEFI boot image.
- When the server boots in UEFI mode, it does not boot media with a legacy OS installation. This includes DOS targets and Windows or Linux systems installed in Legacy mode. The reverse is also true for servers that boot in Legacy mode.
- If Microsoft Windows 2008 or Windows 2008 R2 is used in UEFI Boot Mode, UEFI Optimized Mode must be disabled (this option is enabled by default). This is required to work around an issue in Windows 2008 / 2008 R2 that requires legacy BIOS components necessary for video operations in Windows.

### Storage Controller

**Smart Array Controller**

HP Dynamic Smart Array B140i Controller

**Host Bus Adapter**

HP H240 Host Bus Adapter

**Storage Controller Cable Kits**

HP Apollo 6000 Mini-SAS H240 Cbl

HP XL230a B140i Cbl FIO Kit

**Note:** The H240 controller and the embedded B140i will operate in UEFI mode only. For legacy support, AHCI mode is required.

---

### Internal Storage Devices

Internal MicroSD slot

---

### Maximum Internal Storage

Hot Plug SFF SAS 10k	3.6TB	4 x 900GB
Hot Plug SFF SATA	4.0TB	4 x 1TB
Hot Plug SFF SATA SSD	3.2 TB	4 x 800GB

---

### Interfaces

FlexibleLOM

HP ProLiant Gen9 servers offer a new networking technology-Flexible

### Standard Features

Network Technology. The HP ProLiant Gen9 server offers the customer the choice of 1Gigabit, 10Gigabit, InfiniBand or FlexibleLOM solutions depending on workload. For further details on the choices, see FlexibleLOM in the Networking Section of this document.

KVM	Serial USB Video Port (SUV)
MicroSD	1 (internal)
USB Ports	2 (external via SUV)
HP iLO Remote Management Network Port	Aggregated via HP Apollo a6000 Chassis
Health LED	1
Power	1
UID	1

### Industry Standard Compliance

ACPI 2.0b Compliant  
PCIe 3.0 Compliant  
WOL Support  
Microsoft® Logo certifications  
PXE Support  
USB 1.1 and 2.0 Compliant  
SMBIOS 2.6.1

### Power Specifications

To review typical system power ratings use the HP Power Advisor which is available via the online tool located at URL: [www.hp.com/go/proliant-energy-efficient](http://www.hp.com/go/proliant-energy-efficient) or [www.hp.com/go/hppoweradvisor](http://www.hp.com/go/hppoweradvisor).

**NOTE:** Power Specification and Technical Content for supported power supplies can be found at: [http://h18000.www1.hp.com/products/quickspecs/14209\\_div/14209\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14209_div/14209_div.html)

### Operating Systems and Virtualization Software Support for ProLiant Servers

[Microsoft Windows Server](#)  
[Red Hat Enterprise Linux \(RHEL\)](#)  
[SUSE Linux Enterprise Server \(SLES\)](#)  
[Canonical Ubuntu](#)  
[Oracle Solaris](#)  
[VMware](#)  
[Citrix XenServer.](#)

**NOTE:** Only 64-bit versions of these operating systems are supported.

**NOTE:** For more information on the HP Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HP, please visit our OS Support Site at: <http://www.hp.com/go/ossupport> and our driver download page: <http://www.hp.com/support>

### Graphics

Integrated Matrox G200 video standard

- 1280 x 1024 (32 bpp)
- 1920 x 1200 (16 bpp)

HP iLO 4 On System Management Memory

- 16 MB Flash

### Standard Features

- 256 MB DDR 3 with ECC (112 MB after ECC and video)

<b>Form Factor</b>	The ProLiant XL230a Gen9 Server is a single-slot tray for the HP Apollo a6000 Chassis.	
<b>Embedded Management</b>	<b>HP Integrated Lights Out</b>	Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at <a href="http://www.hp.com/go/ilo">www.hp.com/go/ilo</a> .
	<b>UEFI</b>	Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <a href="http://www.hp.com/go/ProLiant/uefi">www.hp.com/go/ProLiant/uefi</a> .
	<b>HP RESTful API</b>	RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server. <a href="http://www.hp.com/go/restfulapi">www.hp.com/go/restfulapi</a> .
	<b>Intelligent Provisioning</b>	Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at <a href="http://www.hp.com/go/intelligentprovisioning">www.hp.com/go/intelligentprovisioning</a> .
<b>Server Utilities</b>	<b>HP Smart Update</b>	Optimize firmware and driver updates with HP Smart Update solutions. Learn more at <a href="http://www.hp.com/go/smartupdate">www.hp.com/go/smartupdate</a> .
	<b>HP Systems Insight Manager (HP SIM)</b>	HP SIM allows you to monitor the health of your HP ProLiant Servers and HP Integrity Servers, and also provides you with basic support for non-HP servers. HP SIM also integrates with HP SUM to provide quick and seamless firmware updates. Learn more at <a href="http://www.hp.com/go/sim">www.hp.com/go/sim</a>
	<b>Scripting Tool Kit and Windows PowerShell</b>	Provision 1 to many servers using your own scripts to discover and deploy them with HP Scripting Tool Kit for Windows and Linux or HP Scripting Tools for Windows PowerShell. Learn more at <a href="http://www.hp.com/go/ProLiantSTK">www.hp.com/go/ProLiantSTK</a> or <a href="http://www.hp.com/go/powershell">www.hp.com/go/powershell</a> .
	<b>HP RESTful Interface Tool</b>	HP RESTful API tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at <a href="http://www.hp.com/go/restfulapi">www.hp.com/go/restfulapi</a>
	<b>HP iLO Mobile Application</b>	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <a href="http://www.hp.com/go/ilo/mobileapp">www.hp.com/go/ilo/mobileapp</a>
	<b>HP Insight Online</b>	HP Insight Online, available at no additional cost as part of your HP warranty, Care Pack or contractual support agreement with HP, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <a href="http://www.hp.com/go/insightonline/info">www.hp.com/go/insightonline/info</a> .
	<b>Embedded Management</b>	<b>HP Integrated Lights Out</b>
<b>HP Insight management software</b>	HP Service Pack for ProLiant (SPP)	HP Service Pack for ProLiant (SPP) and HP Smart Update Manager (HP SUM) provide a comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new HP server hardware launches. By enabling firmware to be updated online and integrating firmware and system software updates in one operation, HP SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire HP Apollo a6000 Chassis. Further improving system uptime and stability is the fact that HP provides 12 months of support for each Service Pack for ProLiant release (may vary by region).

The user experience around HP SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides

### Standard Features

access to a single download containing both the latest version of HP SUM and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HP SUM application provides a straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and update, providing comprehensive information on available updates, criticality and interdependencies. This information is also available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hp.com, HP SUM provides the tools to optimize stability and consistency throughout the company. While HP SUM and the SPP recommend the combinations of firmware and system software that HP has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.

The Service Pack for ProLiant has been rigorously tested with specific attention for interaction between firmware, drivers and agents both within the server as well as in interaction with the HP Apollo a6000 chassis. This testing ensures the highest quality as well as providing the input for HP SUM to deploy updates taking into account all interdependencies, when determining the correct updates and order of update deployment.

**NOTE:** The Service Pack for ProLiant (which includes HP SUM) can be downloaded from [www.hp.com/go/spp/download](http://www.hp.com/go/spp/download). More information can be found: <http://www.hp.com/go/SmartUpdate>, [www.hp.com/go/spp](http://www.hp.com/go/spp) and <http://www.hp.com/go/hpsum>

---

#### Security

- Power-on password
- Keyboard password
- QuickLock, Network Server Mode
- Serial interface control
- Administrator's password
- iLO 4 (Integrated Lights-Out 4) has 12 customizable user accounts and SSL encryption
- iLO 4 can be disabled via a Global Setting
- iLO Advanced supports directory services integration
- TPM (Trusted Platform Module) 1.2 option

---

#### Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners (may vary by region). Hardware diagnostic support and repair is available for one year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty.

**NOTE:** Server Warranty includes 1 year Parts, 1 year Labor, 1-year on-site support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

### Optional Features

<b>HP Insight management software</b>	HP Insight Control	<p>HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see: <a href="http://www.hp.com/go/insightcontrol">http://www.hp.com/go/insightcontrol</a>.</p> <p>HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, see: <a href="http://www.hp.com/services/insight">http://www.hp.com/services/insight</a>.</p>
	HP iLO Advanced	<p>HP Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HP ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi-user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: <a href="http://www.hp.com/go/ioloadvance">http://www.hp.com/go/ioloadvance</a>.</p>
	HP iLO Scale-Out	<p>The HP iLO Scale-Out license ideal for web/hosting/cloud service providers and High Performance Computing environments. This license is a specific subset of iLO Advanced functionality, provides fast remote access through Text Console via SSH, lower operational cost with Dynamic power capping, and faster time to resolution through Email-based Alerting and proactive notifications. With this newly designed HP iLO Scale-Out license HPC customers now have a server management package solely design and priced for their massive data environments. HP iLO Scale-Out is available on all HP ProLiant Gen9 servers. For more information, see: <a href="http://www.hp.com/go/iLO/scale-out">http://www.hp.com/go/iLO/scale-out</a>.</p>
	HP Matrix Operating Environment	<p>The HP Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business.</p> <p>The HP Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HP CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (IaaS).</p> <p><b>NOTE:</b> For more information, visit: <a href="http://www.hp.com/go/matrixoe">http://www.hp.com/go/matrixoe</a>.</p>
<b>High Performance Clusters</b>	HP Cluster Platforms	<p>HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. <a href="http://www.hp.com/go/clusters">http://www.hp.com/go/clusters</a></p>
	HP HPC Interconnects	<p>High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. <a href="http://www.hp.com/techservers/clusters/ucp/index.html">http://www.hp.com/techservers/clusters/ucp/index.html</a></p>

### Optional Features

#### HP Insight Cluster Management Utility

HP Insight Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used for lifecycle management of hyperscale clusters of Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. <http://www.hp.com/go/cmu>

---

#### HP Insight Online

HP Insight Online is a new addition to the HP Support Center for one stop, secure access to product and HP support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HP Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at any time. [www.hp.com/go/insightonline](http://www.hp.com/go/insightonline)

---

#### HP Advanced Power Manager

The HP Advanced Power Manager (HP APM) is an optional rack level solution. HP APM will automatically discover hardware components and enable bay level power on and off, server metering, aggregate dynamic power capping, configurable power-up dependencies and sequencing, consolidated Ethernet access to all resident iLOs, and asset management capabilities.

HP APM features rack level event logging, RADIUS authentication, integrated serial concentrator, up to 11 local user accounts, read only service port, and supports SNMP, SSH, Syslogd, telnet.

### Service and Support

#### Service and Support

##### **HP Technology Services for HP Apollo 6000**

HP Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HP to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

**Support for the HP Apollo 6000, APM and chassis are all covered by support purchased at the chassis level.** This simplifies your support experience and can reduce total cost of ownership over support purchased per server.

##### **What HP Technology Services can do for you**

We can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. Our services solutions include more than just uplift of base warranty; we help deliver high levels of application availability through proactive service management and advanced technical response.

Protect your business beyond warranty with HP Care Pack Services that provide total support expertise to meet your IT and business needs. We have made it simple to select among 3 levels of recommended services; optimized, standard, or basic.

#### Standard Recommendation

**Standard Recommendation** : Service recommendation that maintains high level of server availability

##### **Installation Services**

##### **HP Foundation Care 24x7, three-year Care Pack Service**

HP Foundation Care 24x7 connects you to HP 24 hours a day, seven days a week for assistance on resolving issues. Hardware onsite response within four hours if needed; collaborative software included in this Care Pack service provides troubleshooting assistance on industry leading software running on your HP server. Simplify your support experience and make HP your first call for hardware or software questions.

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

##### **Installation Services**

##### **Factory Express**

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging.

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

#### Additional Recommended Services

##### **HP Installation and Startup for Insight Control Software / HP SIM**

Provides for the deployment and basic configuration of HP Insight Control or HP SIM (Systems Insight Manager) on HP ProLiant servers <http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

**For a Hyperscale Environment**, Datacenter Care is our most flexible and comprehensive support offering. HP works in partnership with our customers to provide end-to-end tailored support for your existing IT environments while aiding you on your converged cloud journey. It leverages the integrated technology, people, processes, and partner ecosystem of HP to deploy, help operate, and evolve your

### Service and Support

data centers on their journey from traditional data centers to converged cloud. With the ability to configure support tailored to your needs, we offer you flexibility that is cost effective. Datacenter Care is made from "building blocks" of services, each tested and delivered globally. These can be combined to deliver the services that you require, and are monitored and updated to change as your needs change. Start with the core building blocks of an assigned account service manager, enhanced call handling, proactive and reactive support, and add on other services that are tailored to your specific needs. Proactive and reactive support are configured to deliver the level of support needed by the different components in a data center, to meet both SLA and cost targets.

**For SMB to Enterprise customers** HP Technology Services meets business challenges with the right services solution.

---

#### HP Support Center

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more <http://www.hp.com/go/hpsc>

The HP Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

\*The HP Support Center Mobile App is subject to local availability.

---

#### For more information

To learn more on HP ProLiant servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant>

To find the full list of Care Pack SKUs for the HP Apollo family of products, go to: <http://hp.com/go/lookuptool> and in step 2 select HP ProLiant, then select HP Apollo family.

### Configuration Information – Factory Integrated Models

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

**NOTE:** FIO indicates that this option is only available as a factory installable option.

**NOTE:** HP Apollo a6000 Chassis and HP Apollo 6000 Power Shelf are required to support the server. Refer to their QuickSpecs for additional information.

HP Apollo 6000 Power Shelf

[http://h18000.www1.hp.com/products/quickspecs/14976\\_div/14976\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14976_div/14976_div.html)

HP Apollo a6000 Chassis

[http://h18000.www1.hp.com/products/quickspecs/14974\\_div/14974\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14974_div/14974_div.html)

### Step 1: Base Configuration

HP Server

HP ProLiant XL230a Gen9 Compute Tray

785996-B21

**NOTE:** Select one processor in step 2 and the same corresponding processor in step 4.

### Step 2: Choose Required Options

HP Processors		
	HP XL2x0 Gen9 Intel Xeon E5-2680v3 (2.5GHz/12-core/30MB/120W)	768598-L21
	HP XL2x0 Gen9 Intel Xeon E5-2690v3 (2.6GHz/12-core/30MB/135W)	768600-L21
	HP XL2x0 Gen9 Intel Xeon E5-2695v3 (2.3GHz/14-core/35MB/120W)	768604-L21
	HP XL2x0 Gen9 Intel Xeon E5-2609v3 (1.9GHz/6-core/15MB/85W)	768582-L21
	HP XL2x0 Gen9 Intel Xeon E5-2630v3 (2.4GHz/8-core/20MB/85W)	768588-L21
	HP XL2x0 Gen9 Intel Xeon E5-2650v3 (2.3GHz/10-core/25MB/105W)	768592-L21
	HP XL2x0 Gen9 Intel Xeon E5-2660v3 (2.6GHz/10-core/25MB/105W)	768594-L21
	HP XL2x0 Gen9 Intel Xeon E5-2670v3 (2.3GHz/12-core/30MB/120W)	768596-L21
	HP XL2x0 Gen9 Intel Xeon E5-2650Lv3 (1.8GHz/12-core/30MB/65W)	768618-L21
	HP XL2x0 Gen9 Intel Xeon E5-2603v3 (1.6GHz/6-core/15MB/85W)	768560-L21
	HP XL2x0 Gen9 Intel Xeon E5-2620v3 (2.4GHz/6-core/15MB/85W)	768586-L21
	HP XL2x0 Gen9 Intel Xeon E5-2640v3 (2.6GHz/8-core/20MB/90W)	768590-L21
	HP XL2x0 Gen9 Intel Xeon E5-2683v3 (2GHz/14-core/35MB/120W)	768602-L21
	HP XL2x0 Gen9 Intel Xeon E5-2630Lv3 (1.8GHz/8-core/20MB/55W)	768614-L21
	HP XL2x0 Gen9 Intel Xeon E5-2698v3 (2.3GHz/16-core/40MB/135W)	790710-L21
	<p><b>NOTE:</b> For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.</p> <p><b>NOTE:</b> HT indicates that the processor model supports Intel® Hyper-Threading Technology.</p> <p><b>NOTE:</b> Turbo indicates the maximum potential frequency when using Intel® Turbo Boost Technology. The frequency boost increment is dependent on the processor SKU and the number of active cores. In general, a higher boost increment is obtained when fewer cores are active.</p> <p><b>NOTE:</b> DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.</p> <p><b>NOTE:</b> Mixing different processor models is not supported.</p> <p><b>NOTE:</b> For the Intel® C610 Chipset E5-2600 v3 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.</p> <p><b>NOTE:</b> All processors within the server must be identical.</p> <p><b>NOTE:</b> All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2603 v3 and E5-2609 v3.</p> <p><b>NOTE:</b> The letter "L" following the model number denotes lower wattage.</p> <p><b>NOTE:</b> The processor model as well as the memory configuration determines the maximum speed memory can operate. Please see the see the "Memory" section later</p>	

### Configuration Information – Factory Integrated Models

	in this document.	
<b>HP Memory</b>	<p><b>NOTE:</b> Minimum 2 DIMMs are required.</p> <p><b>NOTE:</b> HP memory from previous generation servers (DDR3) is not compatible with this server. HP SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HP SmartMemory QuickSpecs at: <a href="http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535">http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535</a></p> <p><b>NOTE:</b> LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.</p> <p><b>NOTE:</b> Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <a href="http://h22195.www2.hp.com/MemoryTool/Home/Legal">http://h22195.www2.hp.com/MemoryTool/Home/Legal</a></p>	
	<b>Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors</b>	
	HP 8GB (1x8GB) Single Rank x4 PC4-2133P-R (DDR4-2133) Registered	726718-B21
	HP 16GB (1x16GB) Dual Rank x4 PC4-2133P-R (DDR4-2133) Registered	726719-B21
	<b>Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors</b>	
	HP 32GB (1x32GB) Quad Rank x4 PC4-2133P-L (DDR4-2133) Load Reduced	726722-B21
<b>HP Storage Controllers</b>	<p><b>Storage Cables</b></p> <p>HP XL230a B140i Cbl FIO Kit</p> <p><b>NOTE:</b> This cable is required to support the embedded B140i controller.</p>	786621-B21
<b>HP Networking</b>	HP Apollo 6000 Dual 1 GbE 364i FIO Kit	757404-B21
	HP Apollo 6000 Dual FlexibleLOM Riser	757401-B21
	<b>NOTE:</b> Must select at least one of the above options.	
	<b>NOTE:</b> If HP Apollo 6000 Dual FlexibleLOM Riser is selected, then select at least one of the following FlexibleLOM adaptors. Up to two can be selected.	
	<b>FlexibleLOM adapter - Ethernet</b>	
	HP FlexFabric 10Gb 2P 534FLR-SFP+ Adptr	700751-B21
	HP 1Gb Ethernet 4P 331FLR Adptr	629135-B22
	HP FlexFabric 10Gb 2P 533FLR-T Adptr	700759-B21
	HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
	HP Ethernet 10Gb 2P 561FLR-T Adptr	700699-B21
	HP FlexFabric 10Gb 2P 556FLR-SFP+ Adptr	727060-B21
	<b>FlexibleLOM adapter - InfiniBand</b>	
	HP IB FDR 2P 545FLR-QSFP Adptr	702212-B21
	HP IB QDR/EN 10Gb 2P 544+FLR-QSFP Adptr	764286-B21
HP IB FDR/EN 40Gb 2P 544+FLR-QSFP Adptr	764285-B21	

### Step 3: Choose Additional Factory Integrated Options

<b>HP Storage Controllers</b>	HP H240 FIO Smart HBA	761873-B21
	<p>HP Apollo 6000 PCIe x16 Riser Kit</p> <p><b>NOTE:</b> This PCIe Riser is required to support the H240 controller.</p>	788126-B21
	<p>HP Apollo 6000 Mini-SAS H240 Cable</p> <p><b>NOTE:</b> This cable is required to support H240 controller.</p>	776883-B21
<b>HP Networking</b>	<b>FlexibleLOM Adapters</b>	
	<p><b>NOTE:</b> The Dual FlexibleLOM Riser Kit (757401-B21) is required to support the FlexibleLOM options</p> <p>HP FlexFabric 10Gb 2P 533FLR-T Adptr</p>	700759-B21

### Configuration Information – Factory Integrated Models

HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HP Ethernet 10Gb 2P 561FLR-T Adptr	700699-B21
<b>NOTE:</b> Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://www.hp.com/go/ProLiantNICs">www.hp.com/go/ProLiantNICs</a>	

### Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Core Options" and "Additional Options" section below.

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

#### HP Hard Drives

**NOTE:** The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

**NOTE:** Hard drives have either a one year or three year warranty.

**NOTE:** The hard drive options are not required when configuring a Drive-less Model.

**NOTE:** The H240 controller is required when ordering SAS drives

#### SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

HP 900GB 6G SAS 10K 2.5in SC ENT HDD	652589-B21
HP 600GB 6G SAS 10K 2.5in SC ENT HDD	652583-B21
HP 450GB 6G SAS 10K 2.5in SC ENT HDD	652572-B21
HP 300GB 6G SAS 15K 2.5in SC ENT HDD	652611-B21
HP 300GB 6G SAS 10K 2.5in SC ENT HDD	652564-B21

#### SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives

HP 1TB 6G SAS 7.2K 2.5in SC MDL HDD	652749-B21
HP 500GB 6G SAS 7.2K 2.5in SC MDL HDD	652745-B21

#### 6G SATA Hot Plug with SmartDrive SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SATA 7.2k 2.5in SC MDL HDD	655710-B21
HP 500GB 6G SATA 7.2k 2.5in SC MDL HDD	655708-B21

#### 6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives

HP 600GB 6G SATA VE 2.5in SC EV SSD	739898-B21
HP 300GB 6G SATA VE 2.5in SC EV SSD	739888-B21

#### 6G SATA ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HP 800GB 6G SATA ME 2.5in SC EM SSD	691868-B21
HP 400GB 6G SATA ME 2.5in SC EM SSD	691866-B21
HP 200GB 6G SATA ME 2.5in SC EM SSD	691864-B21
HP 100GB 6G SATA ME 2.5in SC EM SSD	691862-B21

### Configuration Information – Factory Integrated Models

#### HP Networking

##### Ethernet Options

HP FlexFabric 10Gb 2P 534FLR-SFP+ Adptr	700751-B21
HP FlexFabric 10Gb 2P 533FLR-T Adptr	700759-B21
HP Apollo 6000 Dual 1GbE 364i FIO Kit	757404-B21
HP FlexFabric 10Gb 2P 556FLR-SFP+ Adptr	727060-B21
HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21

##### InfiniBand Options

HP IB FDR/EN 40Gb 2P 544+FLR-QSFP Adptr	764285-B21
HP IB QDR/EN 10Gb 2P 544+FLR-QSFP Adptr	764286-B21
HP IB FDR 2P 545FLR-QSFP Adptr	702212-B21

##### Riser Options in support of FlexibleLOMs

HP Apollo 6000 Dual FlexibleLOM Riser	757401-B21
---------------------------------------	------------

#### HP Insight Software

##### Integrated Lights-Out (iLO)

##### HP iLO Scale Out

HP iLO Adv incl 1yr TS U E-LTU	E6U59ABE
HP iLO Adv incl 3yr TS U E-LTU	E6U64ABE

HP iLO Scale-Out incl 3yr TSU Flex E-LTU	BD776AAE
HP iLO Scale-Out incl 3yr TSU Track Lic	BD777A
HP iLO Scale-Out incl 3yr TSU Track Lic	BD777A
HP iLO Scale-Out incl 1yr TSU Flex Lic	BD778A

##### HP Integrated Lights-Out (iLO) Advanced for ProLiant

HP iLO Scale-Out incl 1yr TSU Flex E-LTU	BD778AAE
HP iLO Scale-Out incl 1yr TSU Track Lic	BD779A
HP iLO Adv incl 3yr TS U 1-Svr Lic	BD505A
HP iLO Adv incl 3yr TS U Flex Lic	BD506A
HP iLO Adv incl 3yr TS U E-LTU	BD506AAE
HP iLO Adv incl 3yr TS U Track Lic	BD507A
HP iLO Adv incl 1yr TS U 1-Svr Lic	512485-B21
HP iLO Adv incl 1yr TS U Flex Lic	512486-B21
HP iLO Adv incl 1yr TS U Track Lic	512487-B21
HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License	TA850AAE

**NOTE:** For additional license options please see the QuickSpecs at:

[http://h18004.www1.hp.com/products/quickspecs/14276\\_div/14276\\_div.html](http://h18004.www1.hp.com/products/quickspecs/14276_div/14276_div.html)

**NOTE:** For more information, visit: <http://www.hp.com/go/ilo>

### Additional Options

#### High Performance Clusters **HP Cluster Management Utility**

##### Clusters

HP Insight Cluster Management Utility 1yr 24x7 Flexible License QL803B

HP Insight Cluster Management Utility 3yr 24x7 Flexible License BD476A

**NOTE:** These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HP Insight Cluster Management Utility Media BD477A

**NOTE:** For additional license kits please see the QuickSpecs at:

[http://h18004.www1.hp.com/products/quickspecs/12612\\_div/12612\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12612_div/12612_div.html)

#### HP Storage Controllers

##### SAS Controllers

##### Host Bus Adapter

HP H240 Smart HBA 726907-B21

##### Storage Controller Cable Kits

HP Apollo 6000 Mini-SAS H240 Cbl 776883-B21

HP XL230a B140i Cbl FIO Kit 786621-B21

HP Enable Kit BIOS Setting 784308-B21

NOTE: AHCI is enabled by default. Enable the embedded B140i controller for RAID and Hot-plug capabilities.

### Additional Options

#### HP Rack Options

#### HP USB BFR with PVC Free Keyboard/Mouse Kit

HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21
HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13972\\_div/13972\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13972_div/13972_div.html)  
(Worldwide)

#### Security Hardware

#### Trusted Platform Module.

HP TPM Module Kit	488069-B21
-------------------	------------

### Memory

#### HP Memory

For detailed memory configuration rules and guidelines, please use the Online DDR4 Memory Configuration Tool:

<http://h22195.www2.hp.com/MemoryTool/Home/Legal>

#### Memory Subsystem Architecture

Each Intel® Xeon® E5-2600 v3 family processor socket contains four memory channels that support two DIMMs each for a total of eight (8) DIMM per installed processor or a grand total of sixteen (16) DIMMs for the server. Up to 32GB capacity DIMMs are supported for 512GB of memory (16 DIMM slots x 32GB per DIMM).

Memory Population Rules and Guidelines:

- White DIMM slots denote the first slot of a channel. For 1 DPC (DIMM per channel) populate white slots only.
- Install DIMMs only if the corresponding processor is installed.
- There are two channels per processor with two DIMM slots per channel.
- Memory channel A consists of the two (2) DIMMs that are closest to the processor.
- Memory channel B consists of the two (2) DIMMs that are furthest from the processor.
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel
- Heaviest load (DIMM with most ranks) within a channel goes furthest from the processor
- No support for RDIMMs; Non-ECC UDIMMs
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/14225\\_div/14225\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14225_div/14225_div.html).
- For memory population rules and additional memory guidelines, please see the HP ProLiant XL230 Gen9 user guide at <http://www.hp.com/support>.

#### Supported Memory Bandwidth on Intel® Xeon® E5-2600 v3 series Processors

DIMM Rank	Register DIMM (RDIMM)		Load Reduced (LRDIMMs)
	Single Rank (1R)	Dual Rank (2R)	Quad Rank (4R)
DIMM Capacity	8GB	16GB	32GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
<b>SLOTS THAT CAN BE POPULATED</b>			
16 slots	16	16	16
<b>MAXIMUM CAPACITY (GB)*</b>			
16 slots	128	256	512
<b>POPULATED DIMM SPEED (MT/s)</b>			
1 DIMM Per Channel	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133
*Maximum Capacity will vary based on individual serve platform qualification schedule			

### Memory


#### Memory Speed by E5-2600 v3 Series Processor Model

Processor Models	Supported Memory Speeds
E5-2690 v3, E5-2695 v3, E5-2697 v3, E5-2698 v3, E5-2699 v3, E5-2687W v3, E5-2683 v3, E5-2680 v3, E5-2670 v3, E5-2667 v3, E5-2660 v3, E5-2650 v3, E5-2650L, E5-2643 v3, E5-2637 v3	2133MHz
E5-2640 v3, E5-2630 v3, E5-2630L v3, E5-2623 v3, E5-2620 v3	1866MHz
E5-2609 v3, E5-2603 v3	1600MHz

**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.

- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB

#### Memory options part number decoder

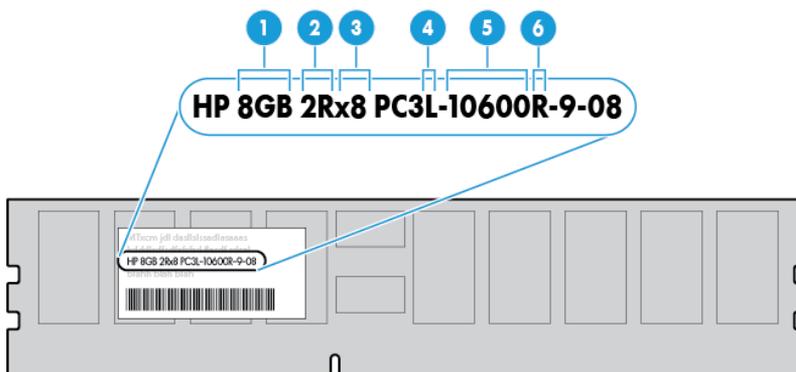

Item	Description	Definition
1	Capacity	8 GByte / 16 GByte / 32 GByte
2	Rank	1R=Single-rank / 2R = Dual-rank / 4R Quad-rank
3	Data Width	x4 = 4-bit / x8 =-bit
4	Memory Generation	DDR4
5	Max. Memory Speed	2133MT/s
6	CasLatency	P=15
6	DIMM type	R= RDIMM (registered) L= LRDIMM (registered)

Following are memory options available from HP:

#### HP Memory

**NOTE:** HP memory from previous generation servers (DDR3) is not compatible with this server. HP

### Memory

SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HP SmartMemory QuickSpecs at:

<http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz.

#### HP SmartMemory

##### Registered DIMMs (RDIMMs)

##### Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors

HP 8GB (1x8GB) Single Rank x4 PC4-2133P-R (DDR4-2133) Registered	726718-B21
--	------------

HP 16GB (1x16GB) Dual Rank x4 PC4-2133P-R (DDR4-2133) Registered	726719-B21
--	------------

##### Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors

HP 32GB (1x32GB) Quad Rank x4 PC4-2133P-L (DDR4-2133) Load Reduced	726722-B21
--	------------

**NOTE:** Depending on the memory configuration and processor model, 2133MHz memory may operate at a lower speed. Please see the "Memory" section later in this document.

### Technical Specifications

<b>System Unit</b>	<b>Server Dimensions</b> (L x W x D)	1.70 x 8.33 x 27.87 in (4.33 x 21.15 x 70.79 cm)	
	<b>Shipping Dimensions</b> (L x W x D)	37.63 x 15.13 x 9 in (95.5 x 38.4 x 22.8 cm)	
	<b>Weight</b> (approximate)	Maximum (four hard drives and two processors installed)	15.0 lb (6.8 kg)
	<b>System Inlet Temperature</b>	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.
		Extended Ambient Operating Support	<p>System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).</p> <p>For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hp.com/servers/ASHRAE">www.hp.com/servers/ASHRAE</a></p> <p>For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hp.com/servers/ASHRAE">www.hp.com/servers/ASHRAE</a></p> <p>System performance may be reduced if operating in the extended ambient operating range or with a fan fault.</p>
	<b>Relative Humidity</b> (non-condensing)	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
		Operating	Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
		Non-operating	5 to 95% relative humidity (Rh), 38.7°C

### Technical Specifications

<b>Altitude</b>	Operating	(101.7°F) maximum wet bulb temperature, non-condensing.  3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Listed are the declared A-Weighted sound power levels (LWAd) and measured average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

<b>Acoustic Noise</b>	Configuration	SKU	Entry	Base	Performance
	Idle				
	LWAd	6.9 B	6.9 B	6.9 B	
	LpAm	51 dBA	51 dBA	51 dBA	
	Operating				
	LWAd	8.0 B	8.3 B	8.7 B	
LpAm	62 dBA	66 dBA	72 dBA		

<b>Emissions Classification (EMC)</b>	FCC Rating	Class A
	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

**NOTE:** Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

### Technical Specifications

**Environment-friendly  
Products and Approach****End-of-life Management  
and Recycling**

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

---

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries. Linux is a registered trademark of Linus Torvalds. SUSE is a registered trademark of Suse. Ubuntu and Canonical are registered trademarks of Canonical Ltd. Red Hat is a trademark of Red Hat, Inc. in the U.S. and other countries. VMware is a registered trademark of VMware, Inc. in the United States and/or other jurisdictions.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.