

### V-THREAD Laydown System

|   |           |
|---|-----------|
| Designation and Application Guides.....       | E2 - E5   |
| Insert Product Offering.....                  | E6 - E31  |
| Toolholder Product Offering.....              | E32 - E34 |
| Boring Bar Product Offering.....              | E35 - E38 |
| Common Insert Dimension Chart.....            | E40       |
| Spare Parts and Anvils.....                   | E40 - E41 |
| Grade Descriptions and Application Guide..... | E42 - E45 |
| Machining Guidelines.....                     | E46 - E50 |

### V-LOC Threading System


|  |           |
|--|-----------|
| Designation.....                             | E51 - E53 |
| Grade Description and Application Guide..... | E54 - E55 |
| Insert Product Offering.....                 | E56 - E57 |
| Toolholder Product Offering.....             | E58 - E61 |
| Boring Bar Product Offering.....             | E62       |
| Common Insert Dimensions Chart.....          | E63       |
| Workpiece and Application Guide.....         | E64 - E65 |
| Machining Guidelines.....                    | E66 - E68 |

# THREADING

## ValTHREAD™ Insert Designation

**16**   **E**   **R**   **B**   **12**   **UN**   **M**

| L    | IC   |
|------|------|
| 06   | 5/32 |
| 08   | 3/16 |
| 11   | 1/4  |
| 16   | 3/8  |
| 22   | 1/2  |
| 27   | 5/8  |
| 22U* | 1/2U |
| 27U* | 5/8U |



|          |          |
|----------|----------|
| <b>E</b> | External |
| <b>I</b> | Internal |

|          |            |
|----------|------------|
| <b>R</b> | Right Hand |
| <b>L</b> | Left Hand  |

|          |                       |
|----------|-----------------------|
| <b>M</b> | Chipbreaker—Utility   |
| <b>B</b> | Chipbreaker—Precision |

| Partial Profile Insert Type |    |             |          |
|-----------------------------|----|-------------|----------|
| Type                        | L  | Pitch Range |          |
|                             |    | (mm)        | TPI      |
| <b>A</b>                    | 06 | 0.5-1.25    | 48-20    |
| <b>A</b>                    | 08 | 0.5-1.5     | 48-20    |
| <b>U</b>                    |    | 1.75-2      | 14-11    |
| <b>A</b>                    | 11 | 0.5-1.5     | 48-16    |
| <b>A</b>                    | 16 | 0.5-1.5     | 48-16    |
| <b>AG</b>                   |    | 0.5-3       | 48-8     |
| <b>G</b>                    | 22 | 1.75-3      | 14-8     |
| <b>N</b>                    |    | 3.5-5       | 7-5      |
| <b>U</b>                    | 27 | 5.5-8       | 4.5-3.25 |
| <b>Q</b>                    |    | 5.5-6       | 4.5-4    |
| <b>U</b>                    | 27 | 6.5-9       | 4-2.75   |
| <b>V</b>                    |    | 6-10        | 4-2.5    |

| Full Profile Pitch Range |      |
|--------------------------|------|
| (mm)                     | TPI  |
| 0,35-6,0                 | 72-2 |

| Partial Profiles |                     |
|------------------|---------------------|
| <b>60</b>        | 60° Partial Profile |
| <b>55</b>        | 55° Partial Profile |


| Multi-Tooth Style |
|-------------------|
| # of Teeth        |

| Full Profile Thread Standards |   |
|-------------------------------|---|
| <b>ISO</b>                    | ISO Metric  |
| <b>UN</b>                     | American UN   |
| <b>W</b>                      | Whitworth, BSW  |
| <b>NPT</b>                    | American National Pipe Thread                           |
| <b>NPTF</b>                   | American National Pipe Thread (Dryseal)                 |
| <b>ACME</b>                   | American Acme   |
| <b>STACME</b>                 | American Stub Acme                                      |
| <b>UNJ</b>                    | Controlled Root Radius                                  |
| <b>RD</b>                     | Round Din 405   |
| <b>API</b>                    | API Round<br>API Buttress Casing<br>API Rotary Shoulder |
| <b>ABUT</b>                   | American Buttress                                       |

\* Note: U Style Insert and Toolholder Pocket

Threading

## ValTHREAD™ Toolholder Designation

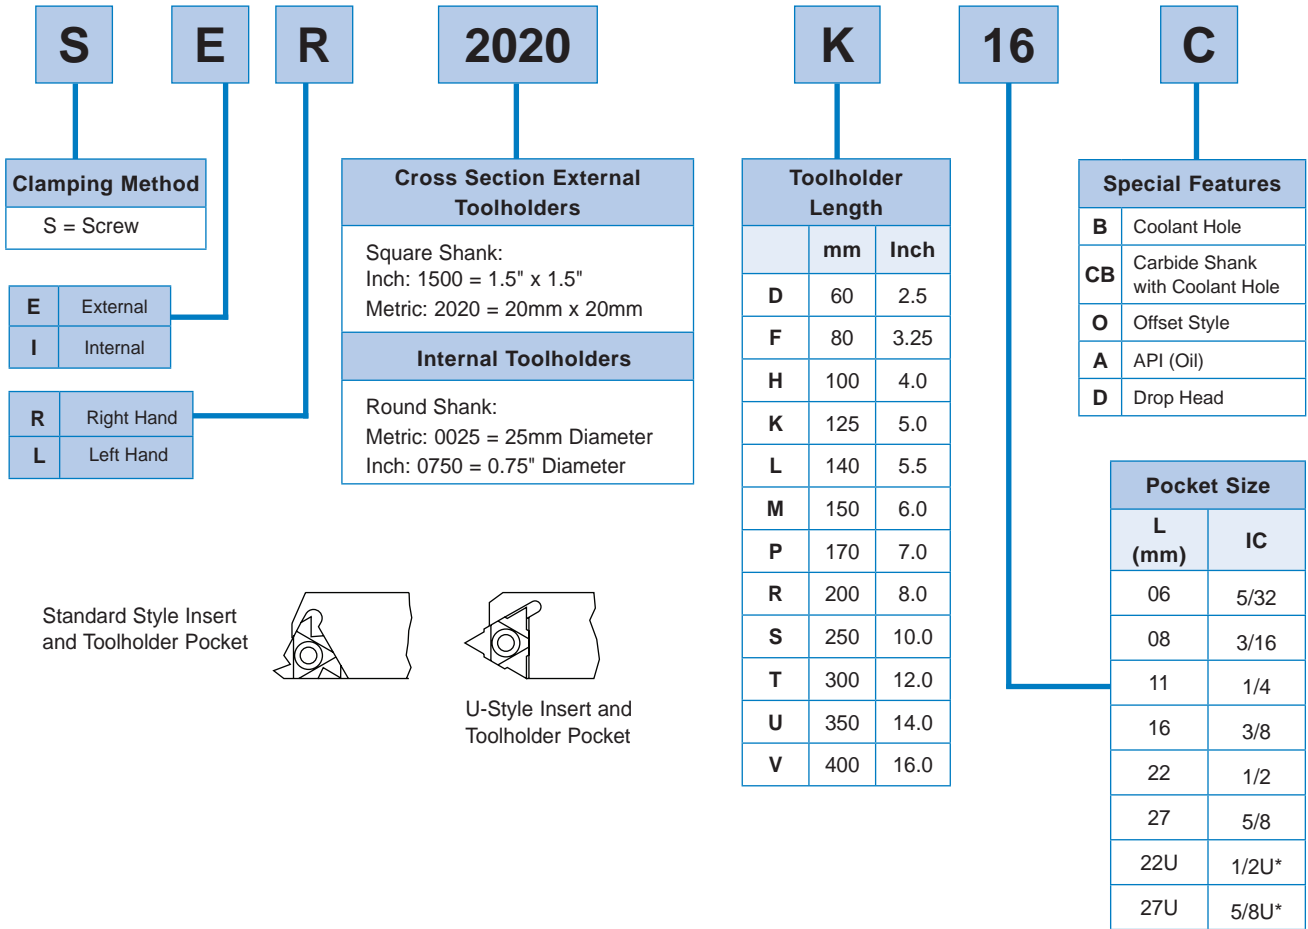









\* Note: U-Style Insert and Toolholder Pocket

# THREADING









## VaiTHREAD™ Insert Geometry Application Data

### Threading System

| Insert Style  | Description   | Insert Style   | Description   |
|---|---|--|---|
| 60  | <b>Threading</b><br>Partial Profile Non-Cresting 60°<br>Page E6 | NPT  | <b>Threading</b><br>American National Pipe Thread 60°<br>Page E15 |
|    |   |    |   |
| 55  | <b>Threading</b><br>Partial Profile Non-Cresting 55°<br>Page E8 | NPTF   | <b>Threading</b><br>American NPT Dryseal 60°<br>Page E17          |
|   |   |   |   |
| UN  | <b>Threading</b><br>American UN 60°<br>Page E9                  | ISO  | <b>Threading</b><br>ISO - Metric 60°<br>Page E18                  |
|  |   |  |   |
| UNJ   | <b>Threading</b><br>Controlled Root Radius 60°<br>Page E14      | ACME   | <b>Threading</b><br>American Acme<br>Page E22                     |
|  |   |  |   |

## VaIThread™ Insert Geometry Application Data


### Threading System

| Insert Style | Description   | Insert Style | Description  |
|--------------|---|--------------|--|
| STACME       |  <p><b>Threading</b><br/>American Stub Acme<br/>Page E24</p>         | APIRD        |  <p><b>Threading</b><br/>API Round<br/>Page E29</p>                |
|              |   |              |  |
| W            |  <p><b>Threading</b><br/>Whitworth 55°<br/>Page E26</p>             | BUT          |  <p><b>Threading</b><br/>API Buttress Casing<br/>Page E30</p>     |
|              |   |              |  |
| RD           |  <p><b>Threading</b><br/>Round DIN 405<br/>Page E29</p>            | API          |  <p><b>Threading</b><br/>API Rotary Shoulder<br/>Page E30</p>    |
|              |   |              |  |
| ABUT         |  <p><b>Threading</b><br/>American Buttress Thread<br/>Page E31</p> | MULTI        |  <p><b>Threading</b><br/>UN, ISO, and API Round<br/>Page E28</p> |
|              |   |              |  |

# THREADING

## VaiTHREAD™ Product Offering

### Partial Profiles - 60° - External

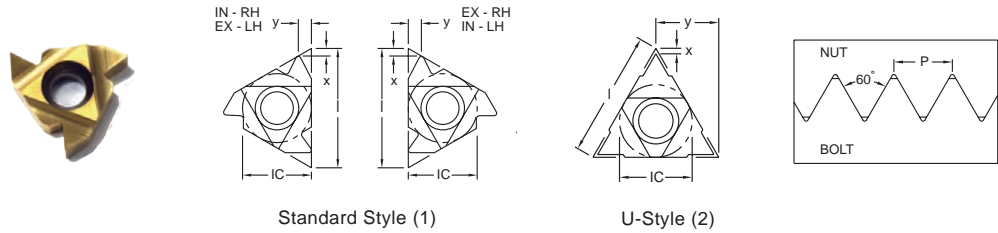

| Part Number |            | Dimensions     |                |       |       |      |       | Pitch<br>TPI | Available Grades-EDP# |       |       |       |       |       |
|-------------|------------|----------------|----------------|-------|-------|------|-------|--------------|-----------------------|-------|-------|-------|-------|-------|
|             |            | I.C. (in.)     | X              | Y     | x     | y    | R     |              | VC5                   | VC29  | VC901 | VC905 | VC929 | VC942 |
| Right Hand  | Left Hand  | I (mm)         | Inch           | Inch  | mm    | mm   | Inch  |              |                       |       |       |       |       |       |
| 11 ER A60   |            | .250<br>(11)   | 0.031          | 0.035 | 0,8   | 0,9  | 0.002 | 48-16        | 07995                 | 13308 |       | 01812 | 01813 |       |
|             | 11 EL A60  |                | 0.031          | 0.035 | 0,8   | 0,9  | 0.002 | 48-16        |                       |       |       |       | 01862 |       |
| 16 ER A60   |            | .375<br>(16,5) | 0.031          | 0.035 | 0,8   | 0,9  | 0.002 | 48-16        | 08001                 | 08002 | 01820 | 01821 | 01822 | 10948 |
|             | 16 EL A60  |                | 0.031          | 0.035 | 0,8   | 0,9  | 0.002 | 48-16        |                       |       |       | 01864 | 15443 |       |
| 16 ER AG60  |            | .375<br>(16,5) | 0.047          | 0.067 | 1,2   | 1,7  | 0.002 | 48-8         | 08004                 | 08005 | 01825 | 01826 | 01827 |       |
|             | 16 EL AG60 |                | 0.047          | 0.067 | 1,2   | 1,7  | 0.002 | 48-8         |                       |       |       | 01818 | 01866 |       |
| 16 ER G60   |            | .375<br>(16,5) | 0.047          | 0.067 | 1,2   | 1,7  | 0.007 | 14-8         | 08007                 |       | 01829 | 01830 | 01831 |       |
|             | 16 EL G60  |                | 0.047          | 0.067 | 1,2   | 1,7  | 0.007 | 14-8         |                       |       |       |       | 01867 |       |
| 22 ER N60   |            | .500<br>(22,5) | 0.067          | 0.098 | 1,7   | 2,5  | 0.013 | 7-5          | 08015                 |       |       | 01848 | 01849 |       |
|             | 22 EL N60  |                | 0.067          | 0.098 | 1,7   | 2,5  | 0.013 | 7-5          |                       |       |       |       | 16875 |       |
| 22 ER L U60 |            | .500<br>(22,5) | 0.024          | 0.433 | 0,6   | 11   | 0.011 | 4.5-3.25     | 08014                 |       |       |       | 01846 |       |
| 27 ER Q60   |            |                | .625<br>(27,5) | 0.083 | 0.122 | 2,1  | 3,1   | 0.025        | 4.5-4                 |       |       |       | 01856 | 01857 |
|             | 27 EL Q60  | 0.083          |                | 0.122 | 2,1   | 3,1  | 0.025 | 4.5-4        |                       |       |       |       | 01873 |       |
| 27 ER L U60 |            | 0.039          |                | 0.539 | 1,0   | 13,7 | 0.011 | 4-2.75       |                       |       |       |       | 01855 |       |



### Partial Profiles - 60° - Internal

| Part Number |            | Dimensions     |                |       |       |      |       | Pitch<br>TPI | Available Grades-EDP# |       |       |       |       |       |
|-------------|------------|----------------|----------------|-------|-------|------|-------|--------------|-----------------------|-------|-------|-------|-------|-------|
|             |            | I.C. (in.)     | X              | Y     | x     | y    | R     |              | VC5                   | VC29  | VC901 | VC905 | VC929 | VC942 |
| Right Hand  | Left Hand  | I (mm)         | Inch           | Inch  | mm    | mm   | Inch  |              |                       |       |       |       |       |       |
| 06 IR A60   |            | .156<br>(6,9)  | 0.024          | 0.024 | 0,6   | 0,6  |       | 48-20        |                       |       | 01807 |       |       | 10945 |
| 08 IR A60   |            | .187<br>(8,7)  | 0.024          | 0.028 | 0,6   | 0,7  |       | 48-20        |                       |       | 01809 |       |       | 14083 |
|             | 08 IL A60  |                | 0.024          | 0.028 | 0,6   | 0,7  |       | 48-20        |                       |       | 08816 |       |       | 08820 |
| 08 IR L U60 |            | .187<br>(8,7)  | 0.031          | 0.157 | 0,8   | 4,0  |       | 14-11        |                       |       | 01811 |       |       |       |
| 11 IR A60   |            |                | .250<br>(11)   | 0.031 | 0.035 | 0,8  | 0,9   | 0.002        | 48-16                 | 07996 | 07997 |       | 01816 | 01817 |
|             | 11 IL A60  | 0.031          |                | 0.035 | 0,8   | 0,9  | 0.002 | 48-16        |                       |       |       |       | 01815 |       |
| 16 IR A60   |            | .375<br>(16,5) | 0.031          | 0.035 | 0,8   | 0,9  | 0.002 | 48-16        |                       |       | 01835 | 01836 | 01837 | 14084 |
|             | 16 IL A60  |                | 0.031          | 0.035 | 0,8   | 0,9  | 0.002 | 48-16        |                       |       |       |       | 01832 |       |
| 16 IR AG60  |            | .375<br>(16,5) | 0.047          | 0.067 | 1,2   | 1,7  | 0.002 | 48-8         | 08010                 | 08011 | 01839 | 01840 | 01841 | 10951 |
|             | 16 IL AG60 |                | 0.047          | 0.067 | 1,2   | 1,7  | 0.002 | 48-8         |                       |       |       | 01833 | 16133 |       |
| 16 IR G60   |            | .375<br>(16,5) | 0.047          | 0.067 | 1,2   | 1,7  | 0.005 | 14-8         | 08012                 | 08013 | 01842 | 01843 | 01844 |       |
|             | 16 IL G60  |                | 0.047          | 0.067 | 1,2   | 1,7  | 0.005 | 14-8         |                       |       |       |       | 16145 |       |
| 22 IR N60   |            | .500<br>(22,5) | 0.067          | 0.098 | 1,7   | 2,5  | 0.009 | 7-5          | 08018                 | 08019 |       | 01852 | 01853 |       |
|             | 22 IL N60  |                | 0.067          | 0.098 | 1,7   | 2,5  | 0.009 | 7-5          |                       |       |       | 17057 | 17058 |       |
| 22 IR L U60 |            | .500<br>(22,5) | 0.024          | 0.433 | 0,6   | 11   | 0.011 | 4.5-3.25     |                       |       |       | 01850 | 01851 |       |
| 27 IR Q60   |            |                | .625<br>(27,5) | 0.083 | 0.122 | 2,1  | 3,1   | 0.012        | 4.5-4                 |       |       |       | 01860 | 01861 |
|             | 27 IL Q60  | 0.083          |                | 0.122 | 2,1   | 3,1  | 0.012 | 4.5-4        |                       |       |       |       | 17478 |       |
| 27 IR L U60 |            | 0.039          |                | 0.539 | 1,0   | 13,7 | 0.011 | 4-2,75       |                       |       |       | 01858 | 01859 |       |


\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.

## ValTHREAD™ Product Offering

### Partial Profiles - 60° - Chipbreaker - External



U-Style (2)



Standard Style (1)



| Part Number   |           | Dimensions     |       |       |     |     |       | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|---------------|-----------|----------------|-------|-------|-----|-----|-------|--------------|-----------------------|------|-------|-------|-------|-------|
|               |           | I.C. (in.)     | X     | Y     | x   | y   | R     |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand    | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm  | Inch  |              |                       |      |       |       |       |       |
| 16 ERB A 60*  |           | .375<br>(16,5) | 0.031 | 0.035 | 0,8 | 0,9 | 0.002 | 48-16        |                       |      |       |       | 08821 |       |
| 16 ERB AG 60* |           |                | 0.047 | 0.067 | 1,2 | 1,7 | 0.002 | 48-8         |                       |      |       |       | 08819 |       |
| 16 ERB G 60*  |           |                | 0.047 | 0.067 | 1,2 | 1,7 | 0.002 | 48-8         |                       |      |       |       | 08823 |       |
| 22 ERM N 60   |           | .500<br>(22,5) | 0.067 | 0.098 | 1,7 | 2,5 | 0.013 | 7-5          |                       |      |       | 01763 |       |       |

### Partial Profiles - 60° - Chipbreaker - Internal


| Part Number   |           | Dimensions     |       |       |     |     |       | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|---------------|-----------|----------------|-------|-------|-----|-----|-------|--------------|-----------------------|------|-------|-------|-------|-------|
|               |           | I.C. (in.)     | X     | Y     | x   | y   | R     |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand    | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm  | Inch  |              |                       |      |       |       |       |       |
| 06 IRM A60    |           | .156<br>(6,9)  | 0.024 | 0.024 | 0,6 | 0,6 | 0.002 | 48-20        |                       |      | 01748 |       |       |       |
| 08 IRM A60    |           | .187<br>(8,7)  | 0.024 | 0.028 | 0,6 | 0,7 | 0.002 | 48-20        |                       |      | 01749 |       |       |       |
| 11 IRM A60    |           | .250<br>(11)   | 0.031 | 0.035 | 0,8 | 0,9 | 0.002 | 48-16        |                       |      |       | 01750 | 07895 |       |
| 16 IRB AG 60* |           | .375<br>(16,5) | 0.047 | 0.067 | 1,2 | 1,7 | 0.007 | 48-8         |                       |      |       |       | 10922 |       |
| 16 IRB G 60*  |           | .375<br>(16,5) | 0.047 | 0.067 | 1,2 | 1,7 | 0.007 | 14-8         |                       |      |       |       | 10923 |       |

\* B-Style inserts have a ground profile and pressed-in chipform

# THREADING

## VaiTHREAD™ Product Offering

### Partial Profiles - 55° - External

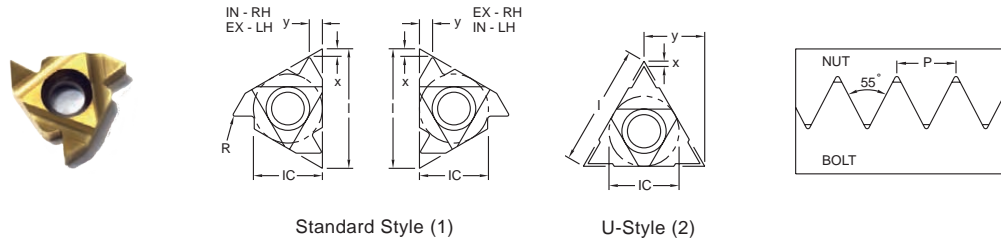

| Part Number  |           | Dimensions     |       |       |     |      |       | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |
|--------------|-----------|----------------|-------|-------|-----|------|-------|--------------|-----------------------|------|-------|-------|-------|
|              |           | I.C. (in.)     | X     | Y     | x   | y    | R     |              | VC5                   | VC29 | VC901 | VC905 | VC929 |
| Right Hand   | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm   | Inch  |              |                       |      |       |       |       |
| 11 ER A55    |           | .250           | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       |       | 13300 |
|              | 11 EL A55 | (11)           | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       |       | 11890 |
| 16 ER A55    |           | .375<br>(16,5) | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       | 01819 | 15877 |
|              | 16 EL A55 |                | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       |       | 15440 |
| 16 ER AG55   |           |                | 0.047 | 0.067 | 1,2 | 1,7  | 0.002 | 48-8         |                       |      |       | 01823 | 01824 |
| 16 ER G55    |           |                | 0.047 | 0.067 | 1,2 | 1,7  | 0.008 | 14-8         |                       |      |       | 01828 | 15878 |
|              | 16 EL G55 |                | 0.047 | 0.067 | 1,2 | 1,7  | 0.008 | 14-8         |                       |      |       | 15446 | 15447 |
| 22 ER N55    |           | .500<br>(22,5) | 0.067 | 0.098 | 1,7 | 2,5  | 0.017 | 7-5          |                       |      |       | 01847 | 16956 |
|              | 22 EL N55 |                | 0.067 | 0.098 | 1,7 | 2,5  | 0.017 | 7-5          |                       |      |       |       | 16873 |
| 22 ER L U55* |           |                | 0.035 | 0.433 | 0,9 | 11   | 0.024 | 4.5-3.25     |                       |      |       |       | 16953 |
| 27 ER Q55    |           | .625<br>(27,5) | 0.079 | 0.114 | 2,0 | 2,9  | 0.024 | 4.5-4        |                       |      |       |       | 17421 |
|              | 27 EL Q55 |                | 0.079 | 0.114 | 2,0 | 2,9  | 0.024 | 4.5-4        |                       |      |       |       | 17370 |
| 27 ER L U55  |           |                | 0.047 | 0.539 | 1,2 | 13,7 | 0.024 | 4-2.75       |                       |      |       |       | 17418 |



\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.

### Partial Profiles - 55° - Internal


| Part Number  |           | Dimensions     |       |       |     |      |       | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |
|--------------|-----------|----------------|-------|-------|-----|------|-------|--------------|-----------------------|------|-------|-------|-------|
|              |           | I.C. (in.)     | X     | Y     | x   | y    | R     |              | VC5                   | VC29 | VC901 | VC905 | VC929 |
| Right Hand   | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm   | Inch  |              |                       |      |       |       |       |
| 08 IR A55    |           | .187           | 0.024 | 0.028 | 0,6 | 0,7  |       | 48-20        |                       |      | 01808 |       |       |
|              | 08 IL A55 | (8,7)          | 0.024 | 0.028 | 0,6 | 0,7  |       | 48-20        |                       |      | 08809 |       |       |
| 11 IR A55    |           | .250           | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       | 15213 |       |
|              | 11 IL A55 | (11)           | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       |       | 14933 |
| 16 IR A55    |           | .375<br>(16,5) | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       | 16571 | 16572 |
|              | 16 IL A55 |                | 0.031 | 0.035 | 0,8 | 0,9  | 0.002 | 48-16        |                       |      |       |       | 16137 |
| 16 IR AG55   |           |                | 0.047 | 0.067 | 1,2 | 1,7  | 0.002 | 48-8         |                       |      |       | 01838 | 01868 |
| 16 IR G55    |           |                | 0.047 | 0.067 | 1,2 | 1,7  | 0.002 | 48-8         |                       |      |       |       | 16130 |
|              | 16 IL G55 |                | 0.047 | 0.067 | 1,2 | 1,7  | 0.008 | 14-8         |                       |      |       | 01869 | 16576 |
| 22 IR N55    |           | .500<br>(22,5) | 0.067 | 0.098 | 1,7 | 2,5  | 0.017 | 7-5          |                       |      |       | 01872 | 17150 |
|              | 22 IL N55 |                | 0.067 | 0.098 | 1,7 | 2,5  | 0.017 | 7-5          |                       |      |       |       | 17053 |
| 22 IR L U55* |           |                | 0.035 | 0.433 | 0,9 | 11   | 0.024 | 4.5-3.25     |                       |      |       | 17146 |       |
| 27 IR Q55    |           | .625<br>(27,5) | 0.079 | 0.114 | 2,0 | 2,9  | 0.024 | 4.5-4        |                       |      |       |       | 17527 |
|              | 27 IL Q55 |                | 0.079 | 0.114 | 2,0 | 2,9  | 0.024 | 4.5-4        |                       |      |       |       | 17475 |
| 27 IR L U55  |           |                | 0.047 | 0.539 | 1,2 | 13,7 | 0.024 | 4-2.75       |                       |      |       |       | 17523 |

\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.





U-Style (2)



Standard Style (1)




| Part Number   |               | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |       |       |       |       |       |
|---------------|---------------|----------------|-------|-------|-----|-----|--------------|-----------------------|-------|-------|-------|-------|-------|
|               |               | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29  | VC901 | VC905 | VC929 | VC942 |
| Right Hand    | Left Hand     | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |       |       |       |       |       |
| 11 ER 32 UN   |               | .250<br>(11)   | 0.024 | 0.024 | 0,6 | 0,6 | 32           |                       |       |       |       |       | 01892 |
| 16 ER 72 UN   |               | .375<br>(16,5) | 0.031 | 0.016 | 0,8 | 0,4 | 72           |                       |       |       |       |       | 01950 |
| 16 ER 64 UN   |               |                | 0.031 | 0.016 | 0,8 | 0,4 | 64           |                       |       |       |       |       | 16098 |
| 16 ER 56 UN   |               |                | 0.028 | 0.016 | 0,7 | 0,4 | 56           |                       |       |       |       |       | 01948 |
| 16 ER 48 UN   |               |                | 0.024 | 0.024 | 0,6 | 0,6 | 48           |                       |       |       |       |       | 16074 |
| 16 ER 40 UN   |               |                | 0.024 | 0.024 | 0,6 | 0,6 | 40           |                       |       |       | 01945 |       | 01946 |
|               | 16 EL 40 UN   |                | 0.024 | 0.024 | 0,6 | 0,6 | 40           |                       |       |       |       |       | 15770 |
| 16 ER 36 UN   |               |                | 0.024 | 0.024 | 0,6 | 0,6 | 36           |                       |       |       | 01943 |       | 01944 |
|               | 16 EL 36 UN   |                | 0.024 | 0.024 | 0,6 | 0,6 | 36           |                       |       |       |       |       | 15758 |
| 16 ER 32 UN   |               |                | 0.024 | 0.024 | 0,6 | 0,6 | 32           | 08061                 | 08062 |       | 01941 |       | 01942 |
|               | 16 EL 32 UN   |                | 0.024 | 0.024 | 0,6 | 0,6 | 32           |                       |       |       | 15745 |       | 15746 |
| 16 ER 28 UN   |               |                | 0.024 | 0.028 | 0,6 | 0,7 | 28           |                       |       |       | 01939 |       | 01940 |
|               | 16 EL 28 UN   |                | 0.024 | 0.028 | 0,6 | 0,7 | 28           |                       |       |       |       |       | 15726 |
| 16 ER 27 UN   |               |                | 0.028 | 0.031 | 0,7 | 0,8 | 27           |                       |       |       | 16035 |       | 01938 |
|               | 16 EL 27 UN   |                | 0.028 | 0.031 | 0,7 | 0,8 | 27           |                       |       |       |       |       | 15718 |
| 16 ER 24 UN   |               |                | 0.028 | 0.031 | 0,7 | 0,8 | 24           |                       | 08058 |       | 01936 |       | 01937 |
|               | 16 EL 24 UN   |                | 0.028 | 0.031 | 0,7 | 0,8 | 24           |                       |       |       |       |       | 02043 |
| 16 ER 20 UN   |               |                | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       | 08056 |       | 01934 |       | 01935 |
|               | 16 EL 20 UN   |                | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       |       |       |       |       | 02041 |
| 16 ER 18 UN   |               |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       | 08054 |       | 01932 |       | 01933 |
|               | 16 EL 18 UN   |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |       |       |       |       | 02040 |
| 16 ER 16 UN   |               |                | 0.035 | 0.043 | 0,9 | 1,1 | 16           | 08051                 | 08052 |       | 01929 |       | 01930 |
|               | 16 EL 16 UN   |                | 0.035 | 0.043 | 0,9 | 1,1 | 16           |                       |       |       | 01914 |       | 01915 |
| 16 ER 14 UN   |               |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |       |       | 01927 |       | 01928 |
|               | 16 EL 14 UN   |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |       |       | 15593 |       | 02039 |
| 16 ER 13 UN   |               |                | 0.039 | 0.051 | 1,0 | 1,3 | 13           |                       |       |       | 01925 |       | 01926 |
|               | 16 EL 13 UN   |                | 0.039 | 0.051 | 1,0 | 1,3 | 13           |                       |       |       |       |       | 15566 |
| 16 ER 12 UN   |               |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       | 08048 |       | 01923 |       | 01924 |
|               | 16 EL 12 UN   |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |       |       | 01912 |       | 01913 |
| 16 ER 11.5 UN |               |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5         |                       |       |       |       |       | 01920 |
|               | 16 EL 11.5 UN |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5         |                       |       |       |       |       | 15536 |
| 16 ER 11 UN   |               |                | 0.043 | 0.059 | 1,1 | 1,5 | 11           |                       |       |       | 01921 |       | 01922 |
|               | 16 EL 11 UN   |                | 0.043 | 0.059 | 1,1 | 1,5 | 11           |                       |       |       |       |       | 15518 |
| 16 ER 10 UN   |               | 0.043          | 0.059 | 1,1   | 1,5 | 10  |              |                       |       | 01917 |       | 01918 |       |
|               | 16 EL 10 UN   | 0.043          | 0.059 | 1,1   | 1,5 | 10  |              |                       |       |       |       | 15502 |       |
| 16 ER 9 UN    |               | 0.047          | 0.067 | 1,2   | 1,7 | 9   |              |                       |       |       |       | 16119 |       |
|               | 16 EL 9 UN    | 0.047          | 0.067 | 1,2   | 1,7 | 9   |              |                       |       |       |       | 15865 |       |
| 16 ER 8 UN    |               | 0.047          | 0.063 | 1,2   | 1,6 | 8   |              | 16113                 |       | 01951 |       | 01952 |       |
|               | 16 EL 8 UN    | 0.047          | 0.063 | 1,2   | 1,6 | 8   |              |                       |       | 01916 |       | 02044 |       |

# THREADING



## VaiTHREAD™ Product Offering

### UN - 60° - External

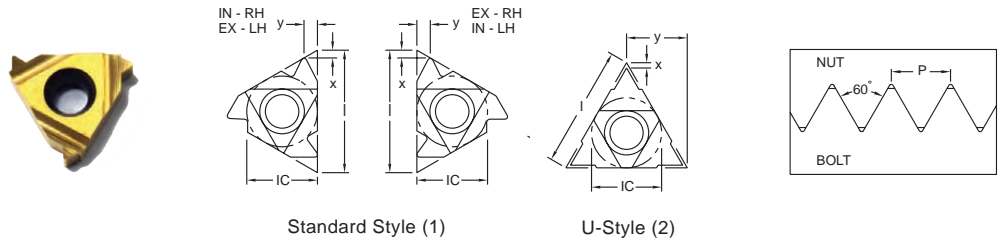


| Part Number      |              | Dimensions     |       |       |     |      | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|------------------|--------------|----------------|-------|-------|-----|------|--------------|-----------------------|------|-------|-------|-------|-------|
|                  |              | I.C. (in.)     | X     | Y     | x   | y    |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand       | Left Hand    | I (mm)         | Inch  | Inch  | mm  | mm   |              |                       |      |       |       |       |       |
| 22 ER 7 UN       |              | .500<br>(22)   | 0.063 | 0.091 | 1,6 | 2,3  | 7            |                       |      |       | 02006 | 02007 |       |
|                  | 22 EL 7 UN   |                | 0.063 | 0.091 | 1,6 | 2,3  | 7            |                       |      |       |       | 16942 |       |
| 22 ER 6 UN       |              |                | 0.063 | 0.091 | 1,6 | 2,3  | 6            | 08100                 |      |       |       | 02005 |       |
|                  | 22 EL 6 UN   |                | 0.063 | 0.091 | 1,6 | 2,3  | 6            |                       |      |       |       | 16934 |       |
| 22 ER 5 UN       |              |                | 0.067 | 0.098 | 1,7 | 2,5  | 5            |                       |      |       | 02002 | 02003 |       |
|                  | 22 EL 5 UN   |                | 0.067 | 0.098 | 1,7 | 2,5  | 5            |                       |      |       |       | 16909 |       |
| 22U ER L 4.5 UN* |              |                | 0.079 | 0.433 | 2,0 | 11   | 4.5          |                       |      |       | 17289 | 02018 |       |
| 22U ER L 4 UN*   |              |                | 0.079 | 0.433 | 2,0 | 11   | 4            |                       |      |       |       | 17282 |       |
| 27 ER 4.5 UN     |              | .625<br>(27,5) | 0.075 | 0.106 | 1,9 | 2,7  | 4.5          |                       |      |       |       | 02022 |       |
|                  | 27 EL 4.5 UN |                | 0.075 | 0.106 | 1,9 | 2,7  | 4.5          |                       |      |       |       | 17399 |       |
| 27 ER 4 UN       |              |                | 0.083 | 0.118 | 2,1 | 3,0  | 4            |                       |      |       | 02023 | 17452 |       |
|                  | 27 EL 4 UN   |                | 0.083 | 0.118 | 2,1 | 3,0  | 4            |                       |      |       |       | 17391 |       |
| 27U ER L 3 UN*   |              |                | 0.098 | 0.539 | 2,5 | 13,7 | 3            |                       |      |       |       | 17600 |       |


\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.



U-Style (2)



Standard Style (1)




| Part Number    |              | Dimensions    |              |       |       |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |       |       |       |
|----------------|--------------|---------------|--------------|-------|-------|-----|--------------|-----------------------|------|-------|-------|-------|-------|-------|-------|-------|
|                |              | I.C. (in.)    | X            | Y     | x     | y   |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |       |       |       |
| Right<br>Hand  | Left<br>Hand | I (mm)        | Inch         | Inch  | mm    | mm  |              |                       |      |       |       |       |       |       |       |       |
| 06 IR 32 UN    |              | .156<br>(6,9) | 0.031        | 0.020 | 0,8   | 0,5 | 32           |                       |      | 01880 |       |       |       |       |       |       |
| 06 IR 28 UN    |              |               | 0.031        | 0.024 | 0,8   | 0,6 | 28           |                       |      | 01879 |       |       |       |       |       |       |
| 06 IR 24 UN    |              |               | 0.028        | 0.024 | 0,7   | 0,6 | 24           |                       |      | 01878 |       |       |       |       |       |       |
| 06 IR 20 UN    |              |               | 0.024        | 0.024 | 0,6   | 0,6 | 20           |                       |      | 01877 |       |       |       |       |       |       |
| 06 IR 18 UN    |              |               | 0.024        | 0.028 | 0,6   | 0,7 | 18           |                       |      | 01876 |       |       |       |       |       |       |
| 08 IR 32 UN    |              | .187<br>(8,7) | 0.024        | 0.020 | 0,6   | 0,5 | 32           |                       |      | 01886 |       |       |       |       |       |       |
| 08 IR 24 UN    |              |               | 0.024        | 0.024 | 0,6   | 0,6 | 24           |                       |      | 01884 |       |       |       | 10955 |       |       |
| 08 IR 20 UN    |              |               | 0.024        | 0.028 | 0,6   | 0,7 | 20           |                       |      | 01883 |       |       |       | 14085 |       |       |
| 08 IR 18 UN    |              |               | 0.024        | 0.028 | 0,6   | 0,7 | 18           |                       |      | 01882 |       |       |       | 10953 |       |       |
| 08 IR 16 UN    |              |               | 0.024        | 0.028 | 0,6   | 0,7 | 16           |                       |      | 01881 |       |       |       |       |       |       |
|                | 08 IL 16 UN  |               | 0.024        | 0.028 | 0,6   | 0,7 | 16           |                       |      | 09445 |       |       |       |       |       |       |
| 08 IR 14 UN    |              |               | 0.024        | 0.031 | 0,6   | 0,8 | 14           |                       |      | 02031 |       |       |       |       |       |       |
| 08U IR L 14 UN |              |               | 0.039        | 0.157 | 1,0   | 4,0 | 14           |                       |      | 10891 |       |       |       |       |       |       |
| 08U IR L 13 U  |              |               | 0.039        | 0.157 | 1,0   | 4,0 | 13           |                       |      | 01889 |       |       |       |       |       |       |
| 08U IR L 12 UN |              |               | 0.035        | 0.157 | 0,9   | 4,0 | 12           |                       |      | 10771 |       |       |       |       |       |       |
| 08U IR L 11 UN |              |               | 0.035        | 0.157 | 0,9   | 4,0 | 11           |                       |      | 01888 |       |       |       |       |       |       |
| 11 IR 72 UN    |              |               | .250<br>(11) | 0.031 | 0.012 | 0,8 | 0,3          | 72                    |      |       |       |       |       |       | 15428 |       |
| 11 IR 64 UN    |              |               |              | 0.031 | 0.016 | 0,8 | 0,4          | 64                    |      |       |       |       |       |       |       | 15425 |
| 11 IR 56 UN    |              |               |              | 0.028 | 0.016 | 0,7 | 0,4          | 56                    |      |       |       |       |       |       |       | 15413 |
| 11 IR 48 UN    |              | 0.024         |              | 0.024 | 0,6   | 0,6 | 48           |                       |      |       |       |       |       |       | 15401 |       |
| 11 IR 44 UN    |              | 0.024         |              | 0.024 | 0,6   | 0,6 | 44           |                       |      |       |       |       |       |       | 15393 |       |
| 11 IR 40 UN    |              | 0.024         |              | 0.024 | 0,6   | 0,6 | 40           |                       |      |       |       |       |       |       | 01910 |       |
| 11 IR 32 UN    |              | 0.024         |              | 0.024 | 0,6   | 0,6 | 32           |                       |      |       |       |       |       |       | 01908 |       |
| 11 IR 28 UN    |              | 0.024         |              | 0.028 | 0,6   | 0,7 | 28           |                       |      |       |       |       |       |       | 01907 |       |
| 11 IR 27 UN    |              | 0.028         |              | 0.031 | 0,7   | 0,8 | 27           |                       |      |       |       |       |       |       | 02036 |       |
| 11 IR 24 UN    |              | 0.028         |              | 0.031 | 0,7   | 0,8 | 24           |                       |      |       |       |       | 01904 | 01905 |       |       |
| 11 IR 20 UN    |              | 0.031         |              | 0.035 | 0,8   | 0,9 | 20           |                       |      |       |       | 01902 | 01903 |       |       |       |
| 11 IR 18 UN    |              | 0.031         |              | 0.039 | 0,8   | 1,0 | 18           |                       |      |       |       | 01900 | 01901 |       |       |       |
| 11 IR 16 UN    |              | 0.035         |              | 0.043 | 0,9   | 1,1 | 16           |                       |      |       |       | 01898 | 01899 |       |       |       |
| 11 IR 14 UN    |              | 0.035         |              | 0.043 | 0,9   | 1,1 | 14           |                       |      |       |       | 01896 | 01897 |       |       |       |

# THREADING

## VaiTHREAD™ Product Offering

### UN - 60° - Internal

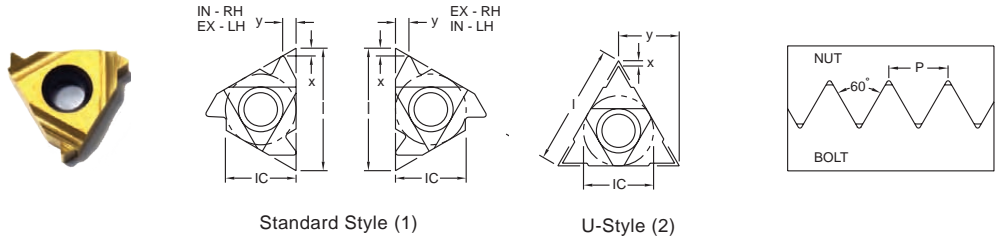




Threading

| Part Number      |               | Dimensions     |              |       |       |      | Pitch<br>TPI | Available Grades-EDP# |       |       |       |       |       |  |
|------------------|---------------|----------------|--------------|-------|-------|------|--------------|-----------------------|-------|-------|-------|-------|-------|--|
|                  |               | I.C. (in.)     | X            | Y     | x     | y    |              | VC5                   | VC29  | VC901 | VC905 | VC929 | VC942 |  |
| Right<br>Hand    | Left<br>Hand  | I (mm)         | Inch         | Inch  | mm    | mm   |              |                       |       |       |       |       |       |  |
| 16 IR 40 UN      |               | .375<br>(16,5) | 0.024        | 0.024 | 0.6   | 0.6  | 40           |                       |       |       |       | 02049 |       |  |
| 16 IR 36 UN      |               |                | 0.024        | 0.024 | 0.6   | 0.6  | 36           |                       |       |       |       | 16794 |       |  |
| 16 IR 32 UN      |               |                | 0.024        | 0.024 | 0.6   | 0.6  | 32           |                       |       |       |       | 01984 |       |  |
|                  | 16 IL 32 UN   |                | 0.024        | 0.024 | 0.6   | 0.6  | 32           |                       |       |       |       | 16442 |       |  |
| 16 IR 28 UN      |               |                | 0.024        | 0.028 | 0.6   | 0.7  | 28           |                       |       |       | 01981 | 01982 |       |  |
|                  | 16 IL 28 UN   |                | 0.024        | 0.028 | 0.6   | 0.7  | 28           |                       |       |       |       | 16422 |       |  |
|                  | 16 IL 27 UN   |                | 0.028        | 0.031 | 0.7   | 0.8  | 27           |                       |       |       |       | 16414 |       |  |
| 16 IR 24 UN      |               |                | 0.028        | 0.031 | 0.7   | 0.8  | 24           |                       |       |       | 01977 | 01978 |       |  |
|                  | 16 IL 24 UN   |                | 0.028        | 0.031 | 0.7   | 0.8  | 24           |                       |       |       |       | 16386 |       |  |
| 16 IR 20 UN      |               |                | 0.031        | 0.035 | 0.8   | 0.9  | 20           |                       | 08084 |       | 01975 | 01976 |       |  |
|                  | 16 IL 20 UN   |                | 0.031        | 0.035 | 0.8   | 0.9  | 20           |                       |       |       |       | 02046 |       |  |
| 16 IR 18 UN      |               |                | 0.031        | 0.039 | 0.8   | 1.0  | 18           |                       |       |       | 01973 | 01974 |       |  |
|                  | 16 IL 18 UN   |                | 0.031        | 0.039 | 0.8   | 1.0  | 18           |                       |       |       | 01958 | 02045 |       |  |
| 16 IR 16 UN      |               |                | 0.035        | 0.043 | 0.9   | 1.1  | 18           |                       | 08082 |       | 01971 | 01972 |       |  |
|                  | 16 IL 16 UN   |                | 0.035        | 0.043 | 0.9   | 1.1  | 18           |                       |       |       |       | 01957 |       |  |
| 16 IR 14 UN      |               |                | 0.035        | 0.047 | 0.9   | 1.2  | 14           |                       |       |       | 01969 | 01970 |       |  |
|                  | 16 IL 14 UN   |                | 0.035        | 0.047 | 0.9   | 1.2  | 14           |                       |       |       |       | 16286 |       |  |
| 16 IR 13 UN      |               |                | 0.039        | 0.051 | 1.0   | 1.3  | 13           |                       |       |       |       | 01968 |       |  |
|                  | 16 IL 13 UN   |                | 0.039        | 0.051 | 1.0   | 1.3  | 13           |                       |       |       |       | 16258 |       |  |
| 16 IR 12 UN      |               |                | 0.043        | 0.055 | 1.1   | 1.4  | 12           | 08077                 | 08078 |       | 01965 | 01966 |       |  |
|                  | 16 IL 12 UN   |                | 0.043        | 0.055 | 1.1   | 1.4  | 12           |                       |       |       | 01955 | 01956 |       |  |
| 16 IR 11.5 UN    |               |                | 0.043        | 0.059 | 1.1   | 1.5  | 11.5         |                       |       |       |       | 01962 |       |  |
|                  | 16 IL 11.5 UN |                | 0.043        | 0.059 | 1.1   | 1.5  | 11.5         |                       |       |       |       | 16232 |       |  |
| 16 IR 11 UN      |               |                | 0.043        | 0.059 | 1.1   | 1.5  | 11           |                       |       |       | 01963 | 01964 |       |  |
|                  | 16 IL 11 UN   |                | 0.043        | 0.059 | 1.1   | 1.5  | 11           |                       |       |       |       | 16213 |       |  |
| 16 IR 10 UN      |               |                | 0.043        | 0.059 | 1.1   | 1.5  | 10           |                       |       |       | 01960 | 01961 |       |  |
| 16 IR 9 UN       |               |                | 0.047        | 0.067 | 1.2   | 1.7  | 9            |                       |       |       | 01995 | 01996 |       |  |
| 16 IR 8 UN       |               |                | 0.043        | 0.059 | 1.1   | 1.5  | 8            | 08098                 | 08099 |       | 01993 | 01994 |       |  |
| 22 IR 7 UN       |               |                | .005<br>(22) | 0.063 | 0.091 | 1.6  | 2.3          | 7                     |       |       |       | 02016 | 02017 |  |
|                  | 22 IL 7 UN    |                |              | 0.063 | 0.091 | 1.6  | 2.3          | 7                     |       |       |       |       | 17135 |  |
| 22 IR 6 UN       |               | 0.063          |              | 0.091 | 1.6   | 2.3  | 6            | 08102                 |       |       | 02014 | 02015 |       |  |
|                  | 22 IL 6 UN    | 0.063          |              | 0.091 | 1.6   | 2.3  | 6            |                       |       |       |       | 17127 |       |  |
| 22 IR 5 UN       |               | 0.063          |              | 0.091 | 1.6   | 2.3  | 5            |                       |       |       |       | 02013 |       |  |
|                  | 22 IL 5 UN    | 0.063          |              | 0.091 | 1.6   | 2.3  | 5            |                       |       |       |       | 17102 |       |  |
| 22U IR L 4.5 UN* |               | 0.094          | 0.433        | 2.4   | 11    | 4.5  |              |                       |       |       | 02021 |       |       |  |
| 27 IR 4.5 UN     |               | .625<br>(27,5) | 0.067        | 0.114 | 1.7   | 2.4  | 4.5          | 08111                 |       |       | 02026 | 02027 |       |  |
| 27 IR 4 UN       |               |                | 0.071        | 0.106 | 1.8   | 2.7  | 4            |                       |       |       | 02028 | 02029 |       |  |
|                  | 27 IL 4 UN    |                | 0.071        | 0.106 | 1.8   | 2.7  | 4            |                       |       |       | 17494 |       |       |  |
| 27U IR L 3 UN*   |               |                | 0.106        | 0.539 | 2.7   | 13.7 | 3            |                       |       |       |       | 17652 |       |  |

\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.

## VaITHREAD™ Product Offering

### UN - 60° - Chipbreaker - External



Standard Style (1)

| Part Number  |           | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |
|--------------|-----------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|-------|
|              |           | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC905 | VC922 | VC929 |
| Right Hand   | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |       |
| 16 ERB 24 UN |           | .375<br>(16,5) | 0.028 | 0.031 | 0,7 | 0,8 | 24           |                       |      |       | 10917 |       |
| 16 ERB 20 UN |           |                | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       |      |       | 10915 |       |
| 16 ERB 18 UN |           |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 10912 |       |
| 16 ERB 16 UN |           |                | 0.035 | 0.043 | 0,9 | 1,1 | 16           |                       |      |       | 10909 |       |
| 16 ERB 14 UN |           |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |      |       | 10906 |       |
| 16 ERB 12 UN |           |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |      |       | 09474 |       |
| 16 ERB 10 UN |           |                | 0.043 | 0.059 | 1,1 | 1,5 | 10           |                       |      |       | 20335 |       |
| 16 ERB 8 UN  |           |                | 0.047 | 0.063 | 1,2 | 1,6 | 8            |                       |      |       | 10921 |       |




### UN - 60° - Chipbreaker - Internal

| Part Number  |           | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |
|--------------|-----------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|-------|
|              |           | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC905 | VC922 | VC929 |
| Right Hand   | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |       |
| 16 IRB 18 UN |           | .375<br>(16,5) | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 10934 |       |
| 16 IRB 16 UN |           |                | 0.035 | 0.043 | 0,9 | 1,1 | 16           |                       |      |       | 10933 |       |
| 16 IRB 14 UN |           |                | 0.035 | 0.047 | 0,9 | 1,2 | 14           |                       |      |       | 10930 |       |
| 16 IRB 12 UN |           |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |      |       | 10926 |       |
| 16 IRB 10 UN |           |                | 0.043 | 0.059 | 1,1 | 1,5 | 10           |                       |      |       | 20336 |       |
| 16 IRB 8 UN  |           |                | 0.043 | 0.059 | 1,1 | 1,5 | 8            |                       |      |       | 12769 |       |

# THREADING

## VaiTHREAD™ Product Offering

### UNJ - 60° - External






Standard Style (1)

| Part Number  |              | Dimensions     |       |       |      |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|--------------|--------------|----------------|-------|-------|------|-----|--------------|-----------------------|------|-------|-------|-------|-------|
|              |              | I.C. (in.)     | X     | Y     | x    | y   |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand   | Left Hand    | I (mm)         | Inch  | Inch  | mm   | mm  |              |                       |      |       |       |       |       |
| 16 ER 32 UNJ |              | .375<br>(16,5) | 0.024 | 0.024 | 0,6  | 0,6 | 32           |                       |      |       | 02332 | 02333 |       |
|              | 16 EL 32 UNJ |                | 0.024 | 0.024 | 0,6  | 0,6 | 32           |                       |      |       |       | 15750 |       |
| 16 ER 28 UNJ |              |                | 0.024 | 0.024 | 0,6  | 0,6 | 28           |                       |      |       | 02330 | 02331 |       |
|              | 16 EL 28 UNJ |                | 0.024 | 0.024 | 0,6  | 0,6 | 28           |                       |      |       |       | 15730 |       |
| 16 ER 24 UNJ |              |                | 0.027 | 0.031 | 0,7  | 0,8 | 24           |                       |      |       | 02328 | 02329 |       |
|              | 16 EL 24 UNJ |                | 0.027 | 0.031 | 0,7  | 0,8 | 24           |                       |      |       |       | 15692 |       |
| 16 ER 20 UNJ |              |                | 0.031 | 0.035 | 0,8  | 0,9 | 20           |                       |      |       | 02326 | 02327 |       |
|              | 16 EL 20 UNJ |                | 0.031 | 0.035 | 0,8  | 0,9 | 20           |                       |      |       |       | 15678 |       |
| 16 ER 18 UNJ |              |                | 0.031 | 0.039 | 0,8  | 1,0 | 18           |                       |      |       | 02324 | 02325 |       |
|              | 16 EL 18 UNJ |                | 0.031 | 0.039 | 0,8  | 1,0 | 18           |                       |      |       |       | 15651 |       |
| 16 ER 16 UNJ |              |                | 0.031 | 0.039 | 0,8  | 1,0 | 16           |                       |      |       | 02322 | 02323 |       |
|              | 16 EL 16 UNJ |                | 0.031 | 0.039 | 0,8  | 1,0 | 16           |                       |      |       |       | 15626 |       |
| 16 ER 14 UNJ |              |                | 0.039 | 0.047 | 1,0  | 1,2 | 14           |                       |      |       | 02320 | 02321 |       |
|              | 16 EL 14 UNJ |                | 0.039 | 0.047 | 1,0  | 1,2 | 14           |                       |      |       |       | 15599 |       |
| 16 ER 12 UNJ |              |                | 0.043 | 0.055 | 1,1  | 1,4 | 12           |                       |      |       | 02318 | 02319 |       |
| 16 ER 10 UNJ |              |                | 0.043 | 0.059 | 1,21 | 1,5 | 10           |                       |      |       |       | 15922 |       |
|              | 16 EL 10 UNJ | 0.043          | 0.059 | 1,21  | 1,5  | 10  |              |                       |      |       | 15506 |       |       |
|              | 16 EL 8 UNJ  | 0.047          | 0.063 | 1,2   | 1,6  | 8   |              |                       |      |       | 15857 |       |       |

### UNJ - 60° - Internal

| Part Number  |           | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|--------------|-----------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|-------|-------|
|              |           | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand   | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |       |       |
| 16 IR 32 UNJ |           | .375<br>(16,5) | 0.024 | 0.024 | 0,6 | 0,6 | 32           |                       |      |       |       |       | 16786 |
| 16 IR 28 UNJ |           |                | 0.024 | 0.024 | 0,6 | 0,6 | 28           |                       |      |       |       |       | 16772 |
| 16 IR 24 UNJ |           |                | 0.027 | 0.031 | 0,7 | 0,8 | 24           |                       |      |       |       |       | 16747 |
| 16 IR 20 UNJ |           |                | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       |      |       | 16733 | 16734 |       |
| 16 IR 18 UNJ |           |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       |       | 16711 |       |
| 16 IR 16 UNJ |           |                | 0.031 | 0.039 | 0,8 | 1,0 | 16           |                       |      |       | 16692 | 16693 |       |
| 16 IR 14 UNJ |           |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |      |       |       | 16670 |       |
| 16 IR 12 UNJ |           |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |      |       | 02339 | 16645 |       |
| 16 IR 8 UNJ  |           |                | 0.047 | 0.063 | 1,2 | 1,6 | 8            |                       |      |       |       | 16857 |       |

### NPT - External



Standard Style (1)

| Part Number    |                | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |       |       |       |       |       |
|----------------|----------------|----------------|-------|-------|-----|-----|--------------|-----------------------|-------|-------|-------|-------|-------|
|                |                | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29  | VC901 | VC905 | VC929 | VC942 |
| Right Hand     | Left Hand      | l (mm)         | Inch  | Inch  | mm  | mm  |              |                       |       |       |       |       |       |
| 16 ER 27 NPT   |                | .375<br>(16,5) | 0.028 | 0.031 | 0,7 | 0,8 | 27           |                       |       |       |       | 02187 |       |
| 16 ER 18 NPT   |                |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       | 08182 |       | 02184 | 02185 |       |
|                | 16 EL 18 NPT   |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |       |       |       | 15640 |       |
| 16 ER 14 NPT   |                |                | 0.035 | 0.047 | 0,9 | 1,2 | 14           |                       | 08181 |       | 02182 | 02183 |       |
|                | 16 EL 14 NPT   |                | 0.035 | 0.047 | 0,9 | 1,2 | 14           |                       |       |       |       | 02209 |       |
| 16 ER 11.5 NPT |                |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5         |                       |       |       | 02179 | 02180 |       |
|                | 16 EL 11.5 NPT |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5         |                       |       |       |       | 02178 |       |
| 16 ER 8 NPT    |                |                | 0.051 | 0.071 | 1,3 | 1,8 | 8            |                       |       |       |       | 02188 | 02189 |
|                | 16 EL 8 NPT    |                | 0.051 | 0.071 | 1,3 | 1,8 | 8            |                       |       |       |       | 15839 |       |

### NPT - Internal



| Part Number    |                | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|----------------|----------------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|-------|-------|
|                |                | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand     | Left Hand      | l (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |       |       |
| 08 IR 27 NPT*  |                | .187<br>(8,7)  | 0.024 | 0.024 | 0,6 | 0,6 | 27           |                       |      | 02172 |       |       | 10962 |
| 08 IR 18 NPT*  |                |                | 0.024 | 0.024 | 0,6 | 0,6 | 18           |                       |      | 02170 |       |       | 10960 |
| 11 IR 18 NPT   |                | .250<br>(11)   | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 02175 | 02176 |       |
| 11 IR 14 NPT   |                |                | 0.031 | 0.039 | 0,8 | 1,0 | 14           |                       |      |       | 02173 | 02174 |       |
| 16 IR 27 NPT   |                | .375<br>(16,5) | 0.028 | 0.031 | 0,7 | 0,8 | 27           |                       |      |       |       | 02211 |       |
| 16 IR 18 NPT   |                |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 16702 |       |       |
| 16 IR 14 NPT   |                |                | 0.035 | 0.047 | 0,9 | 1,2 | 14           |                       |      |       | 02194 | 02195 |       |
|                | 16 IL 14 NPT   |                | 0.035 | 0.047 | 0,9 | 1,2 | 14           |                       |      |       |       | 16274 |       |
| 16 IR 11.5 NPT |                |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5         |                       |      |       | 02190 | 02191 |       |
|                | 16 IL 11.5 NPT |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5         |                       |      |       |       | 16224 |       |
| 16 IR 8 NPT    |                |                | 0.051 | 0.071 | 1,3 | 1,8 | 8            |                       |      |       | 02196 | 02197 |       |
|                | 16 IL 8 NPT    |                | 0.051 | 0.071 | 1,3 | 1,8 | 8            |                       |      |       |       | 16532 |       |

\*For Thread Types: 1/8" - 27 NPT; 1/4" - 18 NPT

# THREADING

## VaiTHREAD™ Product Offering

### NPT - Chipbreaker - External



Standard Style (1)

| Part Number     |           | Dimensions     |       |       |     |     |       | Available Grades-EDP# |      |       |       |       |       |
|-----------------|-----------|----------------|-------|-------|-----|-----|-------|-----------------------|------|-------|-------|-------|-------|
|                 |           | I.C. (in.)     | X     | Y     | x   | y   | Pitch | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand      | Left Hand | l (mm)         | Inch  | Inch  | mm  | mm  | TPI   |                       |      |       |       |       |       |
| 16 ERB 18 NPT*  |           | .375<br>(16,5) | 0.031 | 0.039 | 0,8 | 1,0 | 18    |                       |      |       |       | 10911 |       |
| 16 ERB 14 NPT*  |           |                | 0.035 | 0.047 | 0,9 | 1,2 | 14    |                       |      |       |       | 10905 |       |
| 16 ERB 115 NPT* |           |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5  |                       |      |       |       | 08825 |       |
| 16 ERB 8 NPT*   |           |                | 0.051 | 0.071 | 1,3 | 1,8 | 8     |                       |      |       |       | 10920 |       |

### NPT - Chipbreaker - Internal



| Part Number     |           | Dimensions     |       |       |     |     |       | Available Grades-EDP# |      |       |       |       |       |
|-----------------|-----------|----------------|-------|-------|-----|-----|-------|-----------------------|------|-------|-------|-------|-------|
|                 |           | I.C. (in.)     | X     | Y     | x   | y   | Pitch | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right Hand      | Left Hand | l (mm)         | Inch  | Inch  | mm  | mm  | TPI   |                       |      |       |       |       |       |
| 16 IRB 14 NPT*  |           | .375<br>(16,5) | 0.035 | 0.047 | 0,9 | 1,2 | 14    |                       |      |       |       | 10927 |       |
| 16 IRB 115 NPT* |           |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5  |                       |      |       |       | 10924 |       |
| 16 IRB 8 NPT*   |           |                | 0.051 | 0.071 | 1,3 | 1,8 | 8     |                       |      |       |       | 10944 |       |

\* B-Style inserts have a ground profile and pressed-in chipform



## ValTHREAD™ Product Offering

### NPTF - External



Standard Style (1)

| Part Number     |                 | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|-----------------|-----------------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|-------|-------|
|                 |                 | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right<br>Hand   | Left<br>Hand    | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |       |       |
| 11 ER 18 NPTF   |                 | .250<br>(11)   | 0.031 | 0.039 | 0.8 | 1.0 | 18           |                       |      |       |       | 14333 |       |
|                 | 11 EL 18 NPTF   |                | 0.031 | 0.039 | 0.8 | 1.0 | 18           |                       |      |       |       | 12175 |       |
| 16 ER 27 NPTF   |                 | .375<br>(16,5) | 0.028 | 0.028 | 0.7 | 0.7 | 27           |                       |      |       |       | 16033 |       |
| 16 ER 18 NPTF   |                 |                | 0.031 | 0.039 | 0.8 | 1.0 | 18           |                       |      |       |       | 15997 |       |
| 16 ER 14 NPTF   |                 |                | 0.035 | 0.047 | 0.9 | 1.2 | 14           |                       |      |       |       | 15965 |       |
|                 | 16 EL 14 NPTF   |                | 0.035 | 0.047 | 0.9 | 1.2 | 14           |                       |      |       |       | 15586 |       |
| 16 ER 11.5 NPTF |                 |                | 0.043 | 0.059 | 1.1 | 1.5 | 11.5         |                       |      |       |       | 15938 |       |
|                 | 16 EL 11.5 NPTF |                | 0.043 | 0.059 | 1.1 | 1.5 | 11.5         |                       |      |       |       | 15532 |       |
| 16 ER 8 NPTF    |                 |                | 0.051 | 0.071 | 1.3 | 1.8 | 8            |                       |      |       |       | 02210 |       |
|                 | 16 EL 8 NPTF    |                | 0.051 | 0.071 | 1.3 | 1.8 | 8            |                       |      |       |       | 15843 |       |

### NPTF - Internal




| Part Number     |              | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |       |       |
|-----------------|--------------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|-------|-------|
|                 |              | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC901 | VC905 | VC929 | VC942 |
| Right<br>Hand   | Left<br>Hand | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |       |       |
| 08 IR 18 NPTF*  |              | .187<br>(6,9)  | 0.024 | 0.024 | 0,6 | 0,6 | 18           |                       |      | 02171 |       |       | 10961 |
| 11 IR 14 NPTF   |              | .250<br>(11)   | 0.031 | 0.039 | 0,8 | 1,0 | 14           |                       |      |       |       | 02207 |       |
| 16 IR 14 NPTF   |              | .375<br>(16,5) | 0.035 | 0.047 | 0,9 | 1,2 | 14           |                       |      |       |       | 16664 |       |
| 16 IR 11.5 NPTF |              |                | 0.043 | 0.059 | 1,1 | 1,5 | 11.5         |                       |      |       | 02192 | 02193 |       |

\*For Thread Types 1/4" - 18 NPT

# THREADING




## VaiTHREAD™ Product Offering

### ISO - 60° - External



Standard Style (1)

| Part Number    |                | Dimensions     |              |       |       |     | Pitch<br>mm | Available Grades-EDP# |      |       |       |       |
|----------------|----------------|----------------|--------------|-------|-------|-----|-------------|-----------------------|------|-------|-------|-------|
|                |                | I.C. (in.)     | X            | Y     | x     | y   |             | VC5                   | VC29 | VC905 | VC929 |       |
| Right<br>Hand  | Left<br>Hand   | I (mm)         | Inch         | Inch  | mm    | mm  |             |                       |      |       |       |       |
| 11 ER 0.5 ISO  |                | .250<br>(11)   | 0.024        | 0.024 | 0,6   | 0,6 | 0,5         |                       |      |       | 13593 |       |
| 11 ER 0.75 ISO |                |                | 0.024        | 0.024 | 0,6   | 0,6 | 0,75        |                       |      |       | 13705 |       |
| 11 ER 1.0 ISO  |                |                | 0.028        | 0.028 | 0,7   | 0,7 | 1,0         |                       |      |       | 13715 |       |
| 11 ER 1.25 ISO |                |                | 0.031        | 0.035 | 0,8   | 0,9 | 1,25        |                       |      |       | 13819 |       |
| 11 ER 1.5 ISO  |                |                | 0.031        | 0.039 | 0,8   | 1,0 | 1,5         |                       |      |       | 02115 |       |
| 11 ER 1.75 ISO |                |                | 0.031        | 0.043 | 0,8   | 1,1 | 1,75        |                       |      |       | 14323 |       |
| 16 ER 0.35 ISO |                | .375<br>(16,5) | 0.031        | 0.016 | 0,8   | 0,4 | 0,35        |                       |      |       | 15883 |       |
| 16 ER 0.5 ISO  |                |                | 0.024        | 0.024 | 0,6   | 0,6 | 0,5         |                       |      |       | 02057 |       |
|                | 16 EL 0.5 ISO  |                | 0.024        | 0.024 | 0,6   | 0,6 | 0,5         |                       |      |       | 15465 |       |
| 16 ER 0.75 ISO |                |                | 0.024        | 0.024 | 0,6   | 0,6 | 0,75        |                       |      |       | 02059 |       |
|                | 16 EL 0.75 ISO |                | 0.024        | 0.024 | 0,6   | 0,6 | 0,75        |                       |      |       | 02119 |       |
| 16 ER 0.8 ISO  |                |                | 0.024        | 0.024 | 0,6   | 0,6 | 0,8         |                       |      |       | 15903 |       |
|                | 16 EL 0.8 ISO  |                | 0.024        | 0.024 | 0,6   | 0,6 | 0,8         |                       |      |       | 15480 |       |
| 16 ER 1.0 ISO  |                |                | 0.028        | 0.028 | 0,7   | 0,7 | 1,0         |                       |      | 02060 | 02061 |       |
|                | 16 EL 1.0 ISO  |                | 0.028        | 0.028 | 0,7   | 0,7 | 1,0         |                       |      |       | 02120 |       |
| 16 ER 1.25 ISO |                |                | 0.031        | 0.035 | 0,8   | 0,9 | 1,25        |                       |      | 02062 | 02063 |       |
|                | 16 EL 1.25 ISO |                | 0.031        | 0.035 | 0,8   | 0,9 | 1,25        |                       |      |       | 02121 |       |
| 16 ER 1.5 ISO  |                |                | 0.031        | 0.039 | 0,8   | 1,0 | 1,5         | 08128                 |      | 02064 | 02065 |       |
|                | 16 EL 1.5 ISO  |                | 0.031        | 0.039 | 0,8   | 1,0 | 1,5         |                       |      |       | 02122 |       |
| 16 ER 1.75 ISO |                |                | 0.035        | 0.047 | 0,9   | 1,2 | 1,75        |                       |      | 02066 | 02067 |       |
|                | 16 EL 1.75 ISO |                | 0.035        | 0.047 | 0,9   | 1,2 | 1,75        |                       |      |       | 15636 |       |
| 16 ER 2.0 ISO  |                |                | 0.039        | 0.051 | 1,0   | 1,3 | 2,0         |                       |      | 02068 | 02069 |       |
|                | 16 EL 2.0 ISO  |                | 0.039        | 0.051 | 1,0   | 1,3 | 2,0         |                       |      | 02123 | 02124 |       |
| 16 ER 2.5 ISO  |                |                | 0.043        | 0.059 | 1,1   | 1,5 | 2,5         |                       |      | 02070 |       |       |
|                | 16 EL 2.5 ISO  |                | 0.043        | 0.059 | 1,1   | 1,5 | 2,5         |                       |      |       | 15700 |       |
| 16 ER 3.0 ISO  |                |                | 0.047        | 0.063 | 1,2   | 1,6 | 3,0         |                       |      | 02072 | 02073 |       |
|                | 16 EL 3.0 ISO  |                | 0.047        | 0.063 | 1,2   | 1,6 | 3,0         |                       |      |       | 15742 |       |
| 22 ER 3.5 ISO  |                |                | .500<br>(22) | 0.063 | 0.091 | 1,6 | 2,3         | 3,5                   |      |       | 02091 |       |
|                | 22 EL 3.5 ISO  |                |              | 0.063 | 0.091 | 1,6 | 2,3         | 3,5                   |      |       |       | 16879 |
| 22 ER 4.0 ISO  |                |                |              | 0.063 | 0.091 | 1,6 | 2,3         | 4,0                   |      |       | 02093 | 02094 |
|                | 22 EL 4.0 ISO  | 0.063          |              | 0.091 | 1,6   | 2,3 | 4,0         |                       |      |       | 16890 |       |
| 22 ER 4.5 ISO  |                | 0.067          |              | 0.094 | 1,7   | 2,4 | 4,5         |                       |      | 02095 |       |       |
|                | 22 EL 4.5 ISO  | 0.067          |              | 0.094 | 1,7   | 2,4 | 4,5         |                       |      |       | 16894 |       |
| 22 ER 5.0 ISO  |                | 0.067          |              | 0.098 | 1,7   | 2,5 | 5,0         |                       |      | 02097 |       |       |
|                | 22 EL 5.0 ISO  | 0.067          |              | 0.098 | 1,7   | 2,5 | 5,0         |                       |      |       | 16917 |       |
| 27 ER 5.5 ISO  |                | .625<br>(27,5) | 0.075        | 0.106 | 1,9   | 2,7 | 5,5         |                       |      |       | 02104 |       |
|                | 27 EL 5.5 ISO  |                | 0.075        | 0.106 | 1,9   | 2,7 | 5,5         |                       |      |       | 17407 |       |
| 27 ER 6.0 ISO  |                |                | 0.079        | 0.114 | 2,0   | 2,9 | 6,0         |                       |      | 02105 | 02106 |       |
|                | 27 EL 6.0 ISO  |                | 0.079        | 0.114 | 2,0   | 2,9 | 6,0         |                       |      |       | 17414 |       |






Standard Style (1)

| Part Number    |                | Dimensions     |       |       |     |     | Pitch mm | Available Grades-EDP# |      |       |       |       |
|----------------|----------------|----------------|-------|-------|-----|-----|----------|-----------------------|------|-------|-------|-------|
|                |                | I.C. (in.)     | X     | Y     | x   | y   |          | VC5                   | VC29 | VC901 | VC905 | VC929 |
| Right Hand     | Left Hand      | I (mm)         | Inch  | Inch  | mm  | mm  |          |                       |      |       |       |       |
| 06 IR 0.75 ISO |                | .156<br>(6,9)  | 0.031 | 0.020 | 0,8 | 0,5 | 0,75     |                       |      | 02050 |       |       |
|                | 06 IL 0.75 ISO |                | 0.031 | 0.020 | 0,8 | 0,5 | 0,75     |                       |      | 07925 |       |       |
| 06 IR 1.0 ISO  |                |                | 0.028 | 0.024 | 0,7 | 0,6 | 1,0      |                       |      | 02110 |       |       |
|                | 06 IL 1.0 ISO  |                | 0.028 | 0.024 | 0,7 | 0,6 | 1,0      |                       |      | 02109 |       |       |
| 06 IR 1.25 ISO |                |                | 0.024 | 0.024 | 0,6 | 0,6 | 1,25     |                       |      | 08466 |       |       |
|                | 06 IL 1.25 ISO |                | 0.024 | 0.024 | 0,6 | 0,6 | 1,25     |                       |      | 07928 |       |       |
| 08 IR 0.75 ISO |                | .187<br>(8,7)  | 0.024 | 0.020 | 0,6 | 0,5 | 0,75     |                       |      | 10066 |       |       |
|                | 08 IL 0.75 ISO |                | 0.024 | 0.020 | 0,6 | 0,5 | 0,75     |                       |      | 08847 |       |       |
| 08 IR 1.0 ISO  |                |                | 0.024 | 0.024 | 0,6 | 0,6 | 1,0      |                       |      | 02111 |       |       |
|                | 08 IL 1.0 ISO  |                | 0.024 | 0.024 | 0,6 | 0,6 | 1,0      |                       |      | 08855 |       |       |
| 08 IR 1.25 ISO |                |                | 0.024 | 0.028 | 0,6 | 0,7 | 1,25     |                       |      | 02112 |       |       |
|                | 08 IL 1.25 ISO |                | 0.024 | 0.028 | 0,6 | 0,7 | 1,25     |                       |      | 08870 |       |       |
| 08 IR 1.5 ISO  |                |                | 0.024 | 0.028 | 0,6 | 0,7 | 1,5      |                       |      | 02113 |       |       |
| 11 IR 0.5 ISO  |                | .250<br>(11)   | 0.024 | 0.024 | 0,6 | 0,6 | 0,5      |                       |      |       |       | 15231 |
|                |                |                | 0.024 | 0.024 | 0,6 | 0,6 | 0,75     |                       |      |       |       | 02116 |
| 11 IR 1.0 ISO  |                |                | 0.024 | 0.028 | 0,6 | 0,7 | 1,0      |                       |      |       |       | 02117 |
|                |                |                | 0.031 | 0.031 | 0,8 | 0,8 | 1,25     |                       |      |       |       | 15252 |
| 11 IR 1.5 ISO  |                |                | 0.031 | 0.039 | 0,8 | 1,0 | 1,5      |                       |      | 02054 |       | 02118 |
|                |                |                | 0.031 | 0.043 | 0,8 | 1,1 | 1,75     |                       |      |       |       | 15288 |
| 16 IR 0.5 ISO  |                | .375<br>(16,5) | 0.024 | 0.024 | 0,6 | 0,6 | 0,5      |                       |      |       |       | 16591 |
|                | 16 IL 0.5 ISO  |                | 0.024 | 0.024 | 0,6 | 0,6 | 0,5      |                       |      |       |       | 16161 |
| 16 IR 0.75 ISO |                |                | 0.024 | 0.024 | 0,6 | 0,6 | 0,75     |                       |      |       |       | 02075 |
|                | 16 IL 0.75 ISO |                | 0.024 | 0.024 | 0,6 | 0,6 | 0,75     |                       |      |       |       | 16173 |
| 16 IR 1.0 ISO  |                |                | 0.024 | 0.028 | 0,6 | 0,7 | 1,0      |                       |      |       |       | 02076 |
|                | 16 IL 1.0 ISO  |                | 0.024 | 0.028 | 0,6 | 0,7 | 1,0      |                       |      |       |       | 02128 |
| 16 IR 1.25 ISO |                |                | 0.031 | 0.035 | 0,8 | 0,9 | 1,25     |                       |      |       |       | 02079 |
|                | 16 IL 1.25 ISO |                | 0.031 | 0.035 | 0,8 | 0,9 | 1,25     |                       |      |       |       | 16254 |
| 16 IR 1.5 ISO  |                |                | 0.031 | 0.039 | 0,8 | 1,0 | 1,5      |                       |      |       | 02080 | 02081 |
|                | 16 IL 1.5 ISO  |                | 0.031 | 0.039 | 0,8 | 1,0 | 1,5      |                       |      |       |       | 16298 |
| 16 IR 1.75 ISO |                |                | 0.035 | 0.047 | 0,9 | 1,2 | 1,75     |                       |      |       |       | 02083 |
|                | 16 IL 1.75 ISO |                | 0.035 | 0.047 | 0,9 | 1,2 | 1,75     |                       |      |       |       | 16329 |
| 16 IR 2.0 ISO  |                |                | 0.039 | 0.051 | 1,0 | 1,3 | 2,0      |                       |      |       | 02084 | 02085 |
|                | 16 IL 2.0 ISO  |                | 0.039 | 0.051 | 1,0 | 1,3 | 2,0      |                       |      |       |       | 16367 |
| 16 IR 2.5 ISO  |                |                | 0.043 | 0.059 | 1,1 | 1,5 | 2,5      |                       |      |       | 02086 | 02087 |
|                | 16 IL 2.5 ISO  |                | 0.043 | 0.059 | 1,1 | 1,5 | 2,5      |                       |      |       |       | 16398 |
| 16 IR 3.0 ISO  |                |                | 0.043 | 0.059 | 1,1 | 1,5 | 3,0      |                       |      |       | 02088 | 02089 |
|                | 16 IL 3.0 ISO  |                | 0.043 | 0.059 | 1,1 | 1,5 | 3,0      |                       |      |       |       | 16438 |

# THREADING

## VaiTHREAD™ Product Offering

### ISO - 60° - Internal





Standard Style (1)

| Part Number   |               | Dimensions     |       |       |     |     | Pitch<br>mm | Available Grades-EDP# |      |       |       |       |
|---------------|---------------|----------------|-------|-------|-----|-----|-------------|-----------------------|------|-------|-------|-------|
|               |               | I.C. (in.)     | X     | Y     | x   | y   |             | VC5                   | VC29 | VC901 | VC905 | VC929 |
| Right<br>Hand | Left<br>Hand  | I (mm)         | Inch  | Inch  | mm  | mm  |             |                       |      |       |       |       |
| 22 IR 3.5 ISO |               | .500<br>(22)   | 0.063 | 0.091 | 1,6 | 2,3 | 3,5         |                       |      |       | 02098 | 02099 |
|               | 22 IL 3.5 ISO |                | 0.063 | 0.091 | 1,6 | 2,3 | 3,5         |                       |      |       |       | 17063 |
| 22 IR 4.0 ISO |               |                | 0.063 | 0.091 | 1,6 | 2,3 | 4,0         |                       |      |       | 02100 | 02101 |
|               | 22 IL 4.0 ISO |                | 0.063 | 0.091 | 1,6 | 2,3 | 4,0         |                       |      |       |       | 17076 |
| 22 IR 4.5 ISO |               |                | 0.063 | 0.094 | 1,6 | 2,4 | 4,5         |                       |      |       |       | 17193 |
|               | 22 IL 4.5 ISO |                | 0.063 | 0.094 | 1,6 | 2,4 | 4,5         |                       |      |       |       | 17082 |
| 22 IR 5.0 ISO |               |                | 0.063 | 0.091 | 1,6 | 2,3 | 5,0         |                       |      |       | 02102 | 02103 |
|               | 22 IL 5.0 ISO |                | 0.063 | 0.091 | 1,6 | 2,3 | 5,0         |                       |      |       |       | 17110 |
| 27 IR 5.5 ISO |               | .625<br>(27,5) | 0.063 | 0.091 | 1,6 | 2,3 | 5,5         |                       |      |       |       | 02107 |
|               | 27 IL 5.5 ISO |                | 0.063 | 0.091 | 1,6 | 2,3 | 5,5         |                       |      |       |       | 17511 |
| 27 IR 6.0 ISO |               |                | 0.071 | 0.098 | 1,8 | 2,5 | 6,0         |                       |      |       | 02133 | 02108 |
|               | 27 IL 6.0 ISO |                | 0.071 | 0.098 | 1,8 | 2,5 | 6,0         |                       |      |       |       | 17519 |

## ValTHREAD™ Product Offering

### ISO - Chipbreaker - 55° - External



Standard Style (1)

| Part Number     |                 | Dimensions     |       |       |     |     | Pitch<br>mm | Available Grades-EDP# |      |       |       |       |
|-----------------|-----------------|----------------|-------|-------|-----|-----|-------------|-----------------------|------|-------|-------|-------|
|                 |                 | I.C. (in.)     | X     | Y     | x   | y   |             | VC5                   | VC29 | VC905 | VC929 | VC922 |
| Right Hand      | Left Hand       | I (mm)         | Inch  | Inch  | mm  | mm  |             |                       |      |       |       |       |
| 16 ERB 1.5 ISO* | 16 ERB 1.5 ISO* | .375<br>(16,5) | 0.031 | 0.039 | 0,8 | 1,0 | 1,5         |                       |      |       |       | 10907 |
| 16 ERB 2.0 ISO* | 16 ERB 2.0 ISO* |                | 0.039 | 0.051 | 1,0 | 1,3 | 2,0         |                       |      |       |       | 10913 |
| 16 ERB 3.0 ISO* | 16 ERB 3.0 ISO* |                | 0.047 | 0.063 | 1,2 | 1,6 | 3,0         |                       |      |       |       | 10918 |

### ISO - Chipbreaker - 55° - Internal




| Part Number     |           | Dimensions     |       |       |     |     | Pitch<br>mm | Available Grades-EDP# |      |       |       |       |
|-----------------|-----------|----------------|-------|-------|-----|-----|-------------|-----------------------|------|-------|-------|-------|
|                 |           | I.C. (in.)     | X     | Y     | x   | y   |             | VC5                   | VC29 | VC905 | VC929 | VC922 |
| Right Hand      | Left Hand | I (mm)         | Inch  | Inch  | mm  | mm  |             |                       |      |       |       |       |
| 16 IRB 1.5 ISO* |           | .375<br>(16,5) | 0.031 | 0.039 | 0,8 | 1,0 | 1,5         |                       |      |       |       | 10932 |
| 16 IRB 2.0 ISO* |           |                | 0.039 | 0.051 | 1,0 | 1,3 | 2,0         |                       |      |       |       | 10935 |
| 16 IRB 3.0 ISO* |           |                | 0.043 | 0.059 | 1,1 | 1,5 | 3,0         |                       |      |       |       | 24746 |

\* B-Style inserts have a ground profile and pressed-in chipform

# THREADING

## VaiTHREAD™ Product Offering



### ACME - 29° - External



Standard Style (1)  
U-Style not shown

| Part Number    |               | Dimensions       |       |       |     |      | Pitch<br>TPI | Available Grades-EDP# |       |       |       |
|----------------|---------------|------------------|-------|-------|-----|------|--------------|-----------------------|-------|-------|-------|
|                |               | I.C. (in.)       | X     | Y     | x   | y    |              | VC5                   | VC29  | VC905 | VC929 |
| Right<br>Hand  | Left<br>Hand  | l (mm)           | Inch  | Inch  | mm  | mm   |              |                       |       |       |       |
| 11 ER 16 ACME  |               | 0.250<br>(11)    | 0.035 | 0.039 | 0,9 | 1,0  | 16           |                       |       | 14047 | 14281 |
| 16 ER 16 ACME  |               | 0.375<br>(16, 5) | 0.039 | 0.043 | 1,0 | 1,1  | 16           |                       |       | 02224 | 02225 |
|                | 16 EL 16 ACME |                  | 0.039 | 0.043 | 1,0 | 1,1  | 16           |                       |       |       | 15616 |
| 16 ER 14 ACME  |               |                  | 0.039 | 0.047 | 1,0 | 1,2  | 14           |                       |       |       | 02265 |
|                | 16 EL 14 ACME |                  | 0.039 | 0.047 | 1,0 | 1,2  | 14           |                       |       |       | 15574 |
| 16 ER 12 ACME  |               |                  | 0.043 | 0.047 | 1,1 | 1,2  | 12           |                       |       | 02222 | 02223 |
|                | 16 EL 12 ACME |                  | 0.043 | 0.047 | 1,1 | 1,2  | 12           |                       |       |       | 15544 |
| 16 ER 10 ACME  |               |                  | 0.051 | 0.051 | 1,3 | 1,3  | 10           | 08191                 |       | 02220 | 02221 |
|                | 16 EL 10 ACME |                  | 0.051 | 0.051 | 1,3 | 1,3  | 10           |                       |       |       | 15488 |
| 16 ER 8 ACME   |               |                  | 0.059 | 0.059 | 1,5 | 1,5  | 8            |                       | 08195 | 02226 | 02227 |
|                | 16 EL 8 ACME  |                  | 0.059 | 0.059 | 1,5 | 1,5  | 8            |                       |       |       | 15833 |
| 22 ER 6 ACME   |               | 0.500<br>(22)    | 0.071 | 0.083 | 1,8 | 2,1  | 6            |                       |       | 02242 | 02243 |
|                | 22 EL 6 ACME  |                  | 0.071 | 0.083 | 1,8 | 2,1  | 6            |                       |       |       | 02239 |
| 22 ER 5 ACME   |               |                  | 0.079 | 0.091 | 2,0 | 2,3  | 5            | 08202                 |       | 02240 | 02241 |
|                | 22 EL 5 ACME  |                  | 0.079 | 0.091 | 2,0 | 2,3  | 5            |                       |       |       | 16897 |
| 22U ER 4 ACME* |               |                  | 0.091 | 0.433 | 2,3 | 11   | 4            |                       |       | 02250 | 02251 |
| 27 ER 4 ACME   |               | .625<br>(27)     | 0.091 | 0.106 | 2,3 | 2,7  | 4            |                       |       | 02255 | 02256 |
| 27U ER 3 ACME* |               |                  | 0.110 | 0.539 | 2,8 | 13,7 | 3            |                       |       | 02260 | 02261 |

\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.



Standard Style (1)  
U-Style not shown




| Part Number    |                | Dimensions       |       |       |     |      | Pitch<br>TPI | Available Grades-EDP# |       |       |       |
|----------------|----------------|------------------|-------|-------|-----|------|--------------|-----------------------|-------|-------|-------|
|                |                | I.C. (in.)       | X     | Y     | x   | y    |              | VC5                   | VC29  | VC905 | VC929 |
| Right Hand     | Left Hand      | I (mm)           | Inch  | Inch  | mm  | mm   |              |                       |       |       |       |
| 11 IR 16 ACME  |                | 0.250<br>(11)    | 0.039 | 0.039 | 1,0 | 1,0  | 16           |                       |       | 02219 | 15274 |
| 16 IR 16 ACME  |                | 0.375<br>(16, 5) | 0.039 | 0.043 | 1,0 | 1,1  | 16           |                       |       |       | 02235 |
|                | 16 IL 16 ACME  |                  | 0.039 | 0.043 | 1,0 | 1,1  | 16           |                       |       |       | 16310 |
| 16 IR 14 ACME  |                |                  | 0.039 | 0.047 | 1,0 | 1,2  | 14           |                       |       |       | 16657 |
|                | 16 IL 14 ACME  |                  | 0.039 | 0.047 | 1,0 | 1,2  | 14           |                       |       |       | 16266 |
| 16 IR 12 ACME  |                |                  | 0.043 | 0.047 | 1,1 | 1,2  | 12           |                       |       | 02231 | 02232 |
|                | 16 IL 12 ACME  |                  | 0.043 | 0.047 | 1,1 | 1,2  | 12           |                       |       |       | 02267 |
| 16 IR 10 ACME  |                |                  | 0.051 | 0.051 | 1,3 | 1,3  | 10           |                       |       | 02229 | 02230 |
|                | 16 IL 10 ACME  |                  | 0.051 | 0.051 | 1,3 | 1,3  | 10           |                       |       |       | 02266 |
| 16 IR 8 ACME   |                |                  | 0.059 | 0.059 | 1,5 | 1,5  | 8            | 08200                 | 08201 | 02236 | 02237 |
|                | 16 IL 8 ACME   |                  | 0.059 | 0.059 | 1,5 | 1,5  | 8            |                       |       |       | 02228 |
| 22 IR 6 ACME   |                | 0.500<br>(22)    | 0.071 | 0.083 | 1,8 | 2,1  | 6            |                       | 08207 | 02248 | 02249 |
|                | 22 IL 6 ACME   |                  | 0.071 | 0.083 | 1,8 | 2,1  | 6            |                       |       | 02245 | 17116 |
| 22 IR 5 ACME   |                |                  | 0.079 | 0.091 | 2,0 | 2,3  | 5            | 08205                 | 08206 | 02246 | 02247 |
|                | 22 IL 5 ACME   |                  | 0.079 | 0.091 | 2,0 | 2,3  | 5            |                       |       | 02244 | 17086 |
| 22U IR 4 ACME* |                |                  | 0.091 | 0.433 | 2,3 | 11   | 4            |                       |       |       | 02253 |
|                | 22U IL 4 ACME* |                  | 0.091 | 0.433 | 2,3 | 11   | 4            |                       |       |       | 17326 |
| 27 IR 4 ACME   |                | .625<br>(27)     | 0.091 | 0.106 | 2,3 | 2,7  | 4            |                       | 08213 | 02258 | 02259 |
|                | 27 IL 4 ACME   |                  | 0.091 | 0.106 | 2,3 | 2,7  | 4            |                       |       |       | 02271 |
| 27U IR 3 ACME* |                |                  | 0.110 | 0.539 | 2,8 | 13,7 | 3            |                       |       | 02262 | 02263 |

\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.

# THREADING

## VaiTHREAD™ Product Offering

### Stub ACME - 29° - External



Standard Style (1)  
U-Style not shown



| Part Number       |                   | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |       |       |       |
|-------------------|-------------------|----------------|-------|-------|-----|-----|--------------|-----------------------|-------|-------|-------|
|                   |                   | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29  | VC905 | VC929 |
| Right Hand        | Left Hand         | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |       |       |       |
| 11 ER 16 ST ACME  |                   | .250<br>(11)   | 0.039 | 0.039 | 1,0 | 1,0 | 16           |                       |       |       | 14291 |
| 16 ER 16 ST ACME  |                   | .375<br>(16,5) | 0.039 | 0.039 | 1,0 | 1,0 | 16           |                       |       | 02279 | 02280 |
|                   | 16 EL 16 ST ACME  |                | 0.039 | 0.039 | 1,0 | 1,0 | 16           |                       |       |       | 15620 |
| 16 ER 14 ST ACME  |                   |                | 0.043 | 0.043 | 1,1 | 1,1 | 14           |                       |       | 02278 | 15968 |
|                   | 16 EL 14 ST ACME  |                | 0.043 | 0.043 | 1,1 | 1,1 | 14           |                       |       |       | 15590 |
| 16 ER 12 ST ACME  |                   |                | 0.047 | 0.047 | 1,2 | 1,2 | 12           |                       |       | 02276 | 02277 |
|                   | 16 EL 12 ST ACME  |                | 0.047 | 0.047 | 1,2 | 1,2 | 12           |                       |       |       | 15549 |
| 16 ER 10 ST ACME  |                   |                | 0.051 | 0.051 | 1,3 | 1,3 | 10           |                       |       | 02274 | 02275 |
|                   | 16 EL 10 ST ACME  |                | 0.051 | 0.051 | 1,3 | 1,3 | 10           |                       |       |       | 02310 |
| 16 ER 8 ST ACME   |                   |                | 0.059 | 0.059 | 1,5 | 1,5 | 8            |                       |       | 02283 | 02284 |
|                   | 16 EL 8 ST ACME   |                | 0.059 | 0.059 | 1,5 | 1,5 | 8            |                       |       |       | 15851 |
| 16 ER 6 ST ACME   |                   | 0.071          | 0.071 | 1,8   | 1,8 | 6   |              |                       | 02281 | 02282 |       |
| 22 ER 5 ST ACME   |                   | .433<br>(17,5) | 0.079 | 0.091 | 2,0 | 2,3 | 5            |                       |       |       | 02298 |
|                   | 22 EL 5 ST ACME   |                | 0.079 | 0.091 | 2,0 | 2,3 | 5            |                       |       |       | 16901 |
| 22U ER 4 ST ACME* |                   |                | 0.098 | 0.433 | 2,5 | 11  | 4            |                       |       | 02303 | 02312 |
|                   | 22U EL 4 ST ACME* |                | 0.098 | 0.433 | 2,5 | 11  | 4            |                       |       | 17268 | 17269 |
| 22U ER 3 ST ACME* |                   | .130           | 0.433 | 3,3   | 11  | 3   |              |                       |       | 02302 |       |
| 27 ER 4 ST ACME   |                   | .625<br>(27)   | 0.091 | 0.094 | 2,3 | 2,4 | 4            |                       |       | 02306 | 02307 |
|                   | 27 EL 4 ST ACME   |                | 0.091 | 0.094 | 2,3 | 2,4 | 4            |                       |       |       | 17387 |
| 27 ER 3 ST ACME   |                   |                | .110  | 0.114 | 2,8 | 2,9 | 3            |                       |       | 02315 | 17428 |
|                   | 27 EL 3 ST ACME   |                | .110  | 0.114 | 2,8 | 2,9 | 3            |                       |       |       | 17377 |

\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.



## ValTHREAD™ Product Offering

### Stub ACME - 29° - Internal



Standard Style (1)  
U-Style not shown



| Part Number       |                   | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |       |       |       |
|-------------------|-------------------|----------------|-------|-------|-----|-----|--------------|-----------------------|-------|-------|-------|
|                   |                   | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29  | VC905 | VC929 |
| Right Hand        | Left Hand         | l (mm)         | Inch  | Inch  | mm  | mm  |              |                       |       |       |       |
| 11 IR 16 ST ACME  |                   | .250<br>(11)   | 0.039 | 0.039 | 1,0 | 1,0 | 16           |                       |       |       | 02273 |
| 16 IR 16 ST ACME  |                   | .375<br>(16,5) | 0.039 | 0.039 | 1,0 | 1,0 | 16           |                       |       | 02291 | 02292 |
|                   | 16 IL 16 ST ACME  |                | 0.039 | 0.039 | 1,0 | 1,0 | 16           |                       |       |       | 16314 |
|                   | 16 IL 14 ST ACME  |                | 0.043 | 0.043 | 1,1 | 1,1 | 14           |                       |       |       | 16282 |
| 16 IR 12 ST ACME  |                   |                | 0.047 | 0.047 | 1,2 | 1,2 | 12           |                       |       | 02287 | 02288 |
|                   | 16 IL 12 ST ACME  |                | 0.047 | 0.047 | 1,2 | 1,2 | 12           |                       |       |       | 16242 |
| 16 IR 10 ST ACME  |                   |                | 0.051 | 0.051 | 1,3 | 1,3 | 10           |                       | 16617 | 02285 | 02286 |
|                   | 16 IL 10 ST ACME  |                | 0.051 | 0.051 | 1,3 | 1,3 | 10           |                       |       | 16193 | 16194 |
| 16 IR 8 ST ACME   |                   |                | 0.059 | 0.059 | 1,5 | 1,5 | 8            |                       |       | 02295 | 02296 |
|                   | 16 IL 8 ST ACME   |                | 0.059 | 0.059 | 1,5 | 1,5 | 8            |                       |       |       | 16544 |
| 16 IR 6 ST ACME   |                   |                | 0.071 | 0.071 | 1,8 | 1,8 | 6            |                       |       | 02293 | 02294 |
|                   | 16 IL 6 ST ACME   | 0.071          | 0.071 | 1,8   | 1,8 | 6   |              |                       |       | 16510 |       |
| 22 IR 5 ST ACME   |                   | .500<br>(22)   | 0.098 | 0.091 | 2,5 | 2,3 | 5            |                       |       |       | 02300 |
|                   | 22 IL 5 ST ACME   |                | 0.098 | 0.091 | 2,5 | 2,3 | 5            |                       |       |       | 02311 |
| 22U IR 4 ST ACME* |                   |                | 0.098 | 0.433 | 2,5 | 11  | 4            |                       |       |       | 02305 |
|                   | 22U IL 4 ST ACME* |                | 0.098 | 0.433 | 2,5 | 11  | 4            |                       |       |       | 02313 |
| 27 IR 4 ST ACME   |                   | .625<br>(27)   | 0.091 | 0.094 | 2,3 | 2,4 | 4            |                       |       | 02308 | 02309 |
|                   | 27 IL 4 ST ACME   |                | 0.091 | 0.094 | 2,3 | 2,4 | 4            |                       |       |       | 02316 |
| 27 IR 3 ST ACME   |                   |                | .110  | 0.114 | 2,8 | 2,9 | 3            |                       |       | 17535 | 17536 |

\*U-Style inserts are neutral hand and require a U-Style Pocket Toolholder.

# THREADING

## VaiTHREAD™ Product Offering


### BSW - 55° - External




British BSW

Standard Style (1)

| Part Number   |              | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |
|---------------|--------------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|
|               |              | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC905 | VC929 |
| Right<br>Hand | Left<br>Hand | l (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |
| 16 ER 24 W    |              | .375<br>(16,5) | 0.028 | 0.031 | 0,7 | 0,8 | 24           |                       |      | 16025 | 02157 |
| 16 ER 20 W    |              |                | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       |      |       | 16017 |
|               | 16 EL 20 W   |                | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       |      |       | 15682 |
| 16 ER 19 W    |              |                | 0.031 | 0.039 | 0,8 | 1,0 | 19           |                       |      |       | 02156 |
| 16 ER 18 W    |              |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 16001 |
|               | 16 EL 18 W   |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 15655 |
|               | 16 EL 16 W   |                | 0.035 | 0.043 | 0,9 | 1,1 | 16           |                       |      |       | 15630 |
| 16 ER 14 W    |              |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |      | 02136 | 02137 |
|               | 16 EL 14 W   |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |      |       | 02151 |
| 16 ER 12 W    |              |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |      | 02135 | 15948 |
|               | 16 EL 12 W   |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |      |       | 15560 |
| 16 ER 11 W    |              |                | 0.043 | 0.059 | 1,1 | 1,5 | 11           |                       |      |       | 02154 |
|               | 16 EL 11 W   |                | 0.043 | 0.059 | 1,1 | 1,5 | 11           |                       |      |       | 02150 |
| 16 ER 10 W    |              |                | 0.043 | 0.059 | 1,1 | 1,5 | 10           |                       |      | 02153 | 15925 |
|               | 16 EL 10 W   |                | 0.043 | 0.059 | 1,1 | 1,5 | 10           |                       |      |       | 15510 |
| 16 ER 9 W     |              |                | 0.047 | 0.067 | 1,2 | 1,7 | 9            |                       |      | 02160 |       |
| 16 ER 8 W     |              |                | 0.047 | 0.059 | 1,2 | 1,5 | 8            |                       |      | 02159 |       |
| 22 ER 5 W     |              | .500<br>(22)   | 0.067 | 0.094 | 1,7 | 2,4 | 5            |                       |      | 02166 |       |



British BSW



Standard Style (1)




| Part Number |            | Dimensions     |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |
|-------------|------------|----------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|
|             |            | I.C. (in.)     | X     | Y     | x   | y   |              | VC5                   | VC29 | VC905 | VC929 |
| Right Hand  | Left Hand  | I (mm)         | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |
| 16 IR 20 W  |            | .375<br>(16,5) | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       |      |       | 16738 |
|             | 16 IL 20 W |                | 0.031 | 0.035 | 0,8 | 0,9 | 20           |                       |      |       | 16378 |
| 16 IR 18 W  |            |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 16715 |
|             | 16 IL 18 W |                | 0.031 | 0.039 | 0,8 | 1,0 | 18           |                       |      |       | 16347 |
| 16 IR 16 W  |            |                | 0.035 | 0.043 | 0,9 | 1,1 | 16           |                       |      |       | 16699 |
|             | 16 IL 16 W |                | 0.035 | 0.043 | 0,9 | 1,1 | 16           |                       |      |       | 16325 |
| 16 IR 14 W  |            |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |      | 02145 | 02162 |
|             | 16 IL 14 W |                | 0.039 | 0.047 | 1,0 | 1,2 | 14           |                       |      |       | 16294 |
| 16 IR 12 W  |            |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |      |       | 16648 |
|             | 16 IL 12 W |                | 0.043 | 0.055 | 1,1 | 1,4 | 12           |                       |      |       | 16250 |
| 16 IR 11 W  |            |                | 0.043 | 0.059 | 1,1 | 1,5 | 11           |                       |      | 02143 | 02144 |
| 16 IR 10 W  |            |                | 0.043 | 0.059 | 1,1 | 1,5 | 10           |                       |      |       | 16624 |
|             | 16 IL 10 W |                | 0.043 | 0.059 | 1,1 | 1,5 | 10           |                       |      |       | 16205 |
| 16 IR 9 W   |            |                | 0.047 | 0.067 | 1,2 | 1,7 | 9            |                       |      |       | 16869 |
| 16 IR 8 W   |            |                | 0.047 | 0.059 | 1,2 | 1,5 | 8            |                       |      |       | 02147 |
|             | 16 IL 8 W  |                | 0.047 | 0.059 | 1,2 | 1,5 | 8            |                       |      |       | 16555 |
| 22 IR 5 W   |            | .500<br>(22)   | 0.067 | 0.094 | 1,7 | 2,4 | 5            |                       |      |       | 17219 |

# THREADING

## VaiTHREAD™ Product Offering

### Multi-Tooth

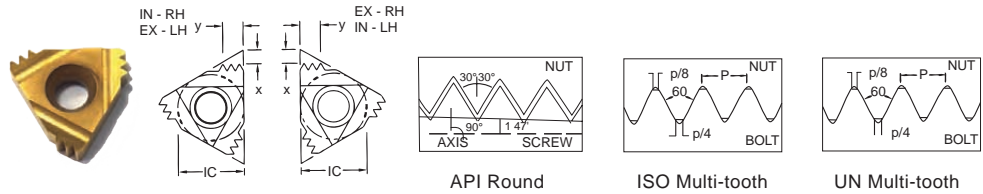

| Part Number      |                  | Dimensions |       |       | Pitch mm | No. of Teeth | No. of Passes | Infeed per Pass/Inch |       |       |       | Available Grades-EDP# |       |       |       |
|------------------|------------------|------------|-------|-------|----------|--------------|---------------|----------------------|-------|-------|-------|-----------------------|-------|-------|-------|
| External         | Internal         | I.C. (in.) | X     | Y     |          |              |               | 1                    | 2     | 3     | 4     | VC5                   | VC29  | VC905 | VC929 |
| 16 ER 1.0 ISO 3M |                  | .375       | 0.067 | 0.098 | (1,00)   | 3            | 2             | 0.015                | 0.010 |       |       |                       |       | 15913 |       |
| 16 ER 1.5 ISO 2M |                  |            | 0.059 | 0.091 | (1,5)    | 2            | 3             | 0.016                | 0.012 | 0.008 |       |                       |       | 02127 |       |
| 22 ER 1.5 ISO 3M |                  | .500       | 0.091 | 0.146 | (1,5)    | 3            | 2             | 0.021                | 0.015 |       |       |                       |       | 16979 |       |
|                  | 22 IR 1.5 ISO 3M |            | 0.091 | 0.146 | (1,5)    | 3            | 2             | 0.021                | 0.015 |       |       |                       |       | 17172 |       |
| 22 ER 2.0 ISO 2M |                  |            | 0.079 | 0.118 | (2,0)    | 2            | 3             | 0.021                | 0.015 | 0.011 |       |                       |       | 16985 |       |
|                  | 22 IR 2.0 ISO 2M |            | 0.079 | 0.118 | (2,0)    | 2            | 3             | 0.021                | 0.015 | 0.011 |       |                       |       | 17179 |       |
| 22 ER 2.0 ISO 3M |                  |            | 0.122 | 0.197 | (2,0)    | 3            | 2             | 0.029                | 0.019 |       |       |                       |       | 02090 |       |
|                  | 22 IR 2.0 ISO 3M |            | 0.122 | 0.197 | (2,0)    | 3            | 2             | 0.029                | 0.019 |       |       |                       | 02130 |       |       |
| 27 ER 3.0 ISO 2M |                  | .625       | 0.114 | 0.177 | (3,0)    | 2            | 4             | 0.022                | 0.020 | 0.017 | 0.013 |                       |       | 17432 |       |
|                  | 27 IR 3.0 ISO 2M |            | 0.114 | 0.177 | (3,0)    | 2            | 4             | 0.022                | 0.020 | 0.017 | 0.013 |                       |       | 17540 |       |

### UN - Multi-Tooth



| Part Number    |                | Dimensions |       |       | Pitch TPI | No. of Teeth | No. of Passes | Infeed per Pass/Inch |       |       |       | Available Grades-EDP# |      |       |       |
|----------------|----------------|------------|-------|-------|-----------|--------------|---------------|----------------------|-------|-------|-------|-----------------------|------|-------|-------|
| External       | Internal       | I.C. (in.) | X     | Y     |           |              |               | 1                    | 2     | 3     | 4     | VC5                   | VC29 | VC905 | VC929 |
| 16 ER 16 UN 2M |                | .375       | 0.059 | 0.091 | 16        | 2            | 3             | 0.017                | 0.011 | 0.009 |       |                       |      | 15989 | 01931 |
|                | 16 IR 16 UN 2M |            | 0.059 | 0.091 | 16        | 2            | 3             | 0.017                | 0.011 | 0.009 |       |                       |      |       | 02048 |
| 22 ER 16 UN 3M |                | .500       | 0.098 | 0.157 | 16        | 3            | 2             | 0.022                | 0.015 |       |       |                       |      |       | 02001 |
|                | 22 IR 16 UN 3M |            | 0.098 | 0.157 | 16        | 3            | 2             | 0.022                | 0.015 |       |       |                       |      |       | 17175 |
| 22 ER 12 UN 2M |                | .625       | 0.087 | 0.134 | 12        | 2            | 3             | 0.022                | 0.017 | 0.012 |       |                       |      |       | 01998 |
| 27 ER 8 UN 2M  |                |            | 0.122 | 0.193 | 8         | 2            | 4             | 0.028                | .020  | 0.017 | 0.013 |                       |      |       | 02025 |
|                | 27 IR 8 UN 2M  | 0.122      | 0.193 | 8     | 2         | 4            | 0.028         | .020                 | 0.017 | 0.013 |       |                       |      | 17576 |       |

### API (OIL) - Round - Multi-Tooth

| Part Number        |                    | Dimensions |       |       | Pitch TPI | No. of Teeth | No. of Passes | Infeed per Pass/Inch |       |       |   | Available Grades-EDP# |      |       |       |
|--------------------|--------------------|------------|-------|-------|-----------|--------------|---------------|----------------------|-------|-------|---|-----------------------|------|-------|-------|
| External           | Internal           | I.C. (in.) | X     | Y     |           |              |               | 1                    | 2     | 3     | 4 | VC5                   | VC29 | VC905 | VC929 |
| 22 ER 10 API RD 2M |                    | .500       | 0.094 | 0.146 | 10        | 2            | 3             | 0.024                | 0.020 | 0.012 |   |                       |      |       | 16959 |
|                    | 22 IR 10 API RD 2M |            | 0.094 | 0.146 | 10        | 2            | 3             | 0.024                | 0.020 | 0.012 |   |                       |      |       | 02369 |
| 27 ER 8 API RD 2M  |                    | .625       | 0.118 | 0.177 | 8         | 2            | 3             | 0.031                | 0.024 | 0.016 |   |                       |      |       | 02373 |
|                    | 27 IR 8 API RD 2M  |            | 0.118 | 0.177 | 8         | 2            | 3             | 0.031                | 0.024 | 0.016 |   |                       |      |       | 02384 |

## ValTHREAD™ Product Offering

### Round (DIN 405) Threading Inserts - External



Standard Style (1)




| Part Number |           | Dimensions    |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |
|-------------|-----------|---------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|
|             |           | I.C.<br>(in.) | X     | Y     | x   | y   |              | VC5                   | VC29 | VC905 | VC929 |
| Right Hand  | Left Hand |               | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |
| 16 ER 6 RD  |           | .375          | 0.059 | 0.067 | 1,5 | 1,7 | 6            |                       |      |       | 16092 |
| 22 ER 4 RD  |           | .500          | 0.087 | 0.091 | 2,2 | 2,3 | 4            |                       |      |       | 16993 |
| 22 ER 6 RD  |           | .500          | 0.059 | 0.067 | 1,5 | 1,7 | 6            |                       |      |       | 17033 |



### Round (DIN 405) Threading Inserts - Internal

| Part Number |           | Dimensions    |       |       |     |     | Pitch<br>TPI | Available Grades-EDP# |      |       |       |
|-------------|-----------|---------------|-------|-------|-----|-----|--------------|-----------------------|------|-------|-------|
|             |           | I.C.<br>(in.) | X     | Y     | x   | y   |              | VC5                   | VC29 | VC905 | VC929 |
| Right Hand  | Left Hand |               | Inch  | Inch  | mm  | mm  |              |                       |      |       |       |
| 16 IR 6 RD  |           | .375          | 0.055 | 0.059 | 1,4 | 1,5 | 6            |                       |      |       | 16833 |
| 22 IR 4 RD  |           | .500          | 0.087 | 0.091 | 2,2 | 2,3 | 4            |                       |      |       | 17186 |
| 22 IR 6 RD  |           | .500          | 0.059 | 0.067 | 1,5 | 1,7 | 6            |                       |      |       | 17229 |

### API (Oil) - Round



API Round






| Part Number     |                 | Dimensions |       |       | Pitch | Taper | Size or<br>Connection # | Available Grades-EDP# |       |       |       |
|-----------------|-----------------|------------|-------|-------|-------|-------|-------------------------|-----------------------|-------|-------|-------|
| External        | Internal        | I.C. (in.) | X     | Y     | TPI   | IPF   |                         | VC5                   | VC29  | VC905 | VC929 |
| 16 ER 8 API RD  |                 | .375       | 0.051 | 0.063 | 8     | 0.75  | 4 1/2 - 20              |                       |       | 02360 | 02361 |
|                 | 16 IR 8 API RD  |            | 0.051 | 0.063 | 8     | 0.75  |                         | 02364                 | 02365 |       |       |
| 16 ER 10 API RD |                 |            | 0.059 | 0.055 | 10    | 0.75  | 1.050 - 3 1/2           |                       |       | 02359 | 02374 |
|                 | 16 IR 10 API RD |            | 0.059 | 0.055 | 10    | 0.75  |                         | 02362                 | 02363 |       |       |

# THREADING




## VaiTHREAD™ Product Offering

### API Buttress Casing



| Part Number      |                  | Dimensions |       |       | Pitch<br>TPI | Taper<br>IPF | Size or<br>Connection # | Available Grades-EDP# |      |       |       |
|------------------|------------------|------------|-------|-------|--------------|--------------|-------------------------|-----------------------|------|-------|-------|
| External         | Internal         | I.C. (in.) | X     | Y     |              |              |                         | VC5                   | VC29 | VC905 | VC929 |
| 22 ER 5 BUT 0.75 |                  | .500       | 0.087 | 0.094 | 5            | 0.75         | 4 1/2 - 13 3/8          |                       |      |       | 02368 |
|                  | 22 IR 5 BUT 0.75 |            | 0.087 | 0.094 | 5            | 0.75         | 4 1/2 - 13 3/8          |                       |      | 17198 |       |

### API Rotary Shoulder Connections





Rotary Shouldered Connections


| Part Number     |                 | Dimensions |       |       | Pitch<br>TPI | Taper<br>IPF | Size or<br>Connection # | Available Grades-EDP# |       |       |       |
|-----------------|-----------------|------------|-------|-------|--------------|--------------|-------------------------|-----------------------|-------|-------|-------|
| External        | Internal        | I.C. (in.) | X     | Y     |              |              |                         | VC5                   | VC29  | VC905 | VC929 |
| 22 ER 5 API 403 |                 | .500       | 0.071 | 0.098 | 5            | 3            | 2 3/8 - 4 1/2 REG       |                       |       | 02375 | 02367 |
|                 | 22 IR 5 API 403 |            | 0.071 | 0.098 | 5            | 3            | 2 3/8 - 4 1/2 REG       |                       |       | 02370 | 02371 |
| 27 ER 4 API 382 |                 | .625       | 0.083 | 0.110 | 4            | 2            | NC 23 - NC 50           |                       |       | 02378 | 17436 |
|                 | 27 IR 4 API 382 |            | 0.083 | 0.110 | 4            | 2            | NC 23 - NC 50           |                       |       | 02381 | 02382 |
|                 | 27 IR 4 API 503 |            | 0.079 | 0.118 | 4            | 3            | 5 1/2, 7 5/8, 8 5/8 REG |                       |       | 17552 |       |
| 27 ER 4 API 502 |                 |            | 0.079 | 0.118 | 4            | 2            | 6 5/8 REG               |                       |       | 17443 |       |
|                 | 27 IR 4 API 502 | 0.079      | 0.118 | 4     | 2            | 6 5/8 REG    |                         |                       | 17549 | 02383 |       |

## ValTHREAD™ Product Offering

### American Buttress - External

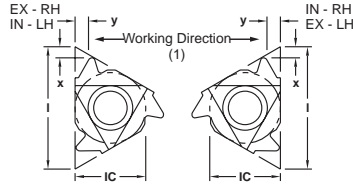

Standard Style (1)



| Part Number   |               | Dimensions           |       |       | Pitch<br>TPI | Available Grades-EDP# |      |       |       |
|---------------|---------------|----------------------|-------|-------|--------------|-----------------------|------|-------|-------|
| Right Hand    | Left Hand     | I.C. (in.)<br>I (mm) | X     | Y     |              | VC5                   | VC29 | VC905 | VC929 |
| 16 ER 16 ABUT |               | 0.375<br>(16,5)      | 0.039 | 0.059 | 16           |                       |      |       | 15983 |
|               | 16 EL 16 ABUT |                      | 0.039 | 0.059 | 16           |                       |      |       | 15612 |
| 16 ER 12 ABUT |               |                      | 0.055 | 0.079 | 12           |                       |      | 02386 | 02387 |
|               | 16 EL 12 ABUT |                      | 0.055 | 0.079 | 12           |                       |      | 15539 |       |
| 16 ER 10 ABUT |               |                      | 0.059 | 0.091 | 10           |                       |      | 02395 | 15906 |
| 22 ER 8 ABUT  |               | 0.500<br>(22)        | 0.083 | 0.130 | 8            |                       |      | 02391 | 17049 |

### American Buttress - Internal

| Part Number   |               | Dimensions           |       |       | Pitch<br>TPI | Available Grades-EDP# |      |       |       |
|---------------|---------------|----------------------|-------|-------|--------------|-----------------------|------|-------|-------|
| Right Hand    | Left Hand     | I.C. (in.)<br>I (mm) | X     | Y     |              | VC5                   | VC29 | VC905 | VC929 |
| 16 IR 16 ABUT |               | 0.375<br>(16,5)      | 0.039 | 0.059 | 16           |                       |      |       | 16687 |
|               | 16 IL 16 ABUT |                      | 0.039 | 0.059 | 16           |                       |      |       | 16306 |
| 16 IR 12 ABUT |               |                      | 0.055 | 0.079 | 12           |                       |      | 02388 | 02389 |
| 16 IR 10 ABUT |               |                      | 0.059 | 0.091 | 10           |                       |      | 02396 | 02397 |
| 22 IR 8 ABUT  |               |                      | 0.083 | 0.130 | 8            |                       |      |       | 02392 |
| 22 IR 6 ABUT  |               | 0.500<br>(22)        | 0.083 | 0.134 | 6            |                       |      | 17221 |       |


Note:

- The flank with the large angle is the leading edge.

# THREADING

## VaiTHREAD™ External Toolholders

### Inch Toolholders

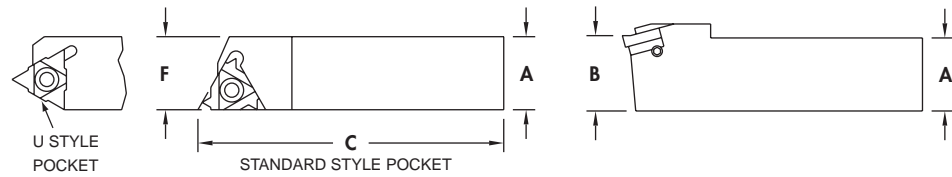

Right Hand Shown, Left Hand Opposite

| Part Number   |               | Dimensions |       |       |       | EDP#       |           |
|---------------|---------------|------------|-------|-------|-------|------------|-----------|
| Right Hand    | Left Hand     | I.C.       | A=B   | C     | F     | Right Hand | Left Hand |
| SER 0310 H11* | SEL 0310 H11* | 0.250      | 0.312 | 4.000 | 0.430 | 58518      | 58279     |
| SER 0375 H11* | SEL 0375 H11* | 0.250      | 0.375 | 4.000 | 0.430 | 58520      | 58280     |
| SER 0375 D16  | SEL 0375 D16  | 0.375      | 0.375 | 2.500 | 0.630 | 58519      | 58555     |
| SER 0500 F16  | SEL 0500 F16  | 0.375      | 0.500 | 3.250 | 0.630 | 58521      | 58556     |
| SER 0625 H16  | SEL 0625 H16  | 0.375      | 0.625 | 4.000 | 0.630 | 58522      | 58557     |
| SER 0750 K16  | SEL 0750 K16  | 0.375      | 0.750 | 5.000 | 0.750 | 58523      | 58558     |
| SER 1000 M16  | SEL 1000 M16  | 0.375      | 1.000 | 6.000 | 1.000 | 58525      | 58514     |
| SER 1250 P16  | SEL 1250 P16  | 0.375      | 1.250 | 7.000 | 1.250 | 58534      | 58559     |
| SER 1000 M22  | SEL 1000 M22  | 0.500      | 1.000 | 6.000 | 1.000 | 58527      | 58515     |
| SER 1000 M22U | SEL 1000 M22U | 0.500U     | 1.000 | 6.000 | 1.100 | 58529      | 58292     |
| SER 1250 P22  | SEL 1250 P22  | 0.500      | 1.250 | 7.000 | 1.250 | 58535      | 58300     |
| SER 1250 P22U | SEL 1250 P22U | 0.500U     | 1.250 | 7.000 | 1.250 | 58536      | 58302     |
| SER 1500 R22  | SEL 1500 R22  | 0.500      | 1.500 | 8.000 | 1.500 | 58539      | 58306     |
| SER 1500 R22U | SEL 1500 R22U | 0.500U     | 1.500 | 8.000 | 1.500 | 58540      | 58308     |
| SER 1000 M27  | SEL 1000 M27  | 0.625      | 1.000 | 6.000 | 1.250 | 58530      | 58517     |
| SER 1250 P27  | SEL 1250 P27  | 0.625      | 1.250 | 7.000 | 1.250 | 58537      | 58560     |
| SER 1250 P27U | SEL 1250 P27U | 0.625U     | 1.250 | 7.000 | 1.250 | 58538      | 58304     |
| SER 1500 R27  | SEL 1500 R27  | 0.625      | 1.500 | 8.000 | 1.500 | 58541      | 58310     |
| SER 1500 R27U | SEL 1500 R27U | 0.625U     | 1.500 | 8.000 | 1.500 | 58542      | 58312     |

\* Complete without anvil


Note:

- Insert and toolholder should always match, i.e., external right hand insert with external right hand toolholder.
- Toolholders are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.



## VaIThread™ External Toolholders

### Metric Toolholders

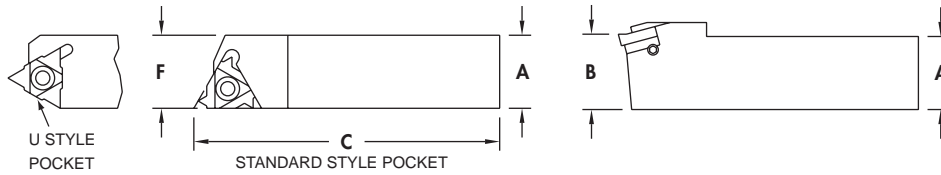

Right Hand Shown, Left Hand Opposite



| Part Number   |               | Dimensions |     |     |    | EDP#       |           |
|---------------|---------------|------------|-----|-----|----|------------|-----------|
| Right Hand    | Left Hand     | I.C.       | A=B | C   | F  | Right Hand | Left Hand |
| SER 0808 H11* | SEL 0808 H11* | 11         | 8   | 100 | 11 | 58371      | 58286     |
| SER 1010 H11* | SEL 1010 H11* | 11         | 10  | 100 | 11 | 58531      | 58294     |
| SER 1212 F16  | SEL 1212 F16  | 16         | 12  | 80  | 16 | 58533      | 58298     |
| SER 1616 H16  | SEL 1616 H16  | 16         | 16  | 100 | 16 | 58543      | 58314     |
| SER 2020 K16  | SEL 2020 K16  | 16         | 20  | 125 | 20 | 58545      | 58561     |
| SER 2525 M16  | SEL 2525 M16  | 16         | 25  | 150 | 25 | 58546      | 58562     |
| SER 3232 P16  | SEL 3232 P16  | 16         | 32  | 170 | 32 | 58549      | 58563     |
| SER 2525 M22  | SEL 2525 M22  | 22         | 25  | 150 | 25 | 58547      | 58320     |
| SER 2525 M22U | SEL 2525 M22U | 22U        | 25  | 150 | 28 | 58548      | 58327     |
| SER 3232 P22  | SEL 3232 P22  | 22         | 32  | 170 | 32 | 58376      | 58337     |
| SER 3232 P22U | SEL 3232 P22U | 22U        | 32  | 170 | 32 | 58377      | 58340     |
| SER 4040 R22  | SEL 4040 R22  | 22         | 40  | 200 | 40 | 58551      | 58359     |
| SER 4040 R22U | SEL 4040 R22U | 22U        | 40  | 200 | 40 | 58552      | 58361     |
| SER 2525 M27  | SEL 2525 M27  | 27         | 25  | 150 | 25 | 58564      | 58332     |
| SER 3232 P27  | SEL 3232 P27  | 27         | 32  | 170 | 32 | 58550      | 58356     |
| SER 3232 P27U | SEL 3232 P27U | 27U        | 32  | 170 | 32 | 58378      | 58357     |
| SER 4040 R27  | SEL 4040 R27  | 27         | 40  | 200 | 40 | 58553      | 58365     |
| SER 4040 R27U | SEL 4040 R27U | 27U        | 40  | 200 | 40 | 58554      | 58367     |

\* Complete without anvil

Note:

- Insert and toolholder should always match, i.e., external right hand insert with external right hand toolholder.
- Toolholders are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.

### Gang Toolholders—Metric

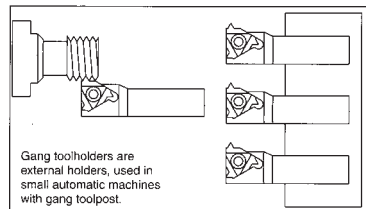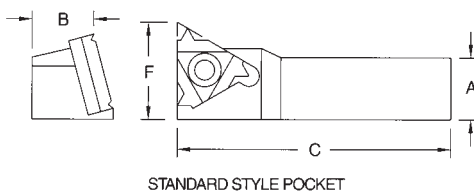

Right Hand Shown, Left Hand Opposite

| Part Number    |                | Dimensions |     |     |      | EDP#       |           |
|----------------|----------------|------------|-----|-----|------|------------|-----------|
| Right Hand     | Left Hand      | I.C.       | A=B | C   | F    | Right Hand | Left Hand |
| SER 0808 H11G* | SEL 0808 H11G* | 11         | 8   | 100 | 12,0 | 58372      | 58288     |
| SER 1010 H11G* | SEL 1010 H11G* | 11         | 10  | 100 | 14,0 | 58532      | 58296     |
| SER 1616 K16G  | SEL 1616 K16G  | 16         | 16  | 125 | 21,7 | 58544      | 58316     |

\* Complete without anvil


Note:

- Insert and toolholder should always match, i.e., external right hand insert with external right hand toolholder.
- Toolholders are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.

# THREADING

## VaiTHREAD™ External Drophead Toolholders

### Inch Toolholders

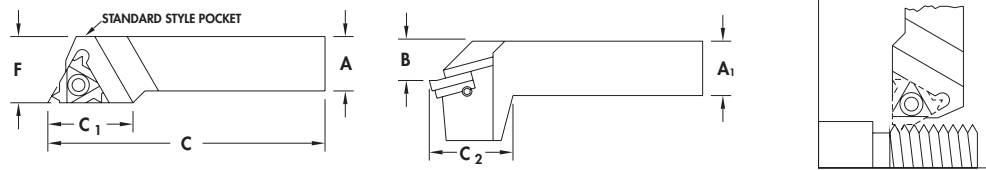

Right Hand Shown, Left Hand Opposite

| Part Number   |               | Dimensions |       |       |       |       |       |       | EDP #      |           |
|---------------|---------------|------------|-------|-------|-------|-------|-------|-------|------------|-----------|
| Right Hand    | Left Hand     | IC         | A=B   | A1    | C     | C1    | C2    | F     | Right Hand | Left Hand |
| SER 0750 K16D | SEL 0750 K16D | 0.375      | 0.750 | 0.750 | 5.000 | 0.840 | 1.500 | 1.000 | 58369      | 58284     |
| SER 1000 K16D | SEL 1000 K16D | 0.375      | 1.000 | 1.000 | 5.000 | 0.840 | 1.500 | 1.250 | 58524      | 58513     |
| SER 1000 M16D | SEL 1000 M16D | 0.375      | 1.000 | 1.000 | 6.000 | 0.840 | 1.500 | 1.250 | 58526      | 58290     |
| SER 1000 M22D | SEL 1000 M22D | 0.500      | 1.000 | 1.000 | 6.000 | 1.000 | 1.500 | 1.250 | 58528      | 58516     |


### Metric Toolholders

| Part Number   |                | Dimensions |        |         |        |         |         |        | EDP #      |           |
|---------------|----------------|------------|--------|---------|--------|---------|---------|--------|------------|-----------|
| Right Hand    | Left Hand      | IC (mm)    | A (mm) | A1 (mm) | C (mm) | C1 (mm) | C2 (mm) | F (mm) | Right Hand | Left Hand |
| SER 2020 K16D | SEL 2020 K16D  | 16         | 20     | 20      | 125    | 21      | 38      | 25     | 58373      | 58317     |
| SER 2525M 16D | SEL 2525 M16D  | 16         | 25     | 25      | 150    | 21      | 38      | 32     | 58374      | 58318     |
| SER 2525 M22D | SEL 2525 M 22D | 22         | 25     | 25      | 150    | 21      | 38      | 32     | 58375      | 58375     |

- Insert and toolholder should always match, i.e., external right hand insert with external right hand toolholder.
- Toolholders are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.

## VaIThread™ Internal Boring Bars

### Inch Boring Bars

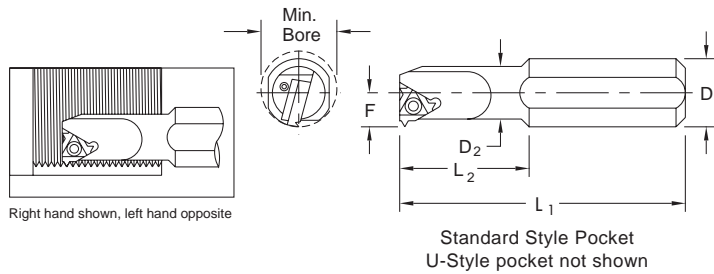

| Part Number   |               | * | Dimensions |       |       |           |        |       |       | EDP#       |           |
|---------------|---------------|---|------------|-------|-------|-----------|--------|-------|-------|------------|-----------|
| Right Hand    | Left Hand     |   | IC         | D1    | D2    | Min. Bore | L1     | L2    | F     | Right Hand | Left Hand |
| SIR 0205 H06  | SIL 0205 H06  | * | 0.156      | 0.500 | 0.200 | 0.240     | 4.000  | 0.470 | 0.170 | 58599      | 58825     |
| SIR 0265 K08  | SIL 0265 K08  | * | 0.187      | 0.625 | 0.260 | 0.310     | 5.000  | 0.700 | 0.210 | 58601      | 58830     |
| SIR 0310 K08U | SIL 0310 K08U | * | 0.187U     | 0.625 | 0.290 | 0.350     | 5.000  | 0.830 | 0.260 | 58603      | 58862     |
| SIR 0375 H11  | SIL 0375 H11  | * | 0.250      | 0.375 | 0.375 | 0.470     | 4.000  | -     | 0.280 | 58605      | 58565     |
| SIR 0375 K11  | SIL 0375 K11  | * | 0.250      | 0.625 | 0.375 | 0.470     | 5.000  | 1.000 | 0.280 | 58606      | 58633     |
| SIR 0500 L11  | SIL 0500 L11  | * | 0.250      | 0.625 | 0.500 | 0.580     | 5.500  | 1.250 | 0.340 | 58608      | 58635     |
| SIR 0500 M16  | SIL 0500 M16  | * | 0.375      | 0.625 | 0.500 | 0.640     | 6.000  | 1.250 | 0.390 | 58609      | 58566     |
| SIR 0625 P16  | SIL 0625 P16  | * | 0.375      | 0.750 | 0.625 | 0.750     | 7.000  | 1.570 | 0.450 | 58611      | 58637     |
| SIR 0750 P16  | SIL 0750 P16  |   | 0.375      | 0.750 | 0.750 | 0.900     | 7.000  | -     | 0.510 | 58613      | 58567     |
| SIR 1000 R16  | SIL 1000 R16  |   | 0.375      | 1.000 | 1.000 | 1.160     | 8.000  | -     | 0.650 | 58615      | 58569     |
| SIR 1250 S16  | SIL 1250 S16  |   | 0.375      | 1.250 | 1.250 | 1.400     | 10.000 | -     | 0.770 | 58617      | 58571     |
| SIR 1500 T16  | SIL 1500 T16  |   | 0.375      | 1.500 | 1.500 | 1.650     | 12.000 | -     | 0.900 | 58622      | 58643     |
| SIR 0750 P22  | SIL 0750 P22  | * | 0.500      | 0.750 | 0.750 | 0.900     | 7.000  | -     | 0.590 | 58614      | 58568     |
| SIR 1000 R22  | SIL 1000 R22  |   | 0.500      | 1.000 | 1.000 | 1.160     | 8.000  | -     | 0.710 | 58616      | 58570     |
| SIR 1250 S22  | SIL 1250 S22  |   | 0.500      | 1.250 | 1.250 | 1.500     | 10.000 | -     | 0.850 | 58618      | 58639     |
| SIR 1250 S22U | SIL 1250 S22U |   | 0.500U     | 1.250 | 1.250 | 1.500     | 10.000 | -     | 0.950 | 58619      | 58640     |
| SIR 1500 T22  | SIL 1500 T22  |   | 0.500      | 1.500 | 1.500 | 1.750     | 12.000 | -     | 0.980 | 58623      | 58901     |
| SIR 1500 T22U | SIL 1500 T22U |   | 0.500U     | 1.500 | 1.500 | 1.750     | 12.000 | -     | 1.080 | 58624      | 58911     |
| SIR 1250 S27  | SIL 1250 S27  |   | 0.625      | 1.250 | 1.250 | 1.560     | 10.000 | -     | 0.880 | 58620      | 58641     |
| SIR 1250 S27U | SIL 1250 S27U |   | 0.625U     | 1.250 | 1.250 | 1.560     | 10.000 | -     | 1.000 | 58621      | 58642     |
| SIR 1500 T27  | SIL 1500 T27  |   | 0.625      | 1.500 | 1.500 | 1.800     | 12.000 | -     | 1.000 | 58625      | 58918     |
| SIR 1500 T27U | SIL 1500 T27U |   | 0.625U     | 1.500 | 1.500 | 1.800     | 12.000 | -     | 1.130 | 58646      | 58933     |
| SIR 2000 U27  | SIL 2000 U27  |   | 0.625      | 2.000 | 2.000 | 2.300     | 14.000 | -     | 1.250 | 58626      | 58572     |
| SIR 2000 U27U | SIL 2000 U27U |   | 0.625U     | 2.000 | 2.000 | 2.300     | 14.000 | -     | 1.370 | 59149      | 58940     |
| SIR 2500 V27  | SIL 2500 V27  |   | 0.625      | 2.500 | 2.500 | 2.800     | 16.000 | -     | 1.500 | 58627      | 58952     |
| SIR 2500 V27U | SIL 2500 V27U |   | 0.625U     | 2.500 | 2.500 | 2.800     | 16.000 | -     | 1.610 | 58628      | 58967     |

\* Complete without anvil


Note:

- Insert and Boring Bar should always match; right-hand insert with right-hand bar, left-hand insert with left-hand bar.
- Boring Bars are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.


# THREADING

## VaiTHREAD™ Internal Boring Bars

### Inch Boring Bars with Coolant Hole

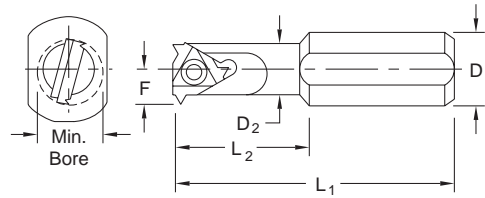

Standard Style Pocket  
U-Style pocket not shown



Right hand shown, left hand opposite

| Part Number   |               | * | Dimensions |       |       |           |       |       |       | EDP#       |           |
|---------------|---------------|---|------------|-------|-------|-----------|-------|-------|-------|------------|-----------|
| Right Hand    | Left Hand     |   | IC         | D1    | D2    | Min. Bore | L1    | L2    | F     | Right Hand | Left Hand |
| SIR 0625 P16B | SIL 0625 P16B | * | 0.375      | 0.750 | 0.625 | 0.750     | 7.000 | 1.570 | 0.450 | 59041      | 58874     |
| SIR 0750 P16B | SIL 0750 P16B |   | 0.375      | 0.750 | 0.750 | 0.900     | 7.000 | -     | 0.510 | 59095      | 58884     |
| SIR 1000 R16B | SIL 1000 R16B |   | 0.375      | 1.000 | 1.000 | 1.160     | 8.000 | -     | 0.650 | 59144      | 58900     |

\*Complete without anvil

### Inch Boring Bars, Carbide Shank with Coolant Hole

| Part Number     |                 | * | Dimensions |       |       |           |      |       |       | EDP#       |           |
|-----------------|-----------------|---|------------|-------|-------|-----------|------|-------|-------|------------|-----------|
| Right Hand      | Left Hand       |   | IC         | D1    | D2    | Min. Bore | L1   | L2    | F     | Right Hand | Left Hand |
| SIR 0205 H06CB  | SIL 0205 H06CB  |   | 0.156      | 0.250 | 0.200 | 0.240     | 4.0  | 0.470 | 0.170 | 56521      | 62776     |
| SIR 0265 K08CB  | SIL 0265 K08CB  |   | 0.187      | 0.312 | 0.260 | 0.310     | 5.0  | 1.220 | 0.210 | 61125      | 62777     |
| SIR 0310 K08UCB | SIL 0310 K08UCB |   | .187U      | 0.312 | 0.290 | 0.350     | 5.0  | 1.380 | 0.260 | 56523      | 62778     |
| SIR 0375 M11CB  | SIL 0375 M11CB  |   | 0.250      | 0.375 | 0.375 | 0.470     | 6.0  | -     | 0.280 | 56524      | 62779     |
| SIR 0500 P11CB  | SIL 0500 P11CB  |   | 0.250      | 0.500 | 0.500 | 0.580     | 7.0  | -     | 0.340 | 56526      | 62780     |
| SIR 0625 R16CB  | SIL 0625 R16CB  |   | 0.375      | 0.625 | 0.625 | 0.750     | 8.0  | -     | 0.460 | 56527      | 62781     |
| SIR 0750 S16CB  |                 | * | 0.375      | 0.750 | 0.750 | 0.900     | 10.0 | -     | 0.540 | 56541      | -         |
| SIR 1000 S16CB  |                 | * | 0.375      | 1.000 | 1.000 | 1.100     | 10.0 | -     | 0.640 | 56528      | -         |


\* With anvil

Note:

- Insert and Boring Bar should always match; right-hand insert with right-hand bar, left-hand insert with left-hand bar.
- Boring Bars are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.

## VaITHREAD™ Internal Boring Bars

### Metric Boring Bars

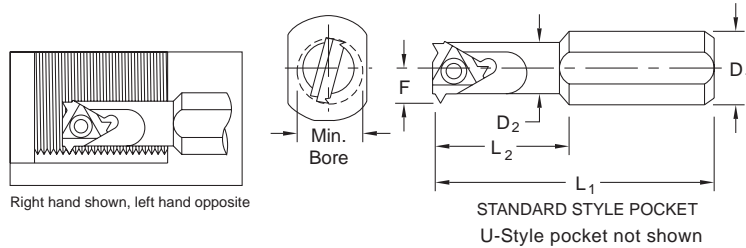

| Part Number   |               | * | Dimensions |         |         |                |         |         |        | EDP#       |           |
|---------------|---------------|---|------------|---------|---------|----------------|---------|---------|--------|------------|-----------|
| Right Hand    | Left Hand     |   | IC (mm)    | D1 (mm) | D2 (mm) | Min. Bore (mm) | L1 (mm) | L2 (mm) | F (mm) | Right Hand | Left Hand |
| SIR 0005 H06  | SIL 0005 H06  | * | 6          | 12      | 5,1     | 6,0            | 100     | 12      | 4,3    | 58573      | 58629     |
| SIR 0007 K08  | SIL 0007 K08  | * | 8          | 16      | 6,6     | 7,8            | 125     | 18      | 5,3    | 58575      | 58380     |
| SIR 0008 K08U | SIL 0008 K08U |   | 8U         | 16      | 7,3     | 9,0            | 125     | 21      | 6,6    | 58970      | 58382     |
| SIR 0010 H11  | SIL 0010 H11  | * | 11         | 10      | 10      | 12             | 100     | -       | 7,4    | 58578      | 58384     |
| SIR 0010 K11  | SIL 0010 K11  | * | 11         | 16      | 10      | 12             | 125     | 25      | 7,4    | 58579      | 58385     |
| SIR 0013 L11  | SIL 0013 L11  | * | 11         | 16      | 13      | 15             | 140     | 32      | 8,9    | 58582      | 58457     |
| SIR 0013 M16  | SIL 0013 M16  | * | 16         | 16      | 13      | 16             | 150     | 32      | 10,2   | 58583      | 58630     |
| SIR 0016 P16  | SIL 0016 P16  | * | 16         | 20      | 16      | 19             | 170     | 40      | 11,7   | 58584      | 58458     |
| SIR 0020 P16  | SIL 0020 P16  |   | 16         | 20      | 20      | 24             | 170     | -       | 13,7   | 58586      | 58461     |
| SIR 0025 R16  | SIL 0025 R16  |   | 16         | 25      | 25      | 29             | 200     | -       | 16,2   | 58588      | 58631     |
| SIR 0032 S16  | SIL 0032 S16  |   | 16         | 32      | 32      | 36             | 250     | -       | 19,7   | 58590      | 58466     |
| SIR 0040 T16  | SIL 0040 T16  |   | 16         | 40      | 40      | 44             | 300     | -       | 23,7   | 58593      | 58471     |
| SIR 0020 P22  | SIL 0020 P22  | * | 22         | 20      | 20      | 24             | 170     | -       | 15,6   | 58587      | 58463     |
| SIR 0025 R22  | SIL 0025 R22  |   | 22         | 25      | 25      | 29             | 200     | -       | 18,1   | 58589      | 58465     |
| SIR 0032 S22  | SIL 0032 S22  |   | 22         | 32      | 32      | 38             | 250     | -       | 21,6   | 58591      | 58467     |
| SIR 0032 S22U | SIL 0032 S22U |   | 22U        | 32      | 32      | 38             | 250     | -       | 24,4   | 58592      | 58468     |
| SIR 0040 T22  | SIL 0040 T22  |   | 22         | 40      | 40      | 46             | 300     | -       | 25,6   | 59031      | 58472     |
| SIR 0040 T22U | SIL 0040 T22U |   | 22U        | 40      | 40      | 46             | 300     | -       | 28,1   | 58594      | 58473     |
| SIR 0032 S27  | SIL 0032 S27  |   | 27         | 32      | 32      | 40             | 250     | -       | 22,6   | 58644      | 58469     |
| SIR 0032 S27U | SIL 0032 S27U |   | 27U        | 32      | 32      | 40             | 250     | -       | 25,8   | 59026      | 58470     |
| SIR 0040 T27  | SIL 0040 T27  |   | 27         | 40      | 40      | 48             | 300     | -       | 26,6   | 58645      | 58474     |
| SIR 0040 T27U | SIL 0040 T27U |   | 27U        | 40      | 40      | 48             | 300     | -       | 29,4   | 58595      | 58506     |
| SIR 0050 U27  | SIL 0050 U27  |   | 27         | 50      | 50      | 58             | 350     | -       | 31,6   | 59039      | 58507     |
| SIR 0050 U27U | SIL 0050 U27U |   | 27U        | 50      | 50      | 58             | 350     | -       | 34,3   | 58596      | 58508     |
| SIR 0060 V27  | SIL 0060 V27  |   | 27         | 60      | 60      | 68             | 400     | -       | 36,6   | 58597      | 58726     |
| SIR 0060 V27U | SIL 0060 V27U |   | 27U        | 60      | 60      | 68             | 400     | -       | 39,7   | 58598      | 58780     |

\*Complete without anvil


Note:

- Insert and Boring Bar should always match; right-hand insert with right-hand bar, left-hand insert with left-hand bar.
- Boring Bars are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.

# THREADING

## VaiTHREAD™ Internal Boring Bars

### Metric Boring Bars with Coolant Hole

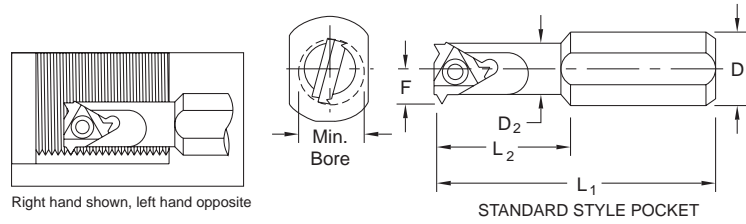

| Part Number   |               | * | Dimensions |    |    |           |     |    |      | EDP#       |           |
|---------------|---------------|---|------------|----|----|-----------|-----|----|------|------------|-----------|
| Right Hand    | Left Hand     |   | I.C.       | D1 | D2 | Min. Bore | L1  | L2 | F    | Right Hand | Left Hand |
| SIR 0016 P16B | SIL 0016 P16B | * | 16         | 20 | 16 | 19        | 170 | 40 | 11,7 | 58994      | 58459     |
| SIR 0020 P16B | SIL 0020 P16B |   | 16         | 20 | 20 | 24        | 170 | -  | 13,7 | 59013      | 58462     |
| SIR 0025 R16B | SIL 0025 R16B |   | 16         | 25 | 25 | 29        | 200 | -  | 16,2 | 59021      | 58464     |

\*Complete without anvil

Note:

- Insert and Boring Bar should always match; right-hand insert with right-hand bar, left-hand insert with left-hand bar.
- Boring Bars are made with a 1.5° helix angle. For other helix angle data, see Machining Guidelines section, pg E48-49.




*The ValTHREAD system combined with ValPro support sets new standards for productivity.*



# THREADING

## VaiTHREAD™ Common Insert Dimensions Chart

IN - RH  
EX - LH



EX - RH  
IN - LH



### Designation

IC = Inscribed Circle  
L = Theoretical Cutting Edge Length  
T = Insert Thickness  
H = Insert Hole Size





### External

| ISO Number | IC   | I     | T     | H     |
|------------|------|-------|-------|-------|
| 06 ER / L  | 5/32 | 0.273 | 0.073 | 0.089 |
| 08 ER / L  | 3/16 | 0.341 | 0.087 | 0.100 |
| 11 ER / L  | 1/4  | 0.433 | 0.126 | 0.128 |
| 16 ER / L  | 3/8  | 0.650 | 0.143 | 0.157 |
| 22 ER / L  | 1/2  | 0.866 | 0.188 | 0.197 |
| 27 ER / L  | 5/8  | 1.083 | 0.257 | 0.240 |

### Internal

| ISO Number | IC   | I     | T     | H     |
|------------|------|-------|-------|-------|
| 06 IR / L  | 5/32 | 0.273 | 0.073 | 0.089 |
| 08 IR / L  | 3/16 | 0.341 | 0.087 | 0.100 |
| 11 IR / L  | 1/4  | 0.433 | 0.126 | 0.128 |
| 16 IR / L  | 3/8  | 0.650 | 0.143 | 0.157 |
| 22 IR / L  | 1/2  | 0.866 | 0.188 | 0.197 |
| 27 IR / L  | 5/8  | 1.083 | 0.257 | 0.240 |

### Spare Parts




| Insert Size    | Insert Style | Insert Screw | Anvil Screw | Torx Wrench      | Anvil Right Hand | Anvil Left Hand |
|----------------|--------------|--------------|-------------|------------------|------------------|-----------------|
| 06 (5/32 inch) | Internal     | PT-807       | ---         | T-6 Torx Wrench  | ---              | ---             |
| 08 (3/16 inch) | Internal     | PT-808       | ---         | T-6 Torx Wrench  | ---              | ---             |
| 11 (1/4 Inch)  | Ext./Int.    | PT-809       | ---         | T-8 Torx Wrench  | ---              | ---             |
| 16 (3/8 Inch)  | External     | PT-810       | PT-804      | T-10 Torx Wrench | CAE16            | CAI16           |
| 16 (3/8 Inch)  | Internal     | PT-810       | PT-804      | T-10 Torx Wrench | CAI16            | CAE16           |
| 16 (3/8 Inch)* | Internal     | PT-810S      | PT-804      | T-10 Torx Wrench | CAI16            | CAE16           |
| 22 (1/2 Inch)  | External     | PT-811       | PT-805      | T-20 Torx Wrench | CAE22            | CAI22           |
| 22 (1/2 Inch)  | Internal     | PT-811       | PT-805      | T-20 Torx Wrench | CAI22            | CAE22           |
| 22U (1/2 Inch) | External     | PT-811       | PT-805      | T-20 Torx Wrench | CAE22U           | CAI22U          |
| 22U (1/2 Inch) | Internal     | PT-811       | PT-805      | T-20 Torx Wrench | CAI22U           | CAE22U          |
| 27 (5/8 Inch)  | External     | PT-812       | PT-806      | T-25 Torx Wrench | CAE27            | CAI27           |
| 27 (5/8 Inch)  | Internal     | PT-812       | PT-806      | T-25 Torx Wrench | CAI27            | CAE27           |
| 27U (5/8 Inch) | External     | PT-812       | PT-806      | T-25 Torx Wrench | CAE27U           | CAI27U          |
| 27U (5/8 Inch) | Internal     | PT-812       | PT-806      | T-25 Torx Wrench | CAI27U           | CAE27U          |

\* Use insert screw PT-810S for boring bars:

SIR/L 0500 M16  
SIR/L 0625 P16  
SIR/L 0013 M16  
SIR/L 0016 P16



### Standard and Slanted Anvils—Standard Positive Helix Anvils



| Dimensions        |          |              |       |              |       |              |       |         |       |              |       |
|-------------------|----------|--------------|-------|--------------|-------|--------------|-------|---------|-------|--------------|-------|
| Toolholder        | A (I.C.) | 4.5°         | EDP#  | 3.5°         | EDP#  | 2.5°         | EDP#  | 1.5°    | EDP#  | 0.5°         | EDP#  |
| EX, RH, or IN, LH | .375     | CAE 16 4.5P  | 08265 | CAE 16 3.5P  | 08264 | CAE 16 2.5P  | 08263 | CAE 16  | 08260 | CAE 16 0.5P  | 08310 |
| EX, LH, or IN, RH | .375     | CAI 16 4.5P  | 08291 | CAI 16 3.5P  | 08290 | CAI 16 2.5P  | 08289 | CAI 16  | 08286 | CAI 16 0.5P  | 08287 |
| EX, RH, or IN, LH | .500     | CAE 22 4.5P  | 08269 | CAE 22 3.5P  | 08268 | CAE 22.2 5P  | 24782 | CAE 22  | 08266 | CAE 22 0.5P  | 24781 |
| EX, LH, or IN, RH | .500     | CAI 22 4.5   | 24792 | CAI 22 3.5P  | 08297 | CAI 22 2.5P  | 08296 | CAI 22  | 08293 | CAI 22 0.5P  | 08294 |
| EX, RH, or IN, LH | .625     | CAE 27 4.5P  | 08278 | CAE 27 3.5P  | 24787 | CAE 27 2.5P  | 24786 | CAE 27  | 08275 | CAE 27 0.5P  | 24784 |
| EX, LH, or IN, RH | .625     | CAI 27 4.5P  | 24799 | CAI 27 3.5P  | 08313 | CAI 27 2.5P  | 08312 | CAI 27  | 08304 | CAI 27 0.5P  | 24797 |
| EX, RH, or IN, LH | .500U    | CAE 22U 4.5P | 24779 | CAE 22U 3.5P | 24772 | CAE 22U 2.5P | 24771 | CAE 22U | 08271 | CAE 22U 0.5P | 08273 |
| EX, LH, or IN, RH | .500U    | CAI 22U 4.5P | 08303 | CAI 22U 3.5P | 24789 | CAI 22U 2.5P | 08302 | CAI 22U | 08299 | CAI 22U 0.5P | 08300 |
| EX, RH, or IN, LH | .625U    | CAE 27U 4.5P | 08285 | CAE 27U 3.5P | 08284 | CAE 27U 2.5P | 08283 | CAE 27U | 08280 | CAE 27U 0.5P | 08282 |
| EX, LH, or IN, RH | .625U    | CAI 27U 4.5P | 08309 | CAI 27U 3.5P | 24795 | CAI 27U 2.5P | 08308 | CAI 27U | 08306 | CAI 27U 0.5P | 08307 |





### Standard Negative Helix Anvils

| Dimensions        |          |              |       |              |       |                    |       |
|-------------------|----------|--------------|-------|--------------|-------|--------------------|-------|
| Toolholder        | A (I.C.) | -0.5°        | EDP#  | -1.5°        | EDP#  | Multi-Tooth Anvils | EDP#  |
| EX, RH, or IN, LH | .375     | CAE 16 0.5N  | 08261 | CAE 16 1.5N  | 08262 | CAE 16M            | 24770 |
| EX, LH, or IN, RH | .375     | CAI 16 0.5N  | 08311 | CAI 16 1.5N  | 08288 | CAI 16M            | 08292 |
| EX, RH, or IN, LH | .500     | CAE 22 0.5N  | 24780 | CAE 22 1.5N  | 08267 | CAE 22M            | 08270 |
| EX, LH, or IN, RH | .500     | CAI 22 0.5N  | 24790 | CAI 22 1.5N  | 08295 | CAI 22M            | 08298 |
| EX, RH, or IN, LH | .625     | CAE 27 0.5N  | 08276 | CAE 27 1.5N  | 08277 | CAE 27M            | 08279 |
| EX, LH, or IN, RH | .625     | CAI 27 0.5N  | 24796 | CAI 27 1.5N  | 24798 | CAI 27M            | 08305 |
| EX, RH, or IN, LH | .500U    | CAE 22U 0.5N | 08272 | CAE 22U 1.5N | 08274 |                    |       |
| EX, LH, or IN, RH | .500U    | CAI 22U 0.5N | 24788 | CAI 22U 1.5N | 08301 |                    |       |
| EX, RH, or IN, LH | .625U    | CAE 27U 0.5N | 08281 | CAE 27U 1.5N | 24783 |                    |       |
| EX, LH, or IN, RH | .625U    | CAI 27U 0.5N | 24793 | CAI 27U 1.5N | 24794 |                    |       |




Note: See pages E48-49 for thread helix angle data.

# THREADING

## VaiTHREAD™ Threading Grade Descriptions
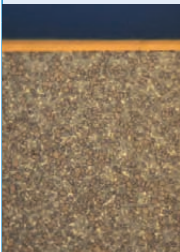
| Grade   | Description  | Performance   | ISO Class | Application   |
|---|--|---|-----------|---|
| <b>VC929</b><br>   | <b>PVD Coated Carbide</b><br>TiN Coating<br>Micro Grain Substrate                            | <b>Light Duty Grade</b><br>Excellent Wear Resistance<br>Low Build-Up at the Cutting Edge<br>Outstanding Edge Integrity  | P10       | Steels, Stainless Steels, Cast Irons, High Temperature Alloys, Titanium Alloys, Aluminum & Non-Ferrous Alloys.<br><br>Finish to General Purpose Machining. Medium to High Speeds.   |
|   |  |   | M15       |   |
|   |  |   | K15       |   |
|   |  |   | S10       |   |
|   |  |   | N10       |   |
| <b>VC922</b><br>  | <b>PVD Coated Carbide</b><br>TiAlN Coating<br>Micro Grain Substrate<br>High Cobalt Substrate | <b>Medium Duty Grade</b><br>Enhanced Crater Resistance<br>Excellent Wear Resistance<br>Excellent Toughness and Chipping Resistance<br>Less Build-Up at the Cutting Edge | P20       | Steels, Stainless Steels, Cast Irons, High Temperature Alloys, Titanium Alloys, Aluminum & Non-Ferrous Alloys.<br><br>General Purpose Machining. Medium to High Speeds. Continuous and Interrupted Cuts, and High Feed Rates. |
|   |  |   | M20       |   |
|   |  |   | K25       |   |
|   |  |   | S20       |   |
|   |  |   | N20       |   |
| <b>VC905</b><br> | <b>PVD Coated Carbide</b><br>TiN Coating<br>Medium Hardness                                  | <b>Medium Duty Grade</b><br>Good Deformation Resistance<br>Good Chipping Resistance   | P25       | Steels, Cast Steels, Ferritic and Martensitic Stainless Steels.<br><br>General Machining with Good Surface Finish, Continuous and Interrupted Cuts.   |
|   |  |   | M20       |   |
|   |  |   |           |   |
|   |  |   |           |   |
|   |  |   |           |   |
| <b>VC901</b><br> | <b>PVD Coated Carbide</b><br>TiN Coating<br>Micro Grain Substrate                            | <b>Medium Duty Grade</b><br>Excellent Toughness and Chipping Resistance<br>Good Deformation Resistance  | P30       | Steels, Stainless Steels, Cast Irons, High Temperature Alloys, Titanium Alloys, Non-Ferrous Alloys.<br><br>General Purpose Machining. Medium Speeds. Continuous and Interrupted Cuts, and High Feed Rates.                    |
|   |  |   | M25       |   |
|   |  |   | K30       |   |
|   |  |   | S25       |   |
|   |  |   | N25       |   |

## VaLTHREAD™ Threading Grade Descriptions
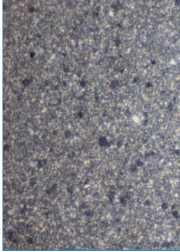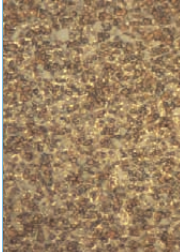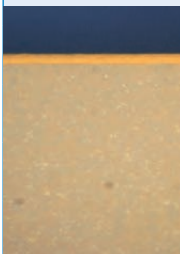
| Grade   | Description   | Performance   | ISO Class                       | Application   |
|---|---|---|---------------------------------|---|
| <b>VC29</b><br>    | <b>Uncoated Carbide</b><br>Micro Grain<br>High Hardness         | <b>Finishing Grade</b><br>Excellent Wear Resistance<br>Excellent Edge Strength<br>Enhanced Notch Resistance | M10<br>K10<br>S10<br>N15        | High Temperature Alloys, Titanium Alloys,<br>Aluminum and Non-Ferrous Alloys.<br>Finishing Applications.  |
| <b>VC5</b><br>    | <b>Uncoated Carbide</b><br>Medium Grain Size<br>Medium Hardness | <b>General Purpose Grade</b><br>Excellent Toughness<br>Good Wear Resistance and<br>Chipping Resistance      | P30<br>S25                      | Steels, Cast Steels, Stainless Steels. Low to<br>Medium Speed Under a Wide Range of Cutting<br>Conditions.<br>General Machining with Good Surface Finish,<br>Continuous and Interrupted Cuts.   |
| <b>VC942</b><br> | <b>PVD Coated HSS</b><br>TiN Coating                            | <b>Light Duty Grade</b><br>Excellent Edge Strength  | P25<br>M25<br>K25<br>S25<br>N25 | Steels, Stainless Steels, Cast Irons, High<br>Temperature Alloys, Titanium Alloys, Aluminum<br>& Non-Ferrous Alloys.<br>Finish to General Purpose Machining. Very<br>Low Speed Grade Especially for Small<br>Diameter Internal Threads. |

# THREADING

## V-VaI THREAD™ Guide to Workpiece Material

### ValPRO™ Color System Simplifies Tool Selection Process

Use the ValPRO™ color-coded identification system for matching our tools to your application. Color and letter designations correspond to the ISO standard classification system. These letters and colors are used throughout the catalog to reduce the time you spend looking for information.

| Material Group  | Category                                   | Material Designation  |
|---|--|---|
| <br>Steels                               | Free Machining and Low Carbon              | 1006, 1008, 1010, 1015, 1018, 1020, 1025, 1117, 1141, 1213, 12L13, 12L14, 11L41   |
|   | Medium Carbon and High Carbon              | 1030, 1035, 1040, 1045, 1052, 1055, 1060, 1085, 1095, 1424, 1541, 1551,   |
|   | Alloy and Easy To Machine Tool Steels      | 4130, 4150, 4340, 5140, 4320, 5120, 8620, 6150, 5200, W1, W2, W5, 300M  |
|   | Tool Steels and Die                        | M1, M2, T1, T4, T5, A2, A3, D2, D4, 01, H10, H11, P2, P20   |
| <br>Stainless Steels                     | Ferritic and Martensitic                   | 403, 405, 409, 410, 410S, 414, 430, 431, 434, 440, 442  |
|   | Austenitic                                 | 201, 203, 303, 304, 304L 316, 316L, 321, 327, Nitronic 40, Custom 455   |
|   | PH and Duplex                              | 15-5 PH, 17-4 PH, 13-8 Mo, AM350, AM355, Ferralium 255, 329, S32950   |
| <br>Cast Irons                         | Gray Cast Iron                             | ASTM A48, CClass 20, 25, 30, 35, 40   |
|   | Ductile and Malleable-Low & Medium Tensile | ASTM A546, Grades 60-40-18, 65-45-12, 80-55-06, SAE 434 J434C, Grade D7003, ASTM A220, Grades 7003, 820002, 900001, SAE JT58, Grades M7002, M8501 |
|   | Ductile and Malleable-High Tensile         | ASTM A536, Grades 100-70-03, SAE J434C, Grade D7003, ASTM A220 Grades 70003, 820002, 90001, SAE J158, Grades M7002, M8501                         |
| <br>High Temp Alloys                   | Iron Base Alloys                           | A-286, Incoloy 800, 801, 802, N-155, 19-9 DL  |
|   | Nickel and Cobalt Base Alloys              | Inconel 600, 625, 718 and X750, Waspaloy, Nimonic 90, Udimet 500 & 700, Monel Alloys L-605, Haynes Alloy 25, 188 Haynes Stellite 6, 21, WI-52     |
|   | Titanium Alloys                            | 6A14V, 5A1-2.5Sn, 6AL-2Sn-4Zr-6Mo   |
| <br>Aluminum And Non-Ferrous Materials | Aluminum Alloys < 7% Silicon               | AA 2014, 2024, 4032, 6061, 6151, 7075, SAE, 304, 335, 336, 380  |
|   | Aluminum Alloys 7% - 12% Silicon           | AA380, A380, 384, A384, SAE 303, 305, 306, 308, 309, 383  |
|   | Aluminum Alloys 12% - 18% Silicon          | AA 390, 392   |
|   | Non-Ferrous                                | Precious Metals, Copper & Brass Alloys, Plastics, Magnesium Alloys  |
| <br>Hardened Materials                 | Heat Treated Steels                        | 40-50- Rc   |
|   | Heat Treated Tool & Die Steels             | 50-60- Rc   |
|   | Chilled & Ni-Resist Cast Irons             | 40-60 Rc  |


## VaiTHREAD™ Application Guide for Threading

| Material Group                               | Category  | Threading Grade and Speed Selection<br>SFM (V m/min) |                            |                          |                         |                         |                          |                         |
|--|---|--|----------------------------|--------------------------|-------------------------|-------------------------|--------------------------|-------------------------|
|  |   | VC922  | VC929                      | VC901                    | VC905                   | VC5                     | VC29                     | VC942                   |
| <b>P</b><br>Steels                           | Free Machining and Low Carbon Steels<br>120 - 170 BHN           | 300 - 600<br>(90 - 180)                              | 330 - 650<br>(100 - 200)   | 200 - 500<br>(60 - 150)  | 260 - 550<br>(80 - 170) | 230 - 400<br>(70 - 125) | -                        | 30 - 130<br>(10 - 40)   |
|  | Medium Carbon and High Carbon Steels<br>180 - 220 BHN           | 275 - 550<br>(85 - 170)                              | 300 - 600<br>(90 - 180)    | 180 - 450<br>(55 - 135)  | 240 - 450<br>(75 - 140) | 200 - 330<br>(60 - 100) | -                        | 30 - 130<br>(10 - 40)   |
|  | Alloy Steels and Easy to Machine Tool Steels<br>200 - 240 BHN   | 275 - 450<br>(85 - 140)                              | 275 - 450<br>(85 - 140)    | 150 - 350<br>(45 - 110)  | 160 - 330<br>(50 - 100) | 160 - 260<br>(50 - 80)  | -                        | 30 - 130<br>(10 - 40)   |
|  | Tool Steels and Die Steels<br>220 - 260 BHN                     | 225 - 400<br>(70 - 120)                              | 225 - 400<br>(70 - 120)    | 125 - 225<br>(40 - 70)   | 140 - 275<br>(45 - 85)  | 100 - 200<br>(30 - 60)  | -                        | 30 - 130<br>(10 - 40)   |
| <b>M</b><br>Stainless Steels                 | Ferritic and Martensitic Stainless Steels<br>180 - 240 BHN      | 250 - 450<br>(75 - 140)                              | 300 - 400<br>(90 - 125)    | 150 - 350<br>(45 - 110)  | -                       | 200 - 300<br>(60 - 90)  | 250 - 350<br>(80 - 110)  | 15 - 100<br>(5 - 30)    |
|  | Austenitic Stainless Steels<br>140 - 180 BHN                    | 250 - 450<br>(75 - 140)                              | 300 - 400<br>(90 - 125)    | 100 - 300<br>(30 - 90)   | -                       | 200 - 300<br>(60 - 90)  | 250 - 350<br>(80 - 110)  | 15 - 100<br>(5 - 30)    |
|  | PH and Duplex Stainless Steels<br>220 - 260 BHN                 | 200 - 400<br>(60 - 120)                              | 250 - 350<br>(75 - 110)    | 85 - 250<br>(25 - 75)    | -                       | 150 - 250<br>(45 - 75)  | 200 - 300<br>(60 - 90)   | 15 - 100<br>(5 - 30)    |
| <b>K</b><br>Cast Iron                        | Gray Cast Irons<br>180 - 220 BHN                                | 275 - 500<br>(85 - 150)                              | 275 - 550<br>(85 - 170)    | 250 - 450<br>(75 - 140)  | -                       | -                       | 200 - 350<br>(60 - 110)  | 15 - 100<br>(5 - 30)    |
|  | Gray Cast Irons<br>220 - 260 BHN                                | 250 - 450<br>(75 - 140)                              | 250 - 450<br>(75 - 140)    | 200 - 400<br>(60 - 120)  | -                       | -                       | 180 - 300<br>(55 - 90)   | 15 - 100<br>(5 - 30)    |
|  | Ductile & Malleable Cast Irons<br>140 - 200 BHN                 | 300 - 550<br>(90 - 170)                              | 300 - 600<br>(90 - 180)    | 150 - 250<br>(45 - 75)   | -                       | -                       | 200 - 350<br>(60 - 110)  | 15 - 100<br>(5 - 30)    |
|  | Ductile & Malleable Cast Irons<br>200 - 260 BHN                 | 250 - 450<br>(75 - 140)                              | 250 - 450<br>(75 - 140)    | 125 - 200<br>(40 - 60)   | -                       | -                       | 180 - 300<br>(55 - 90)   | 15 - 100<br>(5 - 30)    |
| <b>S</b><br>High Temp Alloys                 | Iron & Nickel Based Alloys, Monel, Hastelloy, Inconel, Waspaloy | 125 - 350<br>(40 - 110)                              | 125 - 250<br>(40 - 75)     | 90 - 150<br>(30 - 45)    | -                       | -                       | 45 - 125<br>(15 - 40)    | 15 - 50<br>(5 - 15)     |
|  | Cobalt Based Alloys, Haynes Stellite                            | 125 - 350<br>(40 - 110)                              | 125 - 250<br>(40 - 75)     | 90 - 150<br>(30 - 45)    | -                       | -                       | 45 - 125<br>(15 - 40)    | 15 - 50<br>(5 - 15)     |
|  | Titanium Alloys<br>6Al-4V                                       | 125 - 350<br>(40 - 110)                              | 125 - 250<br>(40 - 75)     | 90 - 150<br>(30 - 45)    | -                       | -                       | 30 - 100<br>(15 - 35)    | 15 - 50<br>(5 - 15)     |
| <b>N</b><br>Aluminum & Non-Ferrous Materials | Aluminum Alloys <7% Silicon                                     | 1200 - 2600<br>(365 - 800)                           | 1200 - 1800<br>(365 - 550) | 150 - 800<br>(45 - 245)  | -                       | -                       | 400 - 650<br>(120 - 200) | 100 - 350<br>(30 - 110) |
|  | Aluminum Alloys 7% - 12% Silicon                                | 1000 - 2400<br>(305 - 730)                           | 1000 - 1600<br>(305 - 490) | 100 - 650<br>(35 - 200)  | -                       | -                       | 350 - 600<br>(110 - 180) | 100 - 350<br>(30 - 110) |
|  | Aluminum Alloys 12% - 18% Silicon                               | 900 - 1500<br>(275 - 460)                            | 900 - 1400<br>(275 - 430)  | 50 - 400<br>(15 - 120)   | -                       | -                       | 200 - 400<br>(60 - 120)  | 75 - 200<br>(25 - 60)   |
|  | Copper Alloys   | 600 - 1000<br>(180 - 305)                            | 600 - 1000<br>(180 - 305)  | 500 - 900<br>(150 - 275) | -                       | -                       | 175 - 300<br>(55 - 90)   | 100 - 350<br>(30 - 110) |
| <b>H</b><br>Hardened Materials               | Steels<br>45 - 50 Rc  | 75 - 200<br>(25 - 60)                                | 60 - 150<br>(18 - 45)      | 60 - 125<br>(18 - 40)    | -                       | -                       | -                        | -                       |
|  | Steels<br>50 - 60 Rc  | 60 - 175<br>(18 - 55)                                | 50 - 125<br>(15 - 40)      | 50 - 100<br>(15 - 30)    | -                       | -                       | -                        | -                       |
|  | Chilled Irons<br>45 - 50 Rc                                     | 75 - 200<br>(25 - 60)                                | 60 - 150<br>(18 - 45)      | 60 - 125<br>(18 - 40)    | -                       | -                       | -                        | -                       |

# THREADING

## VaiTHREAD™ Machining Guidelines

### Threading Methods

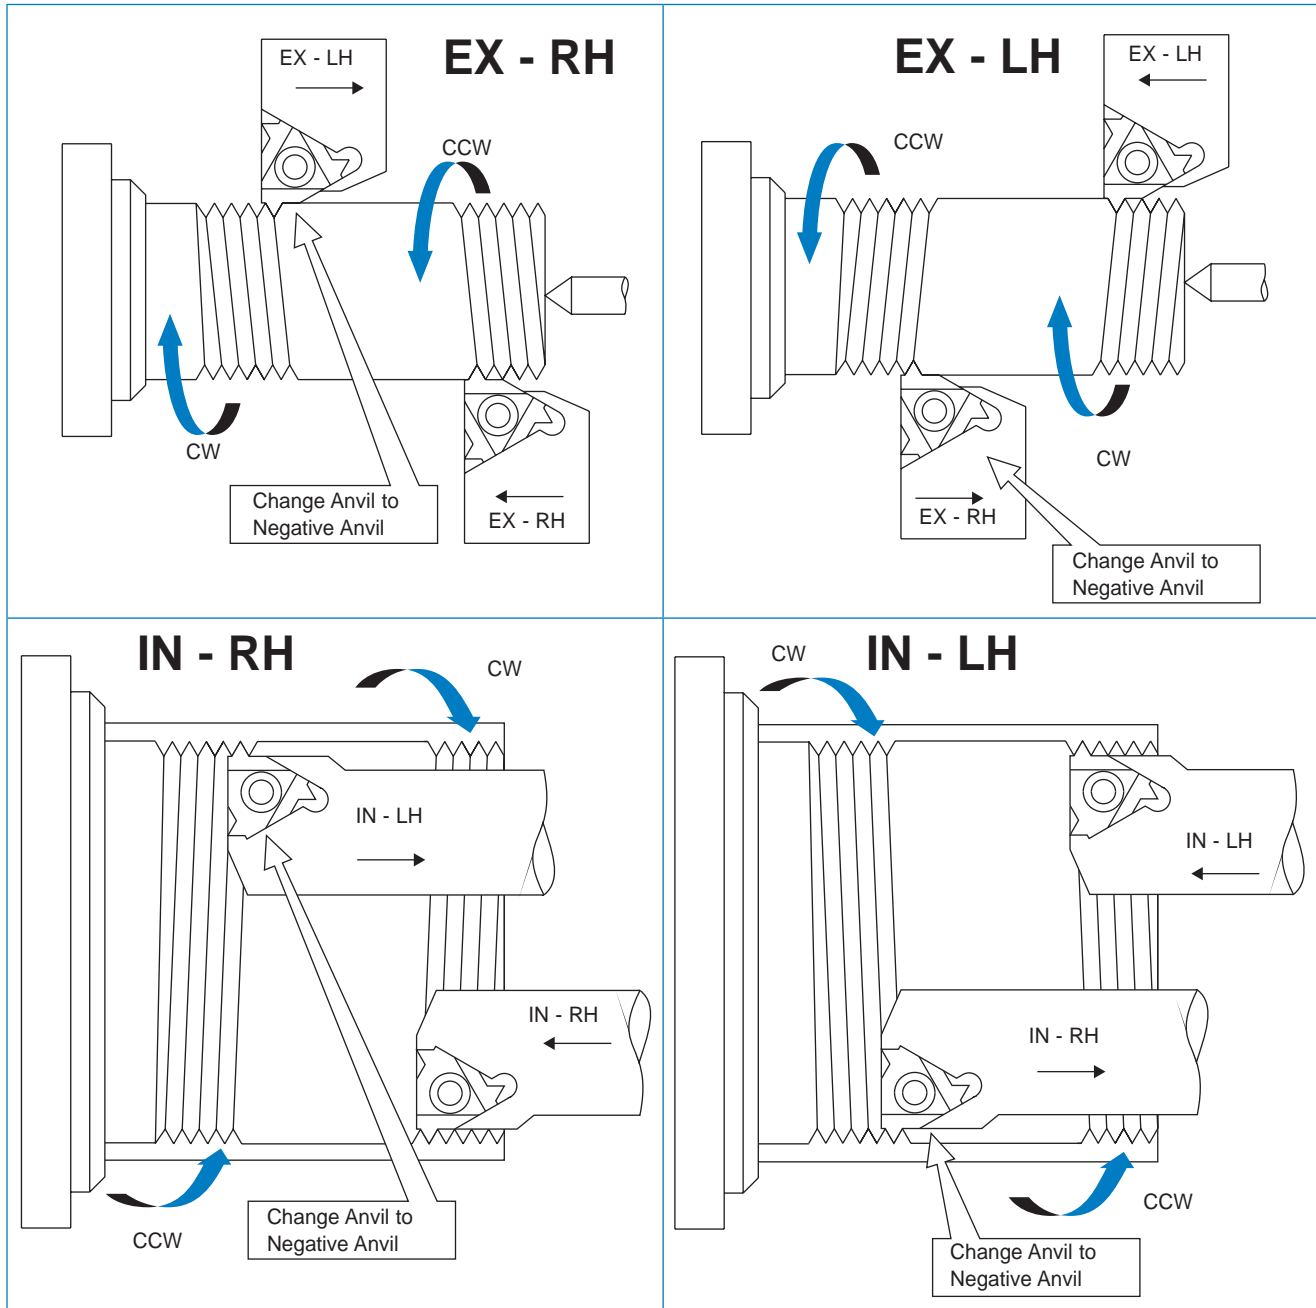

### Number of Cutting Passes Selection


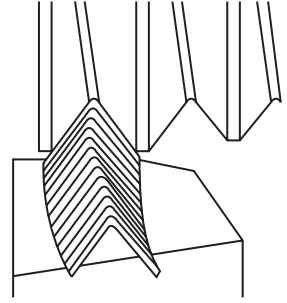

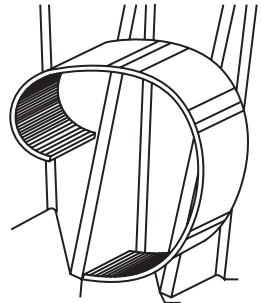

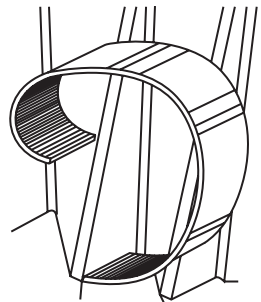



| Pitch Millimeters | 0.5 | 1.0 | 1.5  | 2.0  | 2.5  | 3.0  | 4.0   | 6.0   |
|-------------------|-----|-----|------|------|------|------|-------|-------|
| Threads Per Inch  | 48  | 24  | 16   | 12   | 10   | 8    | 6     | 4     |
| Number of Passes  | 3-6 | 4-9 | 5-11 | 6-13 | 7-15 | 8-17 | 10-20 | 11-22 |

#### Thread Pass Notes:






- For most standard applications, choose the middle of the range as a good starting point.
- In most cases, the tougher the material, the higher the number of cutting passes required.
- As a general rule of thumb, less passes are better than increasing speed.

### Infeed Angle Selection and Chip Formation

### Typical Chip Formation

|  |   |   |   |
|--|---|---|---|
| <p><b>Infeed Angle 0°</b></p> <p><b>Benefit:</b> Cutting edge is protected from chipping by both sides in cut.</p> <p><b>Problem:</b> Both sides of insert are heated by the workpiece. Produces “Vee” chips which can be very difficult to handle.</p>        |    |     |   |
| <p><b>Infeed Angle 30°</b></p> <p><b>Benefit:</b> Chip is curled away from thread form.</p> <p><b>Problem:</b> Trailing edge may drag rather than cut, which may cause chipping.</p>   |    |    |   |
| <p><b>Infeed Angle 29°</b></p> <p><b>Benefit:</b> Cutting edge is protected from chipping by both sides in cut. Chip is curled away from thread form. Part of the heat generated is dissipated to the trailing edge. Final pass infeed angle should be 0°.</p> |  |  |   |
| <p><b>Alternating Flank Infeed</b></p> <p><b>For very large thread forms</b></p> <p><b>Benefit:</b> Increased tool life because both edges are used effectively. Final pass should be 0°.</p>  |  |   |  |


### The coolant should provide:

|  |  |  |  |   |
|--|--|--|--|---|
|  <p>Fast heat removal</p> |  <p>Good surface coverage</p> |  <p>Non-corrosiveness</p> |  <p>Homogeneity and stability</p> |  <p>Good lubricant qualities</p> |
|--|--|--|--|---|

# THREADING


## VaiTHREAD™ Machining Guidelines

### Thread Helix Angle

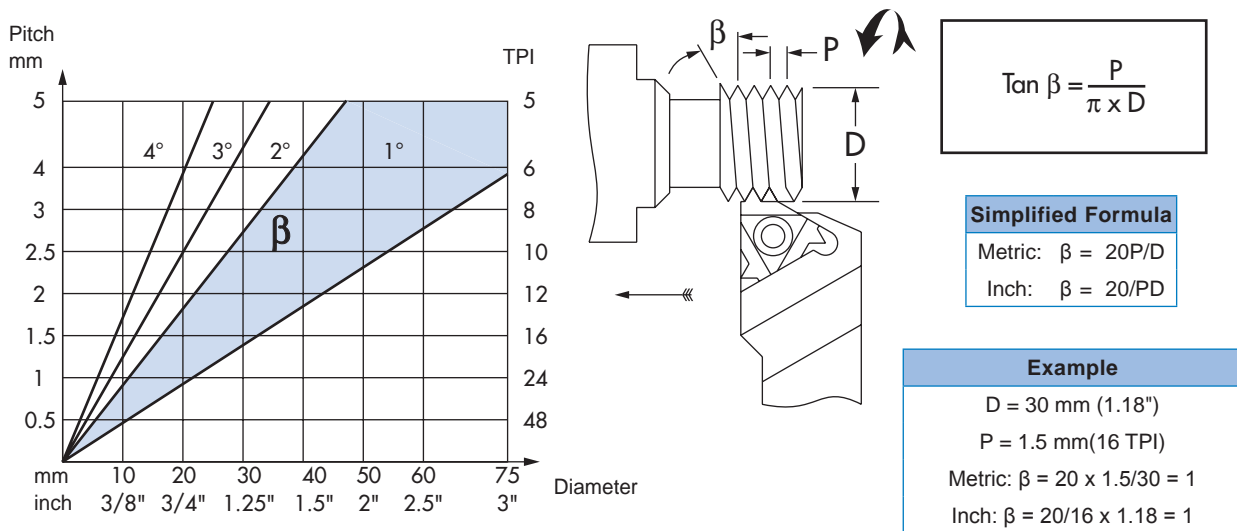


### Standard and Slanted Anvils

Valenite toolholder and boring bar pockets have a built-in 1.5 helix compensation angle. This angle may be adjusted to match the helix angle of the thread being produced by replacing the anvil.



**Positive Helix Angles**  
Applicable when turning RH thread with RH holder or LH thread with LH holder.





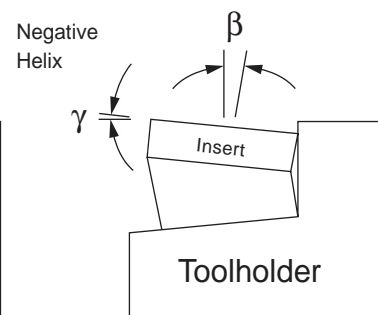


**Negative Helix Angles**  
Applicable when turning RH thread with LH holder or LH thread with RH holder.

See Page E41 for Standard and Slanted Anvil product listing.



### Recommended Anvil Replacements

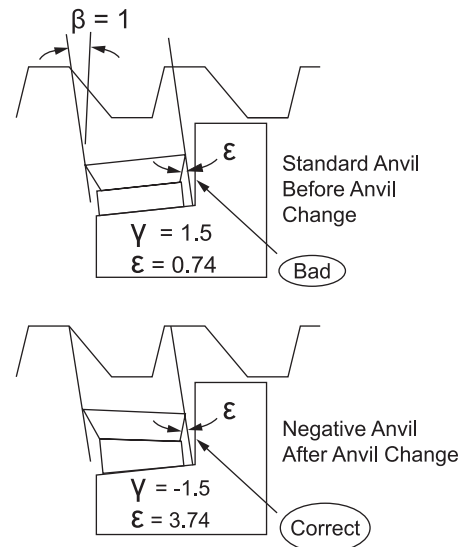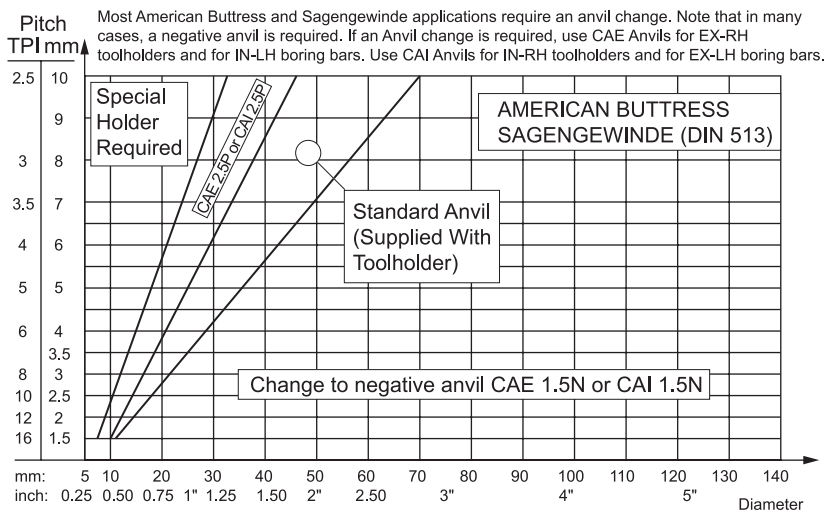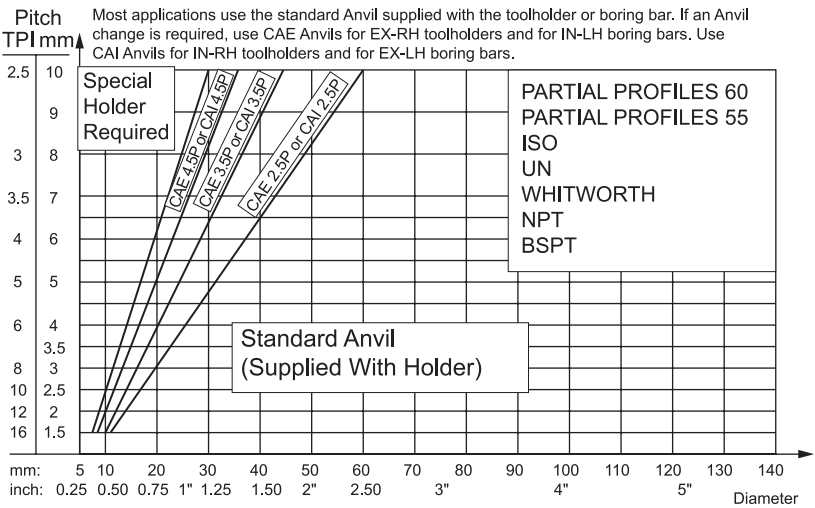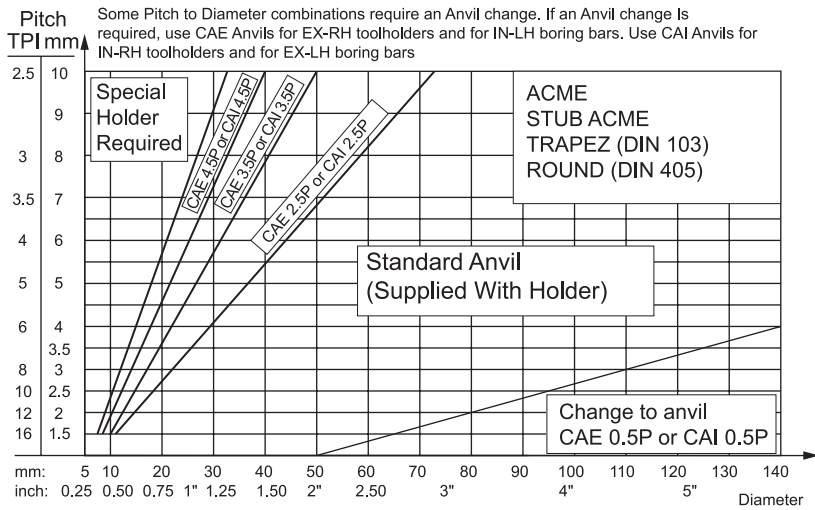

# THREADING

## VaiTHREAD™ Failure Modes

| Problem                | Control Action/Remedy  |
|------------------------|--|
| Shallow Thread Profile | <ul style="list-style-type: none"> <li>Adjust center height</li> <li>Replace insert</li> </ul> |

|                   |  |
|-------------------|--|
| Uneven Flank Wear | <ul style="list-style-type: none"> <li>Decrease number of passes</li> <li>Change infeed angle</li> </ul> |
|-------------------|--|

|                        |   |
|------------------------|---|
| Trailing Edge Chipping | <ul style="list-style-type: none"> <li>Select tougher grade</li> <li>Change infeed angle</li> </ul> |
|------------------------|---|

|                       |  |
|-----------------------|--|
| Leading Edge Chipping | <ul style="list-style-type: none"> <li>Reduce DOC on first pass</li> <li>Select tougher grade</li> </ul> |
|-----------------------|--|

|                           |   |
|---------------------------|---|
| Crest Burr or Torn Finish | <ul style="list-style-type: none"> <li>Use topping insert</li> <li>Change infeed angle</li> </ul> |
|---------------------------|---|

|                |  |
|----------------|--|
| Poor Tool Life | <ul style="list-style-type: none"> <li>Decrease speed (SFM)</li> <li>Select wear resistant grade</li> <li>Apply coolant</li> </ul> |
|----------------|--|


|                      |  |
|----------------------|--|
| Excessive Flank Wear | <ul style="list-style-type: none"> <li>Decrease speed (SFM)</li> <li>Select wear resistant grade</li> <li>Change Infeed Angle</li> </ul> |
|----------------------|--|

| Problem     | Control Action/Remedy  |
|-------------|--|
| Deformation | <ul style="list-style-type: none"> <li>Decrease speed (SFM)</li> <li>Select wear resistant grade</li> <li>Apply coolant</li> <li>Reduce DOC on first pass</li> </ul> |

|          |   |
|----------|---|
| Fracture | <ul style="list-style-type: none"> <li>Reduce DOC on first pass</li> <li>Change infeed angle</li> <li>Adjust center height</li> <li>Select tougher grade</li> </ul> |
|----------|---|


|         |  |
|---------|--|
| Chatter | <ul style="list-style-type: none"> <li>Reduce tool overhang</li> <li>Adjust center height</li> <li>Check insert for movement and reseat</li> <li>Increase speed (SFM)</li> </ul> |
|---------|--|

|               |   |
|---------------|---|
| Built-Up Edge | <ul style="list-style-type: none"> <li>Increase speed (SFM)</li> <li>Decrease number of passes</li> <li>Apply coolant</li> <li>Select positive rake angle</li> <li>Use PVD coated insert</li> </ul> |
|---------------|---|

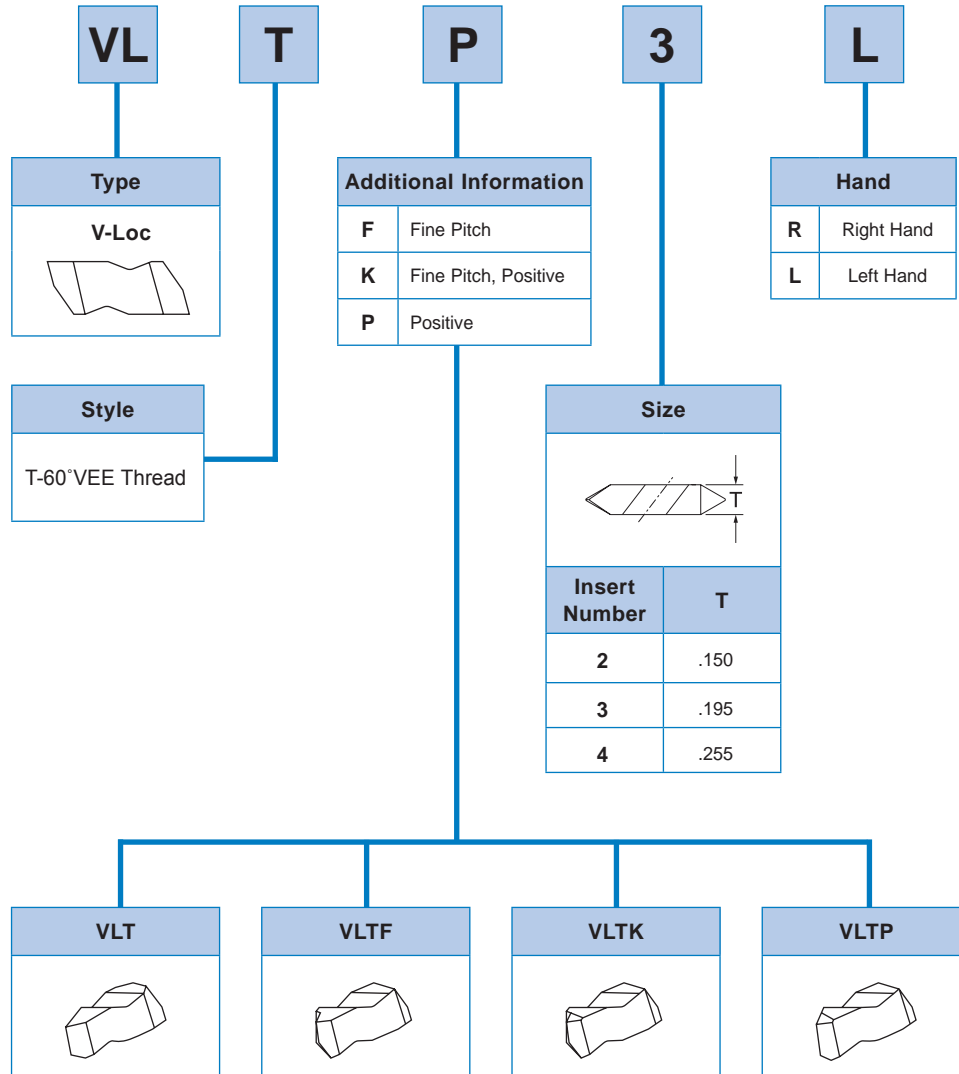


# THREADING

## V-LOC® Toolholders Designation

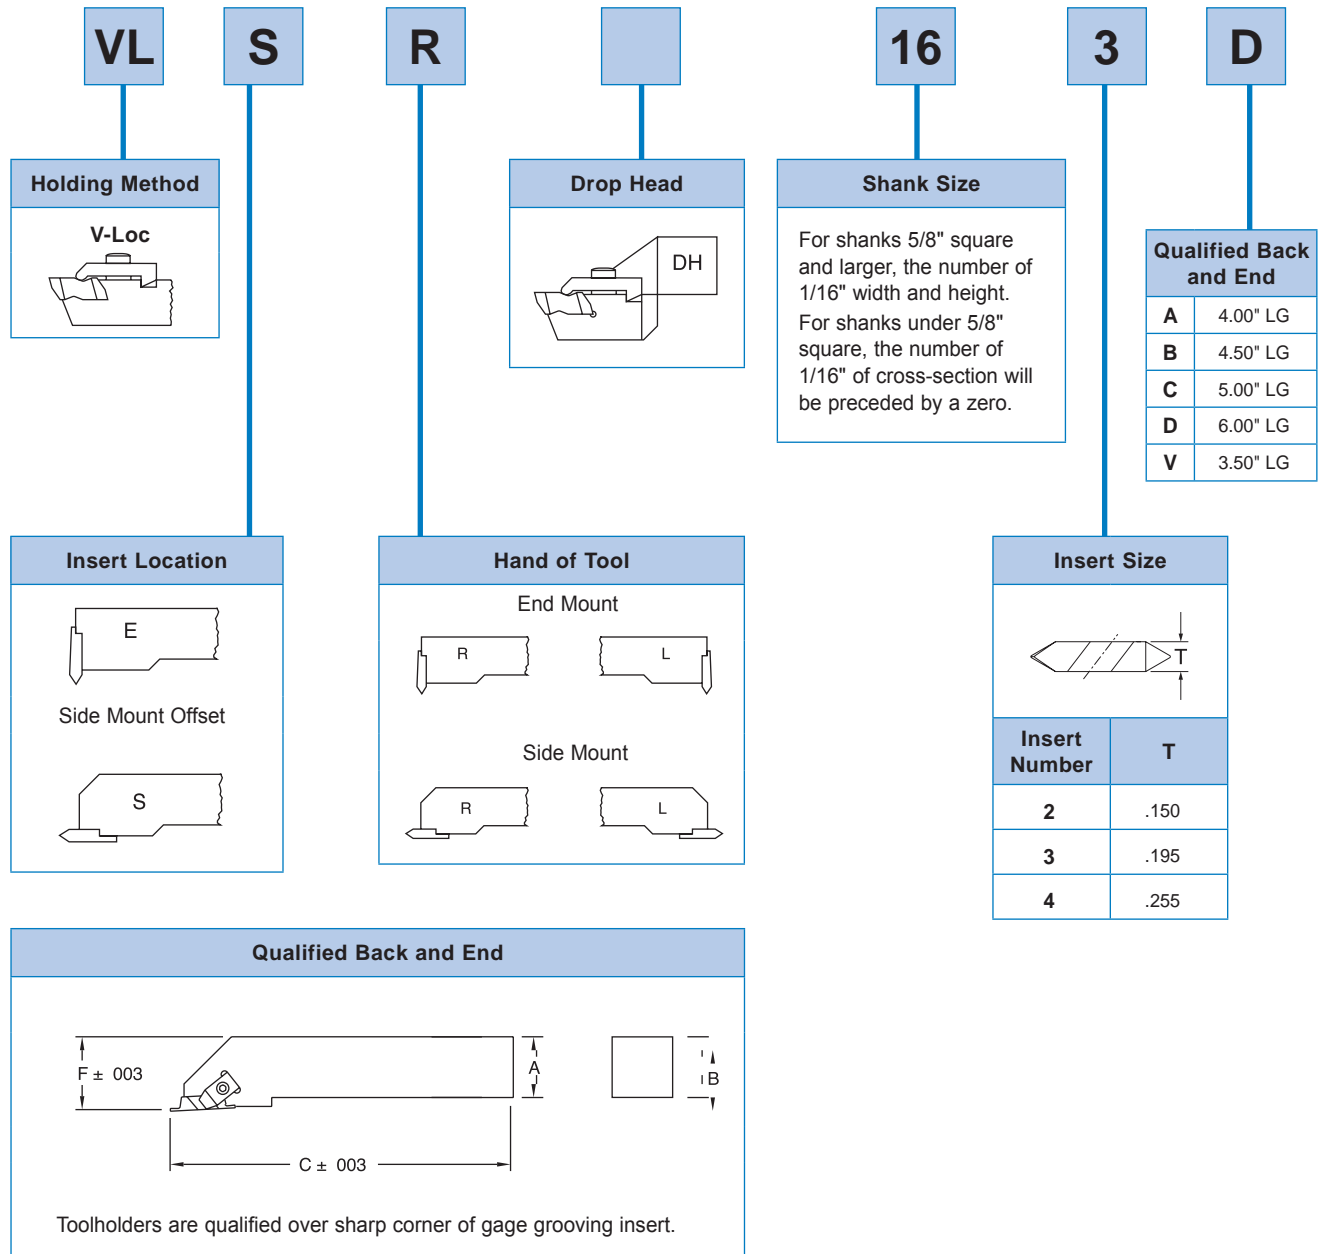

## V-LOC® Boring Bars Designation

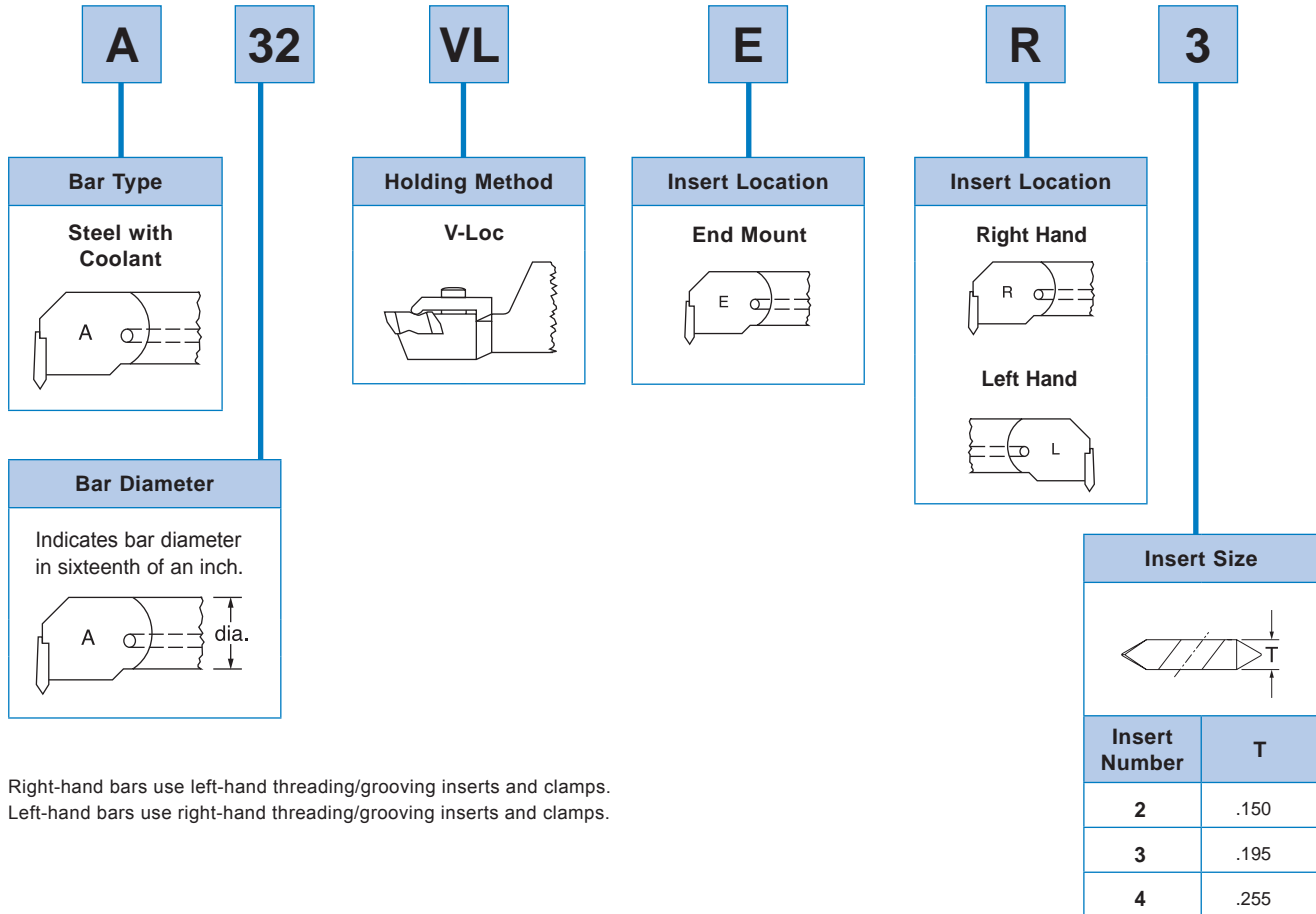



Right-hand bars use left-hand threading/grooving inserts and clamps.  
 Left-hand bars use right-hand threading/grooving inserts and clamps.

# THREADING





## V-LOC® Grade Description

### Threading System

| Grade  | Description  | Performance   | ISO Class | Application   |
|--|--|---|-----------|---|
| <b>VP5820</b><br>   | <b>PVD Coated Carbide</b><br>TiAlN/TiN Multi-Layer Coating<br>Micro Grain Substrate<br>High Cobalt Substrate | <b>General Machining Grade</b><br>Enhanced Crater Resistance<br>Excellent Wear Resistance<br>Excellent Toughness and Chipping Resistance<br>Low Cutting Edge Build-Up | P20       | Steels, Stainless Steels, Cast Irons, High Temperature Alloys, Titanium Alloys, Aluminum & Non-Ferrous Alloys.<br><br>General Purpose Machining. Medium to High Speeds. Continuous and Interrupted Cuts, and Medium to High Feed Rates. |
|  |  |   | M20       |   |
|  |  |   | K20       |   |
|  |  |   | S20       |   |
|  |  |   | N20       |   |
| <b>VP5410</b><br>  | <b>PVD Coated Carbide</b><br>TiN Coating<br>Micro Grain Substrate<br>Dense Smooth Coating                    | <b>Light Duty Grade</b><br>Excellent Wear Resistance<br>Low Cutting Edge Build-Up<br>Outstanding Edge Integrity   | P10       | Steels, Stainless Steels, Cast Irons, High Temperature Alloys, Titanium Alloys, Non-Ferrous Alloys.<br><br>Finish to General Purpose Machining. Medium to High Speeds in Good Machining Conditions.                                     |
|  |  |   | M15       |   |
|  |  |   | K15       |   |
|  |  |   | S10       |   |
|  |  |   | N10       |   |
| <b>VP5425</b><br> | <b>PVD Coated Carbide</b><br>TiN Coating<br>Micro Grain Substrate<br>Dense Smooth Coating                    | <b>Medium Duty Grade</b><br>Excellent Toughness and Chipping Resistance<br>Good Deformation Resistance  | P30       | Steels, Stainless Steels, Cast Irons, High Temperature Alloys, Titanium Alloys, Non-Ferrous Alloys.<br><br>General Purpose Machining. Medium Speeds. Continuous and Interrupted Cuts, and High Feed Rates.                              |
|  |  |   | M25       |   |
|  |  |   | K30       |   |
|  |  |   | S25       |   |
|  |  |   | N25       |   |
| <b>VPUS10</b><br> | <b>Uncoated Carbide</b><br>Micro Grain<br>High Hardness  | <b>Finishing Grade</b><br>Excellent Wear Resistance<br>Excellent Edge Strength<br>Enhanced Notch Resistance   | M10       | High Temperature Alloys, Titanium Alloys, Aluminum and Non-Ferrous Alloys.<br><br>Finishing Applications.   |
|  |  |   | K10       |   |
|  |  |   | S10       |   |
|  |  |   | N15       |   |

## V-LOC® Insert Geometry Application Data



### Threading System

| Insert Style   | Description   | Materials   | Application   |
|--|---|---|---|
| <b>VLT</b><br>    | <b>Threading</b><br>Partial profile 60° threading.<br>General use for UN and ISO.<br>Non-crested inserts to cut a variety of thread pitches.  | Steels<br>Stainless Steels<br>Cast Irons<br>High Temperature Alloys<br>Aluminum/ Non-Ferrous<br>Hardened Material | <b>Main application area:</b><br>General threading operations<br>Light to medium feed rates |
| <b>VLTF</b><br> | <b>Threading</b><br>Fine pitch partial profile 60° threading.<br>General use for UN and ISO.<br>Non-crested inserts to cut a variety of thread pitches.<br>Capability to thread close to a shoulder.                                  | Steels<br>Stainless Steels<br>Cast Irons<br>High Temperature Alloys<br>Aluminum/ Non-Ferrous<br>Hardened Material | <b>Main application area:</b><br>General threading operations<br>Light to medium feed rates |
| <b>VLTK</b><br> | <b>Threading</b><br>Fine pitch partial profile 60° threading, with positive rake.<br>General use for UN and ISO.<br>Non-crested inserts to cut a variety of thread pitches.<br>Good for stainless, non-ferrous, and high temp alloys. | Steels<br>Stainless Steels<br>Cast Irons<br>High Temperature Alloys<br>Aluminum/ Non-Ferrous<br>Hardened Material | <b>Main application area:</b><br>General threading operations<br>Light to medium feed rates |
| <b>VLTP</b><br> | <b>Threading</b><br>Partial profile 60° threading, with positive rake.<br>General use for UN and ISO.<br>Non-crested inserts to cut a variety of thread pitches.<br>Good for stainless, non-ferrous, and high temp alloys.            | Steels<br>Stainless Steels<br>Cast Irons<br>High Temperature Alloys<br>Aluminum/ Non-Ferrous<br>Hardened Material | <b>Main application area:</b><br>General threading operations<br>Light to medium feed rates |

# THREADING

## V-LOC® Product Offering




### VLT



For common insert dimensions A, B & T, see chart page E63.

| Part Number |           | Insert Dimensions |          |          |            |           |       |      |       |      | ValPro Selection       |       |       |       |
|-------------|-----------|-------------------|----------|----------|------------|-----------|-------|------|-------|------|------------------------|-------|-------|-------|
|             |           | Insert Size       | TPI      |          | Pitch (mm) |           | R     |      | E     |      | Available Grades EDP # |       |       |       |
| Right Hand  | Left Hand |                   | External | Internal | External   | Internal  | Inch  | mm   | Inch  | mm   | 5820                   | 5410  | 5425  | US10  |
| VLT 2R      |           | 2                 | 8-36     | 7-20     | 0.70-3.00  | 1.25-3.50 | 0.004 | 0.10 | 0.075 | 1.91 | 23119                  | 24597 |       | 24596 |
|             | VLT 2L    | 2                 | 8-36     | 7-20     | 0.70-3.00  | 1.25-3.50 | 0.004 | 0.10 | 0.075 | 1.91 | 23118                  | 24595 |       |       |
| VLT 3R      |           | 3                 | 6-20     | 5-12     | 1.25-4.00  | 2.00-5.00 | 0.007 | 0.17 | 0.098 | 2.49 | 23121                  | 24602 | 24753 | 24601 |
|             | VLT 3L    | 3                 | 6-20     | 5-12     | 1.25-4.00  | 2.00-5.00 | 0.007 | 0.17 | 0.098 | 2.49 | 23120                  | 24599 | 24752 | 24598 |
| VLT 4R      |           | 4                 | 4-20     | 4-12     | 1.25-6.25  | 2.00-6.25 | 0.007 | 0.17 | 0.128 | 3.25 | 23123                  | 24605 |       |       |
|             | VLT 4L    | 4                 | 4-20     | 4-12     | 1.25-6.26  | 2.00-6.25 | 0.007 | 0.17 | 0.128 | 3.25 | 23122                  | 24604 |       |       |

### VLTP






For common insert dimensions A, B & T, see chart page E63.

| Part Number |           | Insert Dimensions |          |          |            |           |       |      |       |      | ValPro Selection       |       |       |       |
|-------------|-----------|-------------------|----------|----------|------------|-----------|-------|------|-------|------|------------------------|-------|-------|-------|
|             |           | Insert Size       | TPI      |          | Pitch (mm) |           | R     |      | E     |      | Available Grades EDP # |       |       |       |
| Right Hand  | Left Hand |                   | External | Internal | External   | Internal  | Inch  | mm   | Inch  | mm   | 5820                   | 5410  | 5425  | US10  |
| VLTP 2R     |           | 2                 | 8-36     | 7-20     | 0.70-3.00  | 1.25-3.50 | 0.004 | 0.10 | 0.075 | 1.91 | 23113                  | 24589 |       |       |
|             | VLTP 2L   | 2                 | 8-36     | 7-20     | 0.70-3.00  | 1.25-3.50 | 0.004 | 0.10 | 0.075 | 1.91 | 23112                  | 24588 |       |       |
| VLTP 3R     |           | 3                 | 6-20     | 5-12     | 1.25-4.00  | 2.00-5.00 | 0.007 | 0.17 | 0.098 | 2.49 | 23115                  | 24593 | 24751 | 24592 |
|             | VLTP 3L   | 3                 | 6-20     | 5-12     | 1.25-4.00  | 2.00-5.00 | 0.007 | 0.17 | 0.098 | 2.49 | 23114                  | 24590 | 24750 |       |
| VLTP 4R     |           | 4                 | 4-20     | 4-12     | 1.25-6.25  | 2.00-6.25 | 0.007 | 0.17 | 0.128 | 3.25 | 23117                  |       |       |       |
|             | VLTP 4L   | 4                 | 4-20     | 4-12     | 1.25-6.26  | 2.00-6.25 | 0.007 | 0.17 | 0.128 | 3.25 | 23116                  |       |       |       |







### VLTF



For common insert dimensions A, B & T, see chart page E63.

| Part Number |           | Insert Dimensions |          |          |            |           |       |      |       |      | ValPro Selection       |       |      |       |
|-------------|-----------|-------------------|----------|----------|------------|-----------|-------|------|-------|------|------------------------|-------|------|-------|
|             |           | Insert Size       | TPI      |          | Pitch (mm) |           | R     |      | E     |      | Available Grades EDP # |       |      |       |
| Right Hand  | Left Hand |                   | External | Internal | External   | Internal  | Inch  | mm   | Inch  | mm   | 5820                   | 5410  | 5425 | US10  |
| VLTF 2R     |           | 2                 | 14-44    | 12-24    | 0.60-1.75  | 1.00-2.00 | 0.003 | 0.08 | 0.110 | 2.79 | 23109                  | 24578 |      |       |
|             | VLTF 2L   | 2                 | 14-44    | 12-24    | 0.60-1.75  | 1.00-2.00 | 0.003 | 0.08 | 0.110 | 2.79 | 23348                  | 24577 |      |       |
| VLTF 3R     |           | 3                 | 10-44    | 9-24     | 0.60-2.50  | 1.00-2.50 | 0.003 | 0.08 | 0.141 | 3.58 | 23478                  | 24581 |      | 24580 |
|             | VLTF 3L   | 3                 | 10-44    | 9-24     | 0.60-2.50  | 1.00-2.50 | 0.003 | 0.08 | 0.141 | 3.58 | 23477                  | 24579 |      |       |
| VLTF 4R     |           | 4                 | 10-44    | 9-24     | 0.60-2.50  | 1.00-2.50 | 0.003 | 0.08 | 0.201 | 5.11 | 23480                  |       |      |       |
|             | VLTF 4L   | 4                 | 10-44    | 9-24     | 0.60-2.50  | 1.00-2.50 | 0.003 | 0.08 | 0.201 | 5.11 | 23479                  |       |      |       |

### VLTK



For common insert dimensions A, B & T, see chart page E63.


| Part Number |           | Insert Dimensions |          |          |            |           |       |      |       |      | ValPro Selection       |       |       |       |
|-------------|-----------|-------------------|----------|----------|------------|-----------|-------|------|-------|------|------------------------|-------|-------|-------|
|             |           | Insert Size       | TPI      |          | Pitch (mm) |           | R     |      | E     |      | Available Grades EDP # |       |       |       |
| Right Hand  | Left Hand |                   | External | Internal | External   | Internal  | Inch  | mm   | Inch  | mm   | 5820                   | 5410  | 5425  | US10  |
| VLTK 2R     |           | 2                 | 14-44    | 12-24    | 0.60-1.75  | 1.00-2.00 | 0.003 | 0.08 | 0.110 | 2.79 | 23350                  | 24583 |       |       |
|             | VLTK 2L   | 2                 | 14-44    | 12-24    | 0.60-1.75  | 1.00-2.00 | 0.003 | 0.08 | 0.110 | 2.79 | 23349                  | 24582 |       |       |
| VLTK 3R     |           | 3                 | 10-44    | 9-24     | 0.60-2.50  | 1.00-2.50 | 0.003 | 0.08 | 0.141 | 3.58 | 23111                  | 24586 | 24749 | 24585 |
|             | VLTK 3L   | 3                 | 10-44    | 9-24     | 0.60-2.50  | 1.00-2.50 | 0.003 | 0.08 | 0.141 | 3.58 | 23110                  | 24584 |       |       |

# THREADING

## V-LOC® Grooving and Threading Toolholders

### VLS-R/L—Offset Grooving & Threading 3° Lead

Use Insert Style:  
VLTx

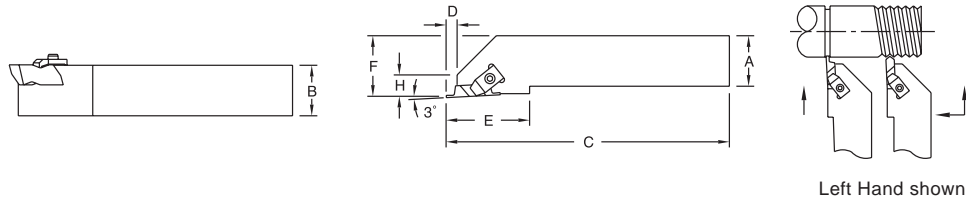

Left Hand shown

Right-hand shown, Left-hand opposite

| Part Number |            | Insert*  | Dimensions |       |       |       |       |       |       | EDP#       |           |
|-------------|------------|----------|------------|-------|-------|-------|-------|-------|-------|------------|-----------|
| Right Hand  | Left Hand  |          | A          | B     | C     | D     | E     | F**   | H     | Right Hand | Left Hand |
| VLSR 06 2   |            | VL-2R    | 0.375      | 0.375 | 2.500 | 0.138 | 0.750 | 0.562 | 0.350 | 58681      |           |
|             | VLSL 06 2  | VL-2L    |            |       |       |       |       |       |       |            | 58671     |
| VLSR 08 2V  |            | VL-2R    | 0.500      | 0.500 | 3.500 | 0.138 | 0.750 | 0.750 | 0.350 | 58682      |           |
|             | VLSL 08 2V | VL-2L    |            |       |       |       |       |       |       |            | 58672     |
| VLSR 12 2B  |            | VL-2R    | 0.750      | 0.750 | 4.500 | 0.138 | 0.750 | 1.000 | 0.350 | 58683      |           |
|             | VLSL 12 2B | VL-2L    |            |       |       |       |       |       |       |            | 58673     |
| VLSR 16 2C  |            | VL-2R*** | 1.000      | 1.000 | 5.000 | 0.138 | 0.750 | 1.250 | 0.350 | 58685      |           |
|             | VLSL 16 2C | VL-2L*** |            |       |       |       |       |       |       |            | 58675     |
| VLSR 12 3B  |            | VL-3R    | 0.750      | 0.750 | 4.500 | 0.210 | 1.250 | 1.000 | 0.500 | 58684      |           |
|             | VLSL 12 3B | VL-3L    |            |       |       |       |       |       |       |            | 58674     |
| VLSR 16 3C  |            | VL-3R    | 1.000      | 1.000 | 5.000 | 0.210 | 1.250 | 1.250 | 0.500 | 58686      |           |
|             | VLSL 16 3C | VL-3L    |            |       |       |       |       |       |       |            | 58676     |
| VLSR 16 3D  |            | VL-3R    | 1.000      | 1.000 | 6.000 | 0.210 | 1.250 | 1.250 | 0.500 | 58687      |           |
|             | VLSL 16 3D | VL-3L    |            |       |       |       |       |       |       |            | 58677     |
| VLSR 85 3D  |            | VL-3R    | 1.000      | 1.250 | 6.000 | 0.210 | 1.250 | 1.250 | 0.500 | 58689      |           |
|             | VLSL 85 3D | VL-3L    |            |       |       |       |       |       |       |            | 58679     |
| VLSR 20 3D  |            | VL-3R    | 1.250      | 1.250 | 6.000 | 0.210 | 1.250 | 1.500 | 0.500 | 58689      |           |
|             | VLSL 20 3D | VL-3L    |            |       |       |       |       |       |       |            | 58678     |
| VLSR 16 4D  |            | VL-4R    | 1.000      | 1.000 | 5.000 | 0.294 | 1.330 | 1.250 | 0.540 | 58688      |           |
|             | VLSL 16 4D | VL-4L    |            |       |       |       |       |       |       |            | 61906     |
| VLSR 20 4D  |            | VL-4R    | 1.250      | 1.250 | 6.000 | 0.294 | 1.380 | 1.500 | 0.540 | 61908      |           |
|             | VLSL 20 4D | VL-4L    |            |       |       |       |       |       |       |            | 61907     |

| Insert     |           | Part #/<br>EDP# | Shim Seat | Shim Screw | Clamp      |           | Clamp Screw      |
|------------|-----------|-----------------|-----------|------------|------------|-----------|------------------|
| Right Hand | Left Hand |                 |           |            | Right Hand | Left Hand |                  |
| VL-2R      | VL-2L     | Part#           | -         | -          | VL-74      | VL-75     | 6-32 x 1/2 SHCS  |
|            |           | EDP#            |           |            | 58721      | 58722     | 52090            |
| VL-2R***   | VL-2L***  | Part#           | -         | -          | VL-74      | VL-75     | 10-32 x 3/4 SHCS |
|            |           | EDP#            |           |            | 58721      | 58722     | 51991            |
| VL-3R      | VL-3L     | Part#           | -         | -          | VL-72      | VL-73     | 10-32 x 3/4 SHCS |
|            |           | EDP#            |           |            | 58719      | 58720     | 51991            |
| VL-4R      | VL-4L     | Part#           | SM 420    | SL-344     | VL-72      | VL-73     | 10-32 x 3/4 SHCS |
|            |           | EDP#            | 58712     | 58711      | 58719      | 58720     | 51991            |

\*V-LOC threading or grooving inserts of the same size may be used in these toolholders. See page D87 for grooving inserts.


\*\* "F" dimension over sharp point of grooving insert.

\*\*\*VLSR162C and VLSL162C use the noted clamp and screw spare parts.

## V-LOC® Grooving and Threading Toolholders

### VLER/L—End Pocket Grooving & Threading 3° Lead

Use Insert Style:  
VLTx

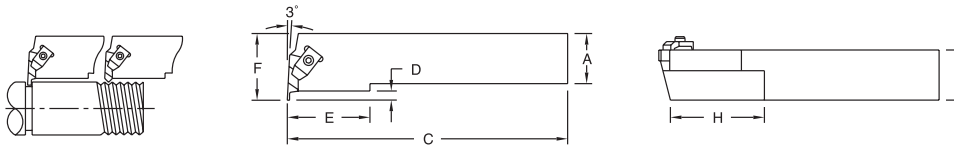

Right-hand shown, Left-hand opposite

| Part Number |            | Insert* | Dimensions |       |       |       |       |       |       | EDP#       |           |
|-------------|------------|---------|------------|-------|-------|-------|-------|-------|-------|------------|-----------|
| Right Hand  | Left Hand  |         | A          | B     | C     | D     | E     | F**   | H     | Right Hand | Left Hand |
| VLER 08 2V  |            | VL-2L   | 0.500      | 0.500 | 3.500 | 0.138 | 0.500 | 0.750 | 1.000 | 58664      |           |
|             | VLEL 08 2V | VL-2R   |            |       |       |       |       |       |       |            | 58657     |
| VLER 12 2B  |            | VL-2L   | 0.750      | 0.750 | 4.500 | 0.138 | 0.500 | 1.000 | 1.000 | 58665      |           |
|             | VLEL 12 2B | VL-2R   |            |       |       |       |       |       |       |            | 58658     |
| VLER 16 2C  |            | VL-2L   | 1.000      | 1.000 | 5.000 | 0.138 | 0.500 | 1.250 | 1.000 | 58667      |           |
|             | VLEL 16 2C | VL-2R   |            |       |       |       |       |       |       |            | 58660     |
| VLER 12 3B  |            | VL-3L   | 0.750      | 0.750 | 4.500 | 0.210 | 0.750 | 1.125 | 2.000 | 58666      |           |
|             | VLEL 12 3B | VL-3R   |            |       |       |       |       |       |       |            | 58659     |
| VLER 16 3C  |            | VL-3L   | 1.000      | 1.000 | 5.000 | 0.210 | 0.750 | 1.250 | 2.000 | 58668      |           |
|             | VLEL 16 3C | VL-3R   |            |       |       |       |       |       |       |            | 58661     |
| VLER 16 3D  |            | VL-3L   | 1.000      | 1.000 | 6.000 | 0.210 | 0.750 | 1.250 | 2.000 | 58669      |           |
|             | VLEL 16 3D | VL-3R   |            |       |       |       |       |       |       |            | 58662     |
| VLER 16 4D  |            | VL-4L   | 1.000      | 1.000 | 6.000 | 0.294 | 0.750 | 1.375 | 2.000 | 61904      |           |
|             | VLEL 16 4D | VL-4R   |            |       |       |       |       |       |       |            | 61902     |
| VLER 20 3D  |            | VL-3L   | 1.250      | 1.250 | 6.000 | 0.210 | 0.750 | 1.500 | 2.000 | 58670      |           |
|             | VLEL 20 3D | VL-3R   |            |       |       |       |       |       |       |            | 58663     |
| VLER 20 4D  |            | VL-4L   | 1.250      | 1.250 | 6.000 | 0.294 | 0.750 | 1.625 | 2.000 | 61905      |           |
|             | VLEL 20 4D | VL-4R   |            |       |       |       |       |       |       |            | 61903     |

\*V-LOC threading or grooving inserts of the same size may be used in these toolholders. See page D87 for grooving inserts.

\*\* "F" dimension over sharp point of grooving insert.




| Insert     |           | Part #/<br>EDP# | Clamp      |           | Clamp Screw      |
|------------|-----------|-----------------|------------|-----------|------------------|
| Right Hand | Left Hand |                 | Right Hand | Left Hand |                  |
| VL-2R      | -         | PART #          | VL-74      |           | 6-32 X 1/2 SHCS  |
|            |           | EDP #           | 58721      |           | 52090            |
| -          | VL-2L     | PART #          |            | VL-75     | 6-32 X 1/2 SHCS  |
|            |           | EDP #           |            | 58722     | 52090            |
| VL-3R      | -         | PART #          | VL-72      |           | 10-32 X 3/4 SHCS |
|            |           | EDP #           | 58719      |           | 51991            |
| -          | VL-3L     | PART #          |            | VL-73     | 10-32 X 3/4 SHCS |
|            |           | EDP #           |            | 58720     | 51991            |
| VL-4R      | -         | PART #          | VL-72      |           | 10-32 X 3/4 SHCS |
|            |           | EDP #           | 58719      |           | 51991            |
| -          | VL-4L     | PART #          |            | VL-73     | 10-32 X 3/4 SHCS |
|            |           | EDP #           |            | 58720     | 51991            |

# THREADING

## V-LOC® Grooving and Threading Toolholders

### VLSR-DH-R/L—Drop Head Grooving & Threading 3° Lead

Use Insert Style:  
VLTx



| Part Number   |               | Insert*  | Dimensions |       |       |       |       |       |       |       | EDP#       |           |
|---------------|---------------|----------|------------|-------|-------|-------|-------|-------|-------|-------|------------|-----------|
| Right Hand    | Left Hand     |          | A          | B     | C     | D     | E     | F**   | G     | H     | Right Hand | Left Hand |
| VLSR DH 12 2B | -             | VL-2R    | 0.750      | 0.750 | 4.500 | 0.125 | 1.200 | 1.000 | 0.400 | 0.750 | 58691      |           |
| VLSR DH 12 3A |               | VL-3R    | 0.750      | 0.750 | 4.000 | 0.180 | 1.500 | 1.250 | 0.580 | 0.750 | 58692      |           |
| VLSR DH 16 2C |               | VL-2R    | 1.000      | 1.000 | 5.000 | 0.125 | 1.200 | 1.250 | 0.400 | 1.000 | 58693      |           |
| VLSR DH 16 3C |               | VL-3R    | 1.000      | 1.000 | 5.000 | 0.180 | 1.500 | 1.250 | 0.580 | 1.000 | 58694      |           |
| VLSR DH 16 3D |               | VL-3R    | 1.000      | 1.000 | 6.000 | 0.180 | 1.530 | 1.250 | 0.580 | 1.250 | 58695      |           |
| VLSR DH 20 3D |               | VL-3R*** | 1.250      | 1.250 | 6.000 | 0.180 | 1.630 | 1.500 | 0.620 | 1.250 | 58696      |           |
|               | VLSL DH 20 3D | VL-3L*** |            |       |       |       |       |       |       |       |            | 58680     |
| VLSR DH 20 4D |               | VL-4R    | 1.250      | 1.250 | 6.000 | 0.280 | 1.630 | 1.500 | 0.620 | 1.250 | 61909      |           |
| VLSR DH 24 4D |               | VL-4R    | 1.500      | 1.500 | 6.000 | 0.280 | 1.630 | 2.000 | 1.000 | 1.500 | 61910      |           |

\*V-LOC threading or grooving inserts of the same size may be used in these toolholders. See page D87 for grooving inserts.

\*\* "F" dimension over sharp point of grooving insert.

\*\*\*VLSRDH203D and VLSLDH203D use the noted clamp and screw spare parts.

| Insert     |           | Part #/<br>EDP# | Clamp      |           | Clamp Screw      | Set Screw       |
|------------|-----------|-----------------|------------|-----------|------------------|-----------------|
| Right Hand | Left Hand |                 | Right Hand | Left Hand |                  |                 |
| VL-2R      | -         | Part#           | VL-74      | -         | 6-32 x 1/2 SHCS  | 1/4 x 3/4 OPSS  |
|            |           | EDP#            | 58721      |           | 52090            | RFQ*            |
| VL-3R      | -         | Part#           | VL-72      | -         | 10-32 x 3/4 SHCS | -               |
|            |           | EDP#            | 58719      |           | 51991            |                 |
| VL-3R***   | VL-3L***  | Part#           | VL-72      | VL-73     | 10-32 x 3/4 SHCS | 3/8-16 x 1 OPSS |
|            |           | EDP#            | 58719      | 58720     | 51991            | 00885           |
| VL-4R      | -         | Part#           | VL-72      | -         | 10-32 x 3/4 SHCS | 3/8-16 x 1 OPSS |
|            |           | EDP#            | 58719      |           | 51991            | 00885           |


\*RFQ - Contact your local Valenite Distributor or call Valenite Customer Service.

\*\*\*VLSRDH203D and VLSLDH203D use the noted clamp and screw spare parts.

## V-LOC® Grooving and Threading Toolholders

### VLASR/L—Swiss/Screw Machine Grooving & Threading

Use Insert Style:  
VLTx

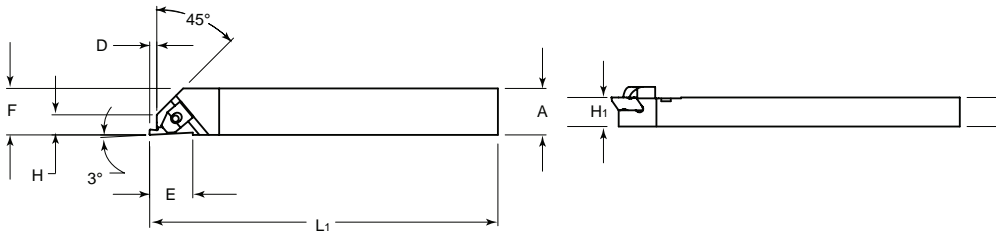

### Inch Toolholders

Right-hand shown, Left-hand opposite

| Part Number   |               | Insert* | Dimensions |       |       |       |       |       |       |       |        |       | EDP#       |           |
|---------------|---------------|---------|------------|-------|-------|-------|-------|-------|-------|-------|--------|-------|------------|-----------|
| Right Hand    | Left Hand     |         | B          | A     | H1    | L1    | D     | E     | F**   | H     | Radial | Axial | Right Hand | Left Hand |
| VLASR 06 2D   |               | VL-R    | 0.375      | 0.375 | 0.375 | 6.000 | 0.130 | 0.750 | 0.470 | 0.350 | 0°     | 0°    | 61895      |           |
|               | VLASL 06 2D   | VL-2L   | 0.375      | 0.375 | 0.375 | 6.000 | 0.130 | 0.750 | 0.470 | 0.350 | 0°     | 0°    |            | 61888     |
| VLASR 08 2D   |               | VL-2R   | 0.500      | 0.500 | 0.500 | 6.000 | 0.130 | 0.750 | 0.500 | 0.350 | 0°     | 0°    | 61896      |           |
|               | VLASL 08 2D   | VL-2L   | 0.500      | 0.500 | 0.500 | 6.000 | 0.130 | 0.750 | 0.500 | 0.350 | 0°     | 0°    |            | 61889     |
| VLASR 10 3B   |               | VL-3R   | 0.625      | 0.625 | 0.625 | 4.500 | 0.200 | 1.250 | 0.625 | 0.500 | 0°     | 0°    | 61899      |           |
|               | VLASL 10 3B   | VL-3L   | 0.625      | 0.625 | 0.625 | 4.500 | 0.200 | 1.250 | 0.625 | 0.500 | 0°     | 0°    |            | 61892     |
| VLASR 61.5 2D |               | VL-3R   | 0.375      | 0.750 | 0.750 | 6.000 | 0.130 | 0.750 | 0.750 | 0.350 | 0°     | 0°    | 61901      |           |
|               | VLASL 61.5 2D | VL-3L   | 0.375      | 0.750 | 0.750 | 6.000 | 0.130 | 0.750 | 0.750 | 0.350 | 0°     | 0°    |            | 61894     |

### Metric Toolholders

| Part Number   |               | Insert*  | Dimensions |       |       |       |       |       |       |       |        |       | EDP#       |           |
|---------------|---------------|----------|------------|-------|-------|-------|-------|-------|-------|-------|--------|-------|------------|-----------|
| Right Hand    | Left Hand     |          | B          | A     | H1    | L1    | D     | E     | F**   | H     | Radial | Axial | Right Hand | Left Hand |
| VLASR 1010M2Q |               | VL-2R    | 0.394      | 0.394 | 0.394 | 5.906 | 0.130 | 0.750 | 0.470 | 0.350 | 0°     | 0°    | 61897      |           |
|               | VLASL 1010M2Q | VL-2L    | 0.394      | 0.394 | 0.394 | 5.906 | 0.130 | 0.750 | 0.470 | 0.350 | 0°     | 0°    |            | 61890     |
| VLASR 1020M2Q |               | VL-2R    | 0.394      | 0.787 | 0.394 | 5.906 | 0.130 | 0.750 | 0.787 | 0.350 | 0°     | 0°    | 61898      |           |
|               | VLASL 1020M2Q | VL-2L    | 0.394      | 0.787 | 0.394 | 5.906 | 0.130 | 0.750 | 0.787 | 0.350 | 0°     | 0°    |            | 61891     |
| VLASR 1212M2Q |               | VL-2R*** | 0.472      | 0.472 | 0.472 | 5.906 | 0.130 | 0.750 | 0.472 | 0.352 | 0°     | 0°    | 61900      |           |
|               | VLASL 1212M2Q | VL-2L*** | 0.472      | 0.472 | 0.472 | 5.906 | 0.130 | 0.750 | 0.472 | 0.352 | 0°     | 0°    |            | 61893     |

| Insert     |           | Part #/<br>EDP# | Clamp      |           | Clamp Screw    | Hex Wrench |
|------------|-----------|-----------------|------------|-----------|----------------|------------|
| Right Hand | Left Hand |                 | Right Hand | Left Hand |                |            |
| VL-2R      | VL-2L     | Part#           | VL-182     | VL-183    | 6-32x1/2 SHCS  | 7/64       |
|            |           | EDP#            | 59111      | 59112     | 52090          | 57336      |
| VL-3R      | VL-3L     | Part#           | VL-184     | VL-185    | 10-32x3/4 SHCS | 5/32       |
|            |           | EDP#            | 59113      | 59114     | 51991          | 57331      |
| VL-2R***   | VL-2L***  | Part#           | VL-182     | VL-183    | VLS 1025       | M25DIN911  |
|            |           | EDP#            | 59111      | 59112     | 50106          | 57344      |

\*V-LOC threading or grooving inserts of the same size may be used in these toolholders. See page D87 for grooving inserts.

\*\* "F" dimension over sharp point of grooving insert.




\*\*\*VLASR1212M2Q and VLASL1212M2Q use the noted clamp and screw spare parts.

# THREADING

## V-LOC® Grooving & Threading Boring Bars

### A-VLER/L—Grooving & Threading with Coolant Hole 3° Lead

Use Insert Style:  
VLTx

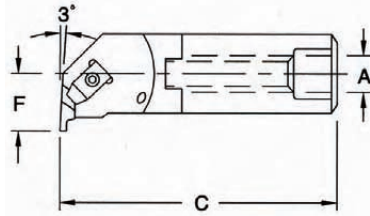

Right-hand shown, Left-hand opposite

| Part Number |            | Insert* | Dimensions |        |       |           |           | EDP#       |           |
|-------------|------------|---------|------------|--------|-------|-----------|-----------|------------|-----------|
| Right Hand  | Left Hand  |         | D          | C      | F     | Min. Bore | A         | Right Hand | Left Hand |
| A10 VLER 2  |            | VL-2L   | 0.625      | 10.000 | 0.500 | 1.000     | 1/8-27NPT | 58698      |           |
|             | A10 VLEL 2 | VL-2R   |            |        |       |           |           |            | 58697     |
| A12 VLER 2  |            | VL-2L   | 0.750      | 10.000 | 0.562 | 1.125     | 1/8-27NPT | 58700      |           |
|             | A12 VLEL 2 | VL-2R   |            |        |       |           |           |            | 58699     |
| A16 VLER 2  |            | VL-2L   | 1.000      | 12.000 | 0.688 | 1.375     | 1/4-18NPT | 58703      |           |
|             | A16 VLEL 2 | VL-2R   |            |        |       |           |           |            | 58701     |
| A16 VLER 3  |            | VL-3L   | 1.000      | 12.000 | 0.688 | 1.375     | 1/4-18NPT | 58704      |           |
|             | A16 VLEL 3 | VL-3R   |            |        |       |           |           |            | 58702     |
| A20 VLER 3  |            | VL-3L   | 1.250      | 14.000 | 0.875 | 1.750     | 1/4-18NPT | 58706      |           |
|             | A20 VLEL 3 | VL-3R   |            |        |       |           |           |            | 58705     |
| A24 VLER 3  |            | VL-3L   | 1.500      | 14.000 | 1.000 | 2.000     | 1/4-18NPT | 58708      |           |
|             | A24 VLEL 3 | VL-3R   |            |        |       |           |           |            | 58707     |
| A32 VLER 3  |            | VL-3L   | 2.000      | 16.000 | 1.250 | 2.500     | 1/4-18NPT | 58710      |           |
|             | A32 VLEL 3 | VL-3R   |            |        |       |           |           |            | 58709     |
| A28 VLER 4  |            | VL-4L   | 1.750      | 14.000 | 1.250 | 2.500     | 1/4-18NPT | 55306      |           |
|             | A28 VLEL 4 | VL-4R   |            |        |       |           |           |            | 55305     |
| A32 VLER 4  |            | VL-4L   | 2.000      | 16.000 | 1.375 | 2.750     | 1/4-18NPT | 55308      |           |
|             | A32 VLEL 4 | VL-4R   |            |        |       |           |           |            | 55307     |



\*V-LOC threading or grooving inserts of the same size may be used in these toolholders. See page D87 for grooving inserts.

Note:

- Axx VLER Boring Bars use left hand inserts and clamps.
- Axx VLEL Boring Bars use right hand inserts and clamps.


| Insert     |           | Part #/<br>EDP# | Clamp      |           | Clamp Screw      |
|------------|-----------|-----------------|------------|-----------|------------------|
| Right Hand | Left Hand |                 | Right Hand | Left Hand |                  |
| VL-2R      | -         | PART #          | VL-74      |           | 6-32 X 1/2 SHCS  |
|            |           | EDP #           | 58721      |           | 52090            |
| -          | VL-2L     | PART #          |            | VL-75     | 6-32 X 1/2 SHCS  |
|            |           | EDP #           |            | 58722     | 52090            |
| VL-3R      | -         | PART #          | VL-72      |           | 10-32 X 3/4 SHCS |
|            |           | EDP #           | 58719      |           | 51991            |
| -          | VL-3L     | PART #          |            | VL-73     | 10-32 X 3/4 SHCS |
|            |           | EDP #           |            | 58720     | 51991            |
| VL-4R      | -         | PART #          | VL-72      |           | 10-32 X 3/4 SHCS |
|            |           | EDP #           | 58719      |           | 51991            |
| -          | VL-4L     | PART #          |            | VL-73     | 10-32 X 3/4 SHCS |
|            |           | EDP #           |            | 58720     | 51991            |

## V-LOC® Grooving and Threading Common Insert Dimensions



See Product pages E56-57 for E,R, & W dimensions.

| Insert Size | A     |       | T     |      | Gage Dia |      | B     |       |
|-------------|-------|-------|-------|------|----------|------|-------|-------|
|             | Inch  | mm    | Inch  | mm   | Inch     | mm   | Inch  | mm    |
| 2           | 0.219 | 5.56  | 0.15  | 3.81 | 0.1875   | 4.75 | 0.27  | 6.86  |
| 3           | 0.344 | 8.74  | 0.195 | 4.95 | 0.375    | 9.53 | 0.405 | 10.29 |
| 4           | 0.453 | 11.51 | 0.255 | 6.48 | 0.375    | 9.53 | 0.636 | 16.15 |

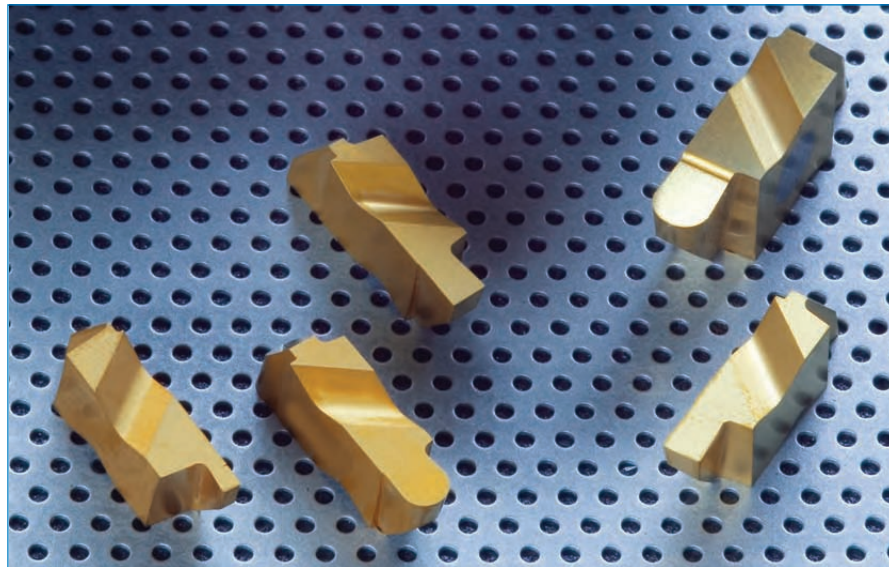

# THREADING

## V-LOC® Guide to Workpiece Material

### ValPRO™ Color System Simplifies Tool Selection Process

Use the ValPRO™ color-coded identification system for matching our tools to your application. Color and letter designations correspond to the ISO standard classification system. These letters and colors are used throughout the catalog to reduce the time you spend looking for information.

| Material Group  | Category                                   | Material Designation  |
|---|--|---|
| Steels<br>                               | Free Machining and Low Carbon              | 1006, 1008, 1010, 1015, 1018, 1020, 1025, 1117, 1141, 1213, 12L13, 12L14, 11L41   |
|   | Medium Carbon and High Carbon              | 1030, 1035, 1040, 1045, 1052, 1055, 1060, 1085, 1095, 1424, 1541, 1551,   |
|   | Alloy and Easy To Machine Tool Steels      | 4130, 4150, 4340, 5140, 4320, 5120, 8620, 6150, 5200, W1, W2, W5, 300M  |
|   | Tool Steels and Die                        | M1, M2, T1, T4, T5, A2, A3, D2, D4, O1, H10, H11, P2, P20   |
| Stainless Steels<br>                     | Ferritic and Martensitic                   | 403, 405, 409, 410, 410S, 414, 430, 431, 434, 440, 442  |
|   | Austenitic                                 | 201, 203, 303, 304, 304L 316, 316L, 321, 327, Nitronic 40, Custom 455   |
|   | PH and Duplex                              | 15-5 PH, 17-4 PH, 13-8 Mo, AM350, AM355, Ferralium 255, 329, S32950   |
| Cast Irons<br>                         | Gray Cast Iron                             | ASTM A48, CClass 20, 25, 30, 35, 40   |
|   | Ductile and Malleable-Low & Medium Tensile | ASTM A546, Grades 60-40-18, 65-45-12, 80-55-06, SAE 434 J434C, Grade D7003, ASTM A220, Grades 7003, 820002, 900001, SAE JT58, Grades M7002, M8501 |
|   | Ductile and Malleable-High Tensile         | ASTM A536, Grades 100-70-03, SAE J434C, Grade D7003, ASTM A220 Grades 70003, 820002, 90001, SAE J158, Grades M7002, M8501                         |
| High Temp Alloys<br>                   | Iron Base Alloys                           | A-286, Incoloy 800, 801, 802, N-155, 19-9 DL  |
|   | Nickel and Cobalt Base Alloys              | Inconel 600, 625, 718 and X750, Waspaloy, Nimonic 90, Udimet 500 & 700, Monel Alloys L-605, Haynes Alloy 25, 188 Haynes Stellite 6, 21, WI-52     |
|   | Titanium Alloys                            | 6A14V, 5A1-2.5Sn, 6AL-2Sn-4Zr-6Mo   |
| Aluminum And Non-Ferrous Materials<br> | Aluminum Alloys < 7% Silicon               | AA 2014, 2024, 4032, 6061, 6151, 7075, SAE, 304, 335, 336, 380  |
|   | Aluminum Alloys 7% - 12% Silicon           | AA380, A380, 384, A384, SAE 303, 305, 306, 308, 309, 383  |
|   | Aluminum Alloys 12% - 18% Silicon          | AA 390, 392   |
|   | Non-Ferrous                                | Precious Metals, Copper & Brass Alloys, Plastics, Magnesium Alloys  |
| Hardened Materials<br>                 | Heat Treated Steels                        | 40-50- Rc   |
|   | Heat Treated Tool & Die Steels             | 50-60- Rc   |
|   | Chilled & Ni-Resist Cast Irons             | 40-60 Rc  |




| Material Group                     | Category  | Threading Grade and Speed Selection<br>SFM (V m/min) |                            |                          |                          |
|------------------------------------|---|--|----------------------------|--------------------------|--------------------------|
|                                    |   | VP5820<br>m/min                                      | VP5410<br>m/min            | VP5425<br>m/min          | VPUS10<br>m/min          |
| <b>P</b><br>Steels                 | Free Machining and Low Carbon Steels<br>120 - 170 BHN           | 300 - 600<br>(90 - 180)                              | 330 - 650<br>(100 - 200)   | 200 - 500<br>(60 - 150)  | -                        |
|                                    | Medium Carbon and High Carbon Steels<br>180 - 220 BHN           | 275 - 550<br>(85 - 170)                              | 300 - 600<br>(90 - 180)    | 180 - 450<br>(55 - 135)  | -                        |
|                                    | Alloy Steels and Easy to Machine Tool Steels<br>200 - 240 BHN   | 275 - 450<br>(85 - 140)                              | 275 - 450<br>(85 - 140)    | 150 - 350<br>(45 - 110)  | -                        |
|                                    | Tool Steels and Die Steels<br>220 - 260 BHN                     | 225 - 400<br>(70 - 120)                              | 225 - 400<br>(70 - 120)    | 125 - 225<br>(40 - 70)   | -                        |
| <b>M</b><br>Stainless Steels       | Ferritic and Martensitic Stainless Steels<br>180 - 240 BHN      | 250 - 450<br>(75 - 140)                              | 300 - 400<br>(90 - 125)    | 150 - 350<br>(45 - 110)  | 250 - 350<br>(80 - 110)  |
|                                    | Austenitic Stainless Steels<br>140 - 180 BHN                    | 250 - 450<br>(75 - 140)                              | 300 - 400<br>(90 - 125)    | 100 - 300<br>(30 - 90)   | 250 - 350<br>(80 - 110)  |
|                                    | PH and Duplex Stainless Steels<br>220 - 260 BHN                 | 200 - 400<br>(60 - 120)                              | 250 - 350<br>(75 - 110)    | 85 - 250<br>(25 - 75)    | 200 - 300<br>(60 - 90)   |
| <b>K</b><br>Cast Iron              | Gray Cast Irons<br>180 - 220 BHN                                | 275 - 500<br>(85 - 150)                              | 275 - 550<br>(85 - 170)    | 250 - 450<br>(75 - 140)  | 200 - 350<br>(60 - 110)  |
|                                    | Gray Cast Irons<br>220 - 260 BHN                                | 250 - 450<br>(75 - 140)                              | 250 - 450<br>(75 - 140)    | 200 - 400<br>(60 - 120)  | 180 - 300<br>(55 - 90)   |
|                                    | Ductile & Malleable Cast Irons<br>140 - 200 BHN                 | 300 - 550<br>(90 - 170)                              | 300 - 600<br>(90 - 180)    | 150 - 250<br>(45 - 75)   | 200 - 350<br>(60 - 110)  |
|                                    | Ductile & Malleable Cast Irons<br>200 - 260 BHN                 | 250 - 450<br>(75 - 140)                              | 250 - 450<br>(75 - 140)    | 125 - 200<br>(40 - 60)   | 180 - 300<br>(55 - 90)   |
| <b>S</b><br>High Temp Alloys       | Iron & Nickel Based Alloys, Monel, Hastelloy, Inconel, Waspaloy | 125 - 350<br>(40 - 110)                              | 125 - 250<br>(40 - 75)     | 90 - 150<br>(30 - 45)    | 45 - 125<br>(15 - 40)    |
|                                    | Cobalt Based Alloys, Haynes Stellite                            | 125 - 350<br>(40 - 110)                              | 125 - 250<br>(40 - 75)     | 90 - 150<br>(30 - 45)    | 45 - 125<br>(15 - 40)    |
|                                    | Titanium Alloys<br>6Al-4V                                       | 125 - 350<br>(40 - 110)                              | 125 - 250<br>(40 - 75)     | 90 - 150<br>(30 - 45)    | 30 - 100<br>(15 - 35)    |
| <b>N</b><br>Aluminum & Non-Ferrous | Aluminum Alloys <7% Silicon                                     | 1200 - 2600<br>(365 - 800)                           | 1200 - 1800<br>(365 - 550) | 150 - 800<br>(45 - 245)  | 400 - 650<br>(120 - 200) |
|                                    | Aluminum Alloys 7% - 12% Silicon                                | 1000 - 2400<br>(305 - 730)                           | 1000 - 1600<br>(305 - 490) | 100 - 650<br>(35 - 200)  | 350 - 600<br>(110 - 180) |
|                                    | Aluminum Alloys 12% - 18% Silicon                               | 900 - 1500<br>(275 - 460)                            | 900 - 1400<br>(275 - 430)  | 50 - 400<br>(15 - 120)   | 200 - 400<br>(60 - 120)  |
|                                    | Copper Alloys   | 600 - 1000<br>(180 - 305)                            | 600 - 1000<br>(180 - 305)  | 500 - 900<br>(150 - 275) | 175 - 300<br>(55 - 90)   |
| <b>H</b><br>Hardened Materials     | Steels<br>45 - 50 Rc  | 75 - 200<br>(25 - 60)                                | 60 - 150<br>(18 - 45)      | 60 - 125<br>(18 - 40)    | -                        |
|                                    | Steels<br>50 - 60 Rc  | 60 - 175<br>(18 - 55)                                | 50 - 125<br>(15 - 40)      | 50 - 100<br>(15 - 30)    | -                        |
|                                    | Chilled Irons<br>45 - 50 Rc                                     | 75 - 200<br>(25 - 60)                                | 60 - 150<br>(18 - 45)      | 60 - 125<br>(18 - 40)    | -                        |

# THREADING

## V-LOC® Machining Guidelines

### Internal Threading Limits With Standards

The following charts list the largest pitch that can be applied for VEE threading using insert sizes 2, 3, and 4.



### VLT-2

#### Internal Threading Limitations VEE Threading Inserts.

| Threads per Inch | Normal Thread Size | Minimum Minor Diameter |
|------------------|--------------------|------------------------|
| 6                | 1 7/8              | 1.695                  |
| 7                | 1 3/4              | 1.595                  |
| 8                | 1 5/8              | 1.490                  |
| 9                | 1 9/16             | 1.442                  |
| 10               | 1 1/2              | 1.392                  |
| 11               | 1 7/16             | 1.339                  |
| 11 1/2           | 1 3/8              | 1.281                  |
| 12               | 1 3/8              | 1.285                  |
| 13               | 1 5/16             | 1.229                  |
| 14               | 1 1/4              | 1.173                  |
| 16               | 1 1/4              | 1.182                  |
| 18               | 1 1/8              | 1.065                  |
| 20               | 1 1/8              | 1.071                  |
| 24*              | 1 1/16             | 1.017                  |

\* Sixteen threads per inch and finer can be cut providing minor diameter is 1.000" or larger.

### VLT-3 & VLT-4

#### Internal Threading Limitations VEE Threading Inserts.

| Threads per Inch | Normal Thread Size | Minimum Minor Diameter |
|------------------|--------------------|------------------------|
| 4*               | 3                  | 2.729                  |
| 4 1/2*           | 2 7/8              | 2.634                  |
| 5                | 2 3/4              | 2.534                  |
| 6                | 2 1/2              | 2.230                  |
| 7                | 2 1/4              | 2.095                  |
| 8                | 2                  | 1.865                  |
| 9                | 1 15/16            | 1.817                  |
| 10               | 1 7/8              | 1.767                  |
| 11               | 1 13/16            | 1.714                  |
| 11 1/2           | 1 3/4              | 1.656                  |
| 12               | 1 3/4              | 1.660                  |
| 13               | 1 5/8              | 1.542                  |
| 14               | 1 9/16             | 1.485                  |
| 16**             | 1 7/16             | 1.370                  |

\* VLT-4 insert only.



\*\* Sixteen threads per inch and finer can be cut providing minor diameter is 1.000" or larger.


### Threading Limits

#### 60° VEE Threading Application for Standard Inserts

| Insert  | Ref. D | Ref. A | Recommended threads per inch (tpi)* |                  |
|---------|--------|--------|-------------------------------------|------------------|
|         |        |        | External                            | Internal         |
| VLT-2   | .113   | .075   | 36 tpi to 8 tpi                     | 20 tpi to 7 tpi  |
| VLT-3   | .148   | .097   | 20 tpi to 6 tpi                     | 12 tpi to 5 tpi  |
| VLT-3-C | .148   | .097   | 11 tpi to 6 tpi                     | 6 tpi (only)     |
| VLT-4   | .196   | .127   | 20 tpi to 4 tpi                     | 12 tpi to 4 tpi  |
| VLT-4-C | .196   | .127   | 11 tpi to 4½ tpi                    | 6 tpi to 4½ tpi  |
| VLTF-2  | .062   | .040   | 44 tpi to 14 tpi                    | 24 to 12 tpi     |
| VLTF-3  | .083   | .054   | 44 tpi to 10 tpi                    | 24 tpi to 9 tpi  |
| VLTF-4  | .083   | .054   | 44 tpi to 10 tpi                    | 24 tpi to 9 tpi  |
| VLTK-2  | .062   | .090   | 44 tpi to 14 tpi                    | 24 tpi to 12 tpi |
| VLTK3   | .083   | .054   | 44 tpi to 10 tpi                    | 24 tpi to 9 tpi  |
| VLTK-4  | .083   | .054   | 44 tpi to 10 tpi                    | 24 tpi to 9 tpi  |
| VLTP-2  | .113   | .075   | 38 tpi to 8 tpi                     | 20 tpi to 7 tpi  |
| VLTP-3  | .148   | .097   | 20 tpi to 6 tpi                     | 12 tpi to 5 tpi  |
| VLTP-4  | .196   | .127   | 20 tpi to 4 tpi                     | 12 tpi to 4 tpi  |

\*Recommended threads per inch are based on the maximum insert radius and class 2A and 2B thread specifications.

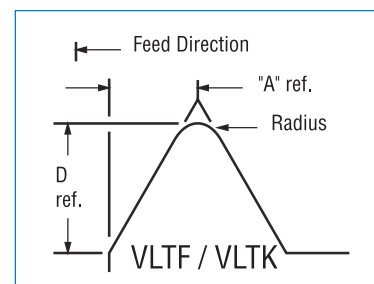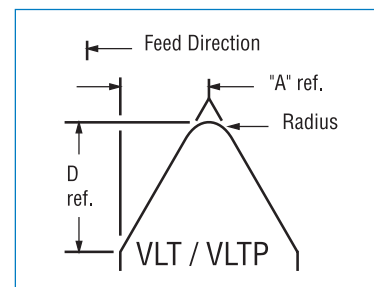

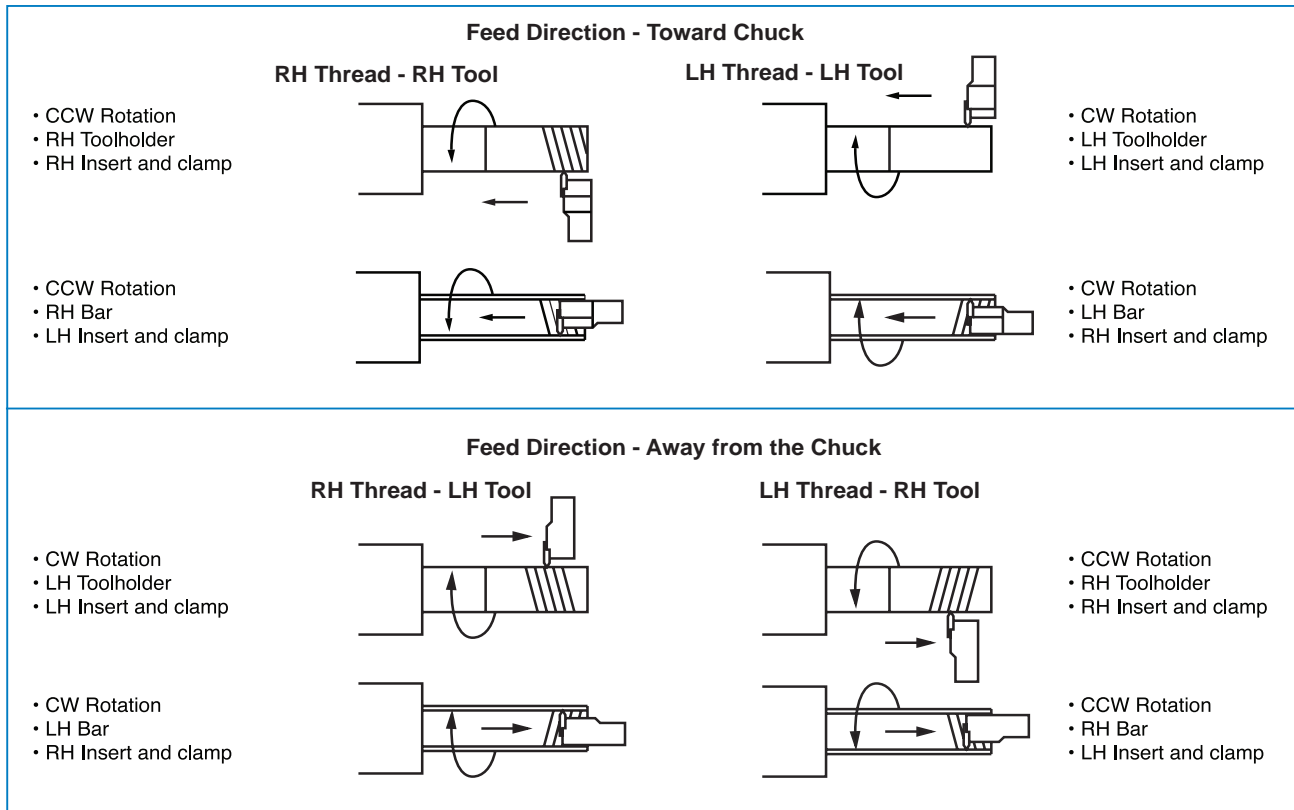

The workpiece can be rotated clockwise or counter-clockwise and the tool can be fed into or away from the chuck. In addition, the tool can also be in the normal position on one side of the workpiece or in the upside-down position on the other side of the workpiece regardless of the rotation direction. The alternate ways of turning a thread depends upon which operation is being performed with respect to machine, workpiece and chip clearance limitations. Choose the method best suited to your conditions as depicted in the above illustrations of right-hand and left-hand threading alternatives.

| Thread Orientation | Thread Location | Workpiece Rotation | Feed Direction In Relation To Chuck | Toolholder/Bar* | Insert & Clamp |
|--------------------|-----------------|--------------------|-------------------------------------|-----------------|----------------|
| <b>Right Hand</b>  | External        | CCW                | TOWARDS                             | RH              | RH             |
|                    |                 | CW                 | AWAY                                | LH              | LH             |
|                    | Internal        | CCW                | TOWARDS                             | RH              | LH             |
|                    |                 | CW                 | AWAY                                | LH              | RH             |
| <b>Left Hand</b>   | External        | CCW                | AWAY                                | RH              | RH             |
|                    |                 | CW                 | TOWARDS                             | LH              | LH             |
|                    | Internal        | CCW                | AWAY                                | RH              | LH             |
|                    |                 | CW                 | TOWARDS                             | LH              | RH             |

\* Right-hand bars use left-hand threading and grooving inserts and clamps. Left-hand bars use right-hand threading and grooving inserts and clamps.