


# OPERATOR MANUAL



**KEPCO** An ISO 9001 Company.

**JBW**  
**30W SERIES**  
CE

## 30 WATT SINGLE OUTPUT SWITCHING POWER SUPPLIES

### I — INTRODUCTION

**SCOPE OF MANUAL.** This instruction manual covers the installation and operation of the Kepco JBW 30W Series of RoHS (Reduction of Hazardous Substances) compliant Switching Power Supplies.

**DESCRIPTION.** The Kepco JBW 30W Series consists of four models of switching power supplies, with a single output as shown in Table 1. Units may be operated with a nominal 100 to 120V a-c and 220 to 240V a-c (input voltage range 85 to 265 Va-c), 50-60 Hz (input frequency range 47-440Hz.) They will also operate on 110V to 370V d-c input. The JBW 30W Series employs a light weight ferrite core with a fixed switching frequency. Regulation is provided by pulse width modulation. A FET power stage, operating in the flyback converter mode provides a smooth isolated d-c

output. A thermistor circuit prevents excessive turn-on current surge. Overvoltage protection is provided. Current limiting with automatic recovery from short circuit is featured. Units are manufactured on an open frame pc board.

Table 1 contains specifications and operating limits of individual JBW 30W Series models. Section II (following) contains specifications and operating limits common to all JBW 30W Series Models.

### II — SPECIFICATIONS

The following specifications are at nominal input voltages and 25°C and apply to all models unless otherwise specified.

**TABLE 1. OUTPUT RATINGS AND SPECIFICATIONS, JBW 30W SERIES**

MODEL		JBW 05-6R0	JBW 12-2R5	JBW 15-2R0	JBW 24-1R3
OUTPUT VOLTS, d-c		5V	12V	15V	24V
SETTING TOLERANCE		4.75-5.25V	11.4-12.6V	14.25-15.75V	22.8-25.2V
ADJUSTMENT RANGE		FIXED	FIXED	FIXED	FIXED
MAXIMUM OUTPUT RATINGS	50° C amb.	6.0A/30W	2.5A/30.0W	2.0A/30.0W	1.3A/31.2W
	60° C amb.	4.2A/21.0W	1.75A/21.0W	1.4A/21.0W	0.91A/21.84W
CURRENT LIMIT (AMPS)		6.3 min	2.7 min	2.1 min	1.4 min
OVP RANGE (VOLTS)		5.60 min	13.3 min	16.6 min	26.5 min
EFFICIENCY	100 Va-c	75%	78%	79%	80%
	240 Va-c	77%	79%	80%	81%
OUTPUT CAPACITOR µFmax., (fixed load resistance)		10000	2200	4000	1000
RIPPLE AND NOISE <sup>(1)</sup> (mV p-p)	ripple (typ)	80	120	120	120
	ripple -10-0°C, max	140	160	160	160
	spike noise (max) <sup>(2)</sup>	120	150	150	150
	spike noise -10-0°C, max <sup>(2)</sup>	160	180	180	180

(1) 0 to 100% load, 0 to 50 °C, tested with 100µF electrolytic and 0.1µF film capacitors across the measuring points, and connected to the power supply via 5.9 in (150mm) wires  
(2) Measured with a 20 MHz bandwidth oscilloscope.

### INPUT CHARACTERISTICS:

#### INPUT VOLTAGE: (0 to 100% load, -10 to 60°C)

Nominal 100-120V a-c, 220-240V a-c

Range: 85-265V a-c, 110 -370V d-c

NOTE: The power supply may shut down if operated at below the input voltage range or if the input voltage increases slowly at start up (> 1 second). To reset the power supply, unplug the unit, wait one minute and reapply input power.

### INPUT SOURCE FREQUENCY:

Nominal: 50/60 Hz

Range: 47-440 Hz

### INPUT CURRENT: (100% load at 25°C with nominal output voltage):

100V a-c input: 0.65A typ., 0.86A max.

240V a-c input: 0.35A typ., 0.48A max.

**INPUT PROTECTION AND SOFT START:** A thermistor circuit reduces start-up surge. Units are protected against shorts by an input fuse. Fuse value 2.0A, 250V.

**INPUT SURGE:** Cold start:

100V a-c input, 100% load: 15A typ., 30.0A max.  
 240V a-c input, 100% load: 30A typ., 60.0A max.

**LEAKAGE CURRENT:** Cold start:

100V a-c and 60 Hz (single pole switching):  
 0.75mA max, 0.35mA typ  
 240V a-c and 60 Hz (single pole switching in conformance to UL 1950/IEC 950):  
 0.75mA max, 0.50mA typ

**POWER FACTOR:**

100V a-c: 0.6 typ.  
 240V a-c: 0.45 typ.

## OUTPUT CHARACTERISTICS:

**SOURCE EFFECT:** (85 to 265 Va-c)  
 0.4% max.

**LOAD EFFECT:** measured at sensing terminals  
 (0% - 100% load change)  
 0.8% max.

**TEMPERATURE EFFECT:** (-10 to 50°C)  
 2.0% max.

**TIME EFFECT OR DRIFT:** (1/2 to 8 hr. at 25°C)  
 0.4% max.

**TRANSIENT RECOVERY:** A step load change from 50% to 100% of rated load in 50 microseconds or more produces no more than 4% output voltage excursion. Temperature range from -10 to 50°C. Recovery time is 1mS maximum.

**HOLD UP TIME:** Upon input interruption the output is maintained for 160 milliseconds typical with 240 Va-c input voltage, and for 20 milliseconds typical with 100 Va-c input voltage. The condition for output load is 100%.

**START UP TIME:**

100 Va-c: 650mS max., 350mS typ.  
 240 Va-c: 320mS max., 130mS typ.

**OVERVOLTAGE PROTECTION:** Fixed, factory set. See Table 1. The overvoltage circuit is set by Zener diode clamp, latching will occur.

**OVERCURRENT:** Square type, output voltage returns to rated level upon removal of cause of malfunction (long term overcurrent could damage unit).

## ENVIRONMENTAL CHARACTERISTICS

**OPERATING TEMPERATURE:** -10 to 60°C (start up -20 to -10°C). See the derating, Figure 1.

**STORAGE TEMPERATURE:** -30°C to + 75°C.

**COOLING:** Natural convection. Do not allow the power supply to become dust covered because that will decrease the cooling efficiency of the unit and cause insulation to deteriorate.

**ORIENTATION:** Vertical or horizontal (see Figure 2).

**HUMIDITY:** 20% to 90% relative humidity, operating and storage, noncondensing, wet bulb temperature < or = 35°C.

**VIBRATION:** Three axes, one hour each, sweep time 10 min., nonoperating.  
 5-10 Hz., 10 mm amplitude  
 10-200 Hz., 2G (19.6m/s<sup>2</sup>) acceleration

**SHOCK:** Three axes, 60G (588m/s<sup>2</sup>), 11 mS ±5mSec pulse duration, three shocks each axis, nonoperating, 1/2 sine pulse.

## GENERAL CHARACTERISTICS

**WITHSTANDING VOLTAGE:** (at 5 to 35°C ambient, 45 to 85% relative humidity, cutout current 10 mA):

Between input and output terminals:

3.0 KV a-c for 1 minute.

Between input terminals and chassis:

2000V a-c for 1 minute.

Between output terminals and chassis:

500V a-c for 1 minute.

**INSULATION RESISTANCE:** Between input and output, input and chassis, output and chassis: 100 megohms minimum (500V d-c, 5 to 35°C ambient, 45 to 85% relative humidity)

**SAFETY:** All units designed to meet UL 1950, CSA Electrical Bulletin 22.2NO950-95, and TÜV Rheinland EN60950 (ambient temp. 50°C). JBW 30W units are CE marked per the Low Voltage Directive (LVD), EN60950. [The standards do not apply with DC input operation]


**EMI CONDUCTED:** FCC Class B, VCCI-B, EN55011-B, EN55022-B.

**ESD:** Ground potential area to chassis: 10KV (charge capacitor 500pF, series resistor 100 Ohms, operating, normal operation)

**SURGE WITHSTAND:** 1.2x50µs 3KV pulse (operating, 100 Ohm internal series resistor).

**INCOMING NOISE:** 1 µs, 2 KV pulse, 50-60Hz, with 50 Ohm termination, input to input, input to chassis, less than five minutes, operating. normal operation.

**WARRANTY:** One year.

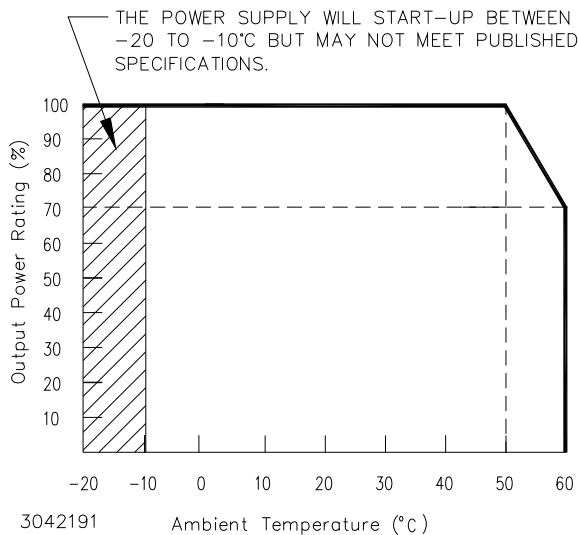

**FIGURE 1. OUTPUT POWER VS. TEMPERATURE**

### III — INSTALLATION

**MOUNTING POWER SUPPLY.** Refer to Figures 2 and 4. The unit may be mounted on one mounting surface. The air surrounding the power supply must not exceed the ambient values given in the graph in Figure 1.


**INSULATION.** Install unit 0.3 inches (8mm) away from base with the use of 0.24 inch (6mm) diameter spacers attached to the PC board. Keep at least 0.16 inches (4mm) spacing around and above the unit to comply with insulation and safety requirements. An insulator must be used if the spacing is less than 0.16 inches (4mm) (see Figure 2).

**VENTILATION.** It is recommended to keep at least 0.40 inches (10mm) clearance from adjacent equipment for proper ventilation.


**CONNECTIONS.** Connect the load to the power supply by connecting the two (+) output wires from terminal block TB2 to the load (+) terminal, and the two (-) output wires from TB2 to the load (-) terminal. The AC input power is applied via the terminal block TB1. Make sure to connect the AC input Neutral and Line wires to the P2 and P1 pins respectively of TB1 (see Figure 3). A Cable Kit (P/N 219-0406) is available as an option from Kepco (see Figures 3 and 5). The kit includes an input cable, terminated on one end with an input mating connector; and an output cable, terminated on one end with an output mating connector.

### IV — OPERATION





**PROTECTION DIODE:** When a number of power supplies are operating in series, the current rating is to be limited to the rating of the power supply with the lowest rating. A diode ( $V_r > 2 \sum V_o$ ,  $I_f > 2 I_o$ ,  $V_f \ll \text{low}$ ) must be connected to the power supply output terminals to protect the unit from reverse voltage.

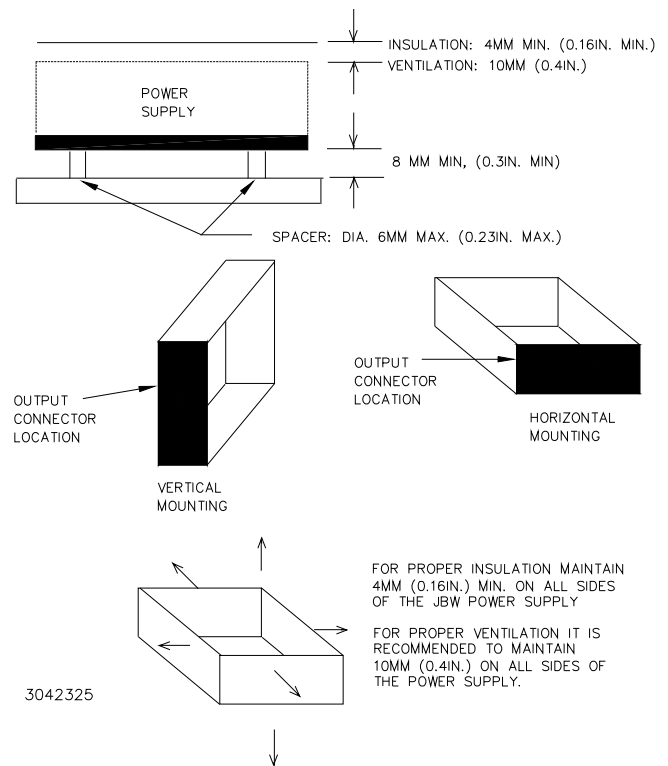

**FIGURE 2. VENTILATION, INSULATION AND MOUNTING DIRECTION**

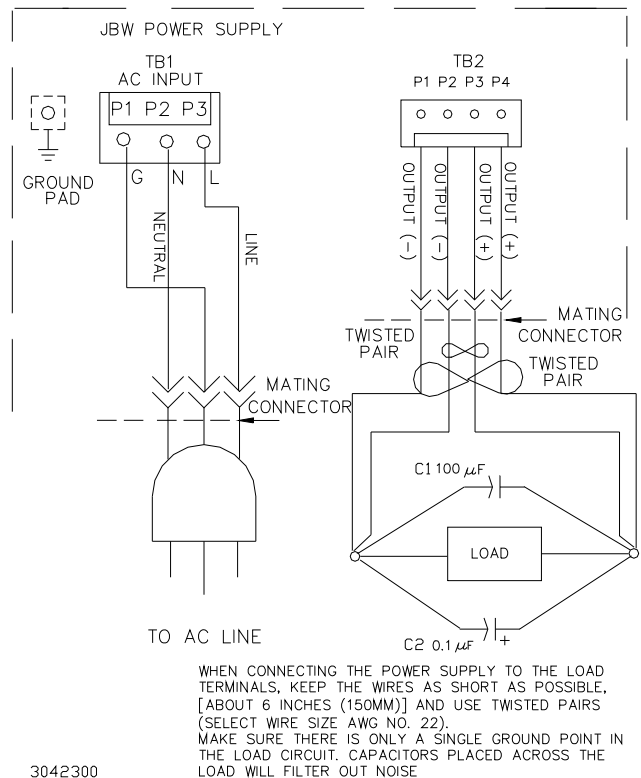

**FIGURE 3. LOAD CONNECTIONS**

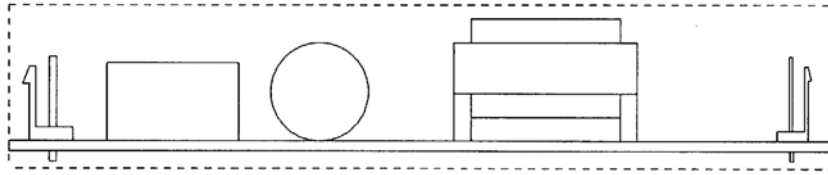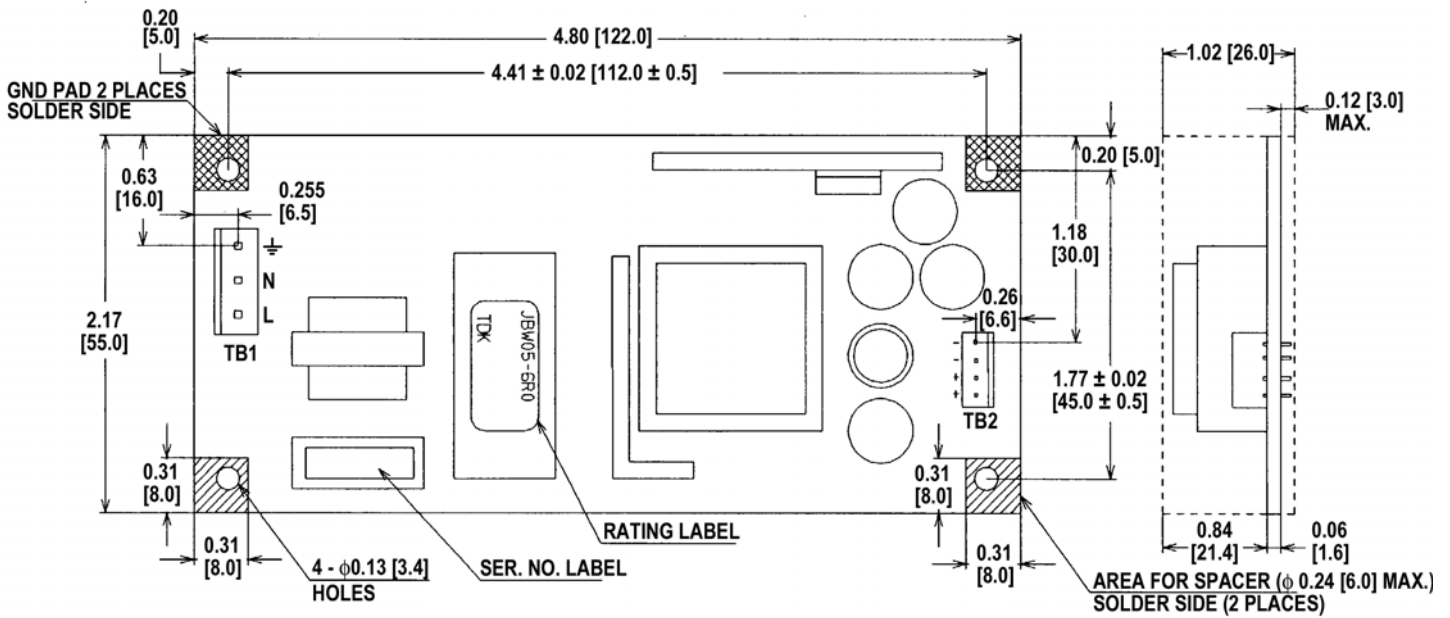


**OUTPUT CONNECTOR**

3010230

- NOTES:**
1. Dimensions are in inches, dimensions in brackets are in millimeters.
  2. TOLERANCES:  $\pm 0.04"$  [ $\pm 1.0$  mm] unless specified.
  3. WEIGHT: 5.29oz. (150 gr.) max.
  4. PCB: Thickness =  $0.06 \pm 0.008$  in. ( $1.6 \pm 0.2$ mm)

**FIGURE 4. JBW 30W MECHANICAL OUTLINE DIAGRAM**

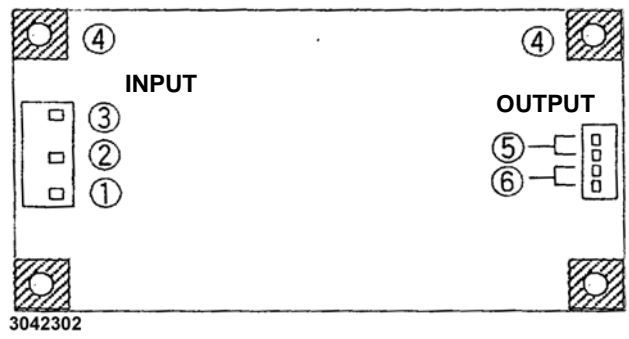

Terminal	Function
1	Input L
2	Input N
3	Ground
4	Ground Pad
5	Output (-)
6	Output (+)

Mating Connectors <sup>(4)</sup>			
Connector	Terminal Pin	Socket Housing	MFR
Input	SVH-21T-P1.1	VHR-5N	JST <sup>(1)</sup>
	T101	H101-05	LCE <sup>(2)</sup>
	50539-8100	51144-0500	MLX <sup>(3)</sup>
Output	SVH-21T-P1.1	VHR-4N	JST <sup>(1)</sup>
	T101	H101-04	LCE <sup>(2)</sup>
	50539-8100	51144-0400	MLX <sup>(3)</sup>

- (1) JST= Japan Solderless Terminal Mfg. Co.
- (2) LCE= Long Chu Electronics Co.
- (3) MLX = Molex
- (4) Optional cable kit (P/N 219-0408) includes one input and one output cable (one meter long) with mating connectors for TB1 and TB2, unterminated at other end.

**FIGURE 5. INPUT/OUTPUT CONNECTIONS**