









The **LXD-2** thin client is the perfect desktop appliance for users that require high-end functionality, supporting dual screen and video acceleration.

**LXD-2** is a powerful appliance supporting heavy in-session applications and providing full function multimedia video performance. The combination of ultra-green platform with very low power consumption, state of the art high-reliability hardware design and unparalleled management software position it as the ultimate choice for enterprise users.

-  Intel Bay Trail Series Processor Quad-Core Up to 1,83 GHz
-  Support DVI-I (Dual Screen)
-  Supports Six USB 2.0 ports
-  Support Microsoft Windows Terminal Server 2003 / 2008 /2012
-  Full Support for Citrix® HDX
-  Support VMware View environments
-  Xcalibur Global Management
-  Optional Wireless & VESA Mounting



## Processor

Intel Bay Trail Series Processor Quad-Core up to 1.83 GHz

## Memory

16 GB EMMC / 2 GB RAM DDR3 ThinX OS  
32 GB EMMC / 2 GB RAM DDR3 Windows 10 IoT

## Input / Output ports

Front Panel I / O  
2 x USB 2.0 port  
1 x microphone(3.5mm) ; 1 x headphone(3.5mm)

Rear Panel I / O  
4 x USB 2.0  
1 x DVI-I  
1 x Power button, power LED  
Optional DVI-I to DVI-D plus VGA-monitor splitter cable

## Display Support

One DVI-I port  
Optional DVI-I to DVI-D plus VGA-monitor splitter cable (sold separately)  
Optional DVI-I Port to VGA (DB-15) adapter (sold separately)  
Display Data Control (DDC) for automatic setting of resolution and refresh rate

## Resolution

Single: Up to 1920x1200 Pixels @ true color (32 bit)  
Dual: Up to 1920x1080 Pixels @ true color (24 bit)

## Audio

Stereo Audio Output - 3,5 mm (1/8 inch) Audio-Out Jack; 16-bit Stereo,  
Microphone Input - 3,5 mm (1/8 inch),

## Network

RJ-45 jack 10/100/1000 Base-T Ethernet  
Optional single 802.11 b/g/n

## Environment

Temperature range: Operating - 0°C to 40°C (32°F to 104°F)  
Storage - 0°C to 60°C (32°F to 140°F)  
Humidity: Operating - 20 to 80% non condensing; Storage - 10 to 90% non condensing  
Altitude: 0 to 20,000 ft

## Dimensions

Dimensions: 152mmx107mmx31.5mm  
Device weight: 365 gr.

## Power

Running : 3W Maximum: 6W Standby: <1W

## Security


Built-in Kensington security slot (cable sold separately)

## Warranty

Three-year hardware warranty  
Optional extended Warranty for years 4 & 5.

### Front Side View

- 1.USB 2.0 ports \* 2
- 2.Power LED
- 3.Audio Out /Mic In

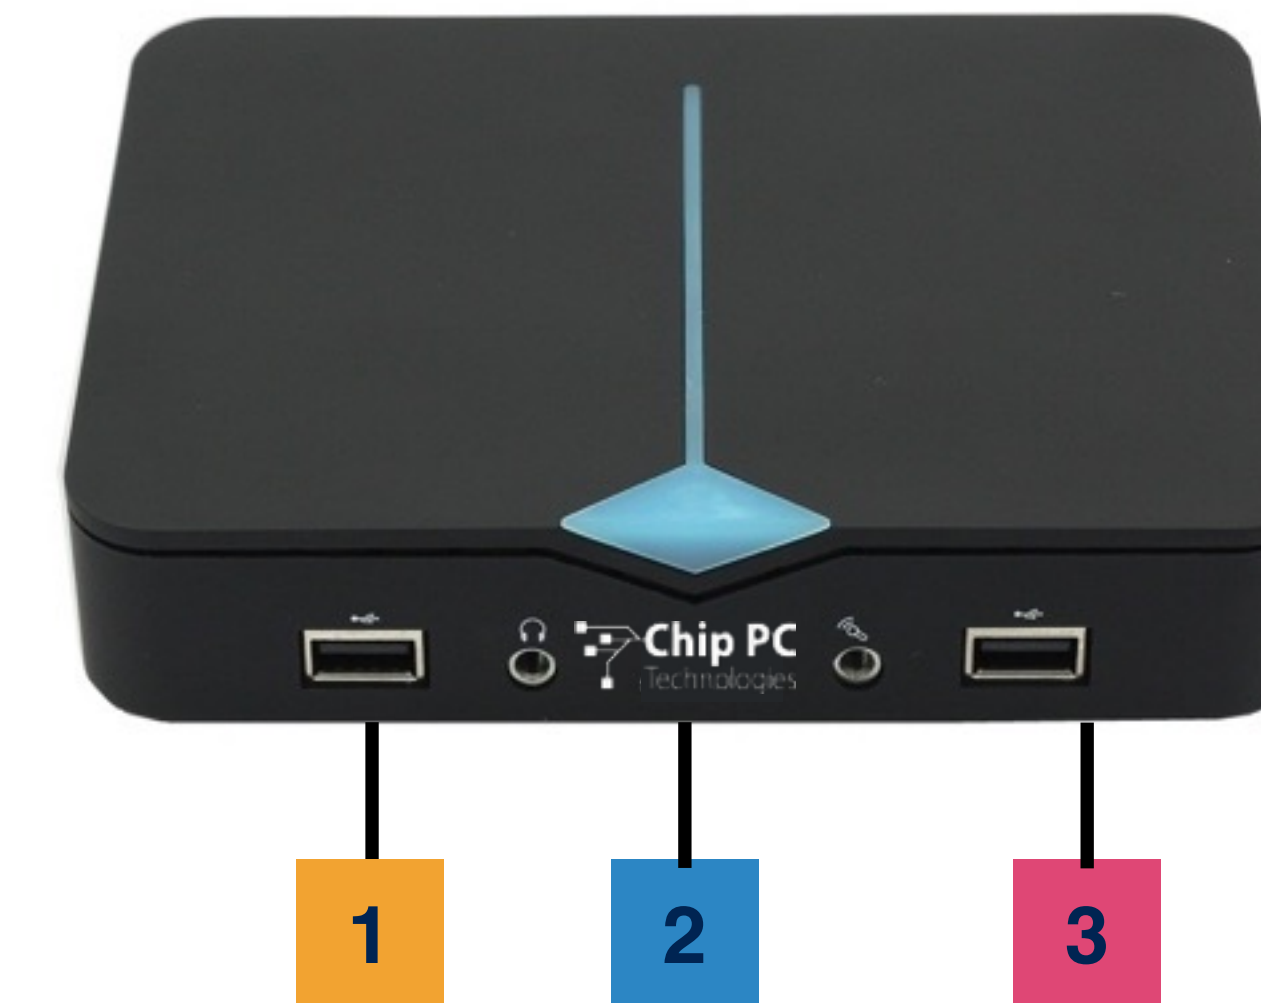

### Rear Side View

4. DC Jack
5. Power Button
6. USB 2.0 ports \* 4
7. Ethernet -RJ45 LAN port
8. DVI-I port



## Operating System

	LXD9162	LXD9162W	LXD9322	LXD9322W
Operating System	ThinX OS	ThinX OS	Windows 10 IoT	Windows 10 IoT

## Flash / RAM

Flash / RAM	16G / 2G	16G / 2G	32G / 2G	32G / 2G
-------------	----------	----------	----------	----------

## Network

Network	RJ 45	RJ 45 - Wifi	RJ 45	RJ 45 - Wifi
---------	-------	--------------	-------	--------------

## VDI Connection Brokers

VDI Connection Brokers	RDP 8 / Citrix XenDesktop / VDI-In-a-Box / HDX, VMware Horizon View w/ PCoIP	RDP 8 / Citrix XenDesktop / VDI-In-a-Box / HDX, VMware Horizon View w/ PCoIP	RDP 8 / Citrix XenDesktop / VDI-In-a-Box / HDX, VMware Horizon View w/ PCoIP	RDP 8 / Citrix XenDesktop / VDI-In-a-Box / HDX, VMware Horizon View w/ PCoIP
------------------------	--	--	--	--

## Part#

Part#	CPN06711	CPN06728	CPN06711	CPN06711
-------	----------	----------	----------	----------

## Management

Management	Xcalibur Global	Xcalibur Global	Xcalibur Global	Xcalibur Global
------------	-----------------	-----------------	-----------------	-----------------