

Sales Policies

CROWER CAMS & EQUIPMENT COMPANY

6180 Business Center Court • San Diego • California • 92154-5604 • USA
619-661-6477 • Fax: 619-661-6466 • www.crower.com • email: info@crower.com
7am to 5pm PST • Monday through Friday • Closed from 12pm to 1pm PST for lunch.

WHERE TO PURCHASE CROWER PRODUCTS

Crower performance products are available at better speed shops and performance warehouses throughout the world. If you are having difficulty locating a Crower dealer in your area and wish to order direct, call 619-661-6477 or go online at www.crower.com.

MINIMUM ORDER

The minimum order is \$20.00 (if less than \$20.00, a \$2.50 service charge will apply).

PAYMENT POLICY

Crower accepts only U.S. postal money orders, certified checks, cashier's checks and bank drafts as deposits or full payments. Personal or non-certified checks will not be accepted. Company checks are acceptable only if you have established credit with Crower prior to your order. Open accounts may be arranged by contacting the Crower Accounting Department. Credit applications are available upon request. A minimum 50% deposit is required on all custom parts.

CREDIT CARD POLICY

We currently accept the following credit cards: Visa card, Master card, Discover card, and American Express. The following types of credit cards are not accepted: Diner's Club Card, and Gift Cards (Even if they have the Visa card, Master card, Discover card, or American Express logos they do not adhere to any safety protocols). To ensure that there is no credit card fraud here at Crower all credit cards must pass security screening. The following information must be provided by all cardholders whose credit cards are from banking/credit unions within the United States: **Cardholder Name, Credit card number, expiration date, Security code, and Billing Address.** If any of the above mentioned information is incomplete or invalid the order will be postponed until the correct information is provided.

ONLINE ORDERING

You can order any Crower product online at www.crower.com.

FREIGHT & SHIPPING

All shipping is F.O.B., San Diego, California. If no shipping instructions are received with your order, Crower will ship by the most reasonable means in accordance with the size, weight and destination of your order. If you desire special handling such as overnight and two day service (UPS and FedEx) please specify with your order. Drop shipments only if prepaid or open account. A fee will be applied on all dropship orders. The cutoff for processing all next day and second day orders is 12pm PST (3pm EST).

LIMITED WARRANTY

All Crower racing products are 100% inspected for quality and quantity prior to shipment. Certain Crower products are covered by a limited warranty, others are not. For product that are covered, a warranty card will be enclosed in the packaging, describing the specific terms and conditions. All guarantees or warranty claims must be referred to the Crower factory. No dealer, jobber or warehouse is authorized to handle these claims directly.

RETURNS, BACKORDERS & SHORTAGES

All merchandise ordered in error is subject to a 15% handling and restocking charge. Merchandise may not be returned without written authorization from Crower. Special order or custom made parts are not returnable or refundable. Original invoice number and date of purchase must be furnished. All items must be returned freight prepaid along with written authorization from Crower. Out of stock items will be backordered and held until parts are available or order is cancelled by the customer. If you do not wish to have out of stock items backordered, please specify with your order. If parcel is received intact and a shortage or error is discovered, you must report this to Crower immediately and followed up in writing within 3 days after receipt of shipment. Merchandise sent in for refurbishing or specifications will be held for no longer than 60 days. Merchandise in our possession after 60 days will become property of Crower.

No returns or refunds will be accepted after one year.

Warranty

STATEMENT OF POLICY

Crower Cams and Equipment Company, Incorporated will be herein referred to as 'Crower'. The warranties set forth below are made possible by the most modern production technology in the industry. Crower's products are proven by laboratory and field testing. Crower does not warrant the product's performance because Crower cannot control its installation, application or usage. Crower does not warrant any items outside of the Crower line of products. Crower does not warrant or accept liability for the destruction or damage to other products used in conjunction with Crower products. By installing a Crower component you acknowledge that high performance parts sometimes fail and you agree in not holding Crower liable for any and all incidental damages. Shipping is offered at our lower rates as a service, you may use your own account at your discretion. Shipping is not considered part of your Crower purchase, but is an independent transaction associated with your purchase's delivery. Shipping/Handling is not covered during warranty replacement issues and is not credited or refunded during any transaction. Crower reserves the right to handle shipping credits on an individual basis. Crower neither delegates nor authorizes any person to assume obligations or liabilities on behalf of Crower in connection with any Crower products or the sale of any Crower products. Nothing in this Statement of Policy shall alter or enlarge the terms of the warranties, obligations or liabilities issued with the products. Warranty is void in race applications.

WARRANTY PROVISIONS

Applies to all connecting rods, crankshafts, clutches and valve train components. Valve train components include: hydraulic, solid, and roller lifters, valve springs, stainless steel rocker arms and pushrods. Crower warrants all of the above listed products against manufacturer's defects for one year from date of purchase by the original purchase user.

CAM WARRANTY PROVISIONS

Crower warrants its entire cam series against excessive lobe wear for one year from the date of purchase by the original purchaser-user in accordance with Crower policies. Crower's cams are designed and required to be used in conjunction with Crower kits to insure optimum performance and longevity. The warranty is valid only where a complete Crower kit is used. If excessive lobe wear occurs during said one year period, purchaser must return the cam and lifters to Crower, freight prepaid. The parts will be analyzed. If Crower is not at fault, the purchaser must secure the means for return delivery of the parts. Should Crower be at fault, Crower has one of two options: Repair or replacement will be accomplished at no cost to the purchaser and returned, freight collect. Crower does not pay shipping.

TERMS & DISCLAIMERS

The following terms apply to any Crower warranty
Crower warranties are void where the Crower product has been physically altered, improperly installed, used or otherwise damaged due to no fault of Crower or has not been used for the purpose intended or for which it was designed.
To obtain warranty benefits, purchaser must complete the warranty registration process within 30 days of purchase by calling Crower at 619-661-6477, or completing this process online at www.crower.com. Failure to do so will void all of the expressed warranties herein above set forth.
Implied warranties of merchantability and fitness are limited for a term of one (1) year from the date of original purchase.
Crower is not responsible for incidental or consequential damage.
These warranties are not assignable or transferable.
These warranties do not apply to reground cams or components used therein.
Each warranty will apply to all repaired or replaced cams or components until the expiration of the remaining period of the original warranty.
This warranty gives you specific legal rights and may also have other legal rights which vary from state to state.
Some Crower products are not legal for sale or use on emission controlled motor vehicles.
For technical support call 619-661-6477 or visit www.crower.com

Camshaft Selection

Crower offers five levels of power to meet your performance needs.

LEVEL 1
CROWER CAMS
MILEAGE & TORQUE

Approximate RPM Power Range:
Hydraulic Camshafts - Idle to 3500 / Redline: 4500
Solid Camshafts - 1000 to 4000 / Redline: 5000

Crower Level 1 Camshafts are good stock replacements. These profiles are designed to enhance throttle response and low end torque in vans, trucks, passenger cars and mild marine applications while delivering fuel-efficient motoring. High vacuum, smooth idle and maximum efficiency are characteristics of these cams. Stock or small cfm carburetor, small diameter tube headers and dual exhaust are recommended for maximum benefit. These cams are intended for stock or near stock engines and drive trains, 8.5:1 compression, 2.70 to 3.25 ring and pinion, automatic transmission with stock converter or manual transmission.

LEVEL 2
CROWER CAMS
MILEAGE & POWER

Approximate RPM Power Range:
Hydraulic Camshafts - 1500 to 4000 / Redline: 5500
Solid Camshafts - 2000 to 5000 / Redline: 6000

Level 2 Crower Camshafts were designed for lightly modified street engines that require more power and an extended rpm range. They work well with stock or near-stock engines and drive trains, and provide excellent low-end and mid-range power for spirited street, off road driving, and mild marine applications. Modifications that should accompany installation of these cams include small diameter tube headers, low restriction exhaust, aftermarket intake manifold, increased cfm carburetor and a reworked or performance ignition. Increased compression (9.5:1) is recommended for maximum output. An aftermarket torque converter with a slightly higher stall speed is recommended.

LEVEL 3
CROWER CAMS
HIGH PERFORMANCE

Approximate RPM Power Range:
Hydraulic Camshafts - 1800 to 4500 / Redline: 6000
Solid Camshafts - 2200 to 6000 / Redline: 7000
Hydraulic Roller Camshafts - 2000 to 4700 / Redline: 6250

Level 3 Crower Camshafts were developed for modified performance engines and intended for hot street/strip, and marine applications. These profiles have a moderate lope at idle with an extended rpm range and increase upper-bottom to top-end power, along with a strong mid-range. These higher lift, longer duration camshafts require close attention to rear end gearing and tire diameter combinations. Choose a ring and pinion gear set and tire diameter that allows the engine to run in its optimum rpm power range (refer to Figure 1). These profiles perform well with manual or automatic transmissions with the use of a high stall torque converter. Headers, dual exhaust, larger than stock carburetor, performance manifold, and increased compression (9.5:1 to 10.5:1) are required. Mild porting and larger valves will improve performance.

Camshaft Selection

**LEVEL 4
CROWER CAMS
ULTRA PERFORMANCE**

Approximate RPM Power Range:
Hydraulic Camshafts - 2000 to 6000 / Redline: 6500
Solid Camshafts - 2500 to 6500 / Redline: 7500
Hydraulic Roller Camshafts - 2200 to 5000 / Redline: 6500

Level 4 Camshafts are intended for use on heavily modified engines. They have a definite lobe at idle and are intended for dual-purpose hot street/drag strip, oval track and hot marine applications. These grinds exhibit strong mid-range to top-end torque and horsepower. Headers, dual exhaust, large cfm carburetor, performance ignition and increased compression of 10.25:1 and above are recommended. Cylinder head modifications will increase performance. These profiles perform well with the use of a high stall torque converter. Close attention to proper ring and pinion and tire diameter selection is very important.

**LEVEL 5
CROWER CAMS
COMPETITION/
RACE ONLY**

Crower engineers have listened to racers, and developed Level 5 camshaft profiles. These profiles are intended for fully built, high compression racing engines and chassis. Extensive cylinder head modification, bigger valves, lightweight valve train, titanium valves, maximum flow carburetion or fuel injection, racing fuel, alcohol or nitro, magneto or electronic ignition, performance connecting rods and crank assembly and increased engine clearances are recommended for maximum benefit.

For assistance in choosing the right cam profile and other recommended upgrades, contact our technical support staff at 619-661-6477

RPM RANGE AT 60 MPH

Tire Diameter	Rear End Gear Ratio										
	2.18	2.50	2.74	3.08	3.23	3.50	3.73	3.90	4.10	4.56	4.88
24	1831	2100	2301	2587	2713	2940	3133	3276	3444	3830	4099
26	1690	1938	2124	2388	2504	2714	2892	3024	3179	3536	3784
28	1570	1800	1973	2218	2326	2520	2686	2808	2952	3283	3513
30	1465	1680	1841	2070	2170	2352	2507	2621	2755	3064	3279
32	1373	1575	1726	1940	2035	2205	2349	2457	2583	2873	3074
34	1293	1482	1625	1826	1915	2075	2212	2312	2431	2704	2894
36	1221	1400	1534	1725	1809	1960	2089	2184	2296	2554	2733
38	1157	1326	1454	1634	1714	1857	1979	2069	2175	2419	2589
40	1099	1260	1381	1552	1628	1764	1880	1966	2066	2298	2460
42	1046	1200	1315	1478	1550	1680	1790	1872	1968	2189	2342

RPM CHART
Fig.1

FORMULA:

$$\frac{\text{MPH} \times \text{Axle Ratio}}{\text{Tire Diameter} \times 336}$$

HYDRAULIC FLAT TAPPET AMC

1964 -1998

199 232 242 (4.0L) 258 (4.2L) 6 cylinder

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 1 Better than stock cam, big mid-range power. RPM Power Range: 700 to 3800	44901	ALL CID	238HDP	110°	238°	246°	194°	202°	.432"	.453"	84044 or 84042
BAJA BEAST / PERFORMANCE LEVEL 2 Strong upper bottom/top end power. RPM Power Range: 1800 to 4250 / Redline: 5000 plus	44915	ALL CID	280HDP	112°	280°	280°	208°	208°	.448"	.448"	84044 or 84042
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Street/strip cam. Super top end power. RPM Power Range: 2000 to 5000 / Redline: 5500 plus	44245	ALL CID	278HDP	112°	278°	284°	212°	218°	.462"	.475"	84044 or 84042
NEW Impressive horsepower increase with little low end loss. Don't let the lower duration numbers fool you. Nice idle sound. RPM Power Range: 2000 to 5000 / Redline: 5500 plus	44246	ALL CID	266HDP	110°	266°	270°	218°	222°	.490"	.501"	84044 or 84042
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00144H	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .000" intake and exhaust valve lash.

1989 - Later 199 - 258 Use a 3/11" valve stem size

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 3 Strong upper bottom to mid-range power. RPM Power Range: 1800 to 4500 / Redline: 6000 plus.	44311	ALL CID	282FDP	112°	282°	287°	238°	242°	.480"	.486"	84246
PRO-STREET / PERFORMANCE LEVEL 4 Exhibits strong mid-range to top end performance. RPM Power Range: 2000 to 6000 / Redline: 7000 Plus.	44312	ALL CID	292FDP	110°	292°	298°	248°	250°	.499"	.512"	84246
CUSTOM GROUND HYDRAULIC Special order solid lifter camshaft ground to your specifications. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00144M	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84041	66031X3-12	68155-12	87057- 12	Upgrade Kit Coolface lifter, and beehive spring. Steel retainer
84044	66031-12	68314-12	87049D- 12	Hydraulic Lifter. For rpm Up to 6000.
84042¹	66031-12	68404-12	87047- 12	Hydraulic Lifter. 1989-up 5/16" valve, includes #86106 Keeper.
84246	66945-12	68390X3-12	87049D- 12	Solid Lifter. For rpm over to 7000. Race Only

Lifters in Component Kit are available with COOLFACE & CAMSAVER options

Kits shown fit 3/8 valves

Spring pressure:

68155-12 Seat: 1.800" @ 96 lbs / Nose: 1.300" @ 268 lbs / Coil bind: 1.060"

68314-12 Seat: 1.750" @ 95 lbs / Nose: 1.250" @ 267 lbs / Coil bind: 1.030"

(Stock O.D., no machine work).

68390X3-12 Seat: 1.800" @ 115 lbs / Nose: 1.300" @ 331 lbs / Coil bind: 1.110"

(Machine work).

68404-12 Seat: 1.600" @ 110 lbs / Nose: 1.100" @ 287 lbs / Coil bind: .880"

* Machine work required, specify 3/8 pilot shaft when ordering.

¹ Machine work required

Optional Lifters:

66031RM3-12 - High-Lube CamSaver hydraulic lifters

66945X980-12 - Coolface solids

Note: Longer pushrods may be required to achieve proper hydraulic lifter preload (.050" off snap-ring). Use checking pushrod.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Valve timing events are available online at: www.crower.com

AMC HYDRAULIC FLAT TAPPET

1966-1991

290 304 343 360 (5.9L) 390 401 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 1 Excellent low end and mid-range power. RPM Power Range: 1500 to 4000 / Redline: 5000 Plus.	44901	290 304 343	238HDP	110°	238°	246°	194°	202°	.432"	.453"	84045 Upgrade 84045X3
BAJA BEAST / PERFORMANCE LEVEL 2 Excellent low end and mid-range power. RPM Power Range: 1500 to 4000 / Redline: 5000 Plus.	45915	290 304 343	258HDP	112°	258°	264°	204°	210°	.445"	.448"	84045 Upgrade 84045X3
POWER COMPU-PRO / Performance Level 2 Excellent low end and mid-range power and extended rpm range for spirited street and off-road driving. A perfect combination of mileage and power. Modifications should include small diameter tube headers, low restriction dual exhaust, aftermarket manifold, increased cfm carburetor and reworked or performance ignition. Increase in compression ratio to 9.5:1 is recommended for maximum output. Works well with automatic transmission or 4-speed. RPM Power Range: 1700 to 4500 / Redline: 5500 Plus.	45240	290 304 343	270HDP	112°	270°	276°	210°	220°	.450"	.475"	84045 Upgrade 84045X3
POWER COMPU-PRO / Performance Level 2 Broadest power range we've ever had for these engines. Previously only available as custom order, now available. Use Camsaver lifters. RPM Power Range: 1500 to 4800 / Redline: 5500 Plus.	45248	290 304 343	276HDP	108°	262°	266°	214°	218°	.480"	.490"	84045 Upgrade 84045X3
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Intended for the performance oriented hot-street application, these cams offer an extended rpm range with emphasis on upper bottom to top end power. Performance gears, headers, dual exhaust, larger than stock cfm carburetor, performance manifold and increased compression (9.5:1 to 10.5:1) are required. Works well with automatic transmission if matched with proper ring and pinion gears and/or high stall converter. RPM Power Range: 1800 to 5000 / Redline: 6000 Plus.	45246	290 304 343	293HDP	114°	293°	293°	223°	223°	.477"	.477"	84045 Upgrade 84045X3
	45243	390 401	284HDP	112°	284°	290°	228°	234°	.512"	.525"	84045 Upgrade 84045X3
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Intended for the performance oriented hot-street application, these cams offer an extended rpm range with emphasis on upper bottom to top end power. Performance gears, headers, dual exhaust, larger than stock cfm carburetor, performance manifold and increased compression (9.5:1 to 10.5:1) are required. Works well with automatic transmission if matched with proper ring and pinion gears and/or high stall converter. RPM Power Range: 1800 to 5000 / Redline: 6000 Plus.	45247	390 401	305HDP	112°	305°	315°	234°	244°	.520"	.542"	84045 Upgrade 84045X3
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Strong mid to top end torque. Rough Idle. RPM Power Range: 2500 to 6000 / Redline: 6500 Plus.	45210	390 401	290HDP	108°	290°	298°	226°	236°	.498"	.496"	84045 Upgrade 84045X3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00145H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84045	66031-16	68314-16	87049- 16 ^A	Hydraulic Lifter.
84045X3	66031X3-16	68314-16	87049- 16 ^A	CamSaver Hydraulic Lifter.

Spring pressure:
68314-16 Seat: 1.750" @ 95 lbs / Nose: 1.250" @ 267 lbs / Coil bind: 1.030"
(Stock O.D., no machine work).

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

See the following page for specs on accessories

A. Some 1973-74 engines were equipped with 11/32 exhaust valves and rotators. Order 87049-8 and 87050-8 steel retainers, and 86071-8 and 86072-8 valve stem seals.

* Machine work required, specify 3/8 pilot shaft when ordering.

Note: If exceeding 7500 rpm, high pressure springs and titanium retainers may be required. See spring and retainer specs or contact Crower for proper recommendations. Valve timing events are available online at: www.crower.com

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

MECHANICAL FLAT TAPPET AMC

1966-1991

290 304 343 360 (5.9L) 390 401 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Intake	Duration Exhaust	Advertised Intake	Duration Exhaust	Gross Lift 1.6 / 1.6	Suitable Component Kit
COMPU-PRO / PERFORMANCE LEVEL 4 High torque, all purpose camshaft with emphasis on mid to top end power. RPM Power Range: 3000 to 6500 / Redline: 7500 Plus.	45316	360 401	292FDP	108°	292°	298°	246°	250°	.499" .509"	84345 Upgrade 84345X980
COMPU-PRO / PERFORMANCE LEVEL 5 Does it all. Brutal power throughout the power range. RPM Power Range: 3500 to 7500 / Redline: 8000 Plus.	45317	290 343	304FDP	108°	304°	310°	258°	262°	.534" .549"	84345 Upgrade 84345X980
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00144M	360 401	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .022" intake, .024" exhaust valve lash.

Roller cam available, please call Crower with your head flow numbers & application for a custom grind.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84345	66945-16	68390X3-16 ^A	87049- 16 ^A	86071-16	Solid Lifter. For high rpm. Limited street use.
84345X980	66945X980-16	68390X3-16 ^A	87049- 16 ^A	86071-16	CoolFace Solid Lifter. For high rpm. Limited street use.

Spring pressure:

68390X3-16 Seat: 1.800" @ 115 lbs / Nose: 1.300" @ 331 lbs / Coil bind: 1.110" (Machine work).

A. Some 1973-74 engines were equipped with 1 1/32 exhaust valves and rotators. Order 87049-8 and 87050-8 steel retainers, and 86071-8 and 86072-8 valve stem seals.

* Machine work required, specify 3/8 pilot shaft when ordering.

Note: If exceeding 7500 rpm, high pressure springs and titanium retainers may be required. See spring and retainer specs or contact Crower for proper recommendations.

Valve timing events are available online at: www.crower.com

Note: If using guide plates, heat-treated pushrods (RC 60 series) are required. See pushrods or contact Crower.

Note: When installing solid or roller lifter camshafts, screw-in rocker studs are required. Contact Crower.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

BUICK HYDRAULIC FLAT TAPPET

1978-1986

196 (3.2L) 231 (3.8L) 252 (4.1L) V6 Evenfire

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 3 Good hot street cam with emphasis on upper bottom to top end power. RPM Power Range: 1800 to 4500 / Redline: 6000 Plus.	54915	ALL CID	280HDP	112°	280°	290°	204°	214°	.450"	.474"	84053X3
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Street/strip cam with strong mid to top end torque and horsepower. RPM Power Range: 2000 to 6000 / Redline: 6500 Plus.	54245	ALL CID	278HDP	112°	278°	284°	212°	218°	.462"	.478"	84053X3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00154H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: Early 198-225 cid 1962-1967 Odd Fire cam cores are available from Crower. Specify when ordering.

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc when ordering.	00154M	196 231 252	Refer to www.crower.com for camshaft recommendation								

Note: Custom ground turbocharged/supercharged camshafts are available from Crower on a special order basis.

Buick GN 231 c.i. 6 cyl. 1977 1/2 - 1987, 1988 - 1989 AMC

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84053	66050-12	68301X1-12	86032-12	Hydraulic Lifter.
84053X3	66050X3-12	68301X1-12	86032-12	CamSaver Hydraulic Lifter.
84255	66900-12	68301X1-12	86032-12	Solid Lifter.
84255X980	66900X980-12	68301X1-12	86032-12	CoolFace Solid Lifter.

Spring pressure:

68301X1-12 Seat: 1.700" @ 101 lbs / Nose: 1.250" @ 274 lbs / Coil bind: 1.130"

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. See spring and retainer specs or contact Crower for proper recommendations.

Valve timing events are available online at: www.crower.com

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

Note: Crower has an extensive inventory of Buick V6 cam profiles and roller lifters that were designed for the Buick V6 Indy turbo engines.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

HYDRAULIC FLAT TAPPET

BUICK

215 300 340 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power and mileage with extended rpm range. Strong low end and mid-range power for spirited driving on or off the road. RPM Power Range: 1500 to 4000 / Redline: 5500 Plus.	50229	300	258HDP	112°	258°	260°	196°	202°	.430"	.446"	84150
	50230	340	260HDP	112°	260°	266°	202°	210°	.446"	.451"	84150
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 These cams offer extended rpm range with emphasis on upper bottom and top end power. RPM Power Range: 1800 to 4500 / Redline: 6000 Plus.	50231	300	270HDP	112°	270°	276°	210°	218°	.451"	.477"	84150
	50232	340	276HDP	112°	276°	281°	214°	218°	.488"	.490"	84150
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 These cams exhibit strong mid-range and top end torque and horsepower. RPM Power Range: 2000 to 6000 / Redline: 6500 Plus.	50233	300	280HDP	112°	280°	286°	220°	226°	.488"	.501"	84150
	50234	340	284HDP	112°	284°	290°	228°	234°	.512"	.526"	84150
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00151H	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Available for Land Rover, contact Crowder

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / Performance Level 4 Tremendous upper mid to top end torque and horsepower. RPM Power Range: 3000 to 6500 / Redline: 7500 Plus.	50305	340	304FDP	108°	304°	310°	256°	262°	.536"	.549"	84350
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00151M	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00060	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84150	66050-16	68405-16	87021-16	86072-16	Hydraulic Lifter.
84350	66900-16	68405-16	87021-16	86072-16	Solid Lifter.
84150X3	66050X3-16	68405-16	87021-16	86072-16	CamSaver Hydraulic Lifter.
84350X980	66900X980-16	68405-16	87021-16	86072-16	CoolFace Mechanical Lifter.

Spring pressure:

68405-16 Seat: 1.700" @ 104 lbs / Nose: 1.200" @ 297 lbs / Coil bind:

0.980" (Machine work, use cutter 68983*).

* Machine work required, specify 3/8 pilot shaft when ordering.

Valve timing events are available online at:

www.crower.com

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. Contact Crowder.

Crowder Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

All previous part numbers no longer listed are still available as custom grinds. Please contact Crowder for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

BUICK HYDRAULIC FLAT TAPPET

1968-1980
BUICK 350 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.55 / 1.55		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
HIGH PERFORMANCE COMPU-PRO / Performance Level 3 Strong upper bottom to top end power. RPM Power Range: 1800 to 4500 / Redline: 6000 Plus.	50258	350	276HDP	112°	276°	281°	210°	220°	.446"	.468"	84150 84150X3
ULTRA PERFORMANCE COMPU-PRO / Performance Level 4 Street/strip profile with superior upper bottom to top end torque. RPM Power Range: 2000 to 6000 / Redline: 6500 Plus.	50259	350	284HDP	112°	284°	290°	226°	234°	.499"	.508"	84150 84150X3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00150H	350	<i>Refer to www.crower.com for camshaft recommendation</i>						84150 84150X3		

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.55 / 1.55		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00150M	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84150	66050-16	68405-16	87021-16	86072-16	Hydraulic Lifter.
84350	66900-16	68405-16	87021-16	86072-16	Solid Lifter.
84150X3	66050X3-16	68405-16	87021-16	86072-16	CamSaver Hydraulic Lifter.
84350X980	66900X980-16	68405-16	87021-16	86072-16	CoolFace Solid Lifter.

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. Contact Crower.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

**Engineered Component Kit for the above part #'s: 84350.
For Custom Ground Roller contact CROWER.**

Spring pressure:

68405-16 Seat: 1.700" @ 104 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 0.980" (Machine work, use cutter 68983*).

* Machine work required, specify 3/8 pilot shaft when ordering.

Valve timing events are available online at:

www.crower.com

HYDRAULIC FLAT TAPPET

BUICK

Non Roller 1967-1976
400 430 455 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
POWER COMPU-PRO / Performance Level 2 Perfect combination of power and mileage with extended rpm range. Strong low end and mid-range power for spirited driving on or off the road. RPM Power Range: 1500 to 4000 / Redline: 5500 Plus.	52239	455	276HDP	112°	276°	281°	212°	216°	.475"	.487"	84054 Upgrade 84054X3
HIGH PERFORMANCE COMPU-PRO / Performance Level 3 Intended for the hot street application, these cams offer extended rpm range with emphasis on upper bottom and top end power. RPM Power Range: 1800 to 4500 / Redline: 6000 Plus.	52241	455	284HDP	112°	284°	290°	230°	236°	.514"	.525"	84054 Upgrade 84054X3
ULTRA PERFORMANCE COMPU-PRO / Performance Level 4 Dual purpose hot street/drag strip profile. These cams exhibit strong mid-range and top end torque and horsepower. RPM Power Range: 2000 to 5000 / Redline: 6500 Plus.	52242	400 430	297HDP	112°	297°	308°	238°	242°	.538"	.536"	84054 Upgrade 84054X3
HI-DRAULIC HAULER / Performance Level 4 Strong mid-range to top end power. RPM Power Range: 2750 to 6250 / Redline: 6500 Plus.	52211	455	304HDP	108°	311°	316°	248°	252°	.546"	.559"	84054 Upgrade 84054X3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00152H	ALL CID	Refer to www.crower.com for camshaft recommendation								

1957-66 Buick V8 364 401 425 (Nail Head) hydraulic & solid cams available. Call Crower

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84054	66050-16	68143-16	87019-16	
84054X3	66050-16	68143-16	87019-16	CamSaver Lifter

Spring pressure:

68143-16 Seat: 1.850" @ 92 lbs / Nose: 1.350" @ 300 lbs / Coil bind: 1.260" (Stock O.D., no machine work).

Note: When using high lift cams (over .480") or modified valve stem lengths, a longer pushrod is required to achieve proper lifter preload (.050" off snap-ring). Use checking pushrod to determine length and call with specs.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

BUICK MECHANICAL FLAT TAPPET

1967-1976
400 430 455 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / Performance Level 3 High torque, all purpose profile. RPM Power Range: 2500 to 6000 / Redline: 6000 Plus.	52310	ALL CID	282FDP	108°	282°	287°	238°	242°	.482"	.488"	84254 84254X980
COMPU-PRO / Performance Level 4 Superior mid-range and top end torque. Rough Idle RPM Power Range: 3500 to 6500 / Redline: 6500 Plus.	52312	ALL CID	304FDP	108°	304°	310°	258°	262°	.533"	.549"	84254 84254X980
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00152M	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .022" intake, .024" exhaust valve lash. **1957-66 Buick V8 364 401 425 (Nail Head) hydraulic & solid cams available. Call Crower**

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84254	66900-16	68143-16	87019-16	
84254X980	66900X980-16	68143-16	87019-16	CoolFace Lifter

Spring pressure:

68143 Seat: 1.850" @ 92 lbs / Nose: 1.350" @ 300 lbs / Coil bind: 1.280"
(Stock O.D., no machine work).

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. See spring and retainer specs or contact Crower for proper recommendations.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

Note: Solid lifter camshafts require adjustable pushrods. See pushrods or contact Crower.

HYDRAULIC FLAT TAPPET

CHEVROLET

Non Roller 1963-1984

194 230 250 inline 6 cylinder

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.75 / 1.75		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
HIGH PERFORMANCE COMPU-PRO / Performance Level 3 Hot street profile with strong upper bottom and top end power. RPM Power Range: 1800 to 4500 / Redline: 6000 Plus.	03242	ALL CID	262HDP	112°	262°	272°	204°	212°	.478"	.490"	84008 84008X3
ULTRA PERFORMANCE COMPU-PRO / Performance Level 4 Street/strip cam. Super top end torque and horsepower. RPM Power Range: 2000 to 6000 / Redline: 6500 Plus.	03243	ALL CID	272HDP	112°	272°	276°	210°	212°	.490"	.508"	84008 84008X3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00106H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: 292 cid cam cores are available from Crower on a special order basis.

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.75 / 1.75		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / Performance Level 4 Does it all. Brutal power throughout the power range. RPM Power Range: 3000 to 6500 / Redline: 7000 Plus.	03312	ALL CID	292FDP	107°	292°	298°	248°	252°	.548"	.564"	84303 84008X980
COMPU-PRO / Performance Level 5 Explosive power. Superior mid-range and top end torque. RPM Power Range: 3500 to 7000 / Redline: 7500 Plus.	03313	ALL CID	304FDP	107°	304°	310°	258°	264°	.585"	.600"	84303 84008X980
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00106M	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: 292 cid cam cores are available from Crower on a special order basis.

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84008	66000-12	68301X1-12	86032-12	86072-12	Hydraulic Lifter.
84008X3	66000X3-12	68301X1-12	86032-12	86072-12	CoolFace Lifter.
84303	66900-12	68390X3-12	87048-12	86072-12	Solid Lifter. Race Only
84303X980	66900X980-12	68390X3-12	87048-12	86072-12	CamSaver Lifter. Race Only

Spring pressure:

68301X1-12 Seat: 1.700" @ 101 lbs / Nose: 1.200" @ 297 lbs / Coil bind:

1.130" (Stock O.D., no machine work).

68390X3-12 Seat: 1.800" @ 115 lbs / Nose: 1.300" @ 331 lbs / Coil bind: 1.110" (Machine work).

* Machine work required

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Chevy V6 230 250 292 Billet Roller Cams available. Call Crower

CHEVROLET

HYDRAULIC FLAT TAPPET

Non Roller
173 60° (2.8L) 189 (3.1L) V6

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / Performance Level 3 Strong upper bottom and top end power. RPM Power Range: 1800 to 4500 / Redline: 5750 Plus.	03015	ALL CID	278HDP	112°	283°	286°	204°	214°	.422"	.444"	84008 84008X3
ULTRA PERFORMANCE COMPU-PRO / Performance Level 4 Street/strip cam. Super top end torque. RPM Power Range: 2000 to 5000 / Redline: 6000 Plus.	03043	ALL CID	278HDP	112°	278°	284°	212°	218°	.435"	.449"	84008 84008X3
HI-DRAULIC HAULER / Performance Level 4 Strong mid-range and top end torque and horsepower. RPM Power Range: 2200 to 6200 / Redline: 6500 Plus.	03050	ALL CID	290HDP	108°	290°	298°	226°	234°	.470"	.492"	84008 84008X3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00107H	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / PERFORMANCE LEVEL 4 Hot street/strip profile. Strong mid to top end torque and horsepower. RPM Power Range: 2500 to 6500 / Redline: 7500 Plus	03066	ALL CID	282FDP	110°	282°	287°	236°	242°	.449"	.458"	84303 84303X980
COMPU-PRO / PERFORMANCE LEVEL 5 Fantastic top end profile with plenty of horsepower. RPM Power Range: 3000 to 7000 / Redline: 8000 Plus	03067	ALL CID	292FDP	108°	292°	298°	248°	250°	.470"	.479"	84303 84008X980
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00107M	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .022" intake, .024" exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84008	66000-12	68301X1-12	86032-12	86072-12	Hydraulic Lifter.
84008X3	66000X3-12	68301X1-12	86032-12	86072-12	CoolFace Lifter.
84303	66900-12	68390X3-12	87048-12	86072-12	Solid Lifter. Race Only
84303X980	66900X980-12	68390X3-12	87048-12	86072-12	CamSaver Lifter. Race Only

Spring pressure:

68301X1-12 Seat: 1.700" @ 101 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 1.130" (Stock O.D., no machine work).

68390X3-12 Seat: 1.800" @ 115 lbs / Nose: 1.300" @ 331 lbs / Coil bind: 1.110" (Machine work).

* Machine work required

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. Contact Crower.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

HYDRAULIC FLAT TAPPET CHEVROLET

Non Roller

200 229 90° V6 (3.8L)

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / Performance Level 3 Strong upper bottom and top end power. RPM Power Range: 1800 to 4500 / Redline: 6000 Plus.	03115	ALL CID	278HDP	114°	278°	288°	204°	214°	.422"	.444"	84008 84008X3
POWER BEAST / Performance Level 4 Street/strip cam. Super top end torque. RPM Power Range: 2000 to 5500 / Redline: 6250 Plus.	03103	229	288HDP	112°	288°	298°	214°	224°	.444"	.467"	84008 84008X3
HI-DRAULIC HAULER / Performance Level 4 Strong mid-range and top end torque and horsepower. RPM Power Range: 2200 to 6200 / Redline: 6500 Plus.	03150	ALL CID	280HDP	108°	280°	288°	226°	232°	.474"	.484"	84008 84008X3
HI-DRAULIC HAULER / Performance Level 5 Explosive mid to top end power with emphasis on the upper end. RPM Power Range: 2500 to 6500 / Redline: 6500 Plus.	03151	229	296HDP	108°	296°	308°	228°	244°	.509"	.498"	84008 84008X3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00108H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / Performance Level 4 High torque, all purpose grind for most applications. RPM Power Range: 2200 to 6200 / Redline: 6750 Plus.	03165	ALL CID	282FDP	110°	282°	287°	238°	244°	.451"	.460"	84303 84303X980
COMPU-PRO / Performance Level 5 Vicious horsepower throughout the power band. RPM Power Range: 3000 to 7000 / Redline: 7500 Plus.	03166	ALL CID	292FDP	108°	292°	298°	246°	250°	.468"	.479"	84303 84008X980
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00108M	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84008	66000-12	68301X1-12	86032-12	86072-12	Hydraulic Lifter.
84008X3	66000X3-12	68301X1-12	86032-12	86072-12	CoolFace Lifter.
84303	66900-12	68390X3-12	87048-12	86072-12	Solid Lifter. Race Only
84303X980	66900X980-12	68390X3-12	87048-12	86072-12	CamSaver Lifter. Race Only

Spring pressure:

68301X1-12 Seat: 1.700" @ 101 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 1.130" (Stock O.D., no machine work).

68390X3-12 Seat: 1.800" @ 115 lbs / Nose: 1.300" @ 331 lbs / Coil bind: 1.110" (Machine work).

* Machine work required

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. Contact Crower.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Mechanical
200 229 90° V6 (3.8L)

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA ACTION / Performance Level 5 High torque, all purpose grind. RPM Power Range: 2200 to 6000 / Redline: 7000 Plus.	03401	ALL CID	284R	105°	284°	294°	254°	260°	.621"	.624"	84507
ULTRA ACTION / Performance Level 5 Impressive mid-range and top end profile for the drags. RPM Power Range: 2200 to 6000 / Redline: 7000 Plus.	03403	ALL CID	297R	105°	297°	304°	264°	268°	.624"	.623"	84507
CUSTOM GROUND ROLLER Special order camshaft using a custom core any special configuration. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .026" intake, .028" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84507	66289-12	68363 -12	87048-12	86072-12	For rpm up to 7500
84507H	66289H-12	68363 -12	87048-12	86072-12	HIPPO Lifters

Spring pressure:

68363-12 Seat: 1.900" @ 212 lbs / Nose: 1.300" @ 484 lbs / Coil bind: 1.100" (Machine work, use cutter 68999*).

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

Chevrolet V-6 90°

3 Different Engines

All V-6 Chevrolet 90° engines have the same firing order: 1 - 6 - 5 - 4 - 3 - 2

1978-84 200 c.i. and 229 c.i.

Have Semi-Even Firing.

18° Split 132°/108°/132°/108°/132°/108°

1985 4.3 262 c.i.

30° Split Even Firing

120° - 120° - 120° - 120° - 120° - 120°

Heavy Duty Common-Pin Odd-Fire

150° - 90° - 150° - 90° - 150° - 90°

Race Only

No Production Cars Or Trucks

HYDRAULIC FLAT TAPPET

CHEVROLET

Non Roller

262 90° V6 (4.3L)

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
HIGH PERFORMANCE COMPU-PRO / Performance Level 3 Strong upper bottom/top end power. RPM Power Range: 2000 to 4500+	03342	ALL CID	264HDP	112°	264°	270°	202°	206°	.419"	.420"	84005
ULTRA PERFORMANCE COMPU-PRO / Performance Level 4 Street/strip cam. Super top end torque. RPM Power Range: 2000 to 5500+	03343	ALL CID	278HDP	112°	278°	284°	212°	218°	.435"	.449"	84005
HI-DRAULIC HAULER / Performance Level 4 Strong mid-range and top end torque and horsepower. RPM Power Range: 2200 to 6200 / Redline: 6500 Plus.	03350	ALL CID	280HDP	108°	280°	288°	226°	232°	.474"	.484"	84005
HI-DRAULIC HAULER / Performance Level 5 Explosive mid to top end power with emphasis on the upper end. RPM Power Range: 2500 to 6500 / Redline: 6700 Plus.	03351	ALL CID	296HDP	108°	296°	308°	228°	244°	.509"	.498"	84005
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00109H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / Performance Level 4 High torque, all purpose grind for most applications. RPM Power Range: 2200 to 6200 / Redline: 6750 Plus.	03365	262	282FDP	110°	282°	287°	238°	244°	.451"	.460"	84303
COMPU-PRO / Performance Level 5 Vicious horsepower throughout the power band. RPM Power Range: 3000 to 7000 / Redline: 7500 Plus.	03366	262	292FDP	108°	292°	298°	246°	250°	.468"	.474"	84303
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00109M	262	Refer to www.crower.com for camshaft recommendation								

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84008	66000-12	68301X1-12	86032-12	86072-12	Hydraulic Lifter.
84303	66900-12	68390X3-12	87048-12	86072-12	Solid Lifter.
84008X3	66000X3-12	68301X1-12	86032-12	86072-12	CoolFace Lifter.
84303X980	66900X980-12	68390X3-12	87048-12	86072-12	CamSaver Lifter.

Spring pressure:

68301X1-12 Seat: 1.700" @ 101 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 1.130" (Stock O.D., no machine work).

68390X3-12 Seat: 1.800" @ 115 lbs / Nose: 1.300" @ 331 lbs / Coil bind: 1.110" (Machine work).

* Machine work required

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. Contact Crower.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams
ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.
Part #86092 - 4oz Bottle of ZDDPlus & Paste

Mechanical
262 90° V6 (4.3L)

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA ACTION / Performance Level 5 High torque, all purpose grind. RPM Power Range: 3500 to 7000 / Redline: 7500 Plus.	03450	ALL CID	284R	105°	284°	294°	254°	260°	.621"	.624"	84507
ULTRA ACTION / Performance Level 5 Impressive mid-range and top end profile for the drags. RPM Power Range: 4500 to 8000 / Redline: 8000 Plus.	03452	ALL CID	297R	105°	297°	304°	264°	268°	.624"	.623"	84507
CUSTOM GROUND ROLLER Special order camshaft using a custom core. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00060	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .026" intake, .028" exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84507	66289-12	68363-12	87048-12	86072-12	For rpm up to 7500
84507H	66289H-12	68363-12	87048-12	86072-12	HIPPO Lifters

Spring pressure:

68363-12 Seat: 1.900" @ 212 lbs / Nose: 1.300" @ 484 lbs / Coil bind: 1.100" (Machine work, use cutter 68999*).

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

Note: If exceeding 6500 rpm, high pressure springs and titanium retainers may be required. Contact Crower.


Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397 ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

LightWeight Cams Now Available

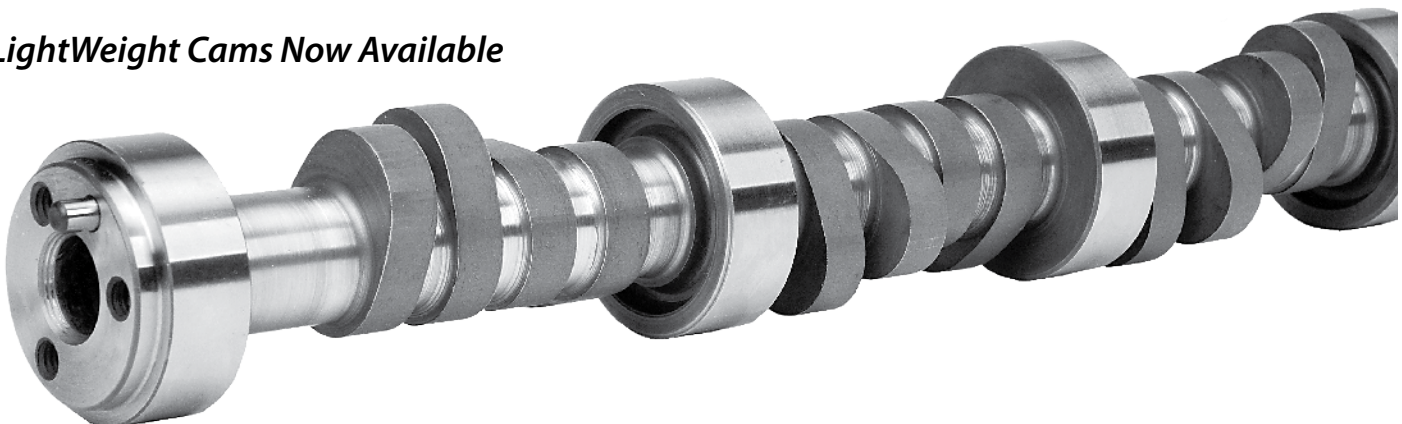

Performance at an Affordable Price

HYDRAULIC FLAT TAPPET

CHEVROLET

1957-1998 Non Roller

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / Performance Level 2 Strong bottom end power. Excellent for trucks and heavy cars. Economical price. RPM Power Range: 1200 to 3800 / Redline: 5200 Plus.	00915	283	258H	112°	258°	264°	204°	208°	.414"	.417"	84002S
TORQUE BEAST / Performance Level 3 Low to mid-range torque for daily drivability. Economical price. RPM Power Range: 1800 to 5500 / Redline: 6000 Plus.	00904	283	288H	112°	288°	298°	214°	224°	.444"	.467"	84002S
HOT STREET BEAST / Performance Level 3 Delivers impressive mid-range and top-end power. Healthy sound. Economical price. RPM Power Range: 2000 to 5700 / Redline: 6200 Plus.	00903	283	278H	112°	278°	284°	218°	226°	.462"	.470"	84002S
ULTRA BEAST / Performance Level 4 Upper mid-range to top end power. High stall convertor or 4-speed. Economical price. RPM Power Range: 2800 to 6200 / Redline: 6500 Plus.	00917	283	304H	112°	304°	316°	234°	244°	.488"	.509"	84002S
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00100H	ALL	CID	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Keepers	Remarks
84002S	66000-16	68301X1-16	86032-16		For rpm 6000 max.
84106	66000-16	68155-16*	87029-16		High Rev design spring
84006X3	66000X3-16	68155-16*	87029-16		CamSaver Lifter.
84106RM3	66000RM3-16	68155-16*	87029-16		Rev-Max Lifter. 300-400 rpm gain.
84107RM3	66000RM3-16	68155-16*	86753SS-16	86710-10	Rev-Max Lifter. Upgraded retainer, 10g lighter.
84207	66000-16	68100X200-16	87062-16		
84207X3	66000X3-16	68100X200-16	87062-16		CamSaver Lifter.

Spring pressure:

68301X1-16 Seat: 1.750" @ 90 lbs / Nose: 1.300" @ 260 lbs / Coil bind: 1.130" (Stock O.D. no machine work).

68155-16 Seat: 1.750" @ 110 lbs / Nose: 1.300" @ 256 lbs / Coil bind: 1.100"

*(Optional Spring Cup available if heads are cut for larger springs, use cup #68922 & 86107X1 retainer.)

68100X200X1-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 255 lbs / Coil bind: 1.030" (1.440" OD, Machine work required).

* Machine work required

Note: If using 3.750" stroke or above cranks, specify "S" after cam p/n for small base circle consideration. Valve timing events are available online at: www.crower.com

CROWER CAM BREAK-IN PROCEDURE

This applies to all hydraulic and solid lifter camshafts using higher than stock spring pressure:

- Do not use block restrictors in the oil galleries. This severely limits oil flow to the cam, lifters and overhead.
- Break-in cam and lifters with low pressure springs only. Do not exceed 235 lbs open pressure.
- During break-in run engine for 35 to 45 minutes and vary rpm from 2000 to 3000.
- For break-in procedure Crower recommends 10W/30 motor oil. Heavier weight oils do not cold flow.
- Do not use synthetic oils during break-in period.
- For further information, please refer to the Crower Installation booklet that accompanies the camshaft.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface.

Specify X3 after corresponding component kit.

Non Roller 1957-1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Compu-Pro / Level 1 Increased mid-range power, 112 LSA helps with vacuum and mileage. RPM Power Range: Idle to 4800.	00239	307 to 400	254HDP	112°	254°	265°	204°	210°	.431"	.431"	84002S Upgrade 84107RM3
Compu-Pro / Level 1 Good idle with increased mid range response and top end power. RPM Power Range: Idle to 5300.	00240	350 up	267HDP	112°	267°	272°	210°	216°	.445"	.445"	84002S Upgrade 84107RM3
Compu-Pro / Level 3 Hot Street profile. Should have the upgrades listed for #00242. RPM Power Range: 3500 to 3700 / Redline: 4500 Plus.	00243	350 383	284HDP	112°	286°	289°	225°	230°	.454"	.463"	84002S Upgrade 84107RM3
Compu-Pro / Level 3/4 Ultimate Street Profile. Must have the above upgrades for #00242. RPM Power Range: Idle to 6500.	00244	350 400	288HDP	112°	288°	296°	234°	246°	.497"	.504"	84002S Upgrade 84107RM3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00100H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

Note: Late model Chevrolet 305 and 350 V8 engines (1988-up) use a different cam core configuration than 1957-87 Chevrolet V8 engines and cannot be interchanged. Specify engine year when ordering.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Keepers	Remarks
84002S	66000-16	68301X1-16	86032-16		For rpm 6000 max.
84207	66000-16	68100X200-16	87062-16		
84207X3	66000X3-16	68100X200-16	87062-16		CamSaver Lifter.
84106	66000-16	68155-16*	87029-16		High Rev design spring
84006X3	66000X3-16	68155-16*	87029-16		CamSaver Lifter.
84106RM3	66000RM3-16	68155-16*	87029-16		Rev-Max Lifter. 300-400 rpm gain.
84107RM3	66000RM3-16	68155-16*	86753SS-16	86710-10	Rev-Max Lifter. Upgraded retainer, 10g lighter.

Spring pressure:

68301X1-16 Seat: 1.750" @ 90 lbs / Nose: 1.300" @ 260 lbs / Coil bind: 1.130" (Stock O.D. no machine work).

68155-16 Seat: 1.750" @ 110 lbs / Nose: 1.300" @ 256 lbs / Coil bind: 1.100"

*(Optional Spring Cup available if heads are cut for larger springs, use cup #68922 & 86107X1 retainer.)

68100X200X1-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 255 lbs / Coil bind: 1.030" (Machine work required).

* Machine work required

Note: If using 3.750" stroke or above cranks, specify "S" after cam p/n for small base circle consideration. Valve timing events are available online at: www.crower.com

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3° duration and .030" more lift.

HYDRAULIC FLAT TAPPET

CHEVROLET

1957-1998 Non Roller

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
HI-DRAULIC HAULER / Performance Level 3 Rough idle. Hot street or track with strong mid-range power. RPM Power Range: 2200 to 5800+	00210	327 350	278HDP	108°	286°	289°	225°	229°	.454"	.463"	840025 Upgrade 84107RM3
HI-DRAULIC HAULER / Performance Level 4 Rough idle. Explosive mid-range torque. RPM Power Range: 2200 to 6000+	00211	384 400	296HDP	108°	296°	308°	232°	242°	.500"	.518"	840025 Upgrade 84107RM3
HI-DRAULIC HAULER / Performance Level 5 Rough idle and mid-range acceleration. RPM Power Range: 2750 to 6500 max.	00212	327 350	304HDP	108°	300°	308°	240°	248°	.492"	.510"	840025 Upgrade 84107RM3
HI-DRAULIC HAULER / Performance Level 5 Rough idle. Brutal mid to top end torque and horsepower. RPM Power Range: 2750 to 6500+	00213	384 400	308HDP	106°	303°	311°	248°	256°	.507"	.527"	840025 Upgrade 84107RM3
TURBOMASTER 1 This cam provides excellent low end and mid-range power with mild boost (6 to 12 lbs). RPM Power Range: 1800 to 5000 / Redline: 6000 Plus.	00978	350 400	278HT	114°	278°	260°	212°	200°	.432"	.401"	840025 Upgrade 84107RM3
SUPERCHARGER 1 Excellent low and mid-range torque with moderate boost levels (5 to 10 lbs), this cam romps. RPM Power Range: 2400 to 6500 / Redline: 6500 Max.	00980	350 400	288HC	114°	288°	288°	232°	232°	.459"	.459"	840025 Upgrade 84107RM3
SUPERCHARGER 2 A very healthy blower cam for increased boost (10 lbs plus) and higher rpm. RPM Power Range: 2800 to 6500 / Redline: 6500 Max.	00981	350 400	304HC	114°	304°	304°	236°	236°	.506"	.506"	840025 Upgrade 84107RM3
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00100H	All CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM CAM Special order 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	All CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM CAM Special order P55 CORE , call with all engine data including head flow data, valve sizes, operating power range, etc.	00055	All CID	Refer to www.crower.com for camshaft recommendation								

Note: Late model Chevrolet 305 and 350 V8 engines (1988-up) use a different cam core configuration than 1957-87 Chevrolet V8 engines and cannot be interchanged. Specify engine year when ordering.

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Keepers	Remarks
840025	66000-16	68301X1-16	86032-16		For rpm 6000 max.
84207	66000-16	68100X200-16	87062-16		
84207X3	66000X3-16	68100X200-16	87062-16		CamSaver Lifter.
84106	66000-16	68155-16*	87029-16		High Rev design spring
84006X3	66000X3-16	68155-16*	87029-16		CamSaver Lifter.
84106RM3	66000RM3-16	68155-16*	87029-16		Rev-Max Lifter. 300-400 rpm gain.
84107RM3	66000RM3-16	68155-16*	86753SS-16	86710-10	Rev-Max Lifter. Upgraded retainer, 10g lighter.

Spring pressure:

68301X1-16 Seat: 1.750" @ 90 lbs / Nose: 1.300" @ 260 lbs / Coil bind: 1.130" (Stock O.D. no machine work).

68155-16 Seat: 1.750" @ 110 lbs / Nose: 1.300" @ 256 lbs / Coil bind: 1.100"

*(Optional Spring Cup available if heads are cut for larger springs, use cup #68922 & 86107X1 retainer.)

68100X200X1-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 255 lbs / Coil bind: 1.030" (Machine work required).

* Machine work required

Note: If using 3.750" stroke or above cranks, specify "S" after cam p/n for small base circle consideration. Valve timing events are available online at: www.crower.com

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3° duration and .030" more lift.

CHEVROLET

420 SERIES HYDRAULIC FLAT TAPPET

New PRO 55 Cam Core Technology
twice as strong

Non Roller 1957-1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
The 420 series is our latest profile series with an extreme response through the short power band. We use fast opening rates with smoother closing ramps to improve valve and valve seat life. The ball nose design allows for nose wear reduction and prolonged lifter life. The harmonics are improved with this profile. This series uses the Pro55 core. The core is harder and denser with increased carbides. This core is longer lasting and more wear resistant than a standard cast core. Specifically designed for naturally aspirated applications, and low boost forced induction. Pay attention to operating power ranges for this series and remember that higher flowing cylinder heads change how the cam will act.	00223	262-307-327	2400	4400	6000	6500+	262HDP	110°	262°	270°	214°	222°	.450"	.470"	84002S Upgrade 84107RM3
	00223S	305-350	1800	3800	5200	5700+									
	Small Base	383	1600	3600	4900	5400+									
	Circle	406	1500	3500	4700	5200+									
	00224	262-307-327	2700	4700	6100	6500+	270HDP	110°	270°	278°	222°	230°	.470"	.488"	84002S Upgrade 84107RM3
	00224S	305-350	2100	4100	5500	5900+									
	Small Base	383	1800	3800	5000	5500+									
	Circle	406	1700	3700	4800	5400+									
	00225	262-307-327	2400	4400	6000	6500+	278HDP	108°	278°	286°	230°	238°	.488"	.501"	84002S Upgrade 84107RM3
	00225S	305-350	1800	3800	5200	6000+									
	Small Base	383	1600	3600	4900	5400+									
	Circle	406	2000	4200	5500	6000+									
00226	262-307-327	3000	5000	6200	6500+	290HDP	108°	290°	298°	242°	250°	.507"	.522"	84002S Upgrade 84107RM3	
00226S	305-350	2400	4400	5700	6200+										
Small Base	383	2000	4000	5200	5700+										
Circle	406	1900	3900	5000	5600+										
CUSTOM CAM Special order P55 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	All CID	Refer to www.crower.com for camshaft recommendation												
CUSTOM GROUND HYDRAULIC Special order P55 CORE , call with all engine data including head flow data, valve sizes, operating power range, etc.	00055	All CID	Refer to www.crower.com for camshaft recommendation												

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Keepers	Remarks
84002S	66000-16	68301X1-16	86032-16		For rpm 6000 max.
84207	66000-16	68100X200-16	87062-16		
84207X3	66000X3-16	68100X200-16	87062-16		CamSaver Lifter.
84106	66000-16	68155-16*	87029-16		High Rev design spring
84006X3	66000X3-16	68155-16*	87029-16		CamSaver Lifter.
84106RM3	66000RM3-16	68155-16*	87029-16		Rev-Max Lifter. 300-400 rpm gain.
84107RM3	66000RM3-16	68155-16*	86753SS-16	86710-10	Rev-Max Lifter. Upgraded retainer, 10g lighter.

Spring pressure:

68301X1-16 Seat: 1.750" @ 90 lbs / Nose: 1.300" @ 260 lbs / Coil bind: 1.130" (Stock O.D. no machine work).

68155-16 Seat: 1.750" @ 110 lbs / Nose: 1.300" @ 256 lbs / Coil bind: 1.100"

*(Optional Spring Cup available if heads are cut for larger springs, use cup #68922 & 86107X1 retainer.)

68100X200X1-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 255 lbs / Coil bind: 1.030" (Machine work required).

* Machine work required

Note: If using 3.750" stroke or above cranks, specify "S" after cam p/n for small base circle consideration. Valve timing events are available online at: www.crower.com

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3° duration and .030" more lift.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397 ppm of zinc to whatever the oil may or may not already contain. **Part #86092 - 4oz Bottle of ZDDPlus & Paste**

420 SERIES HYDRAULIC FLAT TAPPET

CHEVROLET

FOR EFI, FORCED INDUCTION & NOS

New PRO 55 Cam Core Technology

Non Roller 1957-1998 262 267 283 302 305 307 327 350 400 V8 SB

twice as strong, using the latest profile designs

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
The 420 EFI, Forced Induction, NOS series is our latest profile series with an extreme response through the short power band. We use fast opening rates with smoother closing ramps to improve valve and valve seat life. The ball nose design allows for nose wear reduction and prolonged lifter life. The harmonics are improved with this profile. This series uses the Pro55 core. The core is harder and denser with increased carbides. This core is longer lasting and more wear resistant than a standard cast core. These are specifically designed for forced induction applications.	00231	262-307-327	2500	4500	5900	6400	270HDP	114°	270°	278°	222°	230°	.470"	.488"	84002S Upgrade 84107RM3
	00231S	305-350	1900	3900	5300	5900									
	Small Base	383	1600	3600	4800	5300									
	Circle	406	1500	3500	4600	5200+									
	00232	262-307-327	3000	4800	6000	6500	278HDP	114°	278°	286°	230°	238°	.488"	.501"	84002S Upgrade 84107RM3
	00232S	305-350	2200	4200	5500	6000									
	Small Base	383	1800	3800	5000	5500									
	Circle	406	1700	3700	4800	5300+									
	00233	262-307-327	3100	5100	6200	6500	290HDP	114°	290°	298°	242°	250°	.507"	.522"	84002S Upgrade 84107RM3
	00233S	305-350	2500	4500	5800	6300									
	Small Base	383	2200	4200	5300	5800									
	Circle	406	2100	4100	5100	5500+									
	00234	262-307-327	3400	5400	6500	6500	298HDP	114°	298°	308°	250°	260°	.522"	.549"	84002S Upgrade 84107RM3
	00234S	305-350	2800	4800	6000	6500									
	Small Base	383	2400	4400	5600	6000									
	Circle	406	2300	4300	5300	5800+									
	CUSTOM CAM Special order P55 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	All CID	Refer to www.crower.com for camshaft recommendation											
	CUSTOM CAM Special order P55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00055	All CID	Refer to www.crower.com for camshaft recommendation											

Note: These cams use .000" intake and exhaust valve lash.

Crower recommends using the factory cast iron distributor gear. If running 3.750" or higher stroke, use the part number with "S" for added rod clearance.

Note: Late model Chevrolet 305 and 350 V8 engines (1988-up) use a different cam core configuration than 1957-87 Chevrolet V8 engines and cannot be interchanged. Specify engine year when ordering.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Keepers	Remarks
84002S	66000-16	68301X1-16	86032-16		For rpm 6000 max.
84207	66000-16	68100X200-16	87062-16		
84207X3	66000X3-16	68100X200-16	87062-16		CamSaver Lifter.
84106	66000-16	68155-16*	87029-16		High Rev design spring
84006X3	66000X3-16	68155-16*	87029-16		CamSaver Lifter.
84106RM3	66000RM3-16	68155-16*	87029-16		Rev-Max Lifter. 300-400 rpm gain.
84107RM3	66000RM3-16	68155-16*	86753SS-16	86710-10	Rev-Max Lifter. Upgraded retainer, 10g lighter.

Spring pressure:

68301X1-16 Seat: 1.750" @ 90 lbs / Nose: 1.300" @ 260 lbs / Coil bind: 1.130" (Stock O.D. no machine work).

68155-16 Seat: 1.750" @ 110 lbs / Nose: 1.300" @ 256 lbs / Coil bind: 1.100"

*(Optional Spring Cup available if heads are cut for larger springs, use cup #68922 & 86107X1 retainer.)

68100X200X1-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 255 lbs / Coil bind: 1.030" (Machine work required).

* Machine work required

Note: If using 3.750" stroke or above cranks, specify "S" after cam p/n for small base circle consideration. Valve timing events are available online at: www.crower.com

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3° duration and .030" more lift.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397 ppm of zinc to whatever the oil may or may not already contain.
Part #86092 - 4oz Bottle of ZDDPlus & Paste

Non Roller 1957-1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Pro55 Core with standard rotation There is improved mid range torque and top end power while maintaining some bottom end. Reverse rotation and 2 gear drives available as custom grind.	00216	262-307-327	2500	4000	5600	5800	258HDP	112°	258°	270°	214°	222°	.456"	.470"	84106RM3
	00216S*	305-350	2300	3800	4800	5500									
	Small Base	383	2000	3500	4500	5100									
	Circle	406	1900	3400	4300	5000									
Pro55 Core with standard rotation Emphasis on top end and bottom end is reduced significantly. Reverse rotation and 2 gear drives available as custom grind.	00217	262-307-327	2600	4100	5800	6000	274HDP	113°	274°	282°	226°	237°	.480"	.495"	84106RM3
	00217S*	305-350	2600	4100	5000	5800									
	Small Base	383	2400	3900	4600	5400									
	Circle	406	2300	3800	4400	5300									
CUSTOM CAM Special order Pro 55 4-7 switch firing order. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	All CID	Refer to www.crower.com for camshaft recommendation												
CUSTOM CAM Special order Pro 55, call with all engine data including head flow data, valve sizes, operating power range, etc.	00055	All CID	Refer to www.crower.com for camshaft recommendation												

Note: These cams use .000" intake and exhaust valve lash.

*Crower recommends using the factory cast iron distributor gear. If running 3.750" or higher stroke, use the part number with "S" for added rod clearance.

NOTE: These cam grinds are available for 1955-1956, please specify when ordering.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84002S	66000-16	68301X1-16	86032-16	For rpm 6000 max.
84106RM3	66000RM3-16	68155-16*	87029-16	Rev-Max Lifter. 300-400 rpm gain.

Spring pressure:

68301X1-16 Seat: 1.750" @ 90 lbs / Nose: 1.300" @ 260 lbs / Coil bind: 1.130" (Stock O.D. no machine work).

68155-16 Seat: 1.750" @ 110 lbs / Nose: 1.300" @ 256 lbs / Coil bind: 1.100"

*(Optional Spring Cup available if heads are cut for larger springs, use cup #68922 & 86107X1 retainer.)

* Machine work required

Note: If using 3.750" stroke or above cranks, specify "S" after cam p/n for small base circle consideration. Valve timing events are available online at: www.crower.com

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3°- 4° duration and .030" more lift.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397 ppm of zinc to whatever the oil may or may not already contain.

Part #86092 - 4oz Bottle of ZDDPlus & Paste

STOCK LIFT RULE HYDRAULIC FLAT TAPPET

CHEVROLET

Non Roller 1957-1998

262 267 283 302 305 307 327 350 400 V8 Small Block

New **PRO 55 Cam Core Technology**
twice as strong, using the latest profile designs

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range		Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Performance Level 5 Heavy car, 1/4 mile track, low end Redline: 6000 rpm maximum	00250	283-327	3250	6000	218H224	108°	266°	274°	218°	224°	.390"	.408"	See Below
			3000	5750									
			2750	5500									
Performance Level 5 Lighter car, 3/8 mile track, low end Redline: 6000 rpm maximum	00251	283-327	3500	6000	228H236	106°	294°	294°	228°	236°	.390"	.410"	See Below
			3250	6000									
			3000	5750									
Performance Level 5 3/8 mile, high bank track, mid to top Redline: 6000 rpm maximum	00252	283-327	3750	6000	238H242	106°	300°	300°	238°	242°	.390"	.410"	See Below
			3500	6000									
			3250	6000									
Performance Level 5 Heavy car, 1/4 mile track, low end Redline: 6000 rpm maximum	00253	283-327	3250	6000	218H226	108°	266°	276°	218°	226°	.419"	.420"	See Below
			3000	5750									
			2750	5500									
Performance Level 5 Lighter car, 3/8 mile track, low end Redline: 6000 rpm maximum	00254	283-327	3500	6000	228H234	106°	294°	296°	228°	234°	.419"	.417"	See Below
			3250	6000									
			3000	5750									
Performance Level 5 3/8 mile, high bank track, mid to top Redline: 6000 rpm maximum	00255	283-327	3750	6000	234H242	106°	296°	296°	234°	242°	.417"	.416"	See Below
			3500	6000									
			3250	6000									
CUSTOM CAM Special order Pro 55 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	ALL CID	Refer to www.crower.com for camshaft recommendation										
CUSTOM CAM Special order Pro 55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00055	ALL CID	Refer to www.crower.com for camshaft recommendation										

Note: Some oval track associations DO NOT allow the use of beehive springs.

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84106	66000-16	68155-16	87029-16	Beehive Spring
84106X3	66000X3-16	68155-16	87029-16	CamSaver Lifters, Beehive Spring
84106RM3	66000RM3-16	68155-16	87029-16	Rev-Max Lifters, Beehive Spring
84017RM	66000RM-16	68301X4-16	86753SS-16	Rev-Max Lifters. Light Weight Retainers. Race only
84017RM3	66000RM3-16	68301X4-16	86753SS-16	Rev-Max CamSaver Lifters. Light Weight Retainers. Race only

For severe duty applications, Crowder offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface.

Spring pressure:

68155-16 Seat: 1.750" @ 113 lbs / Nose: 1.200" @ 302 lbs / Coil bind: 1.100"

68301X4-16 Seat: 1.700" @ 136 lbs / Nose: 1.300" @ 325 lbs / Coil bind: 1.040"

(Stock O.D., no machine work).

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crowder for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Crowder offers a variety of cams to meet your racing class rules

Crowder Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397ppm of zinc to whatever the oil may or may not already contain.
Part #86092 - 4oz Bottle of ZDDPlus & Paste

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range		Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Performance Level 5 Heavy car, 1/4 mile track, low end Redline: 6500 rpm plus	00256	283-327	2750	5750	220H226	108°	264°	278°	220°	226°	.451"	.453"	84017RM
			350-372	5500									
			383-400	5250									
Performance Level 5 Lighter car, 3/8 mile track, low end Redline: 6500 rpm plus	00257	283-327	3000	6000	228H236	106°	282°	288°	228°	236°	.449"	.449"	84017RM
			350-372	5750									
			383-400	5500									
Performance Level 5 3/8 mile, high bank track, mid to top Redline: 6500 rpm plus	00258	283-327	3250	6250	236H242	106°	288°	292°	236°	242°	.449"	.446"	84017RM
			350-372	6000									
			383-400	5750									
Performance Level 5 1/2 mile, high bank track, mid to top Redline: 6500 rpm plus	00259	283-327	3500	6500	242H248	106°	292°	296°	242°	248°	.446"	.447"	84017RM
			350-372	6250									
			383-400	6000									
VACUUM RULE - Perf Level 5 Lighter car, 3/8 mile track, low end Redline: 6500 rpm plus	00252V	283-327	3750	6500	238H242	116°	300°	300°	238°	242°	.390"	.410"	84017RM
			350-372	6250									
			383-400	6000									
VACUUM RULE - Perf Level 5 3/8 mile, high bank track, mid to top Redline: 6500 rpm plus	00255V	283-327	3750	6500	234H242	114°	296°	296°	234°	242°	.417"	.416"	84017RM
			350-372	6250									
			383-400	6000									
VACUUM RULE - Perf Level 5 1/2 mile, high bank track, mid to top Redline: 6500 rpm plus	00259V	283-327	3750	6500	242H248	114°	292°	296°	242°	248°	.446"	.447"	84017RM
			350-372	6250									
			383-400	6000									
CUSTOM CAM Special order Pro 55 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	ALL CID	Refer to www.crower.com for camshaft recommendation										
CUSTOM CAM Special order Pro 55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00055	ALL CID	Refer to www.crower.com for camshaft recommendation										

Note: These cams use .000" intake and exhaust valve lash.

NOTE: These cam grinds are available for 1955-1956, please specify when ordering.

Note: Some oval track associations DO NOT allow the use of beehive springs.

Note: Small base circle cams are available if using 3.750" stroke and 350 style rods. Specify "S" after part number. If using 400 style or stroker rods the above base circle will work.

Note: Late model Chevrolet 305 and 350 V8 engines (1988-up) use a different cam core configuration than 1957-87 Chevrolet V8 engines and cannot be interchanged. Specify engine year when ordering.

Crower Recommends ZDDPlus for all Flat Tappet Cams

ZDDPlus™ contains 42,700 ppm of phosphorus and 57,300 ppm of zinc. When a 4-ounce bottle of ZDDPlus™ is added to 5 quarts of oil, it is diluted 41:1, which contributes 1047 ppm of phosphorus and 1397 ppm of zinc to whatever the oil may or may not already contain.
Part #86092 - 4oz Bottle of ZDDPlus & Paste

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84106	66000-16	68155-16	87029-16	Beehive Spring
84106X3	66000X3-16	68155-16	87029-16	CamSaver Lifters, Beehive Spring
84106RM3	66000RM3-16	68155-16	87029-16	Rev-Max Lifters, Beehive Spring
84017RM	66000RM-16	68301X4-16	86753SS-16	Rev-Max Lifters. Light Weight Retainers. Race only
84017RM3	66000RM3-16	68301X4-16	86753SS-16	Rev-Max CamSaver Lifters. Light Weight Retainers. Race only

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface.

Spring pressure:

68155-16 Seat: 1.750" @ 113 lbs / Nose: 1.200" @ 302 lbs / Coil bind: 1.100"

68301X4-16 Seat: 1.700" @ 136 lbs / Nose: 1.300" @ 325 lbs / Coil bind: 1.040"

(Stock O.D., no machine work).

Valve timing events are available online at: www.crower.com

**Your RPM range will vary depending on your
Cylinder Head Air Flow Data & Cubic Inches.**

SHORT TRACK HYDRAULIC FLAT TAPPET

CHEVROLET

Non Roller 1957-1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
The Short track series is similar to our 420 series with the higher lift and faster lift rates. This series allows for higher RPMs due to the reduced lobe acceleration and is much smoother than the 420 series. This series uses the Pro55 core. The core is harder and denser with increased carbides.	00270	262-307-327	2800	4000	5500	6000	226HDP	108°	277°	288°	224°	230°	.471"	.497"	84102 84102X3
		305-350	2600	3800	5300	5800									
		383-406*	2400	3600	5100	5600									
	00271	262-307-327	2950	4150	5650	6150	228HDP	108°	288°	290°	230°	238°	.497"	.497"	84102 84102X3
		305-350	2750	3950	5450	5450									
		383-406*	2550	3750	5250	5750									
NEW 350 SERIES CAMS These new 350 Series Cams rev higher than the 420 Series. This series also uses the harder and denser Pro55 core. Great track / hot street cam	00272	350	3000		6000+	283HDP	106°	283°	288°	234°	240°	.518"	.525"	84102 84102X3	
		383-406*	2500		5500+										
	00273	350	3250		6250+	288HDP	106°	288°	294°	240°	245°	.525"	.531"	84102 84102X3	
		383-406*	3000		6000+										
00274	350	3500		6500+	294HDP	108°	294°	300°	245°	250°	.525"	.540"	84102 84102X3		
	383-406*	3250		6250+											
00275	305	4000		7000+	300HDP	108°	300°	304°	250°	254°	.540"	.546"	84102 84102X3		
	350-406*	3750		6750+											
CUSTOM GROUND HYDRAULIC Call with all engine data including head flow data, valve sizes, operating power range, etc. when ordering.	00100	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>												
CUSTOM CAM Special order Pro 55 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>												
CUSTOM CAM Special order Pro 55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00055	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>												

Note: These cams use .000" intake and exhaust valve lash.

*These cid engines (383, 406) require a smaller base circle for 3.750" or larger stroke cranks. If small base circle is desired use 00055

Note: Some oval track associations DO NOT allow the use of beehive springs.

Note: Small base circle cams are available if using 3.750" stroke and 350 style rods. Specify "S" after part number. If using 400 style or stroker rods the above base circle will work.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84106RM3	66000RM3-16	68155-16	87029-16		Rev-Max Lifters
84102	66000-16	68390X3-16	87048-16	86072-16	For rpm up to 7000 +. Race only.
84102X3	66000X3-16	68390X3-16	87048-16	86072-16	For rpm up to 7000 +. "Cam Saver" Lifters

Spring pressure:

68155-16 Seat: 1.750" @ 113 lbs / Nose: 1.300" @ 256 lbs / Coil bind: 1.100"

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work).

68301X4-16 Seat: 1.750" @ 117 lbs / Nose: 1.200" @ 370 lbs / Coil bind: 1.040" (Optional Race Only, No Machine work required).

* Machine work required

Note: If using 3.750" stroke or above cranks, contact Crower for smaller base circle camshafts for more rod clearance.

BE SMART! Crower performance camshafts feature high lift, fast action features that can cause stock or other aftermarket valve train components to fail. Be sure to use a Crower engineered kit to avoid possible damage.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

LIFT RULE CAMSHAFTS: Crower has a complete line of camshafts that will satisfy any max lift requirement. clearance. Valve timing events are available online at: www.crower.com

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

For The Best Overall Performance Gains Use The Cam Form, And Let Crower Make You A Custom Cam

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3° duration and .030" more lift.

HIGH RPM! Crower highly recommends the use of rollerized rockers. See rocker section for ratios and stud diameters.

These camshafts will work with the following carburetor sizes: 350 (210 cfm), 390 (410 cfm), 500 (350 cfm).

If you can supply cylinder head flow data, engine specs, operating power ranges and exhaust manifold configurations we will be able to grind you a camshaft that is far superior than any other brand currently available.

CHEVROLET

ORIGINAL SERIES HYDRAULIC ROLLER TAPPET

1957-1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Grind Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Gross Lift 1.6 / 1.6		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Biggest profile for maximum performance while maintaining some sort of fuel economy. 10:1 compression ratio will benefit this profile. Needs modification to heads and gears.	00402 Early Model 00402LM LM is step nose	262-302	3000	4200	5700	6200	216HR224 114°	278°	286°	220°	228°	.498"	.519"	.531"	.553"	84544 or 84544LM
		327	2800	4000	5500	6000										
		350	2600	3800	5300	5800										
		383	2500	3700	5200	5700										
		406	2400	3600	5100	5600										
Radical hot street for larger cubic inch and higher compression ratio motors. Great for EFI, forced induction and boost.	00403 Early Model 00403LM LM is step nose	262-302	3300	4500	6000	6500	224HR232 114°	286°	294°	226°	236°	.519"	.540"	.552"	.576"	84544 or 84544LM
		327	3100	4300	5800	6300										
		350	2900	4100	5600	6100										
		383	2800	4000	5500	6000										
		406	2700	3900	5400	5900										
This will get you to the track and back with an occasional cruise to show your ride. Meant for speed and power. Great strip profile. Stall speed can not be low. High Torque. Full mods needed.	00418 Early Model 00418LM LM is step nose	262-302	3300	4500	6000	6500	230HR230 108°	306°	306°	230°	230°	.480"	.480"	.512"	.512"	84544 or 84544LM
		327	3100	4300	5800	6300										
		350	2900	4100	5600	6100										
		383	2800	4000	5500	6000										
		406	2700	3900	5400	5900										
Drag grind. All modifications required with this profile. Manual tranny required or high stall speed. Will not idle low.	00404 Early Model 00404LM LM is step nose	262-302	3300	4500	6000	6500	232HR240 114°	294°	310°	236°	244°	.540"	.565"	.579"	.602"	84544 or 84544LM
		327	3100	4300	5800	6300										
		350	2900	4100	5600	6100										
		383	2800	4000	5500	6000										
		406	2700	3900	5400	5900										
Exceptionally high torque with slightly lower Peak HP. Used for a daily driver that spends many hours on the road. Better fuel economy and the total power is an increase over stock.	00408 Early Model 00408LM LM is step nose	262-302	2200	3400	4700	5200+	198HR210 112°	273°	288°	200°	212°	.435"	.462"	.464"	.493"	84544 or 84544LM
		327	2000	3200	4500	5000+										
		350	1700	3000	4300	4800+										
		383	1600	2900	4200	4700+										
		406	1500	2800	4100	4600+										
Slightly bigger duration and lift provides stronger mid range while maintaining basic low end performance. Broader operating power band.	00400 Early Model 00400LM LM is step nose	262-302	2400	3600	4900	5400+	200HR208 114°	260°	269°	204°	212°	.451"	.474"	.482"	.506"	84544 or 84544LM
		327	2200	3400	4700	5200+										
		350	1900	3200	4500	5000+										
		383	1800	3100	4400	4900+										
		406	1700	3000	4300	4800+										
Excellent hot street with a manual transmission or automatic tranny with a higher stall speed. Cylinder modification needed. Gear ratios are critical.	00409 Early Model 00409LM LM is step nose	262-302	2400	3600	4900	5400+	210HR215 110°	284°	288°	212°	218°	.462"	.470"	.493"	.501"	84544 or 84544LM
		327	2200	3400	4700	5200+										
		350	1900	3200	4500	5000+										
		383	1800	3100	4400	4900+										
		406	1700	3000	4300	4800+										
High Torque street rod with lower compressions. Applications within 3500-5200 can include EFI, forced or boost.	00401 Early Model 00401LM LM is step nose	262-302	2400	3600	4900	5400+	208HR216 114°	269°	278°	214°	220°	.474"	.498"	.507"	.531"	84544 or 84544LM
		327	2200	3400	4700	5200+										
		350	1900	3200	4500	5000+										
		383	1800	3100	4400	4900+										
		406	1700	3000	4300	4800+										
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00100HR	ALL CID	Refer to www.crower.com for camshaft recommendation													

Note: These cams use .000" intake and exhaust valve lash.

"LM" cores fit 305-350 cid 1987-up only (w/step nose). Small base circle cams available for 383 and 406. Specify "S" after part number when ordering. **Note:** The above cams are ground on cast steel cores. If 8620 steel billet core with integral cast iron gear is desired, specify part number 00050. Crower recommends using the factory stock cast iron distributor gear. **Note:** Late model Chevrolet 305 and 350 V8 engines (1988-up) use a different cam core configuration than 1957-87 Chevrolet V8 engines and cannot be interchanged. Specify engine year when ordering.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Plug	Pushrods	Keepers	Remarks
84544	66310-16	68390X3-16	87048-16	86085	69730-16	86107-16	Up to 6500 rpm.
84544LM	66330-16	68390X3-16	87048-16	86099	69715-16	86107-16	Up to 6500 rpm.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Spring pressure:

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work).
68301X4-16 (Optional Race Only, No Machine work required).

* Machine work required Note: If using stock GM hydraulic roller lifters, use Crower pushrod 69720 (7.200").

For The Best Overall Performance Gains Use The Cam Form, And Let Crower Make You A Custom Cam

EFI, FORCED INDUCTION & NOS HYDRAULIC ROLLER TAPPET

CHEVROLET

1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Excellent stock replace - almost stock engine - good idle & fuel economy.	00480	262-302	2200	3600	5300	6100+	196HR204	114°	245°	254°	196°	204°	.465"	.484"	84504 or 84504LM
	Early model	327	2000	3500	5200	5700+									
	00480LM	350	1700	3200	4900	5400+									
	LM is step nose	383	1600	3100	4550	5050+									
		406	1500	3000	4500	5000+									
Perfect truck grind - strong bottom & mid power. Works well with stock components.	00481	262-302	2400	3800	5700	6300+	204HR213	114°	255°	264°	204°	213°	.484"	.505"	84504 or 84504LM
	Early model	327	2200	3700	5600	6100+									
	00481LM	350	1900	3400	5200	5700+									
	LM is step nose	383	1700	3200	4800	5300+									
		406	1600	3100	4700	5200+									
Streetable power - more mid range power for the everyday driver.	00482	262-302	2600	4000	5900	6400+	213HR221	114°	264°	273°	213°	221°	.505"	.525"	84504 or 84504LM
	Early model	327	2400	3900	5750	6250+									
	00482LM	350	2200	3700	5550	6050+									
	LM is step nose	383	2000	3500	5200	5700+									
		406	1900	3400	5100	5600+									
2000 stall or manual transmission recommended, needs head modifications, trackable daily driver.	00483	262-302	2800	4000	5900	6400+	221HR230	114°	273	284°	221°	230°	.525"	.545"	84544 or 84544LM
	Early model	327	2500	3900	5750	6250+									
	00483LM	350	2400	3700	5550	6050+									
	LM is step nose	383	2100	3500	5200	5700+									
		406	2000	3400	5100	5600+									
Streetable drag profile - 2500 stall or manual transmission, chip mod. Hot street profile, head mods and gearing	00484	262-302	3000	4300	6200	6500+	228HR236	114°	284°	286°	230°	236°	.545"	.555"	84544 or 84544LM
	Early model	327	2700	4200	5900	6400+									
	00484LM	350	2600	4100	5850	6300+									
	LM is step nose	383	2300	3800	5700	6200+									
		406	2200	3700	5600	6100+									
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00100HR	ALL CID	Refer to www.crower.com for camshaft recommendation												
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	ALL CID	Refer to www.crower.com for camshaft recommendation												
CUSTOM GROUND HYDRAULIC Custom order steel billet roller with a cast iron gear. Call our technical support staff for personalized camshaft assistance.	00050	ALL CID	Refer to www.crower.com for camshaft recommendation												

Note: These cams use .000" intake and exhaust valve lash.

"LM" cores fit 305-350 cid 1987-up only (w/step nose). Small base circle cams available for 383 and 406. Specify "S" after part number when ordering.

Note: The above cams are ground on cast steel cores. If 8620 steel billet core with integral cast iron gear is desired, specify part number 00050.

Crower recommends using the factory stock cast iron distributor gear.

Note: Late model Chevrolet 305 and 350 V8 engines (1988-up) use a different cam core configuration than 1957-87 Chevrolet V8 engines and cannot be interchanged. Specify engine year when ordering.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Plug	Pushrods	Keepers	Remarks
84544	66310-16	68390X3-16	87048-16	86085	69730-16	86107-16	Up to 6500 rpm.
84544LM	66330-16	68390X3-16	87048-16	86099	69715-16	86107-16	Up to 6500 rpm.
84504	66310-16	68301X4-16	87032-16	86085	69730-16	86107-16	Up to 6000 rpm.
84504LM	66330-16	68301X4-16	87032-16	86099	69730-16	86107-16	Up to 6000 rpm.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Optional Hydraulic Lifters with HIPPO: 66310H, 66330H

For The Best Overall Performance Gains Use The Cam Form, And Let Crower Make You A Custom Cam

Chevrolet

350 SERIES HYDRAULIC ROLLER TAPPET

Latest Profile Design Technology

1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range		Lobe Center	Advertised Duration		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Low RPM	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Performance Level 2 Mild street performance, slight lobe at idle. Headers & intake rec.	00465	283-327	2400	5750	110°	264°	273°	213°	221°	134°	142°	.337"	.350"	.505"	.525"	84544 84544LM
	00465LM	350-372	2200	5550												
		383-400	2000	5200												
Performance Level 2 Strong mid-range, good throttle response, 2000 stall recommended.	00466	283-327	2400	5750	110°	270°	277°	217°	225°	139°	147°	.343"	.357"	.514"	.535"	84544 84544LM
	00466LM	350-372	2300	5700												
		383-400	2000	5300												
New Grind Performance Level 2+ Nice power gains over conventional roller lifter. Short seat time improves low end, faster lift rate increases upper mid to top end power. Rough idle	00473	283-327			108°	273°	284°	221°	230°	142°	151°	.350"	.363"	.525"	.544"	84544 84544LM
	00473LM	350-372	2200	6000+												
		383-400														
Performance Level 3 Noticeable idle, good mid-range, requires headers.	00468	283-327	2700	5900	110°	277°	286°	225°	232°	149°	157°	.357"	.367"	.535"	.550"	84544 84544LM
	00468LM	350-372	2600	5850												
		383-400	2300	5700												
Performance Level 3 Slight lobe at idle, needs headers, 2500 stall recommended	00469	283-327	2900	6000	110°	284°	286°	230°	236°	151°	159°	.363"	.370"	.544"	.555"	84544 84544LM
	00469LM	350-372	2800	5950												
		383-400	2400	5900												
Performance Level 4 Street/strip applications, rough idle, 2500 stall required.	00471	283-327	2900	6000	110°	286°	292°	237°	240°	159°	163°	.370"	.373"	.555"	.559"	84544 84544LM
	00471LM	350-372	2800	5950												
		383-400	2400	5900												
Performance Level 4+	00472	283-327			108°	290°	296°	238°	246°	147°	155°	.382"	.386"	.573"	.579"	84544 84544LM
	00472LM	350-372														
		383-400														
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00100HR	ALL CID	Refer to www.crower.com for camshaft recommendation													
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	ALL CID	Refer to www.crower.com for camshaft recommendation													
CUSTOM GROUND HYDRAULIC Custom order steel billet roller with a cast iron gear. Call our technical support staff for personalized camshaft assistance.	00050	ALL CID	Refer to www.crower.com for camshaft recommendation													

Note: These cams use .000" intake and exhaust valve lash.

"LM" indicates Late Model 305-350 cid w/step nose core (1987-up). Small base circle cams available for 383 and 406. Specify "S" after part number when ordering.

Note: The above cams are ground on cast steel cores. If 8620 steel billet core with integral cast iron gear is desired, specify part number 00050. Crower recommends using the factory stock cast iron distributor gear.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Plug	Pushrods	Keepers	Remarks
84544	66310-16	68390X3-16	87048-16	86085	69730-16	86107-16	Up to 6500 rpm.
84544LM	66330-16	68390X3-16	87048-16	86099	69715-16	86107-16	Up to 6500 rpm.

Optional Hydraulic Lifters with HIPPO: 66310H, 66330H

NOTE: These cam grinds are available for 1955-1956, please specify when ordering.

Note: Rocker arms available in Aluminum & Stainless steel.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Spring pressure:

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work).

* Machine work required Note: If using stock GM hydraulic roller lifters, use Crower pushrod 69720 (7.200").

For The Best Overall Performance Gains Use The Cam Form, And Let Crower Make You A Custom Cam

HYDRAULIC ROLLER TAPPET

Chevrolet

GM 350 LT1 - LT4 1993-1997

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STOCK REPLACEMENT Increased performance in stock LT1 engines. RPM Power Range: Idle to 5000 / Redline: 5500 Max.	00560	350 CID	254HR262	114°	254°	262°	204°	212°	.485"	.505"	84552
Performance Level 1 Works well in stock or slightly modified engines. RPM Power Range: 1000 to 5500 / Redline: 6000 Max.	00561	350 CID	262HR266	114°	262°	266°	208°	216°	.495"	.515"	84576 or 84554
Performance Level 2 Modified computer, exhaust and high flow intake recommended. RPM Power Range: 1500 to 5800 / Redline: 6300 Max.	00562	350 CID	274HR284	114°	274°	284°	221°	230°	.525"	.545"	84576 or 84554
Performance Level 3 Mid to top end power in highly modified engines. RPM Power Range: 2000 to 6000 / Redline: 6500 Max.	00563	350 CID	277HR286	114°	277°	286°	225°	232°	.535"	.550"	84576 or 84554
Performance Level 4+	00564	350 CID	284HR296	110°	284°	296°	236°	242°	.571"	.582"	84576 or 84554
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND HYDRAULIC Custom order steel billet roller with a cast iron gear. Call our technical support staff for personalized camshaft assistance.	00050	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND HYDRAULIC ROLLER Special order hydraulic roller lifter camshaft ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00052	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Pushrods	Keepers	Remarks
84552	66330-16	68301X1-16	86032-16	69715-16	86107-16	For rpm up to 6000 max. Daily street use.
84554	66330-16	68311X1-16	86032-16	69715-16	Stock	Race only applications.
84576	66330-16	68155-16	87029T-16	Stock*	Stock*	Conical spring, titanium retainer for LT1 (11/32)

Spring pressure:

68301X1-16 Seat: 1.700" @ 105 lbs / Nose: 1.250" @ 274 lbs / Coil bind: 1.130" (Stock O.D., no machine work).

68311X1-16 Seat: 1.750" @ 120 lbs / Nose: 1.250" @ 389 lbs / Coil bind: 1.070" (Stock O.D., no machine work).

68155-16 Seat: 1.750" @ 115 lbs / Nose: 1.250" @ 295 lbs / Coil bind: 1.150" (Stock O.D., conical design).

Optional spring:

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work). LT1 only.

Recommendations:

*Optimum Performance Pushrods, specify part # **69715-16** when ordering.

*Optimum Performance Keepers, specify part # **86107-16** when ordering.

ACCESSORIES

Part No.	Description
Pg's.150-165	Rocker arms (1.5) 3/8 self aligning tip - LT1
Pg's.150-165	Rocker arms (1.6) 3/8 self aligning tip - LT1
Pg's.150-165	Rocker arms (1.5) 3/8 use w/guide plates - LT1
Pg's.150-165	Rocker arms (1.6) 3/8 use w/guide plates - LT1
See pg. 136	Cloyes Timing Gear Set

*Use with guide plate #70517-8.

Note: Rocker arms available in Aluminum & Stainless steel.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

For The Best Overall Performance Gains Use The Cam Form, And Let Crower Make You A Custom Cam

CHEVROLET

HYDRAULIC ROLLER TAPPET

GM LS3/LSA/LS9
AVAILABLE

All New Profiles

GM LS1/LS2/LS6/LS7/LSX 4.8L, 5.3L, 5.7L, 6.0L V8
1997 - Present

Description (Note: See pages 8-9 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Performance Level 1 Responsive mid-range power. Modified computer, exhaust and high flow intake recommended. Louis F. says - "WOW!! great cam for daily driver, I wouldn't go bigger. It has great power and good fuel mileage."	00572	350	272HR280	114°	272°	280°	217°	226°	.553"	.575"	
Performance Level 2 Mid to top end power in highly modified engines.	00573	350	285HR289	114°	285°	289°	226°	232°	.566"	.566"	
Performance Level 3 Excellent mid & top end performance. Requires ECU tuning.	00574	350	275HR280	118°	275°	280°	226°	231°	.607"	.617"	
Performance Level 4 Increased flow or aftermarket head required. ECU tune required. Good valve to piston clearance.	00575	350	273HR286	120°	273°	286°	233°	237°	.624"	.629"	
Performance Level 5 Great choice for bigger displacement engines. Head work or aftermarket head required. ECU tune required.	00576	350	286HR290	120°	286°	290°	238°	241°	.629"	.634"	
CUSTOM GROUND HYDRAULIC ROLLER Special order hydraulic roller lifter camshaft ground to your specifications and lobe center. Call our technical support staff for personalized camshaft assistance.	0053HR				Refer to www.crower.com for camshaft recommendation						

Note: These cams use .000" intake and exhaust valve lash.

These camshafts can be tuned for both Naturally Aspirated or Forced Induction applications.

BEAST HAULER HYDRAULIC ROLLER TAPPET

Description (Note: See pages 8-9 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Hydraulic Hauler Roller Perfect grind for 346 cu. in. that wants hot rod idle Great sound. Requires ECU retune.	00544			112°	284°	282°	212°	220°	.535"	.562"	
Hydraulic Hauler Roller Designed for big cubic inch engine Very popular grind. Requires ECU retune.	00545			112°	292°	296°	220°	226°	.562"	.557"	
Hydraulic Hauler Roller Great sound rough idle	00546			112°	270°	274°	220°	226°	.583"	.595"	
CUSTOM GROUND HYDRAULIC ROLLER	0053HR				Refer to www.crower.com for camshaft recommendation						

Note: These cams use .000" intake and exhaust valve lash.

Single Bolt Cams Available as a custom grind

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

These camshafts can be tuned for both Naturally Aspirated or Forced Induction applications.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seat Cups	Remarks
84580					For limited street use, titanium retainer optional
84581					For limited street use, titanium retainer optional
84582					For limited street use, titanium retainer optional

MECHANICAL ROLLER TAPPET

CHEVROLET

All New Profiles

GM LS1/LS2/LS6/LS7/LSX 4.8L, 5.3L, 5.7L, 6.0L V8
1997 - Present

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
				Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Performance Level 2 Hot-street performance applications. RPM Power Range: 3500 to 7500	00532		114°	279°	285°	251°	254°	.644"	.644"	84402
Performance Level 3 High revving, super mid to top end power. RPM Power Range: 4000 to 8000	00533		114°	282°	294°	260°	263°	.643"	.641"	84402
Performance Level 4 Super competition profile. RPM Power Range: 4500 to 8500	00534		114°	301°	303°	269°	272°	.646"	.646"	84402
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications and lobe center. Call our technical support staff for personalized camshaft assistance.	0053R	Refer to www.crower.com for camshaft recommendation								

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Keepers	Seals	Spring Disc
84402	68432-16	87007-16	86114-16	86080-16	68947-16

Note: These cams use .018" intake, .020" exhaust valve lash.

**GM LS3/LSA/LS9
AVAILABLE**

Spring pressure:
68432-16 Seat: 1.800" @ 250 lbs / Nose: 1.050" @ 860 lbs / Coil bind: 0.985".
Valve timing events are available online at: www.crower.com

Stainless Steel Shaft Rockers

Part No.	Description
74101F	LS1, LS2, LS6
74105F	LS3, L92
74107F	LS7 machine work is required

Shaft Rockers available for most aftermarket heads.

Lifters

Part No.	Description
66278-16	Solid Roller Lifters
66278H-16	Solid Roller Lifters with HIPPO oiling
66278E-16	Solid Roller Lifters with Enduramax needleless roller bearing

CHEVROLET MECHANICAL FLAT TAPPET

Non Roller 1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / Performance Level 3 High torque with more mid-range. Crisp rpm. Really nice camshaft. RPM Power Range: 2400 to 6400 / Redline: 6800 Plus.	00321	350 400	274SF	114°	274°	282°	242°	248°	.482"	.504"	84299
PRO-STREET / Performance Level 4 High revving, super mid to top end power in small c.i.d. engines. Radical grind. RPM Power Range: 2800 to 6600 / Redline: 7000 Plus.	00322	302 327	282SF	112°	282°	292°	248°	254°	.504"	.528"	84299
PRO-STREET / Performance Level 4 High revving, super mid to top end power. RPM Power Range: 3000 to 6900 / Redline: 7200 Plus.	00323	350 400	294SF	114°	294°	300°	256°	262°	.528"	.545"	84299
CUSTOM CAM Special order Pro 55 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM CAM Special order Pro 55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00056	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Oil Seals	Remarks
84292	66900-16	68311X1-16	86032-16	86072-16	Stock O.D. spring.
84292X980	66900X980-16	68311X1-16	86032-16	86072-16	CoolFace Lifter. Stock O.D. spring.
84299	66900-16	68390X3-16	87048-16	86072-16	
84299X980	66900X980-16	68390X3-16	87048-16	86072-16	CoolFace Lifter.
84296LW980	66900LW980-16	68155-16	86753SS-16		LightWeight Lifter.

Spring pressure:

68155-16 Seat: 1.750" @ 115 lbs / Nose: 1.250" @ 295 lbs / Coil bind: 1.150". (Stock O.D., conical design)

*(Optional Spring Cup available if heads are cut for larger springs, use cup #68922 & 86107X1 retainer.)

68311X1-16 Seat: 1.750" @ 120 lbs / Nose: 1.250" @ 389 lbs / Coil Bind: 1.070" (Stock O.D., no machine work).

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work required).

68398-16 Seat: 1.825" @ 151 lbs / Nose: 1.325" @ 351 lbs / Coil bind: 1.080" (Machine work required).

* Machine work required

NOTE: These cam grinds are available for 1955-1956, please specify when ordering.

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3° duration and .030" more lift.

Note: Rocker arms available Aluminum & Stainless steel.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

MECHANICAL FLAT TAPPET

CHEVROLET

Non Roller 1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

New PRO 55 Cam Core Technology
twice as strong

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / Performance Level 4 Radical street, rough idle, good bottom-,mid-range power. Best with head modifications, headers, and gearing. High torque, heavy cam. RPM Power Range: 2000 to 6000 / Redline: 7000 Plus.	00350	350 400	268FDP	107°	268°	274°	238°	244°	.497"	.503"	84299
COMPU-PRO / Performance Level 5 High torque, short oval track cam, strong off corner. Emphasis in mid-range. Hot street. RPM Power Range: 2500 to 6500 / Redline: 7500 Plus.	00355	350 400	276FDP	105°	276°	282°	244°	250°	.503"	.518"	84299 84292X980
COMPU-PRO / Performance Level 5 Most popular Oval Track, NASCAR and Sportsman grind. Great high torque and mid-range power. RPM Power Range: 3000 to 7000 / Redline: 7500 Plus.	00351	350 400	288FDP	105°	288°	292°	254°	262°	.525"	.546"	84299 84292X980
COMPU-PRO / Performance Level 5 Good for fast track - high bank 3/8 mile or 1/2 mile oval. High torque at high revs. RPM Power Range: 3500 to 7500 / Redline: 7500 Plus.	00356	350 400	294FDP	105°	294°	302°	260°	266°	.540"	.557"	84299 84292X980 84293X980
COMPU-PRO / Performance Level 5 Superb extended power range. Top end drag and oval track grind. RPM Power Range: 4000 to 7500 / Redline: 7500 Plus.	00357	350 400	302FDP	107°	302°	310°	268°	278°	.557"	.587"	84292X980 84293X980
CUSTOM CAM Special order Pro 55 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM CAM Special order Pro 55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00056	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Oil Seals	Remarks
84299	66900-16	68390X3-16	87048-16	86072-16	
84299X980	66900X980-16	68390X3-16	87048-16	86072-16	CoolFace Lifter.
84296LW980	66900LW980-16	68155-16	86753SS-16		LightWeight Lifter.

Spring pressure:

68155-16 Seat: 1.750" @ 115 lbs / Nose: 1.250" @ 295 lbs / Coil bind: 1.150". (Stock O.D., conical design)

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work).

* Machine work required

NOTE: These cam grinds are available for 1955-1956, please specify when ordering.

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

REMEMBER! Increasing rocker ratio on intake (1.6) will make the cam approximately 3° duration and .030" more lift.

Note: Rocker arms available in Aluminum & Stainless steel.

1955-1956 - These grinds are available, please specify when ordering.

New PRO 55 Cam Core Technology
twice as strong

1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.6 / 1.5		Gross Lift 1.7 / 1.6		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Improved torque in mid-range while maintaining healthy bottom end response.	00305	262-307-327	3400	4900	6700	7200	108°	270°	278°	240°	248°	148°	156°	.333"	.346"	.533"	.519"	.566"	.554"	See Below
		305-350	3000	4500	6200	6700														
		383-406	2700	4200	5700	6200														
Real good limited card oval track, broad operating power.	00306	262-307-327	3500	5000	6800	7300	108°	274°	278°	244°	248°	152°	156°	.340"	.346"	.544"	.519"	.578"	.554"	See Below
		305-350	3100	4600	6300	6800														
		383-406	2800	4300	5800	6300														
Rolls torque higher with closer lobe center. Heavier car, more power off corner.	00307	262-307-327	3700	5200	7000	7500	106°	278°	286°	248°	256°	156°	165°	.346"	.360"	.554"	.540"	.588"	.576"	See Below
		305-350	3400	4900	6500	7000														
		383-406	3000	4500	6000	6500														
Heavy car, explosive off the corner, needs proper car setup. For well hooked up chassis. Radical Street.	00308	262-307-327	3800	5300	7100	7600	105°	282°	290°	252°	260°	161°	167°	.353"	.366"	.565"	.549"	.600"	.586"	See Below
		305-350	3500	5000	6600	7100														
		383-406	3100	4600	6100	6600														
CUSTOM CAM Special order 4-7 switch firing order . Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	All CID	Refer to www.crower.com for camshaft recommendation																	
CUSTOM CAM Special order Pro 55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00056	All CID	Refer to www.crower.com for camshaft recommendation																	

Note: These cams use .022" intake, .024" exhaust valve lash.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

These cams work well with 1.5 rockers. But going up 1 rocker ratio is like adding 3-4 degrees and .030" lift

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84292X980	66900X980-16	68311X1-16	86032-16	86072-16	Stock O.D. spring, coolface lifter option
84299	66900-16	68390X3-16	87048-16	86072-16	Race only
84299X980	66900X980-16	68390X3-16	87048-16	86072-16	CoolFace lifter option, race only
84297LW	66900LW-16	68466-16	86757S-16	86072-16	LightWeight lifter option
84297LW980	66900LW980-16	68466-16	86757S-16	86072-16	LightWeight CoolFace lifter option

Spring pressure:

68311X1-16 Seat: 1.750" @ 120 lbs / Nose: 1.250" @ 389 lbs / Coil bind: 1.070" (Stock O.D., no machine work).

68466-16 Seat: 1.800" @ 155 lbs / Nose: 1.200" @ 390 lbs / Coil bind: 1.000"

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work required).

Super 7° titanium retainers available for kit #84293-980. Specify #86754 retainer when ordering.

Super 7° keepers required for #86767-16 retainers (kit #84265 and #84265X980).

Valve timing events are available online at: www.crower.com

NOTE: These cam grinds are available for 1955-1956, please specify when ordering

290 SERIES HIGH ROCKER RATIO MECHANICAL FLAT TAPPET

Chevrolet

1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.6 / 1.5		Gross Lift 1.7 / 1.6		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Dynamite, heavy car, big mid range, fast track or slow 1/2 mile. Streetable, higher stall needed.	00309	262-307-327	3900	5400	7200	7800	105°	286°	294°	256°	264°	165°	173°	.360"	.373"	.576"	.559"	.612"	.597"	See Below
		305-350	3600	5100	6700	7200														
		383-406	3200	4700	6200	6700														
Streetable high stall needed, Radical street less bottom end.	00312	262-307-327	4200	5700	7400	7900	106°	290°	294°	260°	264°	161°	173°	.366"	.373"	.584"	.559"	.622"	.597"	See Below
		305-350	3700	5200	6800	7300														
		383-406	3300	4800	6300	6800														
Max street, super fast 3/8 & fast 1/2 mile, increased stroke high stall only	00313	262-307-327	4200	5700	7450	7950	106°	294°	298°	264°	268°	173°	177°	.373"	.380"	.597"	.570"	.634"	.608"	See Below
		305-350	3900	5400	6950	7450														
		383-406	3450	4950	6400	6900														
Competitive racing profile, wants high rocker ratio. All the tricks, high stalls, gears etc.	00316	262-307-327	4400	6000	7600	8100	108°	298°	302°	268°	272°	177°	181°	.380"	.386"	.608"	.579"	.646"	.618"	See Below
		305-350	4000	5500	7050	7550														
		383-406	3600	5100	6500	7000														
CUSTOM CAM Special order 4-7 switch firing order. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	Refer to www.crower.com for camshaft recommendation																		
CUSTOM CAM Special order Pro 55, call with all engine data including head flow data, valve sizes, operating power range, etc.	00056	Refer to www.crower.com for camshaft recommendation																		

Note: These cams use .022" intake, .024" exhaust valve lash.

4-7 Switch grind available on all cams listed on this page

These latest solid lifter profiles are multipurpose and are working extremely well in NASCAR late model, drag racing and street/strip applications. Available in any lobe center. Cam cores are ground from Pro 55 cores.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84292X980	66900X980-16	68311X1-16	86032-16	86072-16	Stock O.D. spring, coolface lifter option
84299	66900-16	68390X3-16	87048-16	86072-16	Race only
84299X980	66900X980-16	68390X3-16	87048-16	86072-16	CoolFace lifter option, race only
84297LW	66900LW-16	68466-16	86757S-16	86072-16	LightWeight lifter option
84297LW980	66900LW980-16	68466-16	86757S-16	86072-16	LightWeight CoolFace lifter option

Spring pressure:

68311X1-16 Seat: 1.750" @ 120 lbs / Nose: 1.250" @ 389 lbs / Coil bind: 1.070" (Stock O.D., no machine work).

68446-16 Seat: 1.800" @ 155 lbs / Nose: 1.200" @ 390 lbs / Coil bind: 1.000"

68390X3-16 Seat: 1.800" @ 116 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110" (Machine work required).

Super 7° titanium retainers available for kit #84293-980. Specify #86754 retainer when ordering.

Super 7° keepers required for #86767-16 retainers (kit #84265 and #84265X980).

Valve timing events are available online at: www.crower.com

NOTE: These cam grinds are available for 1955-1956, please specify when ordering

All previous part numbers no longer listed are still available as custom grinds.

Please contact Crower for more custom grinds.

**Your RPM range will vary depending on your
Cylinder Head Air Flow Data & Cubic Inches.**

Chevrolet

220 SERIES HIGH RPM MECHANICAL FLAT TAPPET

New PRO 55 Cam Core Technology
twice as strong

1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.7 / 1.6		Gross Lift 1.8 / 1.7		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Dynamite-oval track-bottom end & mid range for increased power for restarts & out of corners. Hot bracket & entry drag race.	00332	262-307-327	3600	5100	7800	8300	107°	285°	296°	251°	261°	156°	165°	.345"	.356"	.587"	.570"	.621"	.605"	84266 X980
		305-350	3400	4900	7400	7900														
		383-406	3100	4600	6900	7400														
Nice mix for competitive oval track & drag race. Broad operating power band. Powerglide or non shift upgrades recommended	00333	262-307-327	3700	5200	7900	8400	107°	290°	300°	255°	265°	159°	170°	.349"	.362"	.593"	.579"	.628"	.615"	84266 X980
		305-350	3600	5100	6600	8100														
		383-406	3200	4700	7000	7500														
Super fast track higher operating powerload.	00334	262-307-327	3800	5300	8000	8400	108°	293°	303°	259°	269°	165°	173°	.356"	.365"	.605"	.584"	.640"	.620"	84266 X980
		305-350	3700	5200	7700	8200														
		383-406	3300	4800	7100	7600														
Strong response through entire power band. Drag race.	00335	262-307-327	3900	5400	8100	8400	108°	298°	307°	263°	273°	167°	178°	.359"	.370"	.610"	.592"	.646"	.629"	84266 X980
		305-350	3850	5350	7750	8250														
		383-406	3400	4900	7150	7650														
CUSTOM CAM - Special order 4-7 switch firing order. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047		Refer to www.crower.com for camshaft recommendation																	
CUSTOM CAM - Special order Pro 55, call with all engine data including head flow data, valve sizes, operating power range, etc.	00056		Refer to www.crower.com for camshaft recommendation																	

Note: These cams use .018" intake, .020" exhaust valve lash.

The above cores are Pro 55. * requires a smaller base circle for 3.750" or larger stroke cranks. Add an "S" at the end of desired cam part number (example: 002755) if smaller base circle is desired.

Note: These cams require #66900X980-16 No Chamfer lifters or, if running .874" lifter bores, use #66915-16.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Locks	Cup	Remarks
84266X980	66973X980SP -16	68385X2-16	86767 -16			Super polished CoolFace lifter option.
84267X980	66973X980SP -16	68441-16	86757 -16	86710 -16	68923 -16	CoolFace lifter. Super 7 locks.

Spring pressure:

68385X2-16 Seat: 1.900" @ 166 lbs / Nose: 1.300" @ 422 lbs / Coil bind: 1.100" (Machine work required).

68441-16 Seat: 1.800" @ 145 lbs / Nose: 1.200" @ 366 lbs / Coil bind: 1.000"

Super 7° keepers required for #86767-16 retainers.

*.842" diameter No Chamfer Lifters

1.8 Rockers are not recommended for street use.

Valve spring pressures are critical for high mileage applications

NOTE: These cam grinds are available for 1955-1956, please specify when ordering.

AVAILABLE SPECIALTY CORES

Description	Size
Stock Block with Roller Bearings (Pro 55 cast material)	1.875"
Stock Rocket Block or Stock Big Block Chevrolet (Pro 55 cast material)	1.948"
Stock Rocket Block with Roller Bearings (50mm) (Pro 55 cast material)	1.968"
55mm (Hard Face 8620 steel billet)	2.165"
Hard Face (8620 steel billet only) All bearing configuration available	Specify

To order the above cores specify #00003. For hard face cores specify #00033.

Valve timing events are available online at: www.crower.com

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Please fill out the camshaft recommendation form on www.crower.com for a custom cam recommendation.

CROWER CAM BREAK-IN PROCEDURE

This applies to all hydraulic and solid lifter camshafts using higher than stock spring pressure:

- Do not use block restrictors in the oil galleries. This severely limits oil flow to the cam, lifters and overhead.
- Break-in cam and lifters with low pressure springs only. Do not exceed 225 to 250 lbs open pressure.
- During break-in run engine for 35 to 45 minutes and vary rpm from 2000 to 3000.
- For break-in procedure Crower recommends 10W/30 motor oil. Heavier weight oils do not cold flow.
- Do not use synthetic oils during break-in period.
- For further information, please refer to the Crower Installation booklet that accompanies the camshaft.

315 SERIES MECHANICAL ROLLER TAPPET

Chevrolet

Mechanical Roller 1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
TORQUE BEAST ROLLER / Affordable Performance Torque and mid-range power for drag and oval track racing. Cast steel core. RPM Power Range: 2500 to 6500 / Redline: 7000 Max.	00422	350 400	268R	112°	268°	277°	240°	248°	.546"	.564"	
POWER BEAST ROLLER / Affordable Performance Mid-range torque with emphasis on top end horsepower. Cast steel core. RPM Power Range: 2750 to 6750 / Redline: 7000 Plus.	00423	350 400	277R	110°	277°	285°	244°	253°	.564"	.582"	
ULTRA BEAST ROLLER / Affordable Performance Intended for performance applications with emphasis on top end. Cast steel core. RPM Power Range: 3000 to 7000 / Redline: 7250 Max.	00424	350 400	285R	108°	285°	293°	253°	261°	.582"	.603"	
STREET ROLLER 350 Intended for performance oriented hot-street applications. 8620 steel billet. RPM Power Range: 2500 to 6500 / Redline: 7000 Max.	00425	350 400	280R	112°	280°	288°	246°	248°	.554"	.567"	
STREET ROLLER 383+ Intended for performance oriented hot-street applications. 8620 steel billet. RPM Power Range: 3000 to 7000 / Redline: 7500 Max.	00426	350 400	288R	112°	288°	290°	250°	252°	.570"	.584"	
HOT STREET ROLLER 350+ Intended for performance oriented hot-street applications. 8620 steel billet. RPM Power Range: 3250 to 7250 / Redline: 7750 Max.	00427	350 400	290R	112°	290°	296°	260°	266°	.585"	.597"	
ULTRA-ACTION / PERFORMANCE LEVEL 5 Mid-range torque and top end oval track profile. RPM Power Range: 3500 to 7500 / Redline: 8000 Plus.	00431	350 400	290R	105°	290°	296°	258°	262°	.626"	.626"	
ULTRA-ACTION / PERFORMANCE LEVEL 5 Fast 3/8 and 1/2 mile oval track grind. RPM Power Range: 4000 to 8000 / Redline: 8000 Plus.	00432	350 400	294R	105°	294°	302°	260°	268°	.626"	.624"	

Lobe centers can be changed for a small fee.
Stroker engines require smaller base circle.

Note: These cams use .026" intake, .028" exhaust valve lash.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84422	66290-16	68385X2-16	87055-16	86072-16	Stock length valves (.650" max lift), 10° retainers
84423	66290-16	68705-16	86767-16*	86072-16	.100"+ long valve (.750" max lift), Super 7° retainers
84433	66290-16	68804-16	86781-16*	86072-16	.100"+ long valve. Limited street. Super 7° retainers

Street rollers have a smoother lift rate and require less spring pressure, increasing timing chain & roller life.

Big displacement, high RPM builds are not covered in this series. Please fill out the cam spec sheet for a custom grind.

Spring pressure:

68385X2-16 Seat: 1.850" @ 187 lbs / Nose: 1.250" @ 445 lbs / Coil bind: 1.100" (1.525" O.D.)

68705-16 Seat: 1.950" @ 160 lbs / Nose: 1.250" @ 511 lbs / Coil bind: 1.125" (1.530" O.D.)

68804-16 Seat: 1.950" @ 235 lbs / Nose: 1.250" @ 582 lbs / Coil bind: 1.100" (1.550" O.D.)

*86781-16 and 86767-16 retainers require Super 7° keepers. Titanium valves required to achieve high rpm.

Due to the wide variety of valve train combinations (i.e. lifter bore diameters, offsets, valve lengths, installed heights, etc...), we highly recommend that you contact Crower for your specific valve train needs.

HIPPO Note: For severe duty roller lifter applications, we highly recommend using our roller lifters with Hippo "High Pressure Pin Oiling". Specify "H" in the part number. Ex. 66290X874H-16

Note: When ordering a .930" - .950" base circle cams for 3.750" or larger stroker cranks, add an "S" at the end of the part number. Example: 00432S. For strokes of 3.900" or larger contact Crower for .850" base circle camshafts.

HIGH RPM! With today's high engine rpm and increased rocker ratios, valve train life is extremely critical. Increased spring pressures are mandatory for insuring reliable valve train life. Contact Crower's technical assistance department for proper high rpm recommendations.

INTEGRAL CAST IRON GEAR OPTION: Premium 8620 steel billet, copper plated cam cores with integral cast iron cam gear are available from Crower on a special order basis (specify part number 00050). Valve timing events are available online at: www.crower.com

Mechanical Roller 1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA-ACTION / Performance Level 5 Mid-range and top end drag race profile for 350 cid with automatic transmission. RPM Power Range: Varies on valve train, heads, manifold, etc... .975" Base Circle	00439	350	316R	108°	316°	319°	282°	286°	.672"	.687"	
ULTRA-ACTION / Performance Level 5 This cam is drag race only or modifieds with 4 or 5 speed transmission. RPM Power Range: Varies on valve train, heads, manifold, etc... .975" Base Circle	00440	350 400	319R	108°	319°	326°	286°	288°	.686"	.636"	
CUSTOM GROUND Custom order roller using a 4-7 swap firing order on a steel billet core. Call our technical support staff for personalized assistance.	00003	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND Custom order steel billet roller with a cast iron gear. Call our technical support staff for personalized camshaft assistance.	00050	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration. Call our technical support staff for personalized camshaft assistance.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND ROLLER Custom ground roller, using a cast steel core, ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00100R	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .026" intake, .028" exhaust valve lash.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84422	66290-16	68385X2-16	87055-16	86072-16	Stock length valves (.650" max lift), 10° retainers
84423	66290-16	68705-16	86767-16*	86072-16	.100"+ long valve (.750" max lift), Super 7° retainers
84433	66290-16	68804-16	86781-16*	86072-16	.100"+ long valve. Limited street. Super 7° retainers

Street rollers have a smoother lift rate and require less spring pressure, increasing timing chain & roller life.

Big displacement, high RPM builds are not covered in this series. Please fill out the cam spec sheet for a custom grind.

Spring pressure:

68385X2-16 Seat: 1.850" @ 187 lbs / Nose: 1.250" @ 445 lbs / Coil bind: 1.100" (1.525" O.D.)

68705-16 Seat: 1.950" @ 160 lbs / Nose: 1.250" @ 511 lbs / Coil bind: 1.125" (1.530" O.D.)

68804-16 Seat: 1.950" @ 235 lbs / Nose: 1.250" @ 582 lbs / Coil bind: 1.100" (1.550" O.D.)

*86781-16 and 86767-16 retainers require Super 7° keepers. Titanium valves required to achieve high rpm.

Due to the wide variety of valve train combinations (i.e. lifter bore diameters, offsets, valve lengths, installed heights, etc...), we highly recommend that you contact Crower for your specific valve train needs.

HIPPO Note: For severe duty roller lifter applications, we highly recommend using our roller lifters with Hippo "High Pressure Pin Oiling". Specify "H" in the part number. Ex. 66290X874H-16

Note: When ordering a .930" - .950" base circle cams for 3.750" or larger stroker cranks, add an "S" at the end of the part number. Example: 00432S. For strokes of 3.900" or larger contact Crower for .850" base circle camshafts.

HIGH RPM! With today's high engine rpm and increased rocker ratios, valve train life is extremely critical. Increased spring pressures are mandatory for insuring reliable valve train life. Contact Crower's technical assistance department for proper high rpm recommendations.

INTEGRAL CAST IRON GEAR OPTION: Premium 8620 steel billet, copper plated cam cores with integral cast iron cam gear are available from Crower on a special order basis (specify part number 00050). Valve timing events are available online at: www.crower.com

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Let Crower Help You Pick Your Cam. If you are not an experienced engine builder or are unsure of the correct cam profile for your application. Fill out the cam spec sheet, and let Crower tech's recommend a cam for peak engine performance.

390 SERIES LOW ROCKER RATIO ROLLER TAPPET (MAX AREA PROFILE)

Chevrolet

Mechanical Non Roller 1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ 200"		Lobe Lift		Gross Lift 1.5 / 1.5		Gross Lift 1.6 / 1.5		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
High torque - needs modifications	00502	262-307-327	3400	4900	7600	8100	108°	284°	295°	255°	262°	179°	173°	.421"	.400"	.631"	.601"	.674"	.622"	
		305-350	3300	4800	7300	7800														
		383-406	3000	4500	6800	7300														
1/4 - 3/8 mile oval track, 390 carb	00503	262-307-327	3700	5200	7800	8300	108°	289°	299°	260°	264°	183°	178°	.429"	.408"	.643"	.612"	.686"	.632"	
		305-350	3500	5000	7600	8100														
		383-406	3100	4600	7000	7500														
Fast 3/8 - 1/2 mile track big area profile - excellent for 383 + ci.	00504	262-307-327	3800	5300	7900	8400	106°	294°	302°	265°	269°	187°	181°	.438"	.417"	.657"	.626"	.701"	.646"	
		305-350	3600	5100	7700	8200														
		383-406	3200	4700	7100	7600														
High torque - needs modifications	00505	262-307-327	3900	5400	8000	8500	105°	299°	306°	268°	273°	191°	185°	.446"	.424"	.669"	.636"	.714"	.657"	
		305-350	3800	5300	7800	8300														
		383-406	3400	4900	7200	7700														
Modified 400 ci blocks, super mid-range. Top end performance, all the whistles needed.	00506	262-307-327	4000	5500	8100	8600	105°	302°	312°	271°	278°	194°	190°	.454"	.434"	.681"	.652"	.726"	.672"	
		305-350	3900	5400	7900	8400														
		383-406	3400	4900	7300	7800														
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>																	
CUSTOM GROUND Custom order steel billet roller with a cast iron gear. Call our technical support staff for personalized camshaft assistance.	00050	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>																	
CUSTOM GROUND Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration. Call our technical support staff for personalized camshaft assistance.	00060	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>																	
CUSTOM GROUND ROLLER Custom ground roller, using a cast steel core, ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00100R	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>																	

Note: These cams use .016" intake, .018" exhaust valve lash.

The above cores are 8620 steel billet.

Small base circle cams available for 383 and 406. Specify "S" after part number when ordering.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Locks	Cups	Remarks
84433	66290-16	68852-16	87078-16		86107-16	68935-16	.100"+ long valve. Up to .700" lift
84435	66290-16	68805-16	86780-16*	86072-16			.100"+ long valve. High rpm.
84439	66290-16	68806-16	86780-16*	86072-16			.100"+ long valve. High pressure.

AVAILABLE CAM JOURNAL SIZES

Description	Size
Stock Small Block Chevrolet	1.868"
Stock Block with Roller Bearings	1.875"
Stock Rocket Block or Stock Big Block Chevrolet	1.948"
Stock Rocket Block with Roller Bearings (50mm)	1.968"
55mm	2.165"

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.7 / 1.6		Gross Lift 1.8 / 1.7		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Mid range monster, Heavy car, tight corner oval track.	00510*	307-327	3600	5100	7500	8000	106°	277°	292°	248°	258°	164°	163°	.377"	.368"	.641"	.589"	.678"	.625"	
			3400	4900	7300	7800														
			3000	4500	6900	7400														
Upper mid range & top end power, tight corner oval track.	00511*	307-327	3800	5300	7600	8100	106°	283°	297°	254°	264°	173°	175°	.393"	.406"	.668"	.650"	.707"	.690"	
			3700	5200	7700	8200														
			3200	4700	7100	7600														
Versatile profile - good for high torque drag racing/bracker lower top end.	00512*	307-327	3900	5400	7900	8400	107°	289°	301°	260°	268°	180°	179°	.408"	.415"	.694"	.664"	.734"	.705"	
			3800	5300	7800	8300														
			3400	4900	7300	7800														
Mid top end performance upgrades demanded.	00513*	307-327	4000	5500	8000	8500	107°	293°	307°	264°	274°	184°	185°	.418"	.430"	.711"	.688"	.752"	.731"	
			3900	5400	7900	8400														
			3600	5100	7400	7900														
All top end drag race, short rpm change oval track, upgrades a must.	00514*	307-327	4100	5600	8450	8550	108°	297°	311°	268°	278°	187°	190°	.430"	.437"	.731"	.699"	.774"	.742"	
			4000	5500	7950	8450														
			3700	5200	7500	8000														
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	All CID	Refer to www.crower.com for camshaft recommendation																	
CUSTOM GROUND Custom order steel billet roller with a cast iron gear. Call our technical support staff for personalized camshaft assistance.	00050	All CID	Refer to www.crower.com for camshaft recommendation																	
CUSTOM GROUND Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration. Call our technical support staff for personalized camshaft assistance.	00060	All CID	Refer to www.crower.com for camshaft recommendation																	
CUSTOM GROUND ROLLER Custom ground roller, using a cast steel core, ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00100R	All CID	Refer to www.crower.com for camshaft recommendation																	

*Indicates the above cams come in Standard 18° head and block. Special bearing sizes are available as custom grinds.

Note: These cams use .012" intake, .018" exhaust valve lash.

The above cores are 8620 steel billet. Small base circle cams available for 383 and 406. Specify "S" after part number when ordering.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Locks	Cups	Remarks
84433	66290-16	68852-16	87078-16		86107-16	68935-16	.100"+ long valve. Up to .700" lift
84435	66290-16	68805-16	86780-16*	86072-16			.100"+ long valve. High rpm.
84439	66290-16	68806-16	86780-16*	86072-16			.100"+ long valve. High pressure.

AVAILABLE CAM JOURNAL SIZES

Description	Size
Stock Small Block Chevrolet	1.868"
Stock Block with Roller Bearings	1.875"
Stock Rocket Block or Stock Big Block Chevrolet	1.948"
Stock Rocket Block with Roller Bearings (50mm)	1.968"
55mm	2.165"

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

230 SERIES ROLLER TAPPET HIGH RATIO SERIES

Chevrolet

Mechanical Roller 1957 - 1998

262 267 283 302 305 307 327 350 400 V8 Small Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range			Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.8 / 1.7		Gross Lift 1.9 / 1.8		Suitable Component Kit
			Low RPM	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Pro Series track racing, heavy car, high rocker ratio.	00520*	307-327	3800	5300	8000	108°	285°	294°	252°	260°	162°	167°	.380"	.374"	.684"	.635"	.722"	.673"	
		305-350	3500	5000	7800														
		383-406	3200	4700	7600														
Pro Series track racing high rocker ratio.	00521*	307-327	4000	5500	8200	108°	289°	299°	256°	256°	166°	172°	.388"	.383"	.698"	.651"	.737"	.689"	
		305-350	3600	5100	8000														
		383-406	3200	4700	7800														
Pro Series track racing high rocker ratio.	00522*	307-327	4100	5600	8300	108°	293°	304°	260°	270°	170°	177°	.397"	.393"	.714"	.668"	.754"	.707"	
		305-350	3800	5300	8100														
		383-406	3400	4900	7900														
Pro Series track racing high rocker ratio.	00524*	307-327	4300	5800	8500	108°	297°	310°	264°	276°	175°	183°	.406"	.406"	.731"	.690"	.771"	.730"	
		305-350	4000	5500	8300														
		383-406	3500	5000	8100														
Pro Series track racing high rocker ratio.	00526*	307-327	4500	6000	8800	108°	305°	313°	272°	279°	183°	188°	.424"	.412"	.763"	.721"	-	-	
		305-350	4200	5700	8600														
		383-406	3800	5300	8400														
Pro Series track racing high rocker ratio.	00528*	307-327	4500	6000	8800	108°	315°	323°	282°	291°	194°	199°	.445"	.428"	.801"	.727"	-	-	
		305-350	4200	5700	8600														
		383-406	3800	5300	8400														
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003		Refer to www.crower.com for camshaft recommendation																
CUSTOM GROUND Custom order steel billet roller with a cast iron gear. Call our technical support staff for personalized camshaft assistance.	00050		Refer to www.crower.com for camshaft recommendation																
CUSTOM GROUND Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration. Call our technical support staff for personalized camshaft assistance.	00060		Refer to www.crower.com for camshaft recommendation																
CUSTOM GROUND ROLLER Custom ground roller, using a cast steel core, ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00100R		Refer to www.crower.com for camshaft recommendation																

Note: These cams use .018" intake, .020" exhaust valve lash.

* indicates the above cams come in Standard 18° head and block. The above cores are 8620 steel billet. Small base circle cams available for 383 and 406. Specify "S" after part number when ordering.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Locks	Cups	Remarks
84433	66290-16	68852-16	87078-16		86107-16	68935-16	.100"+ long valve. Up to .700" lift
84435	66290-16	68805-16	86780-16*	86072-16			.100"+ long valve. High rpm.
84439	66290-16	68806-16	86780-16*	86072-16			.100"+ long valve. High pressure.

AVAILABLE CAM JOURNAL SIZES

Description	Size
Stock Small Block Chevrolet	1.868"
Stock Block with Roller Bearings	1.875"
Stock Rocket Block or Stock Big Block Chevrolet	1.948"
Stock Rocket Block with Roller Bearings (50mm)	1.968"
55mm	2.165"

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
TORQUE BEAST / Performance Level 2 Strong bottom end power. Excellent for trucks and heavy cars. Economical price. RPM Power Range: 1200 to 3800 / Redline: 5200 Plus.	01903	396 454	282H	112°	282°	292°	204°	214°	.478"	.503"	840015
BAJA BEAST / Performance Level 3 Low to mid-range torque for daily drivability. Economical price. RPM Power Range: 1500 to 4500 / Redline: 5500 Plus.	01915	396 454	268H	112°	268°	274°	210°	216°	.478"	.481"	840015
POWER BEAST / Performance Level 3 Delivers impressive mid-range and top-end power. Healthy sound. Economical price. RPM Power Range: 2000 to 4800 / Redline: 6200 Plus.	01904	396 454	292H	112°	292°	302°	214°	224°	.503"	.529"	840015 or 84103
HOT STREET BEAST / Performance Level 4 Upper mid-range to top end power. High stall convertor or 4-speed. Economical price. RPM Power Range: 2500 to 5800 / Redline: 6500 Plus.	01101	396 454	278H	112°	278°	284°	220°	228°	.515"	.530"	84103
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00047B	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00057	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND Custom ground hydraulic flat tappet using the standard core. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00101H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
840015	66000-16	68302X2-16	87063-16		For rpm up to 6000 max. Daily street use
84103	66000-16	68340-16	87063-16	86071-16	For rpm over 6500 max.
84103RM3	66000RM3-16	68340-16	87063-16	86071-16	Rev-Max Lifter. For rpm over 6500 max.

**Beehive Springs Available,
ask Crower for details**

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

Spring pressure:

68302X2-16 Seat: 1.850" @ 107 lbs / Nose: 1.350" @ 280 lbs / Coil bind: 1.250"
(Machine work required).

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080"
(Machine work required).

Valve timing events are available online at: www.crower.com

**Your RPM range will vary depending on your
Cylinder Head Air Flow Data & Cubic Inches.**

HYDRAULIC FLAT TAPPET



Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

X-TREME MILEAGE CAMS AVAILABLE!

CONTACT CROWER TECHNICIANS FOR MORE INFO.

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
POWER COMPU-PRO / Performance Level 2 These cams provide excellent low end and mid-range power and extended rpm range for spirited street and off-road driving. A perfect combination of mileage and power. Modifications should include small diameter tube headers, low restriction dual exhaust, aftermarket manifold, increased cfm carburetor and reworked or performance ignition. Increase in compression ratio to 9.5:1 is recommended for maximum output. Works well with automatic transmission or 4-speed. RPM Power Range: 1300-1500 to 4000-4200 / Redline: 5500 plus.	01240	402 427	270HDP	112°	270°	272°	210°	216°	.493"	.508"	84003 840015
	01241	454 CID	276HDP	112°	276°	278°	214°	218°	.518"	.520"	84003 840015
HIGH PERFORMANCE COMPU-PRO / Performance Level 3 Intended for the performance oriented hot street application. These cams offer an extended rpm range with emphasis on upper bottom to top end power (strong mid-range). Performance gears, headers, dual exhaust, larger than stock cfm carburetor, performance manifold and increased compression (9.5:1 to 10.5:1) are required. Works well with automatic transmission if matched with proper ring and pinion gears and/or high stall converter. RPM Power Range: 1600-1800 to 4500-4800 / Redline: 6000 plus.	01241	396 CID	276HDP	112°	276°	278°	214°	218°	.518"	.520"	84003 840015
	01242	402 427	280HDP	112°	280°	286°	218°	226°	.522"	.527"	840015
	01243	454 CID	284HDP	112°	284°	290°	224°	232°	.542"	.517"	840015 84103
ULTRA-PERFORMANCE COMPU-PRO / Performance Level 4 The following grinds are best suited for dual purpose hot street/drag strip situations. These cams exhibit strong mid-range and top end torque and horsepower. Headers, dual exhaust, larger cfm carburetor, performance ignition and 11:1 compression are a must. Cylinder head modifications would be beneficial. Use with standard transmission or automatic with high stall converter. Low gearing a must. RPM Power Range: 2000-2200 to 6000-6200 / Redline: 6500 plus.	01243	396 CID	284HDP	112°	284°	290°	224°	232°	.542"	.517"	84103
	01244	402 427	290HDP	112°	290°	298°	232°	244°	.562"	.571"	84103
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00047B	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00057	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND Custom ground hydraulic flat tappet using the standard core. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00101H	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
840015	66000-16	68302X2-16	87063-16		For rpm up to 6000 max. Daily street use
84103	66000-16	68340-16	87063-16	86071-16	For rpm over 6500 max.
84103RM3	66000RM3-16	68340-16	87063-16	86071-16	Rev-Max Lifter. For rpm over 6500 max.

Beehive Springs Available, ask Crower for details

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

Spring pressure:

68302X2-16 Seat: 1.850" @ 107 lbs / Nose: 1.350" @ 280 lbs / Coil bind: 1.300" (Machine work required).

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080" (Machine work required).

Valve timing events are available online at: www.crower.com

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
HI-DRAULIC HAULER / Performance Level 4 Lope at idle. Hot street/drag cam with strong mid-range power. RPM Power Range: 2000-2400 to 6000-6200 / Redline: 6500 Plus.	01205	396 427	280HDP	108°	280°	288°	220°	232°	.529"	.527"	84103
HI-DRAULIC HAULER / Performance Level 4 Lope at idle. Hot street/drag cam with strong mid-range power. RPM Power Range: 2000-2400 to 6000-6200 / Redline: 6500 Plus.	01206	454 CID	290HDP	108°	290°	302°	232°	242°	.525"	.537"	84103
HI-DRAULIC HAULER / Performance Level 4 Explosive mid-range torque. RPM Power Range: 3000-3400 to 6500 / Redline: 6700 Plus.	01207	397 CID	296HDP	108°	296°	306°	238°	244°	.532"	.530"	84103
HI-DRAULIC HAULER / Performance Level 4 Explosive mid-range torque. RPM Power Range: 3000-3400 to 6600 / Redline: 6800 Plus.	01208	454 CID	306HDP	108°	306°	314°	246°	252°	.535"	.535"	84103
TURBOMASTER 1 This cam provides excellent low end and mid-range power with mild boost (6-12 lbs). RPM Power Range: 1800 to 5000/ Redline: 6000 Plus.	01978	396 427	278HT	114°	278°	260°	214°	200°	.493"	.456"	840015
TURBOMASTER 2 For more boost (12 lbs plus) and higher rpm, this cam will extend your mid-range and top end power. RPM Power Range: 2200 to 6000/ Redline: 6250 Plus.	01979	454 CID	290HT	114°	290°	280°	226°	212°	.510"	.490"	840015
SUPERCHARGER 1 Excellent low and mid-range torque with moderate boost levels (5 to 10 lbs), this cam romps. RPM Power Range: 2400 to 6000/ Redline: 6000 Plus.	01980	396 427	288HC	114°	288°	288°	228°	228°	.496"	.496"	840015 or 84103
SUPERCHARGER 2 A very healthy blower cam for increased boost (10 lbs plus) and higher rpm's. RPM Power Range: 2800 to 6500/ Redline: 6500 Plus.	01981	454 CID	304HC	114°	304°	304°	246°	246°	.536"	.536"	840015 or 84103
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00047B	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00057	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND Custom ground hydraulic flat tappet using the standard core. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00101	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
840015	66000-16	68302X2-16	87063-16		For rpm up to 6000 max. Daily street use
84103	66000-16	68340-16	87063-16	86071-16	For rpm over 6500 max.
84103RM3	66000RM3-16	68340-16	87063-16	86071-16	Rev-Max Lifter. For rpm over 6500 max.

Beehive Springs Available, ask Crower for details

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

Spring pressure:

68302X2-16 Seat: 1.850" @ 107 lbs / Nose: 1.350" @ 280 lbs / Coil bind: 1.250"
(Machine work required).

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080"
(Machine work required).

Valve timing events are available online at: www.crower.com

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

IMPORTANT! Stock big block

Chevrolet single springs are designed for cams with approximately .400" lift. When stock valve springs are used with performance cams over .400" lift, coil bind and retainer to valve guide interference will occur.

Note: Rocker arms available in Aluminum & Stainless steel.

390 SERIES HYDRAULIC FLAT TAPPET

Chevrolet

Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

X-TREME MILEAGE CAMS AVAILABLE!
CONTACT CROWER TECHNICIANS FOR MORE INFO.

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range			Lobe Center	Advertised Duration @ .006"		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.7 / 1.7		Suitable Component Kit	
			Low RPM	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust		
Performance Level 2 Good performance street camshaft with bottom end power.	01292	396	2200	5400	5900	112°	272°	286°	214°	225°	119°	133°	.285"	.303"	.485"	.515"		
			427	2100	5300													5800
			454	1900	5000													5500
			502	1850	4650													5150
Performance Level 2 Works well in big cubic inch engines. Mild performance and towing.	01293	396	2300	5500	6000	112°	278°	294°	221°	233°	129°	142°	.297"	.315"	.505"	.536"		
			427	2200	5400													5900
			454	2000	5100													5600
			502	1900	4700													5200
Performance Level 3 Fair idle, excellent mid-range horsepower. Moderate performance.	01296	396	2600	5800	6300	110°	294°	304°	233°	240°	142°	150°	.315"	.327"	.535"	.557"		
			427	2600	5700													6200
			454	2400	5500													6000
			502	2400	5100													5600
Performance Level 4 Rough idle, brutal mid-range torque and horsepower. Modifications required.	01297	396	2700	5900	6400	108°	304°	311°	240°	248°	150°	158°	.327"	.340"	.557"	.578"		
			427	2650	5850													6350
			454	2500	5600													6100
			502	2500	5200													5700
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00047B	ALL CID	Refer to www.crower.com for camshaft recommendation															
CUSTOM GROUND Special order camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00057	ALL CID	Refer to www.crower.com for camshaft recommendation															
CUSTOM GROUND Custom ground hydraulic flat tappet using the standard core. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00101H	ALL CID	Refer to www.crower.com for camshaft recommendation															

Note: These cams use .000" intake and exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84001S	66000-16	68302X2-16	87063-16		For rpm up to 6000 max. Daily street use
84103	66000-16	68340-16	87063-16	86071-16	For rpm over 6500 max.
84103RM3	66000RM3-16	68340-16	87063-16	86071-16	Rev-Max Lifter. For rpm over 6500 max.

Beehive Springs Available, ask Crower for details

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

Spring pressure:

68302X2-16 Seat: 1.850" @ 107 lbs / Nose: 1.350" @ 280 lbs / Coil bind: 1.250"
(Machine work required).

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080"
(Machine work required).

Valve timing events are available online at: www.crower.com

Your RPM range will vary depending on your Cylinder Head Air Flow Data & Cubic Inches.

Chevrolet HYDRAULIC ROLLER TAPPET

Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Grind	Lobe Center	Advertised Duration		Duration @ .050"		Duration @ .200"		Gross Lift 1.7 / 1.7		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Good bottom and mid torque, daily driver, nitrous, blower.	01401	396	2250	3450	5000	5500	213HR222	112°	276°	282°	213°	222°	120°	128°	.512"	.540"	84551 or 84551LM
	Early model	402	2250	3450	5000	5500											
	01401LM	427	2150	3345	4900	5400											
	LM is step nose	454	1950	3145	4700	5200											
		502	1850	3045	4600	5100											
Broad power band, excellent hot street. Needs converter.	01402	396	2500	3700	5300	5800	222HR229	110°	278°	286°	222°	229°	128°	137°	.540"	.563"	84551 or 84551LM
	Early model	402	2500	3700	5300	5800											
	01402LM	427	2400	3600	5200	5700											
	LM is step nose	454	2300	3400	5000	5500											
		502	2200	3300	4900	5400											
Bracket special, mid to top range power. Excellent in 454 & 502.	01403	396	2750	3950	5550	6050	229HR237	110°	287°	296°	229°	237°	137°	145°	.563"	.586"	84551 or 84551LM
	Early model	402	2750	3950	5550	6050											
	01403LM	427	2650	3850	5450	5950											
	LM is step nose	454	2450	3650	5250	5750											
		502	2330	3520	5100	5650											
Performance Level 3 Fair idle, excellent mid-range horsepower. Moderate performance.	01404	396	3050	4200	5750	6300	236HR245	110°	292°	303°	236°	245°	145°	154°	.586"	.612"	84551 or 84551LM
	Early model	402	3050	4200	5750	6300											
	01404LM	427	3000	4100	5700	6200											
	LM is step nose	454	2750	3900	5500	5950											
		502	2700	3700	5400	5800											
Performance Level 4 Rough idle, brutal mid-range torque and horsepower. Modifications required.	01405	396	3300	4450	6050	6500	245HR253	110°	303°	311°	245°	253°	154°	162°	.612"	.636"	84551 or 84551LM
	Early model	402	3300	4450	6050	6500											
	01405LM	427	3200	4350	5900	6450											
	LM is step nose	454	3000	4150	5650	6200											
		502	2900	4000	5525	6100											
Performance Level 4 Rough idle, explosive mid-range to top end horsepower. Modifications required.	01406	396	3570	4700	6100	6500	253HR260	110°	309°	318°	253°	260°	162°	171°	.636"	.659"	84551 or 84551LM
	Early model	402	3570	4700	6100	6000											
	01406LM	427	3450	4570	6000	6500											
	LM is step nose	454	3240	4390	5780	6300											
		502	3120	4270	5675	6170											
CUSTOM GROUND Special order hydraulic roller lifter cam ground to your specs on cast steel cam core using stock cast iron distributor gear.	00003	ALL CID	Refer to www.crower.com for camshaft recommendation														
CUSTOM GROUND Custom order steel billet roller camshaft. Call our technical support staff for personalized camshaft assistance.	00051	ALL CID	Refer to www.crower.com for camshaft recommendation														
CUSTOM GROUND Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration ground to your specifications.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation														
CUSTOM GROUND Custom ground hydraulic roller using a cast steel core. Call our technical support staff for personalized camshaft assistance.	00101HR	ALL CID	Refer to www.crower.com for camshaft recommendation														

Note: The above cams are ground on cast steel cores. Crower recommends using the factory stock cast iron distributor gear. If 8620 steel billet core with integral cast iron gear is desired, specify part number 00050.

Note: The RPM power ranges listed above are approximations, your RPM ranges may vary depending on engine setup (cylinder head flow, etc.). "LM" cores fit 454-502 cid 1994-up only (w/step nose).

Gen VI camshafts are different and require 8620 steel billet core with cast iron gear (#00050).

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Plug	Pushrods	Remarks
84551	66321-16	68340-16	87063M-16	86086	71755-8 & 71855-8	For 9.800" deck.
84551H	66321H-16	68340-16	87063M-16	86086	71755-8 & 71855-8	HIPPO Lifter
84551LM	66331-16	68340-16	87063M-16		71760-8 & 71860-8	For Late Model block.

**Beehive Springs Available,
ask Crower for details**

All previous part numbers no longer listed are still available as custom grinds.

Please contact Crower for more custom grinds.

ORIGINAL SERIES MECHANICAL FLAT TAPPET

Chevrolet

Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / Performance Level 3 High torque mid-range and top end grind. RPM Power Range: 2000 to 6500 / Redline: 7000 plus.	01321	454 CID	294F	114°	294°	300°	244°	246°	.517"	.532"	84302
PRO-STREET / Performance Level 4 High revving, super mid to top end power. RPM Power Range: 3000 to 7000 / Redline: 7500 plus.	01322	396 427	300F	114°	300°	310°	246°	254°	.530"	.558"	84302
PRO-STREET / Performance Level 4 High revving, super mid to top end power. RPM Power Range: 3000 to 7500 / Redline: 7750 plus.	01323	454 CID	310F	114°	310°	318°	252°	258°	.554"	.571"	84302
CUSTOM CAM Special order 4-7 switch firing order. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047B	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00057	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND SOLID Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration ground to your specifications.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND SOLID Custom hydraulic flat tappet using the standard core, ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00101M	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84302	66900-16	68340-16	87063M-16	86071-16	7000 plus rpm. Street applications.
84302LW980	66900LW980-16	68340-16	87063M-16	86071-16	Light Weight Lifter

Beehive Springs Available, ask Crower for details

Spring pressure:

68340-16 Seat: 1.900" @ 119 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080"

(Machine work required).

Note: If engine is equipped with exhaust valve rotators see rotation eliminator cups.

Note: For proper oiling on 1965 and 1966 engines, rear cam bearing must be grooved.

Specify when ordering cam.

Note: If exceeding 7500 rpm, high pressure springs and titanium retainers may be required.

Note: Steel billet hardface cams are available from Crower on a special order basis. Contact Crower for information.

IMPORTANT! Stock big block Chevrolet single springs are designed for cams with approximately .400" lift. When stock valve springs are used with performance cams over .400" lift, coil bind and retainer to valve guide interference may occur. If using 11/32 valve stem dia., must specify for different retainers/keepers.

To order the above cores specify #00060. 55mm is available on special order basis only (#00060). Go from 50mm to 55mm without any block machining by using babbitt bearing #85522. This bearing is coated.

Special Firing Orders:

1-8-7-3-6-5-4-2 (4/7 Switch - A). Specify #00060 when ordering.

1-8-7-2-6-5-4-3 (LS1/Tri Y Header - C). Specify #00060 when ordering.

AVAILABLE CAM JOURNAL SIZES

Description	Size
Stock Small Block Chevrolet	1.868"
Stock Block with Roller Bearings	1.875"
Stock Rocket Block or Stock Big Block Chevrolet	1.948"
Stock Rocket Block with Roller Bearings (50mm)	1.968"
55mm	2.165"

Chevrolet

ORIGINAL SERIES MECHANICAL FLAT TAPPET

New PRO 55 Cam Core Technology
twice as strong

Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / Performance Level 4-5 High torque, short oval track cam. RPM Power Range: 2500 to 6500 / Redline: 7000 plus.	01351	396 427	288FDP	107°	288°	292°	252°	262°	.601"	.620"	84302 or 84301X980
COMPU-PRO / Performance Level 4-5 Great high torque, good mid-range oval track grind. RPM Power Range: 3000 to 7000 / Redline: 8000 plus.	01355	454 502	292FDP	107°	292°	300°	254°	260°	.595"	.622"	84301X980
COMPU-PRO / Performance Level 4-5 Short oval grind with super torque. RPM Power Range: 3500 to 7500 / Redline: 8500 plus.	01352	396 427	298FDP	107°	298°	302°	258°	264°	.619"	.627"	84301X980
COMPU-PRO / Performance Level 4-5 Superior upper bottom, mid-range and top end power. RPM Power Range: 3750 to 7750 / Redline: 8500 plus.	01356	454 502	304FDP	107°	304°	310°	262°	266°	.626"	.634"	84301X980
CUSTOM CAM Special order 4-7 switch firing order. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047B	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00057	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND SOLID Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration ground to your specifications.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND SOLID Custom hydraulic flat tappet using the standard core ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00101	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84301X980	66900X980-16	68385X2-16	87053-16	86071-16	Race only.
84301LW980	66900LW980-16	68385X2-16	87053-16	86071-16	Light Weight lifter. Race only.

**Beehive Springs Available,
ask Crower for details**

Spring pressure:

68385X2-16 Seat: 1.950" @ 144 lbs / Nose: 1.300" @ 422 lbs / Coil bind: 1.100"
(Machine work required).

Note: If engine is equipped with exhaust valve rotators see rotation eliminator cups.

Note: For proper oiling on 1965 and 1966 engines, rear cam bearing must be grooved.

Specify when ordering cam.

Note: If exceeding 7500 rpm, high pressure springs and titanium retainers may be required.

Note: Steel billet hardface cams are available from Crower on a special order basis. Contact Crower for information.

IMPORTANT! Stock big block Chevrolet single springs are designed for cams with approximately .400" lift. When stock valve springs are used with performance cams over .400" lift, coil bind and retainer to valve guide interference may occur. If using 1 1/32 valve stem dia., must specify for different retainers/keepers.

To order the above cores specify #00060. 55mm is available on special order basis only (#00060). Go from 50mm to 55mm without any block machining by using babbitt bearing #85522. This bearing is coated.

Special Firing Orders:

1-8-7-3-6-5-4-2 (4/7 Switch - A). Specify #00060 when ordering.

1-8-7-2-6-5-4-3 (LS1/Tri Y Header - C). Specify #00060 when ordering.

AVAILABLE CAM JOURNAL SIZES

Description	Size
Stock Rocket Block or Stock Big Block Chevrolet	1.948"
Stock Rocket Block with Roller Bearings (50mm)	1.968"
55mm	2.165"

220 SERIES (HIGH RPM) MECHANICAL FLAT TAPPET

Chevrolet

Non Roller 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

New PRO 55 Cam Core Technology
twice as strong

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ .200"		Lobe Lift		Gross Lift 1.7 / 1.7		Gross Lift 1.8 / 1.7	
				Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust
Performance Level 3 Rough idle, torque, smooth pwerband. 3000 stall speed or 4 spd.	01330	396 427 454 502	108°	276°	285°	242°	251°	147°	156°	.335"	.345"	.570"	.587"	.603"	.587"
Performance Level 3 Early mid range power, great marine, bracket racing.	01332	396 427 454 502	108°	285°	296°	251°	261°	156°	165°	.345"	.356"	.587"	.605"	.621"	.605"
Performance Level 3 Increased mid range ear splitting, neck whipping power. High compression.	01334	396 427 454 502	108°	293°	303°	259°	269°	165°	173°	.356"	.365"	.605"	.621"	.640"	.621"
Performance Level 4 High torque drag, high rev, top end.	01336	396 427 454 502	110°	301°	308°	267°	276°	171°	179°	.360"	.372"	.612"	.632"	.648"	.632"
CUSTOM CAM Special order 4-7 switch firing order. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00047	ALL CID	Refer to www.crower.com for camshaft recommendation												
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00057	ALL CID	Refer to www.crower.com for camshaft recommendation												

Note: These cams use .018" intake, .020" exhaust valve lash.

Full ball nose, longer wearing pattern, more contact with the lifter.

The above cams are ground on Pro55 cores.

Note: If running .874" lifter bores, use # 66915-16 or 66951X980-16.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84302X980	66900X980-16	68340-16	87063M-16	86071-16	7000 plus rpm. Street applications.
84302LW980	66900LW980-16	68340-16	87063M-16	86071-16	Light Weight Lifter
84301X980	66900X980-16	68385X2-16	87053-16	86071-16	Race only.

**Beehive Springs Available,
ask Crower for details**

Spring pressure:

68340-16 Seat: 1.900" @ 119 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080" (Machine work required).

68385X2-16 Seat: 1.950" @ 144 lbs / Nose: 1.300" @ 422 lbs / Coil bind: 1.100" (Machine work required).

Note: If engine is equipped with exhaust valve rotators see rotation eliminator cups.

Note: For proper oiling on 1965 and 1966 engines, rear cam bearing must be grooved. Specify when ordering cam.

Note: If exceeding 7500 rpm, high pressure springs and titanium retainers may be required.

Note: Steel billet hardface cams are available from Crower on a special order basis. Contact Crower for information.

Valve timing events are available online at: www.crower.com

IMPORTANT! Stock big block Chevrolet single springs are designed for cams with approximately .400" lift. When stock valve springs are used with performance cams over .400" lift, coil bind and retainer to valve guide interference may occur. If using 1 1/32 valve stem dia., must specify for different retainers/keepers.

Note: Rocker arms available in Aluminum & Stainless steel.

Mechanical 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STREET ROLLER / Performance Level 4 Intended for performance oriented hot-street applications. RPM Power Range: 2500 to 6000 / Redline: 6750 plus.	01475	427 454	286R	112°	286°	290°	242°	250°	.581"	.573"	84511S
STREET ROLLER / Performance Level 4 Intended for performance oriented hot-street applications. RPM Power Range: 3000 to 7000 / Redline: 7000 plus.	01476	427 454	290R	112°	290°	296°	252°	254°	.585"	.578"	84511S
STREET ROLLER / Performance Level 4 Intended for performance oriented hot-street applications. RPM Power Range: 3200 to 7000 / Redline: 7250 plus.	01477	427 454	296R	112°	296°	300°	254°	260°	.580"	.587"	84511S
ULTRA-ACTION / Performance Level 5 High torque, and mid-range profile for bracket and marine applications. RPM Power Range: 2800 to 6800 / Redline: 7200 plus.	01485	427 454	296R	107°	296°	302°	256°	266°	.641"	.636"	84511S
ULTRA-ACTION / Performance Level 5 Strong mid-range design for bracket and marine use. RPM Power Range: 3000 to 7000 / Redline: 7500 plus.	01486	427 454	290R	107°	290°	306°	260°	270°	.651"	.677"	84511S
ULTRA-ACTION / Performance Level 5 Strong mid-range design for bracket and marine use. RPM Power Range: 4500 to 8000 / Redline: 8400 plus.	01487	427 454	306R	107°	306°	314°	270°	276°	.678"	.661"	84511S
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND ROLLER Custom order steel billet roller camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00051	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND ROLLER Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration ground to your specifications.	00060	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								
CUSTOM GROUND ROLLER Custom ground roller, using a cast steel core, to your specifications. Call our technical support staff for personalized camshaft assistance.	00101R	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .026" intake, .028" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Keepers	Plug	Remarks
84511S	66291-16	68363-16	87064-16	86071-16	86111-16	86086	For rpm up to 7500 max.
84512S	66291-16	68365-16	87056-16	86071T-16	86111-16	86086	For rpm up to 8000 plus.

Spring pressure:

68363-16 Seat: 1.900" @ 212 lbs / Nose: 1.200" @ 560 lbs / Coil bind: 1.100"
(Machine work required).

68365-16 Seat: 1.925" @ 259 lbs / Nose: 1.300" @ 654 lbs / Coil bind: 1.230"
(Machine work required).

Optional springs: 68803H-16, 68806-16, 68547-16, 68548-16

Valve timing events are available online at: www.crower.com

CROWER recommends using HIPPO or Enduramax roller lifters in high RPM and high spring pressure applications.

Note: If exceeding 8000 rpm, high pressure springs and titanium retainers may be required. Contact Crower.

Note: Special cam cores available for Torrington bearing applications.

Note: Rocker arms available in Aluminum & Stainless steel.

ORIGINAL SERIES MECHANICAL ROLLER TAPPET

Chevrolet

Mechanical 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA-ACTION / Performance Level 5 Fast 3/8 and 1/2 mile oval track grind. RPM Power Range: 4800 to 8300 / Redline: 8700 plus.	01488	427 454	309R	108°	309°	316°	276°	280°	.728"	.716"	84512
ULTRA-ACTION / Performance Level 5 Big cid profile for 3/8 and 1/2 mile oval. RPM Power Range: 5300 to 8800 / Redline: 9000 plus.	01489	427 454	318R	108°	318°	326°	284°	288°	.758"	.745"	84512
ULTRA-ACTION / Performance Level 5 Super competition profile. RPM Power Range: Varies on valve train, heads, manifold, etc...	01490	427 454	321R	110°	321°	330°	288°	290°	.777"	.731"	84512
ULTRA-ACTION / Performance Level 5 Super competition profile. RPM Power Range: Varies on valve train, heads, manifold, etc...	01491	427 454	328R	110°	328°	336°	286°	292°	.801"	.780"	CALL CROWER
ULTRA-ACTION / Performance Level 5 A very radical profile for competition use only. RPM Power Range: Varies on valve train, heads, manifold, etc...	01492	427 454	336R	112°	336°	340°	294°	300°	.779"	.717"	CALL CROWER
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND ROLLER Custom order steel billet roller camshaft ground to your specifications. Available in 50, 55, 60mm & standard bearing sizes. Also available in a lightweight design, gun drilled core for racing purposes only.	00051	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND ROLLER Special order camshaft using a custom core with LS firing order (4-7-3-2) or any special configuration ground to your specifications.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00101R	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .026" intake, .028" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Keepers	Plug	Remarks
84511S	66291-16	68363-16	87064-16	86071-16	86111-16	86086	For rpm up to 7500 max.
84512S	66291-16	68365-16	87056-16	86071T-16	86111-16	86086	For rpm up to 8000 plus.

Spring pressure:

68363-16 Seat: 1.900" @ 212 lbs / Nose: 1.200" @ 560 lbs / Coil bind: 1.100" (Machine work required).

68365-16 Seat: 1.925" @ 259 lbs / Nose: 1.300" @ 654 lbs / Coil bind: 1.230" (Machine work required).

Optional springs: 68803H-16, 68806-16, 68547-16, 68548-16

Valve timing events are available online at: www.crower.com

CROWER recommends using HIPPO or Enduramax roller lifters in high RPM and high spring pressure applications.

Note: If exceeding 8000 rpm, high pressure springs and titanium retainers may be required. Contact Crower.

Note: Special cam cores available for Torrington bearing applications.

Note: Rocker arms available in Aluminum & Stainless steel.

Mechanical 1965-1996

366 396 402 427 454 502 & Rodeck V8 Big Block

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Lobe Center	Advertised Duration @ .020"		Duration @ .050"		Duration @ 200"		Lobe Lift		Gross Lift 1.7 / 1.6		Gross Lift 1.8 / 1.7		
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake
Performance Level 5 RPM Power Range: Varies on valve train, heads, manifold, etc...*	01521	396	3300	4800	7000	7500+	110°	295°	307°	262°	273°	173°	181°	.402"	.402"	.683"	.683"	.723"	.683"	
			427	3100	4600	6800														7300+
			454	2800	4300	6500														7000+
			502	2550	4050	6000														6500+
Performance Level 5 RPM Power Range: Varies on valve train, heads, manifold, etc...*	01522	396	3300	4800	7000	7500+	110°	301°	313°	268°	279°	179°	188°	.415"	.412"	.706"	.700"	.747"	.700"	
			427	3100	4600	6800														7300+
			454	2800	4300	6500														7000+
			502	2550	4050	6000														6500+
Performance Level 5 RPM Power Range: Varies on valve train, heads, manifold, etc...*	01523	396	3800	5300	7400	7900+	110°	311°	321°	278°	287°	190°	195°	.437"	.428"	.743"	.728"	.786"	.728"	
			427	3600	5100	7200														7700+
			454	3300	4800	6900														7400+
			502	3100	4600	6400														6900+
Performance Level 5 RPM Power Range: Varies on valve train, heads, manifold, etc...*	01524	396	3950	5450	7600	8100+	112°	315°	323°	280°	289°	194°	199°	.445"	.421"	.757"	.716"	.801"	.716"	
			427	3750	5250	7400														7900+
			454	3450	4950	7100														7600+
			502	3400	4900	6600														7100+
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00003	All CID	Refer to www.crower.com for camshaft recommendation																	
CUSTOM GROUND ROLLER Custom order steel billet roller camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00051	All CID	Refer to www.crower.com for camshaft recommendation																	
CUSTOM GROUND ROLLER Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration ground to your specifications.	00060	All CID	Refer to www.crower.com for camshaft recommendation																	
CUSTOM GROUND ROLLER Custom ground roller, using a cast steel core, to your specifications. Call our technical support staff for personalized camshaft assistance.	00101R	All CID	Refer to www.crower.com for camshaft recommendation																	

*Please provide cylinder head flow numbers for accurate RPM Power Range

Note: These cams use .018" intake, .020" exhaust valve lash.

The above cores are 8620 steel billet.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Plug	Remarks
84517S	66291-16	68806-16	86780-16	86086	Limited street use. Requires Super 7° keepers.
84516S	66291-16	68860-16	86780-16	86086	For rpm up to 8000 max. Requires Super 7° keepers.
84515S	66291-16	68548-16	86069-16	86086	Triple spring. Requires 10° keepers.

To order the above cores specify #00003. 60mm is available on special order basis only (#00060).

Special Firing Orders:

1-8-7-3-6-5-4-2 (4/7 Switch - A).

Specify #00003 when ordering.

1-8-7-2-6-5-4-3 (LS1/Tri Y Header - C).

Specify #00060 when ordering.

Spring pressure:

68806-16 Seat: 2.000" @ 279 lbs / Nose: 1.250" @ 733 lbs / Coil bind: 1.160"

68860-16 Seat: 1.950" @ 287 lbs / Nose: 1.100" @ 864 lbs / Coil bind: 1.010"

Valve timing events are available online at: www.crower.com

AVAILABLE CAM JOURNAL SIZES

Description	Size
Pro Stock Roller Bearings / Babbit Bearing	2.124"
Large Roller Bearing	2.166"
Pro Stock Oversize	66mm

All previous part numbers no longer listed are still available as custom grinds.

Please contact Crower for more custom grinds.

ACCESSORIES

Part No.	Description
66201-16	.842" dia roller lifters. No offset.
66375-16	.874" dia roller lifters. No offset.
66291-16	.842" dia roller lifters. No offset, Severe-Duty
66293-16	.842" dia roller lifters. Intake Offset, Severe-Duty
66297-16	.842" dia roller lifters. Specify Offset, Severe-Duty
66291X874-16	.874" dia roller lifters. No offset, Severe-Duty
66293X874-16	.874" dia roller lifters. Intake Offset, Severe-Duty
66297X874-16	.874" dia roller lifters. Specify Offset, Severe-Duty

HIPPO Note: For severe duty roller lifter applications, we highly recommend using our roller lifters with Hippo "High Pressure Pin Oiling". Specify "H" in the part number.

Ex. 66290X874H-16

Shaft Rockers are available. Refer to the new section in Valve Train area.

Titanium valves are mandatory on all ratios over 1.7:1.

4.6L/5.4L SOHC MODULAR (2 VALVE) MECHANICAL FLAT TAPPET

FORD

Low Lift Design 1994-1998 (Early Model Cylinder Head)

Description	Part Number	Advertised Duration		Duration @ .050"		Lobe Lift		Gross Lift (1.8)		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (1994-98)	Stock	233° 242°	Lobe Valve	242° 254°	186° 202°	Lobe Valve	191° 207°	.256" .259"	.461" .466"	Stock
STAGE 2 Hot street profile. Emphasis on mid range. Spring recommended. RPM Range: 1500 to 6000+ on 4.6L, 5.4L will be lower	62811-2	252° 266°	Lobe Valve	256° 270°	204° 220°	Lobe Valve	208° 224°	.296" .296"	.532" .532"	84706 84707
STAGE 2 Designed specifically for supercharger applications for street use. RPM Range: 1750 to 6500+ on 4.6L, 5.4L will be lower	62812-2	258° 272°	Lobe Valve	258° 272°	212° 230°	Lobe Valve	212° 230°	.296" .296"	.532" .532"	84706 84707
CUSTOM GROUND 4.6L/5.4L CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles also available.	00080-2	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

NOTE: These cams require aftermarket cam bolt kit #86053-2. The factory bolt WILL NOT work.

The above cams are ground on factory 114 lobe center. Valve timing events are available online at: www.crower.com

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84706	68193-16	87025-16	High pressure spring, steel retainer for street and high mileage use.
84707	68193-16	87025T-16	High open pressure spring, titanium retainer for limited street & race.

NEW HIGH RPM VALVE SPRING

Spring pressure:
68193-16 Seat: 1.720" @ 124 lbs / Nose: 1.100" @ 257 lbs / Coil bind: 1.035"
(No machine work required).

ACCESSORIES


Part No.	Remarks
86053-2	Aftermarket Cam Bolt Kit (set 2)
97434I-8	Stainless steel valves - 44.5 mm head dia (8 only int)
97434E-8	Stainless steel valves - 34 mm head dia (8 only exh)
97432I-8	Stainless steel valves - 46.83 mm head - M-6049-D46 Cyl Head
97435E-8	Stainless steel valves - 36 mm head - M-6049-D46 Cylinder Head

Note: When ordering valves, be sure to specify one set int and one set exh.

STAINLESS STEEL VALVES

Made from the highest grade stainless steel, this new Crower valve is a must for high horsepower, high boost and high rpm applications. The exclusive "Pro Flo" head design delivers a significant increase in cylinder head flow figures, while the tip area is hardened to RC50, including past the critical keeper groove area for added strength. Fully CNC machined and swirl polished to insure that you will get the best performance valve available on the market. Choose from standard and 1mm oversize. Titanium valves also available.

All previous part numbers no longer listed are still available as custom grinds.
Please contact Crower for more custom grinds.

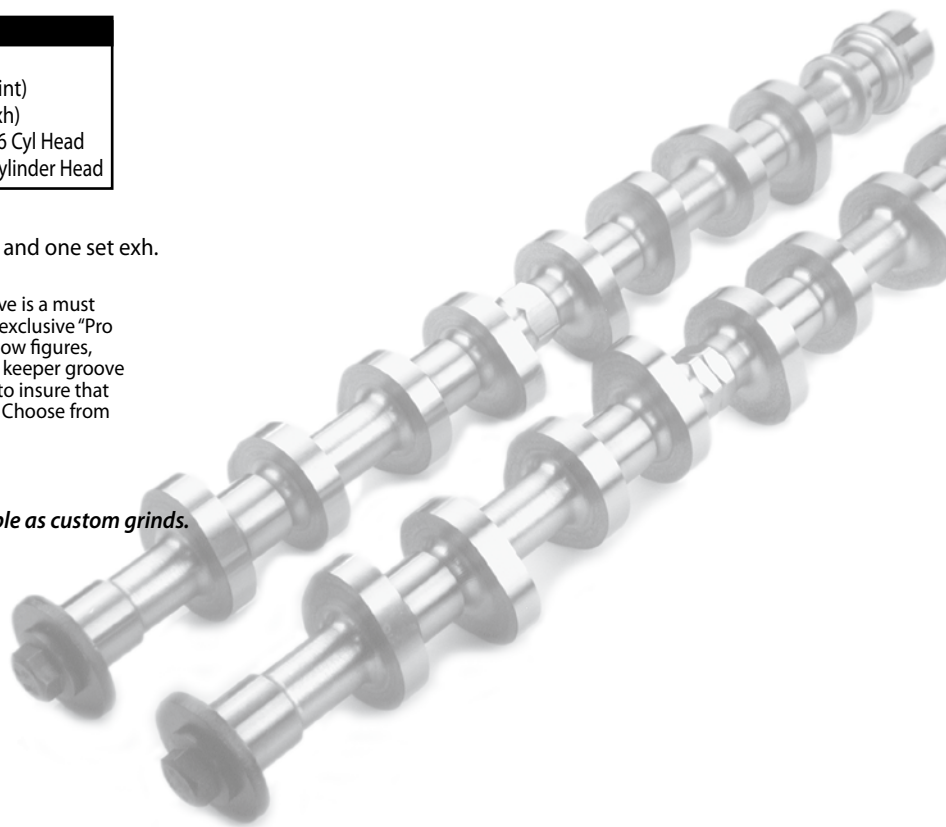

FORD

4.6L/5.4L SOHC MODULAR (2 VALVE) MECHANICAL FLAT TAPPET

High Lift Design
1999-up (Late Model Cylinder Head)

Description	Part Number	Advertised Duration		Duration @ .050"		Lobe Lift		Gross Lift (1.8)		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (1999-up)	Stock	233° Lobe 242° Valve	239° 252°	184° Lobe 200° Valve	191° 209°	.280"	.295"	.504"	.531"	Stock
STAGE 1 Excellent for stock replacement. No other modifications required. RPM Range: Idle to 5500+ on 4.6L, 5.4L will be lower.	62800-2	246° Lobe 260° Valve	250° 264°	200° Lobe 216° Valve	204° 220°	.300"	.305"	.540"	.549"	Stock
STAGE 2 Hot street profile. Emphasis on mid range. Spring recommended. RPM Range: 1250 to 6000+ on 4.6L, 5.4L will be lower.	62801-2	254° Lobe 268° Valve	258° 272°	208° Lobe 224° Valve	212° 228°	.311"	.317"	.559"	.570"	84706
STAGE 2 Designed specifically for supercharger applications for street use. RPM Range: 1500 to 6500+ on 4.6L, 5.4L will be lower.	62802-2	262° Lobe 276° Valve	262° 276°	216° Lobe 234° Valve	216° 234°	.322"	.322"	.581"	.581"	84706 84707
STAGE 3 Street/strip profile. Emphasis on top end power. Spring required. RPM Range: 1750 to 6750+ on 4.6L, 5.4L will be lower.	62803-2	266° Lobe 280° Valve	270° 284°	220° Lobe 238° Valve	224° 242°	.328"	.334"	.590"	.601"	84706 84707
STAGE 3 Designed specifically for supercharger applications for street/strip. RPM Range: 2000 to 6900+ on 4.6L, 5.4L will be lower.	62804-2	274° Lobe 288° Valve	274° 288°	228° Lobe 246° Valve	228° 246°	.340"	.340"	.612"	.612"	84706 84707
STAGE 4 Race grind. ECU mods and tuning required. Rough idle is common. RPM Range: 2250 to 7000+ on 4.6L, 5.4L will be lower.	62805-2	274° Lobe 288° Valve	278° 292°	228° Lobe 246° Valve	232° 250°	.340"	.345"	.612"	.621"	84706 84707
CUSTOM GROUND 4.6L/5.4L CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles also available.	00080-2	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

NOTE: These cams require aftermarket cam bolt kit #86053-2. The factory bolt WILL NOT work.

The above cams are ground on factory 114 lobe center. 1999 and up SOHC engines require cam gears to replace pressed on units. Valve timing events are available online at: www.crower.com

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84706	68193-16	87025-16	High pressure spring, steel retainer for street and high mileage use.
84707	68193-16	87025T-16	High open pressure spring, titanium retainer for limited street & race.

Spring pressure:

68193-16 Seat: 1.720" @ 124 lbs / Nose: 1.100" @ 257 lbs / Coil bind: 1.035"
(No machine work required).

ACCESSORIES

Part No.	Remarks
86053-2	Aftermarket Cam Bolt Kit (set 2)
97434I-8	Stainless steel valves - 44.5 mm head dia (8 only int)
97434E-8	Stainless steel valves - 34 mm head dia (8 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.


Ford Timing Gears Part Numbers:

F8AE-6256-BA (Left Hand Gear)
F8AE-6256-AA (Right Hand Gear)

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

STAINLESS STEEL VALVES

Made from the highest grade stainless steel, this new Crower valve is a must for high horsepower, high boost and high rpm applications. The exclusive "Pro Flo" head design delivers a significant increase in cylinder head flow figures, while the tip area is hardened to RC50, including past the critical keeper groove area for added strength. Fully CNC machined and swirl polished to insure that you will get the best performance valve available on the market. Choose from standard and 1mm oversize. Titanium valves also available.

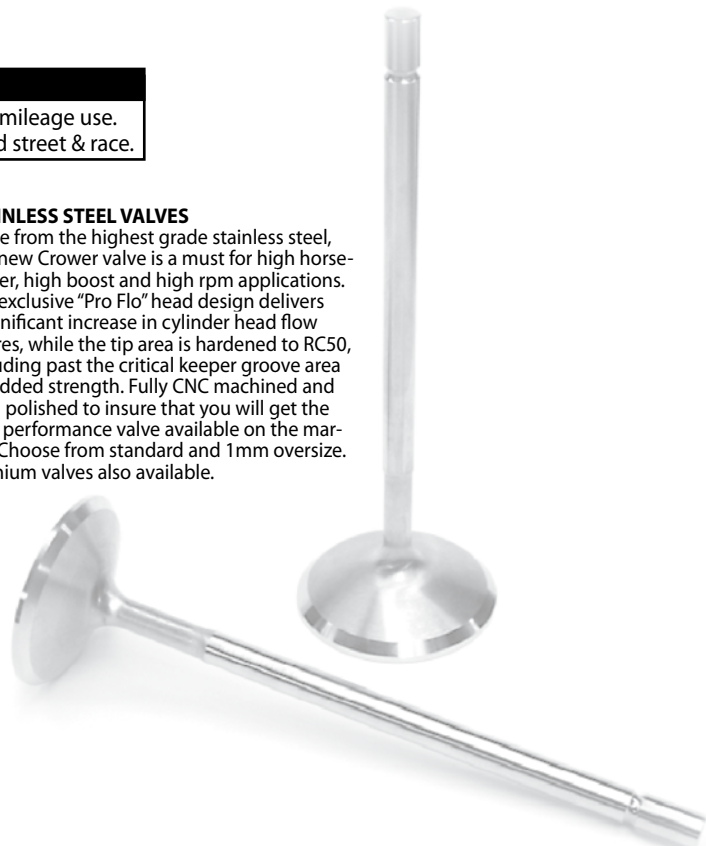

4.6L/5.4L SOHC MODULAR (3 VALVE) MECHANICAL FLAT TAPPET FORD

2005 - up

Description	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Lobe Lift		Gross Lift (1.8)		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (1999-up)	Stock		232° 246°	Lobe Valve 274°	260° 274°	175° 193°	Lobe Valve 216°	198° 216°	.216" .216"	.432" .432"	Stock
STAGE 1 Excellent for stock replacement. Programming recommended. RPM Range: 1000 to 5900+ RPM	62830-2	114°	245° 261°	Lobe Valve 278°	262° 278°	188° 208°	Lobe Valve 222°	200° 222°	.240" .234"	.480" .468"	84708
STAGE 2 Hot Street Profile with explosive mid-range torque. Supercharged/Nitrous. RPM Range: 1200 to 6200+ RPM	62831-2	114°	258° 274°	Lobe Valve 284°	268° 284°	200° 220°	Lobe Valve 236°	216° 236°	.246" .246"	.492" .492"	84708
STAGE 3 Street/Strip profile. Mid/Top end cam. 2500 stall rec. RPM Range: 1200 to 6400+ RPM	62832-2	115°	262° 276°	Lobe Valve 276°	262° 276°	216° 234°	Lobe Valve 234°	216° 234°	.246" .251"	.490" .502"	84708
CUSTOM GROUND 4.6L/5.4L CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles also available.	00082-2		Refer to www.crower.com for camshaft recommendation								


Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84709	68193-24	87023-24	Steel Retainer, for daily street use.
84708	68193-24	87023T-24	High pressure spring, titanium retainer.

Spring pressure:
68193-24 Seat: 1.660" @ 130 lbs / Nose: 1.100" @ 257 lbs / Coil bind: 1.035"
(No machine work required).

All previous part numbers no longer listed are still available as custom grinds.
Please contact Crower for more custom grinds.

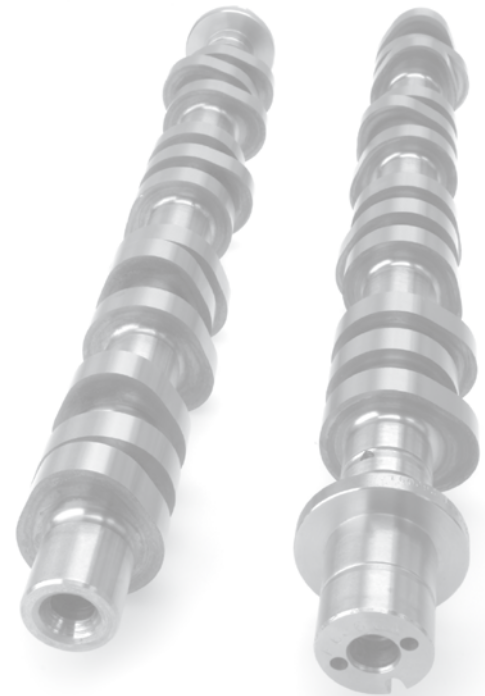

FORD

4.6L/5.4L SOHC MODULAR (4 VALVE) MECHANICAL FLAT TAPPET

Description	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Lobe Lift		Gross Lift (1.8)		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS	Stock		220° Lobe 232° Valve	228° 240°	172° Lobe 186° Valve	178° 194°	.218" .217"	.392" .390"		Stock	
STAGE 1 Excellent for stock replacement. No other modifications required. Stock Idle to 6800 RPM.	62820-4	114°	222° Lobe 234° Valve	232° 244°	176° Lobe 192° Valve	188° 204°	.234" .239"	.421" .430"		Stock	
STAGE 2 Hot street profile. Emphasis on mid range. Spring recommended. Slight Lobe at Idle to 7000 RPM.	62821-4	114°	238° Lobe 250° Valve	246° 258°	194° Lobe 210° Valve	200° 216°	.262" .263"	.472" .473"		84710 84711	
STAGE 2 Designed specifically for supercharger applications for street use. Slight Lobe at Idle to 7250 RPM.	62822-4	114°	252° Lobe 264° Valve	252° 264°	206° Lobe 222° Valve	206° 222°	.264" .264"	.475" .475"		84710 84711	
STAGE 3 Street/strip profile. Emphasis on top end power. Spring required. Rough Idle to 7500 RPM.	62823-4	114°	258° Lobe 270° Valve	262° 274°	212° Lobe 228° Valve	216° 232°	.269" .269"	.484" .484"		84710 84711	
STAGE 3 Designed specifically for supercharger applications for 3/4 race. Rough Idle to 7750+ RPM.	62824-4	114°	258° Lobe 270° Valve	258° 270°	220° Lobe 236° Valve	228° 244°	.269" .269"	.484" .484"		84710 84711	
STAGE 4 Race grind. ECU mods and tuning required. Rough idle is expected. Rough Idle to 7800+ RPM.	62825-4	114°	266° Lobe 278° Valve	274° 286°	220° Lobe 236° Valve	228° 244°	.270" .275"	.486" .495"		84710 84711	
CUSTOM GROUND 4.6L/5.4L CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles also available.	00084-4		Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

NOTE: These cams require aftermarket cam bolt kit #86053-2. The factory bolt WILL NOT work.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84711	68194-32	87026-32	High pressure spring and steel retainer kit. Daily street use.
84711X2	68194X2-32	87020-32	High pressure spring and steel retainer kit. Daily street use.
84710	68194-32	87026T-32	High pressure spring and titanium retainer kit. Limited street.
84710X2	68194X2-32	87020T-32	High pressure spring and titanium retainer kit. Limited street.

Spring pressure:

68194-32 Seat: 1.420" @ 100 lbs / Nose: 0.910" @ 244 lbs / Coil bind: 0.850" (No machine work required).

68194X2-32 Seat: 1.470" @ 108 lbs / Nose: 0.970" @ 240 lbs / Coil bind: 0.855" (No machine work required).

ACCESSORIES


Part No.	Remarks
86053-2	Aftermarket Cam Bolt Kit (set 2) order 2 sets
974371-16	Stainless steel valves - 37 mm head dia (16 only int)
97437E-16	Stainless steel valves - 30 mm head dia (16 only exh)
974381-16	Stainless steel valves - 38 mm head dia (16 only int)
97438E-16	Stainless steel valves - 31 mm head dia (16 only exh)

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

The above cams are ground on factory 114 lobe center. Valve timing events are available online at: www.crower.com

STAINLESS STEEL VALVES

Made from the highest grade stainless steel, this new Crower valve is a must for high horsepower, high boost and high rpm applications. The exclusive "Pro Flo" head design delivers a significant increase in cylinder head flow figures, while the tip area is hardened to RC50, including past the critical keeper groove area for added strength. Fully CNC machined and swirl polished to insure that you will get the best performance valve available on the market. Choose from standard and 1mm oversize. Titanium valves also available.

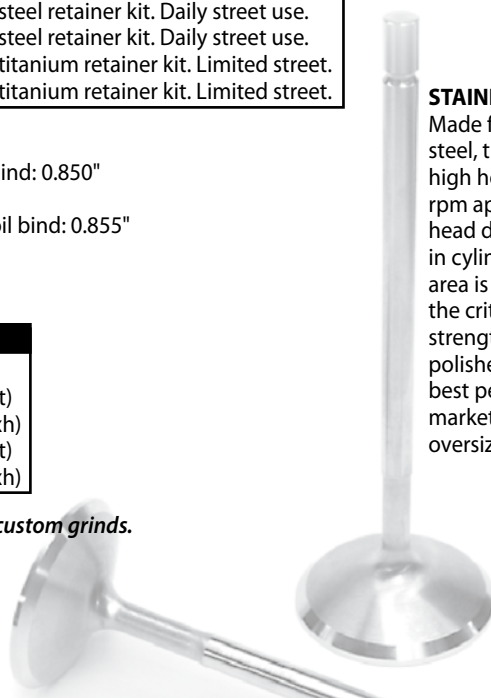

FOCUS ZX3 - TWIN CAM MECHANICAL FLAT TAPPET

FORD

1998 - up

Description	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Lobe Lift		Suitable Component Kit	
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust		
FACTORY OEM SPECS (1998-up)	Stock	112°	276° 252°	Lobe Valve	273° 249°	206° 200°	Lobe Valve	205° 199°	.346" .341"	Stock
STAGE 1 Automatic or mild turbo/supercharger. No head work required. RPM Range: Idle to 6500+	62501-2	114°	268° 244°	Lobe Valve	268° 244°	220° 214°	Lobe Valve	220° 214°	.374" .374"	Stock
STAGE 2 Street/Strip package. Perfect for all-motor use. Spring #68195 req. RPM Range: 1000 to 7000+	62502-2	114°	280° 256°	Lobe Valve	276° 252°	232° 226°	Lobe Valve	228° 222°	.413" .393"	84169
STAGE 2 Forced induction special. Designed specifically for turbo or super charged applications. Spring kit req. RPM Range: 1500-up	62502T-2	114°	276° 252°	Lobe Valve	276° 252°	228° 222°	Lobe Valve	228° 222°	.393" .393"	84169
STAGE 3 - 3/4 Race Recommended for mostly strip use. Must clearance cylinder head. RPM Range: 1200 to 8000+	62503-2	114°	292° 268°	Lobe Valve	284° 260°	244° 238°	Lobe Valve	236° 230°	.433" .413"	84169
STAGE 4 - Full Race All out, all motor drag profile. Not for the inexperienced tuner. RPM Range: 1300 to 8500+	62504-2	114°	300° 276°	Lobe Valve	292° 268°	252° 246°	Lobe Valve	244° 238°	.454" .433"	84169
CUSTOM GROUND ZX3 CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles also available.	00071-2	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84169	68195-16*	87082-16	Fits ZX3 and ZX2 heads

Spring pressure:

68195-16 Seat: 1.400" @ 66 lbs / Nose: 0.950" @ 174 lbs / Coil bind: 0.860"
(No machine work required on most heads).

* Some cylinder heads may require machine work for valve spring.


ACCESSORIES

Part No.	Remarks
86054FB	Adjustable Cam Sprocket (1 only). All black. 2 required
86054FC	Adjustable Cam Sprocket (1 only). Black & Silver. 2 required
97430I-8	Stainless steel valves - 32 mm head dia (8 only int)
97430E-8	Stainless steel valves - 28 mm head dia (8 only exh)
97431I-8	Stainless steel valves - 33 mm head dia (8 only int)
97431E-8	Stainless steel valves - 29 mm head dia (8 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.

Note: When ordering sprockets, be sure to specify two.

All previous part numbers no longer listed are still available as custom grinds.
Please contact Crower for more custom grinds.

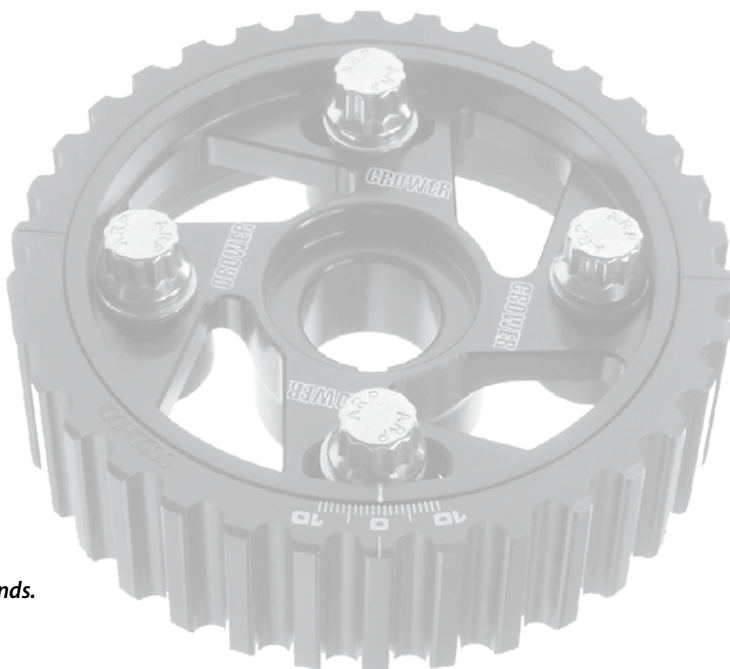

ADJUSTABLE SPROCKETS

Crower's new cam sprockets are made from premium 6061-T6 billet aluminum and incorporate a four bolt ARP® fastening system to prevent the slippage found in other brands. For the ultimate tuner, Crower sprockets feature 5/16" diameter, 12 point ARP® fasteners with a hardened washer to prevent galling and stripping. The lightweight design reduces unwanted harmonics which could cause valve train failure.

Description	Part Number	Lobe Center	Advertised Duration (.010")		Duration @ .050"		Lobe Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Ford Focus ST (2004)	Stock	112°	256°	252°	202°	189°	.358"	.317"	Stock
STAGE 1 Street use with emphasis on bottom end and mid range power. Works with stock springs up to factory rev limiter. RPM Range: Idle to 7000+	62551-2	114°	260°	257°	211°	205°	.397"	.347"	Stock
STAGE 2 - Forced Induction Designed specifically for turbo or supercharger applications. Low duration, high lift profile. Requires Crower spring kit #84170. RPM Range: Idle to 8000+	62551T-2	112°	270°	270°	220°	220°	.400"	.400"	84170
STAGE 2 - 3/4 Race Designed for street/strip applications in normally aspirated engines. Requires spring/retainer kit #84170. RPM Range: 1000 to 7800+	62552-2	112°	276°	268°	228°	220°	.390"	.374"	84170
STAGE 3 - Full Race Drag Race and radical Street/Strip. Requires #84170 spring kit and compatible ECU upgrade for optimum results. Rough idle. RPM Range: 1100 to 8000+	62553-2	112°	284°	276°	236°	228°	.414"	.393"	84170
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary profiles available upon request.	00079-2	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Duration figures are taken at the lobe.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KIT

Part No.	Springs	Retainers	Remarks
84170	68195-16	87083-16	Titanium retainer intended for race and limited street

Spring pressure:

68195-16 Seat: 1.400" @ 66 lbs / Nose: 1.000" @ 161 lbs / Coil bind: 0.860"
(No machine work required).

ACCESSORIES

Part No.	Remarks
97427I-8	Stainless steel valves - 35 mm head dia (8 only int)
97427E-8	Stainless steel valves - 30.5 mm head dia (8 only exh)
97429I-8	Stainless steel valves - 36 mm head dia (8 only int)
97429E-8	Stainless steel valves - 31 mm head dia (8 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.

STAINLESS STEEL VALVES

Made from the highest grade stainless steel, this new Crower valve is a must for high horsepower, high boost and high rpm applications. The exclusive "Pro Flo" head design delivers a significant increase in cylinder head flow figures, while the tip area is hardened to RC50, including past the critical keeper groove area for added strength. Fully CNC machined and swirl polished to insure that you will get the best performance valve available on the market. Choose from standard and 1mm oversize. Titanium valves also available.



HYDRAULIC FLAT TAPPET FORD

2300cc 1974-up 2000cc 1982-up (4 Bearing)

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.66 / 1.66		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 3 Excellent low end and mid-range power. RPM Power Range: 1800 to 4500 / Redline: 5500+	24915	All cid	280H	108°	280°	280°	222°	222°	.410"	.410"	84207
POWER COMPU-PRO / PERFORMANCE LEVEL 1 RPM Power Range: Idle to 5500+	24272	All cid	252HDP	108°	252°	252°	190°	200°	.445"	.460"	84207
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power/mileage with extended rpm's. RPM Power Range: 1500 to 4000 / Redline: 5500+	24273	All cid	270HDP	110°	270°	286°	228°	238°	.476"	.493"	84207
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Hot street. Strong upper bottom/top end power. RPM Power Range: 1800 to 4500 / Redline: 6000+	24274	All cid	286HDP	110°	286°	297°	244°	253°	.488"	.511"	84207
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00124	All cid	Refer to last page for camshaft form or call Crower								

Note: These cams use .000" intake and exhaust valve lash.

Note: Lift rule camshafts are available from Crower on a special order basis.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.66 / 1.66		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
POWER BEAST / PERFORMANCE LEVEL 4 High torque racing profile with bottom end power. RPM Power Range: 2800 to 6400 / Redline: 6800+	24360	All cid	302F	109°	302°	307°	252°	262°	.459"	.461"	84207
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 5 Torque with excellent mid-range power. RPM Power Range: 3000 to 6500 / Redline: 7000+	24372	All cid	288FDP	106°	288°	292°	257°	264°	.554"	.554"	84207
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 5 Strong mid-range and top end power profile. RPM Power Range: 4000 to 7000 / Redline: 7500+	24374	All cid	311FDP	103°	311°	315°	274°	278°	.582"	.582"	84207
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 5 Upper mid-range and top end power. RPM Power Range: 4500 to 7500 / Redline: 8000+	24376	All cid	314FDP	103°	314°	318°	278°	282°	.596"	.596"	84207
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00125	All cid	Refer to last page for camshaft form or call Crower								

Note: These cams use .012" intake, .014" exhaust valve lash.

**3 Bearing Camshafts Available As Special Order
2300cc Roller Cams Also Available**

Note: The above solid profiles are ground with a smaller base circle than stock. If using stock length valves, you must use .100" thick lash caps (86127-8) in kit below. Check follower geometry with Dykem hi-spot blue or any other non-drying compound and adjust valve length accordingly. Duration numbers @ .050" have been refigured to reflect valve lift. Note: Lift rule camshafts are available from Crower on a special order basis.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84207	68324-8	87049-8	Hydraulic or Solid Lifter.

HYDRAULIC TO SOLID CONVERSION KITS

Part No.	Remarks
76450-8	Comes with heavy duty adjusters, nuts, sleeves and stabilizer spring.

Spring pressure: 68324-8 Seat: 1.600" @ 118 lbs / Nose: 1.000" @ 283 lbs / Coil bind: 0.910" (Machine work, use cutter 68983*).

Optional spring (stock diameter): 68147-8

Seat: 1.550" @ 78 lbs / Nose: 1.100" @ 177 lbs / Coil bind: 1.000" (Stock O.D. 1.369", no machine work).

* Machine work required

Note: Ford overhead camshafts are susceptible to lobe wear. We highly recommend breaking in new cam and followers with a light pressure break-in spring for a minimum of 30 minutes.

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

FORD HYDRAULIC FLAT TAPPET

240 300 Inline 6 Cylinder

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power and mileage with extended rpm's. RPM Power Range: 1800 to 4500 / Redline: 6000+	19211	All cid	252HDP	112°	252°	258°	192°	196°	.426"	.440"	84010
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Hot street profile. Strong upper bottom and top end power. RPM Power Range: 1800 to 4500 / Redline: 6000+	19212	All cid	260HDP	112°	260°	268°	202°	210°	.443"	.448"	84010
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00119H	All cid	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.
Note: Cam cores for 144, 170, 200 and 250 cid Ford engines are available from Crower on a special order basis.

MECHANICAL FLAT TAPPET

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / PERFORMANCE LEVEL 5 Explosive power throughout the power band. RPM Power Range: 3500 to 7000+	19312	All cid	284FDP	105°	284°	290°	248°	252°	.558"	.563"	84310
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00119M	All cid	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00060	All cid	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

Note: Cam cores for 144, 170, 200 and 250 cid Ford engines are available from Crower on a special order basis.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84010	66015-12	68305X1-12	87048-12	86072-12	Hydraulic Lifter. For rpm up to 6500 plus.
84311	66915-12	68405-12	87048D-12	86072-12	Solid Lifter. For rpm up to 7000 plus.

Spring pressure:

68305X1-12 Seat: 1.700" @ 68 lbs / Nose: 1.200" @ 250 lbs / Coil bind: 1.050" (Stock OD, no machine work).

68405-12 Seat: 1.700" @ 110 lbs / Nose: 1.200" @ 297 lbs / Coil bind: .980" (Machine work required, use 68985 cutter & 68971 pilot).

Valve timing events are available online at: www.crower.com

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

HYDRAULIC FLAT TAPPET FORD

Non Roller 1963-1995

221 255 (4.2L) 260 289 302 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Exhibits broad stump pulling power and torque. RPM Power Range: 1200 to 3800 / Redline: 5200+	15915	289 302	258H	112°	258°	264°	204°	210°	.443"	.452"	
TORQUE BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. RPM Power Range: 2000 to 4800 / Redline: 6200+	15916	289 302	272H	112°	272°	279°	210°	220°	.448"	.474"	
POWER BEAST / PERFORMANCE LEVEL 3 Emphasis on upper mid-range and top end power. RPM Power Range: 2000 to 4800 / Redline: 6200+	15917	289 302	288H	112°	288°	300°	214°	224°	.474"	.498"	
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Intended for the hot marine/strip application, these cams offer extended rpm range with emphasis on upper bottom to top end power with strong mid-range. RPM Power Range: 1800 to 4500 / Redline: 6000+	15211	302 CID	276HDP	112°	276°	281°	212°	216°	.491"	.500"	
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 RPM Power Range: 1800 to 5000 / Redline: 6000+	15213	302 CID	280HDP	112°	284°	290°	228°	234°	.513"	.530"	
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Super rough idle. Hot street/strip cam with strong mid-range power. RPM Power Range: 2200 to 6200+	15922	260 289	274HDP	108°	274°	284°	220°	228°	.491"	.512"	
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle with explosive upper bottom and mid-range torque. RPM Power Range: 2500 to 6500+	15923	302 CID	290HDP	108°	290°	298°	226°	238°	.502"	.499"	
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00115H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Keepers	Seat Cup	Remarks
84117	66015-16	68405-16	87048-16	86072-16			For rpm up to 6500 plus. Limited street use.
84117X3	66015X3-16	68405-16	87048-16	86072-16			For rpm up to 6500 plus. Limited street use.
84119	66015-16	68390X3-16	87048-16	86072-16			
84113	66015-16	68155-16	87029-16		86071X1-16	68922-16	
84113X3	66015X3-16	68155-16	87029-16		86071X1-16	68922-16	CamSaver Lifter

Spring pressure:

68405-16 Seat: 1.700" @ 110 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 0.980" (Machine work, use cutter 68983*).

Note: If your installed height does not fall within these dimensions, contact Crower for a recommendation.

* Machine work required

Note: If using Boss heads contact the Crower for special spring and retainer recommendations. Boss 302 engines employ a 1.73 rocker ratio, so the gross lifts will change for the Boss 302. To figure the correct gross lift for Boss 302 heads divide the gross lift listed by 1.6 (lobe lift) then multiply the lobe lift by 1.73 (Boss 302 rocker ratio).

Note: Camshafts for 289/302 cid engines can be used in 351W engines by changing the firing order to 1-5-4-2-6-3-7-8.

Some early Ford heads use 5/16 valve stems. Please specify when ordering as the above kits are designed for 11/32 stems.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

For engines that were originally equipped with a hydraulic flat tappet cam, retrofit hydraulic roller cams & kit are available, call CROWER for details.

FORD HYDRAULIC FLAT TAPPET

Non Roller 1963-1995
221 255 (4.2L) 260 289 302 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle with explosive mid-range torque and acceleration. RPM Power Range: 2700 to 6000	15924	302 CID	296HDP	108°	296°	302°	230°	244°	.507"	.506"	
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle with explosive mid-range and top end horsepower. RPM Power Range: 3000 to 6500	15925	302 CID	304HDP	108°	304°	312°	240°	248°	.536"	.563"	
TURBOMASTER Intended for turbocharged hot street/strip and marine use. This cam offers extended rpm on mid-range and top end. RPM Power Range: 2000 to 6500	15929	302 CID	290HT	114°	290°	272°	226°	210°	.486"	.462"	
SUPERCHARGER Designed for B&M/Roots type supercharged street/ strip and marine. Emphasis on upper bottom to top end power. RPM Power Range: 2400 to 6500	15930	302 CID	288HC	114°	288°	288°	228°	228°	.464"	.464"	
SUPERCHARGER Designed for B&M/Roots type supercharged street/ strip and marine. Good mid to top end power. RPM Power Range: 2600 to 6500	15931	302 CID	304HC	114°	304°	304°	246°	246°	.507"	.507"	
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00115	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84117	66015-16	68405-16	87048-16	86072-16	For rpm up to 6500 plus. Limited street use.
84117X3	66015X3-16	68405-16	87048-16	86072-16	CamSaver Lifter. For rpm up to 6500 plus. Limited street use.

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface.

Spring pressure:

68405-16 Seat: 1.700" @ 110 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 0.980" (Machine work, use cutter 68983*).

Note: If your installed height does not fall within these dimensions, contact Crower for a recommendation.

* Machine work required

Note: If using Boss heads contact the Crower for special spring and retainer recommendations. Boss 302 engines employ a 1.73 rocker ratio, so the gross lifts will change for the Boss 302. To figure the correct gross lift for Boss 302 heads divide the gross lift listed by 1.6 (lobe lift) then multiply the lobe lift by 1.73 (Boss 302 rocker ratio).

Note: Camshafts for 289/302 cid engines can be used in 351W engines by changing the firing order to 1-5-4-2-6-3-7-8.

Some early Ford heads use 5/16 valve stems. Please specify when ordering as the above kits are designed for 11/32 stems.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

For engines that were originally equipped with a hydraulic flat tappet cam, retrofit hydraulic roller cams & kit are available, call CROWER for details.

HYDRAULIC ROLLER TAPPET

FORD

Factory Roller 1963-1995

221 255 (4.2L) 260 289 302 (5.0l) & Boss 302 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6	
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust
PERFORMANCE LEVEL 1 Launches hard with A.O.D. transmission. Torque all over the tach! Brutal bottom end. 302 CID / 2200 - 5300 RPM / Redline: 5800 RPM max	15510	See Descrip	212HR212	114°	275°	275°	212°	212°	.531"	.531"
PERFORMANCE LEVEL 2 Big sound. Excellent 5-speed cam for heavy car. Strong low and mid-range torque. 302 CID / 2200 - 5500 RPM / Redline: 6000 RPM max	15511	See Descrip	218HR224	114°	278°	282°	218°	224°	.468"	.486"
PERFORMANCE LEVEL 2 Most popular Ford hyd roller grind, blows away Chevrolets. Heavy mid-range. 302 CID / 2400 - 5700 RPM / Redline: 6200 RPM max	15512	See Descrip	222HR228	112°	282°	286°	222°	228°	.496"	.512"
PERFORMANCE LEVEL 3 Big cid camshaft (320-347 cid) with higher compression, good cylinder heads and valve train components. 302 CID / 2600 - 6000 RPM / Redline: 6500 RPM max	15513	See Descrip	228HR234	112°	288°	298°	228°	234°	.512"	.531"
PERFORMANCE LEVEL 4 Aggressive rpm camshaft, high stall A.O.D. or a 5-speed with low gears. For well prepared engines. 302 CID / 2700 - 6200 RPM / Redline: 6500 RPM max	15514	See Descrip	234HR240	110°	298°	304°	234°	240°	.534"	.545"
PERFORMANCE LEVEL 5 Top end insanity for serious, professionally built engines only. 1/4 mile drag special. 302 CID / 3000 - 6300 RPM / Redline: 6500 RPM max	15515	See Descrip	236HR242	110°	300°	310°	236°	242°	.524"	.529"
O.E.M. FACTORY STOCK SPECIFICATIONS 1989-1992 Ford Mustang. 302 H.O. Engine equipped with Hydraulic Roller camshaft.	Stock			115°	272°	272°	211°	211°	.437"	.437"
SVO FACTORY STOCK SPECIFICATIONS 302 H.O. Engine equipped with Hydraulic Roller camshaft.	E-303			110°	-	-	220°	220°	.480"	.480"
SVO FACTORY STOCK SPECIFICATIONS 302 H.O. Engine equipped with Hydraulic Roller camshaft.	B-303			110°	-	-	224°	224°	.498"	.498"
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00115HR	ALL CID	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Keepers	Remarks
84564	66335-16	68390X3-16	87048-16	86107X2-8 & 86107-8	6500 plus rpm. Limited street use.

Spring pressure:

68390X3-16 Seat: 1.800" @ 115 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110"

(Machine work required, use 68985 cutter & 68972 pilot).

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

1963-1995

221 255 (4.2L) 260 289 302 & Boss 302 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PERFORMANCE LEVEL 1 Launches hard with A.O.D. transmission. Torque all over the tach! Brutal bottom end. 2100 - 5300 RPM / Redline: 5800 RPM maximum	15520	See Descrip	210HR214	112°	274°	278°	210°	214°	.480"	.480"	
PERFORMANCE LEVEL 2 Big sound. Excellent 5-speed cam for heavy car. Strong low and mid-range torque. 2200 - 5500 RPM / Redline: 6000 RPM maximum	15521	See Descrip	218HR224	114°	278°	282°	218°	224°	.468"	.486"	
PERFORMANCE LEVEL 2 Most popular Ford hyd roller grind, blows away Chevrolets. Heavy mid-range. 2400 - 5700 RPM / Redline: 6200 RPM maximum	15522	See Descrip	222HR228	112°	282°	286°	222°	228°	.496"	.512"	
PERFORMANCE LEVEL 3 Big cid camshaft (320-347 cid) with higher compression, good cylinder heads and valve train components. 2600 - 6000 RPM / Redline: 6500 RPM maximum	15523	See Descrip	228HR234	112°	288°	298°	228°	234°	.512"	.531"	
PERFORMANCE LEVEL 4 Aggressive rpm camshaft, high stall A.O.D. or a 5-speed with low gears. For well prepared engines. 2700 - 6200 RPM / Redline: 6500 RPM maximum	15524	See Descrip	234HR240	110°	298°	304°	234°	240°	.534"	.545"	
PERFORMANCE LEVEL 5 Top end insanity for serious, professionally built engines only. 1/4 mile drag special. 3000 - 6300 RPM / Redline: 6500 RPM maximum	15525	See Descrip	236HR242	110°	300°	310°	236°	242°	.524"	.529"	
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance. Please provide cylinder head flow numbers.	00155HR	All cid	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

For engines which were manufactured with non-roller lifters, must be used with 66337-16 roller lifter.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Keepers	Remarks
84562	66337-16	68390X3-16	87048-16	86107X2-8 & 86107-8	6500 max rpm.

Spring pressure:

68390X3-16 Seat: 1.800" @ 115 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110"
(Machine work required, use 68985 cutter & 68972 pilot).

Note: Requires screw with studs & guide plates.

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower. **CAUTION!** When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at:

www.crower.com

MECHANICAL FLAT TAPPET

FORD

Non Roller 1963-1995

221 255 (4.2L) 260 289 302 (5.0l) & Boss 302 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 3 High torque grind with mid-range and top end power. RPM Power Range: 2200 - 6000 RPM / Redline: 7000+	15321	289 302	282FDP	112°	282°	288°	238°	242°	.478"	.488"	84219
PRO-STREET / PERFORMANCE LEVEL 4 High revving with superior mid-range and top end power. RPM Power Range: 2500 - 7500 RPM / Redline: 7500+	15322	289 302	292FDP	110°	292°	298°	248°	252°	.499"	.512"	84219
COMPU-PRO / PERFORMANCE LEVEL 4 High torque, short oval camshaft. RPM Power Range: 2500 - 6000 RPM / Redline: 7000+	15313	289 302	274FDP	105°	274°	288°	242°	254°	.542"	.528"	84219
COMPU-PRO / PERFORMANCE LEVEL 5 Excellent high torque and mid-range power oval track grind. RPM Power Range: 3000 - 7000 RPM / Redline: 8000+	15314	289 302	288FDP	105°	288°	299°	252°	258°	.563"	.579"	84219
CUSTOM GROUND SOLID Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00115M	All cid	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84219	66915-16	68390X3-16	87048-16	86072-16	For rpm up to 7500 plus. Race Only, limited street use.
84219X980	66915X980-16	68390X3-16	87048-16	86072-16	For rpm up to 7500 plus. Race Only, limited street use.
84217LW980	66915LW980-16	68405-16	87048-16		Light Weight Lifter

Spring pressure:

68390X3-16 Seat: 1.800" @ 115 lbs / Nose: 1.300" @ 331 lbs / Coil bind: 1.110" (Machine work required, use 68985 cutter & 68972 pilot).

Note: If keeper height is longer or shorter than correct height ($\pm .050$ " tolerance), contact Crower for a recommendation.


Note: If using Boss heads contact the factory for special spring and retainer recommendations. Boss 302 engines employ a 1.73 rocker ratio, so the gross lifts will change for the Boss 302. To figure the correct gross lift for Boss 302 heads divide the gross lift listed by 1.6 (lobe lift) then multiply the lobe lift by 1.73 (Boss 302 rocker ratio).

Note: Camshafts for 289/302 cid engines can be used in 351W engines by changing the firing order to 1-5-4-2-6-3-7-8.

Some early Ford heads use 5/16 valve stems. Please specify when ordering as the above kits are designed for 11/32 stems.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050"). Valve timing events are available online at: www.crower.com

Measure the height from top of keeper groove to bottom of spring seat. Refer to the "height" column of your retainer and add or subtract the amount given from the original overall measurement.

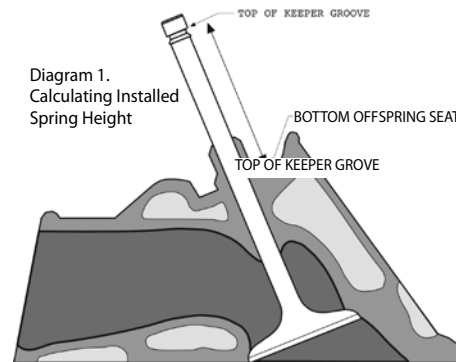

Note: If heads have been extensively modified (machined spring pockets, longer valves, etc.) contact Crower for proper spring, keeper, cup and retainer recommendations. Have your keeper/seat measurement available.

Mechanical 1963-1995

221 255 (4.2L) 260 289 302 (5.0L) & Boss 302 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STREET ROLLER / PERFORMANCE LEVEL 4 Excellent street/strip profile. RPM Power Range: 2500 to 6000 / Redline: 7500+	15415	289 302	280R	112°	280°	288°	232°	242°	.528"	.530"	
ULTRA-ACTION / PERFORMANCE LEVEL 5 High torque oval track and drag race profile. RPM Power Range: 3000 to 7000 / Redline: 7500+	15416	289 302	285R	106°	285°	292°	254°	260°	.597"	.578"	
ULTRA-ACTION / PERFORMANCE LEVEL 5 Fast 3/8 to 1/2 mile super oval track profile. RPM Power Range: 4000 to 7500 / Redline: 8000+	15417	289 302	292R	106°	292°	302°	256°	266°	.606"	.600"	
CUSTOM GROUND SOLID Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00115R	All cid	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .026" intake, .028" exhaust valve lash.

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84513	66215-16	68380X2-16	87048-16	86072-16	For rpm up to 8000 plus. Race only.
84510	66215-16	68390X2-16	87048-16	86072-16	

A. These high lift cams require longer stem valves and higher spring pressure. Please contact Crower for properly engineered valvetrain.

Spring pressure:

68390X3-16 Seat: 1.800" @ 115 lbs / Nose: 1.250" @ 355 lbs / Coil bind: 1.110"

(Machine work required, use 68985 cutter & 68972 pilot).

68380X2-16 Seat: 1.800" @ 197 lbs / Nose: 1.200" @ 470 lbs / Coil bind: 1.110"

(Machine work required, use 68985 cutter & 68972 pilot).

Note: If using Boss heads contact the factory for special spring and retainer recommendations. Boss 302 engines employ a 1.73 rocker ratio, so the gross lifts will change for the Boss 302. To figure the correct gross lift for Boss 302 heads divide the gross lift listed by 1.6 (lobe lift) then multiply the lobe lift by 1.73 (Boss 302 rocker ratio).

Note: Camshafts for 289/302 cid engines can be used in 351W engines by changing the firing order to 1-5-4-2-6-3-7-8.

Some early Ford heads use 5/16 valve stems. Please specify when ordering as the above kits are designed for 11/32 stems.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

Note: If exceeding 8000 rpm, high pressure springs and titanium retainers may be required. Contact Crower.

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

HYDRAULIC FLAT TAPPET

FORD

Non Roller

1969-1993 351W (5.8 L), 1982-1984 302 (5.0L), 302 SVO & 351 SVO

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Exhibits broad stump pulling power and torque. RPM Power Range: 1200 - 3800 / Redline: 5200+	15935	351	258H	112°	258°	264°	202°	210°	.438"	.446"	84125
POWER BEAST / PERFORMANCE LEVEL 4 Delivers impressive mid-range and top end power. Health sound. RPM Power Range: 1750 - 6000 / Redline: 6500	15903	351	298H	112°	298°	304°	224°	234°	.498"	.520"	84126
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power and mileage with extended rpm's. RPM Power Range: 1500 - 4000 / Redline: 5500+	15233	351	270HDP	112°	270°	276°	212°	218°	.475"	.489"	84126
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Hot street/strip grind with emphasis on upper bottom to top end power. RPM Power Range: 1800 - 4500 / Redline: 6000+	15236	351	280HDP	112°	280°	286°	220°	226°	.488"	.501"	84126
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Street/strip grind with strong mid to top end power. RPM Power Range: 2200 - 6000 / Redline: 6500+	15237	351	297HDP	112°	297°	308°	236°	242°	.538"	.534"	
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle. Explosive mid-range torque. RPM Power Range: 2500 - 6500	15254	351	84HDP	108°	284°	294°	224°	232°	.498"	.501"	84126
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Violent mid-range acceleration and torque. RPM Power Range: 2700 - 6500	15255	351	296HDP	108°	296°	304°	230°	246°	.506"	.506"	84126
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle. Explosive mid-range torque. RPM Power Range: 3000 - 6500	15256	351	304HDP	108°	304°	312°	242°	250°	.536"	.506"	84126
TURBOMASTER Intended for turbocharged hot street/strip and marine use. This cam offers extended rpm's on upper bottom and top. RPM Power Range: 2400 - 6500	15939	351	290HT	114°	290°	272°	226°	210°	.486"	.462"	84126
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00117H	All cid	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Keepers	Seat Cups	Remarks
84125	66015-16	68100X200-16	87048-16	86072-16		68951-16	6000 rpm max.
84125RM3	66015RM3-16	68100X200-16	87048-16	86072-16		68951-16	Rev-Max Lifter.
84113	66015-16	68155-16	87029-16		86071X1-16	68922-16	
84113X3	66015X3-16	68155-16	87029-16		86071X1-16	68922-16	CamSaver Lifter

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

Spring pressure:

68100X200-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 254 lbs / Coil bind: 1.030"

(Stock O.D., no machine work).

Note: To eliminate using seat cups, you can machine heads with cutter 68990 (84125) or 68985 (84126).

Valve timing events are available online at: www.crower.com

Non Roller 1969-1993

351W (5.8 L), 1982-1984 302 (5.0L), 302 SVO & 351 SVO

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 4 High revving profile with superior mid-range and top end power. RPM Power Range: 2500 - 6500 / Redline: 7000+	15359	351	282FDP	112°	282°	288°	242°	250°	.538"	.557"	84219
COMPU-PRO / PERFORMANCE LEVEL 5 High torque, high revving profile, perfect for short oval track applications. RPM Power Range: 3500 - 6500 / Redline: 7000+	15345	351	288FDP	105°	288°	299°	252°	258°	.562"	.579"	84219
COMPU-PRO / PERFORMANCE LEVEL 5 High torque, high revving profile, perfect for midsize oval track applications. RPM Power Range: 4000 - 7000 / Redline: 7500+	15346	351	296FDP	106°	296°	306°	260°	268°	.586"	.605"	84219
CUSTOM GROUND SOLID Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00117M	All	Refer to www.crower.com for camshaft recommendation								

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84218	66915-16	68100X200-16	87048-16	86072-16	7500 max. Limited street use.

Spring pressure:

68100X200-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 254 lbs / Coil bind: 1.030" (Machine work).

MECHANICAL ROLLER TAPPET

FORD

Mechanical

1969-1993 351W (5.8 L), 1982-1984 302 (5.0L), 302 SVO & 351 SVO

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 4 Perfect for street/strip. Emphasis on mid-range power. RPM Power Range: 2500 - 6500 / Redline: 7000+	15458	351	280R	112°	280°	288°	232°	242°	.528"	.530"	
PRO-STREET / PERFORMANCE LEVEL 5 Perfect for street/strip. Emphasis on mid-range and top end power. RPM Power Range: 3500 - 7000 / Redline: 7000+	15459	351	290R	110°	290°	296°	248°	252°	.558"	.547"	
COMPU-PRO / PERFORMANCE LEVEL 5 Perfect for street/strip. Emphasis on mid-range and top end, excellent drag profile. RPM Power Range: Varies on valve train, heads, manifold, etc... Steel Billet Cam Core	15445	351	285R	106°	285°	292°	254°	260°	.597"	.578"	
COMPU-PRO / PERFORMANCE LEVEL 5 Perfect for street/strip. Emphasis on mid-range and top end, excellent drag profile. RPM Power Range: Varies on valve train, heads, manifold, etc... Steel Billet Cam Core	15446	351	300R	107°	300°	310°	268°	274°	.680"	.669"	84509
COMPU-PRO / PERFORMANCE LEVEL 5 Perfect for street/strip. Emphasis on mid-range and top end, excellent drag profile. RPM Power Range: Varies on valve train, heads, manifold, etc... Steel Billet Cam Core	15447	351	309R	108°	309°	314°	276°	282°	.685"	.656"	84509
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00117R	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance. Please provide cylinder head flow numbers.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84513	66215-16	68380X2-16	87048-16	86072-16	8000+ rpm. Race only.

Spring pressure:

68380X2-16 Seat: 1.800" @ 197 lbs / Nose: 1.200" @ 470 lbs / Coil bind: 1.110" (Machine work required).

Ford HYDRAULIC FLAT TAPPET

**Non Roller 1970-1982
351C 351M 400 V8**

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.73 / 1.73		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Exhibits broad stump pulling power and torque. Good for stock replacements. RPM Power Range: 1200 - 3800 / Redline: 5200+	15965	351 400	258H	112°	258°	264°	200°	210°	.477"	.486"	84125
TORQUE BEAST / PERFORMANCE LEVEL 2 Delivers impressive mid-range and top end power. RPM Power Range: 2000 - 4800 / Redline: 6000+	15975	351 400	282H	112°	282°	292°	204°	214°	.486"	.512"	84125
POWER BEAST / PERFORMANCE LEVEL 3 Exhibits broad stump pulling power and torque. Good for stock replacements. RPM Power Range: 2200 - 5000 / Redline: 6200+	15973	351 400	292H	112°	292°	302°	214°	224°	.512"	.538"	84125
ULTRA BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. RPM Power Range: 2200 - 5000 / Redline: 6200+	15966	351 400	278H	112°	278°	284°	220°	226°	.529"	.540"	84129
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power and mileage. Provides excellent low end and mid-range power with extended rpm's for spirited offroad use. RPM Power Range: Idle - 4000 / Redline: 5500+	15240	351 CID	270HDP	112°	270°	276°	210°	220°	.486"	.510"	84125
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Intended for the hot marine/strip application, these cams offer an extended rpm range with upper bottom and top end power with strong emphasis on mid-range. RPM Power Range: 1800 - 4500 / Redline: 6000+	15243	400 CID	284HDP	112°	284°	290°	228°	234°	.557"	.574"	84129
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Dual purpose hot street/strip camshaft. Delivers strong mid-range and top end torque and horsepower. RPM Power Range: 2000 - 6000 / Redline: 6500	15244	351 CID	297HDP	112°	297°	308°	234°	240°	.578"	.578"	84129
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle with explosive upper bottom and mid-range torque. RPM Power Range: 2500 - 6000+	15266	351 CID	280HDP	108°	280°	288°	222°	230°	.540"	.540"	84129
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Strong idle with violent mid-range acceleration and torque. RPM Power Range: 2700 - 6500	15267	351 CID	290HDP	108°	290°	302°	238°	248°	.536"	.543"	84129
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Very rough idle with violent mid-range and top end acceleration and power. RPM Power Range: 3000 - 6500	15268	351 400	302HDP	108°	302°	312°	244°	248°	.548"	.545"	84129
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00114	ALL CID	Refer to www.crower.com for camshaft recommendation								

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Seat Cups	Remarks
84125	66015-16	68100X200-16	87048-16	86072-16	68951-16	6000 rpm max. Limited street use.
84125X3	66015X3-16	68100X200-16	87048-16	86072-16	68951-16	CamSaver Lifter. 6000 rpm max. Limited street use.
84129	66015-16	68390X3-16	87048-16	86072-16	68931-16	6500 rpm max. Limited street use.
84129X3	66015X3-16	68390X3-16	87048-16	86072-16	68931-16	CamSaver Lifter. 6500 rpm max. Limited street use.
84129RM3	66015RM3-16	68390X3-16	87048-16	86072-16	68931-16	Rev-Max Lifter.

Spring pressure:

68100X200-16 Seat: 1.800" @ 107 lbs / Nose: 1.300" @ 254 lbs / Coil bind: 1.030"

(Stock O.D., no machine work).

68390X3-16 Seat: 1.850" @ 96 lbs / Nose: 1.350" @ 331 lbs / Coil bind: 1.110" (Stock O.D.)

Note: To eliminate using seat cups, you can machine heads with cutter 68990 (84125) or 68985 (84126).

Valve timing events are available online at: www.crower.com

MECHANICAL FLAT TAPPET

FORD

Non Roller 1970-1982 351C 351M 400 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.73 / 1.73		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 3 High torque grind with mid-range and top end power. RPM Power Range: 2200 - 5750 / Redline: 6000	15388	351 400	282FDP	112°	282°	288°	238°	242°	.524"	.533"	84225
PRO-STREET / PERFORMANCE LEVEL 4 High revving with superior mid-range and top end power. RPM Power Range: 2200 - 6000 / Redline: 6250+	15389	351 400	292FDP	112°	292°	298°	246°	250°	.541"	.548"	84225
COMPU-PRO / PERFORMANCE LEVEL 5 High torque, short oval camshaft. RPM Power Range: 3500 - 6500 / Redline: 7000+	15380	351 400	288FDP	105°	288°	294°	254°	258°	.569"	.580"	84226
COMPU-PRO / PERFORMANCE LEVEL 5 Great high torque oval track grind with emphasis on mid-range power. RPM Power Range: 4000 - 7000 / Redline: 7500+	15381	351 400	298FDP	106°	298°	306°	262°	268°	.592"	.607"	84226
COMPU-PRO / PERFORMANCE LEVEL 5 Upper mid-range and top end power for extra pop above 7000 rpm. RPM Power Range: 4500 - 7500 / Redline: 8000+	15382	351 400	311FDP	107°	311°	316°	274°	282°	.618"	.638"	84226
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00114M	351 400	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84225	66915-16	68100X200-16	87048-16	86072-16	68951-16 Solid Lifter. 6500 rpm max. Daily Street use.
84225X980	66915X980-16	68100X200-16	87048-16	86072-16	68951-16 CoolFace Solid Lifter. 6500 rpm max. Daily Street use.
84225LW980	66915LW980-16	68100X200-16	87048-16	86072-16	68951-16 Light Weight Lifter. 6500 rpm max. Daily Street use.
84226	66915-16	68390X3-16	87048-16	86072-16	68951-16 Solid Lifter. 7500 rpm max. Limited street use.
84226X980	66915X980-16	68390X3-16	87048-16	86072-16	68951-16 CoolFace Solid Lifter. 7500 rpm max. Limited street use.

For severe duty applications, Crowder recommends using our solid lifter with the added "CoolFace oiling option".

Spring pressure:

68390X3-16 Seat: 1.825" @ 106 lbs / Nose: 1.325" @ 342 lbs / Coil bind: 1.110" (Seat cups eliminate machine work).

68100X200-16 Seat: 1.825" @ 100 lbs / Nose: 1.225" @ 247 lbs / Coil bind: 1.030" (Seat cups eliminate machine work).

Note: Some stock cylinder heads come with multi-groove keepers on the exhaust. If so, you must order retainer 87049-16 which is designed to fit multi-groove keepers. See retainer specs or contact Crowder.

Note: If you machine heads to eliminate use of spring cups, see seat cutters or contact Crowder.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

Mechanical 1970-1982 351C 351M 400 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range		Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.73 / 1.73		Suitable Component Kit
			Low RPM	Top RPM			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STREET ROLLER / PERFORMANCE LEVEL 4 Excellent street/strip profile. RPM Power Range: 2500 - 6000 / Redline: 7500+	15480	ALL CID	2500	7500+	284R	110°	275°	284°	234°	244°	.570"	.572"	84521
ULTRA-ACTION / PERFORMANCE LEVEL 5 High torque oval track profile. RPM Power Range: 3000 - 7000 / Redline: 7500+	15481	ALL CID	3000	7500+	285R	106°	285°	292°	252°	260°	.645"	.626"	84521
ULTRA-ACTION / PERFORMANCE LEVEL 5 Fast 3/8 to 1/2 mile super oval track profile. RPM Power Range: 4000 - 7500 / Redline: 8000+	15482	ALL CID	4000	8000+	297R	106°	297°	304°	262°	268°	.662"	.636"	84521
ULTRA-ACTION / PERFORMANCE LEVEL 5 Mid-range and top end drag profile. RPM Power Range: 5200 - 8000 / Redline: 8250+	15483	ALL CID	5200	8250+	304R	106°	304°	312°	270°	276°	.690"	.672"	84521
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00114R	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>										
CUSTOM GROUND MECHANICAL ROLLER Special order roller lifter camshaft ground to your specifications. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00060	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>										

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84521	66218-16	68363-16	87062-16	86072-16	86107X1-16 8000 rpm. Race only.

Spring pressure:

68363-16 Seat: 1.900" @ 212 lbs / Nose: 1.200" @ 560 lbs / Coil bind: 1.100" (Machine work, use cutter 68992*).

Optional spring (race only):

68555X1-16 Seat: 2.000" @ 239 lbs / Nose: 1.100" @ 870 lbs / Coil bind: 1.020" (Machine work, use cutter 68980*).

* Machine work required

Note: For high performance applications, we recommend using single groove valves and valve stem keepers. The above kits are designed for 11/32 single groove valve stems and 7° and 10° single groove keepers. Race applications must use .100" long valves.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

AVAILABLE CAM JOURNAL SIZES

Description
Stock Ford Bearing Size - Journal 1 = 2.080", 2 = 2.065", 3 = 2.050", 4 = 2.035", 5 = 2.020"
Large Roller Bearing - Journal 1, 2, 3, 4 = 2.165", Journal 5 = 1.968"
Roller Bearing (Ford Motorsport / SVO) - All Journals = 2.051"
Babbit Bearing (Standard SVO) - All Journals = 2.081"

To order the above cores specify #00003. 60mm is available on special order basis only (#00060). Special Firing Orders also available.

CROWER recommends using HIPPO or Enduramax roller lifters in high RPM and high spring pressure applications.

HYDRAULIC FLAT TAPPET FORD

Non Roller 1963-1976

332 352 360 390 406 410 427 428 V8 FE

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.76 / 1.76		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Exhibits broad stump pulling power and torque. RPM Power Range: 1200 - 3800 / Redline: 5200+	16915	332 390	268H	112°	268°	274°	204°	210°	.484"	.496"	840165
POWER BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. Healthy sound. Economical price. RPM Power Range: 1200 - 3800 / Redline: 5200+	16903	390 428	292H	112°	292°	302°	214°	224°	.521"	.547"	84116
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Intended for the hot marine/strip application, these cams offer extended rpm range with emphasis on upper bottom to top end power with strong mid-range. RPM Power Range: 1800 - 4500 / Redline: 6000+	16241	390 428	280HDP	112°	280°	286°	222°	228°	.538"	.552"	84116
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Dual purpose hot street/strip camshaft. Delivers strong mid-range and top end torque and horsepower. RPM Power Range: 2000 - 6000 / Redline: 6500	16242	332 352	284HDP	112°	284°	290°	228°	230°	.566"	.587"	84116
	16243	390 428	297HDP	112°	297°	308°	236°	242°	.591"	.588"	84116
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle. Explosive mid-range torque and power. RPM Power Range: 2500 - 6000	16255	390 428	228HDP	108°	280°	288°	224°	232°	.549"	.550"	84116
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Violent mid-range acceleration and torque. RPM Power Range: 2700 - 6500	16256	390 428	290HDP	108°	290°	302°	238°	248°	.550"	.557"	84116
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00116H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
840165	66016-16	68302X2-16	87063M-16		Hydraulic. 6000 plus rpm. Daily street use.
84116	66016-16	68340-16	87063-16	86071-16	Hydraulic. 6500 plus rpm. Limited street use.
84116RM3	66016RM-16	68340-16	87063-16	86071-16	Rev-Max Lifter, 6500 plus rpm. Limited street use.

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

For severe duty applications, Crower recommends using our solid lifter with the added "coolface oiling option". **Specify X980 after corresponding component kit.**

Spring pressure:

68302X2-16 Seat: 1.850" @ 110 lbs / Nose: 1.350" @ 284 lbs / Coil bind: 1.150" (Stock O.D., no machine work).

68340-16 Seat: 1.900" @ 119 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080" (Machine work, use cutter 68986*).

* Machine work required, specify 38 pilot shaft when ordering.

Deep Seat Shell design lifter: Crower deep seated, solid lifters (Deep Seat Shell 66925-16) and pushrods (70138-16) insures proper valve train geometry.

Valve timing events are available online at: www.crower.com

Ford MECHANICAL FLAT TAPPET

Non Roller 1963-1976

332 352 360 390 406 410 427 428 V8 FE

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.76 / 1.76		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 4 High revving with superior mid-range and top end power. RPM Power Range: 2500 - 6000 / Redline: 6500+	16357	390 428	278FDP	114°	278°	284°	240°	243°	.530"	.535"	84316
COMPU-PRO / PERFORMANCE LEVEL 5 High torque, short oval camshaft. RPM Power Range: 2500 - 6000 / Redline: 7000+	16331	390 428	290FDP	108°	290°	298°	247°	252°	.551"	.565"	84316
COMPU-PRO / PERFORMANCE LEVEL 5 Great high torque mid-range oval track grind. RPM Power Range: 3000 - 7000 / Redline: 7500+	16332	390 428	300FDP	108°	300°	310°	255°	260°	.579"	.593"	84316
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00116M	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84316	66916-16	68340-16	87063-16	86071-16	Solid. 7500 plus rpm.

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

For severe duty applications, Crower recommends using our solid lifter with the added "coolface oiling option". **Specify X980 after corresponding component kit.**

Spring pressure:

68340-16 Seat: 1.900" @ 119 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080" (Machine work, use cutter 68986*).

* Machine work required, specify 38 pilot shaft when ordering.

Deep Seat Shell design lifter: Crower deep seated, solid lifters (Deep Seat Shell 66925-16) and pushrods (70138-16) insure proper valve train geometry.

Valve timing events are available online at: www.crower.com

MECHANICAL ROLLER TAPPET

Mechanical 1963-1976

332 352 360 390 406 410 427 428 V8 FE

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.76 / 1.76		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 4 High revving with superior mid-range and top end power. RPM Power Range: 3750 - 7000 / Redline: 7500+	16463	390 428	278FDP	114°	278°	284°	240°	243°	.530"	.535"	84524 84525
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00116R	ALL CID	Refer to www.crower.com for camshaft recommendation								

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Note: These cams use .026" intake, .028" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84524	66216-16	68385X2-16	87063-16	86071-16	7000 rpm. Street use.
84525	66216-16	68363-16	87063-16	86071-16	7500 plus rpm.

Spring pressure:

68385X2-16 Seat: 1.900" @ 166 lbs / Nose: 1.300" @ 422 lbs / Coil bind: 1.100" (Machine work, use cutter 68979*).

68363-16 Seat: 1.900" @ 212 lbs / Nose: 1.200" @ 560 lbs / Coil bind: 1.100" (Machine work, use cutter 68992*).

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Note: If exceeding 8000 rpm, high pressure springs and titanium retainers may be required. See spring and retainer specs or contact Crower for proper recommendations.

Valve timing events are available online at: www.crower.com

HIPPO Note: For severe duty roller lifter applications, we highly recommend using our roller lifters with Hippo "High Pressure Pin Oiling". Specify "H" in the part number.
Ex. 66290X874H-16

HYDRAULIC FLAT TAPPET FORD

Non Roller 1968-1994
370 429 460 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.73 / 1.73		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Exhibits broad stump pulling power and torque. RPM Power Range: 1200 - 3800 / Redline: 5200+	22915	370 460	268H	112°	268°	274°	203°	210°	.481"	.488"	840225
POWER BEAST / PERFORMANCE LEVEL 3 Low to mid-range torque for daily drivability. Economical price. RPM Power Range: 1200 - 3800 / Redline: 5200+	22903	429 460	293H	112°	268°	286°	210°	226°	.510"	.536"	840225
ULTRA BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. Economical price. RPM Power Range: 2000 - 4800 / Redline: 6200+	22917	460 CID	268H	112°	303°	308°	224°	234°	.538"	.562"	84122
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power and mileage. Provides excellent low end and mid-range power with extended rpm's for spirited offroad use. RPM Power Range: 1500 - 4000 / Redline: 5500+	22240	460 CID	276HDP	112°	274°	281°	215°	221°	.527"	.535"	
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Intended for the hot marine/strip application, these cams offer extended rpm range with emphasis on upper bottom to top end power with strong mid-range. RPM Power Range: 1800 - 4500 / Redline: 6000+	22241	370 429	280HDP	112°	280°	286°	220°	226°	.524"	.541"	
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Dual purpose hot street/strip camshaft. Delivers strong mid-range and top end torque and horsepower. RPM Power Range: 2000 - 6000 / Redline: 7000+	22243	370 429	297HDP	112°	297°	308°	237°	240°	.580"	.576"	84122
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Violent mid-range acceleration and torque. RPM Power Range: 2700 - 6700+	22206	429 460	290HDP	108°	290°	302°	236°	245°	.535"	.545"	84122
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call with all engine data incl. head flow data, valve sizes, operating power range, etc when ordering.	00122H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
840225	66015-16	68302X2-16	87062S-16	86072-16	Hydraulic. 6500 max rpm.
84022RM3	66015RM3-16	68302X2-16	87062-16	86072-16	Rev-Max Lifter
84122	66015-16	68340-16	87062-16	86072-16	Hydraulic. 6500 max rpm.
84122X3	66015X3-16	68340-16	87062-16	86072-16	CamSaver Hydraulic Lifter. 6500 max rpm.

Spring pressure:

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 355 lbs / Coil bind: 1.080"
 (Machine work required).

68302X2-16 Seat: 1.850" @ 110 lbs / Nose: 1.350" @ 284 lbs / Coil bind: 1.300"
 (Machine work required).

Valve timing events are available online at: www.crower.com

For engines that were originally equipped with a hydraulic flat tappet cam, retro fit hydraulic roller cams & kit are available, call CROWER for details.

For severe duty applications, Crower recommends using our solid lifter with the added "coolface oiling option". Specify X980 after corresponding component kit.

ACCESSORIES

Part No.	Description
73615-16	Rocker arms (1.73) 7/16
73619-16	Rocker arms (1.8) 7/16
76535	Timing gear set (1972-up)

Note: If using guide plates, heat-treated pushrods (RC60 series) are required. See pushrod section or contact Crower.

Non Roller 1968-1994

370 429 460 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	RPM Range				Lobe Center	Advertised Duration		Duration @ .050"		Lobe Lift		Gross Lift 1.73 / 1.73		Suitable Component Kit
			Low RPM	Peak Torque	Peak HP	Top RPM		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
	22173	429	2100	3600	5200	5700	111°	280°	287°	219°	225°	.306"	.303"	.530"	.524"	84122
		460	1800	3300	4800	5300										
	22175	429	2500	4000	5600	6100	110°	298°	303°	236°	241°	.332"	.328"	.574"	.567"	84122
		460	2300	3800	5200	5700										
	22176	429	2700	4200	5800	6300	108°	304°	310°	242°	248°	.344"	.340"	.595"	.588"	84122
		460	2500	4000	5400	5900										
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00122H	ALL CID	Refer to www.crower.com for camshaft recommendation													

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84122	66015-16	68340-16	87062-16	86072-16	Hydraulic. 6500 max rpm.
84122X3	66015X3-16	68340-16	87062-16	86072-16	CamSaver Hydraulic Lifter. 6500 max rpm.
84122RM3	66015RM3-16	68340-16	87062-16	86072-16	Rev-Max Lifter

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface.

Spring pressure:

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 355 lbs / Coil bind: 1.080" (Machine work, use cutter 68986).

Valve timing events are available online at: www.crower.com

For engines that were originally equipped with a hydraulic flat tappet cam, retro fit hydraulic roller cams & kit are available, call CROWER for details.

ACCESSORIES

Part No.	Description
73615-16	Rocker arms (1.73) 7/16
73619-16	Rocker arms (1.8) 7/16
76535	Timing gear set (1972-up)

Note: If using guide plates, heat-treated pushrods (RC60 series) are required. See pushrod section or contact Crower.

390 SERIES MECHANICAL FLAT TAPPET

FORD

Non Roller 1968-1994
370 429 460 V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.73 / 1.73		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA BEAST / PERFORMANCE LEVEL 4 Delivers impressive mid-range and top end power. RPM Power Range: 2750 - 6500 / Redline: 7000+	22360	429 460	317F	112°	294°	304°	244°	254°	.588"	.614"	84322
PRO-STREET / PERFORMANCE LEVEL 4 High revving with superior mid-range top end power. RPM Power Range: 2500 - 6000 / Redline: 6500+	22355	429 460	278FDP	110°	278°	284°	238°	241°	.519"	.524"	84322
COMPU-PRO / PERFORMANCE LEVEL 5 High torque, short oval camshaft. RPM Power Range: 2500 - 6000 / Redline: 7000+	22356	429 460	290FDP	108°	290°	298°	247°	251°	.538"	.552"	84322
COMPU-PRO / PERFORMANCE LEVEL 5 Great high torque profile with mid-range power. RPM Power Range: 3000 - 7000 / Redline: 7400+	22357	429 460	300FDP	108°	300°	310°	255°	255°	.569"	.578"	84322
COMPU-PRO / PERFORMANCE LEVEL 5 Strong mid-range/top end profile. RPM Power Range: 4000 - 7250 / Redline: 7500+	22358	428 460	312FDP	108°	312°	318°	263°	269°	.590"	.602"	84322
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00122M	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00060	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84322	66915-16	68340-16	87062-16	86072-16	Solid. 7500 plus rpm.
84322X980	66915X980-16	68340-16	87062-16	86072-16	CoolFace Solid Lifter. 7500 plus rpm.
84322LW980	66915LW980-16	68340-16	87062-16	86072-16	Light Weight Lifter

For severe duty applications, Crower recommends using our solid lifter with the added "**coolface oiling option**".

Spring pressure:

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 355 lbs / Coil bind: 1.080"

(Machine work, use cutter 68986).

Optional spring (race only):

68385X2-16 Seat: 1.900" @ 166 lbs / Nose: 1.300" @ 422 lbs / Coil bind: 1.100"

(Machine work, use cutter 68979).

Note: Screw-in rocker studs should be used when installing solid lifter camshafts to insure proper valve adjustment.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

HONDA/ACURA B SERIES VTEC-TWIN CAM

B16A / B18C / B17A - TWIN CAM

Description	Part Number	C.I.D. Group	Advertised Duration (.010")		Duration @ .050"		Lobe Lift		Gross Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STOCK CIVIC Si (1999-2000)	Civic Si	Mid	284°	282°	224°	220°	.265"	.244"	.412"	.379"	Stock
STOCK GSR (94-up)	GSR	Mid	290°	292°	236°	224°	.273"	.244"	.423"	.378"	Stock
JDM SPEC CIVIC TYPE R (98-up)	CTR	Mid	294°	305°	240°	232°	.289"	.269"	.447"	.416"	Stock
STAGE 1 Performance oriented street use. CTR+ profile that will work with Type R valve springs. Also works with mild turbo. RPM Power Range: 1500 - 8500+	63401-2	Mid Sec Pri	296° 278° 259°	306° 288° 230°	242° 200° 176°	234° 201° 179°	.290" .214" .141"	.270" .204" .131"	.449" .321" .204"	.418" .306" .190"	84161 84161S
STAGE 2 Forced Induction Special. Designed specifically for turbo/blower. Features short duration, low overlap and high valve lift. Requires kit #84161. RPM Power Range: 1500 - 9500+. Horsepower varies w/boost.	63401T-2	Mid Sec Pri	308° 278° 259°	309° 288° 230°	233° 200° 176°	235° 201° 179°	.301" .214" .141"	.287" .204" .131"	.466" .321" .204"	.445" .306" .190"	84161 84161S
STAGE 2 Stock idle lobes (sec/pri) with #63402 VTEC (mid) lobes. Recommend #84163 spring unless stock rev limit. 18+ hp over B18C. RPM Power Range: 1800 - 9250+. 18+ HP over built B18C.	63402A-2	Mid Sec Pri	311° 278° 259°	308° 288° 230°	255° 200° 176°	248° 201° 179°	.301" .214" .141"	.301" .204" .131"	.466" .321" .204"	.466" .306" .190"	84161S
STAGE 2 - 3/4 Race Road/Rally Race and Street/Strip. Requires #84161 kit with rev limiter mod. V-tec & ECU tuning req. 20+ hp over built B18C. RPM Power Range: 2500 - 9500+.	63402-2	Mid Sec Pri	311° 284° 269°	308° 273° 259°	255° 215° 196°	248° 213° 193°	.301" .243" .181"	.301" .234" .174"	.466" .364" .262"	.466" .351" .252"	84161 84161S
STAGE 3 - Full Race, All Motor / Turbo Drag Race and rough Street/Strip. Requires #84161 kit with modified revs. 22+ over built B18C. RPM Power Range: 1200 - 9750+	63403-2	Mid Sec Pri	305° 282° 291°	305° 284° 283°	263° 216° 198°	255° 214° 199°	.302" .243" .215"	.302" .234" .203"	.468" .364" .311"	.468" .351" .294"	84161 84161S
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary applications.	00063-2		Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Duration figures are taken at the valve. Gross lift calculated by using the following rocker ratios: Mid (VTEC) - 1.55, Secondary - 1.50, Primary - 1.45.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84161	68188-16	87093-16	Titanium retainer. High pressure spring for rpm over 9500
84161D	68188-16	87093D-16	Titanium retainer. High press. spring, high lift cams (+.060"). Mach work req.
84161DS	68188-16	87093DS-16	Steel retainer. High press. spring, high lift cams (+.060"). Mach work req.
84161S	68188-16	87093S-16	Steel retainer for street use.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

ADJUSTABLE SPROCKETS

Crower's new cam sprockets are made from premium 6061-T6 billet aluminum and incorporate a four bolt ARP® fastening system to prevent the slippage found in other brands. The lightweight design (327g) reduces unwanted harmonics which could cause valve train failure. To have the full potential of your cam performance, cam sprockets are required.

***Note: Some machine work may be required on the underside of rocker to allow retainer when using 87093D retainer to allow clearance.**

86115-16 Premium steel billet valve keepers (locks) available in standard or +.050" inst ht (#86115X1-16).

86115T-16 Premium titanium billet valve keepers (locks) available in standard installed height. Half the weight of steel.

ACCESSORIES

Part No.	Description
86063-2	Upgraded cam bolts (set 2) - CROWER strongly recommends these bolt for all cams
86054BC	Adjustable Cam Sprocket (1 only). 2 required
97400I-8	Stainless steel valves - 33 mm head dia (8 only int)
97400E-8	Stainless steel valves - 28 mm head dia (8 only exh)
97401I-8	Stainless steel valves - 33.5 mm head dia (8 only int)
97401E-8	Stainless steel valves - 28.5 mm head dia (8 only exh)
97402I-8	Stainless steel valves - 34 mm head dia (8 only int)



H22 SERIES VTEC-TWIN CAM HONDA/ACURA

FEATURES STRONGER CORE DESIGN

Description	Part Number	C.I.D. Group	Advertised Duration (.010")		Duration @ .050"		Lobe Lift		Gross Lift		Suitable Component Kit	
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust		
STOCK Type SH	SH	Mid	288°	308°	231°	234°	.289"	.268"	.448"	.415"	Stock	
STOCK JDM Type S	JDM	Mid	306°	310°	230°	230°	.303"	.283"	.469"	.438"	Stock	
STAGE 1 Proven performer in all motor applications on the street. No ECU mods or aftermarket valve springs required. RPM Power Range: Idle - 7500+	63421-2	Mid Sec Pri	307° 214° 210°	318° 285° 276°	238° 183° 175°	234° 191° 183°	.296" .215" .179"	.276" .208" .169"	.459" .323" .260"	.428" .312" .245"	Stock	
STAGE 2 - Forced Induction Special Excellent for turbo or supercharged applications. Features short duration and high lift. Requires spring #68184-16. RPM Power Range: Idle - 8000+	63421T-2	Mid Sec Pri	308° 214° 210°	309° 285° 276°	233° 183° 175°	235° 191° 183°	.299" .215" .179"	.289" .208" .169"	.463" .323" .260"	.448" .312" .245"	84167 84167S	
STAGE 2 Stock idle lobes (sec/pri) with similar #63422 VTEC (mid) lobes. Recommend kit #84167 unless stock revs. RPM Power Range: Idle - 8000	63422A-2	Mid Sec Pri	311° 214° 210°	308° 285° 276°	255° 183° 175°	248° 191° 183°	.302" .215" .179"	.301" .208" .169"	.468" .323" .260"	.467" .312" .245"	84167 84167S	
STAGE 2 - 3/4 Race - All Motor / Turbo Road/Rally Race and Street/Strip. Most popular profile. Requires #84167 kit. V-tec & ECU tuning recommended. RPM Power Range: 1000 - 8000+	63422-2	Mid Sec Pri	311° 280° 278°	308° 289° 256°	255° 199° 198°	248° 201° 199°	.302" .216" .196"	.301" .204" .182"	.468" .324" .284"	.467" .306" .263"	84167 84167S	
STAGE 3 - Full Race, All Motor / Turbo Drag Race and rough Street/Strip. Requires #84167 kit. Not for inexperienced tuner. Head Mods, V-tec & ECU tuning req. RPM Power Range: 1100 - 8200+	63423-2	Mid Sec Pri	305° 267° 262°	305° 269° 254°	263° 216° 198°	255° 210° 193°	.302" .243" .184"	.302" .236" .176"	.468" .365" .267"	.468" .354" .255"	84167 84167S	
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary applications.	00065-2	Mid Sec Pri	Refer to www.crower.com for camshaft recommendation									

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Duration figures are taken at the valve.
Complete dyno figures available online at www.crower.com. Gross lift calculated by using the following rocker ratios: Mid Lobe (VTEC) - 1.55, Secondary Lobe - 1.50, Primary Lobe - 1.45.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84167	68184-16	87093D-16	Titanium retainer is +.060" inst. ht. Rocker machining may be required.
84167S	68184-16	87093DS-16	Steel retainer, for daily street use.

Spring pressure:

68184-16 Seat: 1.460" @ 89 lbs / Nose: 0.950" @ 220 lbs / Coil bind: 0.790" (No machine work required).

Optional spring:

Note: Some machine work may be required on the underside of rocker to allow retainer clearance.

86115-16 Premium steel billet valve keepers (locks) available in standard or +.050" inst ht (#86115X1-16).

86115T-16 Premium titanium billet valve keepers (locks) available in standard installed height. Half the weight of steel.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

ADJUSTABLE SPROCKETS

Crower's new cam sprockets are made from premium 6061-T6 billet aluminum and incorporate a four bolt ARP® fastening system to prevent the slippage found in other brands. The lightweight design (327g) reduces unwanted harmonics which could cause valve train failure. To obtain full potential of your cam performance, cam sprockets are required.

STAINLESS STEEL VALVES

Made from the highest grade stainless steel, this new Crower valve is a must for high horsepower, high boost and high rpm applications. The exclusive "Pro Flo" head design delivers a significant increase in cylinder head flow figures, while the tip area is hardened to RCS0, including past the critical keeper groove area for added strength. Fully CNC machined and swirl polished to insure that you will get the best performance valve available on the market. Choose from standard, 1/2 mm, 1 mm and 2 mm oversize. Titanium valves also available. Contact Crower for availability. When ordering sprockets, be sure to specify two.

ACCESSORIES

Part No.	Description
86054H	Adjustable Cam Sprocket (1 only). All black. 2 required
97415I-8	Stainless steel valves - 35 mm head dia (8 only int)
97415E-8	Stainless steel valves - 30 mm head dia (8 only exh)
97416I-8	Stainless steel valves - 35.5 mm head dia (8 only int)
97416E-8	Stainless steel valves - 30.5 mm head dia (8 only exh)
97417I-8	Stainless steel valves - 36 mm head dia (8 only int)
97417E-8	Stainless steel valves - 31 mm head dia (8 only int)
97418I-8	Stainless steel valves - 37 mm head dia (8 only int)

Note: When ordering valves, be sure to specify one set int and one set exh.

Note: When ordering sprockets, be sure to specify two.

Note: Valve guides may require honing to size. All Crower VTEC valves are 5.5mm stem diameter. Factory guides may vary depending on specific engine.

HONDA/ACURA RSX-Type S (USD M) CIVIC Type R (JDM)

New Improved Cam Core Technology

K20A2, K20Z - VTEC

Description	Part Number	C.I.D. Group	Advertised Duration (.010")		Duration @ .050"		Lobe Lift		Gross Lift 1.75 / 1.75		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ACURA RSX-Type S (2001-up)	Stock	Mid	302°	305°	219°	215°	.276"	.246"	.483"	.431"	
ACURA TSX (2004)	Stock	Mid	310°	302°	210°	212°	.258"	.259"	.451"	.453"	
STAGE 1 Performance oriented street. Hotter than JDM Type R profile. Works with stock springs if no mods to factory rev limiter. RPM Range: Idle - 9000	63451-2	Mid Sec Pri	300° 245° 245°	290° 245° 245°	229° 176° 176°	226° 176° 176°	.274" .173" .173"	.272" .173" .173"	.480" .294" .294"	.476" .294" .294"	Stock 84164 84164S
STAGE 2 - Forced Induction Special Designed for turbo/supercharger. Features short duration, low overlap and high lift. Requires #84164 kit & ECU mods. Horsepower varies w/boost & mods. RPM Range: Idle - 9500+	63451T-2	Mid Sec Pri	296° 245° 245°	296° 245° 245°	220° 176° 176°	220° 176° 176°	.297" .173" .173"	.297" .173" .173"	.519" .294" .294"	.519" .294" .294"	84164 84164S
STAGE 2 - 3/4 Race - All Motor / Turbo Road/Rally and Street/Strip. Requires #84164 spring kit and compatible ECU upgrade. Slight lobe at idle to be expected. RPM Range: 1000 - 9500	63452-2	Mid Sec Pri	304° 250° 250°	300° 250° 250°	234° 180° 180°	228° 180° 180°	.294" .190" .190"	.276" .190" .190"	.514" .323" .323"	.483" .323" .323"	84164 84164S
STAGE 3 - Full Race, All Motor / Turbo Drag Race and radical Street/Strip. Requires #84164 spring Not for inexperienced tuner. Head Mods, V-tec & ECU tuning req. RPM Range: 1200 - 10,000	63453-2	Mid Sec Pri	310° 256° 256°	304° 256° 256°	247° 185° 185°	244° 185° 185°	.303" .207" .207"	.282" .207" .207"	.530" .352" .352"	.494" .352" .352"	84164 84164S
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary applications.	00066-2	Mid Sec Pri	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Note: The above cams will not fit the base RSX or Civic Si (USD M 2001-up) models with the K20A3 engine. Cams for those applications will be available shortly. Duration figures are taken at the cam. Gross lift calculated by using the following rocker ratios: Mid (VTEC) - 1.75, Secondary - 1.7, Primary - 1.7.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84164	68189-16	87094-16	Titanium retainer intended for race and limited street
84164S	68189-16	87094S-16	Steel retainer, for daily street use.

Spring pressure:

68189-16 Seat: 1.590" @ 85 lbs / Nose: 1.110" @ 261 lbs / Coil bind: 1.030" (No machine work required).

Note: Crower titanium retainers weigh 7.5 grams vs. 12 grams stock steel. Crower steel retainers weigh 10.5 grams.

86115-16 Premium steel billet valve keepers (locks) available in standard installed height.

86115T-16 Premium titanium billet valve keepers (locks) available in standard installed height. Half the weight of steel.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

ACCESSORIES

Part No.	Description
97410I-8	Stainless steel valves - 35 mm head dia (8 only int)
97410E-8	Stainless steel valves - 30 mm head dia (8 only exh)
97411I-8	Stainless steel valves - 35.5 mm head dia (8 only int)
97411E-8	Stainless steel valves - 30.5 mm head dia (8 only exh)
97412I-8	Stainless steel valves - 36 mm head dia (8 only int)
97412E-8	Stainless steel valves - 31 mm head dia (8 only ext)

Note: When ordering valves, be sure to specify one set int and one set exh.

STAINLESS STEEL VALVES

Made from the highest grade stainless steel, this new Crower valve is a must for high horsepower, high boost and high rpm applications. The exclusive "Pro Flo" head design delivers a significant increase in cylinder head flow figures, while the tip area is hardened to RC50, including past the critical keeper groove area for added strength. Fully CNC machined and swirl polished to insure that you will get the best performance valve available on the market. Choose from standard, 1/2 mm, 1 mm and 2 mm oversize. Titanium valves also available. Contact Crower for availability.

B18A/B SERIES NON-VTEC TWIN-CAM HONDA/ACURA

New Improved Cam Core Technology

Description	Part Number	Advertised Duration @ .010"		Duration @ .050"		Lobe Lift		Gross Lift 1.75 / 1.75		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (B18B - LS)	Stock	220° 265°	Lobe Valve 267°	222° 194°	185° 196°	Lobe Valve 196°	187° 196°	.225" .217"	.394" .380"	Stock
STAGE 1 Street use with emphasis on mid range power. Slight lobe at idle. RPM Power Range: Idle - 7250+	62402-2	245° 290°	Lobe Valve 296°	251° 203°	193° 203°	Lobe Valve 208°	198° 208°	.238" .228"	.417" .399"	Stock
STAGE 2 - Forced Induction Special Turbo Special. Short duration and high lift grind. Requires #84162 kit. RPM Power Range: 900 - 8000+	62402T-2	256° 301°	Lobe Valve 301°	256° 203°	193° 203°	Lobe Valve 203°	193° 203°	.268" .268"	.469" .469"	84162 84162S
STAGE 2 Street/Strip package. Most popular N/A profile. Requires #84162 kit. RPM Power Range: 1000 - 8000+	62403-2	250° 295°	Lobe Valve 295°	250° 221°	211° 221°	Lobe Valve 220°	210° 220°	.241" .235"	.422" .411"	84162 84162S
STAGE 3 - 3/4 Race Recommended for mostly strip use in N/A applications. Rough idle. RPM Power Range: 1100 - 8200+	62404-2	263° 308°	Lobe Valve 303°	258° 226°	216° 226°	Lobe Valve 224°	214° 224°	.254" .248"	.445" .434"	84162 84162S
CUSTOM GROUND B18A/B CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles also available.	00062-2	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84162	68181-16	87092-16	Titanium retainer. Fits B18A and B18B. For limited street use.
84162S	68181-16	87092S-16	Steel Retainer, for daily street use.

Spring pressure:

68181-16 Seat: 1.400" @ 48 lbs / Nose: 0.950" @ 148 lbs / Coil bind: 0.710"
(No machine work required).

Optional spring:

68182-16 Seat: 1.400" @ 70 lbs / Nose: 0.950" @ 202 lbs / Coil bind: 0.800"
(No mach work / High pressure design).

Note: Crower titanium retainers weigh 5.5 grams vs. 12 grams stock.

Factory installed height on intake = 1.320", exhaust = 1.425"

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

ACCESSORIES

Part No.	Description
86054BB	Adjustable Cam Sprocket (1 only). All black. 2 required
86054BC	Adjustable Cam Sprocket (1 only). Black & Silver. 2 required
97407I-8	Stainless steel valves - 31 mm head dia (8 only int)
97407E-8	Stainless steel valves - 28 mm head dia (8 only exh)
97408I-8	Stainless steel valves - 31.5 mm head dia (8 only int)
97408E-8	Stainless steel valves - 28.5 mm head dia (8 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.

Note: When ordering sprockets, be sure to specify two.

HONDA/ACURA H23 SERIES NON-VTEC TWIN CAM

New Improved Cam Core Technology

Description	Part Number	Advertised Duration (.010")		Duration @.050"		Lobe Lift		Gross Lift 1.85 / 1.85		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
HONDA H23 Prelude Si (1994)	Stock	240°	240°	183°	183°	.224"	.224"	.414"	.414"	Stock
STAGE 1 Street use with emphasis on bottom end and mid range power. Works with stock springs up to factory rev limiter.RPM Power Range: Idle - 7000+	62481-2	245°	251°	193°	193°	.238"	.228"	.440"	.422"	84177
STAGE 2 - Forced Induction Designed specifically for turbo or supercharger applications. Low duration, high lift profile. Requires Crower spring kit #84177. RPM Power Range: Idle - 8000+	62481T-2	245°	245°	193°	193°	.238"	.238"	.440"	.440"	84177
STAGE 2 - 3/4 Race Designed for street/strip applications in normally aspirated engines. Requires spring/retainer kit #84177. RPM Power Range: 1000 - 7800+	62482-2	250°	250°	211°	211°	.241"	.235"	.446"	.435"	84177
STAGE 3 - Full Race Drag Race and radical Street/Strip. Requires #84177 spring kit and compatible ECU upgrade for optimum results. Rough idle. RPM Power Range: 1100 - 8000+	62483-2	255°	255°	215°	215°	.244"	.244"	.451"	.451"	84177
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary profiles available upon request.	00061-2	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Duration figures are taken at the lobe.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84177	68181-16	87092D-16	68929-16 Titanium retainer intended for race and limited street

Spring pressure:

68181-16 Seat: 1.350" @ 56 lbs / Nose: 0.950" @ 148 lbs / Coil bind: 0.710" (No machine work required).

Note: Crower titanium retainers weigh 7.5 grams vs. 12 grams stock steel. Crower steel retainers weigh 10.5 grams.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.



STEEL BILLET RODS

Crower steel billet rods are made to exacting tolerances on state-of-the-art CNC machining centers. Available for all popular Honda/Acura engine makes, Crower connecting rods are the smart choice if you value your engine block and other internals. Made from premium, steel alloy and features 220,000 p.s.i. bolts for ultimate clamping.

CIVIC EX-D17A2 VTEC SINGLE CAM HONDA/ACURA

New Improved Cam Core Technology

Description	Part Number	Advertised Duration		Duration Lobe Lift		Lobe Lift		Duration @ .050"		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (2001 - up Civic Ex)	Stock	235°	229°	183°	171°	.199"	.163"	.338" inches	.310" inches	Stock
								8.58 mm	7.87 mm	
STAGE 1 - Normally Aspirated - Daily Driver Stock idle, excellent street manners. Works with stock valve train. RPM Range: Idle - 7000+	63461	234°	228°	188°	180°	.217"	.190"	.369" inches	.361" inches	Stock
								9.37 mm	9.17 mm	
STAGE 2 - Boost Special - Street/Strip Turbo or Supercharger Short duration, big lift turns your turbo loose for added HP. Requires kit #84166. RPM Range: Idle - 7500+	63461T	243°	232°	193°	183°	.237"	.218"	.403" inches	.414" inches	84166 84166S
								10.23 mm	10.51 mm	
STAGE 2 - Normally Aspirated - 3/4 Race Turbo Hot street/strip profile, slight lobe at idle. #84166 spring kit required. RPM Range: 1500 - 8000+	63462	253°	236°	200°	188°	.227"	.217"	.386" inches	.412" inches	84166 84166S
								9.80 mm	10.46 mm	
STAGE 3 - Normally Aspirated - All Motor Drag Profile Not for inexperienced tuner. Head Mods, V-tec & ECU tuning req. Limited street. RPM Range: 1250 - 9000+	63463	261°	253°	208°	200°	.250"	.227"	.425" inches	.431" inches	84166 84166S
								10.80 mm	10.94 mm	
CUSTOM GROUND D17A2 CAM Special order custom ground profile available for an additional charge. Proprietary and confidential profiles also available.	00087	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Note: The above cores will not fit the D17A1 non VTEC cylinder head. No cores available at time of publication. Rocker ratio is 1.7:1 intake and 1.9:1 exhaust.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84166	68180-16	87096-16	High pressure single spring and titanium retainer kit.
84166S	68180-16	87096S-16	Steel Retainer for Daily Street Use.

Spring pressure:

68180-16 Seat: 1.975" @ 58 lbs / Nose: 1.500" @ 154 lbs / Coil bind: 1.320" (No machine work required).

86115-16 Premium steel billet valve keepers (locks) available in standard or +.050" inst ht (#86115X1-16).

86115T-16 Premium titanium billet valve keepers (locks) available in standard installed height. Half the weight of steel.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

ACCESSORIES

Part No.	Description
97403I-8	Stainless steel valves - 30 mm head dia (8 only int)
97403E-8	Stainless steel valves - 26 mm head dia (8 only exh)
97404I-8	Stainless steel valves - 30.5 mm head dia (8 only int)
97404E-8	Stainless steel valves - 26.5 mm head dia (8 only exh)

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.

STEEL BILLET RODS

100% made in the USA from premium steel billet material, Crower offers two styles of rods for the Honda D17A2 engine. Crower's premium standard steel billet rod (#B93740B-4) is designed for boosted applications in excess of 12 psi or over 100 HP shot of nitrous. Also available in a Maxi-Lite all motor design (ML93740B-4) for added weight reduction and quicker throttle response.

HONDA/ACURA D16Z6 & D16Y8 VTEC SINGLE CAM

New Improved Cam Core Technology

Description	Part Number	Lobe	Advertised Duration (.010")		Duration @ .050"		Lobe Lift		Gross Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STOCK D16Z6 SOHC VTEC (92-95)	Stock	Int Mid / Exh	304°	303°	212°	204°	.246"	.207"	.394"	.373"	Stock
STOCK D16Y8 SOHC VTEC (96-up)	Stock	Int Mid / Exh	310°	302°	210°	212°	.258"	.259"	.451"	.453"	Stock
STOCK REPLACEMENT Similar to stock profile. Excellent for mild turbo and nitrous on the street with no other mods. RPM Range: Idle - 7000+	63440Z 63440Y	Mid Sec Pri	288° 293° 293°	299° - -	220° 197° 197°	207° - -	.243" .205" .205"	.203" - -	.389" .328" .328"	.365" - -	Stock
STAGE 1 Features far more aggressive ramp rates than stock with added duration. Idle lobes remain same as stock. RPM Range: Idle - 7200+	63441Z 63441Y	Mid Sec Pri	292° 293° 293°	302° - -	228° 197° 197°	208° - -	.254" .205" .205"	.214" - -	.406" .328" .328"	.385" - -	84166 84166S
STAGE 2 - Forced Induction Special Designed specifically for turbo or supercharged engines. Short duration reduces overlap, for more cylinder pressure. RPM Range: Idle - 8000+	63441ZT 63441YT	Mid Sec Pri	312° 293° 293°	318° - -	234° 197° 197°	217° - -	.269" .205" .205"	.237" - -	.430" .328" .328"	.427" - -	84166 84166S
STAGE 2 - 3/4 Race Street/Strip. Rough lobe at idle due to increased sec/pri lobe specifications. Most popular all-motor profile. RPM Range: 1000 - 7500+	63442Z 63442Y	Mid Sec Pri	319° 295° 295°	310° - -	235° 204° 204°	223° - -	.270" .205" .205"	.242" - -	.432" .332" .332"	.436" - -	84166 84166S
STAGE 3 - Full Race Race cams. Requires extensive cylinder head modifications. Not for inexperienced tuner. V-tec & ECU tuning required. RPM Range: 1200 - 8000+	63443Z 63443Y	Mid Sec Pri	329° 295° 295°	317° - -	239° 204° 204°	226° - -	.276" .210" .210"	.260" - -	.442" .332" .332"	.468" - -	84166 84166S
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary applications.	00067	Mid Sec Pri	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Note: Specify "Z" after part number if D16Z6 (92-95) or "Y" after part number if D16Y8 (96-up). All duration figures listed above are specific to the D16Y8. Gross lift calculated by using the following rocker ratios: Int Mid Lobe (VTEC) - 1.60, Int Sec Lobe - 1.60, Int Pri Lobe - 1.60, Exhaust - 1.80.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84166	68180-16	87096-16	Fits D16Z6 (92-95) and D16Y8 (96-up) cylinder heads
84166S	68180-16	87096S-16	Steel Retainer for Daily Street Use.

Spring pressure:

68180-16 Seat: 1.975" @ 58 lbs / Nose: 1.500" @ 154 lbs / Coil bind: 1.320" (No machine work required).

86115-16 Premium steel billet valve keepers (locks) available in standard or +.050" inst ht (#86115X1-16).

86115T-16 Premium titanium billet valve keepers (locks) available in standard installed height. Half the weight of steel.

ACCESSORIES

Part No.	Description
86066	Upgraded Cam Bolt
86054YC	D16Y8 Adjustable Cam Sprocket (1 only). Black & Silver.
86054YB	D16Y8 Adjustable Cam Sprocket (1 only). All Black.
86054ZC	D16Z6 Adjustable Cam Sprocket (1 only). Black & Silver.
86054ZB	D16Z6 Adjustable Cam Sprocket (1 only). All Black.
97403I-8	Stainless steel valves - 30 mm head dia (8 only int)
97403E-8	Stainless steel valves - 26 mm head dia (8 only exh)
97404I-8	Stainless steel valves - 30.5 mm head dia (8 only int)
97404E-8	Stainless steel valves - 26.5 mm head dia (8 only exh)

ADJUSTABLE SPROCKETS

Crower's new cam sprockets are made from premium 6061-T6 billet aluminum and incorporate a four bolt ARP® fastening system to prevent the slippage found in other brands. For the ultimate tuner, Crower sprockets feature 5/16" diameter, 12 point ARP® fasteners with a hardened washer to prevent galling and stripping. The lightweight design (367g) reduces unwanted harmonics which could cause valve train failure.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

Note: When ordering sprockets, Y = D16Y8 (96-up), Z = D16Z6 (92-95).

Note: When ordering valves, be sure to specify one set int and one set exh.



4G63 TURBO ECLIPSE & TALON MITSUBISHI/DSM

New Improved Cam Core Technology

Description	Part Number	Advertised Duration		Duration @ .006"		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (Eclipse 4G63 USDM)	Stock	256°	256°	181° Lobe 198° Valve	172° 189°	174° Lobe 190° Valve	165° 181°	.366" inches 9.29 mm	.343" 8.71	
	264	264°	264°	240° Lobe 256° Valve	240° 256°	187° Lobe 203° Valve	186° 202°	.393" inches 9.98 mm	.374" 9.50	
	272	272°	272°	249° Lobe 264° Valve	249° 264°	195° Lobe 211° Valve	195° 211°	.399" inches 10.13 mm	.379" 9.62	
STAGE 1 Street use and more aggressive turbo and nitrous. Slight lobe at idle. RPM Range: Idle - 7500+	64412-2	264°	264°	242° Lobe 258° Valve	242° 258°	188° Lobe 204° Valve	188° 204°	.391" inches 9.93 mm	.372" 9.45	Stock
STAGE 2 Specs derived from the popular 264 Intake / 272 Exhaust combination. RPM Range: Idle - 7750	64416-2	264°	272°	249° Lobe 265° Valve	249° 265°	188° Lobe 204° Valve	196° 212°	.398" inches 10.11 mm	.378" 9.60	84175 84175S
STAGE 2 Most popular profile for street/strip. Excellent all purpose turbo. RPM Range: 1000 - 8000	64413-2	272°	272°	254° Lobe 270° Valve	249° 265°	195° Lobe 211° Valve	196° 212°	.393" inches 9.98 mm	.379" 9.63	84175 84175S
STAGE 3 - 3/4 Race Recommended for strip and some street. Lobe at idle. Requires #84175. RPM Range: 1100 - 8250+	64414-2	280°	280°	258° Lobe 275° Valve	258° 275°	196° Lobe 213° Valve	198° 215°	.411" inches 10.44 mm	.391" 9.93	84175 84175S
STAGE 4 - Full Race Not for the inexperienced tuner. Race only. RPM Range: 1200 - 8500+	64415-2	288°	288°	260° Lobe 278° Valve	256° 274°	200° Lobe 218° Valve	196° 216°	.425" inches 10.80 mm	.416" 10.57	84175 84175S
CUSTOM GROUND 4G63 CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles, as well as mechanical profiles also available.	00064-2	<i>Refer to www.crower.com for camshaft recommendation</i>								

If running a non-turbo 4G63 engine, the above cams are compatible for use.

Note: These cams use .000" intake (cold), .000" exhaust valve lash (cold).

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84175	68190-16	87095-16	15% more pressure than factory spring.
84175S	68190-16	87095S-16	Steel Retainer for Daily Street Use.

Spring pressure:

68190-16 Seat: 1.550" @ 74 lbs / Nose: 1.050" @ 210 lbs / Coil bind: 0.900" (No machine work required).

Note: Crower titanium retainers weigh 7 grams vs. 14.5 grams stock.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.


ADJUSTABLE SPROCKETS

Crower's new cam sprockets are made from premium 6061-T6 billet aluminum and incorporate a four bolt ARP® fastening system to prevent the slippage found in other brands. For the ultimate tuner, Crower sprockets feature 5/16" diameter, 12 point ARP® fasteners with a hardened washer to prevent galling and stripping. The lightweight design reduces unwanted harmonics which could cause valve train failure. Specify #86054M (sold separately).

ACCESSORIES

Part No.	Description
86054M	Adjustable Cam Sprocket (1 only). All black. 2 required
97420I-8	Stainless steel valves - 34 mm head dia (8 only int)
97420E-8	Stainless steel valves - 30.5 mm head dia (8 only exh)
97421I-8	Stainless steel valves - 34.5 mm head dia (8 only int)
97421E-8	Stainless steel valves - 31 mm head dia (8 only exh)
97422I-8	Stainless steel valves - 35 mm head dia (8 only int)
97422E-8	Stainless steel valves - 31.5 mm head dia (8 only int)

Note: When ordering valves, be sure to specify one set int and one set exh.
Note: When ordering sprockets, be sure to specify two.

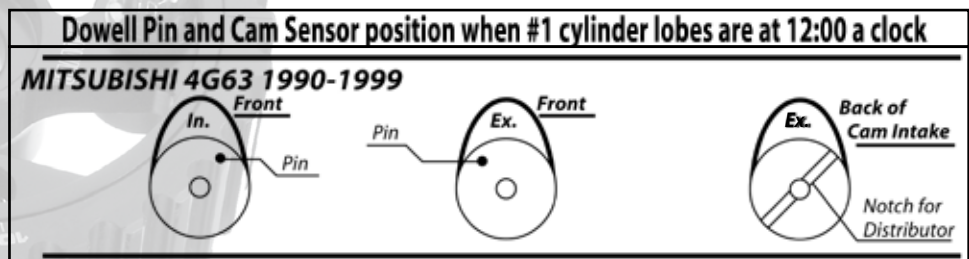

New Improved Cam Core Technology

Description	Part Number	Advertised Duration		Duration @ .006"		Duration @ .050"		Gross Lift 1.7 / 1.7		Suitable Component Kit	
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust		
FACTORY OEM SPECS (2004 Evolution VIII USDM)	Stock	256°	256°	236° 252°	Lobe Valve 248°	232°	182° 198°	Lobe Valve 194°	178°	.386" inches .367" 9.80 mm 9.32	
	264	264°	264°	234° 250°	Lobe Valve 248°	232°	184° 200°	Lobe Valve 198°	182°	.416" inches .393" 10.56 mm 9.98	
	272	272°	272°	241° 258°	Lobe Valve 257°	240°	191° 208°	Lobe Valve 206°	190°	.415" inches .393" 10.54 mm 9.98	
	280	280°	280°	251° 267°	Lobe Valve 266°	250°	200° 216°	Lobe Valve 216°	200°	.415" inches .393" 10.54 mm 9.98	
STAGE 1 Street use, plug and play, no cylinder head work or spring kit required. RPM Range: Idle - 7500+	64431-2	264°	264°	239° 256°	Lobe Valve 252°	236°	186° 203°	Lobe Valve 202°	184°	.413" inches .391" 10.50 mm 9.93	84175 84175S
STAGE 2 Combination of the popular HKS 264 intake/272 exhaust cam setup. RPM Range: Idle - 7750	64432-2	264°	272°	239° 256°	Lobe Valve 258°	242°	185° 202°	Lobe Valve 208°	192°	.415" inches .396" 10.54 mm 10.00	84175 84175S
STAGE 3 - 3/4 Race Most popular profile. Slight lobe at idle, added valve lift requires #84175. RPM Range: 1000 - 8000	64433-2	272°	272°	256° 272°	Lobe Valve 266°	250°	200° 216°	Lobe Valve 208°	192°	.425" inches .408" 10.80 mm 10.36	84175 84175S
STAGE 4 - Race Profile Race only. Not for the inexperienced tuner. Requires spring kit #84175. RPM Range: 1100 - 8250+	64434-2	280°	280°	270° 286°	Lobe Valve 266°	260°	214° 230°	Lobe Valve 216°	200°	.450" inches .425" 11.43 mm 10.80	84175 84175S
CUSTOM GROUND 4G63 CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles, as well as mechanical profiles also available.	00068-2	Refer to www.crower.com for camshaft recommendation									

Note: These cams use .000" intake (cold), .000" exhaust valve lash (cold).

These cams are not compatible for use on 4G63 Turbo Eclipse or Talon applications.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84175	68190-16	87095-16	15% more pressure than factory spring.
84175S	68190-16	87095S-16	Steel Retainer for Daily Street Use.

Spring pressure:

68190-16 Seat: 1.550" @ 74 lbs / Nose: 1.050" @ 210 lbs / Coil bind: 0.900" (No machine work required).

Note: Crower titanium retainers weigh 7 grams vs. 14.5 grams stock.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.

STEEL BILLET RODS

Premium steel billet connecting rods designed for high boost applications are available for the 4G63 Evo and 2nd Gen Eclipse (#B93762B-4) as well as the 1st Gen Eclipse 4G63 (#B93761B-4). Includes aluminum-bronze bushings and rod bolts rated to 220,000 p.s.i. for ultimate clamping ability. Other Mitsubishi applications include the 3000GT/Stealth VR-4 (#B93763B-6) and the Lancer 4G94 (#B93764B-4).

ACCESSORIES

Part No.	Description
97420I-8	Stainless steel valves - 34 mm head dia (8 only int)
97420E-8	Stainless steel valves - 30.5 mm head dia (8 only exh)
97421I-8	Stainless steel valves - 34.5 mm head dia (8 only int)
97421E-8	Stainless steel valves - 31 mm head dia (8 only exh)
97422I-8	Stainless steel valves - 35 mm head dia (8 only int)
97422E-8	Stainless steel valves - 31.5 mm head dia (8 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.



420A ECLIPSE NON-TURBO

MITSUBISHI

TWIN CAM - (FRONT EXHAUST)

Description	Part Number	Advertised Duration		Duration @ .050"		Lobe Lift		Gross Lift		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (2004 Evolution VIII USDM)	Stock	222°	220°	172°	168°	.185"	.157"	.324"	.275"	Stock
STAGE 1 Aggressive street use and nitrous. Slight lobe at idle. Kit #84176 required. RPM Range: 1500 - 7000+	64461-2	234°	238°	184°	184°	.200"	.176"	.350"	.308"	84176 84176S
STAGE 2 Designed specifically for Turbo/Supercharger application. Springs required. RPM Range: 1500 - 7200+	64462-2	238°	236°	187°	184°	.234"	.230"	.409"	.403"	84176 84176S
STAGE 2 - 3/4 Race Most popular profile for the street/strip. Lobe at idle. Kit #84176 required. RPM Range: 2000 - 7200+	64462-2	241°	241°	196°	194°	.222"	.204"	.388"	.357"	84176 84176S
STAGE 3 - Full Race Recommended for drag race use. Heavy engine mods required. RPM Range: 2200 - 7500+	64463-2	254°	250°	205°	200°	.254"	.250"	.444"	.437"	84176 84176S
CUSTOM GROUND 4G63 CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles, as well as mechanical profiles also available.	00069-2	<i>Refer to www.crower.com for camshaft recommendation</i>								

Note: These cams use .000" intake and exhaust valve lash (cold).

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84176	68190-16	87084-16	15% more pressure than factory spring
84176S	68190-16	87084S-16	Steel Retainer for Daily Street Use.

Spring pressure:
68190-16 Seat: 1.500" @ 88 lbs / Nose: 1.100" @ 195 lbs / Coil bind: 0.920"
(No machine work required).

Note: Crower titanium retainers weigh 7 grams vs. 12.5 grams stock.

ACCESSORIES

Part No.	Description
86054N	420A Adjustable Cam Sprockets (1 only)


Note: When ordering sprockets, be sure to specify two.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/ smooth surface.


Dowell Pin and Cam Sensor position when #1 cylinder lobes are at 12:00 a clock

MITSUBISHI 420 A 1995-1998

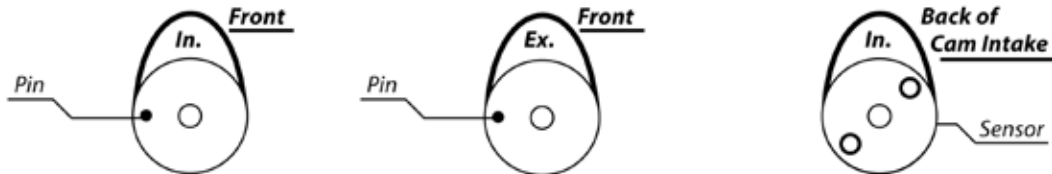

Dowell Pin and Cam Sensor position when #1 cylinder lobes are at 12:00 a clock

MITSUBISHI EVO VIII/8 2003-2005

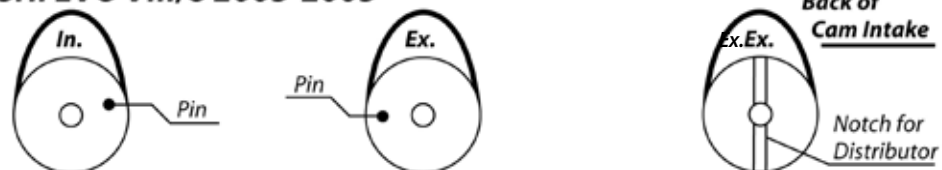

MOPAR

DODGE NEON TWIN CAM (REAR EXHAUST)

New Improved Cam Core Technology

Description	Part Number	Advertised Duration		Duration @ .050"		Lobe Lift		Gross Lift 1.75 / 1.75		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (Neon 2.0L)	Stock	222°	222°	174°	172°	.198"	.180"	.347"	.315"	Stock
STAGE 1 Works with stock valve springs and retainers. Daily driver, mild idle. RPM Range: Idle - 6700+	64450N-2	234°	234°	184°	184°	.200"	.200"	.350"	.350"	Stock
STAGE 2 Aggressive street use and nitrous. Slight lobe at idle. Springs required. RPM Range: 1500 - 7000+	64451N-2	241°	241°	196°	196°	.230"	.230"	.403"	.403"	84176
STAGE 2 - Forced Induction Special Designed specifically for Turbo/Supercharger application. Springs required. RPM Range: 1500 - 7000+	64454N-2	238°	238°	188°	188°	.230"	.220"	.403"	.385"	84176
STAGE 3 - Full Race Recommended for drag race use. Heavy engine mods required. RPM Range: 2000 - 7200+	64452N-2	248°	248°	200°	200°	.234"	.234"	.410"	.410"	84176
STAGE 4 - Full Race Recommended for drag race use. Springs, ECU mods required. RPM Range: 2200 - 7500+	64453N-2	254°	254°	216°	216°	.265"	.265"	.463"	.463"	84176
CUSTOM GROUND NEON CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles, as well as mechanical profiles also available.	00069-2	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash (cold).

Note: Cam specs are taken at the cam lobe. Specs at the valve will be higher.

SRT-4 - TWIN CAM (REAR EXHAUST)

S = SRT-4 P = PT CRUISER

STAGE 1 Works with stock valve springs and retainers. Daily driver, mild idle. RPM Range: Idle - 6700+	64475P-2 64475S-2	266°	260°	210°	203°	.240"	.230"	.420"	.403"	84176
STAGE 2 Aggressive street use and nitrous. Slight lobe at idle. Springs required. RPM Range: 1500 - 7000+	64476P-2 64476S-2	274°	266°	218°	210°	.250"	.240"	.438"	.420"	84176
STAGE 3 - 3/4 Race Most popular profile for the street/strip. Springs/retainers mandatory. RPM Range: 2000 - 7200+	64477P-2 64477S-2	284°	277°	232°	223°	.265"	.254"	.464"	.445"	84176
CUSTOM GROUND SRT-4, PT CRUISER CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles, as well as mechanical profiles also available.	00077P-2 00077S-2	Refer to www.crower.com for camshaft recommendation								

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84176	68190-16	87084-16	15% more pressure than factory spring
84176S	68190-16	87084S-16	Chromoly retainers for street use

Spring pressure:
68190-16 Seat: 1.500" @ 88 lbs / Nose: 1.100" @ 195 lbs / Coil bind: 0.920"

(No machine work required).




Note: Crower titanium retainers weigh 7 grams vs. 12.5 grams stock.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.




Dowell Pin and Cam Sensor position when #1 cylinder lobes are at 12:00 a clock

NEON



Dowell Pin and Cam Sensor position when #1 cylinder lobes are at 12:00 a clock

SRT4 2003-2005



HYDRAULIC ROLLER TAPPET

MOPAR

DODGE VIPER/RT-10 & GTS ALL YEARS

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 VL		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
CUSTOM GROUND HYDRAULIC ROLLER - 1992-2002 Special order hydraulic lifter camshaft ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc when ordering.	00136HR								<i>Refer to www.crower.com for camshaft recommendation</i>
CUSTOM GROUND HYDRAULIC - 2003-UP Special order hydraulic lifter camshaft ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc when ordering.	00137HR								<i>Refer to www.crower.com for camshaft recommendation</i>

DODGE V8 MAGNUM TRUCK

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Gross Lift 1.7 / 1.7		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Daily Driver RPM Range: Idle to 4800 Redline: 5000 rpm max	34414	114°	268°	277°	204°	208°	.458"	.467"	.508"	.535"	84548
Unblown or Blown, Daily Driver RPM Range: 2200 to 6000 Redline: 6500 rpm max	34415	114°	274°	274°	216°	216°	.475"	.475"	.505"	.505"	84548
Higher Compression (9.8:1+), Headers RPM Range: 2800 to 6500 Redline: 7000 rpm	34416	114°	284°	284°	224°	224°	.492"	.492"	.523"	.523"	84548

Note: The above cores are cast steel. 8620 steel billet cores are also available.

DODGE V10 MAGNUM TRUCK

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Gross Lift 1.7 / 1.7		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Daily Driver RPM Range: Idle to 4800 Redline: 5000 rpm max	35414	114°	268°	277°	204°	208°	.458"	.467"	.508"	.535"	
Unblown or Blown, Daily Driver RPM Range: 2200 to 6000 Redline: 6500 rpm max	35415	114°	274°	274°	216°	216°	.475"	.475"	.505"	.505"	
Higher Compression (9.8:1+), Headers RPM Range: 2800 to 6500 Redline: 7000 rpm	35416	114°	284°	284°	224°	224°	.492"	.492"	.523"	.523"	

Note: The above cores are cast steel. 8620 steel billet cores are also available. 1998 V10 trucks are regrind only

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84548	68405-20	87044-20	Chromoly Retainers, V10
84567	68405-16	87044-16	Chromoly Retainers, V8

VALVE TRAIN ASSEMBLY

Part No.	Description
73656K	Stainless rockers (1.7) up to 5500 rpm. If V10, use #73659K
73656PK	Rocker (1.7), guide plate, pushrod kit over 5500 rpm
68405	Valve springs (1.700 @ 110 lbs, 1.150 @ 316 lbs)
87044	Steel retainers (5/16 stem diameter). Use stock keepers
66325	Hydraulic roller lifters. If V10 truck, use #66326

If exceeding 5500 rpm, Crower recommends running Crower springs/retainers. PK kits include #70518 guide plates & pushrods (6.950") +.050 over stock.

Please specify V8 or V10 when ordering cams & valve train components.

MOPAR HYDRAULIC FLAT TAPPET

Non Roller
273 340 360 & 1967-up 318 LA V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
TORQUE BEAST / PERFORMANCE LEVEL 2 Low to mid-range torque for daily drivability. Economical price. RPM Range: 1500 - 4250 / Redline: 5500	31917	318 340	278H	112°	278°	288°	204°	214°	.422"	.444"	84131
POWER BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. Healthy sound. Economical price. RPM Range: 1750 - 4500 / Redline: 5750	31918	318 360	288H	112°	288°	298°	214°	224°	.444"	.467"	84131
ULTRA BEAST / PERFORMANCE LEVEL 3 Upper mid-range to top end power. Emphasis on top end. RPM Range: 2000 - 4800 / Redline: 6200	31916	318 360	269H	112°	269°	282°	223°	234°	.480"	.494"	84131
HOT STREET BEAST / PERFORMANCE LEVEL 4 Explosive performance gains on top end power. Economical price. RPM Range: 2200 - 5000 / Redline: 6500	31919	318 360	318H	112°	318°	328°	232°	242°	.450"	.476"	84131
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power and mileage. Provides excellent low end and mid-range power with extended rpm's for spirited driving. RPM Range: 1500 - 4000 / Redline: 5500	31240	318	260HDP	112°	260°	267°	214°	219°	.455"	.474"	84131
	31241	318 360	267HDP	112°	267°	271°	218°	222°	.474"	.485"	84131
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Intended for the hot marine/strip application, these cams offer extended rpm range with emphasis on upper bottom to top end power with strong mid-range. RPM Range: 1800 - 4500 / Redline: 6000	31243	340 360	282HDP	112°	282°	292°	227°	237°	.480"	.503"	84131
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle. Explosive mid-range torque. RPM Range: 2500 - 6500	31204	340 360	280HDP	108°	280°	292°	218°	227°	.474"	.480"	84131
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Violent mid-range acceleration and torque. RPM Range: 2700 - 6500	31205	340 360	290HDP	108°	290°	298°	224°	234°	.507"	.522"	84131
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle. Explosive mid-range acceleration and torque. RPM Range: 3000 - 6500	31206	340 360	302HDP	108°	302°	312°	240°	249°	.554"	.549"	84131
CUSTOM GROUND HYDRAULIC Special order hydraulic camshaft ground to your specifications. Call our technical supports staff for personalized camshaft assistance.	00131	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part. No	Lifters	Springs	Retainers	Seals	Remarks
84131	66031-16	68405-16	87049-16	86071-16	For rpm up to 6500
84131X3	66031X3-16	68405-16	87049-16	86071-16	CamSaver Lifter

For severe duty applications, Crower offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface. **Specify X3 after corresponding component kit.**

Spring pressure:

68405-16 Seat: 1.700" @ 110 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 0.980" (Machine work, use cutter 68983*).

* Machine work required, specify 3/8 pilot shaft when ordering.

Note: When using high lift cams (over .480") or modified valve stem lengths, a longer pushrod is required to achieve proper lifter preload (.050" off snap-ring). Use checking pushrod to determine length and call with specs.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

ACCESSORIES

Part. No	Description
See pg. 180	Spring seat cutter
Pg. 146-149	Pushrods
See pg. 138	Roller timing gear

Note: Longer pushrods required with Mopar adjustable rockers.

Note: If using longer than stock valves you may require spring and retainer modifications. Contact Crower.

MECHANICAL FLAT TAPPET

MOPAR

Non Roller

273 340 360 & 1967-up 318 LA V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 3 High revving with superior mid-range and top end power. RPM Power Range: 2500 - 6500 / Redline: 7000+	31321	ALL CID	294FDP	112°	294°	298°	243°	245°	.521"	.528"	84331
COMPU-PRO / PERFORMANCE LEVEL 5 High torque, short oval camshaft. RPM Power Range: 3500 - 6500 / Redline: 7000+	31312	ALL CID	304FDP	108°	304°	310°	250°	254°	.545"	.558"	84331
COMPU-PRO / PERFORMANCE LEVEL 5 Great high torque mid-range oval track grind. RPM Power Range: 4000 - 7000 / Redline: 7500+	31313	ALL CID	310FDP	105°	310°	318°	263°	265°	.573"	.581"	84331
COMPU-PRO / PERFORMANCE LEVEL 5 Upper mid-range and top end power for extra pop above 7000 rpm. RPM Power Range: 4500 - 7500 / Redline: 8000+	31314	ALL CID	318FDP	106°	318°	324°	270°	276°	.591"	.609"	Call Crower
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00131M	ALL CID	Refer to www.crower.com for camshaft recommendation								Call Crower
CUSTOM CAM Special order Pro 55 , call with all engine data including head flow data, valve sizes, operating power range, etc.	00058	ALL CID	Refer to www.crower.com for camshaft recommendation								Call Crower

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No	Lifters	Springs	Retainers	Seals	Remarks
84331	66931-16	68405-16	87049-16	86071-16	For rpm up to 7500 plus.
84331LW980	66931LW980-16	68405-16	87049-16	86071-16	Light Weight Lifter.

For severe duty applications, Crower recommends using our solid lifter with the added "**coolface oiling option**". **Specify X980 after corresponding component kit.**

Spring pressure:

68405-16 Seat: 1.700" @ 110 lbs / Nose: 1.200" @ 297 lbs / Coil bind: 0.980" (Machine work, use cutter 68983*).

* Machine work required, specify 3/8 pilot shaft when ordering.

#70176-16 or longer pushrods are required with adjustable rocker arms.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Mechanical
273 340 360 & 1967-up 318 LA V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA-ACTION / PERFORMANCE LEVEL 5 High torque oval track and drag profile. RPM Power Range: 3000 - 7000 / Redline: 7500+	31407	ALL CID	294R	108°	294°	298°	258°	262°	.624"	.627"	84530
ULTRA-ACTION / PERFORMANCE LEVEL 5 Strong upper mid range and top end power. RPM Power Range: 4000 - 7500 / Redline: 8000+	31408	ALL CID	300R	105°	300°	306°	258°	268°	.685"	.702"	84531
ULTRA-ACTION / PERFORMANCE LEVEL 5 High torque drag profile with mid-range and top end power. RPM Power Range: 5200 - 8000 / Redline: 8250+	31409	ALL CID	304R	106°	304°	310°	268°	274°	.645"	.623"	84530 84531
CUSTOM ORDER ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00131R	ALL CID	Refer to www.crower.com for camshaft recommendation							See Below	

Note: These cams use .026" intake, .028" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part. No	Springs	Retainers	Seals	Remarks
84530N	68380X2-16	87049D-16	86071-16	For rpm up to 8000.
84531N	68670S-16	87063-16	86071-16	For rpm above 8000.

Spring pressure:

68380X2-16 Seat: 1.800" @ 197 lbs / Nose: 1.200" @ 470 lbs / Coil bind: 1.110"
(Machine work, use cutter 68999*).

A. Requires longer stem valves to achieve installed spring height.

* Machine work required, specify 3/8 pilot shaft when ordering.

#70176-16 or longer pushrods are required with adjustable rocker arms.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

AVAILABLE CAM JOURNAL SIZES

Stock Chrysler Bearing Size - Journal 1 = 1.998", 2 = 1.982", 3 = 1.967", 4 = 1.951", 5 = 1.561"
Roller Bearing (Arrington) - Journal 1, 2, 3, 4 = 1.968", Journal 5 = 1.575"
Roller Bearing (Mopar Performance) - All Journals = 1.968"
Dodge R5 Standard Bearing - All Journals = 60mm

To order the above cores specify #00003. 60mm is available on special order basis only (#00060).

Special Firing Orders also available.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

HYDRAULIC FLAT TAPPET MOPAR

Non Roller 1958-1980

350 361 383 400 413 426 440 B V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Exhibits broad stump pulling power and torque. Good for stock replacement. RPM Power Range: 1200 - 3800 / Redline: 5200+	32915	383 CID	250H	112°	250°	254°	200°	207°	.423"	.444"	84132
TORQUE BEAST / PERFORMANCE LEVEL 2 Low to mid-range torque for daily drivability. Economical price. RPM Power Range: 1500 - 4250 / Redline: 5500+	32917	383 CID	278H	112°	278°	288°	204°	214°	.422"	.444"	84132
POWER BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. Healthy sound. Economical Price. RPM Power Range: 1750 - 4500 / Redline: 5750+	32918	350 361	288H	112°	288°	298°	214°	224°	.444"	.467"	84132
ULTRA BEAST / PERFORMANCE LEVEL 3 Upper mid-range to top end power. Emphasis on top end. RPM Power Range: 2000 - 4800 / Redline: 6200+	32916	383 413	265H	112°	265°	269°	218°	222°	.475"	.484"	84132
HOT STREET BEAST / PERFORMANCE LEVEL 4 Explosive performance gains on top end power. Economical price. RPM Power Range: 2200 - 5000 / Redline: 6500	32919	426 440	312H	109°	312°	320°	242°	252°	.521"	.551"	84132
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Perfect combination of power and mileage. Provides excellent low end and mid-range power with extended rpm's for spirited driving. RPM Power Range: 1500 - 4000 / Redline: 5500+	32241	426 440	267HDP	112°	267°	271°	220°	223°	.478"	.486"	84132
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Intended for the hot marine/strip application, these cams offer extended rpm range with emphasis on upper bottom to top end power with strong mid-range. RPM Power Range: 1800 - 4500 / Redline: 6000+	32242	340 360	271HDP	112°	271°	284°	222°	234°	.486"	.496"	84132
	32243	383 413	282HDP	112°	282°	292°	228°	236°	.478"	.502"	84132
CUSTOM GROUND HYDRAULIC Special order hydraulic camshaft ground to your specifications. Call with all engine data including head flow data, valve sizes, operating power range, etc.	00132H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

Note: Three-bolt cams are available. Specify when ordering.

ENGINEERED COMPONENT KITS

Part No	Lifters	Springs	Retainers	Seals	Cups	Keepers	Remarks
84132	66031-16	68340-16	87063-16	86071-16			For rpm up to 6500 plus.
84132X3	66031X3-16	68340-16	87063-16	86071-16			For rpm up to 6500 plus.
84132RM3	66031RM3-16	68340-16	87063-16	86071-16			Rev-Max Lifter.
84134	66031-16	68441-16	87063-16	86071-16	68293-16	86757S-16	Steel Keepers.
84134T	66031-16	68441-16	87063-16	86071-16	68293-16	86757-16	Titanium Keepers.

For engines that were originally equipped with a hydraulic flat tappet cam, retro fit hydraulic roller cams & kit are available, call CROWER for details.

Spring pressure:

68340-16 Seat: 1.900" @ 119 lbs / Nose: 1.350" @ 359 lbs / Coil bind: 1.080" (Machine work, use cutter 68986*).

* Machine work required, specify 38 pilot shaft when ordering.

Low Block: 350, 361, 383, 400 cid.

High Block: 413, 426, 440 cid.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Note: When using high lift cams (over .480") or modified valve stem lengths, a longer pushrod is required to achieve proper lifter preload (.050" off snap-ring). Use checking pushrod to determine length and call with specs.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

Non Roller

350 361 383 400 413 426 440 BV8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Dual purpose hot street/strip camshaft. Delivers strong mid-range and top end torque and horsepower. RPM Power Range: 2000 - 6000 / Redline: 6500	32242	318 340	278H	112°	278°	288°	204°	214°	.422"	.444"	84032S
	32243	318 360	288H	112°	288°	298°	214°	224°	.444"	.467"	84032S
	32244	318 360	269H	112°	269°	282°	223°	234°	.480"	.494"	84032S
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Violent mid-range acceleration and torque. RPM Power Range: 2700 - 6500	32206	318 360	318H	108°	318°	328°	232°	242°	.450"	.476"	84032S
HI-DRAULIC HAULER / PERFORMANCE LEVEL 5 Rough idle. Explosive mid-range acceleration and torque. RPM Power Range: 3000 - 6500	32207	318	260HDP	108°	260°	267°	214°	219°	.455"	.474"	84032S
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Extremely violent mid-range and top end horsepower. RPM Power Range: 3200 - 6500	32208	318 360	267HDP	108°	267°	271°	218°	222°	.474"	.485"	84032S
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00132H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: Three-bolt cams are available. Specify when ordering.

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part. No	Lifters	Springs	Retainers	Seals	Cups	Keepers	Remarks
84032S	66031-16	68302X2-16	87063-16	86071-16			Up to 6000 RPM Daily driver
84132	66031-16	68340-16	87063-16	86071-16			For rpm up to 6500 plus.
84132X3	66031X3-16	68340-16	87063-16	86071-16			For rpm up to 6500 plus.
84134	68441-16	68340-16	87063-16	86071-16	68293-16	86757S-16	Steel Keepers.
84134T	68441-16	68340-16	87063-16	86071-16	68293-16	86757-16	Titanium Keepers.

Spring pressure:

68340 -16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 355 lbs / Coil bind: 1.080" (Machine work).

68302X2 -16 Seat: 1.800" @ 109 lbs / Nose: 1.350" @ 284 lbs / Coil bind: 1.245"

Low Block: 350, 361, 383, 400 cid.

High Block: 413, 426, 440 cid.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Note: When using high lift cams (over .480") or modified valve stem lengths, a longer pushrod is required to achieve proper lifter preload (.050" off snap-ring). Use checking pushrod to determine length and call with specs.

For engines that were originally equipped with a hydraulic flat tappet cam, retro fit hydraulic roller cams & kit are available, call CROWER for details.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

MECHANICAL FLAT TAPPET MOPAR

Non Roller 1958-1980

350 361 383 400 413 426 440 B V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 4 High torque profile with big mid-range power. RPM Power Range: 3000 - 6000 / Redline: 6500+	32309	426 440	294FDP	112°	294°	298°	240°	244°	.519"	.531"	84332
PRO-STREET / PERFORMANCE LEVEL 4 High revving with superior mid-range and top end power. RPM Power Range: 3500 - 6500 / Redline: 7000+	32310	426 440	304FDP	110°	304°	310°	251°	255°	.548"	.557"	84332
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00132M	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								See Below

Note: These cams use .022" intake, .024" exhaust valve lash.

MECHANICAL ROLLER TAPPET

Mechanical 1959-1980

350 361 383 400 413 426 440 B V8

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STREET ROLLER / PERFORMANCE LEVEL 4 Excellent street/strip profile. RPM Power Range: 2500 - 6000 / Redline: 6500+	32412	426 440	270R	110°	270°	280°	236°	246°	.550"	.548"	84546
ULTRA-ACTION / PERFORMANCE LEVEL 5 High torque profile with strong bottom and mid-range power. RPM Power Range: 3500 - 7250 / Redline: 7500+	32413	426 440	294R	108°	294°	298°	256°	265°	.624"	.627"	84546
ULTRA-ACTION / PERFORMANCE LEVEL 5 Mid-range and top end drag profile. RPM Power Range: 4250 - 8000 / Redline: 8250+	32416	426 440	309R	104°	309°	318°	269°	280°	.714"	.716"	84546
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00132R	ALL CID	<i>Refer to www.crower.com for camshaft recommendation</i>								See Below

Note: These cams use .026" intake, .028" exhaust valve lash.

All cams are 3 bolt.

ENGINEERED COMPONENT KITS

Part. No	Lifters	Springs	Retainers	Seals	Remarks
84032S	66031-16	68302X2-16	87063-16	86071-16	Up to 6000 RPM Daily Driver.
84332	66931-16	68340-16	87063-16	86071-16	For rpm up to 7500 plus.
84332LW980	66931LW980-16	68340-16	87063-16	86071-16	Light Weight Lifter
84546	66233-16	68363-16	87063-16	86071-16	8000 plus rpm. Race only to .700" max lift.

For severe duty applications, Crowder recommends using our solid lifter with the added "coolface oiling option". Specify X980 after corresponding component kit.

Spring pressure:

68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 355 lbs / Coil bind: 1.080" (Machine work, use cutter 68986*).

68363-16 Seat: 1.900" @ 212 lbs / Nose: 1.200" @ 560 lbs / Coil bind: 1.100" (Machine work, use cutter 68992*).

Optional springs (race only over .725" max lift and/or 8000 rpm)

68848-16 Seat: 2.100" @ 329 lbs / Nose: 1.300" @ 913 lbs / Coil bind: 1.150"

* Machine work required, specify 3/8 pilot shaft when ordering.

Low Block: 350, 361, 383, 400 cid.

High Block: 413, 426, 440 cid.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crowder for more custom grinds.

MOPAR HYDRAULIC FLAT TAPPET

**Non Roller 1966-1971
426 Hemi V8**

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.57 / 1.52		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
POWER COMPU-PRO / PERFORMANCE LEVEL 2 Power and mileage with extended rpm range for spirited motoring. RPM Power Range: 1500 - 4000 / Redline: 5500+	33240	426	280HDP	112°	280°	286°	211°	219°	.475"	.483"	84133
HIGH PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 3 Hot strip/strip cam. Strong upper bottom and top end power. RPM Power Range: 1800 - 4500 / Redline: 6000+	33241	426	294HDP	112°	294°	300°	222°	233°	.505"	.525"	84133
ULTRA PERFORMANCE COMPU-PRO / PERFORMANCE LEVEL 4 Good competition profile with super mid to top end performance. RPM Power Range: 2000 - 6000 / Redline: 6500+	33242	426	300H	112°	300°	300°	233°	233°	.543"	.525"	84133
CUSTOM GROUND ROLLER Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00133H	ALL CID	Refer to www.crower.com for camshaft recommendation								See Below

3 BOLT CAMS AVAILABLE

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.57 / 1.52		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / PERFORMANCE LEVEL 3 High torque profile with emphasis on bottom end power. RPM Power Range: 2800 - 6000+	33253	426	284FDP	112°	284°	294°	238°	249°	.520"	.512"	84333
COMPU-PRO / PERFORMANCE LEVEL 4 Strong mid-range and top end profile that offers excellent torque and horsepower. RPM Power Range: 3200 - 6400+	33254	426	304FDP	108°	304°	308°	251°	255°	.571"	.563"	84333
COMPU-PRO / PERFORMANCE LEVEL 4 Explosive mid-range to top end profile for high horsepower applications. RPM Power Range: 4000 - 7000+	33255	426	310FDP	106°	310°	318°	269°	280°	.618"	.617"	84333
CUSTOM GROUND ROLLER Special order mechanical lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00133M	ALL CID	Refer to www.crower.com for camshaft recommendation								See Below

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part. No	Lifters	Springs	Retainers	Seals	Keepers	Remarks
84133	66031-16	68340-16	87064-16	86070-16	86109-16	Hydraulic Lifter. 6500 rpm.
84133X3	66031X3-16	68340-16	87064-16	86070-16	86109-16	Hydraulic Lifter. 6500 rpm.
84333	66931-16	68340-16	87064-16	86070-16	86109-16	Solid Lifter. 7500 plus rpm.
84333X980	66931X980-16	68340-16	87064-16	86070-16	86109-16	Solid Lifter. 7500 plus rpm.

Spring pressure:
68340-16 Seat: 1.900" @ 118 lbs / Nose: 1.350" @ 355 lbs / Coil bind: 1.080"
(Machine work, use cutter 68986).

MECHANICAL ROLLER TAPPET

MOPAR

426 Hemi V8 1966-1971 KB ALUMINUM JP1 TFX MILODON & RODECK 45° Block & 48° Block Available

Description (Note: See pages 1-2 for a detailed explanation of each Performance Level)	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.57 / 1.52		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STREET ROLLER / PERFORMANCE LEVEL 4 Call for camshaft characteristics, as they depend on engine setup. RPM Power Range: 2500 - 6000+	33470	426	284R	110°	272°	280°	238°	246°	.576"	.558"	84532
STREET ROLLER / PERFORMANCE LEVEL 5 Call for camshaft characteristics, as they depend on engine setup. RPM Power Range: 3500 - 7500+	33471	426	298R	108°	298°	304°	263°	268°	.626"	.630"	84532
ULTRA-ACTION / PERFORMANCE LEVEL 5 Call for camshaft characteristics, as they depend on engine setup.	33472	426	308R	105°	308°	314°	278°	285°	.689"	.652"	84532
ULTRA-ACTION / PERFORMANCE LEVEL 5 Call for camshaft characteristics, as they depend on engine setup.	33473	426	318R	106°	318°	322°	286°	290°	.720"	.711"	84532 84536
CUSTOM GROUND ROLLER Special order roller lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00133R	ALL CID	Refer to www.crower.com for camshaft recommendation								See Below

Note: These cams use .026" intake, .028" exhaust valve lash.

3 BOLT CAMS AVAILABLE

ENGINEERED COMPONENT KITS

Part. No	Lifters	Springs	Retainers	Seals	Keepers	Remarks
84532	66233-16	68803-16	86783-16	86070T-16	86709-16	
84536	66233-16	68548-16	86069-16	86070T-16	86109-16	For rpm up to 6000 plus.

Spring pressure:

* Machine work required, specify 5/16 pilot shaft when ordering.

Note: If using 11/32 valve stems, change to keeper 86110-16.

Note: If running blown application, see heavy-duty roller lifters listed under accessories.

Note: If exceeding 7500 rpm, high pressure springs and titanium retainers may be required. See spring and retainer specs or contact Crower for proper recommendations.

Valve timing events are available online at: www.crower.com

ACCESSORIES

Part. No	Description
73680-16	Billet rocker adjusting screw and lock nut
70188-16	Tapered pushrods 3/8
76545	Timing gear set
66284-16	Roller lifters w/.903" body & .812" O.D. bearing
66285-16	Roller lifters w/high seat (+.150")

Crower has an extensive inventory of single and double tapered pushrods available on a special order basis. Customer must furnish accurate pushrod length.

SPECIAL ORDER DRAG RACING CAMSHAFTS KB Aluminum JP1 TFX Milodon & Rodeck

As of last count we have accumulated over 80 different combinations of proven drag racing cam profiles and lobe center configurations. So rather than list each profile and lobe center, we felt that it would be more beneficial to encourage you to call our experienced technical support staff with your accumulated data and specifications. In a joint effort, that will be kept in the strictest of confidence, we will formulate the right combination of intake and exhaust lobe characteristics designed specifically for your application. We are currently involved with some of the top racers and engine builders and are achieving tremendous success with this style of format.

NISSAN

KA24DE-16V TWIN CAM (91-02)

New Improved Cam Core Technology SX 91-98 Rear Wheel Drive

Description	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Nissan KA24DE (1996)	Stock	114°	248°	256°	203°	207°	.344"	.357"	Stock
STAGE 1 - Hotter Than Stock Street use with emphasis on bottom end and mid range power. Works with stock springs up to factory rev limiter. RPM Range: Idle - 6250+	61351-2 61351SX-2	114°	256°	256°	210°	214°	.363"	.363"	Stock
STAGE 2 - Forced Induction Street/Strip Designed specifically for turbo or supercharger applications. Low duration, high lift profile. Requires Crower spring kit #84184. RPM Range: 1000 - 6750+	61351T-2 61351TSX-2	114°	264°	264°	218°	218°	.375"	.375"	84184
STAGE 3 - Normally Aspirated 3/4 Race Limited street use with rough idle. Normally aspirated design for fairly modified engine. Requires spring/retainer kit # 84184. RPM Range: 1000 - 7000+	61352-2 61352SX-2	112°	272°	272°	228°	228°	.406"	.406"	84184
STAGE 3 - Forced Induction Drag Race and radical Street/Strip. Requires #84184 spring kit and compatible ECU upgrade for optimum results. Lope at idle. RPM Range: 1500 - 7000+	61353-2 61353SX-2	114°	280°	280°	222°	222°	.401"	.401"	84184
STAGE 3 - Normally Aspirated Race Full race design for heavily modified & tuned engine. Not for the inexperienced tuner. Requires Crower spring/retainer kit #84184. RPM Range: 1500 - 7250+	61354-2 61354SX-2	112°	288°	288°	236°	236°	.411"	.411"	84184
CUSTOM GROUND GRIND Crower can custom grind cams to your desired specs, also proprietary profiles available upon request.	00093-2	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .008" intake (cold), .010" exhaust valve lash (cold).

Duration figures are taken at the lobe.

NOTE: For 240SX years 91-98 rear wheel drive engine, order Part # ending in SX. This application requires the distributor drive to be removed from the exhaust cam.

NOTE: For Nissan Altima 99-02, front wheel drive, the exhaust cam will drop right in, no machine work required.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainer	Seat	Remarks
84184	68188-16	87098-16	68926-16	Titanium retainer intended for race and limited street

Spring pressure:

68192-16 Seat: 1.400" @ 73 lbs / Nose: 0.950" @ 155 lbs / Coil bind: 0.850" (No machine work required).

Maximum lift on stock valve springs in .380".

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.

ACCESSORIES

Part No.	Description
97458I-8	Stainless steel valves - 37.10 mm (+.5mm) dia (8 only int)
97458E-8	Stainless steel valves - 31.80 mm (+.5mm) dia (8 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.

STEEL BILLET RODS

Premium steel billet rods are designed for high boost and/or nitrous applications and are available for a wide variety of Nissan engine platforms including the KA24D and DE (#B93774B-4), SR20DE (#B93773B-4), VQ35DE (#B93775B-6), VG30DE (#B93776B-6) and RB26DETT (#B93777B-6). Features 220,000 p.s.i. rod bolts standard for ultimate clamping ability.

PATROL 4.2L & 4.5L - SINGLE CAM NISSAN

New Improved Cam Core Technology

Description	Part Number	Lobe Center	Advised Duration (.010")		Duration @ .050"		Lobe Lift		Gross Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
NISSAN PATROL 4.2L (Stock Specs)	Stock	112°	260°	260°	198°	198°	.280"	.280"	.420"	.420"	Stock
STAGE 1 Hotter than stock profile. Smooth idle quality and will work with stock valve springs. No ECU upgrade required. 12+ HP over stock setup. RPM Range: Idle - 6000+	61390	112°	280°	280°	220°	220°	.296"	.296"	.445"	.445"	Stock
STAGE 2 - Forced Induction Special Performance oriented street, use with turbo, supercharger and/or nitrous. Will work with stock springs and ECU. HP gains depend on engine mods. RPM Range: 1000 - 6500+	61391	112°	299°	299°	228°	228°	.309"	.309"	.464"	.464"	Stock
STAGE 2 Recommend for hot street use. Rough idle is expected. Requires spring change (#68147). Lobe at idle is common. HP gains depend on engine mods. RPM Range: 1100 - 7000+	61392	112°	303°	303°	235°	235°	.333"	.333"	.500"	.500"	68147
STAGE 3 - 3/4 Race Road/Rally and Street/Strip. Requires spring change (#68147) and ECU upgrade to take advantage of higher rpm potential. HP gains depend on engine mods. RPM Range: 1200 - 7250+	61393	110°	309°	309°	248°	248°	.338"	.338"	.507"	.507"	68147
STAGE 4 - Full Race Emphasis on top end power with extremely rough idle quality. Not recommended for daily driver. Spring/ECU upgrade req. HP gains depend on engine mods. RPM Range: 1300 - 7500+	61394	108°	316°	316°	256°	256°	.350"	.350"	.526"	.526"	68147
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary profiles available upon request.	00054	Refer to www.crower.com for camshaft recommendation									

Note: These cams use .014" intake (hot), .016" exhaust valve lash (hot).

Note: The above cams will not fit the 4.8L Nissan Patrol applications. Duration figures are taken at the lobe.

Spring pressure:

68147-12 Seat: 1.590" @ 85 lbs / Nose: 1.150" @ 261 lbs / Coil bind: 1.030" (No machine work required).

Note: Use with stock retainers. Titanium retainers will be available shortly.

4340 Steel Billet Connecting Rods Available

B93771B-6 - 4.2L/4.5L

B93772B-6 - 4.8L


REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.

Crower's premium steel billet connecting rods can handle 1200+ HP (6 cylinder) and are available for a variety of engine makes including the Nissan Patrol and Toyota LandCruiser

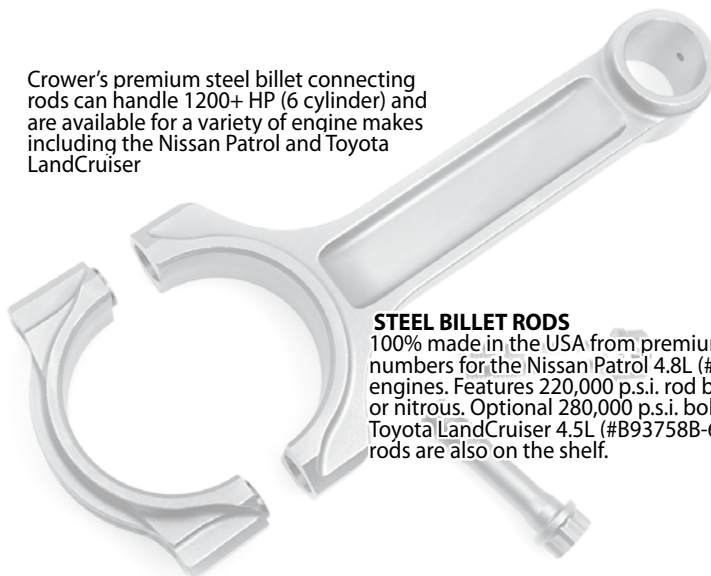

STEEL BILLET RODS

100% made in the USA from premium steel billet material, Crower offers shelf part numbers for the Nissan Patrol 4.8L (#B93772B-6) and the 4.2L/4.5L (#B93771B-6) engines. Features 220,000 p.s.i. rod bolts designed for high boost applications and/or nitrous. Optional 280,000 p.s.i. bolt upgrade also available for severe-duty use. Toyota LandCruiser 4.5L (#B93758B-6) and 4.8L - 8 cylinder (#B93760B-8) connecting rods are also on the shelf.



OLDSMOBILE HYDRAULIC FLAT TAPPET

Non Roller 1967-up

260 307 (5.0L) 350 (5.7L) 400 403 425 455 (39° bank angle)

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Low to mid-range torque for daily drivability. Economical price. RPM Power Range: 1500 - 4250 / Redline: 5500+	56915	260 350	280H	112°	280°	289°	204°	214°	.450"	.474"	
POWER BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. Healthy sound. Economical price. RPM Power Range: 1750 - 4500 / Redline: 5750+	56903	350 425	289H	112°	289°	300°	214°	224°	.474"	.498"	
ULTRA BEAST / PERFORMANCE LEVEL 4 Upper mid-range to top end power. Emphasis on top end. RPM Power Range: 2000 - 4800 / Redline: 6200+	56919	455	304H	112°	304°	316°	234°	244°	.520"	.542"	
POWER COMPU-PRO / Performance Level 2 These cams provide excellent low end and mid-range power and extended rpm range for spirited street and offroad driving. A perfect combination of mileage and power. Modifications should include small diameter tube headers, low restriction dual exhaust, aftermarket manifold, increased cfm carburetor and reworked or performance ignition. Increase in compression ratio to 9.5:1 is recommended for maximum output. Works well with automatic transmission or 4-speed. RPM Power Range: 1300-1500 to 4000-4200 / Redline: 5500+	56262	455	276HDP	112°	276°	281°	215°	221°	.488"	.494"	
HIGH PERFORMANCE COMPU-PRO / Performance Level 3 Intended for the performance oriented hot street application. These cams offer an extended rpm range with emphasis on upper bottom to top end power (strong mid-range). Performance gears, headers, dual exhaust, larger than stock cfm carburetor, performance manifold and increased compression (9.5:1 to 10.5:1) are required. Works well with automatic transmission if matched with proper ring and pinion gears and/or high stall converter. RPM Power Range: 1600-1800 to 4500-4800 / Redline: 6000+	56263	400 425	280HDP	112°	280°	286°	220°	227°	.485"	.496"	
	56264	455	284HDP	112°	284°	290°	229°	236°	.520"	.528"	
ULTRA-PERFORMANCE COMPU-PRO / Performance Level 4 The following grinds are best suited for dual purpose hot street/drag strip situations. These cams exhibit strong mid-range and top end torque and horsepower. Headers, dual exhaust, larger cfm carburetor, performance ignition and 11:1 compression are a must. Cylinder head modifications would be beneficial. Use with standard transmission or automatic with high stall converter. Low gearing a must. RPM Power Range: 2000-2200 to 6000-6200 / Redline: 6500	56263	260	280HDP	112°	280°	286°	220°	227°	.485"	.496"	84157
	56264	350	284HDP	112°	284°	290°	229°	236°	.520"	.528"	
	56265	400 425	297HDP	112°	297°	308°	237°	240°	.538"	.533"	84157
HI-DRAULIC HAULER / PERFORMANCE LEVEL 3 Lope at idle. Hot street/strip cam with strong mid-range power. RPM Power Range: 2500 - 6500	56270	400	284HDP	108°	288°	298°	228°	238°	.464"	.482"	84157
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Rough idle. Explosive mid-range power and torque. RPM Power Range: 3000 - 6500	56271	400	296HDP	108°	296°	304°	229°	241°	.505"	.532"	84157
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Rough idle. Violent mid-range acceleration. RPM Power Range: 3500 - 6500	56272	400	304HD	108°	304°	312°	244°	249°	.540"	.568"	84157
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00156H	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

Engineered Component Kit & Accessories refer to the following page for specs or contact CROWER for more info.

All previous part numbers no longer listed are still available as custom grinds. Please contact Crower for more custom grinds.

MECHANICAL FLAT TAPPET

OLDSMOBILE

Non Roller 1967-up

260 307 (5.0L) 350 (5.7L) 400 403 425 455 (39° bank angle)

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.6 / 1.6		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
COMPU-PRO / PERFORMANCE LEVEL 4 Super torque with explosive mid-range power. RPM Power Range: 3500 - 7500+	56361	400 455	284FDP	108°	284°	290°	248°	255°	.552"	.568"	84357
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00156M				Refer to www.crower.com for camshaft recommendation						
CUSTOM GROUND SOLID Special order camshaft using a custom core or 4-7-3-2 firing order or any special configuration. Call our technical support staff for personalized camshaft assistance.	00060				Refer to www.crower.com for camshaft recommendation						

Note: These cams use .024" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84157	66056-16	68405-16	87048-16	86072-16	Hydraulic Lifter. 6500 rpm.
84157X3	66056X3-16	68405-16	87048-16	86072-16	CamSaver Hydraulic Lifter. 6500 rpm.
84357	66963-16	68405-16	87048-16	86072-16	Solid Lifter. 7500 plus rpm.
84357X980	66963X980-16	68405-16	87048-16	86072-16	CoolSaver Solid Lifter. 7500 plus rpm.
84057	66056-16	68305X1-16	87048-16	86072-16	Hydraulic Lifter. 6000 rpm.

Spring pressure:

68305X1-16 Seat: 1.700" @ 68 lbs / Nose: 1.200" @ 250 lbs / Coil bind: 1.050" (Stock O.D.).

68405-16 Seat: 1.700" @ 110 lbs / Nose: 1.100" @ 338 lbs / Coil bind: 0.980" (Machine work required).

* Machine work required

Note: For lifts over .480" pushrods 70049-16 or 70050-16 are required. All solid lifter profiles require adjustable pushrods.

Non-adjustable pushrods can be used if you have proper lifter preload (.050" off snap-ring). Custom length pushrods are available from Crowder to achieve proper lifter preload. Customer must furnish accurate pushrod length. In order to assist in proper preload measurement, Crowder offers an adjustable checking pushrod.

Note: 1964-66 Oldsmobile blocks require 45° cam cores and cannot be interchanged with late model (39°) cam cores. Early model 45° camshafts are available on a special order basis. Customer must furnish lifter bore diameter when ordering.

Valve timing events are available online at: www.crower.com

All previous part numbers no longer listed are still available as custom grinds. Please contact Crowder for more custom grinds.

For severe duty applications, Crowder offers a high-lube "CamSaver" lifter that channels more oil to the cam lobe and lifter surface.

PONTIAC HYDRAULIC FLAT TAPPET

Non Roller 1955-1981

287 301 316 341 350 370 389 400 421 455 V8

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
BAJA BEAST / PERFORMANCE LEVEL 2 Low to mid-range torque for daily drivability. Economical price. RPM Power Range: 1500 - 4250 / Redline: 5500+	60915	301 350	272H	112°	272°	279°	211°	220°	.422"	.443"	84160
TORQUE BEAST / PERFORMANCE LEVEL 3 Delivers impressive mid-range and top end power. Healthy sound. Economical price. RPM Range: 1750 - 4500 / Redline: 5750+	60918	370 421	288H	112°	288°	298°	214°	224°	.444"	.467"	84160
POWER BEAST / PERFORMANCE LEVEL 4 Upper mid-range to top end power. Emphasis on top end. RPM Power Range: 2000 - 4800 / Redline: 6200+	60916	421 455	278H	112°	278°	289°	221°	229°	.455"	.470"	84160
ULTRA BEAST / PERFORMANCE LEVEL 4 Hot street profile that delivers impressive mid-range and top end power. RPM Power Range: 2000 - 4800 / Redline: 6200+	60919	428 455	304H	112°	304°	316°	231°	240°	.470"	.470"	84160
HIGH PERFORMANCE COMPU-PRO / Performance Level 3 Intended for the performance oriented hot street application. These cams offer an extended rpm range with emphasis on upper bottom to top end power (strong mid-range). Performance gears, headers, dual exhaust, larger than stock cfm carburetor, performance manifold and increased compression (9.5:1 to 10.5:1) are required. Works well with automatic transmission if matched with proper ring and pinion gears and/or high stall converter. RPM Power Range: 1600-1800 to 4500-4800 / Redline: 6000+	60243	428 455	284HDP	112°	284°	290°	228°	235°	.479"	.494"	84160

Note: These cams use .000" intake and exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84160	66056-16	68404-16	87048D-16	86072-16	Hydraulic Lifter. Up to 6500 plus rpm.
84160X3	66056X3-16	68404-16	87048D-16	86072-16	CamSaver Hydraulic Lifter. Up to 6500 plus rpm.
84360	66963-16	68405-16	87048D-16	86072-16	Solid Lifter. Up to 7000 plus rpm.
84360X980	66963X980-16	68405-16	87048D-16	86072-16	CoolFace Solid Lifter. Up to 7000 plus rpm.

Spring pressure:

68404-16 Seat: 1.600" @ 116 lbs / Nose: 1.100" @ 302 lbs / Coil bind: 0.910" (Stock O.D., no machine work).

68405-16 Seat: 1.700" @ 110 lbs / Nose: 1.100" @ 338 lbs / Coil bind: 0.980" (Stock O.D., no machine work).

A. Lifter 66962-16 is a special high oil band tappet with high pushrod seat. It is not a Chevrolet solid lifter.

Note: Non-adjustable pushrods can be used if you have proper lifter preload (.050" off snap-ring). Custom length pushrods are available from Crower to achieve proper lifter preload. Customer must furnish accurate pushrod length.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Note: The above kit will not work if using Pontiac heads with 1.65:1 rocker ratio (springs are too short). Contact Crower for special spring and retainer combination. See diagram 2.

Note: For proper valve adjustment on solid lifter profiles, Crower "Sure-Lock" rocker nuts (86053) must be used.

Valve timing events are available online at: www.crower.com

HYDRAULIC FLAT TAPPET PONTIAC

Non Roller 1955-1981

287 301 316 341 350 370 389 400 421 455 V8

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA-PERFORMANCE COMPU-PRO / Performance Level 4 The following grinds are best suited for dual purpose hot street/drag strip situations. These cams exhibit strong mid-range and top end torque and horsepower. Headers, dual exhaust, larger cfm carburetor, performance ignition and 11:1 compression are a must. Cylinder head modifications would be beneficial. Use with standard transmission or automatic with high stall converter. Low gearing a must. RPM Power Range: 2000-2200 to 6000-6200 / Redline: 6500	60243	301 350	284HDP	112°	284°	290°	228°	235°	.479"	.494"	84160
	60244	370 421	297HDP	112°	297°	308°	239°	241°	.500"	.500"	84160
HI-DRAULIC HAULER / PERFORMANCE LEVEL 3 Lope at idle. Hot street/strip cam with strong mid-range power. RPM Power Range: 2500 - 6500	60210	389 400	278HDP	108°	278°	288°	229°	239°	.480"	.501"	84160
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Rough idle. Explosive mid-range power and torque. RPM Power Range: 3000 - 6500+	60211	389 400	296HDP	108°	296°	308°	236°	242°	.509"	.516"	84160
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Rough idle. Violent mid-range acceleration. RPM Power Range: 3250 - 6500	60212	428 455	304HDP	108°	304°	312°	239°	247°	.497"	.522"	84160
HI-DRAULIC HAULER / PERFORMANCE LEVEL 4 Brutal mid to top end torque and horsepower. RPM Power Range: 3500 - 6500	60213	428 455	308HDP	108°	308°	314°	248°	256°	.518"	.537"	84160
CUSTOM GROUND HYDRAULIC Special order hydraulic lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00160H	All CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .000" intake and exhaust valve lash.

MECHANICAL FLAT TAPPET

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
PRO-STREET / PERFORMANCE LEVEL 3 High revving, super mid to top end power grind. RPM Power Range: 2800 - 6000+	60310	389 455	284FDP	112°	284°	288°	240°	248°	.477"	.501"	84160
PRO-STREET / PERFORMANCE LEVEL 4 Super upper mid-range and top end power profile. RPM Power Range: 3000 - 6500+	60311	389 455	292FDP	112°	292°	302°	247°	252°	.505"	.517"	84160
COMPU-PRO / PERFORMANCE LEVEL 4 High revving, superior upper bottom profile with emphasis on mid to top end power. RPM Power Range: 4500 - 7500+	60353	389 455	304FDP	108°	304°	312°	255°	262°	.527"	.546"	84160
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00160M	All CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .022" intake, .024" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84160	66056-16	68404-16	87048D-16	86072-16	For rpm up to 6500 plus.
84160X3	66056X3-16	68404-16	87048D-16	86072-16	CamSaver Lifter. For rpm up to 6500 plus.
84360	66962-16	68405-16	87048D-16	86072-16	Solid Lifter. For rpm up to 7000 plus.
84360X980	66962X980-16	68405-16	87048D-16	86072-16	CoolFace Solid Lifter. For rpm up to 7000 plus.

PONTIAC MECHANICAL ROLLER TAPPET

Mechanical 1955-1981
287 301 316 341 350 370 389 400 421 455 V8

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
ULTRA-ACTION / PERFORMANCE LEVEL 5 All range camshaft for heavy car, high stall with compression and headers. RPM Power Range: 3000 - 6500+	60450	389 455	275R	112°	275°	284°	233°	242°	.495"	.496"	84568
ULTRA-ACTION / PERFORMANCE LEVEL 5 Radical mid-range cam, shifts at 6500 rpm with a redline of 7000. RPM Power Range: 4000 - 7000	60451	389 455	284R	108°	284°	294°	247°	254°	.582"	.567"	Call
ULTRA-ACTION / PERFORMANCE LEVEL 5 Large cid camshaft (455 cid or bigger). Smashing mid-range power hit and top end performer. RPM Power Range: 4500 - 7250+	60452	389 455	294R	108°	294°	298°	257°	263°	.649"	.636"	Call
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00160R	All CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .026" intake, .028" exhaust valve lash.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Seals	Remarks
84568	66260-16	68380X2-16	87048D-16	86072-16	Roller Lifter. For rpm up to 7500 plus.

Spring pressure:

68380X2-16 Seat: 1.800" @ 197 lbs / Nose: 1.250" @ 446 lbs / Coil bind: 1.110"


Note: Non-adjustable pushrods can be used if you have proper lifter preload (.050" off snap-ring). Custom length pushrods are available from Crower to achieve proper lifter preload. Customer must furnish accurate pushrod length.

CAUTION! When using high lift cams pay close attention to retainer, oil seal and valve guide clearance at full lift (minimum .050").

Note: The above kit will not work if using Pontiac heads with 1.65:1 rocker ratio (springs are too short). Contact Crower for special spring and retainer combination. See diagram 2.

Note: For proper valve adjustment on solid lifter profiles, Crower "Sure-Lock" rocker nuts (86053) must be used.

Valve timing events are available online at: www.crower.com

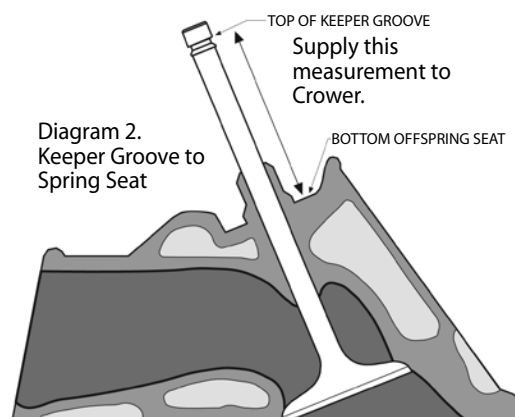

Accurately measure the distance from the top of keeper groove to bottom of spring seat (see arrows indicating measurement in diagram 2).

Note: If heads have been extensively modified (machined spring pockets, longer valves, etc.) contact Crower for proper spring, keeper, cup and retainer recommendations. Have your keeper/seat measurement available.

EJ205 WRX USDM - QUAD CAM (2002 - UP) SUBARU WRX SEDAN / WRX WAGON (2002 - UP)

New Improved Cam Core Technology

Description	Part Number	Lobe Center	Advised Duration Seat		Duration @ .050"		Gross Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Subaru EJ20 (2003)	Stock	114°	248°	248°	208°	208°	.366"	.366"	Stock
STAGE 1 - Hotter Than Stock Street use with emphasis on bottom end and mid range power. Works with stock springs up to factory rev limiter. RPM Power Range: Idle - 7000+	62580-4	114°	256°	256°	216°	216°	.380"	.380" (9.65 mm)	Stock
STAGE 2 - Mild Street/Strip Best cam choice for daily driver. Delivers excellent top end without losing low end torque. Recommend spring kit #84185. RPM Power Range: 1000 - 7500+	62581-4	114°	264°	264°	220°	220°	.400"	.400" (10.16 mm)	84185 84185S
STAGE 3 - 3/4 Race Designed for street/strip applications and features a slight lobe at idle and great top end power. Requires spring/retainer kit #84185. RPM Power Range: 1250 - 8000+	62582-4	114°	272°	272°	228°	228°	.406"	.406" (10.31 mm)	84185 84185S
STAGE 4 - Full Race Drag Race and radical Street/Strip. Requires #84185 spring kit and compatible ECU upgrade for optimum results. Rough idle. RPM Power Range: 1500 - 8500+	62583-4	114°	280°	280°	234°	234°	.415"	.415" (10.55 mm)	84185 84185S
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary profiles available upon request.	00095-4	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

If running EJ207, modifications are required to the cylinder head (AVCS) in order to run the above camshafts. Duration figures are taken at the lobe.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84185	68195-16	87085-16	Titanium retainer intended for race and street.
84185S	68195-16	87085S-16	Steel Retainer, for daily street use.

Spring pressure:
68195-16 Seat: 1.420" @ 60 lbs / Nose: 1.000" @ 161 lbs / Coil bind: 0.860"
(No machine work required).

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/ smooth surface.

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.



STEEL BILLET RODS

Designed for high boost and nitrous applications, Crower offers a wide variety of connecting rods for the Subaru engine platforms including the WRX-EJ20/ STi-EJ257 (#B93766B-4). CNC machined from the highest grade, USA milled steel billet material, Crower connecting rods are the industry standard. Features 220,000 p.s.i. rod bolts standard and aluminum-bronze bushings standard.

New Improved Cam Core Technology

Description	Part Number	Lobe Center	Advised Duration Seat		Duration @ .050"		Gross Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Subaru EJ25 (2004 - up)	Stock	114°	248°	248°	208°	208°	.366"	.366"	Stock
STAGE 1 - Hotter Than Stock Street use with emphasis on bottom end and mid range power. Works with stock springs up to factory rev limiter. RPM Power Range: Idle - 6700+	62590-4	114°	256°	256°	216°	216°	.380"	.380" (9.65 mm)	Stock
STAGE 2 - Mild Street/Strip Best cam choice for daily driver. Delivers excellent top end without losing low end torque. Recommend spring kit #84185. RPM Power Range: 1000 - 7500+	62591-4	114°	264°	264°	220°	220°	.400"	.400" (10.16 mm)	84185 84185S
STAGE 3 - 3/4 Race Designed for street/strip applications and features a slight lobe at idle and great top end power. Requires spring/retainer kit #84185. RPM Power Range: 1200 - 8000+	62592-4	114°	272°	272°	228°	228°	.406"	.406" (10.31 mm)	84185 84185S
STAGE 4 - Full Race Drag Race and radical Street/Strip. Requires #84185 spring kit and compatible ECU upgrade for optimum results. Rough idle. RPM Power Range: 1400 - 8500+	62593-4	114°	280°	280°	234°	234°	.415"	.415" (10.55 mm)	84185 84185S
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary profiles available upon request.	00091-4	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

If running EJ207, modifications are required to the cylinder head (AVCS) in order to run the above camshafts. Duration figures are taken at the lobe.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84185	68195-16	87085-16	Titanium retainer intended for race and street.
84185S	68195-16	87085S-16	Steel Retainer, for daily street use.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

Spring pressure:

68195-16 Seat: 1.420" @ 60 lbs / Nose: 1.000" @ 161 lbs / Coil bind: 0.860"

(No machine work required).


ACCESSORIES

Part No.	Description
97460I-8	Stainless steel valves - 36 mm head dia (8 only int)
97460E-8	Stainless steel valves - 32 mm head dia (8 only exh)
97461I-8	Stainless steel valves - 36.5 mm head dia (8 only int)
97461E-8	Stainless steel valves - 32.5 mm head dia (8 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.

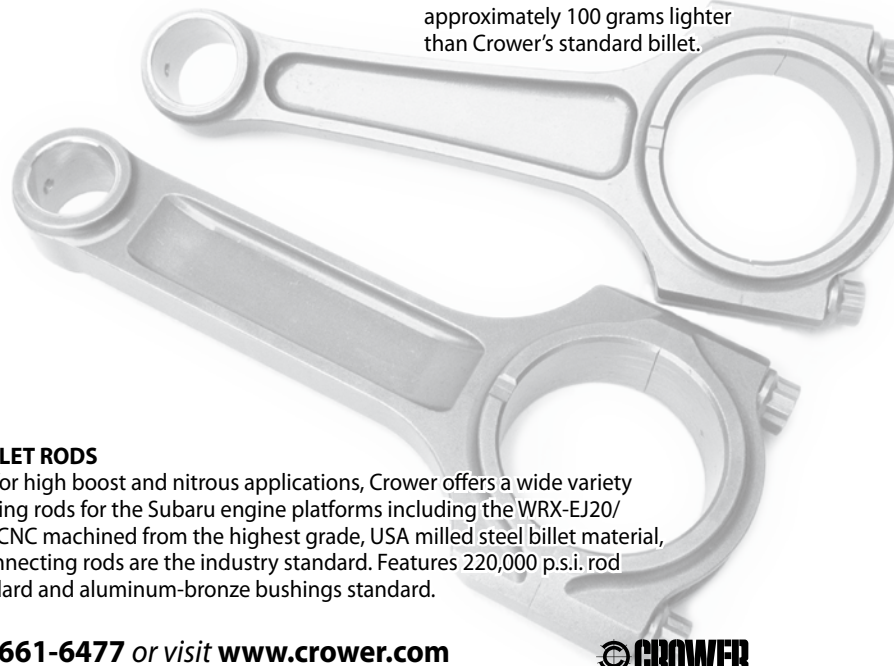

STEEL BILLET RODS

Designed for high boost and nitrous applications, Crower offers a wide variety of connecting rods for the Subaru engine platforms including the WRX-EJ20/STI-EJ257. CNC machined from the highest grade, USA milled steel billet material, Crower connecting rods are the industry standard. Features 220,000 p.s.i. rod bolts standard and aluminum-bronze bushings standard.

SUPRA 2JZ-GTE FACTORY TURBO 6-CYL. TWIN CAM (93-98)

TOYOTA

New Improved Cam Core Technology

Description	Part Number	Advertised Duration		Duration @ .010"		Duration @ .050"		Gross Lift		Suitable Component Kit
		Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (2JZGTE)	Stock	248°	248°	276°	204°	200°	204°	.338" inches 8.58 mm	.346" inches 8.79 mm	Stock
	264	264°	264°	281°	281°	222°	222°	.364" inches 9.24 mm	.364" inches 9.24 mm	Stock
	272	272°	272°	287°	318°	229°	231°	.374" inches 9.50 mm	.380" inches 9.65 mm	84168 84168S
STAGE 1 - Daily Driver Street use and more aggressive turbo and nitrous. Slight lobe at idle. RPM Power Range: Idle - 7500+	61401-2	264°	264°	289°	289°	218°	218°	.375" inches 9.52 mm	.375" inches 9.52 mm	84168 84168S
STAGE 2 - 3/4 Race Street/Strip package. Lobe at idle, extended rpms. Kit #84168 required. RPM Power Range: 1000 - 8500+	61402-2	272°	272°	276°	278°	230°	232°	.406" inches 10.31 mm	.415" inches 10.54 mm	84168 84168S
STAGE 2 - 3/4 Race Hot street, similar to HKS 272 specs. Kit #84168 required. RPM Power Range: 1000 - 8500+	61402A-2	272°	272°	310°	310°	228°	230°	.372" inches 9.45 mm	.372" inches 9.45 mm	84168 84168S
STAGE 3 - Full Drag Race Limited street with rough idle. Shim under bucket may be required. RPM Power Range: 1250 - 9000+	61403-2	280°	280°	278°	280°	232°	234°	.415" inches 10.54 mm	.425" inches 10.80 mm	84168 84168S
CUSTOM GROUND 2JZGTE CAMS Special order custom ground profiles available for an additional charge. Proprietary and confidential profiles also available. See specs listed below.	00072-2	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Note: The above cores will not fit the non-turbo 2JZ cylinder head. No cores available at time of publication.

Note: 1JZ Cams available, call Crower.

ENGINEERED COMPONENT KITS

Part No.	Springs	Retainers	Remarks
84168	68195-24	87085-24	Titanium Retainer
84168S	68195-24	87085S-24	Steel Retainer

Spring pressure:
68195-24 Seat: 1.325" @ 82 lbs / Nose: 0.980" @ 166 lbs /
Coil bind: 0.860" (No machine work required).

BILLET STROKER KITS

Crower offers stroker kits for the 2JZGTE that feature a 4340 steel billet crankshaft, 4340 steel billet rods and custom pistons, pins, rings and locks.
94mm stroke x 87mm bore = 3.4L...big horsepower!


REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

ACCESSORIES

Part No.	Description
86054T	Adjustable Cam Sprocket (1 only). All black. 2 required
97440I-12	Stainless steel valves - 33.6 mm head dia (12 only int)
97440E-12	Stainless steel valves - 29 mm head dia (12 only exh)
97441I-12	Stainless steel valves - 34.6 mm head dia (12 only int)
97441E-12	Stainless steel valves - 30 mm head dia (12 only exh)

Note: When ordering valves, be sure to specify one set int and one set exh.

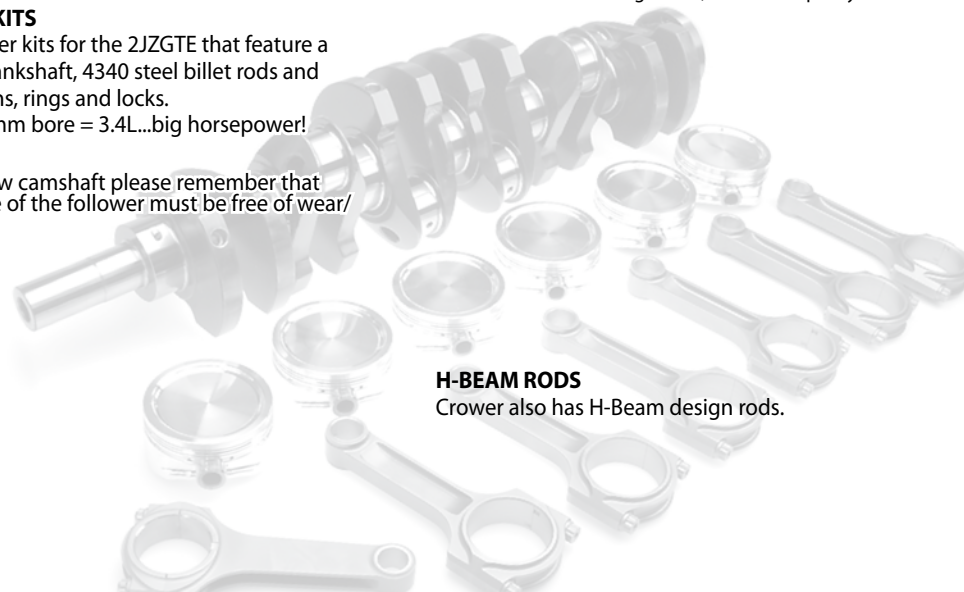

H-BEAM RODS

Crower also has H-Beam design rods.

TOYOTA 1ZZ-TWINCAM

New Improved Cam Core Technology

Description	Part Number	Lobe Center	Advised Duration		Duration @ .050"		Gross Lift		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
TOYOTA COROLLA (2000)	Stock	114°	256°	246°	204°	195°	.379"	.346"	Stock
STAGE 1 Street use with emphasis on bottom end and mid range power. Works with stock springs up to factory rev limiter. RPM Power Range: Idle - 7000+	61451-2	114°	264°	264°	214°	202°	.379"	.367"	Stock
STAGE 2 - Forced Induction Designed specifically for turbo or supercharger applications. Low duration, high lift profile. Requires Crower spring kit #84199. RPM Power Range: Idle - 8000+	61451T-2	114°	272°	272°	215°	212°	.396"	.379"	84199
STAGE 2 - 3/4 Race Designed for street/strip applications in normally aspirated engines. Requires spring/retainer kit #84199 and ECU mods. RPM Power Range: 1000 - 7800+	61452-2	112°	272°	272°	222°	219°	.396"	.396"	84199
STAGE 3 - Full Race Drag Race and radical Street/Strip. Requires #84199 spring kit and compatible ECU upgrade for optimum results. Rough idle. RPM Power Range: 1100 - 8000+	61453-2	112°	280°	280°	228°	219°	.415"	.396"	84199
CUSTOM GRIND Crower can custom grind cams to your desired specs, also proprietary profiles available upon request.	00085-2	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

Duration figures are taken at the lobe.

ENGINEERED COMPONENT KITS


Part No.	Springs	Retainers	Remarks
84199	68160-16	87086-16	Titanium retainer intended for race and limited street

Spring pressure:

68160-16 Seat: 1.310" @ 39 lbs / Nose: 0.880" @ 97 lbs / Coil bind: 0.810" (No machine work required).

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/ smooth surface.

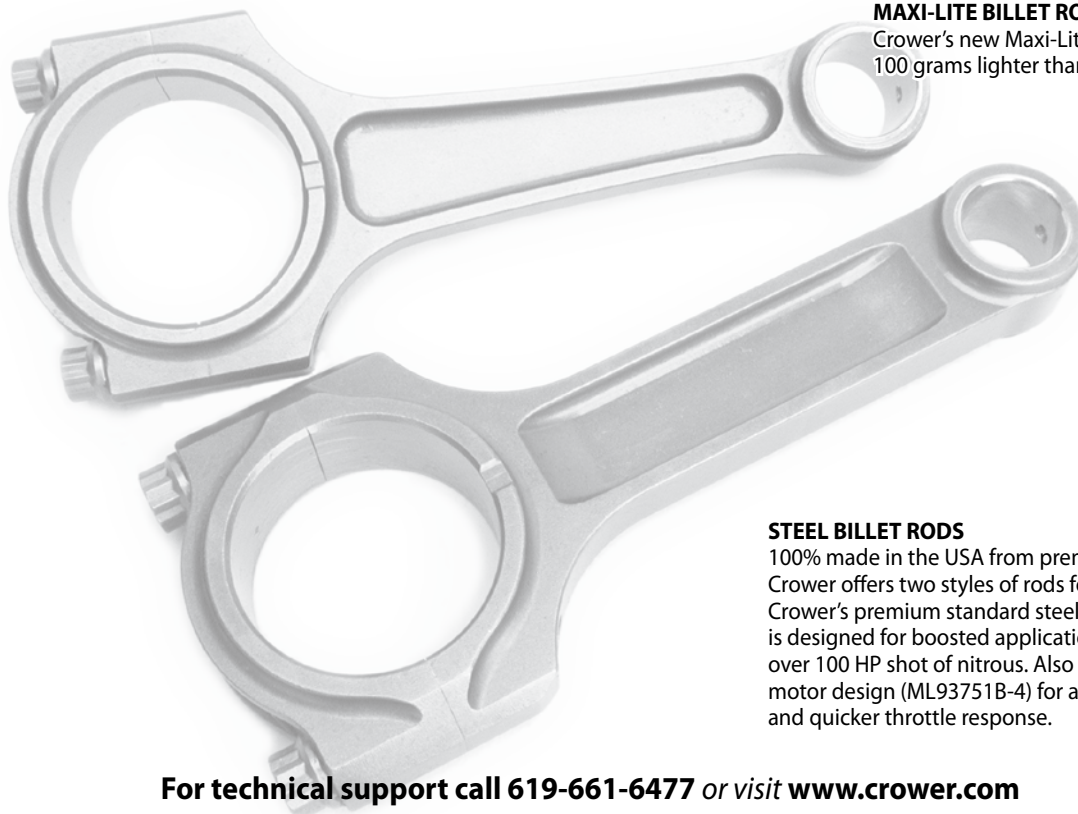

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.

STEEL BILLET RODS

100% made in the USA from premium steel billet material, Crower offers two styles of rods for the Toyota 1ZZ engine. Crower's premium standard steel billet rod (#B93751B-4) is designed for boosted applications in excess of 12 psi or over 100 HP shot of nitrous. Also available in a Maxi-Lite all motor design (ML93751B-4) for added weight reduction and quicker throttle response.

2T/2TC/3TC4 CYLINDER TOYOTA

New Improved Cam Core Technology

Description	Part Number	Lobe Center	Advised Duration		Duration @ .050"		Lobe Lift		Gross Lift 1.4 / 1.4		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
STAGE 1 Stock replacement. RPM Power Range: Idle - 5500+	61850*	110°	256°	256°	194°	194°	.254"	.254"	.355"	.355"	Stock
STAGE 1 Mild street, similar to stock idle. Good for bottom end performance. Works well with automatic transmission. RPM Power Range: Idle - 6000+	61851*	108°	260°	266°	206°	214°	.250"	.260"	.350"	.364"	Stock
STAGE 2 Excellent normally aspirated street. Emphasis on mid-range power. Tight center for torque and lope at idle. RPM Power Range: 1000 - 7000+	61852*	108°	274°	280°	220°	230°	.253"	.268"	.354"	.375"	TRD
STAGE 2 - 3/4 Race Excellent for turbo and nitrous for street/strip applications. Wide center for top end performance. RPM Power Range: 2600 - 7200+	61853*	114°	286°	280°	240°	230°	.263"	.268"	.368"	.375"	TRD
STAGE 4 - Full Race Race turbo (30+ lbs boost minimum). Also works well with NOS. RPM Power Range: 2600 - 7200+	61854*	112°	290°	296°	258°	268°	.360"	.370"	.504"	.518"	TRD
STAGE 5 - Full Race Performance built, race oriented application. Not for the inexperienced tuner. Top end insanity. RPM Power Range: 3000 - 8000+	61855*	114°	300°	300°	268°	268°	.370"	.370"	.518"	.518"	TRD
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00127	Refer to www.crower.com for camshaft recommendation									

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).

* Indicates spec change from previous listings. Contact TRD regarding spring and retainer availability. Valve timing events are available online at: www.crower.com

4AGE4 CYLINDER

Description	Part Number	Lobe Center	Advised Duration (.010")		Duration @ .050"		Lobe Lift		Gross Lift 1.4 / 1.4		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
FACTORY OEM SPECS (4AGE)	STOCK	-	255°	258°	204°	204°	.298"	.298"	-	-	Stock
STAGE 1 Street use. Slight lope at idle. RPM Range: 2000 - 7000+	61821-2	-	268°	268°	212°	212°	.305"	.305"	-	-	68162-16
STAGE 2 4AGEZ forced induction applications. Big lift, short duration profile. RPM Range: 2500 - 7500	61822T-2	-	270°	270°	218°	218°	.344"	.344"	-	-	68162-16
STAGE 2 Use for street/strip applications with no power adders. Lope at idle. RPM Range: 2500 - 7500+	61822-2	-	272°	272°	224°	224°	.321"	.321"	-	-	68162-16
STAGE 3 - 3/4 Race Recommended for mostly strip use. All motor application, rough idle. RPM Range: 3000 - 8500+	61823-2	-	280°	280°	234°	234°	.333"	.333"	-	-	68162-16
STAGE 3 - Full Race All out, all motor drag profile. not for the inexperienced tuner. RPM Range: 3500 - 9000+	61824-2	-	288°	298°	234°	240°	.333"	.344"	-	-	68162-16
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00070-2	Refer to www.crower.com for camshaft recommendation									

68162-16 Seat: 1.300" @ 54 lbs / Nose: 0.950" @ 128 lbs / Coil bind: 0.885" (No Machine work required).

TOYOTA 22R4 CYLINDER

New Improved Cam Core Technology

Description	Part Number	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
			Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
CARBURETOR - STAGE 1 10:1 compression, low to mid-range torque. Heavy vehicle. RPM Range: 2200 - 6200+	61800	108°	270°	276°	216°	195°	.430"	.430"	Stock
CARBURETOR - STAGE 1 10:1+ compression, header, intake manifold, carb mods. RPM Range: 3000 - 7000+	61801	108°	286°	290°	226°	236°	.429"	.443"	Stock
CARBURETOR - STAGE 2 11:1+ compression, header, big single, or dual carbs. RPM Range: 3400 - 7200+	61803	108°	290°	298°	236°	240°	.443"	.417"	68218-8
CARBURETOR - STAGE 3 (3/4 Race) 12:1+ compression, header, big single, or dual carbs, porting, etc... RPM Range: 4200 - 8000+	61804*	106°	298°	304°	248°	254°	.489"	.504"	68218-8
CARBURETOR - STAGE 4 (Full Race) Professionally prepared, purpose built, race only engine. RPM Range: 5000 - 8500+	61805	106°	308°	308°	264°	264°	.566"	.566"	68218-8
EFI - STAGE 1 Excellent stock replacement cam. No other modifications required, straight forward remove and replace. RPM Range: 1500 - 5500+	61802	114°	252°	260°	204°	210°	.420"	.438"	Stock
EFI - STAGE 2 Street/Strip profile and all purpose daily driver. Headers, performance exhaust recommended. RPM Range: 2000 - 7000+	61807	114°	270°	276°	216°	220°	.430"	.430"	Stock
EFI - STAGE 3 (3/4 Race) Excellent for turbo and nitrous for street/strip applications. Wide center for top end performance. RPM Range: 2500 - 7000+	61808	114°	280°	280°	226°	226°	.445"	.445"	68218-8
EFI - STAGE 4 (Full Race) Mostly strip, not for daily driver. Very rough idle, aftermarket valve springs, ECU mods required. RPM Range: 3000 - 7500+	61809	114°	290°	298°	236°	240°	.443"	.417"	68218-8
CUSTOM GROUND SOLID Special order solid lifter camshaft ground to your specifications. Call our technical support staff for personalized camshaft assistance.	00128	Refer to www.crower.com for camshaft recommendation							

Note: These cams use .006" intake (cold), .008" exhaust valve lash (cold).


*Indicates design change from previous listings.

Optional spring:

68218-8 Inner spring for rpm over 6000 rpm. Use with stock outer.

REMEMBER!

When installing new camshaft please remember that the contact surface of the follower must be free of wear/smooth surface.

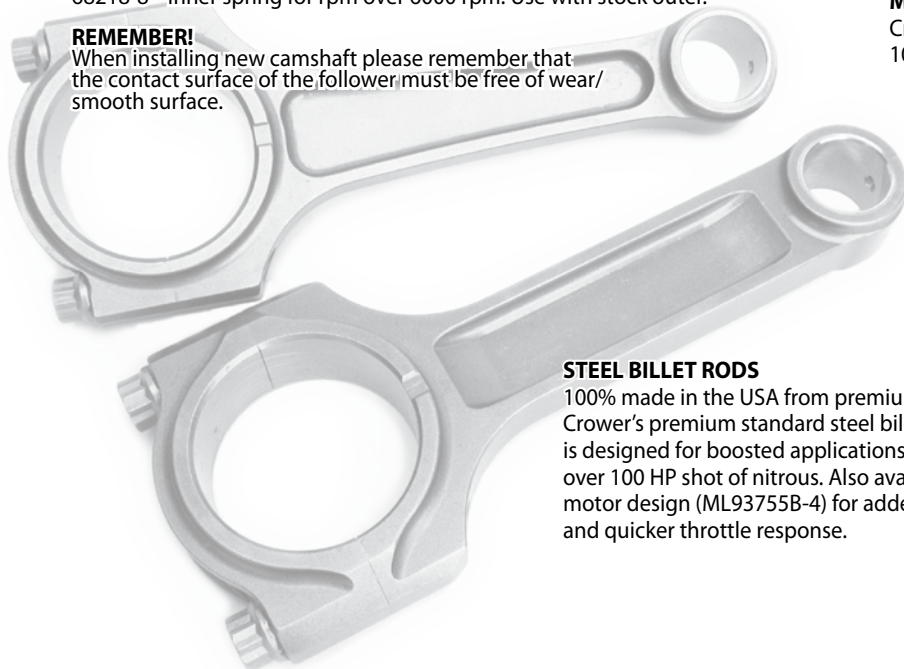

MAXI-LITE BILLET RODS

Crower's new Maxi-Lite billet is approximately 100 grams lighter than Crower's standard billet.

STEEL BILLET RODS

100% made in the USA from premium steel billet material. Crower's premium standard steel billet rod (#B93755B-4) is designed for boosted applications in excess of 12 psi or over 100 HP shot of nitrous. Also available in a Maxi-Lite all motor design (ML93755B-4) for added weight reduction and quicker throttle response.

SOLID CAMSHAFTS VOLKSWAGEN

Type 1 & 3 Air Cooled, & Type 4 Water Cooled

Description	Part Number	C.I.D. Group	Grind	Lobe Center	Advertised Duration		Duration @ .050"		Gross Lift 1.5 / 1.5		Suitable Component Kit
					Intake	Exhaust	Intake	Exhaust	Intake	Exhaust	
Smooth idle. Great all around stock replacement cam. Super torque profile. RPM Power Range: 1000 - 5000+	61002	ALL CID	B260F	110°	260°	268°	220°	227°	.375"	.381"	84261
Fair idle. Good bottom end profile with mid-range power. Emphasis on torque. RPM Power Range: 1800 - 6000+	61000	ALL CID	M268F	110°	268°	268°	227°	227°	.354"	.354"	84261
Fair idle. Competition profile. Super torque and mid-range profile for 1600cc engines. RPM Power Range: 2000 - 7000+	61003	ALL CID	VW276F	107°	276°	284°	234°	244°	.398"	.421"	84261 84361
Fair idle. High torque profile with emphasis on the top end for 1800cc engines and under. RPM Power Range: 2500 - 7500+	61004	ALL CID	VW284F	107°	284°	290°	244°	252°	.424"	.446"	84261 84361
Fair idle. Broad mid-range and top end power for 2180cc engines and under. RPM Power Range: 2500 - 7500+	61005	ALL CID	VW290F	107°	290°	298°	252°	260°	.447"	.460"	84361
Fair idle. Broad mid-range and top end power for engines with increased compression. RPM Power Range: 3000 - 8000+	61006	ALL CID	VW298F	107°	298°	306°	260°	272°	.462"	.482"	84361
Rough idle. Strong mid-range and top end power for 2000cc engines or larger with increased compression. RPM Power Range: 3500 - 8500+	61007	ALL CID	VW306F	107°	306°	312°	272°	280°	.481"	.500"	84361
CUSTOM GROUND VW CAMS Special order custom ground profiles available. Proprietary and confidential profiles also available. See specs listed below. Type 1 & 3	00004	ALL CID	Refer to www.crower.com for camshaft recommendation								
CUSTOM GROUND VW CAMS Special order custom ground profiles available. Proprietary and confidential profiles also available. See specs listed below. VW Type 4	00004V	ALL CID	Refer to www.crower.com for camshaft recommendation								

Note: These cams use .006" intake, .008" exhaust valve lash.

Note: Water cooled cam cores also available for Rabbit, Scirocco, Jetta and Dasher (1972-90) 4 cyl.

Note: Increasing rocker ratio and spring pressure in these camshafts may enhance the performance characteristics of these camshafts, depending on engine setup.

ENGINEERED COMPONENT KITS

Part No.	Lifters	Springs	Retainers	Remarks
84261	66961-8	68141-8	87045-8	For rpm up to 6500 plus.
84361	66961-8	68404-8	87044-8	For rpm up to 8000 plus.

SPECIAL ORDER

VOLKSWAGEN CAMSHAFTS

COMPETITION PROFILES

Whether you're running the Type 1, 3 or 4 engine, Crower has hundreds of cam profiles that will deliver increased performance. Call with the following information for a proper **recommendation**:

- Engine specs (bore, stroke, etc...).
- Connecting rod length.
- Intake and exhaust flow figures (intake and exhaust manifold lengths).
- Intended operating power range and type of fuel.
- Data on your best existing camshaft.
- Rocker ratio information (intake and exhaust).
- Installed valve spring height (see diagram 2).
- Conventional flat tappet (cast iron), hardface or roller tappet (Type 1 and 3 only).

Spring pressure:


68141-8 Seat: 1.600" @ 52 lbs / Nose: 1.050" @ 150 lbs / Coil bind: 0.850" (Stock O.D., no machine work).
68404-8 Seat: 1.600" @ 116 lbs / Nose: 1.100" @ 281 lbs / Coil bind: 0.950" Optional spring (heavy duty):
68146-8 Seat: 1.600" @ 117 lbs / Nose: 1.100" @ 261 lbs / Coil bind: 0.975" (Stock O.D., no machine work).

ACCESSORIES

Part No.	Description
86061	Replacement cam gear
86059-3	Cam bolts - Air Cooled

SPRING INSTALLED HEIGHT

Diagram 2. Calculating Installed Spring Height

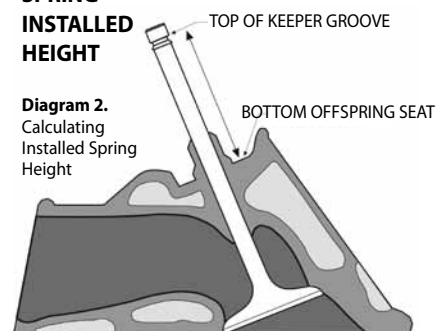

Measure the height from top of keeper groove to bottom of spring seat. Refer to the "height" column of your retainer and add or subtract the amount given from the original overall measurement.

Custom Camshafts / Regrinds

Lobe lift is the maximum lift point on the cam lobe. Not factored with a rocker ratio.

Duration is checked at seven different positions.

Average foot is the contact pattern of the lobe on the lifter surface.

Lobe area is derived from duration and lift. Used for comparison.

Opening and closing velocity speeds are checked at three positions over a 30° cam and 60° crank movement to insure accurate lobe comparison data.

Lobe separation shows angular displacement of intake to exhaust.

DURATION AT LIFT

VELOCITY/SPEED

LC: 106	LIFT	005	010	020	050	100	200	300	OPEN SPEED	CLOSE SPEED	FOOT	AREA
INT	0.337	339	306	273	234	196	138	71	570/733/721	498/640/666	0.780	26.93
EXH	0.342	344	310	279	240	203	142	85	592/740/728	501/645/670	0.800	28.06

CROWER COMPUTERIZED LOBE ANALYSIS

CUSTOM CAMSHAFTS

Crower has a variety of custom cam cores and cam options available to choose from. Please contact a Crower cam technician for further information.

LOW VOLUME SEMI CORES

Crower has cam cores available for these applications:

FOREIGN

Acura/Honda B18A/B DOHC non VTEC
 Acura/Honda K20A2 DOHC VTEC
 Acura/Honda B series DOHC VTEC
 Acura/Honda H22 DOHC VTEC
 Acura/Honda H23 DOHC non VTEC
 Acura/Honda D16Z6 & D16Y8 SOHC VTEC
 Acura/Honda D17A2 SOHC VTEC
 BMW 6 cyl. 1972-80
 Holden V8 (all appl.)
 Mitsubishi/DSM 4G63
 Mitsubishi Evolution
 Mitsubishi/DSM 420A
 Nissan SR20DE (DOHC)
 Nissan "L" Series 16, 18, 20 4 cyl.
 1969-80 (drilled for oil)
 Nissan "Z" Series 240, 260, 280 6 cyl.
 1977-80 (drilled for oil)
 Subaru EJ205 (DOHC) - Quad Cam
 Toyota Supra 2JZ (1994-98)
 Toyota 1ZZ (DOHC)
 Toyota 3TC 4 cylinder
 Volvo B-18, B-20 4 cyl.
 VW 4 cyl. Type 2 & 4 Air Cooled
 411, 914
 VW Rabbit, Scirocco, Jetta,
 Dasher, 1.5, 1.6, 1.7, 1.8 4 cyl. (gas)

DOMESTICS

Chevrolet/GM Ecotec 2.2L
 Chevrolet 164 Corvair Flat 6 cyl. 1964-69
 (std. rot.)
 Chevrolet 164 Corvair Flat 6 cyl. 1964-69
 (rev. rot.)
 Dodge Neon (DOHC) & SRT-4
 Dodge 170, 198, 225 Inline 6 cyl. 1960-75
 Dodge 2.2L, 2.5L 4 cyl.
 Ford Focus 2.0L Zetec
 Ford 2.3L Duratec
 Ford & Cortina 1600 cc 4 cyl.
 Ford Flathead 239 V8 1948
 (no nose)
 Ford Flathead 239 V8 1949-53 (long nose)
 Pontiac 151 4 cyl. Iron Duke w/3 main
 journals, 2 gears (flat tappet)
 Pontiac 151 4 cyl. Iron Duke w/3 main
 journals, 2 gears
 (roller tappet)

CAMSHAFT REGRINDS

If you're lacking performance, send Crower your used or damaged camshaft for complete lobe analysis and regrinding or repair. Cams will be straightened and then checked-out (sample shown above) to establish original specs. A Crower technician will analyze all of the data and, based on your performance parameters, regrind your cam to desired specs.

Description	Duration
#1 TOURING PROFILE (250F) (Solid Lifter) Improves entire rpm range from 1000 to 6000. Smooth idle. Stock applications with no more than 10.5:1 compression.	250°
#2 RALLY SPORT PROFILE (264F) (Solid Lifter) Slight lobe at idle. Improves rpm range from 1500 to 6500. Greatly improves high gear acceleration for passing and hills.	264°
#3 SLALOM/AUTOCROSS PROFILE (270F) (Solid Lifter) Slight lobe at idle, but smooth into the throttle. Improves rpm range from 2000 to 6700 plus. More power for passing and hills.	270°
#4 CLUB RACER PROFILE (284F) (Solid Lifter) Racy lobe at idle. Extends rpm range from 2500 to 6500 with redline at 7100 plus. Increased compression, valve pocketing in combustion chamber and added carburetion will enhance total power.	284°
#5 COMPETITION PROFILE (290F) (Solid Lifter) Race only. Very rough idle, especially with added carburetion. Higher compression pistons or head milling advised as peak horsepower develops in 5500 to 6500 rpm range.	290°
#6 ROAD RACING PROFILE (304F) (Solid Lifter) Race only. Requires extensive modifications like 13:1 compression, grouped exhaust system, individual carburetion, inlet valve pocketing and engine balance. Rpm range from 4500 to 8000.	304°

Note: Lift figures are not provided because of the variety of rocker ratios from engine to engine.

AVAILABLE REGRINDS

Part No.	Description
65000	Regrind - Hydraulic or Solid (any popular engine make)
65001	Regrind - Roller (any popular engine make)
65002	Regrind - Tractor (gas or diesel)
65003	Regrind - VW (single pattern)
65004	Regrind - VW (dual pattern)
65006	Regrind - Special Order Application (low volume)
65007	Regrind - INRAD Roller or Solid (low volume)
65008	Regrind - Hardface with 180° weld (low volume)
65009	Regrind - Hardface with 360° weld (low volume)
65010	Regrind - Custom Order
65014	Regrind - 4 cyl Twin Cam
65016	Regrind - 6 cyl Twin Cam
65020	Regrind - VTEC DOHC (B series, H22, etc...)
65021	Regrind - VTEC SOHC (D series)

Camshaft Accessories



ADVANCE & RETARD CAMSHAFT BUSHINGS

Using Crower camshaft bushings is the easy way to "tune" your camshaft timing. You'll receive five advance or retard bushings that are individually stamped to display amounts advance/retard in cam degrees (0°, 1°, 2°, 3°, 4°). Features a shouldered lip that retains the bushing and eliminates fallout.

Part No.	Description
72000	CHEVROLET 0° (1 only)
72001	CHEVROLET 1° (1 only)
72002	CHEVROLET 2° (1 only)
72003	CHEVROLET 3° (1 only)
72004	CHEVROLET 4° (1 only)
72005	CHEVROLET BUSHING KIT 0°-4°(set/5)
72011	FORD 289-460 V8 (set/4 - 1° not included)

Note: Ford kits come with special dowel pin.



LIGHTWEIGHT FUEL PUMP PUSHROD

The Crower fuel pump pushrod is manufactured from lightweight steel tubing that is heat-treated for added strength. The bronze tip insures proper surface mating with the fuel pump eccentric lobe on 8620 steel billet camshafts. This surface compatibility eliminates the wear problems associated with stock designs. For cast iron hydraulic and solid cams we offer a lightweight model with a steel tip at each end to protect against wear.

Part No.	Description
76200	CHEVROLET 262-454 V8 (8620 steel cams)
76201	CHEVROLET 262-454 V8 (cast iron cams)
76202	CHEVROLET 90° V6 (8620 steel billet cams)



CAM THRUST PLUGS

Roller cam lobes are ground flat, without the taper found in hydraulic and solid lobes. The cam thrust plug sits between the front of the timing gear and the back of the front cover and prevents forward cam travel and ignition flutter in roller grinds. Available in choice of two styles: phenolic (non-galling material) or fully rollerized for reduced friction.


Part No.	Description	Style
86085	CHEVROLET 262-400 V8	Solid
86086	CHEVROLET 396-454 V8	Solid
86087	MOPAR 426 Hemi V8	Solid
86089	CHEVROLET 262-400 V8	Rollerized
86090	CHEVROLET 396-454 V8	Rollerized
86091	MOPAR "B"	Rollerized
86099	CHEVROLET 262-400 (Late Model)	



CAMSHAFT BOLTS

Crower ultra-lock cam bolts are special "grade 8" tempered steel aircraft bolts that feature nylock inserts for positive holding. Their unique design eliminates the possibility of loose bolts in both the sprockets and the gears.

Part No.	Description
86060-3	CHEVY V8 5/16 (set/3) Ultra-Lock
86059-3	VW - Air Cooled (set/3)
86053-2	4.6L/5.4L Ford 2 valve/4valve
86063-2	Honda B18C

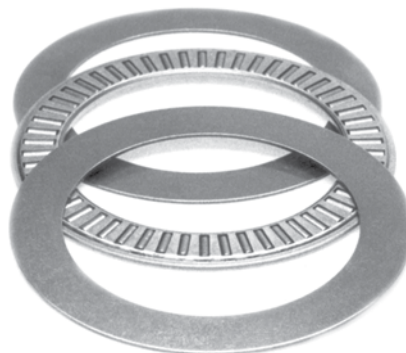


CAM GEAR & BLOCK PROTECTOR KIT

Friction reducing needle bearing design eliminates the cam gear from scuffing or galling your block face. Back of cam timing gear must be machined. Machining specs included. See Timing Gear Kits for pre-machined, race-ready applications.

Part No.	Description
76400	CHEVROLET 90° V6 & 262-400 V8
76401	CHEVROLET 396-454 V8
76410	CHEVROLET V8 Captive Assembly (Oversize)

Camshaft Accessories

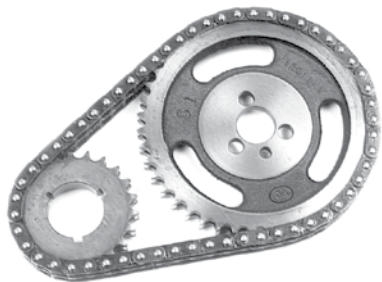


CLOYES TIMING GEAR SETS

Crower offers Cloyes Timing Chains. The high performance Cloyes True roller chain is intended for high performance racing applications. Comes with three position bottom crank sprocket keyway and extra tough billet steel gears.



CLOYES HEX-A-JUST TIMING GEAR SETS

Crower offers Cloyes patented timing adjustment system for precise installation without machining or fumbling with a variety of offset bushings. Simply dial in the timing and lock the gear in place.

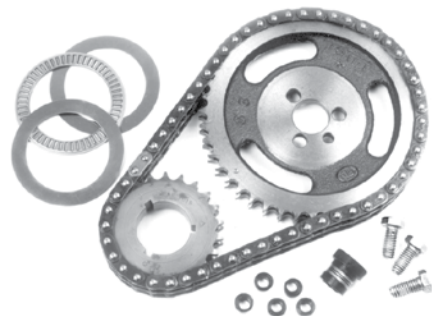

CLOYES TIMING GEAR KITS

Includes rollerized cam thrust plug, rollerized cam gear and block protector kit, advance and retard camshaft bushings and specially machined Cloyes True timing chain set. The ultimate setup for precision cam timing and block protection.


CLOYES TRUE ROLLER

Part No.	Description
76555	AMC 4 cyl (2.5L), 6 cyl (4.0L)
76551	AMC 290-401 V8
76569	BUICK 181, 196, 252 V6 w/integral D-gear
76567	BUICK 198, 225, 231 V6 w/o gear and V8
76501	CHEVROLET 262-400 V8 and 90° V6
76504	CHEVROLET LT1 V8 '94-'97
76505	CHEVROLET LT4 V8 1996
76513	CHEVROLET 262-400 V8 1985-up
76511	CHEVROLET 396-454 V8 1965-up
76523	FORD 221-289, 302, 351W V8 '62-'84
76531	FORD 351C, 351M, 400 V8 '70-'82
76525	FORD 332-428 V8 '64-'74
76533	FORD 429-460 V8 '68-'71
76535	FORD 429-460 V8 '72-up
76541	MOPAR 273 318 392 V8 Magnum
76543	MOPAR 361, 440, 426 "B" V8 (1bolt)
76545	MOPAR 350,361,383,400,413,426-H,440
76561	OLDSMOBILE 260-455 V8 '64-'83
76565	PONTIAC 287-455 V8
76567	ROVER 215 (3.5L) V8
86061	VW Cam Gear - Air Cooled

Part No.	Description
76801	CHEVROLET 262-400 V8 and 90° V6
76813	CHEVROLET 262-400 V8 '85-up
76806	CHEVROLET 262-400 "Rocket"
76813	CHEVROLET 262-400 (LT1) V8 & V6
76802	CHEVROLET LS1 V8 1998-UP
76811	CHEVROLET 396-454 V8 '65-up
76827	FORD 221-289, 351W V8 '62-'84 and 302 5.0L
76831	FORD 351C, 351M, 400 V8 '70-'82
76825	FORD 352-428 "FE" '64-'74
76833	FORD 429-460 V8 '68-up
76845	MOPAR 350-426W, Hemi V8 (w/3 bolt cam)
76847	DODGE Viper V10 '95-up
76861	OLDSMOBILE 260F-455 V8 '65-'83

* True and Hex-A-Just are Registered Trademarks of Cloyes Gear & Products, Inc.

Part No.	Description
76501K	CHEVROLET 200-229 90° V6
76501K	CHEVROLET 262-400 V8
76511K	CHEVROLET 396-454 V8

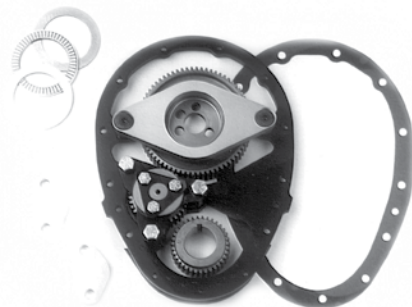

PRECISION CAMSHAFT GEAR DRIVES

Made from lightweight aluminum alloy, the Shaver-Wesmar gear drive is designed to provide accurate, consistent cam timing under the toughest racing conditions. Features gears precision cut from 8620 steel with 20° pressure angle, a crack resistant steel idler gear support, Torrington bearings and a tough black oxide finish. Quick and easy installation without any machine work required. The absolute highest quality available. Fully adjustable.

Part No.	Description
76600	CHEVROLET 262-400 V8

Note: Fits most small block Chevrolet applications. Call for details.

Camshaft Accessories



PROFESSIONAL DEGREE WHEEL

Crower's new professional degree wheel features a large 11" diameter surface made from rugged .040" gauge aluminum. The unique, easy to read surface was designed by engine builders for engine builders.

Part No.	Description
87602	Degree Wheel and Instructions

DEGREE KIT

Crower's degreeing kit contains all the components necessary for achieving optimum valve timing when installing your cam. Our kit includes a 7" degree wheel with 7/16 mounting hole, pointer, 1" travel dial indicator, indicator stand, magnetic base, TDC bolt stop and checking springs.

Part No.	Description
87601	Degree Wheel Kit and Instructions

ASSEMBLY PRELUBE

Crower's assembly prelude is formulated especially for prelubrication of cam lobes and lifter surfaces (hydraulic and solid) prior to engine oil circulation. The petroleum based compound increases the load carrying capacity of the engine oil during break-in to prevent scuffing and galling. Includes special additives that withstand the extreme pressures exerted on cams and lifters. Also recommended for use on valve stems, rocker arms and pushrod tips.



DISTRIBUTOR GEARS

Made from premium aluminum bronze alloy, these precision machined gears are highly recommended for performance cam applications and are mandatory when running 8620 steel billet roller camshafts.

Part No.	Description	Shaft Dia.
76000	CHEVROLET V8 & 90° V6 (Accel BE1)	.491"
76001	CHEVROLET V8 & 90° V6	.500"
76001	CHEVROLET V8 & 90° V6 (Accel)	.500"
76002	CHEVROLET V8 & 90° V6	.427"
76006	CHEVY II & CHEVY 4 & 6 cyl.	.491"
76010	DONOVAN V8	.484"
76013	FORD 351C-400, Boss 351, 429-460	.530"
76014	FORD 289-302 & Boss 302 V8	.500"
76015	FORD SVO 302-351W V8	.530"
76016	FORD 351C-400, Boss 351, 429-460	.500"
76016	FORD 352-428 V8	.500"
76018	FORD 289-302 & Boss 302 V8	.467"
76019	FORD 240-300 6 cyl.	.530"
76020	FORD 352-428 V8	.467"
76030	OLDSMOBILE V8	.491"
76040	MOPAR "B", 426 Hemi V8	.484"
76010	MOPAR "LA" V8	.484"
76060	PONTIAC V8	.489"
76006	PONTIAC 4 cyl. 151 (77-78)	.491"
76062	PONTIAC 4 cyl. 151 (79-85)	.491"
76063	PONTIAC 4 cyl. 151 (86-89)	.500"
76100	CHEVROLET V8 Reverse Rotation	.491"

Warning: If 8620 steel billet cam core, bronze gear is mandatory. If cast iron cam or cast iron gear, Crower recommends factory gear.

Crower does not recommend high volume oil pumps when running aluminum/bronze distributor gears.

Part No.	Description
86093	Cam & Lifter Prelube (5/8 oz.)
86094	Cam & Lifter Prelube (8 oz.)
86095	Cam & Lifter Prelube (16 oz.)

Hydraulic Roller Lifters



Photo Shown
Part # 66330
Stock Late Model



Photo Shown
Part # 66310
Retro Fit
Lock Blade

Crower hydraulic roller lifters combine the performance level characteristics of a roller with the reliability of a hydraulic. Crower hydraulic lifters are precision flow checked for optimum leak down rates. Completely redesigned body and bearing. Retro-fit hydraulic rollers are for early style blocks.



LATE MODEL Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Bearing O.D.	Checking Pushrods	Checking Pushrod Length	HIPPO Available	Part No.
CHEVROLET 262-400 V8 - Late Model		-			70478-2	6.900"	-	66330-16
CHEVROLET 396-454 V8 - Late Model		-			70470-2	7.500"	-	66331-16
CHEVROLET 396-454 V8 - Late Model (Truck/Tall Deck)		-			70461-2	7.150"	-	66331-16
DODGE Magnum V8 (set/16) - Late Model		-			70466	7.600"/8.600"	-	66325-16
DODGE Magnum V10 and Viper V10 (set/20) - Late Model		-			70466T	8.000"/9.000"	-	66325-20
FORD 302 V8 For Late Model 289-302		-			70477-2	6.250"	-	66335-16
RETRO-FIT Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Bearing O.D.	Checking Pushrods	Checking Pushrod Length	HIPPO Available	Part No.
CHEVROLET 262-400 - Retro-fit		-			70479-2	7.300"	-	66310-16*
CHEVROLET SBC 265-400 .300" - Taller retro-fit		-			70479-2	7.300"	YES	66310LM-16* ¹
CHEVROLET 396-454 V8 - Retro-fit		-			70465	7.750"/8.750"	-	66321-16*
CHEVROLET 396-454 V8 .300 - Taller retro-fit		-			70465	7.750"/8.750"	YES	66321LM-16* ¹
CHEVROLET 396-454 V8 .300 - Taller retro-fit (Truck/Tall Deck)		-			70465T	8.150"/9.150"	-	66321LM-16* ¹
FORD Small Block 289-302-351W - Retro-fit lifter		-			70477-2	6.250"	-	66337-16
FORD Big Block 429, 460 - Retro-fit lifter		-			70463-2	7.975"	-	66338-16
MOPAR Small Block 273-360 - Retro-fit lifter		-			70499-2	Custom	-	66339-16
MOPAR Big Block 383-440 - Retro-fit lifter		-			70499-2	Custom	-	66341-16
OLDSMOBILE retro-fit hydraulic roller lifters		-			70462-2	8.700"	-	66333-16
PONTIAC retro-fit hydraulic roller lifters		-			70462-2	8.700"	-	66333-16

*Requires a shorter pushrod length.

¹Will fit Early & Late model blocks.


All Crower hydraulic roller lifters are precision flow checked for optimum reliability

Solid Roller Lifters

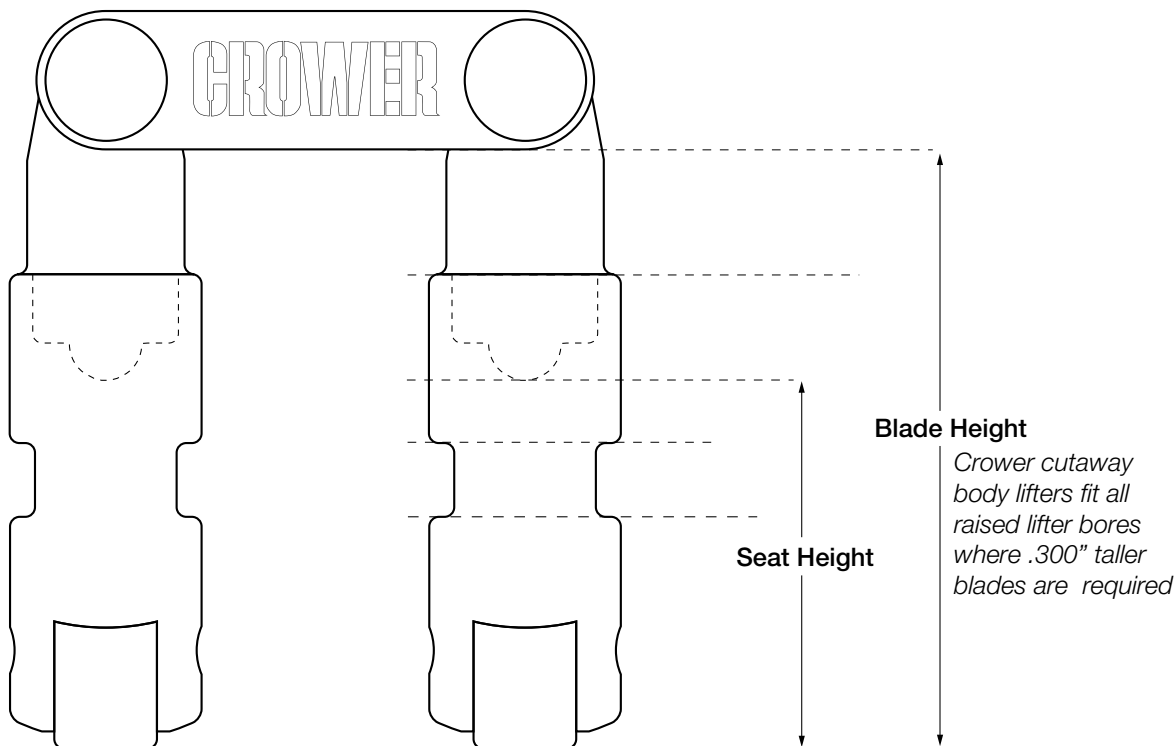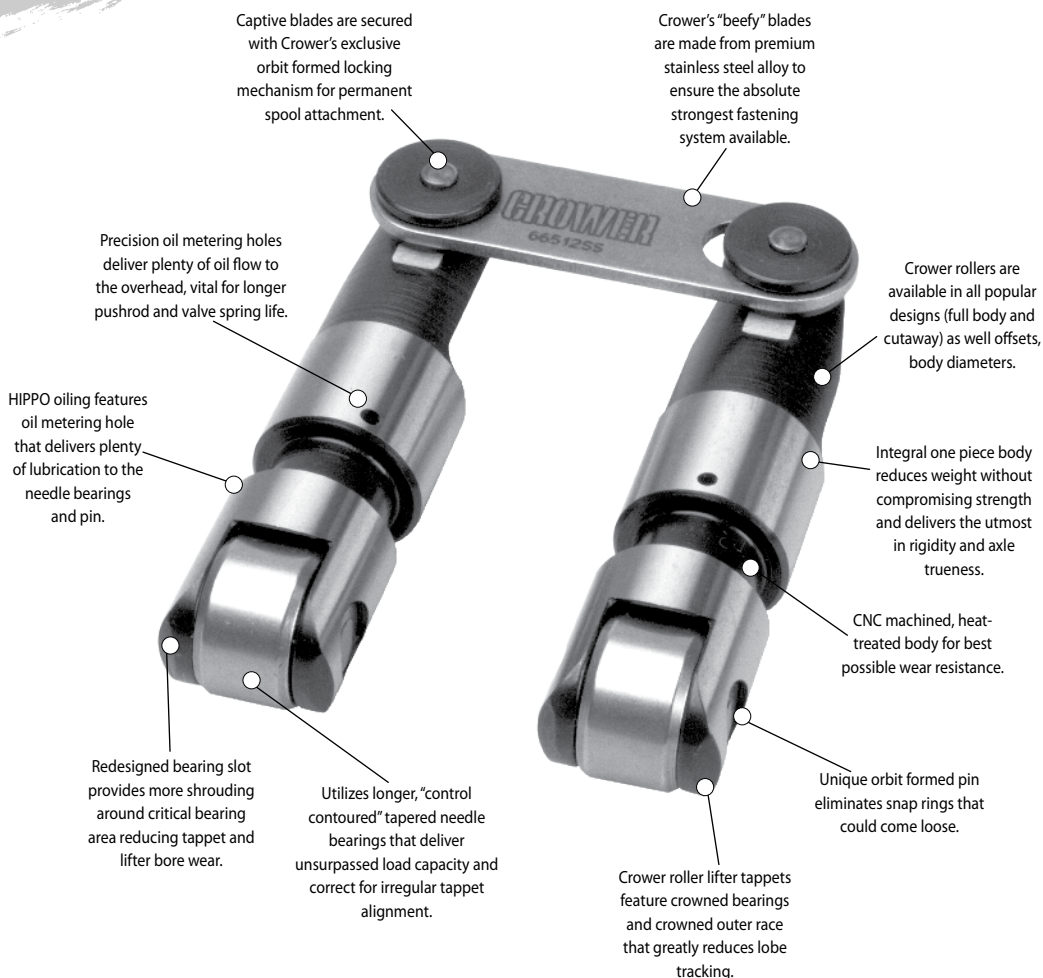


Solid Roller Lifters


BB CHEVY

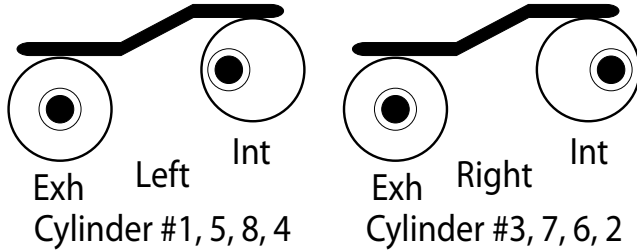

SB CHEVY

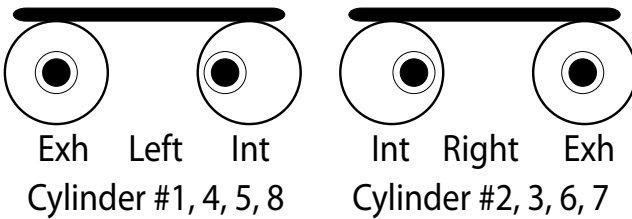



SB/BB FORD SBC w/SB2 Head

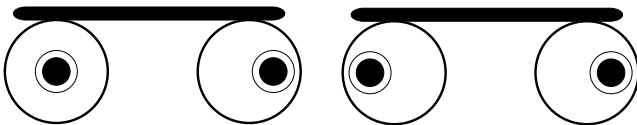

When ordering only pairs of roller lifters:
SB Chevy 1, 4, 5, 8 cylinders, specify "L" for left offset
ex. #66292X937L-2 and be sure to specify cylinder number.
SB Chevy 2, 3, 6, 7 cylinders, specify "R" for right offset
ex. #66292X937R-2 and be sure to specify cylinder number.

CUSTOM CONFIGURATION ROLLERS

Crower can build your lifters to your exact configuration. Don't see what you need from our wide selection of lifters? Give us a call and speak to one of our techs and let us build you a custom set of lifters to your specs.

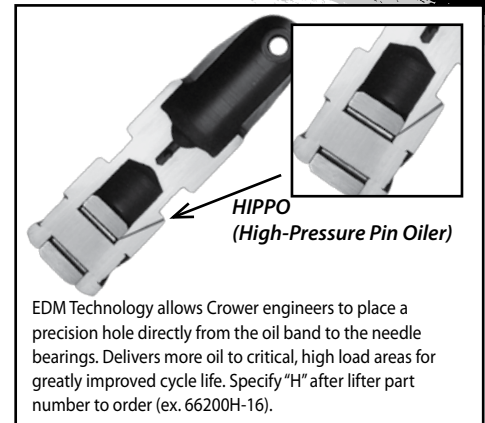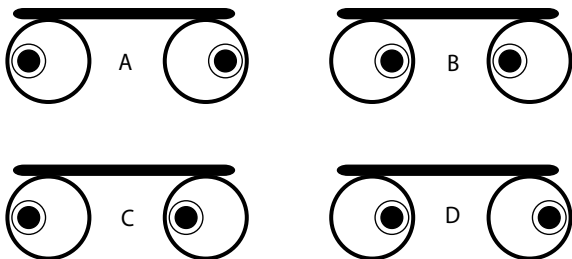

Roller Lifter Sizes & Bore Sizes

Roller Lifter Size	Aluminum Block Lifter Bore	Cast Iron Block Lifter Bore
+/- .0002 tolerance	.001/.0015 clearance	.002/.0025 clearance
.8415"	.8425"/.8430"	.8435"/.8440"
.8731"	.8741"/.8746"	.8751"/.8756"
.9031"	.9041"/.9046"	.9051"/.9056"
.9361"	.9371"/.9376"	.9381"/.9386"
.9890"	.9900"/.9905"	.9910"/.9915"
.9975"	.9985"/.9990"	.9995"/1.000"

Note: OIL RESTRICTORS ARE NOT RECOMMENDED

GROOVE LOCK ROLLERS

Crower has Groove Lock Rollers available for Flat Head Ford, and Diesel Applications. Call Crower for availability and pricing.



GROOVE LOCK ROLLERS DRILL JIG



Solid Roller Lifters



CROWER'S ORIGINAL FULL BODY ROLLER LIFTERS

The best roller tappets on the market. Delivers 200% more life expectancy than competing brands. Features crowned bearings and crowned outer race that greatly reduces lobe tracking. No offsets.

Description	Intake Offset	Exhaust Offset	Pushrod Left	Seat Location Center	Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.	HIPPO Part No.
CHEVY II 4 cylinder	-	N/A				.8415"	1.740"	126g	NO	.750"	66206-8	66206H-8
CHEVROLET '62-up 194-250 6 cylinder	-	N/A				.8415"	1.740"	126g	NO	.750"	66207-12	66207H-12
CHEVROLET V8 '55-up 262-400 cu. in.	-	N/A				.8415"	1.590"	119g	NO	.750"	66200-16	66200H-16
CHEVROLET V8 Small Block .300 taller body	-	N/A						-	YES	.750"	66200T-16	66200TH-16
CHEVROLET V8 '55-up 262-400 cu. in.	-	N/A				.8731"	1.590"	130g	NO	.750"	66200X874-16	66200X874H-16
CHEVROLET V8 '64-up Big Block	-	N/A				.8415"	1.590"	119g	NO	.750"	66201-16	66201H-16
CHEVROLET V8 Big Block .300 taller body	-	N/A						-	YES	.750"	66201T-16	66201TH-16
CHEVROLET V8 '64-up Big Block	N/A	N/A				.8731"	1.590"	130g	NO	.750"	66201X874-16	66201X874H-16
CHEVROLET V8 '58-'65 348-409 cu. in.	N/A	N/A				.8415"	1.590"	119g	NO	.750"	66201-16	66201H-16
OLDSMOBILE V8 '64-'84 260-455 cu. in.	N/A	N/A				.8415"	1.740"	127g	NO	.750"	66260-16	66260H-16
PONTIAC V8 '55-up 326-455 cu. in.	N/A	N/A				.8415"	1.740"	127g	NO	.750"	66260-16	66260H-16

For High Pressure Pin Oiling (HIPPO), specify "H" after p/n.

*Tall Lifter Bore Block (tappets fit blocks with taller lifter bores)

Ex: 66200H-16

Also available in pairs by replacing -16 with -2.


Crower roller lifters are rebuildable.

HI-SEAT OFFSET ROLLERS

Crower's "Hi-Seat" rollers feature a .180" offset, integral rev-kit button and Crower's "Hi-Seat" pushrod design. Allows for shorter pushrods, reducing flex and weight for more valve control.

For High Pressure Pin Oiling (HIPPO), specify "H" after p/n.

Description	Lifter Body Diameter	Lifter Weight	Tall Lifter Bore Block*	Part No.
CHEVROLET 265-400 V8 .842"	.8415"	136g	YES	66275-16
CHEVROLET 265-400 V8 .842"	.8731"	140g	YES	66277-16

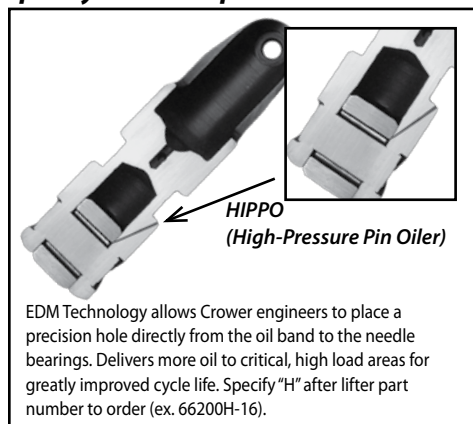



Solid Roller Lifters

SEVERE-DUTY CUTAWAY ROLLER LIFTERS

A must for high cylinder pressure, high rpm applications. Crower's Severe-Duty Cut-Away style rollers feature a superior, billet alloy body, lightweight design and a heavy-duty blade, raised to fit late model blocks. Severe-Duty Cutaway Roller Lifters are lighter than the original lifters and available with offset pushrod seats. Standard or .150" offset. Fit .842 & .875 Lifter Bore Blocks

Description	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.	HIPPO Part No.
AMC V8 '66-'91, 290-304-343-360(5.9L)-390-401 cu. in.	-	-	-	16	-	.9031"	1.340"	116g	-	.750"	66384-16	66384H-16
BUICK V6 '78-'86, 196(3.2L)-231(3.8L)-252(4.1L) cu. in.	-	-	-	16	-	.8415"	1.590"	126g	-	.700"	66266-12	66266H-12
BUICK V8 '61-'80, 215-300-340-350 cu. in.	-	-	-	16	-	.8415"	1.590"	126g	-	.700"	66266-16	66266H-16
BUICK V8 '67-'76, 400-430-455 cu. in.	-	-	-	16	-	.8415"	1.590"	126g	-	.700"	66267-16	66267H-16
CHEVROLET V6 90° '78-'86, 200-229-262(4.3L) cu. in. w/ V8 oiling	-	-	-	16	-	.8415"	1.590"	106g	-	.700"	66289-12	66289H-12
CHEVROLET V8 '55 up, 262-400 cu. in.	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66290-16	66290H-16
CHEVROLET V8 '55 up, 262-400 cu. in.	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66290X874-16	66290X874H-16
CHEVROLET Dart Big Block, seat raised .300" to clear lifter bore.	-	-	-	16	-	.8415"	1.890"	-	YES	.750"	66291T-16	66291TH-16
CHEVROLET V8 '55 up, 262-400 cu. in.	YES	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66292-16	66292H-16
CHEVROLET V8 '55 up, 262-400 cu. in.	YES	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66292X874-16	66292X874H-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block	YES	YES	8	-	8	.8415"	1.590"	112g	YES	.750"	66282-16	66282H-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block	YES	YES	8	-	8	.8731"	1.590"	119g	YES	.750"	66282X874-16	66282X874H-16
CHEVROLET V8 5.7L SB2/SB2	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66283-16	66283H-16
CHEVROLET V8 5.7L SB2/SB2	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66283X874-16	66283X874H-16
CHEVROLET V8 262-400 cu. in. w/Dart Buick cyl head	YES	-	16	-	-	.8415"	1.590"	112g	YES	.750"	66252-16	66252H-16
CHEVROLET V8 2000-up 5.7L LS1/LS7 & Vortec 4800, 5300, 6000	-	-	-	16	-	.8415"	1.590"	130g	-	.750"	66278-16	66278H-16
CHEVROLET V8 '58-'65 348-409 cu. in.	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66291-16	66291H-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66291-16	66291H-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66291X874-16	66291X874H-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	YES	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66293-16	66293H-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	YES	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66293X874-16	66293X874H-16
CHEVROLET Dart Big Block, seat raised .300" to clear lifter bore.	YES	-	4	8	4	.8415"	-	-	YES	.750"	66293T-16	66293TH-16
CHRYSLER V8 383-440 Chrysler/Stage V w/pushrod oiling, shielded bearing	-	-	-	16	-	.9031"	1.340"	116g	-	.750"	66384-16	66384H-16
CHRYSLER V8 340 Small Block, Nascar Block	-	-	-	-	-	-	-	-	-	-	66245-16	66245H-16
FORD V8 221-302-351 W '62-up	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66215-16	66215H-16
FORD V8 390-427 FE '63-up	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66216-16	66216H-16
FORD V8 370-460 '68-up	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66217-16	66217H-16
FORD V8 351C-351M-400 '63-up	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66218-16	66218H-16
FORD V8 429 Boss "Z" Bar	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66219-16	66219H-16
FORD V8 289-351 W w/intake offset	YES	-	-	8	8	.8731"	1.730"	126g	-	.750"	66378-16	66378H-16
FORD V8 429-460 w/intake offset	YES	-	-	8	8	.8731"	1.730"	126g	-	.750"	66379-16	66379H-16
HOLDEN V8 Early Model	-	-	-	-	-	.8415"	1.740"	127g	-	.750"	66262-16	66262H-16
HOLDEN V8 2S Series	-	-	-	-	-	.8415"	1.720"	127g	-	.750"	66264-16	66264H-16
HOLDEN Inline 6 cylinder	-	-	-	-	-	.8415"	1.740"	127g	-	.750"	66263-12	66263H-12
OLDSMOBILE V8 260-455 cu. in. '64-'84	-	-	-	16	-	.8415"	1.720"	120g	-	.750"	66294-16	66294H-16
OLDSMOBILE V8 400-455 cu. in.	YES	-	-	-	-	.8415"	-	130g	-	.750"	66387-16	66387H-16
PONTIAC V8 265-455 cu. in. '55-'81	-	-	-	16	-	.8415"	1.720"	120g	-	.750"	66294-16	66294H-16
PONTIAC V8 265-455 cu. in. '55-'81	YES	-	4	8	4	.8415"	1.720"	120g	-	.750"	66295-16	66295H-16

*Tall Lifter Bore Block (tappets fit blocks with taller lifter bores)

Crower roller lifters are rebuildable.

Warning: Never submerge roller lifters in parts washers due to possible contamination from suspended metal fines in the solvent.

Crower recommends .0015" - .0025" tappet bore clearance.

For High Pressure Pin Oiling (HIPPO), specify "H" after p/n.

Solid Roller Lifters

SEVERE-DUTY / OVERSIZED BEARING HIGH PRESSURE PIN OILING (HIPPO)

Crower offers a series of Severe-Duty roller lifters designed for full race use. Features an integral one piece body, CNC machined from special alloy and heat treated for the best possible wear. Utilizes larger diameter bearings with thicker wall than standard designs to withstand today's high performance race applications.

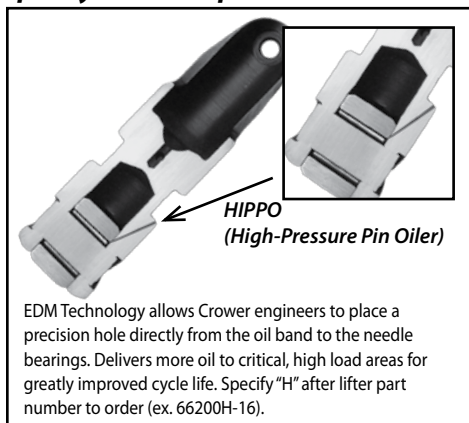


Photo Shown
Part # 66291X903H-16

Description	Intake Offset	Exhaust Offset	Pushrod Left	Seat Location Center	Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.
CHEVROLET V8 '55-up 262-400 cu. in.	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66290X903H-16
CHEVROLET V8 '55-up 262-400 cu. in.	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66290X937H-16
CHEVROLET V8 '55-up 262-400 cu. in. intake offset	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66292X903H-16
CHEVROLET V8 '55-up 262-400 cu. in. intake offset	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66292X937H-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block intake offset	YES	-	8	-	8	.9031"	1.590"	130g	YES	.812"	66282X903H-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block intake offset	YES	-	8	-	8	.9361"	1.430"	133g	YES	.850"	66282X937H-16
CHEVROLET V8 '98-05, 5.7L SB2 Head / SB2 Block	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66283X903H-16
CHEVROLET V8 '98-05, 5.7L SB2 Head / SB2 Block	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66283X937H-16
CHEVROLET V8 '64-up Big Block, tall deck block	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66291X903H-16
CHEVROLET V8 '64-up Big Block, tall deck block	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66291X937H-16
CHEVROLET V8 '64-up Big Block 396-572 cu. in.	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66293X903H-16
CHEVROLET V8 '64-up Big Block 396-572 cu. in.	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66293X937H-16
CHEVROLET Dart Big Block, seat raised .300" to clear lifter bore.	YES	-	4	8	4	-	-	-	YES	.750"	66293T-16
CHRYSLER V8 440"B" - 426 w/pushrod oiling	-	-	-	16	-	.9031"	1.340"	122g	-	.812"	66233H-16
CHRYSLER V8 340 with or without pushrod oiling	-	-	-	16	-	.9031"	1.340"	113g	-	.812"	66234X903H-16
CHRYSLER V8 340 with or without pushrod oiling intake offset	YES	-	4	8	4	.9031"	1.340"	113g	-	.812"	66238X903H-16
CHRYSLER V8 360 Magnum w/pushrod oiling	-	-	-	16	-	.9031"	1.340"	122g	-	.812"	66236H-16
CHRYSLER V8 340 w/pushrod oiling/inboard blade	-	-	-	16	-	.9031"	1.340"	117g	-	.812"	66237H-16
FORD 289-351W w/intake offset	YES	-	-	8	8	.9031"	1.590"	130g	-	.812"	66378X903H-16
FORD 289-351W w/intake offset	YES	-	-	8	8	.9361"	1.430"	133g	-	.850"	66378X937H-16
FORD 429 Boss "Z" Bar	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66219X903H-16
FORD 429-460 intake offset	YES	-	-	8	8	.9031"	1.590"	130g	-	.812"	66379X903H-16
FORD 429-460 intake offset	YES	-	-	8	8	.9361"	1.430"	133g	-	.850"	66379X937H-16

Crower roller lifters are rebuildable.

For High Pressure Pin Oiling (HIPPO), specify "H" after p/n.



Roller Lifter Sizes & Bore Sizes

Roller Lifter Size	Aluminum Block Lifter Bore	Cast Iron Block Lifter Bore
+/- .0002 tolerance	.001/.0015 clearance	.002/.0025 clearance
.8415"	.8425"/.8430"	.8435"/.8440"
.8731"	.8741"/.8746"	.8751"/.8756"
.9031"	.9041"/.9046"	.9051"/.9056"
.9361"	.9371"/.9376"	.9381"/.9386"
.9890"	.9900"/.9905"	.9910"/.9915"
.9975"	.9985"/.9990"	.9995"/1.000"

Note: OIL RESTRICTORS ARE NOT RECOMMENDED

Solid Roller Lifters

MAXIMUS SERIES ROLLER LIFTERS

Maximus Series Roller Lifters feature a High Strength Alloy Steel Body, carbonized for strength and wear resistance. A beefy stainless steel alignment blade and precision ground mounting pad ensure a perfect alignment. The finest bearing quality steel available, heat treated to our spec., gives our outer race the best rolling element and highest impact loading possible. Riding on precision sorted, contoured & micro polished needles. These roll on a tool steel axle, heat treated to material specifications for maximum strength, hardness, and reliability. Then precision ground to size and roundness, and micro polish finished. Crower implements "HIPPO" (high pressure oiling hole) on the Maximus Series Rollers to provide a constant pressure fed oil supply.



Description	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.
CHEVROLET SBC V8 262-400 cu. in. .903 dia. centers	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66290X903M-16
CHEVROLET SBC V8 262-400 cu. in. .903 dia. intake offset .150"	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66292X903M-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .903 dia. centers only	YES	YES	8	-	8	.9031"	1.590"	130g	YES	.812"	66282X903M-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .903 dia. centers only	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66283X903M-16
CHEVROLET SBC V8 262-400 cu. in. .937 dia. centers	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66290X937M-16
CHEVROLET SBC V8 262-400 cu. in. .937 dia. intake offset .150"	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66292X937M-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .937 dia. centers only	YES	YES	8	-	8	.9361"	1.430"	133g	YES	.850"	66282X937M-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .937 dia. centers only	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66283X937M-16
CHEVROLET BBC V8 .903 dia. Centers	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66291X903M-16
CHEVROLET BBC V8 .903 dia. intake offset .150	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66293X903M-16
CHEVROLET BBC V8 .937 dia. Centers	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66291X937M-16
CHEVROLET BBC V8 .937 dia. intake offset .150	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66293X937M-16
CHEVROLET V8 Johnson Rodeck 481X .903 dia.	-	-	-	16	-	.9031"	1.410"	117g	YES	.812"	66481M-16
CHRYSLER V8 426 Hemi w/pushrod oiling 1.000 dia.	-	-	-	16	-	.9975"	1.340"	142g	-	.920"	66271M-16
CHRYSLER V8 426 Hemi 1.000 dia.	-	-	-	16	-	.9975"	1.340"	142g	-	.920"	66272M-16
CHRYSLER V8 426 .903 dia.	-	-	-	16	-	.9031"	1.340"	121g	-	.812"	66284M-16
CHRYSLER V8 426 Hemi .903 dia. +.120 pushrod seat	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285M-16
CHRYSLER V8 426 Hemi .903 dia. w/BA blade +.120 pushrod seat	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285MB-16
CHRYSLER V8 Arias 8.3L (std seat height) .903 dia.	-	-	-	16	-	.9031"	1.340"	121g	-	.812"	66284AM-16
CHRYSLER V8 Arias 8.3L (+.120 seat height) .903 dia.	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285AM-16
CHRYSLER V8 Arias 10.0L (std seat height) .903 dia.	-	-	-	16	-	.9031"	1.340"	121g	-	.812"	66284ATM-16
CHRYSLER V8 Arias 10.0L (+.120 seat height) .903 dia.	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285ATM-16
FORD V8 62' up 221-302-351W .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66215X903M-16
FORD V8 63' up 390-427FE .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66216X903M-16
FORD V8 68' up 370-460 .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66217X903M-16
FORD V8 63' up 351C-351M-400 .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66218X903M-16
FORD V8 429 Boss "Z" Bar	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66219X903M-16
FORD V8 289-351W .903 dia. intake offset .150	-	-	-	8	8	.9031"	1.590"	130g	-	.812"	66378X903M-16
FORD V8 429-460 .903 dia. intake offset .150	-	-	-	8	8	.9031"	1.590"	130g	-	.812"	66379X903M-16
FORD V8 62' up 221-302-351W .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66215X937M-16
FORD V8 63' up 390-427FE .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66216X937M-16
FORD V8 68' up 370-460 .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66217X937M-16
FORD V8 63' up 351C-351M-400 .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66218X937M-16
FORD V8 289-351W .937 dia. intake offset .150	-	-	-	8	8	.9361"	1.430"	133g	-	.850"	66378X937M-16
FORD V8 429-460 .937 dia. intake offset .150	-	-	-	8	8	.9361"	1.430"	133g	-	.850"	66379X937M-16

Crower roller lifters are rebuildable.


Solid Roller Lifters

ENDURA max

NEEDLELESS ROLLERS

EnduraMax lifters feature a needleless roller bushing allowing for a greater load handling ability and more durability. They are available in all popular sizes and come standard with Crower's HIPPO (High Pressure Pin Oiling) to help keep the roller and shaft lubricated.

EnduraMax lifters are the choice of serious racers, and have been race proven to be the longest lasting lifter on the market.

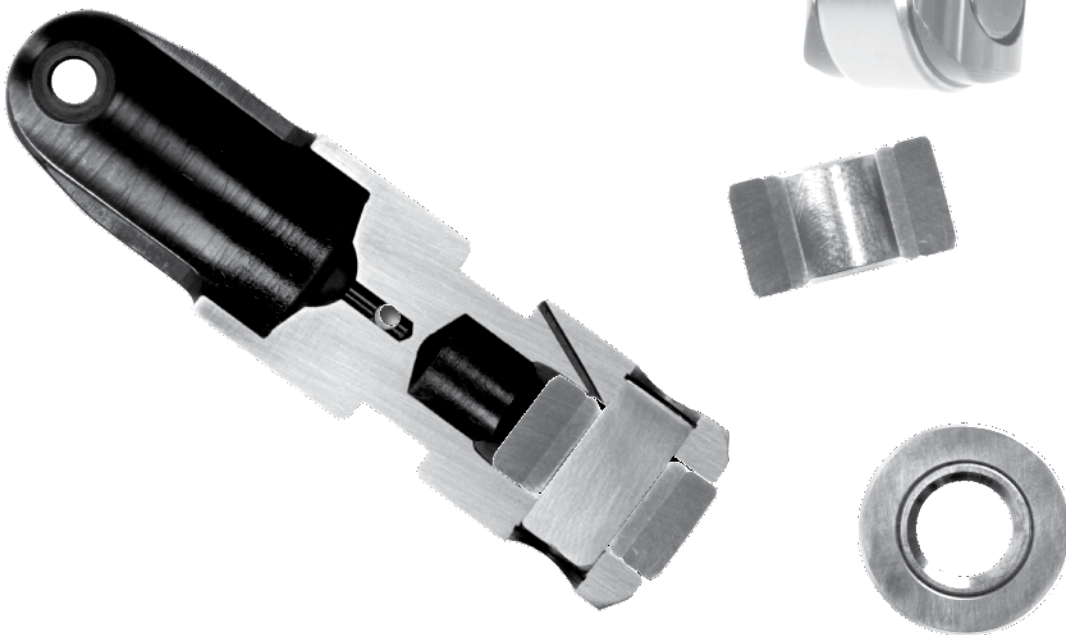

We can convert any Crower roller with .317" or .363" axle, to EnduraMax Needleless Bearings. EnduraMax rollers must be equipped with HIPPO oiling. HIPPO oiling can be added to most Crower roller lifters when being converted to EnduraMax bearing.

ENDURA

Solid Roller Lifters

max

The choice of serious racers

Description	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.
CHEVROLET V8 Small Block .300 taller body	-	-	-	-	-	-	-	-	YES	.750"	66200TE-16
CHEVROLET V8 Big Block .300 taller body	-	-	-	-	-	-	-	-	YES	.750"	66201TE-16
CHEVROLET SBC V8 262-400 cu. in. .842 dia. centers	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66290X842E-16
CHEVROLET SBC V8 262-400 cu. in. .874 dia. centers	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66290X874E-16
CHEVROLET SBC V8 262-400 cu. in. .903 dia. centers	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66290X903E-16
CHEVROLET SBC V8 262-400 cu. in. .937 dia. centers	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66290X937E-16
CHEVROLET SBC V8 262-400 cu. in. .842 dia. intake offset .150"	-	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66292X842E-16
CHEVROLET SBC V8 262-400 cu. in. .874 dia. intake offset .150"	-	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66292X874E-16
CHEVROLET SBC V8 262-400 cu. in. .903 dia. intake offset .150"	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66292X903E-16
CHEVROLET SBC V8 262-400 cu. in. .937 dia. intake offset .150"	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66292X937E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .842 dia. centers only	YES	YES	8	-	8	.8415"	1.590"	112g	YES	.750"	66282X842E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .874 dia. centers only	-	-	8	-	8	.8731"	1.590"	119g	YES	.750"	66282X874E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .903 dia. centers only	YES	YES	8	-	8	.9031"	1.590"	130g	YES	.812"	66282X903E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .937 dia. centers only	YES	YES	8	-	8	.9361"	1.430"	133g	YES	.850"	66282X937E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .842 dia. centers only	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66283X842E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .874 dia. centers only	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66283X874E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .903 dia. centers only	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66283X903E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .937 dia. centers only	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66283X937E-16
CHEVROLET BBC V8 396-572 cu. in. .842 dia. centers	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66291X842E-16
CHEVROLET BBC V8 396-572 cu. in. .874 dia. centers	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66291X874E-16
CHEVROLET BBC V8 396-572 cu. in. .903 dia. centers	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66291X903E-16
CHEVROLET BBC V8 396-572 cu. in. .937 dia. centers	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66291X937E-16
CHEVROLET Dart Big Block, seat raised .300" to clear lifter bore.	-	-	-	16	-	.8415"	-	-	YES	.750"	66291E-16
CHEVROLET BBC V8 396-572 cu. in. .842 dia. intake offset .150	YES	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66293x842E-16
CHEVROLET BBC V8 396-572 cu. in. .874 dia. intake offset .150	YES	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66293x874E-16
CHEVROLET BBC V8 396-572 cu. in. .903 dia. intake offset .150	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66293x903E-16
CHEVROLET BBC V8 396-572 cu. in. .937 dia. intake offset .150	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66293x937E-16
CHEVROLET Dart Big Block, seat raised .300" to clear lifter bore.	-	-	4	8	4	.8415"	-	-	YES	.750"	66293E-16
CHEVROLET V8 2000-up 5.7L LS1/LS7	-	-	-	16	-	.8415"	1.590"	130g	-	.750"	66278E-16

Crower roller lifters are rebuildable.

Solid Roller Lifters

ENDURA **max** *The choice of serious racers*


Description	Intake Offset	Exhaust Offset	Pushrod Left	Seat Location Center	Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.
FORD V8 62' up 221-302-351W .874 dia.	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66215E-16
FORD V8 62' up 221-302-351W .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66215X903E-16
FORD V8 62' up 221-302-351W .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66215X937E-16
FORD V8 63' up 390-427FE .874 dia.	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66216E-16
FORD V8 63' up 390-427FE .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66216X903E-16
FORD V8 63' up 390-427FE .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66216X937E-16
FORD V8 68' up 370-460 .874 dia.	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66217E-16
FORD V8 68' up 370-460 .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66217X903E-16
FORD V8 68' up 370-460 .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66217X937E-16
FORD V8 63' up 351C-351M-400 .874 dia.	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66218E-16
FORD V8 63' up 351C-351M-400 .903 dia.	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66218X903E-16
FORD V8 63' up 351C-351M-400 .937 dia.	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66218X937E-16
FORD V8 429 Boss "Z" Bar .874 dia.	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66219E-16
FORD V8 429 Boss "Z" Bar	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66219X903E-16
FORD V8 289-351W .874 dia. intake offset .150	-	-	-	8	8	.8731"	1.730"	126g	-	.750"	66378E-16
FORD V8 289-351W .903 dia. intake offset .150	-	-	-	8	8	.9031"	1.590"	130g	-	.812"	66378X903E-16
FORD V8 289-351W .937 dia. intake offset .150	-	-	-	8	8	.9361"	1.430"	133g	-	.850"	66378X937E-16
FORD V8 429-460 .874 dia. intake offset .150	-	-	-	8	8	.8731"	1.730"	126g	-	.750"	66379E-16
FORD V8 429-460 .903 dia. intake offset .150	-	-	-	8	8	.9031"	1.590"	130g	-	.812"	66379X903E-16
FORD V8 429-460 .937 dia. intake offset .150	-	-	-	8	8	.9361"	1.430"	133g	-	.850"	66379X937E-16
HOLDEN V8 Early Model	-	-	-	-	-	.8415"	1.740"	-	-	.750"	66262E-16
HOLDEN V8 25 Series	-	-	-	-	-	.8415"	1.720"	-	-	.750"	66264E-16
HOLDEN Inline 6 cylinder	-	-	-	-	-	.8415"	1.740"	-	-	.750"	66263E-12

Crower roller lifters are rebuildable.

Roller Lifter Sizes & Bore Sizes

Roller Lifter Size	Aluminum Block Lifter Bore	Cast Iron Block Lifter Bore
+/- .0002 tolerance	.001/.0015 clearance	.002/.0025 clearance
.8415"	.8425"/.8430"	.8435"/.8440"
.8731"	.8741"/.8746"	.8751"/.8756"
.9031"	.9041"/.9046"	.9051"/.9056"
.9361"	.9371"/.9376"	.9381"/.9386"
.9890"	.9900"/.9905"	.9910"/.9915"
.9975"	.9985"/.9990"	.9995"/1.000"

Note: OIL RESTRICTORS ARE NOT RECOMMENDED

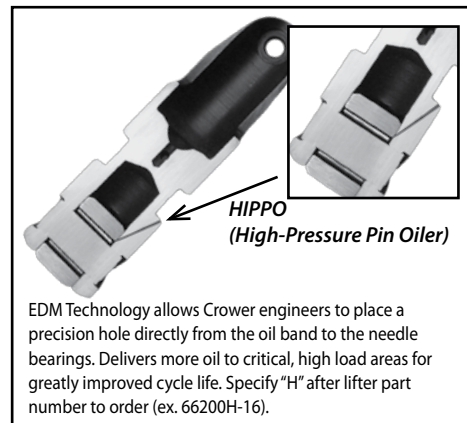

Hydraulic Flat Tappet Lifters

HYDRAULIC FLAT TAPPET

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	RC Hardness	Part No.
CHRYSLER Standard	.903"	1.600"	107.4g	55-58	66031-16
CHRYSLER Cam Saver, Heavy Duty snap ring	.903"	1.600"	108.3g	55-58	66031X3-16
FORD Standard	.874"	1.725"	104.6g	55-58	66015-16
FORD Cam Saver, Heavy Duty snap ring	.874"	1.725"	103.5g	55-58	66015X3-16
FORD Cheater Hydraulic	.874"	1.700"	102.2g	63-64	66015X5-16
GENERAL MOTORS Standard	.842"	1.700"	97.8g	55-58	66000-16
GENERAL MOTORS Cam Saver, Heavy Duty snap ring	.842"	1.700"	97.3g	55-58	66000RX3-16
GENERAL MOTORS Cheater Hydraulic	.842"	1.700"	96.2g	63-64	66000X5-16

REV-MAX HYDRAULIC FLAT TAPPET

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	RC Hardness	Part No.
GENERAL MOTORS Rev-Max Lifter. Slow leak down, High RPM	.842"				66000RM-16
GENERAL MOTORS Rev-Max Lifter. Slow leak down, High RPM w/Cam Saver option	.842"				66000RM3-16
GENERAL MOTORS Rev-Max Lifter. Slow leak down, High RPM w/Dual Cam Saver Grooves*	.842"				66000RM4-16


*Dual Cam Saver option requires the use of a high volume oil pump

VARIABLE DURATION HYDRAULIC FLAT TAPPET

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	RC Hardness	Part No.
GENERAL MOTORS Variable Duration Hydraulic Lifter. Increase vacuum & reduce valvetrain noise. Not recommended for high mileage applications. Fast leakdown.	.842"				66000V16
GENERAL MOTORS Variable Duration Hydraulic Lifter. Increase vacuum & reduce valvetrain noise. Not recommended for high mileage applications. Fast leakdown. w/Cam Saver option	.842"				66000V3-16

Hydraulic Flat Tappet Leak Down Rates:


Standard OEM Hydraulic Lifter	10 to 120 seconds
Standard Hydraulic Lifter	20 to 80 seconds
Variable Duration Hydraulic Lifter	8 to 20 seconds
Rev-Max Hydraulic Lifter	95 to 125 seconds



Heavy Duty Snap Ring

Cam Saver

.0025 Groove from the oil band to the lifer face for reduced lobe wear



Mechanical Flat Tappet Lifters


MECHANICAL FLAT TAPPET

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	RC Hardness	Part No.
AMC Coolface	.903"	1.485"	99.5g	55-59	66945X980-16
CHRYSLER Standard, no pushrod oiling	.903"	1.532"	94.1g	55-59	66931-16
CHRYSLER Coolface, Polished face, with pushrod oiling	.903"	1.532"	100.3g	62-64	66931P980-16
CHRYSLER Billet, Super polished face	.903"	1.640"	86g	64-65	66970P980SP-16
FORD Standard	.874"	1.640"	98.2g	55-59	66915-16
FORD Coolface	.874"	1.640"	107.9g	55-59	66915X980-16
FORD Billet, Super polished face	.874"	1.640"	88.9g	64-65	66974X980SP-16
GENERAL MOTORS Standard	.842"	1.570"	97.5g	55-59	66900-16
GENERAL MOTORS Coolface	.842"	1.570"	84.3g	55-59	66900X980-16
GENERAL MOTORS Billet, Super polished face	.903"	1.570"	75.9g	64-65	66970P980SP-16

LIGHT WEIGHT MECHANICAL FLAT TAPPET

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	RC Hardness	Part No.
CHRYSLER Light weight			78g		66931LW-16
CHRYSLER Light weight, Coolface			78g		66931LW980-16
FORD Light weight			75g		66915LW-16
FORD Light weight, Coolface			75g		66915LW980-16
GENERAL MOTORS Light weight			72g		66900LW-16
GENERAL MOTORS Light weight, Coolface			72g		66900LW980-16
GENERAL MOTORS Light weight, Dual Coolface oiling option*			72g		66900LW982-16

*Dual Coolface option requires the use of a high volume oil pump

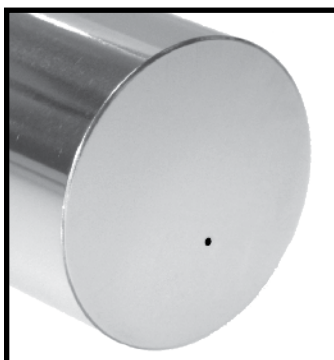

Coolface

The CROWER Coolface option sends oil to the lifter face for reduced lobe wear

Pushrods

CROWER PUSHRODS

Only the finest 4130 seamless chromoly tubing is used to manufacture Crower pushrods. All ends are heat-treated to a surface hardness of RC60 for maximum durability and wear resistance. Crower's standard pushrod design features an end-to-tube spot weld fastener for extended use. For severe duty or guide plate applications see our vast assortment of RC60 Series pushrods.

ADJUSTABLE PUSHRODS

When going from hydraulic to solid lifters, adjustable pushrods are often required if there is no adjustment provision at the rocker arm. The overall length of Crower adjustable pushrods is listed with adjustable end in the middle of the adjustment range.

NON-ADJUSTABLE PUSHROD KITS

Non-adjustable pushrod kits include the following:


- 16 non-adjustable pushrods (1/4" longer than stock) with one end out.
- 16 pushrod ends.
- One adjustable pushrod (two if intake & exhaust are different lengths).

STOCK PUSHROD SPECS

Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
AMC NON-ADJUSTABLE PUSHROD SETS							FORD NON-ADJUSTABLE PUSHROD SETS						
232-258 6 cyl.	Hyd Lifter & Non-Adj Rocker	Stock	9.625"	5/16	15	15	240-300 6 cyl.		Stock	10.140"	5/16	15	15
290-401 V8	Hyd Lifter & Non-Adj Rocker	Stock	7.813"	5/16	15	15	221-302 V8	Non-Guide Plate Heads	Stock	6.820"	5/16	15	15
290-401 V8	Hyd Lifter & Non-Adj Rocker	Stock	8.031"	5/16	15	15	351W V8	Non-Guide Plate Heads	Stock	8.170"	5/16	15	15
BUICK NON-ADJUSTABLE PUSHROD SETS							MOPAR ADJUSTABLE PUSHROD SETS						
192-252 V6	Hyd Lifter & Non-Adj Rocker	Stock	8.578"	5/16	15	15	351M-400V8	Non-Guide Plate Heads	Stock	9.500"	5/16	15	15
196-252 V6	Hyd Lifter & Non-Adj Rocker	Stock	8.688"	5/16	15	15	332-428 V8	Hyd or Solid & Adj Rocker	Stock	9.325"	3/8	23	20
196-252 V6	Hyd Lifter & Non-Adj Rocker	Stock	8.688"	5/16	15	15	332-428 V8	Deep Seat Sol&Adj Rocker	Stock	10.668"	3/8	23	20
196-252 V6	Hyd or Solid & Non-Adj Rocker	Stock	8.687"	5/16	1	10	MOPAR NON-ADJUSTABLE RC60 HEAT-TREATED PUSHROD SETS						
300 V8	Hyd or Solid & Non-Adj Rocker	Stock	8.750"	5/16	2	11	273-360 LA	Hyd Lifter & Non-Adj Rocker	Stock	7.500"	5/16	11	11
340 V8	Hyd or Solid & Non-Adj Rocker	Stock	9.343"	5/16	2	11	273-360 LA	Hyd Lifter & Non-Adj Rocker	Stock	7.500"	3/8	21	21
350 V8	Hyd or Solid & Non-Adj Rocker	Stock	9.687"	5/16	2	11	273-360 LA	Hyd Lifter & Adj Rocker	Stock	7.325"	5/16	18	11
350 V8	Hyd or Solid & Non-Adj Rocker	Stock	9.687"	5/16	1	10	273-360 LA	Hyd Lifter & Adj Rocker	Stock	7.325"	3/8	24	21
400-455 V8	Hyd or Solid & Non-Adj Rocker	Stock	9.375"	3/8	1	22	273-360 LA	Solid Lifter & Adj Rocker	Stock	7.500"	5/16	18	12
400-455 V8	Hyd or Solid & Non-Adj Rocker	Stock	9.375"	3/8	1	22	273-360 LA	Solid Lifter & Adj Rocker	Stock	7.500"	3/8	24	20
CHEVROLET NON-ADJUSTABLE RC60 HEAT-TREATED PUSHROD SETS							MOPAR NON-ADJUSTABLE RC60 HEAT-TREATED PUSHROD SETS						
220-229 90° V6	Guide Plate Heads	Stock	7.765"	5/16	15	15	350-400 B Low Block	Hyd Lifter & Non-Adj Rocker	Stock	8.550"	3/8	21	20
173 60° V6	Guide Plate Heads	Stock	6.163"	5/16	15	15	350-400 B Low Block	Hyd Lifter & Adj Rocker	Stock	8.250"	3/8	24	20
265-400 V8	Guide Plate Heads	Stock	7.790"	5/16	15	15	350-400 B Low Block	Solid Lifter & Adj Rocker	Stock	8.600"	3/8	24	20
265-400 V8	Guide Plate Heads	Stock	8.140"	3/8	22	22	413-440 B High Block	Hyd Lifter & Non-Adj Rocker	Stock	9.300"	3/8	21	20
265-400 V8	Guide Plate Heads	Stock	7.290"	5/16	15	15	413-440 B High Block	Hyd Lifter & Adj Rocker	Stock	9.160"	3/8	24	20
396-454 V8	Guide Plate Heads	Stock	7.620"	3/8	22	22	413-440 B High Block	Solid Lifter & Adj Rocker	Stock	9.300"	3/8	24	20
396-454 V8	Guide Plate Heads	Stock	8.250"	3/8	22	22	426 Hemi V8	Hyd Lifter & Adj Rocker	Stock	10.625"	3/8	24	20
396-454 V8	Guide Plate Heads	Stock	8.250"	3/8	22	22	426 Hemi V8	Hyd Lifter & Adj Rocker	Stock	11.582"			
396-454 V8 High Block	Guide Plate Heads	Stock	8.650"	3/8	22	22	426 Hemi V8	Solid Lifter & Adj Rocker	Stock	10.812"	3/8	24	20
396-454 V8	Guide Plate Heads	Stock	8.250"	7/16	30	30	426 Hemi V8	Solid Lifter & Adj Rocker	Stock	11.735"			
396-454 V8 High Block	Guide Plate Heads	Stock	8.650"	7/16	30	30	426 Hemi V8	Solid Lifter & Adj Rocker	Stock	10.812"	7/16	28	20
396-454 V8 High Block	Guide Plate Heads	Stock	8.650"	7/16	30	30	426 Hemi V8	Solid Lifter & Adj Rocker	Stock	11.735"			
CHEVROLET NON-ADJUSTABLE PUSHROD SETS							MOPAR NON-ADJUSTABLE RC60 HEAT-TREATED PUSHROD SETS						
194-250 6 cyl.	Hyd Lifter & Non-Adj Rocker	Stock	9.625"	5/16	15	15	426 Hemi V8	Solid or Roller Lifter	Stock	10.812"	3/8	24	20
200-229 90° V6	Hyd Lifter & Non-Adj Rocker	Stock	7.813"	5/16	15	15	426 Hemi V8	Solid or Roller Lifter	Stock	11.735"			
265-400 V8	Solid Lifter & Non-Adj Rocker	Stock	7.790"	5/16	15	15	426 Hemi V8	Solid or Roller Lifter	Stock	10.812"	7/16	28	29
265-400 V8	Solid Lifter & Non-Adj Rocker	Stock	7.790"	5/16	15	15	426 Hemi V8	Solid or Roller Lifter	Stock	11.735"			
FORD ADJUSTABLE PUSHROD SETS							MOPAR NON-ADJUSTABLE RC60 HEAT-TREATED PUSHROD SETS						
351CV8		Stock	8.360"	5/16	0	10	426 Hemi V8	Solid or Roller Lifter	Stock	10.812"	3/8	24	20
400M V8		Stock	9.500"	5/16	0	10	426 Hemi V8	Solid or Roller Lifter	Stock	11.735"			
332-428 V8	Hyd Lifter & Non-Adj Rocker	Stock	9.500"	3/8	4	20	426 Hemi V8	Solid or Roller Lifter	Stock	10.812"	7/16	28	29
332-428 V8	Bot Seat Shell Design Lifter	Stock	10.500"	3/8	4	20	426 Hemi V8	Solid or Roller Lifter	Stock	11.735"			

Pushrods

**MOST
POPULAR
PUSHROD
ENDS**

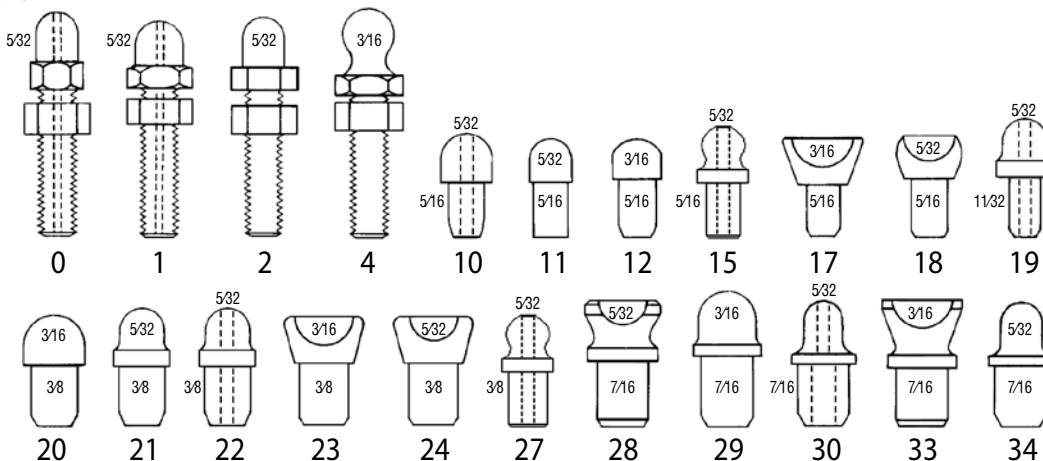

AMC NON-ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Overall Length	Tube O.D.	Ends Top	Ends Bot
70158-12	232-258 6 cyl.	Hyd Lifter & Non-Adj Rocker	Stock 9.625"	5/16	15	15
70156-16	290-401 V8	Hyd Lifter & Non-Adj Rocker	Stock 7.813"	5/16	15	15
70157-16	290-401 V8	Hyd Lifter & Non-Adj Rocker	Stock 8.031"	5/16	15	15

BUICK NON-ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Overall Length	Tube O.D.	Ends Top	Ends Bot
70190-12	192-252 V6	Hyd Lifter & Non-Adj Rocker	Stock 8.578"	5/16	15	15
70191-12	196-252 V6	Hyd Lifter & Non-Adj Rocker	Stock 8.688"	5/16	15	15

BUICK ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Overall Length	Tube O.D.	Ends Top	Ends Bot
70019-12	196-252 V6	Hyd or Solid & Non-Adj Rocker	Stock 8.687"	5/16	1	10
70029-16	300 V8	Hyd or Solid & Non-Adj Rocker	Stock 8.750"	5/16	2	11
70033-16	340 V8	Hyd or Solid & Non-Adj Rocker	Stock 9.343"	5/16	2	11
70036-16	350 V8	Hyd or Solid & Non-Adj Rocker	Stock 9.687"	5/16	2	11
70038-16	350 V8	Hyd or Solid & Non-Adj Rocker	Stock 9.687"	5/16	1	10
70034-16	400-455 V8	Hyd or Solid & Non-Adj Rocker	Stock 9.375"	3/8	1	22

CHEVROLET NON-ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Overall Length	Tube O.D.	Ends Top	Ends Bot
70115-12	194-250 6 cyl.	Hyd Lifter & Non-Adj Rocker	Stock 9.625"	5/16	15	15
70116-12	200-229 90° V6	Hyd Lifter & Non-Adj Rocker	Stock 7.813"	5/16	15	15
70100-16	265-400 V8	Solid Lifter & Non-Adj Rocker	Stock 7.790"	5/16	15	15

CHEVROLET NON-ADJUSTABLE PUSHROD KITS

Part No.	Engine Make	Application	Length	Tube O.D.	Ends Top	Ends Bot
70401	265-400 V8	+.250" Over Stock	Cut to length	5/16	15	10
70412	265-400 V8	+.250" Over Stock	Cut to length	3/8	22	22
70403	396-454 V8	+.250" Over Stock	Cut to length	3/8	22	22
70404	396-454 V8	+.250" Over Stock	Cut to length	7/16	30	30
70417	366-427 V8 High Block	+.250" Over Stock	Cut to length	3/8	22	22
70418	366-427 V8 High Block	+.250" Over Stock	Cut to length	7/16	30	30

CHEVROLET NON-ADJUSTABLE RC60 HEAT-TREATED PUSHROD SETS

Part No.	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
70312-12*	220-229 90° V6	Guide Plate Heads	Stock	7.765"	5/16	15	15
70308-16	396-454 V8	Guide Plate Heads	Stock	8.250" 9.250"	7/16	30	30
70308X1-16	396-454 V8	Guide Plate Heads	+ .050"	8.300" 9.300"	7/16	30	30
70308X2-16	396-454 V8	Guide Plate Heads	+ .100"	8.350" 9.350"	7/16	30	30
70308X3-16	396-454 V8	Guide Plate Heads	+ .150"	8.400" 9.400"	7/16	30	30
70308X4-16	396-454 V8	Guide Plate Heads	+ .200"	8.450" 9.450"	7/16	30	30
70308X5-16	396-454 V8	Guide Plate Heads	+ .250"	8.500" 9.500"	7/16	30	30
70304-16	396-454 V8 High Block	Guide Plate Heads	Stock	8.650" 9.650"	7/16	30	30
70304X1-16	396-454 V8 High Block	Guide Plate Heads	+ .050"	8.700" 9.700"	7/16	30	30
70304X2-16	396-454 V8 High Block	Guide Plate Heads	+ .100"	8.750" 9.750"	7/16	30	30
70304X3-16	396-454 V8 High Block	Guide Plate Heads	+ .150"	8.800" 9.800"	7/16	30	30
70304X4-16	396-454 V8 High Block	Guide Plate Heads	+ .200"	8.850" 9.850"	7/16	30	30
70304X5-16	396-454 V8 High Block	Guide Plate Heads	+ .250"	8.900" 9.900"	7/16	30	30

FORD ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
70003-16	351C V8		Stock	8.360"	5/16	0	10
70004-16	400M V8		Stock	9.500"	5/16	0	10
70000-16	332-428 V8	Hyd Lifter & Non-Adj Rocker	Stock	9.500"	3/8	4	20
70001-16	332-428 V8	Bot Seat Shell Design Lifter	Stock	10.500"	3/8	4	20

Pushrods

FORD NON-ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
70146-12	240-300 6 cyl.		Stock	10.140"	5/16	15	15
70130-16	221-302 V8	Non-Guide Plate Heads	Stock	6.820"	5/16	15	15
70134-16	351W V8	Non-Guide Plate Heads	Stock	8.170"	5/16	15	15
70125-16	351M-400V8	Non-Guide Plate Heads	Stock	9.500"	5/16	15	15
70136-16	332-428 V8	Hyd or Solid & Adj Rocker	Stock	9.325"	3/8	23	20
70138-16	332-428 V8	Deep Seat Sol&Adj Rocker	Stock	10.668"	3/8	23	20

FORD NON-ADJUSTABLE PUSHROD KITS

Part No.	Engine Make	Application	Length	Tube O.D.	Ends Top	Ends Bot
70405	221-302 V8		Cut to length	5/16	15	15
70405L	221-302 V8	Guide Plate Heads	Cut to length	5/16	15	15
70406	302 Boss		Cut to length	5/16	15	15
70407	351W V8		Cut to length	5/16	15	15
70407L	351W V8	Guide Plate Heads	Cut to length	5/16	15	10
70408	351C	Guide Plate Heads	Cut to length	5/16	10	10
70409	351C	Guide Plate Heads	Cut to length	3/8	22	22
70419	332-428		Cut to length	3/8	23	20
70420L	429-460	Guide Plate Heads	Cut to length	5/16	15	15

MOPAR NON-ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
70170-16	273-360 LA	Hyd Lifter & Non-Adj Rocker	Stock	7.500"	5/16	11	11
70170X1-16	273-360 LA	Hyd Lifter & Non-Adj Rocker	+0.050"	7.550"	5/16	11	11
70170X2-16	273-360 LA	Hyd Lifter & Non-Adj Rocker	+0.100"	7.600"	5/16	11	11
70171-16	273-360 LA	Hyd Lifter & Non-Adj Rocker	Stock	7.500"	3/8	21	21
70171X1-16	273-360 LA	Hyd Lifter & Non-Adj Rocker	+0.050"	7.550"	3/8	21	21
70171X2-16	273-360 LA	Hyd Lifter & Non-Adj Rocker	+0.100"	7.600"	3/8	21	21
70174-16	273-360 LA	Hyd Lifter & Adj Rocker	Stock	7.325"	5/16	18	11
70173-16	273-360 LA	Hyd Lifter & Adj Rocker	Stock	7.325"	3/8	24	21
70175-16	273-360 LA	Solid Lifter & Adj Rocker	Stock	7.500"	5/16	18	12
70176-16	273-360 LA	Solid Lifter & Adj Rocker	Stock	7.500"	3/8	24	20
70178-16	350-400 B Low Block	Hyd Lifter & Non-Adj Rocker	Stock	8.550"	3/8	21	20
70178X1-16	350-400 B Low Block	Hyd Lifter & Non-Adj Rocker	+0.050"	8.600"	3/8	21	20
70178X2-16	350-400 B Low Block	Hyd Lifter & Non-Adj Rocker	+0.100"	8.650"	3/8	21	20
70179-16	350-400 B Low Block	Hyd Lifter & Adj Rocker	Stock	8.250"	3/8	24	20
70180-16	350-400 B Low Block	Solid Lifter & Adj Rocker	Stock	8.600"	3/8	24	20
70181-16	413-440 B High Block	Hyd Lifter & Non-Adj Rocker	Stock	9.300"	3/8	21	20
70181X1-16	413-440 B High Block	Hyd Lifter & Non-Adj Rocker	+0.050"	9.350"	3/8	21	20
70181X2-16	413-440 B High Block	Hyd Lifter & Non-Adj Rocker	+0.100"	9.400"	3/8	21	20
70183-16	413-440 B High Block	Hyd Lifter & Adj Rocker	Stock	9.160"	3/8	24	20
70184-16	413-440 B High Block	Solid Lifter & Adj Rocker	Stock	9.300"	3/8	24	20
70185-16	426 HemiV8	Hyd Lifter & Adj Rocker	Stock	10.625" 11.582"	3/8	24	20
70186-16	426 HemiV8	Solid Lifter & Adj Rocker	Stock	10.812" 11.735"	3/8	24	20
70187-16	426 HemiV8	Solid Lifter & Adj Rocker	Stock	10.812" 11.735"	7/16	28	20

MOPAR ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
70005-16	273-360 V8	Hyd Lifter & Non-Adj Rocker	Stock	7.325"	5/16	2	11
70006-16	273-360 V8	Solid Lifter & Non-Adj Rocker	Stock	7.500"	5/16	2	12
70007-16	361-383 V8	Hyd Lifter & Non-Adj Rocker	Stock	8.440"	3/8	2	20
		Low Block					
70008-16	361-383 V8	Solid Lifter & Non-Adj Rocker	Stock	8.600"	3/8	2	20
		Low Block					
70009-16	413-440 V8	Hyd Lifter & Non-Adj Rocker	Stock	9.296"	3/8	2	20
		High Block					
70010-16	413-440 V8	Solid Lifter & Non-Adj Rocker	Stock	9.500"	3/8	2	20
		High Block					

MOPAR NON-ADJUSTABLE RC60 HEAT-TREATED PUSHROD SETS

Part No.	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
70305-16	426 Hemi V8	Solid or Roller Lifter	Stock	10.812" 11.735"	3/8	24	20
70306-16	426 Hemi V8	Solid or Roller Lifter	Stock	10.812" 11.735"	7/16	28	29

OLDSMOBILE ADJUSTABLE PUSHROD SETS

Part No.	Engine Make	Application	Length	Overall Length	Tube O.D.	Ends Top	Ends Bot
70049-16	260-403 V8	Hyd or Solid Lifter	Stock	8.375"	5/16	1	10
70050-16	400-455 V8	Hyd or Solid Lifter	Stock	9.596"	5/16	1	10

CUSTOM PUSHRODS

Crower custom pushrods are made from the finest alloy steel tubing available and are heat treated for wear resistance and durability. Since 1960, Crower has been supplying top teams in drag racing, stock car and open wheel classes with the finest pushrods available on the market. Crower pushrods are also available for vintage and antique restoration, as well as marine applications. For more information and details about a pushrod for you particular application, give the Crower technical support team a call. We'll fix you up with the correct length, wall thickness, tube diameter, taper and pushrod ends that you require.

CUSTOM PREMIUM PUSHRODS AND PUSHROD KITS

Part No.	Application
70099	Custom Adjustable Pushrods (includes setup charge)
70199	Custom Non-Heat Treated Pushrods (includes setup charge)
70399	Custom Heat Treated Pushrods (includes setup charge)
70499	Custom Pushrod Kit (includes setup charge)

Note: When ordering custom pushrods you must specify:

- Pushrod length
- Tube diameter
- Wall thickness
- Type of ends
- Cubic inches of engine
- Make and model
- Year of engine
- Type of rockers and lifters

* Indicates limited supply. Refer to Crower's one piece pushrod section or customs if out of stock.

Pushrods

ONE PIECE PERFORMANCE PUSHRODS

- Available in 5/16 and 3/8 diameters, .080" wall thickness.
- Die formed radius tip of .156" (± .0005").
- 4130 seamless chromoly steel tubing made in USA.
- Deep drawn to insure uniform, compatible tip radius.
- Controlled length variation to within .005" tolerances.
- Straightness controlled to within .002" run out.
- Overall length measured from end to end.
- Heat treated to a surface hardness of 60RC.
- Black oxide finish provides rigidity and toughness.

3/8 DIAMETER PUSHRODS

6.550" - 11.300" • .080" WALL

210° radius on one end.

Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length
71655-8	6.550"	71775-8	7.750"	71895-8	8.950"	71015-8	10.150"
71660-8	6.600"	71780-8	7.800"	71900-8	9.000"	71020-8	10.200"
71665-8	6.650"	71785-8	7.850"	71905-8	9.050"	71025-8	10.250"
71670-8	6.700"	71790-8	7.900"	71910-8	9.100"	71030-8	10.300"
71675-8	6.750"	71795-8	7.950"	71915-8	9.150"	71035-8	10.350"
71680-8	6.800"	71800-8	8.000"	71920-8	9.200"	71040-8	10.400"
71685-8	6.850"	71805-8	8.050"	71925-8	9.250"	71045-8	10.450"
71690-8	6.900"	71810-8	8.100"	71930-8	9.300"	71050-8	10.500"
71695-8	6.950"	71815-8	8.150"	71935-8	9.350"	71055-8	10.550"
71700-8	7.000"	71820-8	8.200"	71940-8	9.400"	71060-8	10.600"
71705-8	7.050"	71825-8	8.250"	71945-8	9.450"	71065-8	10.650"
71710-8	7.100"	71830-8	8.300"	71950-8	9.500"	71070-8	10.700"
71715-8	7.150"	71835-8	8.350"	71955-8	9.550"	71075-8	10.750"
71720-8	7.200"	71840-8	8.400"	71960-8	9.600"	71080-8	10.800"
71725-8	7.250"	71845-8	8.450"	71965-8	9.650"	71085-8	10.850"
71730-8	7.300"	71850-8	8.500"	71970-8	9.700"	71090-8	10.900"
71735-8	7.350"	71855-8	8.550"	71975-8	9.750"	71095-8	10.950"
71740-8	7.400"	71860-8	8.600"	71980-8	9.800"	71100-8	11.000"
71745-8	7.450"	71865-8	8.650"	71985-8	9.850"	71105-8	11.050"
71750-8	7.500"	71870-8	8.700"	71990-8	9.900"	71110-8	11.100"
71755-8	7.550"	71875-8	8.750"	71995-8	9.950"	71115-8	11.150"
71760-8	7.600"	71880-8	8.800"	71000-8	10.000"	71120-8	11.200"
71765-8	7.650"	71885-8	8.850"	71005-8	10.050"	71125-8	11.250"
71770-8	7.700"	71890-8	8.900"	71010-8	10.100"	71130-8	11.300"

Stock length big block Chevy is 8.250" (int) & 9.250" (exh).

3/8 RADIUS PUSHRODS

6.550" - 11.300" • .080" WALL

210° radius on one end.

Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length
71825R-8	8.250"	71905R-8	9.050"	71985R-8	9.850"	71065R-8	10.650"
71830R-8	8.300"	71910R-8	9.100"	71990R-8	9.900"	71070R-8	10.700"
71835R-8	8.350"	71915R-8	9.150"	71995R-8	9.950"	71075R-8	10.750"
71840R-8	8.400"	71920R-8	9.200"	71000R-8	10.000"	71080R-8	10.800"
71845R-8	8.450"	71925R-8	9.250"	71005R-8	10.050"	71085R-8	10.850"
71850R-8	8.500"	71930R-8	9.300"	71010R-8	10.100"	71090R-8	10.900"
71855R-8	8.550"	71935R-8	9.350"	71015R-8	10.150"	71095R-8	10.950"
71860R-8	8.600"	71940R-8	9.400"	71020R-8	10.200"	71100R-8	11.000"
71865R-8	8.650"	71945R-8	9.450"	71025R-8	10.250"	71105R-8	11.050"
71870R-8	8.700"	71950R-8	9.500"	71030R-8	10.300"	71110R-8	11.100"
71875R-8	8.750"	71955R-8	9.550"	71035R-8	10.350"	71115R-8	11.150"
71880R-8	8.800"	71960R-8	9.600"	71040R-8	10.400"	71120R-8	11.200"
71885R-8	8.850"	71965R-8	9.650"	71045R-8	10.450"	71125R-8	11.250"
71890R-8	8.900"	71970R-8	9.700"	71050R-8	10.500"	71130R-8	11.300"
71895R-8	8.950"	71975R-8	9.750"	71055R-8	10.550"		
71900R-8	9.000"	71980R-8	9.800"	71060R-8	10.600"		

Stock length big block Chevy is 8.250" (int) & 9.250" (exh).

CLEARANCE TIP RADIUS PUSHRODS

Crower has 5/16 and 3/8 diameter, clearance tip radius pushrods for high lift applications where added clearance is necessary.

This 5/16 dia. radius cut away shows radius tip with consistent .080" wall throughout.



5/16 DIAMETER PUSHRODS

6.000" - 9.950" • .080" WALL

210° radius on one end.

Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length
69600-16	6.000"	69700-16	7.000"	69800-16	8.000"	69900-16	9.000"
69605-16	6.050"	69705-16	7.050"	69805-16	8.050"	69905-16	9.050"
69610-16	6.100"	69710-16	7.100"	69810-16	8.100"	69910-16	9.100"
69615-16	6.150"	69715-16	7.150"	69815-16	8.150"	69915-16	9.150"
69620-16	6.200"	69720-16	7.200"	69820-16	8.200"	69920-16	9.200"
69625-16	6.250"	69725-16	7.250"	69825-16	8.250"	69925-16	9.250"
69630-16	6.300"	69730-16	7.300"	69830-16	8.300"	69930-16	9.300"
69635-16	6.350"	69735-16	7.350"	69835-16	8.350"	69935-16	9.350"
69640-16	6.400"	69740-16	7.400"	69840-16	8.400"	69940-16	9.400"
69645-16	6.450"	69745-16	7.450"	69845-16	8.450"	69945-16	9.450"
69650-16	6.500"	69750-16	7.500"	69850-16	8.500"	69950-16	9.500"
69655-16	6.550"	69755-16	7.550"	69855-16	8.550"	69955-16	9.550"
69660-16	6.600"	69760-16	7.600"	69860-16	8.600"	69960-16	9.600"
69665-16	6.650"	69765-16	7.650"	69865-16	8.650"	69965-16	9.650"
69670-16	6.700"	69770-16	7.700"	69870-16	8.700"	69970-16	9.700"
69675-16	6.750"	69775-16	7.750"	69875-16	8.750"	69975-16	9.750"
69680-16	6.800"	69780-16	7.800"	69880-16	8.800"	69980-16	9.800"
69685-16	6.850"	69785-16	7.850"	69885-16	8.850"	69985-16	9.850"
69690-16	6.900"	69790-16	7.900"	69890-16	8.900"	69990-16	9.900"
69695-16	6.950"	69795-16	7.950"	69895-16	8.950"	69995-16	9.950"

5/16 RADIUS PUSHRODS

6.000" - 9.950" • .080" WALL

210° radius on one end.

Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length	Part No.	Overall Length
69600R-16	6.000"	69700R-16	7.000"	69800R-16	8.000"	69900R-16	9.000"
69605R-16	6.050"	69705R-16	7.050"	69805R-16	8.050"	69905R-16	9.050"
69610R-16	6.100"	69710R-16	7.100"	69810R-16	8.100"	69910R-16	9.100"
69615R-16	6.150"	69715R-16	7.150"	69815R-16	8.150"	69915R-16	9.150"
69620R-16	6.200"	69720R-16	7.200"	69820R-16	8.200"	69920R-16	9.200"
69625R-16	6.250"	69725R-16	7.250"	69825R-16	8.250"	69925R-16	9.250"
69630R-16	6.300"	69730R-16	7.300"	69830R-16	8.300"	69930R-16	9.300"
69635R-16	6.350"	69735R-16	7.350"	69835R-16	8.350"	69935R-16	9.350"
69640R-16	6.400"	69740R-16	7.400"	69840R-16	8.400"	69940R-16	9.400"
69645R-16	6.450"	69745R-16	7.450"	69845R-16	8.450"	69945R-16	9.450"
69650R-16	6.500"	69750R-16	7.500"	69850R-16	8.500"	69950R-16	9.500"
69655R-16	6.550"	69755R-16	7.550"	69855R-16	8.550"	69955R-16	9.550"
69660R-16	6.600"	69760R-16	7.600"	69860R-16	8.600"	69960R-16	9.600"
69665R-16	6.650"	69765R-16	7.650"	69865R-16	8.650"	69965R-16	9.650"
69670R-16	6.700"	69770R-16	7.700"	69870R-16	8.700"	69970R-16	9.700"
69675R-16	6.750"	69775R-16	7.750"	69875R-16	8.750"	69975R-16	9.750"
69680R-16	6.800"	69780R-16	7.800"	69880R-16	8.800"	69980R-16	9.800"
69685R-16	6.850"	69785R-16	7.850"	69885R-16	8.850"	69985R-16	9.850"
69690R-16	6.900"	69790R-16	7.900"	69890R-16	8.900"	69990R-16	9.900"
69695R-16	6.950"	69795R-16	7.950"	69895R-16	8.950"	69995R-16	9.950"

Accessories



PUSHROD GUIDE PLATES

Crower's pushrod guide plates are specially hardened for added strength and durability. They are positioned on the rocker arm studs to guarantee proper pushrod alignment. Crower's unique guide plate design reduces the flex and rocker arm slop found in other brands, providing more pushrod stability and added strength. Adjustable guide plates are also available. Please specify when ordering.

Part No.	Description	Pushrod Dia.
70502-8	CHEVROLET 262-400 V8	5/16
70500-8	CHEVROLET 262-400 V8	3/8
70509-8	CHEVROLET 262-400 V8 (.150")	3/8
70505-8	CHEVROLET 262-400 V8 (.225")	3/8
70517-8	CHEVROLET 262-400 V8 Adj.	5/16
70516-8	CHEVROLET 262-400 V8 Adj.	3/8
70506-8	CHEVROLET 396-454 V8	3/8
70503-8	CHEVROLET 396-454 V8	7/16
70504-8	FORD 289-302 V8	5/16
70501-8	FORD 351C-400 V8	3/8
70512-8	FORD 351C	5/16
70508-8	FORD 429-460 V8	5/16
70507-8	FORD 429-460 V8	3/8
70518-8	DODGE 318-360 Magnum V8	5/16
70518-6	DODGE Magnum V6	5/16



ADJUSTABLE CHECKING PUSHRODS

Crower adjustable checking pushrods have $\pm .250$ " adjustment travel in order to obtain accurate measurements for determining the optimum pushrod length. Overall lengths are listed with the adjustable end in the middle of the adjustment range. Made from 5/16 tubing with two pushrods per package.

Part No.	Description	Overall Length
70477-2	Adjustable Checking Pushrods	6.300"
70478-2	Adjustable Checking Pushrods	6.800"
70461-2	Adjustable Checking Pushrods	7.150"
70479-2	Adjustable Checking Pushrods	7.250"
70470-2	Adjustable Checking Pushrods	7.500"
70471-2	Adjustable Checking Pushrods	7.750"
70465-2	Adjustable Checking Pushrods	7.750"/8.750"
70466-2	Adjustable Checking Pushrods	7.600"/8.600"
70463-2	Adjustable Checking Pushrods	7.975"
70466T-2	Checking Pushrods (Tall Deck)	8.000"/9.000"
70465T-2	Checking Pushrods (Tall Deck)	8.150"/9.150"
70472-2	Adjustable Checking Pushrods	8.250"
70473-2	Adjustable Checking Pushrods	8.400"
70462-2	Adjustable Checking Pushrods	8.700"
70474-2	Adjustable Checking Pushrods	9.550"
70475-2	Adj. Checking Pushrods (Low Blk)	8.250"/9.250"
70476-2	Adj. Checking Pushrods (High Blk)	8.650"/9.650"
70499-2	Adjustable Checking Pushrods	Custom

Note: Also available with a cup end and adjustable bottom.



PRECISION ADJUSTABLE CHECKING PUSHRODS


Correct pushrod length is critical in achieving proper valve train geometry. Crower precision checking pushrods guarantee accurate measurements for determining the optimum pushrod length. Precision crafted from steel alloy with a black oxide finish for added durability, Crower checking pushrods are extremely easy to use. Each complete revolution is equal to .050".

Part No.	Description	Length
70480	Precision Checking Pushrod	5.500" / 6.500"
70481	Precision Checking Pushrod	6.500" / 7.500"
70482	Precision Checking Pushrod	7.500" / 8.500"
70483	Precision Checking Pushrod	8.500" / 9.500"
70485	Checking Kit (1 ea of above)	5.500" / 9.500"

HI-REV KITS

Crower highly recommends installing a Hi-Rev kit in any roller cam or extreme rpm application to provide added stability to the valve train. Each Crower Hi-Rev Kit includes two lightweight aluminum alloy bars, spacers, and springs required for quick and easy installation. Available for both standard and cutaway design Crower roller lifter tappets. Cutaway designs must specify intake and exhaust rocker offsets.

Part No.	Description	Head
82020	CHEVY 262-400 Series II (66200)	Stock
82020-X1	CHEVY 262-400 Series II (66200) Hi-Pressure	Stock
82027	CHEVY 262-400 Series II (66275)	18°, 11x, -12
82027-H	CHEVY 262-400 Series II (66275) Hi-Pressure	18°, 11x, -12
82029	CHEVY 262-400 Series II (66200)	18°, 11x, -12
82030	CHEVY 262-400 Series II (w/.050" Offset Plates)	Stock
83000	CHEVY 262-400 Cutaway Lifters (Offset)	Stock
83003	CHEVY 262-400 Cutaway Lifters (Center)	Stock
83007	CHEVY 262-400 Cutaway (Offset/Center)	18°, 11x, -12
83008	BUICK HEAD Cutaway Lifters (Offset)	Stock

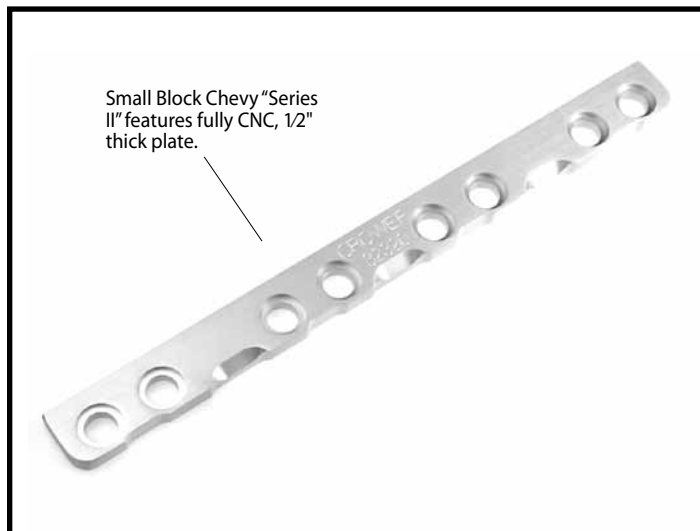

Small Block Chevy "Series II" features fully CNC, 1/2" thick plate.

Engineering the Science of Geometry


Anatomy of a CROWER ROCKER

Our lash adjusters are machined from aircraft quality Hi-temp alloy, precision thread rolled after double heat treat process.

Our 2024 aluminum bodies deliver maximum strength at operating temperature.

Aircraft quality 12 point nuts.

Hardened tip wheel withstands race rigors and minimizes scrubbing.

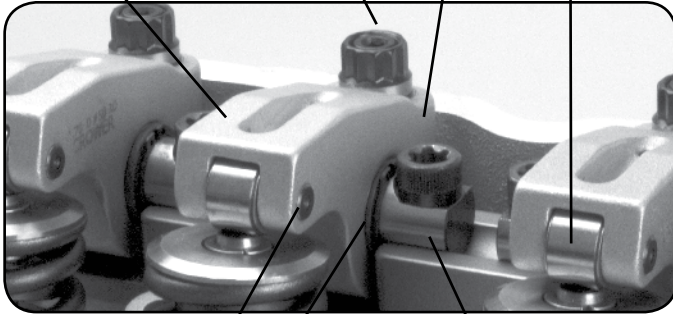

Fully rollerized precision needle bearing fulcrum.


Crower shafts are CNC precision machined from ball race alloy steels, heat-treated twice and micro finish ground in-house.

Our Axles are "super secured" for trouble free operation.

Needle Bearing Tip Option


Crower has raised the bar on valve train technology with a new needle bearing roller tip option available on all new Crower stud and shaft mount rocker arm assemblies.

Specify #73715R after rocker part number for stainless steel, #72915R for aluminum.

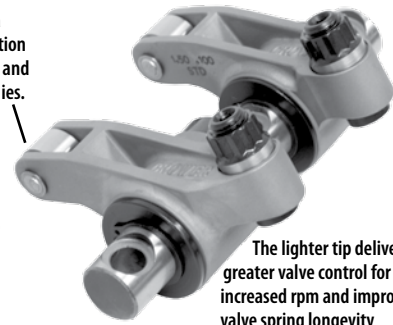

The lighter tip delivers greater valve control for increased rpm and improves valve spring longevity by decreasing heat over traditional non needle designs.

Reduced friction for added horsepower and reduced valve guide and valve stem wear.




Ideal rocker geometry at half valve lift

Highest unit loading on the valve train is approximately at half lift (45° @ cam lobe)


This configuration minimizes tip travel across the valve stem and keeps contact centered on top of the valve, reducing frictional losses due to valve guide side loading and tip scrubbing. Pushrod deflection is also minimized for more accurate valve action.

Rocker Ratio




Rocker arm ratio is determined by dividing the distance from the fulcrum to the tip centerpoints (Y) by the distance from the fulcrum to the pushrod seat centerpoints (X). This theoretical ratio may vary from our net/advertised ratio due to measured valve train deflection under load.

Long Arm



Higher rocker ratios require extending the arm of the rocker. Long arm rockers allow proper pushrod seat positioning in relation to the fulcrum point. An additional long arm benefit is reduced back and forth tip travel across the valve stem. Less scrubbing and valve stem side loading occur and associated frictional losses are minimized.


Tip Travel



No Lift

contact slightly behind centerline


When the valve is closed tip contact is slightly behind the centerline of the valve.



Half Lift

centerline contact 1/2 lift

At highest unit loading (approx. 1/2 lift) tip contact ideally is on the centerline of the valve. The valve train is overcoming spring pressure and, more importantly, rapidly accelerating its mass. To minimize deflection, side loading and frictional loss, we want the valve train geometry in its strongest and straightest configuration at this point.




Full Lift

contact slightly behind centerline

When the valve is fully open, tip contact is slightly behind the centerline of the valve. The valve train in this position (at high RPM) feels the least amount of unit loading as float approaches...everything gets momentarily weightless.

Useful Ordering Information

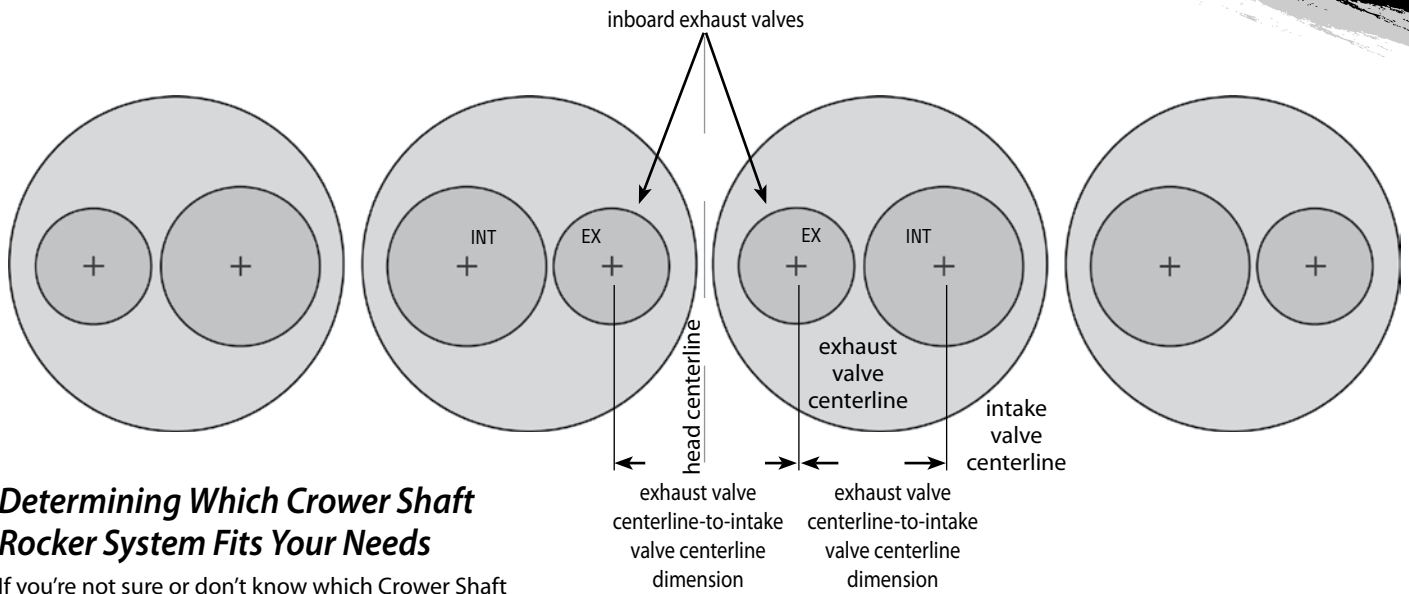

Determining Which Crower Shaft Rocker System Fits Your Needs

If you're not sure or don't know which Crower Shaft Rocker System will fit your cylinder head, or the type/model of head you have and need help, follow these simple procedures:

1. You'll need to provide us with some critical information and dimensions.
 - a. Cylinder head manufacturer
 - b. Engine type
 - c. Intake and exhaust valve distances from cylinder head centerline.
 - d. Rocker stud spacing from cylinder head centerline.

Here's how you do it.

Measure the distance from the outside diameter of the two inboard exhaust valves. Record the value. Subtract the diameter of the valve (Example: .341) from your recorded value and divide this measurement by 2. Now you'll know the distance from the cylinder head centerline to exhaust valve centerline.

Now measure the distance from the outside of the intake valve to the outside diameter of the exhaust valve diameter. Subtract .341" from that to get the centerline distance from exhaust to intake valve.

Note: .341" diameter is based on 11/32" intake and exhaust valves. Some cylinder heads have different size intake stems. Make sure you measure valve stem size before measuring valve centerline.

2. Follow the same procedure for the studs.
3. Supply us the dimensions and we'll take it from there!

Rocker Body Identification

To order replacement rockers and insure correct fit you'll need to provide your Crower technician with the following info.

Rocker Bodies without I.D. numbers:

- Rocker arm Ratio
- Rocker arm Offset
- Which valve the rocker actuates (intake or exhaust)
- Which cylinder the rocker is mounted on (2,4,6,8-1,3,5,7, etc.)
- Name/brand of cylinder head
- Stand Number
- Shaft Diameter

Rocker Bodies with I.D. numbers:

- Rocker arm Body I.D. number
- Rocker arm Ratio
- Rocker arm Offset
- Stand Number
- Shaft Diameter

Ratio and Offset Locations

Aluminum Stud Mount Rockers



Stainless Stud Mount Rockers



Aluminum Shaft Mount Rockers



Stainless Shaft Mount Rockers



Stainless Steel Stud Mounted Rockers

**Coming Soon - True Ratio
1/2" Stud Mounted Rockers**

ENDURO LONG ARM/ BACKSET ROLLERIZED ROCKERS



Crower's Long Arm/Backset trunnion rollerized rockers are made to the same high tolerances as our standard stainless steel rocker arms with a .090" backset trunnion and these added features:

- Increased area under the lift curve
- Additional spring clearance (1.650")
- Smoother valve action
- Less side loading on stems/guides
- Drop on installation
- Set of 8 for intake (use standard Crower stainless steel rockers on exhaust)

Part#	Description	Ratio	Stud
73677-8	Chevrolet 265-400 V8	1.5	7/16
73674-8	Chevrolet 265-400 V8	1.6	7/16
73672-8	Chevrolet 265-400 V8	1.65	7/16
73673-8	Chevrolet 265-400 V8	1.7	7/16
73676-8	Chevrolet 265-400 V8	1.75	7/16
73675-8	Chevrolet 265-400 V8	1.8	7/16
73678-8	Chevrolet 265-400 V8	1.85	7/16

Note: May be purchased as mixed ratios intake and exhaust. Can be ordered N.S. without sure-locks

ENDURO CENTERLINE ROLLERIZED ROCKERS

When installing a .100" long valve, the rocker arm tip must be backed up .050" to insure centerline contact at half lift. Crower offsets the rocker stud hole in the trunnion, pulling the rocker tip back into correct alignment with the valve stem. Re-establishing correct geometry reduces valve guide wear and promotes more accurate valve timing.



Part#	Description	Ratio
73690-16	Chevrolet 265-400 (set 16).050 backset	1.5
73691-16	Chevrolet 265-400 (set 16).050 backset	1.55
73692-16	Chevrolet 265-400 (set 16).050 backset	1.6
73693-16	Chevrolet 265-400 (set 16).050 backset	1.65
73694-16	Chevrolet 265-400 (set 16).050 backset	1.7
73696-16	Chevrolet 265-400 (set 16).050 backset	1.75
73695-16	Chevrolet 265-400 (set 16).050 backset	1.8
73682-16	Chevrolet 396-454 (set 16).050 backset	1.65
73683-16	Chevrolet 396-454 (set 16).050 backset	1.7
73684-16	Chevrolet 396-454 (set 16).050 backset	1.75
73685-16	Chevrolet 396-454 (set 16).050 backset	1.8
73686-16	Chevrolet 396-454 (set 16).090 backset	1.65
73687-16	Chevrolet 396-454 (set 16).090 backset	1.7
73688-16	Chevrolet 396-454 (set 16).090 backset	1.75
73689-16	Chevrolet 396-454 (set 16).090 backset	1.8

The above rockers may be purchased in sets of 8 to mix ratios. Note: 7/16 stud diameter.

Can be ordered N.S. without sure-locks

LATE MODEL ROCKERS

Crower's self-aligning rocker arms are available for late model small and big block Chevrolet, Dodge Magnum truck and the V10 Viper.

Features include:

- Self aligning roller tip holds rocker in place
- 25 hp, 4 mph on 1/4 mile with 1.7's on V10
- Emissions Legal certified ARB #D-410



Part#	Description	Ratio	Stud
CHEVROLET			
73602-12	V6 Chevy 85-96, 97-98 Vortec	1.5	3/8
73603-12	V6 Chevy 85-96, 97-98 Vortec	1.6	3/8
73602-16	SB Chevy 85-96, 97-98 Vortec, LT1	1.5	3/8
73603-16	SB Chevy 85-96, 97-98 Vortec, LT1	1.6	3/8
73660-16	SB Chevy Narrow, Non Align	1.5	3/8
73661-16	SB Chevy Narrow, Non Align	1.6	3/8
73608-16	BB Chevy 85-96, 97-98 Vortec	1.8	7/16
DODGE			
73653K*	V6 Dodge Magnum	1.6	3/8
73654K*	V6 Dodge Magnum	1.7	3/8
73655K*	V8 Dodge Magnum	1.6	3/8
73656K*	V8 Dodge Magnum	1.7	3/8
73657K*	V10 Dodge Magnum	1.6	3/8
73659K*	V10 Dodge Magnum	1.7	3/8
73662K*	V10 Dodge Viper	1.6	7/16
73663K*	V10 Dodge Viper	1.7	7/16

*"K" incl. rocker studs. 5500 RPM limit on "K" kits (6300 on Viper) Can be ordered N.S. without sure-locks

DODGE MAGNUM ROLLER ROCKER KITS

Our "PK" kits are a must in order to maintain valve train integrity when RPM's over 5500 are reached. If sustained high RPM is expected, you must upgrade to 68305X1 spring. "PK" kits include rocker studs, guide plates (#70518) & 1 pc. pushrods (#69695).

Part#	Description	Ratio	Stud
73653PK*	V6 Dodge Magnum	1.6	3/8
73654PK*	V6 Dodge Magnum	1.7	3/8
73655PK*	V8 Dodge Magnum	1.6	3/8
73656PK*	V8 Dodge Magnum	1.7	3/8

STAMPED STEEL ROCKER ARMS

Crower's stamped steel rockers utilize a longer slot for high lift, aftermarket cams. Made from high strength steel alloy and stamped to resist the rocker flex for the longest possible operating life.



Part#	Description	Ratio
73050-16	Chevrolet 265-400 (set 16)	1.5
73051-16	Chevrolet 265-400 (set 16)	1.6
73053	Chevrolet 265-400 (8 ea/8 ea) Kit	1.5/1.6
73052-16	Chevrolet 396-454 (set 16)	1.7

Note: For small block Chevrolet, a 1.6 ratio will raise gross valve lift for a nominal horsepower increase. All rockers listed are 3/8 stud.

Can be ordered N.S. without sure-locks

ENDURO STAINLESS STEEL ROLLERIZED ROCKERS



Made from 17-4PH stainless steel with 1025 heat-treating, these proven rollerized rockers feature premium, oversized needle bearings, sure-lock rocker nuts and alloy steel tip rollers. Superior lightweight body design provides plenty of clearance for large diameter springs. Includes sure-locks.

Part#	Description	Ratio	Stud
AMC			
73645-16*	AMC 290-401 V8	1.6	3/8
73646-16*	AMC 290-401 V8	1.6	7/16
73648-12*	AMC 6 cyl.	1.6	3/8
73647-12*	AMC 6 cyl.	1.6	7/16

CHEVROLET			
73625-8	Chevy II 4 cyl.	1.75	3/8
73628-12	Chevrolet 230 250 292 6cyl.	1.6	3/8
73629-12	Chevrolet 230 250 292 6 cyl.	1.75	3/8
73630-12	Chevrolet 230 250 292 6 cyl.	1.6	7/16
73631-12	Chevrolet 230 250 292 6 cyl.	1.75	7/16
73649-12	Chevrolet 200 229 90° V6	1.6	3/8
73650-12	Chevrolet 200 229 90° V6	1.5	7/16
73651-12	Chevrolet 200 229 90° V6	1.65	7/16
73652-12	Chevrolet 200 229 90° V6	1.6	7/16
73635-16	Chevrolet 265-400 V8	1.35	7/16
73600-16	Chevrolet 265-400 V8	1.5	3/8
73660-16	Chevrolet 265-400 V8 LT1	1.5	3/8
73640-16	Chevrolet 265-400 V8	1.6	3/8
73661-16	Chevrolet 265-400 V8 LT1	1.6	3/8
73670-16	Chevrolet 265-400 V8	1.65	3/8
73601-16	Chevrolet 265-400 V8	1.5	7/16
73641-16	Chevrolet 265-400 V8	1.6	7/16
73642-16	Chevrolet 265-400 V8	1.55	7/16
73671-16	Chevrolet 265-400 V8	1.65	7/16
73643-16	Chevrolet 265-400 V8	1.7	7/16
73604-16	Chevrolet 396-454 V8	1.55	7/16
73606-16	Chevrolet 396-454 V8	1.6	7/16
73605-16	Chevrolet 396-454 V8	1.7	7/16
73607-16	Chevrolet 396-454 V8	1.75	7/16
73608-16	Chevrolet 396-454 V8	1.8	7/16

FORD			
73609-16	Ford 289 302 351W V8	1.6	3/8
73610-16	Ford 289 302 351W V8	1.65	3/8
73611-16	Ford 289 302 351W V8	1.7	3/8
73612-16	Ford 289 302 351W V8	1.6	7/16
73613-16	Ford 289 302 351W V8	1.65	7/16
73614-16	Ford 289 302 351W V8	1.7	7/16
73637-16	Ford 289 302 351W V8	1.75	7/16
73638-16	Ford 289 302 351W V8	1.8	7/16
73618-16	Ford Boss 351C 400 429 460	1.6	7/16
73616-16	Ford Boss 351C 400 429 460	1.65	7/16
73615-16	Ford Boss 351C 400 429 460	1.73	7/16
73617-16	Ford Boss 351C 400 429 460	1.75	7/16
73619-16	Ford Boss 351C 400 429 460	1.8	7/16

PONTIAC			
73626-16	Pontiac V8	1.5	3/8
73621-16	Pontiac V8	1.7	7/16
73622-16	Pontiac V8	1.6	3/8
73627-16	Pontiac V8	1.5	7/16
73623-16	Pontiac V8	1.6	7/16
73624-16	Pontiac V8	1.65	7/16

OLDSMOBILE			
73644-16*	Oldsmobile 67-91 V8 V8	1.6	7/16

* Requires machine work Note: Rocker arms can be purchased in 1/2 sets (8 intake and 8 exhaust for split ratio applications) or individually Note: Specify stud 88400 (3/8) or 88401 (7/16) when ordering. Can be ordered N.S. without sure-locks

Aluminum Stud Mounted Rockers

ALUMINUM STUD ROLLERIZED ROCKERS

Crower's Enduro aluminum stud mount rocker arms are fully CNC machined from USA made, premium aluminum extrusion. Crower's unique "full arch" design reduces the rocker flex found in other brands. Results are increased rpm, greater area under the lift curve and added spring clearance. Double-step, serrated pins feature our rotor clip design that eliminates pin loosening. USA made needle bearings. When vertical valve cover clearance is an issue, specify "LP" when ordering. Will clear 1.625" diameter spring.



ALUMINUM CENTERLINE ROLLERIZED ROCKERS

When installing a .100" long valve, the rocker arm tip must be backed up .050" to ensure centerline contact at half lift. Crower offsets the rocker stud hole in the trunnion, pulling the rocker tip back into correct alignment with the valve stem. Re-establishing correct geometry reduces valve guide wear and promotes more accurate valve timing. Will clear 1.650" diameter spring.



BREAK-IN ALUMINUM ROLLERIZED ROCKERS

Reduce cam and lifter break-in failures by running Crower's new break-in rocker arms first. Features a reverse offset trunnion (.050") that repositions the pushrod closer to the stock position. In other words, Crower moves the rocker arm and pushrod forward .050" for easier installation. Current break-in rockers on the market only offer center trunnion stud hole positions that require extensive cylinder head modifications to the pushrod hole in order to achieve proper pushrod and head clearance. Crower's break-in rockers drop on with no machine work required. Spring pockets machined for 1.560" O.D. spring



Part#	Description	Ratio	Stud
AMC			
72845-16*	AMC 290-401 V8	1.6	3/8
72846-16*	AMC 290-401 V8	1.6	7/16
72848-12*	AMC 6 cyl.	1.6	3/8
72847-12*	AMC 6 cyl.	1.6	7/16

Part#	Description	Ratio	Stud
CHEVROLET			
72825-8	Chevy II 4 cyl.	1.75	3/8
72828-12	Chevrolet 230 250 292 6cyl.	1.6	3/8
72829-12	Chevrolet 230 250 292 6 cyl.	1.75	3/8
72830-12	Chevrolet 230 250 292 6 cyl.	1.6	7/16
72831-12	Chevrolet 230 250 292 6 cyl.	1.75	7/16
72850-12	Chevrolet 200 229 90° V6	1.5	7/16
72852-12	Chevrolet 200 229 90° V6	1.6	7/16
72854-12	Chevrolet 200 229 90° V6	1.65	7/16
72835-16	Chevrolet 265-400 V8	1.35	7/16
72800-16	Chevrolet 265-400 V8	1.5	3/8
72840-16	Chevrolet 265-400 V8	1.6	3/8
72870-16	Chevrolet 265-400 V8	1.65	3/8
72801-16	Chevrolet 265-400 V8	1.5	7/16
72841-16	Chevrolet 265-400 V8	1.6	7/16
72842-16	Chevrolet 265-400 V8	1.55	7/16
72871-16	Chevrolet 265-400 V8	1.65	7/16
72843-16	Chevrolet 265-400 V8	1.7	7/16
72804-16	Chevrolet 396-454 V8	1.55	7/16
72806-16	Chevrolet 396-454 V8	1.6	7/16
72805-16	Chevrolet 396-454 V8	1.7	7/16
72807-16	Chevrolet 396-454 V8	1.75	7/16
72808-16	Chevrolet 396-454 V8	1.8	7/16

Part#	Description	Ratio	Stud
FORD			
72809-16	Ford 289 302 351 W V8	1.6	3/8
72810-16	Ford 289 302 351W V8	1.65	3/8
72811-16	Ford 289 302 351W V8	1.7	3/8
72832-16	Ford 289 302 351W-351-N V8	1.5	7/16
72833-16	Ford 289 302 351W 351-N V8	1.55	7/16
72812-16	Ford 289 302 351W 351-N V8	1.6	7/16
72813-16	Ford 289 302 351W 351-N V8	1.65	7/16
72814-16	Ford 289 302 351W 351-N V8	1.7	7/16
72837-16	Ford 289 302 351W 351-N V8	1.75	7/16
72838-16	Ford 289 302 351W 351-N V8	1.8	7/16
72818-16	Ford Boss 351C 400 429 460	1.6	7/16
72816-16	Ford Boss 351C 400 429 460	1.65	7/16
72815-16	Ford Boss 351C 400 429 460	1.73	7/16
72817-16	Ford Boss 351C 400 429 460	1.75	7/16
72819-16	Ford Boss 351C 400 429 460	1.8	7/16

Part#	Description	Ratio	Stud
PONTIAC			
72826-16	Pontiac V8	1.5	3/8
72821-16	Pontiac V8	1.7	7/16
72822-16	Pontiac V8	1.6	3/8
72827-16	Pontiac V8	1.5	7/16
72823-16	Pontiac V8	1.6	7/16
72824-16	Pontiac V8	1.65	7/16

Part#	Description	Ratio	Stud
OLDSMOBILE			
72844-16	Oldsmobile 67-91 V8	1.6	7/16

* Requires machine work
Can be ordered N.S. without sure-locks

Part#	Description	Ratio	Stud
72890-8	Chevrolet 265-400 V8 (set 8)	1.5	7/16
72891-8	Chevrolet 265-400 V8 (set 8)	1.55	7/16
72892-8	Chevrolet 265-400 V8 (set 8)	1.6	7/16
72893-8	Chevrolet 265-400 V8 (set 8)	1.65	7/16
72894-8	Chevrolet 265-400 V8 (set 8)	1.7	7/16
72896-8	Chevrolet 265-400 V8 (set 8)	1.75	7/16
72895-8	Chevrolet 265-400 V8 (set 8)	1.8	7/16
72897-8	Chevrolet 396-454 V8 (set 8)	1.7	7/16
72898-8	Chevrolet 396-454 V8 (set 8)	1.8	7/16

The above rockers come in sets of 8 to mix ratios.
Can be ordered N.S. without sure-locks

OFFSET ALUMINUM INTAKE ROCKERS

Crower has a .150" offset aluminum rocker available in 7/16" stud diameter only. These rockers include the same features as our Enduro Aluminum rockers, but in an offset design. Order only for the intake and then 8 only standard stud mount rockers on the exhaust (see p/n at left).



Part#	Description	Ratio	Stud
CHEVROLET			
72801X1-8	Chevrolet 265-400 V8	1.5	7/16
72841X1-8	Chevrolet 265-400 V8	1.6	7/16
72842X1-8	Chevrolet 265-400 V8	1.55	7/16
72843X1-8	Chevrolet 265-400 V8	1.7	7/16
72871X1-8	Chevrolet 265-400 V8	1.65	7/16

Part#	Description	Ratio	Stud
FORD			
72812X1-8	Ford 289-302-351W 351N V8	1.6	7/16
72813X1-8	Ford 289-302-351W 351N V8	1.65	7/16
72814X1-8	Ford 289-302-351W 351N V8	1.7	7/16
72832X1-8	Ford 289-302-351W 351N V8	1.5	7/16
72833X1-8	Ford 289-302-351W 351N V8	1.55	7/16
72837X1-8	Ford 289-302-351W 351N V8	1.75	7/16
72838X1-8	Ford 289-302-351W 351N V8	1.8	7/16

Note: These rockers come 8 only for the intake side. You must order 8 only standard design rockers for the exhaust side.

Can be ordered N.S. without sure-locks

NEEDLE BEARING TIP OPTION

All Crower stud and shaft mount rocker arms are available with Crower's new needle bearing roller tip option. Results are greatly reduced friction for added horsepower and reduced valve guide and valve stem wear. The lighter tip delivers greater valve control for increased rpm and improves valve spring longevity by decreasing heat over traditional non needle designs. Specify #73715R option for stainless steel (stud or shaft) or #72915R option for aluminum (stud or shaft) when ordering rocker arms. Not available on self-aligning tip designs.



Example A

.350 Lobe Lift
x 1.7 Rocker Ratio
.595 Gross Lift
-.020 Lash
.575 Net Valve Lift


Example B

.350 Lobe Lift
x 1.2 Rocker Ratio
.420 Gross Lift
-.020 Lash
.400 Net Valve Lift

As you can see in example (A), net valve lift is .575" and example (B) is .400" net. Depending on spring rate, this could be as much as 100 lbs. or more reduced open pressure.

Part#	Description	Ratio	Stud
CHEVROLET			
72881-16	Chevrolet 265-400 V8	1.2	7/16
72886-16	Chevrolet 265-400 V8	1.35	7/16
72882-16	Chevrolet 396-454 V8	1.4	7/16
FORD			
72884-16	Ford 289 302 351W V8	1.3	7/16
72885-16	Ford 351C V8	1.33	7/16

Stud Mounted Rocker Parts

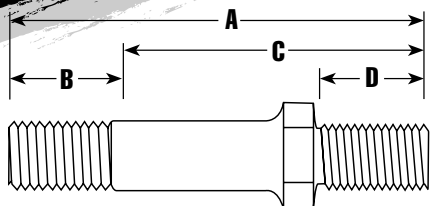

ALLOY ROCKER STUDS

Crower screw-in rocker studs are rated to 190,000 p.s.i. tensile strength and insure reliability in your valve train. Machined and finished from 8740 aircraft quality steel and heat-treated for maximum strength. All threads are cold rolled for concentricity and extreme durability.

Part#	Description	Stud Dia.
88419-12	Chevrolet 60° V6 2.8-3.1 (80-94)	3/8 top 10mm bottom
88400-16	Chevrolet 265-400 A=2.430" B=0.680" C=1.750" D=0.800"	3/8 top 7/16 bottom
88402L	Chevrolet 396-454 (Alum Heads) Int: A=2.825" B=0.815" C=1.900" D=1.000" Exh: A=3.310" B=1.300" C=2.010" D=1.030"	7/16
88401-16	Chev 265-400 & 396-454 A=2.650" B=0.750" C=1.900" D=0.650"	7/16
88405-8	Chevrolet 396-454 (Alum Hds Ex. only) A=3.310" B=1.300" C=2.010" D=1.030"	7/16
88425-16	Chevrolet (Special appl. +.250") A=2.825" B=.815" C=1.900" D=1.000"	7/16
88418-16	Chev Late Mod/Mark V A=2.650" B=0.750" C=1.900" D=1.000"	7/16 top 3/8 bottom*
88401-16	Ford 302, 351C A=2.650" B=0.750" C=1.900" D=0.650"	7/16
88416-16	Dodge Magnum V8 A=2.430" B=0.700" C=1.760" D=0.800"	3/8 top 5/16 bottom
88416-20	Dodge V10 Truck A=2.430" B=0.700" C=1.760" D=0.800"	3/8 top 5/16 bottom
88417-20	Dodge Viper V10 A=2.450" B=0.750" C=1.700" D=0.800"	3/8 top 5/16 bottom

*Must reuse factory guide plates with 3/8 mounting hole.




SURE LOCK ROCKER NUTS

Made from high quality, heat treated chromoly steel, Crower sure lock nuts allow for precise adjustments. Includes nuts, Allen head set screws.

Part#	Stud Dia.	Shank Dia.	Engine
86050-16	7/16	.600"	V8
86050S-16	7/16	.600"	V8
86051-16	3/8	.530"	V8
86051S-16	3/8	.530"	V8
86052-12	3/8	.530"	6 cyl

"S" indicates short (.865") design for valve cover clearance. Std = 1.060"

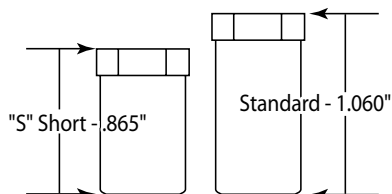

NEEDLE BEARING TIP OPTION


All Crower stud and shaft mount rocker arms are available with Crower's new needle bearing roller tip option. Results are greatly reduced friction for added horsepower and reduced valve guide and valve stem wear. The lighter tip delivers greater valve control for increased rpm and improves valve spring longevity by decreasing heat over traditional non needle designs. **Specify #73715R option for stainless steel (stud or shaft) or #72915R option for aluminum (stud or shaft) when ordering rocker arms. Not available on self-aligning tip designs.**

**CROWER HAS NHRA STOCK CLASS
ACCEPTED STUD MOUNTED
ROCKER SYSTEMS TO KEEP YOU
AHEAD OF THE COMPETITION**


**Coming Soon - True Ratio
1/2" Stud Mounted Rockers**




Stainless Steel Shaft Mounted Rocker Arms

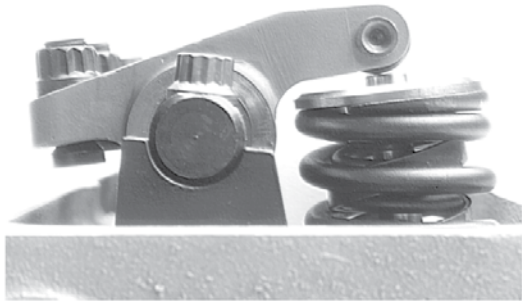


For those of you that feel most confident running a steel based valve train, we offer you the Crower collection of shaft mounted stainless steel rocker arms. Each and every configuration has been religiously scrutinized to offer extreme rigidity and accuracy while optimizing moment of inertia phenomena condition. Crower engineers made ease of installation and maintenance a top priority so you'll never waste a moment when time is critical at the track. Our stainless steel shaft rocker systems are a perennial favorite of dirt late models and marine endurance competitors. Sustained high temperature has little affect on the strength properties of stainless steel so components made from this material should have a longer life expectancy than similar components made from aluminum.

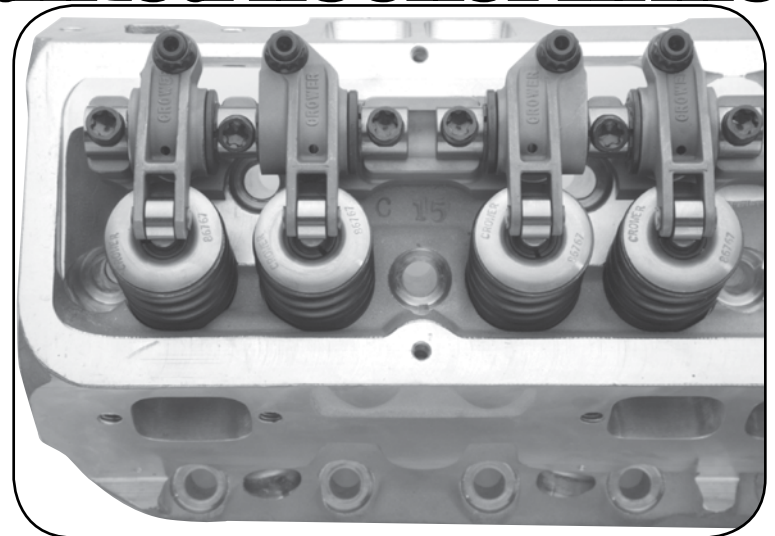

Offset Guide

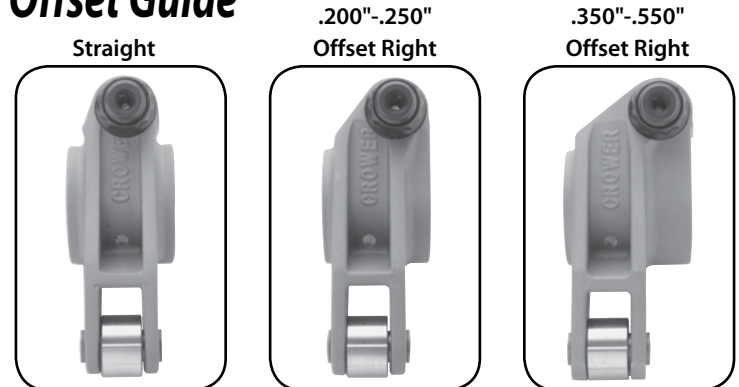


.550" Available on arm lengths 1.480" and over

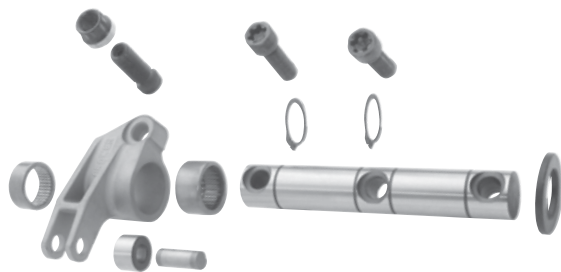


NEEDLE BEARING TIP OPTION


All Crower stud and shaft mount rocker arms are available with Crower's new needle bearing roller tip option. Results are greatly reduced friction for added horsepower and reduced valve guide and valve stem wear. The lighter tip delivers greater valve control for increased rpm and improves valve spring longevity by decreasing heat over traditional non needle designs. **Specify #73715R option for stainless steel (stud or shaft) or #72915R option for aluminum (stud or shaft) when ordering rocker arms.**

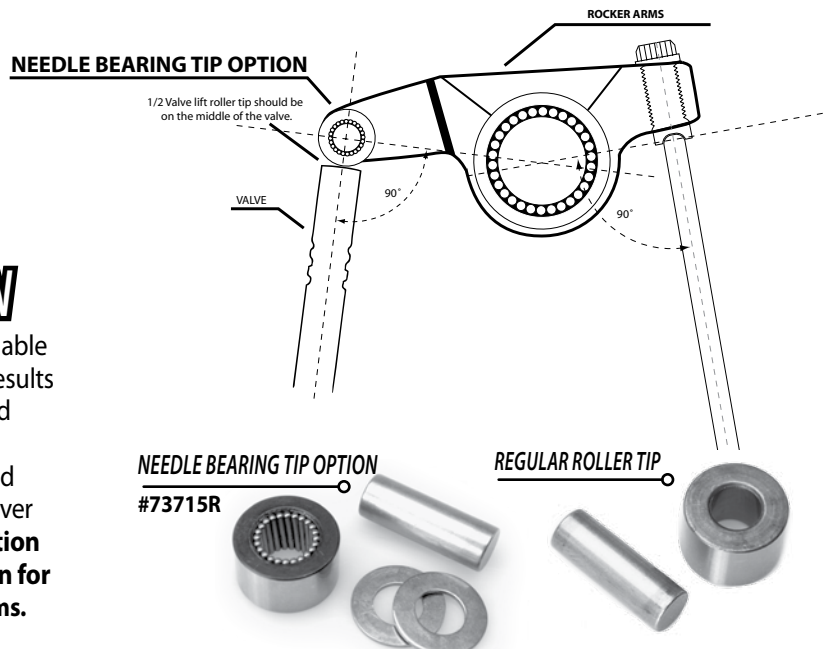


Stainless Steel Shaft Mounted Rocker Arms

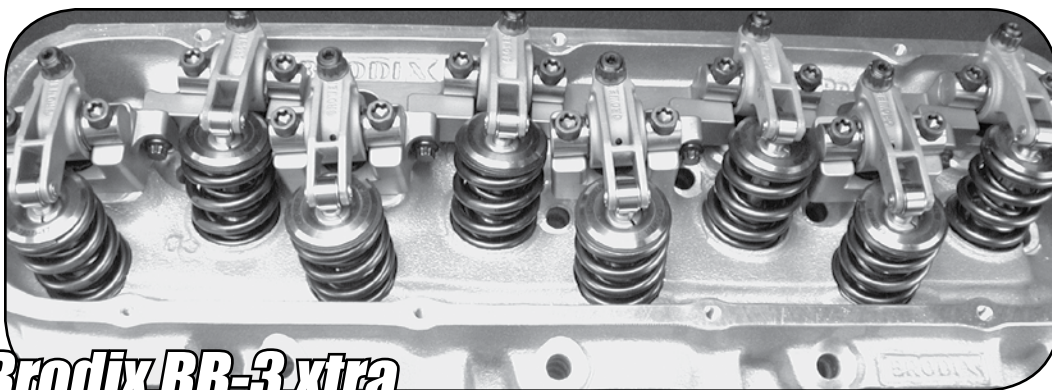


Brodix BB-3xtra

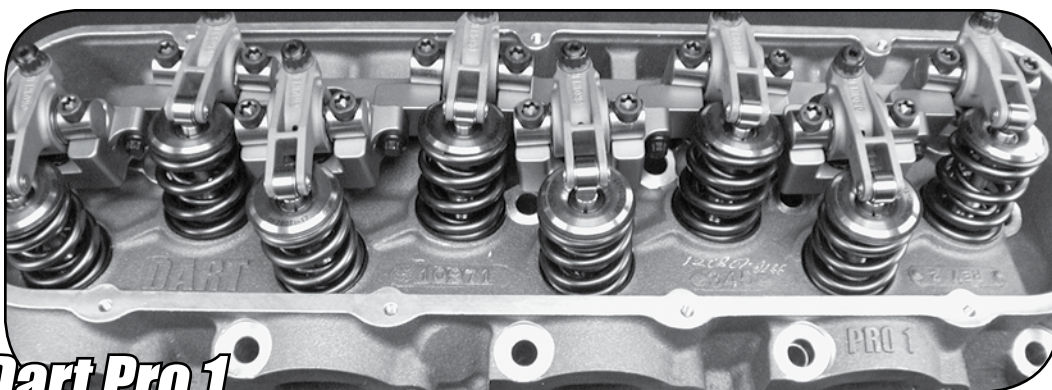

Dart Pro-1

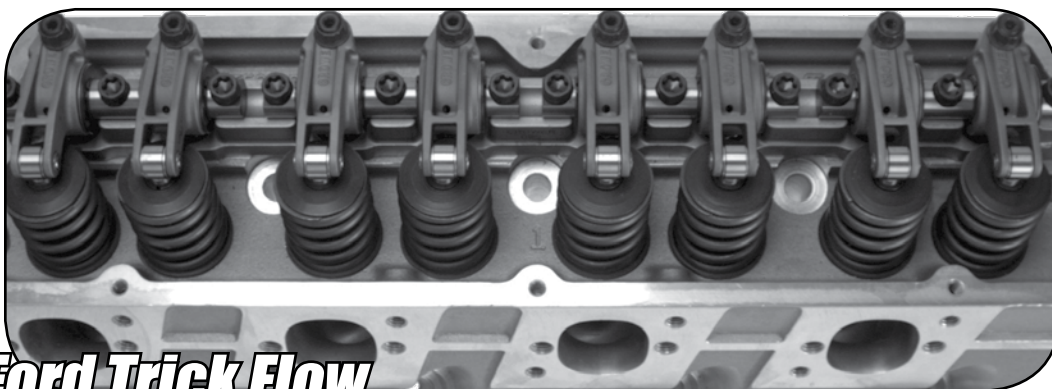

Ford Trick Flow

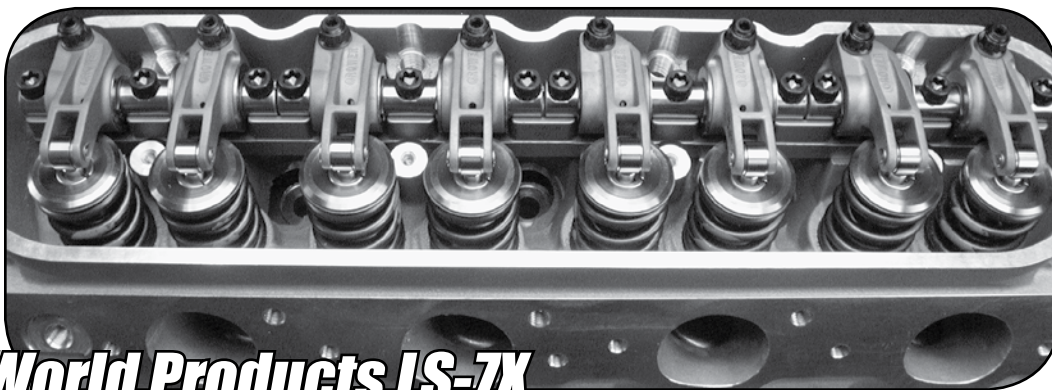

World Products LS-7X

**Steel Billet Rockers Coming Soon
For All Popular Applications**

Stainless Steel Shaft Mounted Rocker Systems

AFR

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74139F	SBC 180cc thru 220cc w/L-98 bolt pattern Eliminator Street Head	1.450	.250	.100	014F	74400X014F
74132F	SBC 215 RR	1.480	.450	.100	021F	74000X021F
74141F	SBC 227 & 235 Eliminator 60/40	1.450	.350	.100	025FT	74400X025FT
74148F	SBC 245 Eliminator	1.450	.450 w/offset lifter	.100	025FT	74400X025FT
*74707F	BBC AFR 325/345/357	1.650	.100	.000	210F Intake 211F Exhaust	74400X210F 74400X211F
74717F	BBC AFR 377ec 240	1.650	.000	.100	227F Intake 219F Exhaust	74400X227F 74400X219F
74140F	SB Ford #165 - 225 + .100 Valve	1.450	.100	.000	031F	74400X031F

ALL PRO

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74134F	SBC 23° 40/60	1.480	.450	.175	021F	74400X021F
74135F	SBC 17°	1.650	.450	.175	013F	74400X013F
74143F	SBC 13°	1.650	.550	.150	023F	74400X023F
74168B	SBC 272-21 & 280-22 Billet	1.650	.750	.250	023F	74400X023F
74164F	LS Series LSW 12° Hurricane	1.550	.450	.050	032F	74400X032F

BRODIX

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74226F	Chev Lil Brodie 90° V-6-10	1.550	.300	.175	001F	74400X001F
74116F	SBC Track I	1.480	.150	.100	020F	74400X020F
74116F	SBC Irwindale Spec SBC	1.480	.150	.100	020F	74400X020F
74112F	SBC -8 through -11	1.480	.250	.100	020F	74400X020F
74126F	SBC 10x 11x 40/60 & ASCS	1.480	.250	.100	021F	74400X021F
74127F**	SBC 10x 11x 40/60 & ASCS	1.480	.450	.100	021F	74400X021F
74114F*	SBC 10x 11x 40/60 LA	1.650	.250	.100	013F	74400X013F
74126F	SBC Track 1x 40/60	1.480	.250	.100	021F	74400X021F
74122F*	SBC -12 RP LA 40/60	1.650	.500	.250	023F	74400X023F
74136F	SBC -12 RP LA 58/107	1.650	.550	.250	023F	74400X023F
74124F*	SBC -12 RP LA 70/125	1.650	.550	.250	023F	74400X023F
74125F*	SBC 18° Clone LA	1.650	.550	.250	013F	74400X013F
74129F	SBC 18° Clone	1.480	.550	.250	021F	74400X021F
74126F	SBC 18x 40/60	1.480	.250	.100	021F	74400X021F
74168B	SBC GB-2300 & GB-2000 Billet	1.650	.750	.250	023F	74400X023F
74182B	SBC 4.500 Bore Spacing 13° Billet	1.650	.600	.250	009F	74400X009F
*74702F	BBC, BB-2X, BB-2Xtra, BB-3	1.650	.100	.000	202F Intake 205F Exhaust	74400X202F 74400X203F
*74703F	BBC BB-3 XTRA	1.650	.100	.000	206F Intake 207F Exhaust	74400X206F 74400X207F
*74704F	BBC BB-1, BB-2, BB-2 plus / Race Rite	1.650	.100	.000	204F Intake 208F Exhaust	74400X204F 74400X208F
*74706F	BBC Head Hunter 383	1.650	.100	.000	218F Intake 219F Exhaust	74400X218F 74400X219F
*74713F	BBC Head Hunter 383-395MC	1.650	.075	.050	218F Intake 219F Exhaust	74400X218F 74400X219F
74164F	LS Series STS BR-7	1.550	.450	.050	032F	74400X032F
74285F	SBF Track 1 351 Spec	1.480	.000	.000	085F	74400X085F

**Needle Bearing Tip Option
#73715R**



* One piece intake stand, no machine work required.

Most shaft rocker assemblies are available with optional offsets. If you don't find the offset you require, please ask about availability.

* LA = Long Arm **Optional offset

Ratios over 1.8 may require a long arm rocker arm. Arm lengths over 1.650 are available in aluminum only.

NOTE: I.D. numbers are stamped on all mounting base stands. When you are ordering your replacement base stand please reference this I.D. number to ensure you get the correct part.

Stainless Steel Shaft Mounted Rocker Systems

Steel Billet Rockers Coming Soon
For All Popular Applications

BMF

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
*74705	BBC BMF 385	1.650	.100	.000	201F Intake 220F Exhaust	74400X201 F 74400X220 F
*74705	BBC BMF 350	1.650	.100	.000	201F Intake 220F Exhaust	74400X201 F 74400X220 F

CANFIELD

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74111F	SBC 23° 400	1.480	.100	.100	020F	74400X020F
74131F	SBC Small Runner	1.480	.250	.100	020F	74400X020F
74132F	SBC Large Runner	1.480	.450	.100	021F	74400X021F
74144F	SBC 23° 220	1.480	.450	.100	024F	74400X024F
74145F	SBC Model #20450 Windsor	1.480	.100	.100	085F	74400X085F

DART

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74103F	SBC Pro 1 227, 23° + .250 valve	1.480	.300	.200	026F	74400X026F
74104F	SBC Pro 1 Platinum 227 + .100 valve CNC ports	1.480	.350	.175	052F	74400X052F
74112F	SBC Pro 1	1.480	.250	.100	020F	74400X020F
74111F	SBC Dart II Sportsman	1.480	.100	.100	020F	74400X020F
74112F**	SBC Dart II Sportsman	1.480	.250	.100	052F	74400X052F
74152F	SBC 230 Iron Eagle	1.450	.350	.100	052F	74400X052F
74152F**	SBC 230 Iron Eagle	1.450	.000	.000	052F	74400X052F
74113F	SBC Iron Eagle + .300 valve	1.480	.300	.200	027F	74400X027F
74127F	SBC 23° RR 40/60	1.480	.450	.100	021F	74400X021F
74117F*	SBC15°, 16°, 18° Clone LA	1.650	.550	.250	012F	74400X012F
74128F	SBC15°, 16°, 18° Clone	1.480	.550	.250	020F	74400X020F
74102F	SBC 12.5°	1.650	.550	.250	012F	74400X012F
74183B	SBC 4.500 Bore Spacing 9° Billet	1.650	.650	.250	019F	74400X019F
74184B	SBC 4.400 Bore Spacing 9° Billet	1.650	.650	.250	018F	74400X018F
*74701F	BBC Pro 1 310/325/345	1.650	.000	.000	100F Intake 101F Exhaust	74400x100F 74400x101F
*74721F	BBC Pro 1 CNC 335/355 & Pro 2 380	1.650	.100	.075	100F Intake 101F Exhaust	74400x100F 74400x101F
*74708F	BBC Race series 320-360	1.650	.000	.075	104F Intake 101F Exhaust	74400x104F 74400X101F
*74709F	BBC Big M	1.650	.000	.000	100F Intake 212F Exhaust	74400X100F 74400X212F
74156F	SB Ford Pro I CNC 225 4.155 Bore	1.450	.000	.000	085F	74400X085F

* One piece intake stand, no machine work required.

**Needle Bearing Tip Option
#73715R**



Most shaft rocker assemblies are available with optional offsets. If you don't find the offset you require, please ask about availability.

* LA = Long Arm **Optional offset
Ratios over 1.8 may require a long arm rocker arm. Arm lengths over 1.650 are available in aluminum only.

NOTE: I.D. numbers are stamped on all mounting base stands. When you are ordering your replacement base stand please reference this I.D. number to ensure you get the correct part.

**Steel Billet Rockers Coming Soon
For All Popular Applications**

Stainless Steel Shaft Mounted Rocker Systems

EDELBROCK

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74111F	SBC Performer	1.480	.100	.100	020F	74400X020F
74131F	SBC Victor Jr.	1.480	.250	.100	020F	74400X020F
74128F	SBC Victor 18°	1.480	.550	.250	020F	74400X020F
74117F	SBC Victor 18° LA	1.650	.550	.250	012F	74400X012F
*74704F	BBC RPM Performer	1.650	.100	.100	204F Intake 208F Exhaust	74400X204F 74400X208F
*74724F	BBC Victor 24°	1.650	.000	.100	216F Intake 217F Exhaust	74400X216F 74400X217F
74156F	SB Ford Victor Jr.	1.450	.000	.000	085F	74400X085F
74163F	Pontiac 326-455	1.480	.100	.100	060F	74400X060F
74165F**	Pontiac 326-455	1.480	specify	specify	060F	74400X060F

Needle Bearing Tip Option

#73715R



ETP

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74106F	LXR - LS-7 4.0 Bore		.350	.000	007F	74400X007
74108F	LS-7 4.100 Bore	1.550	.350	.000	007F	74400X007
74109F	LS-7 4.000 Bore	1.550	.350	.050	007F	74400X007

GM CASTINGS

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74101F	LS1	1.450	.000	.000	108F	74400X108F
74105F	LS3 & L92	1.450	.175	.000	105F	74400X105F
74107F	LS7 Machining Required	1.550	.350	.050	007F	74400X007F
74218F*	V6 18° LA	1.650	.550/.650	.250	006F	74400X006F
74111F	SBC Iron & Bowtie	1.480	.100	.100	020F	74400X020F
74119F	SBC Phase 6 Alum. Bowtie	1.480	.450	.100	020F	74400X020F
74128F	SBC 18°	1.480	.550	.250	020F	74400X020F
74117F*	SBC 18° LA	1.650	.550	.250	012F	74400X012F
74151F*	SBC GM LA (1.8:1 to 2:1)	1.650	.100	.100	012F	74400x012F
*74700F	BBC Iron casting	1.650	.000	.000	204F Intake 207F Exhaust	74400X204F 74400X207F
74122F*	Pontiac/SBC 15° LA	1.650	.475	.100	023F	74400x023F
74126F	Pontiac/SBC 23° 867 40/60	1.480	.250	.100	021F	74400X021F
74127F**	Pontiac/SBC 23° 867 40/60	1.480	.450	.100	021F	74400X021F
74163F	Pontiac BB 326/455	1.480	.100	.100	060F	74400X060F
74166F	Pontiac 18° #10093391	1.480	.550	.100	021F	74400X021F

Most shaft rocker assemblies are available with optional offsets. If you don't find the offset you require, please ask about availability.

* LA = Long Arm **Optional offset
Ratios over 1.8 may require a long arm rocker arm. Arm lengths over 1.650 are available in aluminum only.

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74147F	LS-7 LXR	1.550	.450	.000	007F	74400X007F
74146F	LXR LS-3 255cc 11°	1.550	.350	.050	005F	74400X005F
74160F	LXR LS-3 12° Med. Bore	1.450	.400	.150	061F	74400X061F

NOTE: I.D. numbers are stamped on all mounting base stands. When you are ordering your replacement base stand please reference this I.D. number to ensure you get the correct part.

* One piece intake stand, no machine work required.

Mast

Stainless Steel

Shaft Mounted Rocker Systems

Steel Billet Rockers Coming Soon
For All Popular Applications

RHS / PRO TOPLINE / PRO ACTION

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74116F	SBC Iron Lightning	1.480	.150	.100	020F	74400X020F
74123F	SBC 23° Iron RR	1.480	.450	.100	020F	74400X020F
74153F	SBC 23° Iron RR LA*	1.650	.450	.100	012F	74400X012F
74138F	SBC Pro Action 14°	1.650	.550	.250	016F	74400X016F
74149F	SBC Pro Action 235cc	1.450	.350	.150	052F	74400X052F
74118F	SBC 220 Motown 23°	1.480	.250	.100	020F	74400X020F
74149F	SBC Pro Topline 235cc	1.450	.350	.150	052F	74400X052F
*74720F	BBC RHS 380 CNC	1.650	.000	.000	206F Intake 220F Exhaust	74400X206F 74400X220F
74167F	SB Ford Pro Topline 215cc	1.480	.000	.075	067F	74400X067F

Pro-Comp

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
*74158F	SBC Pro-Comp PC-3003	1.480	.150	.075	052F	74400X052F
*74715F	BBC Pro-Comp	1.650	.100	.050	222F Intake 223F Exhaust	74400X222F 74400X223F

TFS

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74154F	SBC -5 18°	1.480	.550	.250	020F	74400X020F
74111F	SBC 23°	1.480	.100	.100	020F	74400X020F
74150F	LS1-1X	1.450	.100	.000	135F	74400X135F
74173F	Gen X 255 LS3	1.450	.350	.000	105F	74400X105F
74275F	SBF Ford High Port Race	1.480	.100	.075	085F	74400X085F

WORLD PRODUCTS

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
74110F	LS-7X Machining Required	1.550	.350	.050	007F	74400X007F
74111F	SBC SR Torquer	1.480	.100	.100	020F	74400X020F
74112F	SBC Sportsman II	1.480	.250	.100	020F	74400X020F
*74711F	BBC Cast Iron Merlin	1.650	.000	.000	204F Intake 207F Exhaust	74400X204F 74400X207F
*74712F	BBC Merlin III	1.650	.000	.000	214F Intake 215F Exhaust	74400X214F 74400X215F

Needle Bearing Tip Option #73715R



NOTE: I.D. numbers are stamped on all mounting base stands. When you are ordering your replacement base stand please reference this I.D. number to ensure you get the correct part.

* One piece intake stand,
no machine work required.

**Steel Billet Rockers Coming Soon
For All Popular Applications**

Stainless Steel Shaft Mounted Rocker Parts




SHAFT REPLACEMENTS

Part#	Description
74501X001	Chevrolet SB Cylinders 1,5,8,4 11/16"
74501X002	Chevrolet SB Cylinders 3,7,6,2 11/16"
74501X003	Chevrolet SB SB2 11/16"
74501X004	Pontiac 11/16"
74501X020	Chevrolet BB 11/16"
74501X001F	Chevrolet SB Cylinders 1,5,8,4 5/8"
74501X002F	Chevrolet SB Cylinders 3,7,6,2 5/8"
74501X008F	Ford 351 5/8"
74501X020F	Chevrolet BB 5/8"
74501X027F	BB Iron casting

Stainless Steel Shaft Rocker Replacement Bodies

Our replacement bodies are built to the same exacting tolerances as our shaft assemblies for true bolt-on accuracy and repeatability. They include the adjusting components, tip assembly and bearings. They are fully assembled, ready for mounting. Specify engine, head, which cylinder, intake or exhaust, ratio and offset when ordering.

#74510 Shaft Rocker Body 1 only



SHAFT SPACERS

Hardened steel spacers for proper valve stem-to-rocker tip alignment.

Part#	Description
74526X000	11/16" x 1 1/8" x Custom
74526X015	11/16" x 1 1/8" x .010 thick
74526X045	11/16" x 1 1/8" x .045 thick
74526X055	11/16" x 1 1/8" x .055 thick
74526X065	11/16" x 1 1/8" x .065 thick
74526X075	11/16" x 1 1/8" x .075 thick
74526X085	11/16" x 1 1/8" x .085 thick
74526X100	11/16" x 1 1/8" x .100 thick
74526X125	11/16" x 1 1/8" x .125 thick
74526X145	11/16" x 1 1/8" x .145 thick
74526X190	11/16" x 1 1/8" x .190 thick
74526F250	11/16" x 1 1/8" x .250 thick
74526F018	5/8" x 1 1/8" x .018 thick
74526F020	5/8" x 1 1/8" x .020 thick
74526F030	5/8" x 1 1/8" x .030 thick
74526F060	5/8" x 1 1/8" x .060 thick



Torx Head Shaft Bolts

Shaft bolt fastens rocker shaft to the mounting base stand. (5/16-24 X 1 1/4 Torx Plus)
#74524-002 1 Only



Snap Rings

Snap ring for Stainless shaft rocker assemblies. 11/16 shaft
#73714 1 only
5/8 shaft
#74529S 1 only



Stand-to-Cylinder Head Shims

Mounting base stand shimming is often required to achieve optimum rocker arm-to-valve geometry. Available in three thicknesses. Specify head when ordering

Part#	Description
74527X025	.025 Thick 1 only
74527X050	.050 Thick 1 only
74527X100	.100 Thick 1 only
74530X030	Inv. Sft. Rk. 1 only



Dowel Pin

Dowel pin for locating individual shaft rocker mounting base stands.
Part No. 74531 3/16"
Part No. 74531S 1/8"

Assembled Stainless Steel Shaft Rocker Replacements

Our mounted replacement bodies are fully assembled, ready for mounting. They include the adjusting components, tip assembly, bearings, shaft and shaft spacers. Specify which cylinder, ratio and offset when ordering.

#74503 Shaft Rocker - 1 Assembled Pair for 1 pc. stand

#74505 Shaft Rocker - 1 Assembled Rocker for individual stand

Axle Pin & Wheel Assemblies

Individual parts:
#73715P Axle pin, 1 only
#73715T261 Tip wheel, 1 only



Needle Bearings

Part#	Description
73713X001	11/16" dia. x 3/8"
74528X002	11/16" dia. x 1/2"
74528X010	5/8" dia. x 7/16"
74528X011	5/8" dia. x 1/2"

Lash Adjustment Components

#74522 3/8 lash adjuster screw, 1 only

#74523 Lash adjuster jam nut, 1 only 3/8-24 12pt

Stand Bolts

Fasteners for securing mounting base stands to cylinder head. Specify length: 3/4", 1", 1 1/4".

Part#	Description
74525X001	MOUNTING BOLT 7/16 X .750 LONG
74525X002	MOUNTING BOLT 7/16 X 1.000 LONG
74525X003	MOUNTING BOLT 7/16 X .875 LONG
74525X004	MOUNTING BOLT 7/16 X 1.250 LONG
74525X005	MOUNTING BOLT (TO HEAD) 3/8 X .750 LONG
74525X006	MOUNTING BOLT (TO HEAD) 3/8 X 1.000 LONG
74525X007	PLATE BOLT FLAT HEAD TORX PLUS 3/8-16 X 1.00
74525X007M	LS STAND BOLT FLAT HEAD TORX 8mm X 1.25



Accessories

Adjustable Pushrod Gauge

Allows you to quickly determine the precise pushrod length requirement. A must have tool for achieving optimum valve train geometry.

Part#	Description
70480	5.500" to 6.500"
70481	6.500" to 7.500"
70482	7.500" to 8.500"
70483	8.500" to 9.500"
70485	includes one of each length



Torx Drive Insert

Fits our shaft bolts.
#74307



Testing/Checking Spring

Set of 2
87601-SPR



Shaft Height Gauge kit

Clever tool makes quick work of setting optimum stand and shaft rocker height.

#74300X004 11/16" Gauge

#74300X625 5/8" Gauge

#74301F2 5/8" Shaft

#74301 11/16" Shaft



E-Z Wrench

A must have for quick rocker adjustment. 7/16 12 point wrench with 1/8 hex. Also available with 5/32 hex.
#74305-1/8"
#74305N-5/32"




Aluminum Shaft Mounted Rocker Arms

Each of our Aluminum Shaft Rocker configurations is impeccably designed and produced to maximize valve train rigidity and accuracy while offering a minimal amount of reciprocating mass.



We have utilized the longest arm lengths practical for each application. The results are minimal rocker tip travel and associated frictional losses as well as the capability to accommodate large diameter valve springs with ease.

Speaking of ease, these set-ups allow for the quickest at-the-track valve train modifications around. Any task that requires rocker removal can be performed without concern for absolute accuracy and repeatability upon reassembly.

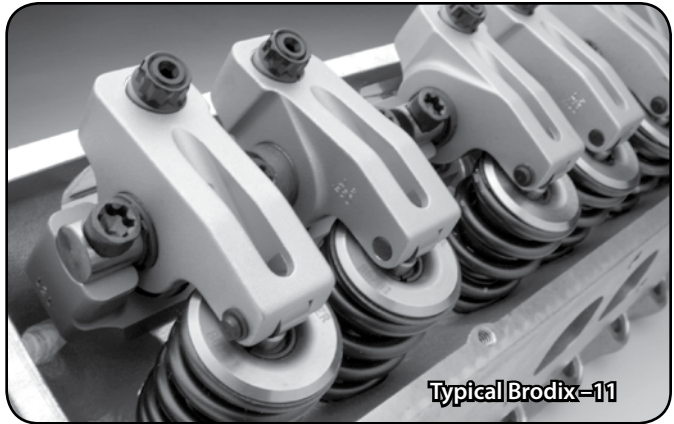


NEEDLE BEARING TIP OPTION

All Crower stud and shaft mount rocker arms are available with Crower's new needle bearing roller tip option. Results are greatly reduced friction for added horsepower and reduced valve guide and valve stem wear. The lighter tip delivers greater valve control for increased rpm and improves valve spring longevity by decreasing heat over traditional non needle designs. **Specify #72915R option for aluminum (stud or shaft) when ordering rocker arms.**

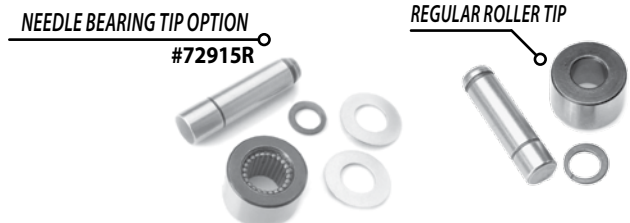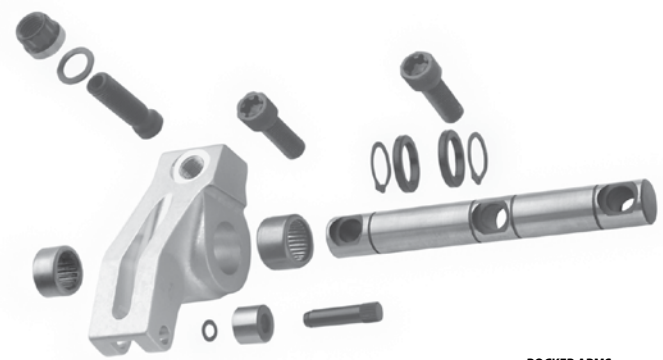

NEEDLE BEARING TIP OPTION

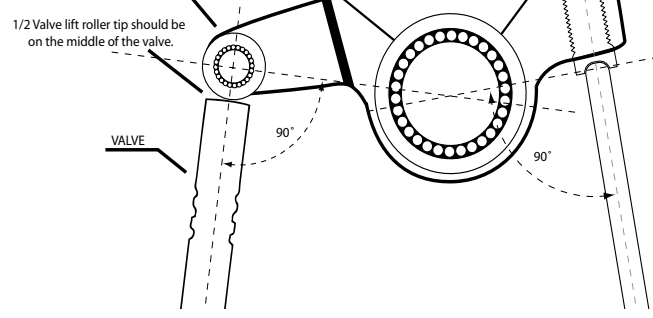


Offset Guide

- Straight
- .100" Offset Right
- .150"-.175" Offset Right
- .250" Offset Right
- .350"-.650" Offset Right




Aluminum Shaft Mounted Rocker Arms

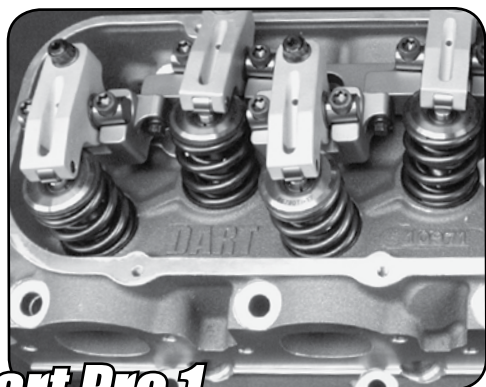


Dart-Pro-1




Brodix-BB-3 xtra

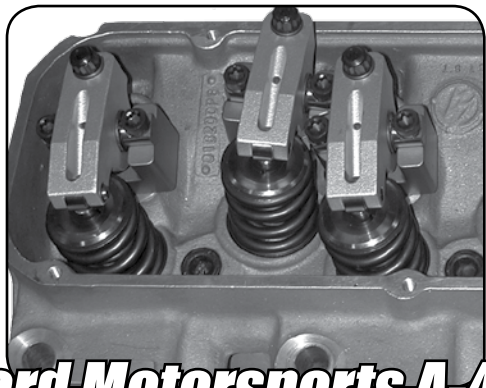

Ford-Motorsports-A-460

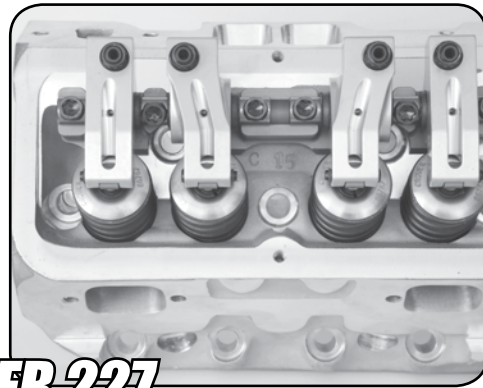

AFR-227

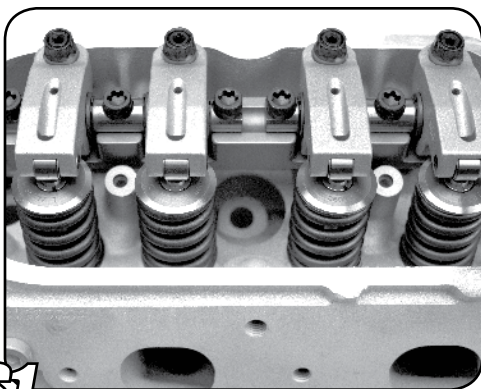

LS1

Aluminum Shaft Mounted Rocker Systems

AFR

**Needle Bearing Tip Option
#72915R**



Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75101	LS1	1.450	.100	.075	108	75101X108
75130	SBC 227 Old Style	1.520	.450	.100	125	75400X125
75131	SBC 180/210 Old Style	1.520	.250	.100	110	75400X110
75132	SBC 215 RR	1.520	.450	.100	125	75400X125
75132	SBC 180/220 Old Style	1.520	.450	.100	125	75400X125
75139	SBC 180cc thru 220cc w/L-98 bolt pattern Eliminator Street Head	1.450	.250	.100	102	75400X102
75141	SBC 227 & 235 Eliminator 60/40	1.450	.350	.100	125T	75400X125T
*75707	BBC 335/345 - 357	1.650	.100	.000	310 int 311exh	75400X310 75400X311
75140	SB Ford 165cc - 225cc	1.520	.000	.000	008	75400X008

ALL PRO

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75134	23° 40/60	1.520	.450	.100	121	75400X121
75135	17°	1.620	.450	.175	113	75400X113
75168	13° 272/280 Ultra Series	1.650	.550	.150	123	75400X123

BRODIX

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75116	SBC Track I	1.450	.150	.100	114	75400X114
75116	SBC Irwindale Spec	1.450	.150	.100	114	75400X114
75126	SBC Track 1 x 40/60	1.520	.250	.100	121	75400X121
75112	SBC -8 through -11	1.450	.250	.100	114	75400X114
75112L	SBC -8 through -11 Ratio over 1.75	1.520	.250	.100	114	75400X114
75126	SBC 10x 11x 40/60 & ASCS	1.520	.250	.100	121	75400X121
75127**	SBC 10x 11x 40/60 & ASCS	1.520	.450	.100	121	75400X121
75121	SBC BD1010	1.650	.700	.000	157	75400X157
75122*	SBC -12 & LA	1.650	.500	.100	123	75400X123
75136	SBC 12X12	1.650	.550	.100	123	75400X123
75124*	SBC 12X12RP LA	1.650	.550	.100	123	75400X123
75137**	SBC 12X12RP XLA	1.750	.650	.100	119	75400X119
75129	SBC 18° Clone	1.520	.550	.250	121	75400X121
75125*	SBC 18° Clone LA	1.650	.550	.250	113	75400X113
75126	SBC 18x 40/60	1.520	.250	.100	121	75400X121
75142	SBC GB-2200 13.5°	1.650	.650	.150	123	75400X123
75168	SBC GB-2300 & GB-2000 Billet	1.650	.750	.250	123	75400X123
75000	BBC Special Order	.000	.000	.000	000	000
*75702	BBC BB-2X, BB-2xtra, BB3	1.650	.100	.000	302 Int. 305 Exh.	75400X302 75400X305
*75703	BBC BB-3 xtra	1.480	.100	.000	306 Int. 307 Exh.	75400X306 75400X307
*75704	BBC BB-1, BB-2, BB-2plus / Race Rite	1.650	.100	.000	304 Int. 308 Exh.	75400X304 75400X308
75012	BBC Big Duke 18° PB1800 & PB1802 (individual stand)	Int. 1.650 Exh. 1.850	.600/1.300	.000	381IW Int. 381I Int. 381E Exh.	75400X381IW 75400X381I 75400X381E +.100
75015	BBC Big Duke PB1803 18° (individual stand)	Int. 1.650 Exh. 1.850	1.150/600	.000	382IW Int. 382I Int. 382E Exh.	75400X381IW 75400X381I 75400X381E +.100
75016	BBC Big Duke 18° (KC 1600) (individual stand)	1.850	1.300/600	.000	382IW Int. 382I Int. 382E Exh.	75400X382IW 75400X382I 75400X382E

*** One piece intake stand, no machine work required.**

Most shaft rocker assemblies are available with optional offsets. If you don't find the offset you require, please ask about availability.

*LA = Long Arm **Optional offset

Ratios over 1.8 may require a long arm rocker arm.

Arm lengths over 1.650 are available in aluminum only.

Aluminum Shaft Mounted Rocker Systems

CANFIELD

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75111	23° 400 SBC	1.450	.100	.100	114	75400X114
75131	Small Runner SBC	1.520	.250	.100	110	75400X110
75132	Large Runner SBC	1.520	.450	.100	125	75400X125
75144	23° 220 SBC	1.480	.450	.100	124	75400X124

Needle Bearing Tip Option

#72915R



DART

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75103	S.B. Chev. Pro 1 227 23°	1.480	.300	.200	326	75400X114
75181	SBC Platinum Series	1.450	.250	.100	120	75400X120
75112**	SBC Pro 1	1.450	.250	.100	114	75400X114
75112L	SBC Pro 1 Ratio over 1.75	1.520	.250	.100	114	75400X114
75111	SBC Dart II Sportsman	1.450	.100	.100	114	75400X114
75112**	SBC Dart II Sportsman	1.450	.250	.100	114	75400X114
75112L	SBC Dart II Sportsman Ratio over 1.75	1.520	.250	.100	114	75400X114
75111	SBC 230 Iron Eagle	1.450	.100	.100	114	75400X114
75112**	SBC 230 Iron Eagle	1.450	.250	.100	114	75400X114
75112L	SBC 230 Iron Eagle Ratio over 1.75	1.520	.250	.100	114	75400X114
75127	SBC 23° RR 40/60	1.520	.450	.100	121	75400X121
75128	SBC 18° Clone	1.520	.550	.250	120	75400X120
75117*	SBC 18° Clone LA	1.650	.550	.250	111	75400X111
75007	BBC Big Chief/14° Early Style (individual stand)	1.650	1.300/.600	.000	3815e Exh. 3815i Int. 3815iw Int.	75400X3815e 75400x3815i 75400x3815iw
75001	BBC Big Chief/18° (individual stand)	1.650	1.300/.600	.000	381e Exh. 381i Int. 381iw Int.	75400X381e 75400x381i 75400x381iw
*75701	BBC Pro 1	1.650	.100	.075	300 Int. 301 Exh.	75400X300 75400x301
*75708	BBC Race Series 320-360	1.650	.000	.075	300 Int. 301 Exh.	75400X300 75400x301
*75709	BBC Big "M"	1.650	.000	.000	300 Int. 312 Exh.	75400X300 75400x312
*75710	BBC Race Series 18° oval	1.850	.150/.100	.000	196 Int. 197 Exh.	75400X196 75400x197

DODGE

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75170	Viper (2002-prior) Gen 1 & 2	1.450	.150	.150	190	75400X190
75171	Viper (2003-up) Gen 3	1.450	.100	.000	191	75400X191
75172	Viper (2003-up) JM-Striker	1.450	.350	.000	195	75400X195
90720-2	Billet aluminum spacer kit					

*** One piece intake stand, no machine work required.**

Most shaft rocker assemblies are available with optional offsets. If you don't find the offset you require, please ask about availability.

*LA = Long Arm **Optional offset
Ratios over 1.8 may require a long arm rocker arm. Arm lengths over 1.650 are available in aluminum only.

Aluminum Shaft Mounted Rocker Systems

EDELBROCK

Needle Bearing Tip Option

#72915R



Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75131	SBC Victor Jr	1.520	.250	.100	110	75400X110
75111	SBC Performer	1.450	.100	.100	114	74500X114
75128	SBC Victor 18°	1.520	.550	.250	120	75400X120
75118*	SBC Victor 18° LA	1.650	.550	.250	111	75400X111
75155	SBC Victor 23° High Port				121	75400X121
75283	302/351 Ford Victor Jr. SBF	1.450	.000	.000	156	75400X156
75282	Ford V-351 Edelbrock SBF	1.520	.500	.000	152	75400X152
75163	Pontiac BB 326-455	1.520	.100	.100	160	75400X160
75165**	Pontiac BB 326-455	1.520	specify	specify	160	75400X160

FORD & SVO

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75283	SB Ford 302/351 Stock Production	1.475	.000	.000	150	75400X150
75280	Ford 351-N (SVO) SB Ford	1.475	.150	.150	150	75400X150
75284	Z-304 SB Ford	1.575	.220	.000	158	75400X158
75281	351C SB Ford	1.650	.475	.050	194	75400X194
75087	C460 1pc. stand BB Ford	1.650 Int. 1.750 Exh.	.100	1.000	155	75400X155
75287	351 Ford Irwindale Spec	1.475	.000	.000	150	75400X150
75788	BB Eliminator by IDT	1.600	.000	.000	188T Int. 189T Exh.	75400X188T 75400X189T
75789	A-460 Ford Motorsports BB Ford (individual stand)	1.600	.000	.000	188 Int. 189 Exh.	75400X188 75400X189

GM CASTINGS

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75218	V6 18° LA	1.650	.550/.650	.250	106	75400X106
75101	LS1/LS6 - Gen III	1.450	.000	.000	108	74500X108
75111	SBC Iron & Bowtie	1.450	.100	.100	114	75400X114
75116	SBC Iron & Bowtie	1.450	.150	.100	114	75400X114
75119	SBC Phase 6 Alum. Bowtie	1.520	.250	.100	110	75400X110
75128	SBC 18°	1.520	.550	.250	120	75400X120
75117*	SBC 18° LA	1.650	.550	.250	111	75400X111
75115	SBC 2-2 18° 1pc. stand	1.650	.150	.150	130	75400X130
75120	SBC 2-2 Head & Block	specify	specify	specify	131	75400X131
75122	Pontiac/SBC 15° LA	1.650	.500	.100	123	75400X123
75162	Pontiac/SBC 40/60	-	-	-	110	75400X110
75126	Pontiac/SBC 23° 867 40/60	1.520	.250	.100	120	75400X120
75127**	Pontiac/SBC 23° 867 40/60	1.520	.450	.100	120	75400X120
75163	Pontiac BB 326/455	1.520	.100	.100	160	75400X160
*75700	BBC Iron Casting #2990	1.650	.000	.000	304 Int. 307 Exh.	75400X304 75400X307

* One piece intake stand, no machine work required.

Most shaft rocker assemblies are available with optional offsets. If you don't find the offset you require, please ask about availability.

*LA = Long Arm **Optional offset

Ratios over 1.8 may require a long arm rocker arm.

Arm lengths over 1.650 are available in aluminum only.

Aluminum Shaft Mounted Rocker Systems

IDT

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75788	BBF Eliminator	1.600	.000	.000	188t Int. 189t Exh.	75400X188t 75400X189t

Needle Bearing Tip Option #72915R



RHS / PRO TOPLINE / PRO ACTION

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75116	SBC Iron Lightning & 23°	1.450	.150	.100	114	75400X114
75123	SBC 23° Iron RR	1.520	.450	.100	110	75400X110
75153*	SBC 23° Iron RR LA	1.650	.450	.100	111	75400X111
75138	SBC 14°	1.650	.550	.250	116	75400X116
75113	SBC 220 Motown Hard Core	-	-	-	125	75400X125
75118	SBC Pro Action 220 Motown 23°	1.520	.550	.250	120	75400X120

TFS

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75154	SBC -5 18°	1.520	.550	.250	110	75400X110
75112	SBC 23°	1.450	.250	.100	114	75400X114
75750	BBF A-460	1.650	.075	.000	320 Int. 320 Exh.	75400X320i 75400X320e

* One piece intake stand, no machine work required.

Most shaft rocker assemblies are available with optional offsets. If you don't find the offset you require, please ask about availability.


*LA = Long Arm **Optional offset

Ratios over 1.8 may require a long arm rocker arm. Arm lengths over 1.650 are available in aluminum only.

WORLD PRODUCTS

Part#	Description	Arm Length	Intake Offset	Exhaust Offset	Stand I.D. #	Stand Part #
75111	SBC SR TorqueT	1.450	.100	.100	114	75400X114
75112	SBC Sportsman II	1.450	.250	.100	114	75400X114
75157	SB Ford Manowar 285cc 10° 02315	1.575	.350	.100	103	75400X103

Aluminum Shaft Mounted Rocker Parts



Shaft Replacements

Part#	Description
75501X001	Chevrolet SB Cylinders 1,5,8,4
75501X002	Chevrolet SB Cylinders 3,7,6,2
75501X003	Chevrolet SB SB2 1.6 Bolt Centers
75501X004	Pontiac
75501X005	Ford 351N
75501X006	Ford 302 & Windsor
75501X007	Ford Victor 351
75501X020	Chevrolet BB, Ford 460, Olds & Big Duke Exh.
75501X021	Olds 14"/ Big Duke .6 intake offset
75501X022	Olds 14"/ Big Duke 1.3 intake offset

Aluminum Shaft Rocker Replacement Bodies

Our replacement bodies are built to the same exacting tolerances as our shaft assemblies for true bolt-on accuracy and repeatability. They include the adjusting components, tip assembly and bearings. They are fully assembled, ready for mounting. Specify engine, head, which cylinder, intake or exhaust, ratio and offset when ordering.



Axle Pin & Wheel Assemblies

Individual parts:
#75520C Rotor Clip, 1 only
#72915P Axle pin, 1 only
#72915T Tip wheel, 1 only



Lash Adjustment Components

#75522 Lash adjuster screw, 1 only
#74523 Lash adjuster jam nut, 1 only
#75523W Jam nut washer, 1 only



Torx Head Shaft Bolts

Shaft bolt fastens rocker shaft to the mounting base stand. (5/16-24 X 1" 12 Pt)
#74524-001 1 Only



Needle Bearings

#75528X001 9/16" dia. x 3/8"
#75528X002 9/16" dia. x 1/2"



Stand Bolts

Fasteners for securing mounting base stands to cylinder head. Specify length: 3/4", 1", 1 1/4".



Stand-to-Cylinder Head Shims

Mounting base stand shimming is often required to achieve optimum rocker arm-to-valve geometry. Available in three thicknesses. Specify head when ordering.

Part#	Description
Chevrolet	
74527X025	SBC .025 Thick 1 only
74527X050	SBC .050 Thick 1 only
74527X100	SBC .100 Thick 1 only
74530X045	.045 BBC 1 pc Stand Inv. Sft. Rk. 1 only
Ford & Pontiac	
74521X024	.024 Thick 1 only
74521X050	.050 Thick 1 only
74521X100	.100 Thick 1 only

Part#	Dia.	Length
74525X001	7/16"	.7500"
74525X002	7/16"	1.0000"
74525X004	7/16"	1.2500"
74525X005	3/8"	.7500"
74525X006	3/8"	1.000"
74525X003	7/16"	.8750"

Shaft Spacers for Aluminum Shaft Rockers

Part#	Description
75526X000	9/16 x 3/4 x Custom
75526X030	9/16 x 3/4 x .030 thick
75526X050	9/16 x 3/4 x .050 thick
75526X060	9/16 x 3/4 x .060 thick
75526X085	9/16 x 3/4 x .085 thick
75526X100	9/16 x 3/4 x .100 thick
75526X105	9/16 x 3/4 x .105 thick
75526X290	9/16 x 3/4 x .290 thick
75526X395	9/16 x 3/4 x .395 thick

Assembled Aluminum Shaft Rocker Replacements

Our assembled replacement bodies are fully complete, ready for mounting. They include the adjusting components, tip assembly, bearings, shaft and shaft spacers. Specify which cylinder, ratio and offset when ordering.
#75503 Shaft Rocker – 1 Assembled Pair for 1 pc. stand
#75505 Shaft Rocker – 1 Assembled Rocker for individual stand



Adjustable Pushrod Gauge

Allows you to quickly determine the precise pushrod length requirement. A must have tool for achieving optimum valve train geometry.

Part#	Description
70480	5.500" to 6.500"
70481	6.500" to 7.500"
70482	7.500" to 8.500"
70483	8.500" to 9.500"
70485	includes one of each length



Accessories

E-Z Wrench

A must have for quick rocker adjustment. 7/16 12 point wrench with 1/8 hex. Also available with 5/32 hex.

#74305 - 1/8"
#74305N - 5/32"



Torx Drive INSERT

Fits our shaft bolts. 3/8" drive
#74307



Mounting Kit

Kit for individual mounting base stand shaft rocker systems.

#74308 Includes: 1-jig, 1-3/16" drill, 1-Drill stop, 1-Hold down bolt, 32 #74530 shims, 32 #74531 dowel pins
#74309 Includes: 1-jig, 1-1/8" drill, 1-Drill stop, 1-Hold down bolt, 32 #74530 shims, 32 #74531S dowel pins


Testing/Checking Spring

Set of 2
87601-SPR



Shaft Height Gauge kit


Clever tool makes quick work of setting optimum stand and shaft rocker height.
#75300X004 Shaft
#75301 Gauge



Installation Instructions

Guage Instructions & Torque Specs

While securing valve seat, place guage on valve shown. Raise or lower rocker stand until guages makes contact with setup shaft supplied.

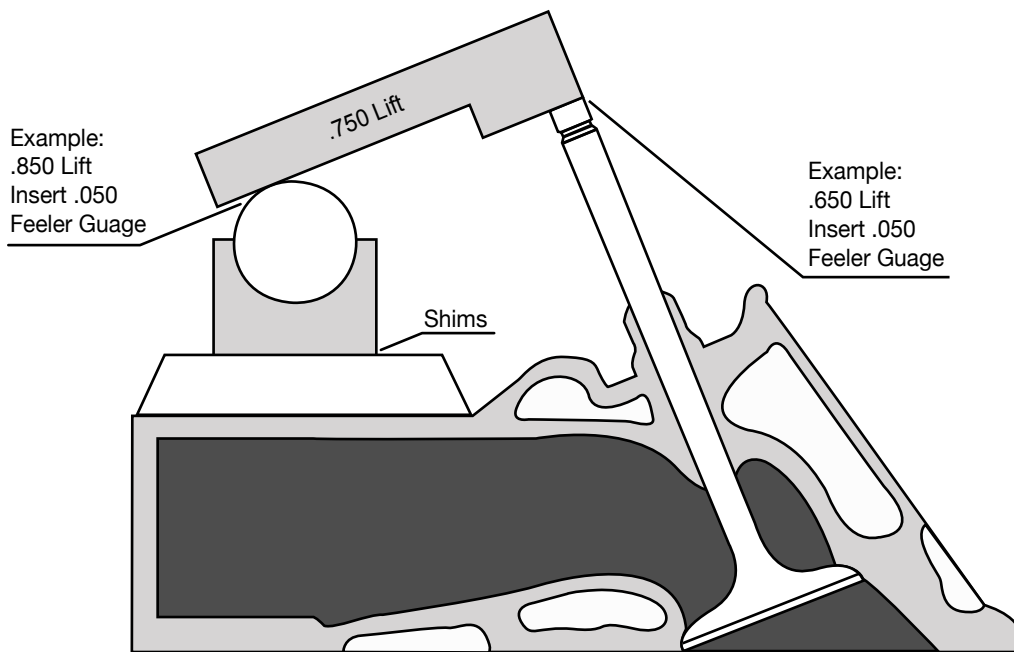

Shaft Bolt Torque Specs:	
5/16 - 24	25 ft lbs. with oil 28 ft lbs.
Stand Bolts:	
7/16 - 20	55 ft lbs. with thread inserts. Without inserts use head manufacturer torque specs. Use thread sealant.
1/4 - 20	5 - 10 ft lbs.
3/8 - 16	35 ft lbs.
Bracket to Head:	
8 mm	25 ft lbs. with oil 28 ft lbs.

Note: The shaft height guage supplied with this assembly is manufactured for 0.750" of valve lift. For lifts less than 0.750", the shaft height should be raised by half the difference. For lifts greater than 0.750" lift, the shaft height should be lowered by half the difference. See Example

Please visit www.crower.com, or call Crower for any further installation questions.


Installation Instructions

LS-7 STOCK GM ALUMINUM HEAD

Machine work required for stainless steel shaft mounted rocker system.


You must machine down original GM rocker pedestal at 7° degree angle same as hold down bolt, cut pad area only (do not cut across the intake port), machine pedestal down .500 from bottom of radius in stock pedestal as shown in Fig.1. Using gage provided check rocker stand height as shown in Fig. 2.

Note: This number .500 was determined using stock length valves and .750 lift. If you use different length valves and different lift you must adjust accordingly. Now drill and tap 8mm x 1.25, hold down bolts as deep as possible. Use caution not to drill into intake port If you do use thread sealant on bolts.

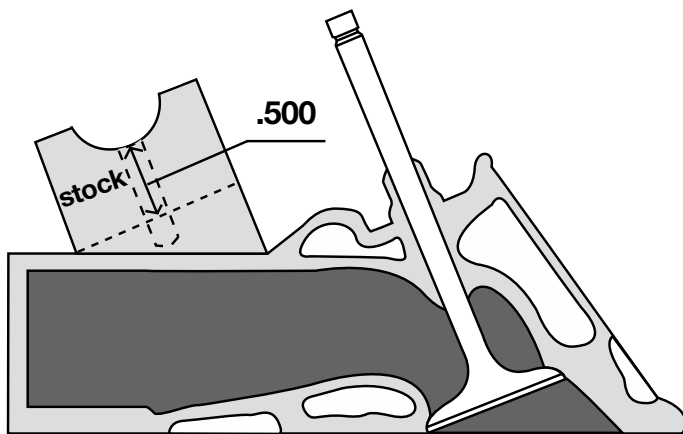

MACHINE WORK REQUIRED.

Figure. 1

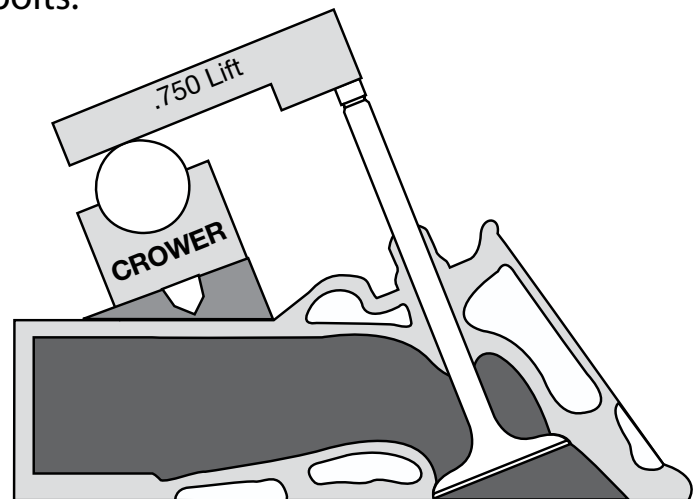

MACHINE WORK REQUIRED.

Figure. 2

Shaft Bolt Torque Specs:	
5/16 - 24	25 ft lbs. with oil
	28 ft lbs.
Stand Bolts:	
8 mm	25 ft lbs. thread sealant
	28 ft lbs.

While securing valve seat, place gauge on valve as shown.

Raise or lower rocker stand until gauge makes contact with setup shaft supplied.

Note: The shaft height gauge supplied with this assembly is manufactured for 0.750" of valve lift. For lifts less than 0.750", the shaft height should be raised by half the difference. For lifts greater than 0.750" lift, the shaft height should be lowered by half the difference. See Example on pg 20

Please visit www.crower.com, or call Crower for any further installation questions.

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

Valve Springs

NEW / HIGH RPM

VALVE SPRING

O.D./I.D. Outer	.885/.610	.890/.620	1.080/.720	.940/.580(top)	1.130/.650(top)	1.045/.745
O.D./I.D. Middle	-	-	-	1.110/.745(bottom)	1.120/.750(bottom)	-
O.D./I.D. Inner	-	-	-	-	-	-
Installed Height	1.975	1.350	1.420	1.470	1.650	1.400
Rate	212	120	330	321	230	251
Part #	68180	68160	68194	68194X2	68193	68195
Type	Single	Single	Single	Single	Single	Single
Color Code	None	None	None	None	None	None
Damper	No	No	No	No	No	No
Free Length	2.310	1.825	1.650	1.775	2.330	1.690
Wire Diameter	.140	.134	.181/.144 (ovate)	.144X.175 (ovate)	.146/.148 (ovate)	.146
Material	Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
2.300	-	-	-	-	-	-
2.250	-	-	-	-	-	-
2.200	-	-	-	-	-	-
2.150	-	-	-	-	-	-
2.100	-	-	-	-	-	-
2.050	-	-	-	-	-	-
2.000	53 lbs	-	-	-	-	-
1.950	63 lbs	-	-	-	-	-
1.900	72 lbs	-	-	-	-	-
1.850	82 lbs	-	-	-	-	-
1.800	92 lbs	-	-	-	103 lbs	-
1.750	104 lbs	-	-	-	114 lbs	-
1.720	-	-	-	-	124 lbs	-
1.700	113lbs	-	-	-	128 lbs	-
1.650	123 lbs	-	-	-	134 lbs	-
1.600	133 lbs	-	-	-	150 lbs	-
1.550	144 lbs	-	-	-	153 lbs	-
1.500	154 lbs	-	-	77 lbs	171 lbs	42 lbs
1.450	165 lbs	-	-	-	-	54 lbs
1.420	-	-	-	103 lbs	-	-
1.400	175 lbs	34 lbs	82 lbs	108 lbs	195 lbs	66 lbs
1.350	-	39 lbs	98 lbs	122 lbs	197 lbs	79 lbs
1.300	-	46 lbs	114 lbs	137 lbs	217 lbs	90 lbs
1.250	-	51 lbs	131 lbs	154 lbs	220 lbs	104 lbs
1.200	-	56 lbs	148 lbs	169 lbs	240 lbs	115 lbs
1.150	-	62 lbs	165 lbs	187 lbs	244 lbs	126 lbs
1.100	-	68 lbs	181 lbs	202 lbs	257 lbs	139 lbs
1.050	-	74 lbs	198 lbs	220 lbs	276 lbs	149 lbs
1.000	-	81 lbs	214 lbs	238 lbs	-	161 lbs
0.950	-	87 lbs	230 lbs	256 lbs	-	174 lbs
Coil Bind	1.320	0.815	.806	.870	1.035	0.860
RETAINERS	87096 (5.5mm)	87086 (5.5mm)	87026 (7mm)	87020	87024 (7mm steel)	87085 (6mm)
	-	-	87026T (7mm)	87020T	87024T	87082 (6mm)
	-	-	-	-	87025 +.060 tit.	-
	-	-	-	-	87023 3 valve	-
	-	-	-	-	87023T 3 valve	-

Valve Springs

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

O.D./I.D. Outer	1.050/.635 (top)	1.105/.820	1.105/.820	1.090/.780	1.160/.840	1.160/.870
O.D./I.D. Middle	1.210/.815 (bottom)	-	-	-	-	-
O.D./I.D. Inner	-	.800/.627	.811/.608	-	-	.860/.660
Installed Height	1.800	1.350	1.350	1.550	1.550	1.590
Rate	348	234	314	289	245	353
Part #	68435	68181	68182	68190	68183	68189
Type	Single	Dual	Dual	Single	Single	Dual
Color Code	None	Orange	Orange	None	Purple	Yellow
Damper	No	No	No	No	No	No
Free Length	2.238	1.635	1.635	1.820	1.920	2.015
Wire Diameter	.171/ .199 (ovate)	.140/.085	.140/.104	.160	.161	.149/.104
Material	Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
2.350	-	-	-	-	-	-
2.300	-	-	-	-	-	-
2.250	-	-	-	-	-	-
2.200	-	-	-	-	-	-
2.150	-	-	-	-	-	-
2.100	-	-	-	-	-	-
2.050	-	-	-	-	-	-
2.000	60 lbs	-	-	-	-	-
1.950	78 lbs	-	-	-	-	-
1.900	93 lbs	-	-	-	-	-
1.850	110 lbs	-	-	-	-	-
1.800	125 lbs	-	-	-	-	-
1.750	143 lbs	-	-	-	-	-
1.700	159 lbs	-	-	-	-	-
1.650	175 lbs	-	-	42 lbs	-	65 lbs
1.600	193 lbs	-	-	55 lbs	-	81 lbs
1.550	210 lbs	-	28 lbs	74 lbs	73 lbs	96 lbs
1.500	228 lbs	-	42 lbs	88 lbs	84 lbs	112 lbs
1.450	246 lbs	36 lbs	56 lbs	101 lbs	95 lbs	127 lbs
1.400	265 lbs	48 lbs	70 lbs	111 lbs	107 lbs	144 lbs
1.350	284 lbs	56 lbs	84 lbs	122 lbs	119 lbs	159 lbs
1.300	302 lbs	70 lbs	98 lbs	135 lbs	130 lbs	178 lbs
1.250	322 lbs	83 lbs	113 lbs	149 lbs	141 lbs	198 lbs
1.200	342 lbs	95 lbs	127 lbs	163 lbs	152 lbs	218 lbs
1.150	-	106 lbs	141 lbs	177 lbs	166 lbs	238 lbs
1.100	-	118 lbs	155 lbs	195 lbs	177 lbs	261 lbs
1.050	-	129 lbs	169 lbs	211 lbs	191 lbs	-
1.000	-	139 lbs	185 lbs	231 lbs	205 lbs	-
0.950	-	148 lbs	202 lbs	-	-	-
Coil Bind	1.095	0.710	0.800	0.920	0.895	1.030
7° Titanium Retainer	-	87092 (6.5mm)	87092 (6.5mm)	87095 (6.5mm)	87097 (6mm)	87094 (5.5mm)
7° Titanium Retainer	-	-	-	-	-	-
7° Titanium Ret 3/8	-	-	-	-	-	-
Titanium Ret 10°	-	-	-	-	-	-
Titanium Super 7°	-	-	-	-	-	-
7° Steel Retainer 5/16	-	-	-	-	-	-
7° Steel Retainer 11/32	-	-	-	-	-	-
7° Steel Retainer 3/8	-	-	-	-	-	-
Steel Retainer 10°	-	-	-	-	-	-
Seat Cup	-	-	-	-	-	-
Seat Disc	-	Stock .108 step inner	Stock .108 step inner	-	-	-
Seat Disc	-	-	-	-	87023T 3 valve	-

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

Valve Springs

O.D./I.D. Outer	1.160/.870	1.175/.875	1.180/.880	1.220/.915	1.055/.650 (top)	1.250/.940
O.D./I.D. Middle	-	-	-	-	1.250/.845 (bottom)	-
O.D./I.D. Inner	.865/.660	.820/.628	.870/.670	.915/.704	-	.910/.680
Installed Height	1.460	1.350	1.350	1.350	1.750	1.650
Rate	250	295	309	330	349	285
Part #	68184	68185	68188	68411	68155	68106X208
Type	Dual	Dual	Dual	Dual	Single Conical	Dual
Color Code	Red	None	Red/White	Blue	None	None
Damper	No	No	No	No	No	No
Free Length	1.815	1.580	1.580	1.600	2.069	2.225
Wire Diameter	.148/.098	.146/.096	.154/.099	.154/.110	.167/.202 (ovate)	.155/.112
Material	Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
2.350	-	-	-	-	-	-
2.300	-	-	-	-	-	-
2.250	-	-	-	-	-	-
2.200	-	-	-	-	-	-
2.150	-	-	-	-	-	-
2.100	-	-	-	-	-	-
2.050	-	-	-	-	-	-
2.000	-	-	-	-	-	-
1.950	-	-	-	-	-	-
1.900	-	-	-	-	-	-
1.850	-	-	-	-	-	-
1.800	-	-	-	-	-	-
1.750	-	-	-	-	113 lbs	102 lbs
1.700	-	-	-	-	128 lbs	118 lbs
1.650	44 lbs	-	-	-	142 lbs	130 lbs
1.600	55 lbs	-	-	-	159 lbs	145 lbs
1.550	68 lbs	-	-	-	174 lbs	158 lbs
1.500	78 lbs	-	-	-	193 lbs	172 lbs
1.450	91 lbs	28 lbs	-	-	210 lbs	186 lbs
1.400	101 lbs	38 lbs	68 lbs	60 lbs	228 lbs	199 lbs
1.350	113 lbs	49 lbs	82 lbs	76 lbs	247 lbs	213 lbs
1.300	122 lbs	60 lbs	97 lbs	92 lbs	266 lbs	226 lbs
1.250	139 lbs	74 lbs	111 lbs	107 lbs	285 lbs	240 lbs
1.200	153 lbs	89 lbs	125 lbs	123 lbs	302 lbs	253 lbs
1.150	167 lbs	103 lbs	140 lbs	139 lbs	-	269 lbs
1.100	180 lbs	115 lbs	155 lbs	154 lbs	-	286 lbs
1.050	193 lbs	136 lbs	170 lbs	167 lbs	-	302 lbs
1.000	205 lbs	152 lbs	183 lbs	180 lbs	-	317 lbs
0.950	220 lbs	167 lbs	202 lbs	200 lbs	-	-
Coil Bind	0.790	0.805	0.765	0.740	1.100	0.910
7° Titanium Retainer	87093D (+.060")	87093 (5.5mm)	87093 (5.5mm)	86046	87018T	86046
7° Titanium Retainer	-	-	-	-	87029T	-
7° Titanium Ret 3/8	-	-	-	-	-	-
Titanium Ret 10°	-	-	-	-	-	-
Titanium Super 7°	-	-	-	-	-	-
7° Steel Retainer 5/16	-	-	-	87046	87028	87046
7° Steel Retainer 11/32	-	-	-	87011 (5°)	87029	86032
7° Steel Retainer 3/8	-	-	-	-	-	-
Steel Retainer 10°	-	-	-	-	-	-
Seat Cup	-	Stock .080 step inner	-	-	-	-
Seat Disc	Stock .080 step inner	Stock .108 step inner	Stock .080 step inner	-	-	68939 or 68941

Valve Springs

VALVE SPRING SPECIFICATIONS – Listed According to O.D.

O.D./I.D. Outer	1.250/.890	1.255/.865	1.255/.890	1.260/.880	1.265/.895	1.270/.890	1.275/.925
O.D./I.D. Middle	-	-	-	-	-	-	-
O.D./I.D. Inner	-	-	-	-	-	-	.913/.685
Installed Height	1.700	1.750	1.700	1.800	1.750	1.750	1.600
Rate	330	522	378	390	407	477	388
Part #	68301X3	68311X1	68301X1	68304	68301	68311	68109X1
Type	Single	Single	Single	Single	Single	Single	Dual
Color Code	None	None	None	None	None	None	Orange/Yellow
Damper	Yes	Yes	Yes	Yes	Yes	Yes	No
Free Length	2.050	1.995	1.980	2.100	2.020	2.030	1.830
Wire Diameter	.182	0.198	0.185	0.190	0.192	.193	.175/.118
Material	Silicone	Super Clean Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
2.350	-	-	-	-	-	-	-
2.300	-	-	-	-	-	-	-
2.250	-	-	-	-	-	-	-
2.200	-	-	-	-	-	-	-
2.150	-	-	-	-	-	-	-
2.100	-	-	-	-	-	-	-
2.050	-	-	-	-	-	-	-
2.000	-	-	-	-	-	-	-
1.950	-	-	-	-	-	-	-
1.900	-	73 lbs	-	-	-	-	-
1.850	-	97 lbs	-	88 lbs	-	-	-
1.800	76 lbs	120 lbs	70 lbs	106 lbs	-	75 lbs	-
1.750	90 lbs	146 lbs	88 lbs	124 lbs	96 lbs	99 lbs	-
1.700	104 lbs	169 lbs	105 lbs	141 lbs	114 lbs	121 lbs	58 lbs
1.650	117 lbs	194 lbs	123 lbs	159 lbs	130 lbs	141 lbs	77 lbs
1.600	131 lbs	220 lbs	140 lbs	176 lbs	149 lbs	163 lbs	95 lbs
1.550	146 lbs	246 lbs	157 lbs	195 lbs	169 lbs	186 lbs	113 lbs
1.500	160 lbs	274 lbs	174 lbs	210 lbs	188 lbs	209 lbs	130 lbs
1.450	174 lbs	302 lbs	192 lbs	231 lbs	207 lbs	235 lbs	148 lbs
1.400	196 lbs	331 lbs	210 lbs	250 lbs	229 lbs	255 lbs	166 lbs
1.350	210 lbs	359 lbs	230 lbs	271 lbs	252 lbs	279 lbs	183 lbs
1.300	230 lbs	389 lbs	252 lbs	295 lbs	274 lbs	302 lbs	202 lbs
1.250	247 lbs	424 lbs	274 lbs	317 lbs	299 lbs	326 lbs	222 lbs
1.200	269 lbs	459 lbs	297 lbs	345 lbs	-	353 lbs	240 lbs
1.150	-	-	-	-	-	380 lbs	261 lbs
1.100	-	-	-	-	-	407 lbs	281 lbs
1.050	-	-	-	-	-	440 lbs	302 lbs
1.000	-	-	-	-	-	-	323 lbs
0.950	-	1.070	-	-	-	-	-
Coil Bind	1.125	86037T	1.130	1.090	1.170	0.990	0.955
7° Titanium Retainer	86037T	86031	86037T	86037T	86037T	86037T	86046
7° Titanium Retainer	86031	-	86031	86031	86031	86031	-
7° Titanium Ret 3/8	-	-	-	-	-	-	-
Titanium Ret 10°	-	-	-	-	-	-	-
Titanium Super 7°	-	86037	-	-	-	-	-
7° Steel Retainer 5/16	86037	86032	86037	86037	86037	86037	87046
7° Steel Retainer 11/32	86032	-	86032	86032	86032	86032	-
7° Steel Retainer 3/8	-	-	-	-	-	-	-
Steel Retainer 10°	-	-	-	-	-	-	-
Seat Cup	-	-	-	-	-	-	-
Seat Disc	-	Stock .108 step inner	-	-	-	-	68939 or 68941

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

Valve Springs

O.D./I.D. Outer	1.290/.950	1.050/.650 (top)	1.300/.900	1.360/1.000	1.354/.940	1.385/1.060	1.400/1.045
O.D./I.D. Middle	-	1.290/.885 (bottom)	-	-	-	-	-
O.D./I.D. Inner	.945/.670	-	.885/.650	-	-	1.050/.800	1.040/.770
Installed Height	1.800	1.750	1.800	1.550	1.850	1.650	1.700
Rate	371	308	404	228	415	258	382
Part #	68157	68878	68156	68147	68143	68324	68405
Type	Dual	Single Conical	Dual	Single	Single	Dual	Dual
Color Code	None	Blue	None	None	None	Orange/Green	Orange/White
Damper	No	No	No	No	Yes	No	No
Free Length	2.280	2.290	2.150	1.925	2.075	2.150	1.975
Wire Diameter	.172/.134	.168/.200	.167/.119	0.177	.208	.160/.127	.176/.133
Material	Silicone	Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
2.350	-	-	-	-	-	-	-
2.300	-	-	-	-	-	-	-
2.250	-	-	-	-	-	-	-
2.200	-	-	-	-	-	-	-
2.150	-	-	-	-	-	-	-
2.100	-	-	-	-	-	-	-
2.050	-	-	-	-	-	-	-
2.000	-	-	-	-	-	-	-
1.950	-	-	-	-	-	-	-
1.900	-	-	-	-	72 lbs	-	-
1.850	128 lbs	-	110 lbs	-	92 lbs	-	-
1.800	144 lbs	132 lbs	128 lbs	-	113 lbs	-	76 lbs
1.750	161 lbs	146 lbs	146 lbs	-	134 lbs	86 lbs	92 lbs
1.700	178 lbs	159 lbs	164 lbs	-	155 lbs	96 lbs	110 lbs
1.650	196 lbs	172 lbs	183 lbs	57 lbs	175 lbs	108 lbs	129 lbs
1.600	212 lbs	187 lbs	203 lbs	67 lbs	196 lbs	118 lbs	146 lbs
1.550	229 lbs	199 lbs	219 lbs	78 lbs	217 lbs	129 lbs	165 lbs
1.500	247 lbs	216 lbs	238 lbs	89 lbs	238 lbs	146 lbs	184 lbs
1.450	265 lbs	231 lbs	259 lbs	100 lbs	258 lbs	161 lbs	204 lbs
1.400	284 lbs	249 lbs	280 lbs	110 lbs	279 lbs	172 lbs	221 lbs
1.350	303 lbs	266 lbs	299 lbs	120 lbs	300 lbs	186 lbs	240 lbs
1.300	324 lbs	283 lbs	323 lbs	130 lbs	-	197 lbs	258 lbs
1.250	345 lbs	300 lbs	343 lbs	141 lbs	-	211 lbs	278 lbs
1.200	367 lbs	317 lbs	365 lbs	153 lbs	-	227 lbs	297 lbs
1.150	389 lbs	336 lbs	387 lbs	165 lbs	-	240 lbs	316 lbs
1.100	415 lbs	-	411 lbs	177 lbs	-	254 lbs	338 lbs
1.050	-	-	-	-	-	269 lbs	360 lbs
1.000	-	-	-	-	-	283 lbs	380 lbs
0.950	-	-	-	-	-	-	-
Coil Bind	1.040 w/.050 step	1.080	0.985	1.000	1.280	0.910	0.980
7° Titanium Retainer	86030 / 86046	87028T (LS1)	86037T	-	-	86033	87040
7° Titanium Retainer	86031	87029	-	-	-	87041	-
7° Titanium Ret 3/8	-	-	-	-	-	87042	87042
Titanium Ret 10°	-	-	-	-	-	86067M	-
Titanium Super 7°	-	-	-	-	-	-	-
7° Steel Retainer 5/16	-	87018T	86037	87044	-	87044	87044
7° Steel Retainer 11/32	87045	87029	-	-	-	87050	87050
7° Steel Retainer 3/8	-	-	-	-	-	87049	87049
Steel Retainer 10°	-	-	-	-	-	87060M	-
Seat Cup	-	-	-	-	-	-	68930
Seat Disc	-	-	-	-	-	68943	68938 or 68940

Valve Springs

VALVE SPRING SPECIFICATIONS – Listed According to O.D.

O.D./I.D. Outer	1.405/1.055	1.430/1.040	1.440/1.050	1.440/1.070	1.440/1.085	1.450/1.065	1.455/1.050
O.D./I.D. Middle	-	-	-	-	-	-	-
O.D./I.D. Inner	1.045/.780	-	.975/.700	1.085/.811	1.075/.795	.975/.705	-
Installed Height	1.600	1.650	1.800	1.800	1.850	1.900	1.850
Rate	338	367	450	324	340	463	360
Part #	68404	68305X1	68390X3	68100X200	68100X209	68382	68315
Type	Dual	Single	Dual	Dual	Dual	Dual	Single
Color Code	Blue/Grey	Grey	Yellow/White	None	None	Purple/Orange	Lavender/Yellow
Damper	No	Yes	Yes	No	No	Yes	Yes
Free Length	1.920	1.900	2.100	2.370	2.360	2.220	2.160
Wire Diameter	.175/.134	0.200	.190/.133	.179/.133	.178/.140	.198/.133	0.205
Material	Silicone	Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
2.350	-	-	-	-	-	-	-
2.300	-	-	-	-	-	-	-
2.250	-	-	-	-	-	-	-
2.200	-	-	-	-	-	-	-
2.150	-	-	-	-	-	-	-
2.100	-	-	-	-	-	-	-
2.050	-	-	-	-	-	-	-
2.000	-	-	-	-	-	91 lbs	-
1.950	-	-	-	-	135 lbs	110 lbs	68 lbs
1.900	-	-	76 lbs	83 lbs	150 lbs	137 lbs	87 lbs
1.850	-	-	96 lbs	94 lbs	166 lbs	159 lbs	105 lbs
1.800	-	-	116 lbs	107 lbs	182 lbs	179 lbs	120 lbs
1.750	-	51 lbs	136 lbs	121 lbs	197 lbs	201 lbs	136 lbs
1.700	82 lbs	68 lbs	156 lbs	134 lbs	212 lbs	221 lbs	153 lbs
1.650	96 lbs	84 lbs	175 lbs	147 lbs	229 lbs	246 lbs	169 lbs
1.600	113 lbs	101 lbs	194 lbs	161 lbs	245 lbs	269 lbs	185 lbs
1.550	128 lbs	116 lbs	215 lbs	175 lbs	262 lbs	292 lbs	203 lbs
1.500	143 lbs	138 lbs	238 lbs	190 lbs	279 lbs	315 lbs	221 lbs
1.450	157 lbs	156 lbs	261 lbs	205 lbs	296 lbs	341 lbs	241 lbs
1.400	177 lbs	174 lbs	284 lbs	221 lbs	314 lbs	364 lbs	260 lbs
1.350	192 lbs	191 lbs	307 lbs	238 lbs	331 lbs	391 lbs	282 lbs
1.300	208 lbs	210 lbs	331 lbs	255 lbs	349 lbs	415 lbs	303 lbs
1.250	225 lbs	229 lbs	355 lbs	274 lbs	368 lbs	443 lbs	322 lbs
1.200	244 lbs	250 lbs	389 lbs	291 lbs	388 lbs	477 lbs	-
1.150	263 lbs	268 lbs	-	309 lbs	-	-	-
1.100	282 lbs	-	-	330 lbs	-	-	-
1.050	302 lbs	-	-	-	-	-	-
1.000	319 lbs	-	-	-	-	-	-
0.950	-	-	-	-	-	-	-
Coil Bind	0.950	1.050	1.110	1.030	1.110	1.115	1.150
7° Titanium Retainer	87040	87040	86033	86033	86033	86033	87040
7° Titanium Retainer	-	-	87041	87041	87041	87041	-
7° Titanium Ret 3/8	87042	87042	87042	87042	87042	87042	87042
Titanium Ret 10°	-	86067C	86067M	87065	87065	86067M	86067C
Titanium Super 7°	86771	-	86767M	86767M	86767M	86767M	-
7° Steel Retainer 5/16	87044	87044	87047	87047	87047	87047	87044
7° Steel Retainer 11/32	87050	87050	87048	87062	87062	87048	87050
7° Steel Retainer 3/8	87049	87049	87049	87063	87063	87049	87049
Steel Retainer 10°	87060M	-	87060M	87060	87060	87060M	-
Seat Cup	68930	68931 or 68951	68931	68931	68931	68957	68931
Seat Disc	68938 or 68940	-	68939 or 68941	68943	68938 or 68940	68939 or 68941	-

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

Valve Springs

NEXT GENERATION
VALVE SPRING

NEXT GENERATION
VALVE SPRING

O.D./I.D. Outer	1.460/1.070	1.460/1.060	1.475/1.075	1.490/1.120	1.500/1.050	1.500/1.050
O.D./I.D. Middle	-	-	-	-	-	-
O.D./I.D. Inner	.975/.710	.975/.710	1.070/.750	-	.726	.726
Installed Height	1.800	1.800	1.800	1.850	2.175	2.100
Rate	483	456	538	250	780	780
Part #	68390X2	68380X2	68501	68140	68855	68856
Type	Dual	Dual	Dual	Single	Dual	Dual
Color Code	2 Yellow	Blue/Yellow	Lavender/Yellow	Green	-	-
Damper	Yes	Yes	No	Yes	Yes	Yes
Free Length	2.100	2.220	2.225	2.300	-	-
Wire Diameter	.198/.133	.200/.130	.200/.155	0.190	-	-
Material	Silicone	Silicone	H11 Vasco	Silicone	Super Clean Silicone	Super Clean Silicone
2.175	-	-	-	-	420 lbs	-
2.150	-	-	-	-	-	-
2.100	-	-	-	-	-	300 lbs
2.050	-	-	-	-	-	-
2.000	-	-	-	-	-	-
1.950	48 lbs	-	-	79 lbs	-	-
1.900	69 lbs	152 lbs	171 lbs	90 lbs	-	-
1.850	90 lbs	173 lbs	204 lbs	102 lbs	-	-
1.800	113 lbs	197 lbs	230 lbs	113 lbs	-	-
1.750	134 lbs	218 lbs	254 lbs	126 lbs	-	-
1.700	156 lbs	241 lbs	280 lbs	139 lbs	-	-
1.675	-	-	-	-	810 lbs	-
1.650	187 lbs	263 lbs	308 lbs	151 lbs	-	650 lbs
1.600	208 lbs	283 lbs	334 lbs	162 lbs	-	-
1.550	231 lbs	308 lbs	362 lbs	175 lbs	-	-
1.500	254 lbs	328 lbs	390 lbs	187 lbs	-	-
1.450	278 lbs	353 lbs	417 lbs	199 lbs	-	-
1.425	-	-	-	-	1005 lbs	-
1.400	302 lbs	377 lbs	443 lbs	212 lbs	-	885 lbs
1.350	325 lbs	399 lbs	472 lbs	227 lbs	-	-
1.300	349 lbs	424 lbs	499 lbs	242 lbs	-	-
1.250	377 lbs	446 lbs	525 lbs	257 lbs	-	-
1.200	408 lbs	470 lbs	-	274 lbs	-	1080 lbs
1.175	-	-	-	-	1200 lbs	-
1.150	439 lbs	-	-	-	-	-
1.100	-	-	-	-	-	-
1.050	-	-	-	-	-	-
1.000	-	-	-	-	-	-
0.950	-	-	-	-	-	-
Coil Bind	1.070	1.110	1.180	1.100	1.130	1.130
7° Titanium Retainer	86033	86033	86033	-	-	-
7° Titanium Retainer	87041	87041	87041	-	-	-
7° Titanium Ret 3/8	87042	87042	-	-	-	-
Titanium Ret 10°	86067M	86067M	86067M	86067	-	-
Titanium Super 7°	86767M	86767M	86767M	86754	86784 or 86785	86784 or 86785
7° Steel Retainer 5/16	87047	87047	87044	-	-	-
7° Steel Retainer 11/32	87050	87050	87062	87054	-	-
7° Steel Retainer 3/8	87049	87049	87049	87053	-	-
Steel Retainer 10°	87060M	87060M	87060M	87055	-	-
Seat Cup	68931	68931	68957	68933	68941A-16	68941A-16
Seat Disc	68939 or 68941	68939 or 68941	68938 • 940 • 942	-	-	-

Valve Springs

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

NEXT GENERATION
VALVE SPRING

O.D./I.D. Outer	1.500/1.050	1.500/1.120	1.505/1.090	1.505/1.130	1.510/1.115	1.525/1.125
O.D./I.D. Middle	-	-	-	-	-	-
O.D./I.D. Inner	.726	1.030/.755	-	1.085/.805	1.115/.830	1.030/.750
Installed Height	2.150	1.900	1.850	1.900	1.800	1.900
Rate	780	452	342	353	419	432
Part #	68857	68340	68302X1	68101X202	68398	68385X2
Type	Dual	Dual	Single	Dual	Dual	Dual
Color Code	-	Green	Green/White	None	None	Purple
Damper	Yes	Yes	Yes	No	No	Yes
Free Length	-	2.270	2.170	2.390	2.280	2.330
Wire Diameter	-	.191/.141	0.204	.192/.148	.198/.146	.198/.141
Material	Super Clean Silicone	Silicone	Silicone	Silicone	Silicone	Silicone
2.350	-	-	-	-	-	-
2.300	-	-	-	-	-	-
2.250	-	-	-	-	-	-
2.200	-	-	-	-	-	-
2.150	375 lbs	-	-	-	-	-
2.100	-	-	-	-	-	-
2.050	-	-	-	-	-	-
2.000	-	-	-	116 lbs	-	123 lbs
1.950	-	100 lbs	61 lbs	131 lbs	106 lbs	144 lbs
1.900	-	118 lbs	77 lbs	146 lbs	124 lbs	166 lbs
1.850	-	143 lbs	91 lbs	162 lbs	140 lbs	187 lbs
1.800	-	165 lbs	107 lbs	178 lbs	158 lbs	207 lbs
1.750	-	184 lbs	121 lbs	194 lbs	176 lbs	228 lbs
1.700	-	206 lbs	136 lbs	211 lbs	194 lbs	249 lbs
1.650	765 lbs	228 lbs	150 lbs	229 lbs	212 lbs	269 lbs
1.600	-	249 lbs	164 lbs	249 lbs	234 lbs	291 lbs
1.550	-	271 lbs	179 lbs	268 lbs	256 lbs	310 lbs
1.500	-	293 lbs	194 lbs	287 lbs	279 lbs	333 lbs
1.450	-	313 lbs	211 lbs	304 lbs	300 lbs	353 lbs
1.400	960 lbs	336 lbs	229 lbs	323 lbs	323 lbs	375 lbs
1.350	-	359 lbs	250 lbs	342 lbs	347 lbs	398 lbs
1.300	-	384 lbs	270 lbs	363 lbs	370 lbs	422 lbs
1.250	-	407 lbs	292 lbs	383 lbs	393 lbs	445 lbs
1.200	1116 lbs	437 lbs	-	-	417 lbs	469 lbs
1.150	-	477 lbs	-	-	-	-
1.100	-	-	-	-	-	-
1.050	-	-	-	-	-	-
1.000	-	-	-	-	-	-
0.950	-	-	-	-	-	-
Coil Bind	1.130	1.080	1.150	1.140	1.080	1.100
7° Titanium Retainer	-	87043	86033	-	-	-
7° Titanium Retainer	-	-	87041	-	-	-
7° Titanium Ret 3/8	-	-	-	-	-	-
Titanium Ret 10°	-	86067	86067M	86067B	86067	86067B
Titanium Super 7°	86784 or 86785	86767	86767M	86781	86767	86781
7° Steel Retainer 5/16	-	87044	87047	-	-	-
7° Steel Retainer 11/32	-	87062	87062	-	87054	-
7° Steel Retainer 3/8	-	87053	87063	87053	87053	87053
Steel Retainer 10°	-	87055	87060	87055	87055	87055
Seat Cup	68941A-16	68933	68933	68933	68933	68933
Seat Disc	-	68938 or 68940	-	68938 or 68940	68943	68938 or 68940

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

Valve Springs

NEXT GENERATION
VALVE SPRING

	1.540/1.100	1.550/1.140	1.550/1.050	1.555/1.155	1.565/1.140	1.600/1.175
O.D./I.D. Outer	1.540/1.100	1.550/1.140	1.550/1.050	1.555/1.155	1.565/1.140	1.600/1.175
O.D./I.D. Middle	-	-	-	-	-	-
O.D./I.D. Inner	.990/.720	1.035/.755	0.726	0.726	1.035/.740	1.160/.850
Installed Height	1.900	1.950	1.900	2.300	2.000	2.100
Rate	671	473	459	1015	640	552
Part #	68670S	68369	68363	68854	68671	68844
Type	Dual	Dual	Dual	Dual	Dual	Dual
Color Code	Lt. Purple	Yellow/Purple	Blue/Purple	-	None	Yellow
Damper	Yes	Yes	Yes	Yes	Yes	No
Free Length	2.180	2.460	2.430	-	2.440	2.554
Wire Diameter	.220/.136	.207/.140	.206/.133	-	.219/.148	.221/.155
Material	H11 Vasco	Silicone	Silicone	Super Clean Silicone	H11 Vasco	Super Clean Silicone
2.350	-	-	-	-	-	-
2.300	-	-	-	425	-	-
2.250	-	-	-	-	-	-
2.200	-	-	-	-	-	-
2.150	-	-	-	-	-	-
2.100	-	-	-	-	174 lbs	229 lbs
2.050	-	173 lbs	-	-	205 lbs	253 lbs
2.000	129 lbs	192 lbs	172 lbs	-	233 lbs	276 lbs
1.950	164 lbs	215 lbs	194 lbs	-	263 lbs	305 lbs
1.900	196 lbs	236 lbs	212 lbs	-	291 lbs	331 lbs
1.850	227 lbs	260 lbs	233 lbs	-	322 lbs	357 lbs
1.800	262 lbs	281 lbs	254 lbs	932 lbs	351 lbs	384 lbs
1.750	292 lbs	301 lbs	273 lbs	-	379 lbs	409 lbs
1.700	324 lbs	322 lbs	294 lbs	-	411 lbs	435 lbs
1.650	354 lbs	345 lbs	315 lbs	-	441 lbs	462 lbs
1.600	385 lbs	366 lbs	335 lbs	-	475 lbs	489 lbs
1.550	418 lbs	390 lbs	356 lbs	1186 lbs	507 lbs	516 lbs
1.500	451 lbs	413 lbs	380 lbs	-	537 lbs	544 lbs
1.450	482 lbs	437 lbs	403 lbs	-	577 lbs	572 lbs
1.400	517 lbs	462 lbs	429 lbs	-	610 lbs	601 lbs
1.350	549 lbs	489 lbs	457 lbs	-	648 lbs	626 lbs
1.300	582 lbs	515 lbs	484 lbs	1440 lbs	678 lbs	660 lbs
1.250	617 lbs	546 lbs	515 lbs	-	718 lbs	-
1.200	654 lbs	584 lbs	560 lbs	-	752 lbs	-
1.150	694 lbs	-	-	-	-	-
1.100	734 lbs	-	-	-	-	-
1.050	-	-	-	-	-	-
1.000	-	-	-	-	-	-
0.950	-	-	-	-	-	-
Coil Bind	1.010	1.100	1.100	1.230	1.110	1.210
7° Titanium Retainer	-	-	-	-	-	-
7° Titanium Retainer	-	-	-	-	-	-
7° Titanium Ret 3/8	-	-	-	-	-	-
Titanium Ret 10°	86067	86067B	86067B	-	86067	86068
Titanium Super 7°	86767	86781	86781	86784 or 86785	86781	86780
7° Steel Retainer 5/16	-	-	-	-	-	-
7° Steel Retainer 11/32	-	-	-	-	-	-
7° Steel Retainer 3/8	-	87053	87053	-	-	-
Steel Retainer 10°	87055	87055M	87055M	-	87055	-
Seat Cup	68953X1	68953X1	68953X1	68941A-16	-	68955
Seat Disc	68939 or 68941	68938 or 68940	68938 or 68940	-	68938 • 940 • 942	68943

Valve Springs

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

O.D./I.D. Outer	1.610/1.215	1.630/1.190	1.630/1.180	1.635/1.190	1.255/.865
O.D./I.D. Middle	1.205/.890	-	-	-	-
O.D./I.D. Inner	.890/.665	1.050/.760	1.050/.750	1.185/.874	-
Installed Height	1.850	1.900	2.000	2.050	1.750
Rate	514	704	666	646	522
Part #	68694	S68555X2	68555X1	68860	68311X1
Type	Triple	Dual	Dual	Dual	Single
Color Code	None	Pink/Red	Red	Blue	None
Damper	No	Yes	Yes	No	Yes
Free Length	2.440	2.240	2.400	2.470	1.995
Wire Diameter	.199/.155/.112	.227/.147	.226/.149	.223/.162	0.198
Material	Silicone	H11 Vasco	H11 Vasco	Super Clean Silicone	Super Clean Silicone
2.350	-	-	-	-	-
2.300	-	-	-	-	-
2.250	-	-	-	-	-
2.200	-	-	-	-	-
2.150	-	-	-	-	-
2.100	-	-	176 lbs	206 lbs	-
2.050	-	-	206 lbs	236 lbs	-
2.000	-	155 lbs	239 lbs	257 lbs	-
1.950	161 lbs	188 lbs	273 lbs	287 lbs	-
1.900	181 lbs	219 lbs	305 lbs	316 lbs	-
1.850	203 lbs	254 lbs	336 lbs	350 lbs	73 lbs
1.800	226 lbs	285 lbs	371 lbs	381 lbs	97 lbs
1.750	250 lbs	318 lbs	409 lbs	411 lbs	120 lbs
1.700	273 lbs	348 lbs	441 lbs	442 lbs	146 lbs
1.650	305 lbs	380 lbs	474 lbs	472 lbs	169 lbs
1.600	329 lbs	410 lbs	510 lbs	504 lbs	194 lbs
1.550	355 lbs	442 lbs	542 lbs	537 lbs	220 lbs
1.500	380 lbs	477 lbs	571 lbs	567 lbs	246 lbs
1.450	404 lbs	513 lbs	605 lbs	599 lbs	274 lbs
1.400	431 lbs	551 lbs	640 lbs	633 lbs	302 lbs
1.350	456 lbs	590 lbs	674 lbs	667 lbs	331 lbs
1.300	494 lbs	630 lbs	705 lbs	702 lbs	359 lbs
1.250	519 lbs	670 lbs	745 lbs	741 lbs	389 lbs
1.200	545 lbs	712 lbs	770 lbs	771 lbs	424 lbs
1.150	572 lbs	765 lbs	817 lbs	818 lbs	459 lbs
1.100	-	807 lbs	870 lbs	864 lbs	-
1.050	-	-	-	-	-
1.000	-	-	-	-	-
0.950	-	-	-	-	-
Coil Bind	1.050	1.020	1.020	1.010	1.070
7° Titanium Retainer	-	-	-	-	86037T
7° Titanium Retainer	-	-	-	86044	86031
7° Titanium Ret 3/8	-	-	-	-	-
Titanium Ret 10°	86069	86068	-	86068	-
Titanium Super 7°	-	86780	86780	86780	-
7° Steel Retainer 5/16	-	-	-	-	86037
7° Steel Retainer 11/32	-	-	-	-	86032
7° Steel Retainer 3/8	-	-	-	-	-
Steel Retainer 10°	87056	87056	87056	87056	-
Seat Cup	68955	68955	68955	68959	-
Seat Disc	68939 or 68941	68938 or 68940	68938 or 68940	-	-

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

Valve Springs

Cycle tested and race proven to be the absolute best springs available. Features unparalleled processing and materials.

O.D./I.D. Outer	1.550/1.115	1.550/1.135	1.600/1.170	1.600/1.170	1.590/1.145	1.650/1.205	1.650/1.205
O.D./I.D. Middle	-	-	-	-	-	1.195/.880	1.200/.880
O.D./I.D. Inner	1.015/.705	1.026/.740	1.060/.765	1.055/.760	1.025/.735	.880/.640	.875/.640
Installed Height	2.000	1.950	2.050	2.050	2.050	2.100	2.200
Rate	660	505	547	604	617	687	692
Part #	68803	68804	68805	68806	68808	68547	68548
Type	Dual	Dual	Dual	Dual	Dual	Triple	Triple
Color Code	Green/Yellow	None	Red/Blue	Red/Purple	Red/Purple	Red/Purple	Red/Purple
Damper	Yes	Yes	Yes	Yes	Yes	No	No
Free Length	2.352	2.550	2.630	2.552	2.515	2.520	2.620
Wire Diameter	.225/.142	.205/.141	.218/.148	.225/.147	.219/.148	.215/.162/.119	.215/.162/.119
Material	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone
2.350	-	-	-	-	-	-	-
2.300	-	-	-	-	-	-	-
2.250	-	-	-	-	-	-	-
2.200	-	-	-	-	-	-	279 lbs
2.150	141 lbs	-	-	-	-	255 lbs	312 lbs
2.100	174 lbs	-	233 lbs	227 lbs	228 lbs	287 lbs	343 lbs
2.050	207 lbs	-	258 lbs	255 lbs	261 lbs	321 lbs	375 lbs
2.000	240 lbs	212 lbs	280 lbs	279 lbs	295 lbs	351 lbs	405 lbs
1.950	273 lbs	235 lbs	305 lbs	306 lbs	315 lbs	380 lbs	439 lbs
1.900	306 lbs	257 lbs	329 lbs	331 lbs	347 lbs	416 lbs	470 lbs
1.850	339 lbs	279 lbs	353 lbs	356 lbs	375 lbs	448 lbs	502 lbs
1.800	372 lbs	301 lbs	379 lbs	382 lbs	403 lbs	480 lbs	534 lbs
1.750	405 lbs	327 lbs	406 lbs	410 lbs	433 lbs	512 lbs	570 lbs
1.700	438 lbs	349 lbs	431 lbs	440 lbs	465 lbs	541 lbs	602 lbs
1.650	471 lbs	373 lbs	461 lbs	469 lbs	493 lbs	580 lbs	636 lbs
1.600	504 lbs	398 lbs	489 lbs	498 lbs	525 lbs	610 lbs	667 lbs
1.550	537 lbs	422 lbs	516 lbs	529 lbs	553 lbs	645 lbs	705 lbs
1.500	570 lbs	448 lbs	544 lbs	559 lbs	583 lbs	679 lbs	740 lbs
1.450	603 lbs	473 lbs	574 lbs	593 lbs	615 lbs	715 lbs	772 lbs
1.400	636 lbs	499 lbs	603 lbs	626 lbs	650 lbs	750 lbs	810 lbs
1.350	669 lbs	526 lbs	633 lbs	661 lbs	684 lbs	790 lbs	850 lbs
1.300	702 lbs	555 lbs	663 lbs	696 lbs	720 lbs	825 lbs	890 lbs
1.250	735 lbs	582 lbs	695 lbs	733 lbs	755 lbs	863 lbs	927 lbs
1.200	-	620 lbs	-	-	-	905 lbs	966 lbs
1.150	-	-	-	-	-	947 lbs	1006 lbs
1.100	-	-	-	-	-	-	-
1.050	-	-	-	-	-	-	-
1.000	-	-	-	-	-	-	-
0.950	-	-	-	-	-	-	-
Coil Bind	1.180	1.100	1.180	1.160	1.170	1.085	1.080
7° Titanium Retainer	-	-	-	-	-	-	-
7° Titanium Retainer	-	-	-	-	-	-	-
7° Titanium Ret 3/8	-	87063M	-	-	-	-	-
Titanium Ret 10°	86067	86067D	86068	86068	86067	86069	86069
Titanium Super 7°	86767	86781	86780	86780	86781	86769	86769
7° Steel Retainer 5/16	-	-	-	-	-	-	-
7° Steel Retainer 11/32	-	-	-	-	-	-	-
7° Steel Retainer 3/8	-	-	-	-	-	-	-
Steel Retainer 10°	87055	87064	87056	87056	-	87056	87056
Seat Cup	68953X1	68953X1	68955	68955	68955	68956	68956
Seat Disc	68939/68941	68938/68940	68938/68940	68938/68940	68938/68940	-	-

Valve Springs

VALVE SPRING SPECIFICATIONS –
Listed According to O.D.

O.D./I.D. Outer	1.525/1.120	1.530/1.125	1.560/1.140	1.560/1.150	1.560/1.145	1.560/1.145	1.560/1.145	1.615/1.175	1.625/1.175
O.D./I.D. Middle	-	-	-	-	-	-	-	-	-
O.D./I.D. Inner	1.015/.745	1.000/.745	1.140/.830	1.040/.745	1.040/.745	1.040/.745	1.040/.745	1.060/.775	1.075/.770
Installed Height	1.950	1.950	2.000	2.000	2.000	2.000	2.000	2.100	2.000
Rate	500	501	489	516	508	521	546	530	595
Part #	68725	68705	68735	68765	68775	68785	68795	68755	68745
Type	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Color Code	Gold/White	Gold/Pink	Gold	Gold/Green	Gold/Orange	Gold/Lt. Blue	Gold/Yellow	Gold	Gold/White
Damper	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes
Free Length	2.370	2.360	2.540	2.550	2.520	2.620	2.620	2.665	2.520
Wire Diameter	.205/.133	.205/.134	.205/.162	.206/.148	.206/.147	.206/.147	.210/.147	.225/.147	.225/.147
Material	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone	Super Clean Silicone
2.350	-	-	-	-	-	-	-	-	-
2.300	-	-	-	-	-	-	-	-	-
2.250	-	-	-	-	-	-	-	-	-
2.200	-	-	-	-	-	-	-	234 lbs	-
2.150	-	-	-	-	-	-	-	261 lbs	-
2.100	129 lbs	95 lbs	178 lbs	182 lbs	196 lbs	203 lbs	237 lbs	287 lbs	203 lbs
2.050	151 lbs	115 lbs	199 lbs	208 lbs	217 lbs	226 lbs	262 lbs	312 lbs	227 lbs
2.000	168 lbs	134 lbs	220 lbs	229 lbs	237 lbs	244 lbs	284 lbs	336 lbs	253 lbs
1.950	194 lbs	160 lbs	244 lbs	253 lbs	262 lbs	274 lbs	310 lbs	361 lbs	282 lbs
1.900	215 lbs	183 lbs	267 lbs	277 lbs	284 lbs	298 lbs	335 lbs	388 lbs	307 lbs
1.850	242 lbs	205 lbs	291 lbs	302 lbs	310 lbs	322 lbs	359 lbs	414 lbs	333 lbs
1.800	264 lbs	227 lbs	314 lbs	326 lbs	333 lbs	352 lbs	381 lbs	442 lbs	361 lbs
1.750	287 lbs	250 lbs	337 lbs	352 lbs	359 lbs	376 lbs	408 lbs	466 lbs	389 lbs
1.700	311 lbs	273 lbs	361 lbs	375 lbs	381 lbs	399 lbs	431 lbs	491 lbs	423 lbs
1.650	334 lbs	297 lbs	384 lbs	400 lbs	406 lbs	423 lbs	457 lbs	521 lbs	452 lbs
1.600	359 lbs	320 lbs	407 lbs	426 lbs	431 lbs	448 lbs	485 lbs	548 lbs	481 lbs
1.550	385 lbs	345 lbs	438 lbs	453 lbs	456 lbs	469 lbs	510 lbs	578 lbs	510 lbs
1.500	408 lbs	370 lbs	464 lbs	481 lbs	481 lbs	494 lbs	538 lbs	610 lbs	542 lbs
1.450	444 lbs	396 lbs	490 lbs	508 lbs	508 lbs	532 lbs	567 lbs	640 lbs	575 lbs
1.400	463 lbs	422 lbs	516 lbs	535 lbs	536 lbs	560 lbs	595 lbs	671 lbs	609 lbs
1.350	498 lbs	451 lbs	543 lbs	568 lbs	565 lbs	589 lbs	627 lbs	706 lbs	643 lbs
1.300	525 lbs	479 lbs	568 lbs	595 lbs	593 lbs	621 lbs	660 lbs	738 lbs	680 lbs
1.250	556 lbs	511 lbs	595 lbs	634 lbs	628 lbs	654 lbs	699 lbs	-	713 lbs
1.200	-	548 lbs	-	-	-	-	-	-	-
1.150	-	-	-	-	-	-	-	-	-
1.100	-	-	-	-	-	-	-	-	-
1.050	-	-	-	-	-	-	-	-	-
1.000	-	-	-	-	-	-	-	-	-
0.950	-	-	-	-	-	-	-	-	-
Coil Bind	1.150	1.125	1.150	1.150	1.160	1.160	1.160	1.190	1.150
7° Titanium Retainer	-	-	-	-	-	-	-	-	-
7° Titanium Retainer	-	-	-	-	-	-	-	-	-
7° Titanium Ret 3/8	-	-	-	-	-	-	-	-	-
Titanium Ret 10°	86067D	86067D	-	86067D	86067D	86067D	86067D	86068	86068
Titanium Super 7°	86767	86767	86781	86781	86781	86781	86781	86780	86780
7° Steel Retainer 5/16	-	-	-	-	-	-	-	-	-
7° Steel Retainer 11/32	-	-	-	-	-	-	-	-	-
7° Steel Retainer 3/8	-	-	-	-	-	-	-	-	-
Steel Retainer 10°	87055M	87055M	-	87064	87064	87064	87064	-	87056
Seat Cup	68933	68933	68953X1	68953X1	68953X1	68953X1	68953X1	68955	68955
Seat Disc	68938 or 68940	68938 or 68940	68943	68938 or 68940	68938 or 68940	68938 or 68940	68938 or 68940	68938 or 68940	68938 or 68940

Valve Spring Retainers



7° TITANIUM RETAINERS

Part No.	Stem	Grams	"A"	"B"	"C"	Step	Height
86037T	5/16	11	1.250	0.855	0.630	.075	+.050
86046	5/16	10.4	1.250	0.925	0.630	.075	-
86030	5/16	11.6	1.250	0.925	0.630	.075	+.090
87040	5/16	17.2	1.375	1.020	0.685	.105	+.070
86033	5/16	17.2	1.375	1.065	0.700	.100	+.090
86031	11/32	11.9	1.250	0.795	0.660	.130	+.050
87041	11/32	-	1.375	1.065	0.670	.115	+.140
86044	11/32	22.5	1.500	1.185	0.775	.115	+.065
87042	3/8	16.4	1.375	1.020	0.680	.100	+.070

Note: Requires 7° keepers.

SUPER 7° TITANIUM RETAINERS

Part No.	Grams	"A"	"B"	"C"	"D"	Step	Height
86767	15.3	1.500	1.100	-	0.700	.100	+.070
86767L	-	1.350	1.125	-	0.730	.100	+.070
86767B	-	1.500	1.100	-	0.750	.100	+.070
86767M	15.3	1.440	1.065	-	0.700	.095	+.070
86767D	15.3	1.500	1.100	-	0.720	.095	+.100
86754	14.4	1.370	1.115	-	0.815	.100	+.080
86756	-	1.100	.890	-	0.660	.100	+.030
86759L	14	1.350	1.145	-	0.825	.100	+.070
86769	19.9	1.500	1.185	.850	0.640	.100	+.100
86781	17.3	1.500	1.135	-	0.730	.100	+.150
86780	19.9	1.500	1.165	-	0.765	.100	+.150
86780L	15.1	1.350	1.165	-	0.765	.100	+.150
86783	15	1.400	1.105	-	0.695	.100	+.150
86790	20.1	1.500	1.165	-	0.765	.100	+.075
86770	-	1.350	1.070	-	0.720	.100	+.150
86771	14.6	1.350	1.070	-	0.750	.100	+.150
86784	16	1.500	1.035	-	0.710	.100	+.050
86785	16	1.500	1.035	-	0.710	.100	+.150


10° TITANIUM RETAINERS

Part No.	Grams	"A"	"B"	"C"	"D"	Step	Height
86068	15.5	1.500	1.175	-	0.765	.100	+.100
86068D	16.5	1.500	1.175	-	0.760	.110	+.160
86068C	14	1.500	1.050	0.760	0.630	.100	+.120
86068CL	16.5	1.500	0.970	0.760	0.655	.100	+.100
86067C	13	1.500	1.020	-	0.740	.040	+.050
86067M	12	1.440	1.065	-	0.700	.095	+.070
86067B	19	1.500	1.100	-	0.750	.100	+.070
86067	13	1.500	1.100	-	0.700	.100	+.070
86067D	18	1.500	1.100	-	0.720	.095	+.100
86067A	17.5	1.500	0.970	-	0.695	.095	+.050
87071	18	1.500	1.100	-	0.675	.115	+.070
87072	17.5	1.500	1.100	-	0.650	.110	+.075
87065	18.5	1.500	1.065	-	0.700	.110	+.070
86065	17.5	1.500	1.100	-	0.700	.110	-.010
86069	19	1.500	1.185	0.850	0.640	.100	+.100
86062*	19	1.500	1.185	0.850	0.640	.100	+.100

Note: Requires 10° keepers. * Indicates LightWeight design.

RETAINER MEASUREMENTS

Diagram 2. Retainer Dimensions for Retainers (columns "A, B, C, D"). "C" is used for triple springs only.

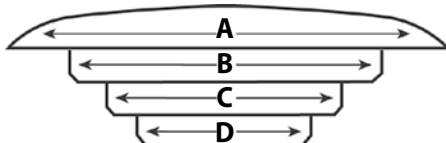

CALIBRATION SPRINGS

Crower's calibration springs help calibrate your spring tester with accurate seat and nose open spring pressures based on a plotted graph included with the spring. Available in low or high pressure design. A must for any engine shop.

Part No.	Description
68000-1	Low Pressure Calibration Spring (Single)
68001-1	High Pressure Calibration Spring (Dual)

BUICK 11° STEEL RETAINERS

Part No.	Stem	"A"	"B"	"C"	Step	Height
87019	3/8	1.370	0.940	0.670	.185	-
87021	3/8	1.370	1.000	0.670	.185	-
87022	3/8	1.490	1.080	0.730	.115	-

Note: Requires factory keepers.

MISCELLANEOUS RETAINERS

Part No.	Engine	Type	Stem	"A"	"B"	"C"	Step	Height
86036T	LS1 Chevy	T	8 _{mm}	1.250	.880	.625	.075	+.050
87011	VW	S	8 _{mm}	1.200	.890	.680	.125	Stk
87020	4.6/5.4 Ford	S	7 _{mm}	.872	.567	.480	.105	Stk
87020T	4.6/5.4 Ford	T	7 _{mm}	.872	.567	.480	.105	Stk
87023	4.6/5.4 Ford	T	6 _{mm}	.875	.630	.480	.105	Stk
87023T	4.6/5.4 Ford	T	6 _{mm}	.875	.630	.480	.105	Stk
87024	4.6/5.4 Ford	S	7 _{mm}	.875	.620	.480	.100	Stk
87024T	4.6/5.4 Ford	T	7 _{mm}	.875	.620	.480	.100	Stk
87025	4.6/5.4 Ford	S	7 _{mm}	.875	.620	.480	.100	+.060
87025T	4.6/5.4 Ford	T	7 _{mm}	.875	.620	.480	.100	+.060
87026	4.6/5.4 32v	T	7 _{mm}	1.000	.705	.495	.100	Stk
87026T	4.6/5.4 32v	T	7 _{mm}	1.000	.705	.495	.100	Stk
87082	Ford Focus	T	6 _{mm}	1.030	.735	-	-	+.050
87028	LS1 Chevy	S	8 _{mm}	1.000	.645	-	-	Stk
87028T	LS1 Chevy	T	8 _{mm}	1.000	.645	-	-	Stk
87029	LT1 Chevy	S	11/32	1.000	.645	-	-	Stk
87029T	LT1 Chevy	T	11/32	1.000	.645	-	-	Stk
87035	5.7-6.1 Hemi	S	-	1.000	.615	-	-	Stk
87035T	5.7-6.1 Hemi	T	-	1.000	.615	-	-	Stk
87076	Patrol 4.8	T	-	1.055	.770	.450	-	+.050
87083	Duratec 2.3	T	5.5 _{mm}	1.000	.745	.610	-	Stk
87084	DSM 420A	T	6 _{mm}	1.075	.770	.450	-	Stk
87085	Toyota 2JZ	T	6 _{mm}	1.050	.745	.515	.100	Stk
87086	Toyota 1zz	T	5.5 _{mm}	.800	.640	.515	-	Stk
87087	H22 Stk	T	5.5 _{mm}	1.000	.815	.610	.080	Stk
87091	B-VTEC Stk	T	5.5 _{mm}	1.100	.830	.600	.080	Stk
87091S	B-VTEC Stk	S	5.5 _{mm}	1.100	.830	.600	.080	Stk
87092	B18A/B	T	6.5 _{mm}	1.100	.805	.600	.080	Stk
87092S	B18A/B	S	6.5 _{mm}	1.100	.805	.600	.080	Stk
87093	B-VTEC,H22	Ti	5.5 _{mm}	1.150	.870	.610	.080	Stk
87093S	B-VTEC,H22	S	5.5 _{mm}	1.150	.870	.610	.080	Stk
87093D	B-VTEC,H22	Ti	5.5 _{mm}	1.150	.870	.610	.080	+.060
87093DS	B-VTEC,H22	S	5.5 _{mm}	1.150	.870	.610	.080	+.060
87094	K20A/K24A	T	5.5 _{mm}	1.050	.870	.610	.080	Stk
87094S	K20A/K24A	S	5.5 _{mm}	1.050	.870	.610	.080	Stk
87095	4G63/Evo	T	6.5 _{mm}	1.050	.740	-	-	Stk
87096	D16/D17A	T	5.5 _{mm}	.875	.610	.450	-	Stk
87097	SR20DE(T)	T	6 _{mm}	1.125	.825	.475	-	Stk
87098	KA24DE(T)	T	6 _{mm}	1.115	.850	.610	-	Stk

S = Steel • T = Titanium • Ti = Ti-17 Titanium Alloy

6AL4V Titanium vs Ti-17 Titanium

Crower is the only manufacturer that utilizes Ti-17 titanium alloy in the production of every Honda/Acura B Series, H22 and K Series VTEC application. Ti-17 rates 6-7 points harder on the RC scale than traditional 6AL4V titanium found in all competing brands.



7° STEEL RETAINERS

Part No.	Stem	Grams	"A"	"B"	"C"	Step	Height
86037	5/16	19	1.250	0.855	0.630	.075	.050
87045	5/16	20.1	1.250	0.930	0.620	.145	.050
87046	5/16	24.6	1.250	0.910	0.615	.100	.025
87047	5/16	24.7	1.375	1.020	0.685	.065	.050
87044	5/16	27.6	1.375	1.010	0.740	.145	.110
86032	11/32	25.4	1.250	0.795	0.660	.130	.015
86032D	11/32	21.5	1.250	0.795	0.660	.130	.050
86032S	11/32	24.1	1.250	0.795	0.660	.130	.065
87050	11/32	31.1	1.375	1.020	0.685	.115	.000
87052	11/32	31.1	1.375	1.020	0.685	.115	.050
87048	11/32	30.8	1.375	1.020	0.685	.115	.085
87048D	11/32	25.5	1.375	1.020	0.685	.140	.150
87054	11/32	29.1	1.375	1.115	0.815	.100	.080
87062	11/32	32.3	1.500	1.080	0.730	.115	.125
87062S	11/32	32.2	1.500	1.080	0.730	.115	.025
87049	3/8	29.6	1.375	1.020	0.685	.115	.070
87049D	3/8	28.1	1.375	1.020	0.685	.140	.100
87053*	3/8	25.7	1.375	1.115	0.745	.100	.080
87063	3/8	31.6	1.500	1.080	0.740	.115	.100
87063M	3/8	37	1.500	1.080	0.740	.115	.050
87063S	3/8	37.2	1.500	1.080	0.740	.115	.000

Note: Requires 7° keepers. * Indicates LightWeight retainer design.


10° STEEL RETAINERS

Part No.	Grams	"A"	"B"	"C"	"D"	Step	Height
86064	34.6	1.500	1.100	-	0.700	.115	.020
87055	31.2	1.500	1.100	-	0.700	.115	.085
87064	30.2	1.500	1.080	-	0.740	.115	.100
87060	28.7	1.500	1.080	-	0.650	.115	.070
87055M	32.1	1.500	1.100	-	0.700	.115	.050
87055D	28.5	1.500	1.100	-	0.700	.115	.110
87060M	27.3	1.440	1.065	-	0.650	.115	.050
87056	35.8	1.625	1.180	-	0.650	.100	.100

Note: Requires 10° keepers.

SPRING INSTALLED HEIGHT

Diagram 1. Calculating Installed Spring Height

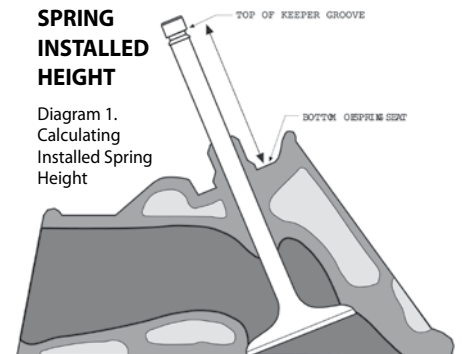

Measure the height from top of keeper groove to bottom of spring seat. Refer to the "height" column of your retainer and add or subtract the amount given from the original overall measurement.

Valve Spring Accessories



VALVE STEM SEALS

Crower valve stem seals provide correct oil control at the valve guide.

The spring loaded wiper design prevents unwanted oil contamination on the cylinder. Heavy-duty steel and teflon construction.

Part No.	Description	Stem Dia.	I.D.
86070-16	Standard	5/16	.530"
86070T-16	Smaller O.D. (triple spring)	5/16	.500"
86071-16	Standard	3/8	.530"
86071T-16	Smaller O.D. (triple spring)	3/8	.500"
86072-16	Standard	11/32	.530"
86072T-16	Smaller O.D. (triple spring)	11/32	.500"

Also available in singles by replacing -16 with -1.



LASH CAPS

Crower lash caps protect the ends of your valves from excessive wear and help to correct rocker geometry by increasing rocker arm to retainer clearance. Machined from high grade chromoly steel and heat-treated for added strength, Crower lash caps give your valves an added .060" margin of protection. Highly recommended for performance applications, and a must for costly stainless steel or titanium valves.

Part No.	Description	Depth
86120-16	5/16 valve stem (Set/16)	.090"
86120S-16	5/16 valve stem (Set/16)	.060"
86121-16	11/32 valve stem (Set/16)	.090"
86121D-16	11/32 valve stem (Set/16)	.120"
86121S-16	11/32 valve stem (Set/16)	.060"
86122-16	3/8 valve stem (Set/16)	.090"
86122D-16	3/8 valve stem (Set/16)	.120"
86122S-16	3/8 valve stem (Set/16)	.060"
86123-8	5/16 valve stem VW (Set/8)	.090"
86125-24	6mm valve stem Toyota (Set/24)	.050"
86126-8	8mm 2000cc (Set/8)	.055"
86127-8	11/32 2300cc (Set/8)	.100"
86128-16	7mm Ford 4.6/5.4L (Set/16)	.120"

Also available in singles by replacing -16 with -1.



BILLET PERFORMANCE 7° VALVE STEM KEEPERS

Crower billet performance valve stem keepers are precision machined from premium billet bar stock chromoly steel. Heat-treated for maximum strength to insure against shoulder shearing (common with stock and lesser quality keepers). In addition to our standard height, we also offer .050" higher and .050" lower to achieve the correct installed spring height. Each variation is color coded for identification. Serious engine builders should have a complete selection on hand at all times.

Part No.	Stem Dia.	Inst. Height
86106-16	5/16	Standard
86107-16	11/32	Standard
86107X1-16	11/32	+.050"
86107X2-16	11/32	-.050"
86108-16	3/8	Standard
86108X1-16	3/8	+.050"
86108X2-16	3/8	-.050"
86115-16	5.5mm	Standard
86115X1-16	5.5mm	+.050"

SUPER 7° KEEPERS

Part No.	Stem Dia.	Inst. Height
86709-16	5/16	Standard
86709X1-16	5/16	+.050"
86709X2-16	5/16	-.050"
86710-16	11/32	Standard
86710X1-16	11/32	+.050"
86710X2-16	11/32	-.050"

Also available in pairs by replacing -16 with -PR.

TITANIUM KEEPERS

For the ultimate in lightweight performance, Crower billet titanium keepers are CNC machined to insure the best possible keeper. Available in Super 7°. (4g weight)

Part No.	Stem Dia.	Inst. Height
86115T-16	5.5mm (.216")	Standard
86117T-16	7mm (.274")	Bead lock Standard
86117X1T-16	7mm (.274")	Bead lock +.050"
86117X2T-16	7mm (.274")	Bead lock -.050"
86709T-16	5/16	Standard
86709X1T-16	5/16	+.050"
86709X2T-16	5/16	-.050"
86710T-16	11/32	Standard
86710X1T-16	11/32	+.050"
86710X2T-16	11/32	-.050"

To order bead-lock keeper design, specify "B" after part no.



STAMPED STEEL 7° VALVE STEM KEEPERS

Crower valve stem keepers are stamped from the finest grade steel alloy and heat-treated for added strength and wear resistance. Out performs stock keepers.

Part No.	Stem Dia.	Inst. Height
86100-16	11/32	Standard
86102-16	3/8	Standard

Also available in pairs by replacing -16 with -PR.

NEW ITEM



10° LITE WEIGHT TOOL STEEL RETAINERS

Part No.	Grams	"A"	"B"	"C"	"D"	Step	Height
87001-16	19.4	1.375	1.068	.705	-	.098	+.100
87002-16	21.9	1.390	1.100	.800	.650	.090	+.085
87003-16	21.4	1.450	1.100	.710	-	.090	+.085

For keepers, see below.



JUMBO SPLIT-LOCK 10° VALVE STEM KEEPERS

Crower Jumbo valve stem keepers are designed with a 10° taper (twice the strength of the conventional 7° taper).

Jumbo keepers are machined from premium chromoly steel and heat-treated for maximum strength. Crower Jumbo keepers are available in standard height, .050" higher or .050" lower positions for added flexibility in achieving the correct installed spring height. Each variation is color coded for easy identification.

Part No.	Stem Dia.	Inst. Height
86109-16	5/16	Standard
86118-16	LS1 8mm Bead lock	Standard
86118X1-16	LS1 8mm Bead lock	+.050"
86118X2-16	LS1 8mm Bead lock	-.050"
86110-16	11/32	Standard
86110X1-16	11/32	+.050"
86110X2-16	11/32	-.050"
86111-16	3/8	Standard
86111X1-16	3/8	+.050"
86111X2-16	3/8	-.050"

Also available in pairs by replacing -16 with -PR.

Valve Spring Accessories



COPPER PLATED SPRING SHIMS


Crower copper plated spring shims are case hardened .005" to .010" deep to a surface hardness of 45RC. Available in single or assorted thickness sets and bulk.

Part No.	Description	O.D. x I.D.	Size
85060-16	Set/16 pcs	1.525 x 0.735	.015
85060B	Bulk/80 pcs (1 size)	1.525 x 0.735	.015
85061-16	Set/16 pcs	1.525 x 0.735	.030
85061B	Bulk/80 pcs (1 size)	1.525 x 0.735	.030
85062-16	Set/16 pcs	1.525 x 0.735	.060
85062B	Bulk/80 pcs (1 size)	1.525 x 0.735	.060
85063A	Asst/16 ea (015,030,060)	1.525 x 0.735	Asst
85063A	Set/16 pcs		
85065-16	Bulk/80 pcs (1 size)	1.625 x 0.635	.015
85065B	Set/16 pcs	1.625 x 0.635	.015
85066-16	Bulk/80 pcs (1 size)	1.625 x 0.635	.030
85066B	Set/16 pcs	1.625 x 0.635	.030
85067-16	Bulk/80 pcs (1 size)	1.625 x 0.635	.060
85067B	Asst/16 ea (015,030,060)	1.625 x 0.635	.060
85068A	Set/16 pcs	1.625 x 0.635	Asst

CUTTER PILOTS

Pilots available for spring seat and valve seal cutters.

Part No.	Stem Dia.
68970	5/16
68971	3/8
68972	1/2

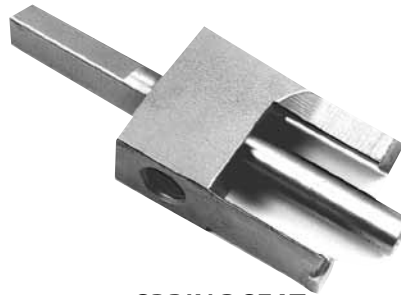

SPRING SEAT CUTTERS

Designed to accurately machine cylinder heads for aftermarket spring applications using a drill press or hand drill. Cutter blades are carbide tipped and valve guide pilots are interchangeable. Special spring seat cutters in custom sizes are available. Call for pricing and availability.

Part No.	O.D. x I.D.	Part No.	O.D. x I.D.
68974	1.050 x 0.740	68979	1.555 x 0.630
68978	1.255 x 0.620	68992	1.560 x 0.720
68982	1.365 x 0.760	68977	1.570 x 0.545
68983	1.410 x 0.765	68981	1.575 x 0.610
68997	1.450 x 0.690	68998	1.630 x 0.630
68990	1.450 x 0.800	68984	1.630 x 0.670
68985	1.460 x 0.685	68995X1	1.630 x 0.700
68999	1.485 x 0.675	68995	1.630 x 0.770
68975	1.510 x 0.800	68980	1.635 x 0.630
68986	1.515 x 0.750	68989	1.705 x 0.630
68976	1.520 x 0.690	68996	1.750 x 0.630
68987	1.530 x 0.730	68988	1.800 x 0.630

Note: Must order pilot separately. See pilots listed on the left.



VALVE SEAL CUTTERS

Crower valve seal/valve guide cutter includes cutting tool. Must order pilot separately when ordering.

Part No.	I.D.
86079	.530"
86079T	.500"

Note: Must order pilot separately. See pilots listed on the left.




SPRING SEAT CUPS & SEAT DISCS

Crower valve spring seat cups eliminate the need for seat cutting in some instances and shimming in others. Designed to keep springs from wandering, seat cups also protect aluminum heads from "galling." Spring seat discs also available.

SEAT CUPS

Part No.	"A"	"B"	"C"	Cutter
68934-16	1.550	1.450	0.575	68981
68930-16	1.550	1.440	0.635	68979
68951-16	1.550	1.455	1.000	-
68931-16	1.550	1.475	0.635	68979
68957-16	1.590	1.490	0.675	68984
68936-16	1.625	1.515	0.635	68988
68933-16	1.685	1.540	0.635	68989
68953X1-16	1.695	1.565	0.635	68989
68955-16	1.745	1.630	0.635	68996
68959-16	1.740	1.650	0.635	68996
68956-16	1.795	1.700	0.635	68988
68958-16	Rotation Eliminators (396-454 Chevy)			

Diagram 1. Spring Seat Cup

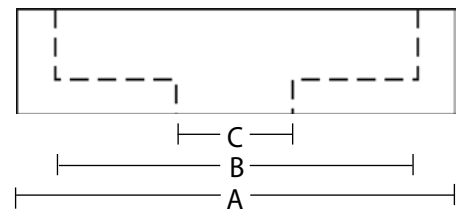

SEAT DISCS

Part No.	"A"	"B"	"C"	"D"	Cutter
68924-16	1.400	0.970	-	0.527	-
68925-16	1.400	0.780	-	0.527	-
68926-16	.842	0.635	-	0.495	-
68928-16	1.250	0.805	-	0.515	-
68929-16	1.100	0.970	0.600	0.482	-
68938-16	1.560	0.740	-	0.505	-
68939-16	1.565	0.660	-	0.505	-
68940-16	1.560	0.740	-	0.562	-
68941-16	1.565	0.660	-	0.562	-
68942-16	1.535	0.730	-	0.635	-
68943-16	1.545	0.805	-	0.565	-

Note: All cups/discs average approximately .060" thick.

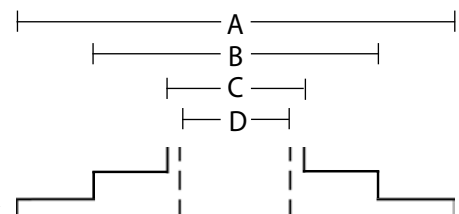


Diagram 2. Spring Seat Disc

Crankshafts

CROWER CRANKSHAFTS

Choose a Crower crankshaft and you'll get the finest high performance crankshaft made. The Crower crankshaft facility is like no other in the industry, utilizing massive, state-of-the-art CNC machining centers that work in unison, alongside seasoned master craftsmen. Crower crankshafts incorporate the unique combination of precision and attention to detail with high production capabilities, in a wide variety of designs and applications.

THE MATERIAL

Crower Crankshafts are made from the finest quality materials in the world. Our top of the line forged cranks are made from aerospace quality, vacuum degassed 4340 chromoly steel. Our 4340 forged cranks are "non-twist" drop forged for the strongest crankshafts on the market. Crower's billet cranks utilize either 4340 or EN30B materials. It's your choice at Crower, we make what you want and need for your application.

MANUFACTURING

Crower has created a very effective combination of streamlined production capabilities and quality engineering that produces better crankshafts, quicker and more accurately than any competing crankshaft manufacturer. Crower combines the latest CNC machining centers with nearly 30 years of crankshaft manufacturing experience, to deliver the highest quality crankshaft, built to exacting specifications, at an affordable price. The capability of manufacturing from round bar allows Crower to produce steel billet crankshafts for just about any engine make to any desired stroke and horsepower needs.

GUARANTEED


When you purchase a Crower crankshaft you'll get a quality crankshaft, manufactured from the finest materials to exacting tolerances, that goes unmatched in the high performance industry. You are guaranteed precision indexing and throw-to-throw consistency that engine builders swear is absolutely perfect. When you install a genuine Crower crankshaft in your engine, you'll do so with the peace of mind that it will perform flawlessly.




Crankshafts

A TYPICAL SCENARIO


For years you've been running a stock crank and have never experienced rod bearing failure. You decide to "step-up" and replace your stock crank with an aftermarket brand. Immediately you encounter bearing scuff or total bearing failure. This scenario happens often, much to the dismay of the engine builder.

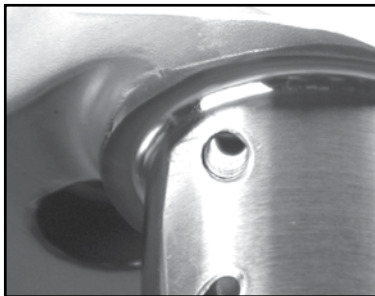

Looking from the rod, back up through the main, you can see daylight, indicating it's a genuine Crower crankshaft with the "straight-shot" oiling system.

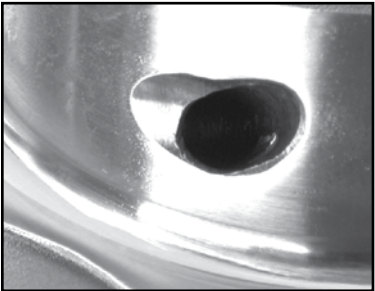

The unique teardrop scoop and exclusive Crower "straight-shot" oiling system increases critical oil flow from the main bearings to the rod bearings.

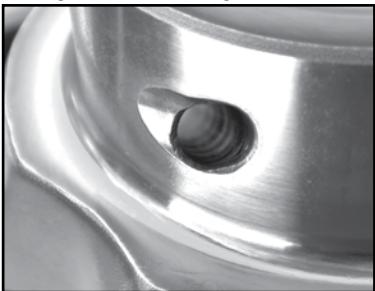

Entry holes for the rod feed are located at the O.D. of the main, allowing oil to flow equally and unrestricted to the bearings. This is key to prolonging bearing life.

Crower engineers developed the straight-shot oiling system and virtually eliminates bearing burnout and customer complaints. It features two Crower exclusives, off-center drilling and the teardrop design oil hole, which scoops oil at the main and forces it into the rod feed hole. Although it's time consuming, we feel it's worth it.

THE PROBLEM

On most aftermarket brands the rod feed hole is only drilled to the centerline of the main. This method of drilling doesn't deliver enough oil to the rod. Creating a high centrifuge, high pressure zone at the main, restricting critical oil flow intended for your rods. As engine rpm increases this centrifuge effect gets worse, possibly resulting in severe crankshaft damage or even total engine destruction. Not the performance characteristics you expected when you switched to an aftermarket brand crankshaft.

THE SOLUTION


STRAIGHT-SHOT OILING

After extensive research and design,

THE PROVEN FACTS

It has been proven time and time again, "the lighter the parts, the quicker the throttle response." This is no more evident than in the components that make up the bottom end of an engine. Reducing a crankshaft's counterweight mass is critical in getting quicker acceleration and deceleration. It also alleviates stress and engine wear and improves oil shearing in the pan.

PENDULUM UNDERCUTTING AND LIGHTWEIGHT PIN WEB AREA

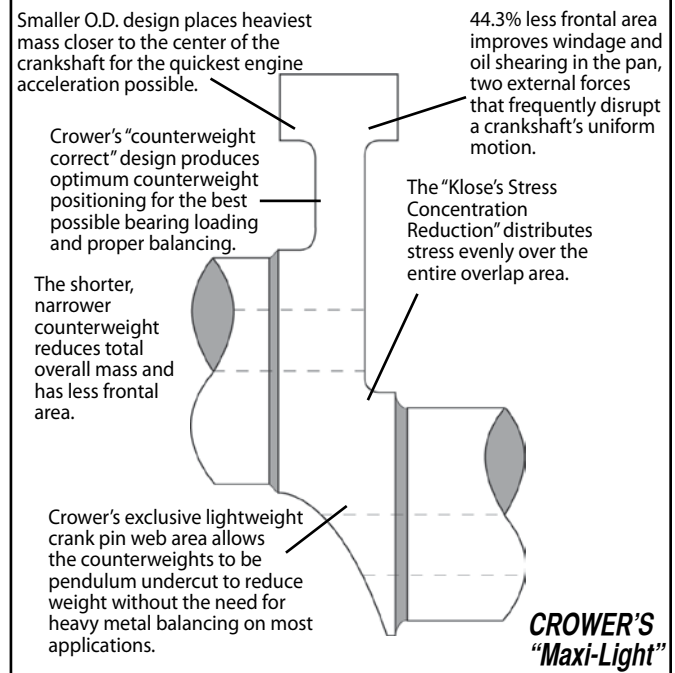

REVOLUTIONARY DESIGN

The Crower Maxi-Light crankshaft redefines the term "light rotating mass" by attaining just the right ratio of a smaller O.D. counterweight with an exclusive lightweight crank pin web area. By lightening the crank pin web area we are able to machine excess material from the center of the counterweights without adversely effecting balancing. This is Crower's patented pendulum undercutting. Lighter than any other crankshaft like it on the market, the Maxi-Light is structurally just as strong and easy to balance. Although competing manufacturer's claim to have comparable designs similar to the Crower Maxi-Light, consider the fact that it takes much more than just scalloping out the center of the counterweight to achieve the correct combination of light rotating mass and proper balance. Crower pioneered pendulum undercutting the counterweights back in 1989.

Crankshafts

Small Block Chevrolet V8
262 267 283 302 305 307 327 350 400



ENDURO

The Enduro is designed for extreme durability. Used in pro street, heavy nitrous and blown applications. Our 100% American made forging, is the same one used to make our Ultra-Light crankshafts. The only difference is the amount of machining time and less debur. 1/8" radii, heat-treat, "counterweight correct" design and straight shot oiling. Comes standard with four lightening holes.

100% American Made

WEIGHT: 57-59 lbs (determined by stroke, rod, and main size.)

Part No.	Description	Stroke	Main
E95121X4	Chevy Small Block	3.480"	Specify
E95122X4	Chevy Small Block	3.500"	Specify
E95124X4	Chevy Small Block	3.625"	Specify
E95125X4	Chevy Small Block	3.750"	Specify
E95127X4	Chevy Small Block	3.875"	Specify
E95128X4	Chevy Small Block	4.000"	Specify
E95129X4	Chevy Small Block	4.125"	Specify

STANDARD

New lightened version of our popular Standard design. Premium 4340 NT (non-twist) forgings, Crower's standard crankshaft features straight-shot oiling, jumbo 1/8" radii, heat-treating, teardrop oil holes, "counterweight-correct" design. Four lightening holes come standard.

100% American Made

WEIGHT: 53-57 lbs (depends on stroke and main)


Includes 4 lightening holes.

All weights are approximate.

Note: Specify Rod & Main sizes.

Note: Specify rod length to insure proper piston to counterweight clearance.

Note: Specify Standard or BB Nose.

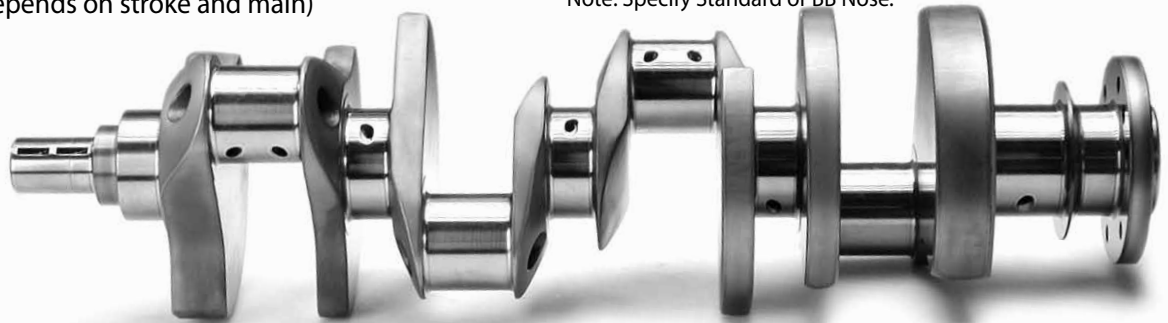

Part No.	Description	Stroke	Main
95120	Chevrolet V8 Small Block	Custom	Specify
95121	Chevrolet V8 Small Block	3.480"	Specify
95122	Chevrolet V8 Small Block	3.500"	Specify
95123	Chevrolet V8 Small Block	3.562"	Specify
95124	Chevrolet V8 Small Block	3.625"	Specify
95125	Chevrolet V8 Small Block	3.750"	Specify
95126	Chevrolet V8 Small Block	3.800"	Specify
95127	Chevrolet V8 Small Block	3.875"	Specify
95128	Chevrolet V8 Small Block	4.000"	Specify
95129	Chevrolet V8 Small Block	4.125"	Specify
95110C	Chevrolet V8 Small Block (Billet)	4.250"	Specify

All weights are approximate.

Note: Specify Rod & Main sizes.

Note: Specify rod length to insure proper piston to counterweight clearance.

Note: Specify Standard or BB Nose.

Crankshafts

Small Block Chevrolet V8

262 267 283 302 305 307 327 350 400



LIGHT-WEIGHT

Our 4340 Light-Weight includes standard features like straight shot oiling, 1/8" radii, heat treat, plus lightweight profiling, center counterweight removal, four lightening holes and radius edges. Smaller O.D. reduces rotating mass for quicker response, and less drag. 100% American Made. Perfect choice for 50lb class restrictions.

WEIGHT: 48-51 lbs (Determined by stroke, rod, and main size)

Part No.	Description	Stroke	Main
LW95120	Chevrolet V8 Small Block	Custom	Specify
LW95115	Chevrolet V8 Small Block	3.000"	Specify
LW95118	Chevrolet V8 Small Block	3.125"	Specify
LW95119	Chevrolet V8 Small Block	3.250"	Specify
LW95111	Chevrolet V8 Small Block	3.320"	Specify
LW95112	Chevrolet V8 Small Block	3.330"	Specify
LW95113	Chevrolet V8 Small Block	3.335"	Specify
LW95114	Chevrolet V8 Small Block	3.340"	Specify
LW95121	Chevrolet V8 Small Block	3.480"	Specify
LW95122	Chevrolet V8 Small Block	3.500"	Specify
LW95123	Chevrolet V8 Small Block	3.562"	Specify
LW95124	Chevrolet V8 Small Block	3.625"	Specify
LW95125	Chevrolet V8 Small Block	3.750"	Specify
LW95126	Chevrolet V8 Small Block	3.800"	Specify
LW95127	Chevrolet V8 Small Block	3.875"	Specify
LW95128	Chevrolet V8 Small Block	4.000"	Specify
LW95129	Chevrolet V8 Small Block	4.125"	Specify


Note: Specify Rod & Main sizes

Note: Specify Std. or BB Nose.



Crankshafts

Small Block Chevrolet V8
262 267 283 302 305 307 327 350 400

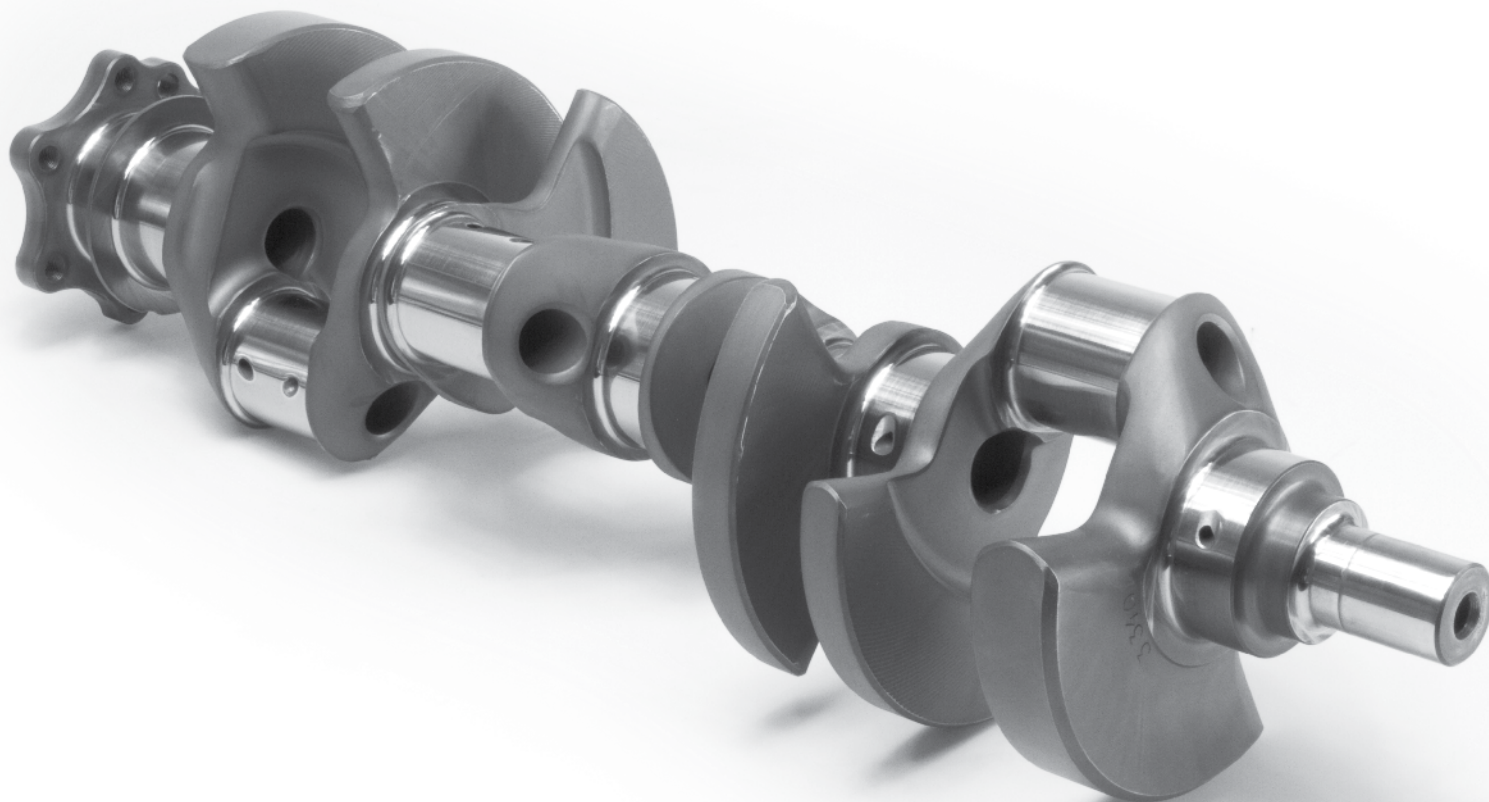

MAXI-LIGHT®

® Ultra-Light is a Registered Trademark of Crower, Inc.

This premium crankshaft was developed for Sprint car and various Late Model applications. The Maxi-Light combines the best features from our race proven Ultra-Light and Light-Weight designs. Machined from our premium USA made 4340 non-twist chromoly forging to create the strongest, most reliable crankshaft that money can buy. This crankshaft delivers a small rotating mass for improved throttle response. 100% American Made

WEIGHT: 43 - 45 lbs

Refer to LW p/n and add #95302 (1 side) or #95309 (2 sides) Semi Maxi-Light option.

Note:

Specify rod and main diameters.

Specify Standard or BB Nose.

All cranks come with 1/8" radius for strength and reliability.

Rod and Main Bearings are available from Crower.

Part No.	Description	Stroke	Main
ML95120	Chevrolet V8 Small Block	Custom	Specify
ML95115	Chevrolet V8 Small Block	3.000"	Specify
ML95118	Chevrolet V8 Small Block	3.125"	Specify
ML95119	Chevrolet V8 Small Block	3.250"	Specify
ML95111	Chevrolet V8 Small Block	3.320"	Specify
ML95112	Chevrolet V8 Small Block	3.330"	Specify
ML95113	Chevrolet V8 Small Block	3.335"	Specify
ML95114	Chevrolet V8 Small Block	3.340"	Specify
ML95121	Chevrolet V8 Small Block	3.480"	Specify
ML95122	Chevrolet V8 Small Block	3.500"	Specify
ML95123	Chevrolet V8 Small Block	3.562"	Specify
ML95124	Chevrolet V8 Small Block	3.625"	Specify
ML95125	Chevrolet V8 Small Block	3.750"	Specify
ML95126	Chevrolet V8 Small Block	3.800"	Specify
ML95127	Chevrolet V8 Small Block	3.875"	Specify
ML95128	Chevrolet V8 Small Block	4.000"	Specify
ML95129	Chevrolet V8 Small Block	4.125"	Specify

Crankshafts

Small Block Chevrolet V8

262 267 283 302 305 307 327 350 400



ULTRA-LIGHT®

® Ultra-Light is a Registered Trademark of Crower, Inc.

The Crower Ultra-Light is Crower's premium crank. Includes all the standard 4340 NT (non-twist forging) features, plus ultra-lightweight profiling, pendulum undercutting, gun drilled mains, four lightening holes and radius edges. Less drag in oil increases horsepower, rapid response throttle. 100% American Made.

WEIGHT: 36-39 lbs (Determined by stroke, rod, and main size.)

Part No.	Description	Stroke	Main
UL95120	Chevrolet V8 Small Block	Custom	Specify
UL95115	Chevrolet V8 Small Block	3.000"	Specify
UL95118	Chevrolet V8 Small Block	3.125"	Specify
UL95119	Chevrolet V8 Small Block	3.250"	Specify
UL95111	Chevrolet V8 Small Block	3.320"	Specify
UL95112	Chevrolet V8 Small Block	3.330"	Specify
UL95113	Chevrolet V8 Small Block	3.335"	Specify
UL95114	Chevrolet V8 Small Block	3.340"	Specify
UL95121	Chevrolet V8 Small Block	3.480"	Specify
UL95122	Chevrolet V8 Small Block	3.500"	Specify
UL95123	Chevrolet V8 Small Block	3.562"	Specify
UL95124	Chevrolet V8 Small Block	3.625"	Specify
UL95125	Chevrolet V8 Small Block	3.750"	Specify
UL95126	Chevrolet V8 Small Block	3.800"	Specify
UL95127	Chevrolet V8 Small Block	3.875"	Specify
UL95128	Chevrolet V8 Small Block	4.000"	Specify

Note:

All rod and main diameters available.

Specify Standard or BB Nose.

Large 1/8" Radius is Standard chamfered

Bearings available from Crower.



Crankshafts

Small Block Chevrolet V8
262 267 283 302 305 307 327 350 400

DIHEDRAL ULTRA-LIGHT®

® Ultra-Light is a Registered Trademark of Crower, Inc.

Designed for the ultimate racing application. Features include tapered "airplane wing" counterweights for less windage and pendulum undercutting of the counterweights. Available in standard or big block nose. Star flange and high rpm oil drilling included. Specify rod & main size when ordering. 100% American Made.

WEIGHT: 36-39 lbs (Determined by stroke, rod, and main sizes.)



Part No.	Description	Stroke	Main
UL95120D	Chevrolet V8 Small Block	Custom	Specify
UL95119D	Chevrolet V8 Small Block	3.250"	Specify
UL95111D	Chevrolet V8 Small Block	3.320"	Specify
UL95112D	Chevrolet V8 Small Block	3.330"	Specify
UL95113D	Chevrolet V8 Small Block	3.335"	Specify
UL95114D	Chevrolet V8 Small Block	3.340"	Specify
UL95121D	Chevrolet V8 Small Block	3.480"	Specify
UL95122D	Chevrolet V8 Small Block	3.500"	Specify
UL95123D	Chevrolet V8 Small Block	3.562"	Specify
UL95124D	Chevrolet V8 Small Block	3.625"	Specify
UL95125D	Chevrolet V8 Small Block	3.750"	Specify
UL95126D	Chevrolet V8 Small Block	3.800"	Specify

Note:

- If you prefer a machined billet 4340 crank, specify "C" after crank part number.
- 1.888" journal diameter is available. Requires special rods and bearings from Crower.
- For EN30B material option, specify when ordering.
- Jumbo radius rod (.156") and main journals (.171") are available. 125" is standard.

Note:

Crower cranks are made to customer's specifications. All rod and main diameters available. Specify Std or BB Nose. Large 1/8" Radius is Standard chamfered Bearings available from Crower.



Crankshafts

Big Block Chevrolet V8
366 396 402 427 454 502

ENDURO™

Crower's Enduro crank features our premium 4340 NT (non-twist) forging, straight-shot oiling, jumbo 1/8 radii, four lightening holes, heat-treat and "counterweight-correct" design. Designed for extreme durability! Used in pro street, sportsman class, monster trucks, off shore boats, heavy nitrous, and blown applications. 100% American made.

WEIGHT: 82-85 lbs (Determined by stroke, rod, and main size.)

Part No.	Description	Stroke	Main
E95132x4	Chevy Big Block	3.760"	Specify
E95133x4	Chevy Big Block	4.000"	Specify
E95135x4	Chevy Big Block	4.250"	Specify
E95136x4	Chevy Big Block	4.375"	Specify
E95137x4	Chevy Big Block	4.500"	Specify
E95140x4	Chevy Big Block	4.750"	Specify


All weights are approximate.

Note: Specify rod length to insure proper piston to counterweight clearance.



Crankshafts

Big Block Chevrolet V8
366 396 402 427 454 502

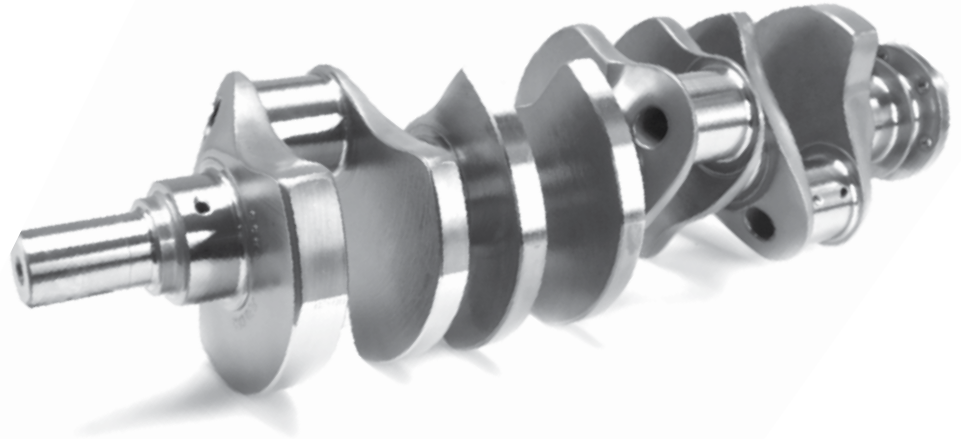

STANDARD

Redesigned lightened version of our popular Standard crankshaft. Precision machined from premium 4340 NT forgings. Standard features are straight-shot oiling, jumbo 1/8" radii, heat-treating, teardrop oil holes. "Counterweight-correct" design. This crankshaft can be ordered with or without center counterweights to fit your application. 100% American Made

WEIGHT: 71-83 lbs (Determined by stroke, rod, and main size.)

Part No.	Description	Stroke	Main
95130	Chevrolet V8 Big Block	Custom	Specify
95132	Chevrolet V8 Big Block	3.760"	Specify
95133	Chevrolet V8 Big Block	4.000"	Specify
95134	Chevrolet V8 Big Block	4.125"	Specify
95135	Chevrolet V8 Big Block	4.250"	Specify
95136	Chevrolet V8 Big Block	4.375"	Specify
95137	Chevrolet V8 Big Block	4.500"	Specify
95138	Chevrolet V8 Big Block	4.562"	Specify
95139	Chevrolet V8 Big Block	4.625"	Specify
95140	Chevrolet V8 Big Block	4.750"	Specify
95141	Chevrolet V8 Big Block	4.875"	Specify
95142	Chevrolet V8 Big Block	5.000"	Specify

All weights are approximate.

Note: Specify rod length to insure proper piston to counterweight clearance.

Note: If you prefer a machined billet crankshaft, specify "C" after crank part number. EN30B material available.

Crankshafts

Big Block Chevrolet V8
366 396 402 427 454 502

LIGHT-WEIGHT

The 4340 NT (non-twist) LightWeight includes standard features like straight-shot oiling, 1/8" radii, heat-treat, teardrop oil holes and "counterweight-correct," plus lightweight profiling, with or without center counter weights, four lightening holes and radius edges. Less drag, more power. 100% American made.

WEIGHT: 65-74 lbs


<i>Part No.</i>	<i>Description</i>	<i>Stroke</i>	<i>Main</i>
LW95130	Chevrolet V8 Big Block	Custom	Specify
LW95132	Chevrolet V8 Big Block	3.760"	Specify
LW95133	Chevrolet V8 Big Block	4.000"	Specify
LW95134	Chevrolet V8 Big Block	4.125"	Specify
LW95135	Chevrolet V8 Big Block	4.250"	Specify
LW95136	Chevrolet V8 Big Block	4.375"	Specify
LW95137	Chevrolet V8 Big Block	4.500"	Specify
LW95138	Chevrolet V8 Big Block	4.562"	Specify
LW95139	Chevrolet V8 Big Block	4.625"	Specify
LW95140	Chevrolet V8 Big Block	4.750"	Specify
LW95141	Chevrolet V8 Big Block	4.875"	Specify
LW95142	Chevrolet V8 Big Block	5.000"	Specify

All weights are approximate.

Note: Specify rod length to insure proper piston to counterweight clearance.


Note: If you prefer a machined billet crankshaft, specify "C" after crank part number.

Specify rod diameter when ordering.

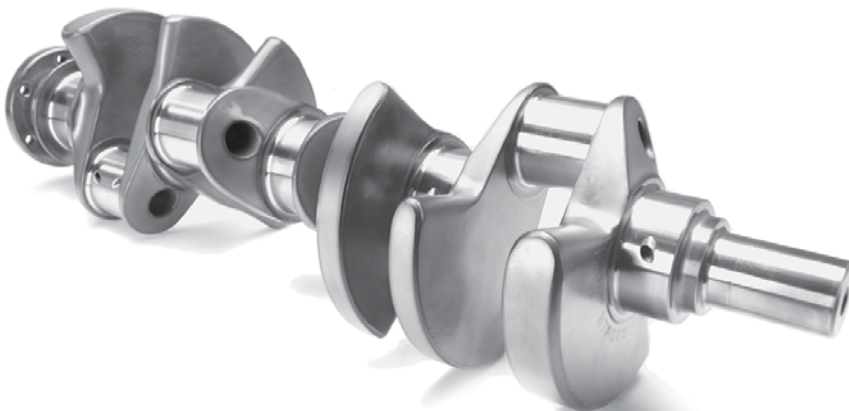

Crankshafts

Big Block Chevrolet V8
366 396 402 427 454 502

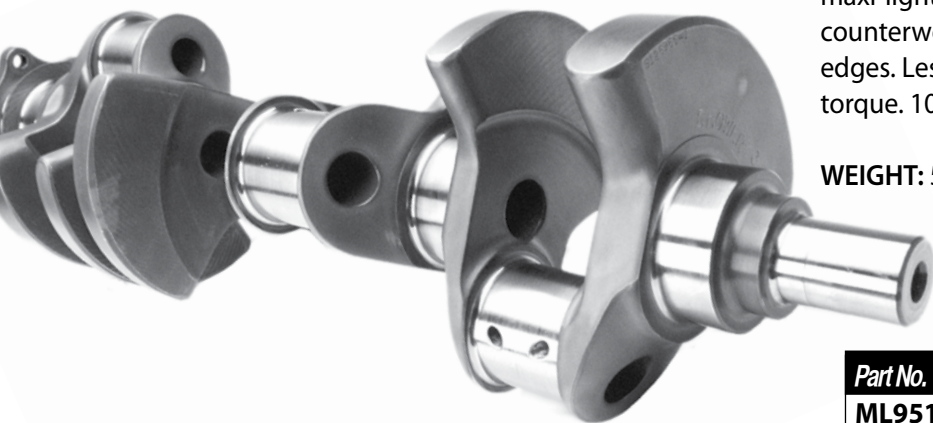

MAXI-LIGHT®

® Maxi-Light is a Registered Trademark of Crower, Inc.

The Maxi-Light includes standard 4340 NT features, maxi-light profiling, pendulum undercutting, center counterweight removal, four lightening holes and radius edges. Less drag and weight increases horsepower and torque. 100% American made.

WEIGHT: 59-64 lbs

Part No.	Description	Stroke	Main
ML95130	Chevrolet V8 Big Block	Custom	Specify
ML95132	Chevrolet V8 Big Block	3.760"	Specify
ML95133	Chevrolet V8 Big Block	4.000"	Specify
ML95134	Chevrolet V8 Big Block	4.125"	Specify
ML95135	Chevrolet V8 Big Block	4.250"	Specify
ML95136	Chevrolet V8 Big Block	4.375"	Specify
ML95137	Chevrolet V8 Big Block	4.500"	Specify
ML95138	Chevrolet V8 Big Block	4.562"	Specify
ML95139	Chevrolet V8 Big Block	4.625"	Specify
ML95140	Chevrolet V8 Big Block	4.750"	Specify
ML95141	Chevrolet V8 Big Block	4.875"	Specify
ML95142	Chevrolet V8 Big Block	5.000"	Specify

ULTRA-LIGHT®

® Ultra-Light is a Registered Trademark of Crower, Inc.

The Ultra-Light Includes standard 4340 NT features, plus ultra-lightweight profiling, pendulum undercutting, center counterweight removal, four lightening holes and radius edges. Smaller O.D. quickens throttle response, reduces stress and wear, creates less drag in oil and increases horsepower and torque. Crower's Ultra-Light delivers all of this without compromising overall strength. 100% American made.

WEIGHT: 58-62 lbs

Part No.	Description	Stroke	Main
UL95130	Chevrolet V8 Big Block	Custom	Specify
UL95132	Chevrolet V8 Big Block	3.760"	Specify
UL95133	Chevrolet V8 Big Block	4.000"	Specify
UL95134	Chevrolet V8 Big Block	4.125"	Specify
UL95135	Chevrolet V8 Big Block	4.250"	Specify

All weights are approximate.

Note: Due to bob-weight considerations some BB Chevrolet Ultra-Light crankshafts must be custom ordered.

Note: Specify rod length to insure proper piston to counterweight clearance.

Note: If you prefer a machined billet crankshaft, specify "C" after crank part number.



Crankshafts

Chevrolet V8 LS Series

STANDARD

Redesigned lightened version of our popular Standard crankshaft. Precision machined from premium 4340 NT forgings. Standard features are straight-shot oiling, jumbo 1/8" radii, heat-treating, teardrop oil holes. "Counterweight-correct" design. This crankshaft can be ordered with or without center counterweights to fit your application. 100% American Made

WEIGHT: 71-83 lbs (Determined by stroke, rod, and main size.)

LIGHT-WEIGHT

The 4340 NT (non-twist) LightWeight includes standard features like straight-shot oiling, 1/8" radii, heat-treat, teardrop oil holes and "counterweight-correct," plus lightweight profiling, with or without center counter weights, four lightening holes and radius edges. Less drag, more power. 100% American made.

WEIGHT: 65-74 lbs

MAXI-LIGHT®

* Maxi-Light is a Registered Trademark of Crower, Inc.

The Maxi-Light includes standard 4340 NT features, maxi-light profiling, pendulum undercutting, center counterweight removal, four lightening holes and radius edges. Less drag and weight increases horsepower and torque. 100% American made.

WEIGHT: 59-64 lbs

ULTRA-LIGHT®

* Ultra-Light is a Registered Trademark of Crower, Inc.

The Ultra-Light Includes standard 4340 NT features, plus ultra-lightweight profiling, pendulum undercutting, center counterweight removal, four lightening holes and radius edges. Smaller O.D. quickens throttle response, reduces stress and wear, creates less drag in oil and increases horsepower and torque. Crower's Ultra-Light delivers all of this without compromising overall strength. 100% American made.

WEIGHT: 58-62 lbs

CHEVROLET LS SERIES CRANKS

All LS Crankshafts are custom made to customer specs. Please call our techs

Part No.	Description	Stroke	Main
95100	Custom Made LS Crank	Custom	Specify



Crankshafts

Ford
V6 Chevrolet & Buick



Ford 460 Crank.

FORD

FORGED - 4340 "Non-Twist" Chromoly Steel

Part No.	Description	Stroke	Main
95185	Ford 302 V8 or SVO Forging	Custom	Specify
LW95185	Ford 302 V8 or SVO Forging	Custom	Specify
ML95185	Ford 302 V8 or SVO Forging	Custom	Specify
UL95185	Ford 302 V8 or SVO Forging	Custom	Specify
95185C	Ford 302 V8 or SVO Billet	Custom	Specify
95186	Ford 351C V8 or SVO Forging	Custom	Specify
LW95186	Ford 351C V8 or SVO Forging	Custom	Specify
ML95186	Ford 351C V8 or SVO Forging	Custom	Specify
UL95186	Ford 351C V8 or SVO Forging	Custom	Specify
95186C	Ford 351C V8 or SVO Billet	Custom	Specify

Note: Specify desired stroke when ordering.
Specify rod journal diameter and width when ordering.




Ford 302-351 Crank.

FORD

BILLET - 4340 Round Chromoly Steel

Part No.	Description	Stroke	Main
95187C	Ford 429-460 V8	Custom	Specify
95187Cx1	Ford 429-460 V8	5.000 & up	Specify
95191C	Ford 427-428 V8	Custom	Specify

Note: Specify desired stroke when ordering.
Specify rod journal diameter and width when ordering.
For LightWeight or Ultra-Light profiling, place "LW" or "UL" in front of part number.

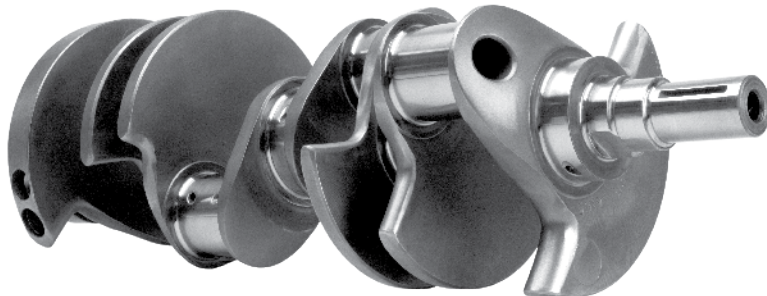


Ford 5.4L Crank

CUSTOM FORD

We can Custom make any crank to meet your specific needs. Provide us your custom specs.

Part No.	Description	Stroke	Main
95204	Custom Crank	Custom	Specify

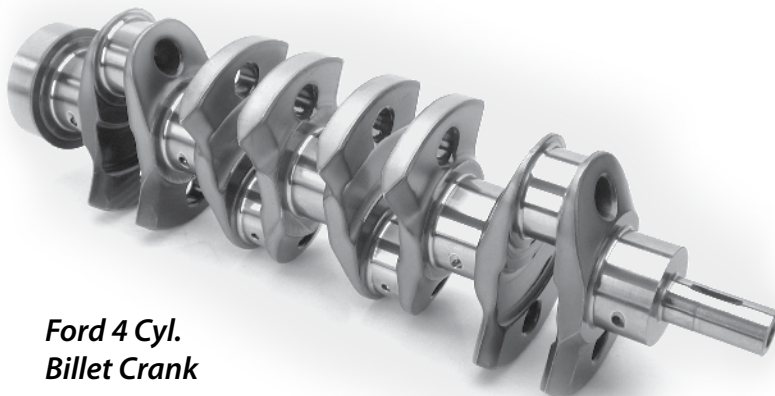

Ford 4 Cyl.
Billet Crank

V6 CHEVY & BUICK

Premium billet 4340 chromoly crankshafts are available for Chevrolet and Buick V6 applications on a custom order basis. Any desired stroke available.

Part No.	Description	Stroke	Main
95151C	Chevy V6 (Billet)	Specify	Specify
95156C	Buick V6 (Billet)	Specify	Specify

Note: Specify rod length to insure proper piston to counterweight clearance.

MOPAR

FORGED - 4340 "Non-Twist" Chromoly Steel

Part No.	Description	Stroke	Main
95160	Mopar 426 Hemi V8	Custom	Specify
95161	Mopar 426 Hemi V8	3.600"	Specify
95162	Mopar 426 Hemi V8	3.750"	Specify
95163	Mopar 426 Hemi V8	3.875"	Specify
95164	Mopar 426 Hemi V8	4.000"	Specify
95165	Mopar 426 Hemi V8	4.125"	Specify
95166	Mopar 426 Hemi V8	4.250"	Specify
95167	Mopar 426 Hemi V8	4.375"	Specify
95168	Mopar 426 Hemi V8	4.500"	Specify
95169	Mopar 426 Hemi V8	4.625"	Specify
95170	Mopar 426 Hemi V8	4.750"	Specify

Note: Specify rod length for proper piston to counterweight clearance.
Balanced or unbalanced specify when ordering.

MOPAR

BILLET - 4340 or EN30B Round Steel

Part No.	Description	EN30B	Stroke	Main
95160C	Mopar 426 Hemi V8	95160EN	Custom	Specify
95161C	Mopar 426 Hemi V8	95161EN	3.600"	Specify
95162C	Mopar 426 Hemi V8	95162EN	3.750"	Specify
95163C	Mopar 426 Hemi V8	95163EN	3.875"	Specify
95164C	Mopar 426 Hemi V8	95164EN	4.000"	Specify
95165C	Mopar 426 Hemi V8	95165EN	4.125"	Specify
95166C	Mopar 426 Hemi V8	95166EN	4.250"	Specify
95167C	Mopar 426 Hemi V8	95167EN	4.375"	Specify
95168C	Mopar 426 Hemi V8	95168EN	4.500"	Specify
95169C	Mopar 426 Hemi V8	95169EN	4.625"	Specify
95170C	Mopar 426 Hemi V8	95170EN	4.750"	Specify
95171C	Mopar 273-340-360 V8	95171EN	Custom	Specify

Note: Specify rod length for proper piston to counterweight clearance.
Balanced or unbalanced specify when ordering.
For LightWeight or Ultra-Light profiling, place "LW" or "UL" in front of part number.

IMPORT/CUSTOM BILLETS & FORGINGS

Crower can machine custom 4340 crankshafts for any application. Call for pricing and availability.


Part No.	Description
95204	Custom 4 cylinder crankshaft (most applications)
95206	Custom 6 cylinder crankshaft (most applications)
95208	Custom 8 cylinder crankshaft (most applications)
95210	Custom 10 cylinder crankshaft (most applications)
95212	Custom 12 cylinder crankshaft (most applications)

Part # LW 95160



Custom Crankshafts

Custom Honda Crank

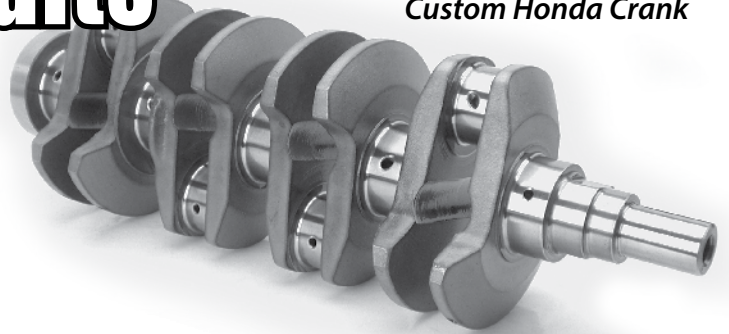


***CROWER Can Make Crankshafts
For Any Application***

Custom Ferrari Crank




Custom Nissan VQ35DE Crank

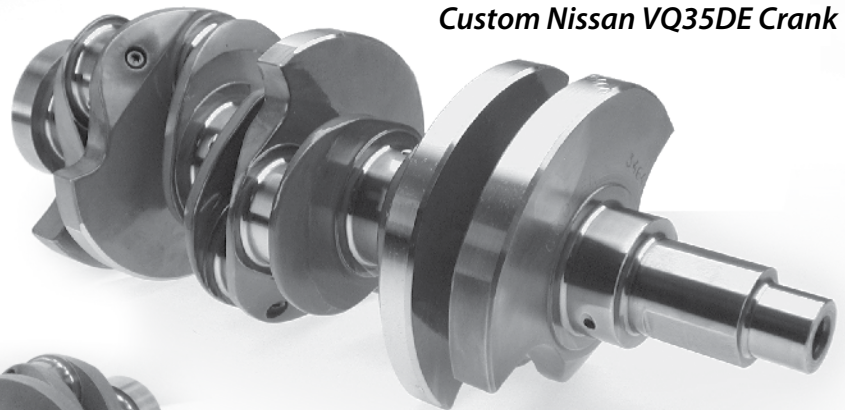

Custom Nissan Patrol Crank



Custom Model D Crank

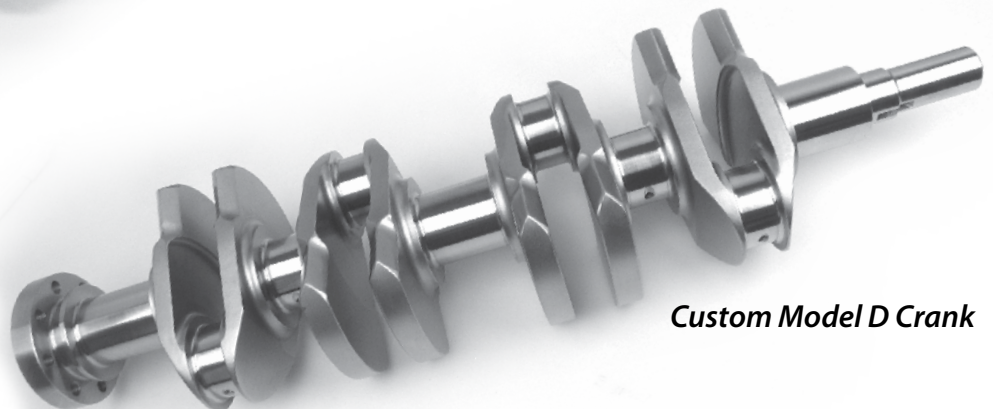

CROWER CUBIC INCH CHART

STROKE

	3.000	3.125	3.250	3.375	3.480	3.500	3.562	3.625	3.750	3.760	3.875	4.000	4.125	4.250	4.375	4.500	4.625	4.750	5.000	5.125
3.8750	283.0	294.8	306.6	318.4	323.0	330.2	336.1	342.0	353.8	354.7	365.6	377.4	389.2	401.0	412.8	424.6	-	-	-	-
3.9375	292.2	304.4	316.6	328.8	339.0	340.9	347.0	353.1	365.3	366.2	377.5	389.7	401.8	414.0	426.2	438.4	-	-	-	-
4.0000	301.6	314.2	326.7	339.3	349.8	351.9	358.1	364.4	377.0	377.9	389.6	402.1	414.7	427.3	439.8	452.4	-	-	-	-
4.0300	306.4	318.8	331.9	344.7	355.1	357.4	363.5	370.2	383.0	383.6	395.7	408.5	421.3	434.0	446.4	459.2	-	-	-	-
4.0625	311.1	324.1	337.0	350.0	360.8	362.9	369.4	375.9	388.9	389.8	401.8	414.8	427.8	440.7	453.7	466.6	-	-	-	-
4.1250	320.7	334.1	347.5	360.8	372.0	374.2	380.9	387.6	400.9	401.9	414.3	427.6	441.0	454.4	467.7	481.1	-	-	-	-
4.1550	325.6	339.2	352.8	366.3	377.5	379.9	386.4	393.5	407.1	407.8	420.6	434.2	447.8	461.4	474.6	488.1	-	-	-	-
4.1875	330.5	344.3	358.1	371.8	383.4	385.6	392.5	399.4	413.2	414.2	426.9	440.7	454.5	468.3	482.0	495.8	-	-	-	-
4.2500	340.5	354.7	368.8	383.0	394.9	397.2	404.3	411.4	425.6	426.6	439.8	454.0	468.1	482.3	496.5	510.7	524.8	539.1	567.5	581.6
4.3125	350.6	365.2	379.8	394.4	406.6	409.0	416.3	423.6	438.2	439.3	452.8	467.4	482.0	496.6	511.2	525.8	540.4	555.0	584.3	598.8
4.3750	360.8	375.8	390.9	405.9	418.5	420.9	428.4	436.0	451.0	452.1	466.0	481.1	496.1	511.1	526.2	541.2	556.0	571.0	601.3	616.3
4.4375	371.2	386.6	402.1	417.6	430.5	433.0	440.8	448.5	464.0	465.2	479.4	494.9	510.4	525.8	541.3	556.8	572.0	587.7	618.6	634.1
4.5000	381.7	397.6	413.5	429.4	442.7	445.3	453.3	461.2	477.1	478.4	493.0	508.9	524.8	540.7	556.7	572.6	588.5	604.4	636.1	652.1
4.5625	392.4	408.7	425.1	441.4	455.1	457.8	466.0	474.1	490.5	491.7	506.8	523.2	539.5	555.9	572.2	588.6	604.9	621.3	653.9	679.5
4.6250	403.2	420.0	436.8	453.6	467.6	470.4	478.8	487.2	504.0	505.3	520.8	537.6	554.4	571.2	588.0	604.8	621.6	638.0	671.9	688.7
4.6875	414.2	431.4	448.7	465.9	480.4	483.2	491.8	500.5	517.7	519.1	535.0	552.2	569.5	586.7	604.0	621.3	638.5	655.7	690.2	707.5
4.7500	425.3	443.0	460.7	478.5	493.3	496.2	505.0	513.9	531.6	533.0	549.3	567.1	584.8	602.5	620.2	637.9	655.6	673.4	708.8	726.5

INDICATES APPLICABLE SMALL BLOCK CHEVROLET C.I.D.

CUBIC INCH FORMULA: BORE x BORE x STROKE x .7854 x NO. of CYLINDERS

Rod & Main Bearings



ROD BEARINGS

Crower high performance rod bearings are quality engine bearings designed to withstand the extreme loads of professionally tuned racing engines. Features high strength trimetal copper-lead material in the load area for superior strength and embedding. Lead overplate provides excellent fatigue strength and superior conformability to compensate for distortion and/or misalignment. Superlative bearing-to-bearing size consistency enables you to "build-in" the exact oil clearance you require, while narrowed and chamfered versions are available for large fillet journals where additional clearance is necessary. If running aluminum rods, Crower has chamfered rod bearings with dowel pin holes.

STANDARD

Part No.	Description
85300	CHEVROLET 283-327 V8
85301	CHEVROLET 302-305-327-350-400 V8
85310	CHEVROLET 396-402-427-454 V8

CHAMFERED

Part No.	Description
85300C	CHEVROLET 283-327 V8
85301C	CHEVROLET 302-305-327-350-400 V8
85310C	CHEVROLET 396-402-427-454 V8

CHAMFERED w/DOWEL PIN HOLE

Part No.	Description
85300CD	CHEVROLET 283-327 V8
85301CD	CHEVROLET 302-305-327-350-400 V8
85310CD	CHEVROLET 396-402-427-454 V8
85330CD	CHRYSLER 426 Hemi V8

Note: Specify standard, .010", .020" or .030" undersized when ordering.



MAIN BEARINGS

Crower high performance main bearings offer professional racers and engine builders the extreme accuracy and bearing-to-bearing consistency required to build an engine that can handle the extreme loads associated with high performance racing. Features high strength copper-lead in the load area for superior strength and embedding. Crower high performance main bearings are designed to deliver improved bearing-to-bore contact for better heat transfer and a reduction in high rpm bearing chatter and or failure. Order chamfered bearings, for use with large fillet journals. A must when running any Crower crank.

STANDARD

Part No.	Description
85400	CHEVROLET 283-327 V8
85401	CHEVROLET 302-305-327-350-400 V8
85402	CHEVROLET 400 V8
85410	CHEVROLET 396-402-427-454 V8

CHAMFERED

Part No.	Description
85400C	CHEVROLET 283-327 V8
85401C	CHEVROLET 302-305-327-350-400 V8
85402C	CHEVROLET 400 V8
85410C	CHEVROLET 396-402-427-454 V8
85430C	CHRYSLER 426 Hemi V8

BEARING SPACER KIT

Part No.	Description
85200	Adapts Chevrolet 350 crank to 400 block includes bearings.

Note: Specify standard, .010", .020" or .030" undersized when ordering.

Connecting Rods

THE CROWEROD DIFFERENCE

An extensive effort in CAD (Computer Assisted Design) & F.E.A (Finite Element Analysis), as well as rigorous dyno and track testing have been expended through perfection of our strongest yet lightest rods available. When you employ a set of genuine Crowerods you do so with the knowledge and peace of mind that each rod will perform flawlessly. That's why they are hands down, the favorite of professional and amateur engine builders throughout the world.

IT'S THE MATERIAL...

While other manufacturers are cutting corners, using inferior or low grade materials, Crower has kept costs down without lowering our standards. Crowerods incorporate only the finest aircraft quality steel and titanium materials. They are heat treated to obtain that perfect balance of strength and durability, to insure the best quality and reliability possible.



AND THE DESIGN

Take a close look at a Crowerod and you'll notice that it is shaped like no other rod in the industry. Every contour is designed to enhance overall strength and reliability at high engine rpm. Crower connecting rods incorporate an "I-beam" design that eliminates pockets of excess material and delivers exceptional longitudinal and horizontal strength. The cap screw design assures true roundness and a positive bearing seat under severe load factors, in which eliminating rod bearing failure. Tolerances are to an exacting ± 0.0001 " of an inch to insure trouble free installation. For those who prefer an "H-beam" design, Crower also offers this style of rod on a custom order basis.

***CROWER, your # 1 source for rods.
CROWER makes rods for
almost any application.***

THE BOTTOM LINE

When you install a set of genuine Crowerods in your high performance engine, the design expertise, material and craftsmanship are working hard to maximize your racing effort. It's the kind of dependability and confidence that can put you in the winner's circle. Crowerods are available for most domestic and foreign applications, as well as motorcycles, industrial, vintage and one of a kind prototypes. Our Crowerod design is often imitated, but never duplicated. For any new enthusiast we have an excellent staff that can help you on any particular design you may want. **Protect your investment by insisting on only genuine Crowerods for your high performance needs.**

"RBT" Steel Billet Connecting Rods

Aircraft quality, 12-point cap screw fastening system provides added security at high rpm.

Crower's all new Radial Beam Technology design ("RBT") is the ultimate connecting rod, often copied by competitors, but never replicated to Crower's engineered standards. The radial shape beam delivers unsurpassed beam support while reducing overall weight for greater throttle response...quicker deceleration into the corner and faster acceleration off the corner.

Drilled and chamfered pin oil hole on all Crowerods provides additional oil at the pin end to prevent galling. The high alloy, aluminum-bronze, one piece bushing delivers long, reliable service.

H11 - Tool Steel bolts rated to 220,000 p.s.i. come standard. For extreme duty, Crower highly recommends the AMS5844 rod bolt upgrade rated to 280,000 p.s.i. for ultimate clamping ability.

Extra strength at the critical web area reduces the big end pinch found in other inferior designs. Big end roundness is paramount for long bearing and connecting service.

The Crower Maxi-Light is a proven performer on the race track. Tapered beam design delivers the strength you need in a lightweight, yet reliable profile.

Hollow dowel alignment fastening system provides positive cap alignment and prevents unwanted cap walk.

Pin boss dynamics are essential when designing a high performance connecting rod. To maintain trouble free operation, Crower beefs up the pin eye area.

RADIAL BEAM TECHNOLOGY ("RBT") MAXI-LIGHT DESIGN

Crower's exclusive "RBT" Maxi-Light design is a revolutionary new beam shape that removes excess material from noncritical stress areas for the lightest, yet strongest connecting rod available on the market. Choose from a wide variety of weight configurations, depending on your individual horsepower and rpm requirements.

AMS5844 ROD BOLT UPGRADE

Crower's AMS5844 rod bolt upgrade is available for all steel billet and titanium rods. Highly recommended for extreme duty rpm and endurance applications. Rated at 280,000 p.s.i., these bolts are corrosion resistant, nonmagnetic and deliver ultimate clamping capabilities for the highest cycle life. Specify desired rod bolt part number when ordering.



Proper bolt torque: Torque rod bolts to 10 ft lbs on both sides, then torque to proper spec with one pull.

Upgrades: 280,000 p.s.i. rod bolts, specify #90842 for 3/8
280,000 p.s.i. rod bolts, specify #90830 for 7/16

"RBT" Steel Billet Connecting Rods

ALSO AVAILABLE IN TITANIUM

RADIAL BEAM TECHNOLOGY MAXI-LIGHT DESIGN

® Maxi-Light is a Registered Trademark of Crower, Inc.

MAXI-LIGHT® 93 SERIES 1

APPROX. WEIGHT: 6.0" @ 495g
HORSEPOWER RANGE: 500+ (oval)
HORSEPOWER RANGE: 550+ (drag)

MAXI-LIGHT® 93 SERIES 2

APPROX. WEIGHT: 6.0" @ 520g
HORSEPOWER RANGE: 600+ (oval)
HORSEPOWER RANGE: 650+ (drag)

MAXI-LIGHT® 93 SERIES 3

APPROX. WEIGHT: 6.0" @ 580g
HORSEPOWER RANGE: 650+ (oval)
HORSEPOWER RANGE: 700+ (drag)

MAXI-LIGHT® 93 SERIES 4

APPROX. WEIGHT: 6.0" @ 605g
HORSEPOWER RANGE: 750+ (oval)
HORSEPOWER RANGE: 800+ (drag)

MAXI-LIGHT® 93 SERIES 5

APPROX. WEIGHT: 6.0" @ 645g
HORSEPOWER RANGE: 850+ (oval)
HORSEPOWER RANGE: 1000+ (drag)

MAXI-LIGHT® 93 SERIES 6

Nitrous \ Turbo blown applications.
Extreme Horsepower.
Call to special order.

* Choose the desired HP Series number
(1, 2, 3, 4, 5, 6).

The original tapered beam connecting rod. Crower's "RBT" (Radial Beam Technology) design combines lightweight performance with proven reliability at extended rpm. CNC machined, vacuum degassed, and premium steel alloy rated to 170,000 p.s.i. The Maxi-Light 93 Series rods are available in six unique designs, depending on intended application, horsepower and rpm considerations. Refer to the column at the left for weights and hp/rpm ratings. Crower pioneered the use of small journal diameters, including the popular Honda bearing size (2.008") and the Quad 4 bearing size (2.015") for reduced friction and increased horsepower. H11 tool steel rod bolts come in standard sizes, 3/8 (#90829) for series 1, 2, & 3, and 7/16 (#90826) for series 4, 5, & 6.

Optional AMS5844 bolt upgrade available (280,000 p.s.i.) for both 3/8 (#90842) & 7/16 (#90830) bolts.



Part No.	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
ML93000B*-8	5.700"	2.125"	.927"	.941"
ML93002B*-8	6.000"	2.125"	.927"	.941"
ML93003B*-8	5.850"	2.125"	.927"	.941"
ML93004B*-8	6.125"	2.125"	.927"	.941"
ML93005B*-8	5.700"	2.225"	.927"	.941"
ML93006B*-8	6.000"	2.225"	.927"	.941"
ML93007B*-8	6.250"	2.225"	.927"	.941"
ML93008B*-8	5.850"	2.225"	.927"	.941"
ML93009B*-8	6.125"	2.225"	.927"	.941"
ML93040B*-8	6.200"	2.125"	.927"	.941"
ML93041B*-8	6.200"	2.225"	.927"	.941"
ML93900B*-8	Custom	2.125"	Custom	Custom
ML93901B*-8	Custom	2.008" Honda	Custom	Custom
ML93902B*-8	Custom	2.015" Quad 4	Custom	Custom
ML93903B*-8	Custom	2.008" IRL	Custom	Custom
ML93904B*-8	Custom	1.890"	Custom	Custom
ML93905B*-8	Custom	2.225"	Custom	Custom

Steel Billet Connecting Rods

Big Block V8
366 396 402 427 454 502



MAXI-LIGHT® DESIGN

* Maxi-Light is a Registered Trademark of Crower, Inc.

Extremely light, yet unbelievably strong, the Maxi-Light is intended for use in moderate horsepower applications, where light rotating mass is a must. Currently the lightest steel billet rod available on the market is for big block Chevrolet. Made with the finest aircraft quality steel and titanium materials. They are heat treated to obtain that perfect balance of durability and strength, including 7/16 (#90826) H-11 tool steel cap screw bolts rated at 220,000 p.s.i. Optional AMS5844 bolt upgrade available (280,000 p.s.i.) for 7/16 bolt (#90830).

MAXI-LIGHT® SERIES 4

APPROX. WEIGHT: 6.386" @ 735g
HORSEPOWER RANGE: 850+ (oval)
HORSEPOWER RANGE: 1000+ (drag)

MAXI-LIGHT® SERIES 5

APPROX. WEIGHT: 6.386" @ 800g
HORSEPOWER RANGE: 1000+ (oval)
HORSEPOWER RANGE: 1500+ (drag)

MAXI-LIGHT® SERIES 6

Nitrous \ Turbo blown applications.
Extreme Horsepower.
Call to special order.

Part No.	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
ML93010B*-8	6.136"	2.325"	.990"	.991"
ML93011B*-8	6.386"	2.325"	.990"	.991"
ML93014B*-8	6.405"	2.325"	.990"	.991"
ML93012B*-8	6.536"	2.325"	.990"	.991"
ML93015B*-8	6.625"	2.325"	.990"	.991"
ML93016B*-8	6.700"	2.325"	.990"	.991"
ML93017B*-8	6.800"	2.325"	.990"	.991"
ML93911B*-8	Custom under 7.250"	2.325"	Custom	.991"
ML93909B*-8	Custom over 7.250"	2.325"	Custom	.991"

* Choose the desired HP Series number (4, 5, or 6).
If Pressed Fit Pin desired, replace "B" after Part No. (ex. ML93010PF4-8).
All weights are approximate.

Steel Billet Connecting Rods

STEEL BILLET ROD WITH 12 POINT CAP SCREW BOLT

Unquestionably the most critical part of a high performance, internal combustion engine is the connecting rod. Connecting rods support the primary tension loads caused by engine operation in each revolution or cycle of the crankshaft. Therefore, it is of utmost importance that the rods you choose to put in your engine are made from only the finest quality materials, manufacturing methods and fastening systems available on the market. For over 30 years, Crower has been meeting this challenge by using the finest quality steel in the production of our steel billet connecting rods. Every rod is fully CNC machined to remove all surface imperfections, 100% magnaflux inspected, checked for hardness and then machined to finalize the exact tolerance within 0.0001" of an inch. Each set of rods is fully balanced and then shot peened to achieve the ultimate in strength and reliability. Choose from premium H-11 tool steel rod bolts or available as an upgrade, AMS5844 bolts.

Drilled and chamfered pin oil hole on Crowerods provides additional oil at pin end to prevent galling. Available in aluminum/bronze bushed or pressed fit pin.

Pin boss dynamics are critical when designing a high performance connecting rod. To maintain trouble-free operation, Crower beefs up the pin eye area.

An assortment of computer designed beams are available for different horsepower and weight requirements.

Crower's RBT beam features a radius beam design for the utmost in strength capabilities while reducing overall weight of the rod for improved throttle response.

CROWER H-BEAM DESIGN

Hollow dowel alignment fastening system provides positive cap alignment and "no hassle" removal.

Integrally threaded beam can be made to accept bolt diameters of 5/16, 3/8 and 7/16.

Deep, double-ribbed cap guarantees superior strength and reliability at high engine rpm.

Only Crower offers you, the engine builder, the choice of "I-Beam or H-Beam" design.

Extremely reliable H-11 tool steel bolts, rated at 220,000 p.s.i. or aircraft quality, AMS5844 alloy bolts that are corrosion resistant and rated at 280,000 p.s.i. Both feature 12-point heads.

AMS5844 ROD BOLT UPGRADE

Crower's AMS5844 rod bolt upgrade is available for all steel billet and titanium rods. Highly recommended for extreme duty rpm and endurance applications. Rated at 280,000 p.s.i., these bolts are corrosion resistant, nonmagnetic and deliver ultimate clamping capabilities for the highest cycle life. Specify desired rod bolt when ordering.

Proper bolt torque: Torque rod bolts to 10 ft lbs on both sides, then torque to proper spec with one pull.

CROWER "H-BEAM" CONNECTING RODS


Although Crower is known mostly for its "I-Beam" rods, we also build a variety of European influenced "H-Beam" designs as well. The thicker cross sections of the H-Beam are better suited for the EDM oil hole that runs the length of the beam delivering added oil to the pin. Weights are equivalent to Crower's standard "I-Beam" billet rod. Specify H-Beam when ordering. For Pressure Fed Pin option specify #90798 after rod part number.

MAXI-LIGHT DESIGN

Steel Billet Connecting Rods

CUSTOM BILLET CONNECTING RODS

Crower is the industry leader in high performance connecting rods. Choose from the largest selection of makes available including Honda/Acura, BMW, Porsche, Ferrari, Nissan, Toyota, Audi, Volkswagen and more. CNC manufactured from premium quality steel and titanium, Crower billet rods are the only choice when running nitrous oxide, high boost or high rpm in your vehicle. Contact your Crower Tech for more information, including availability.

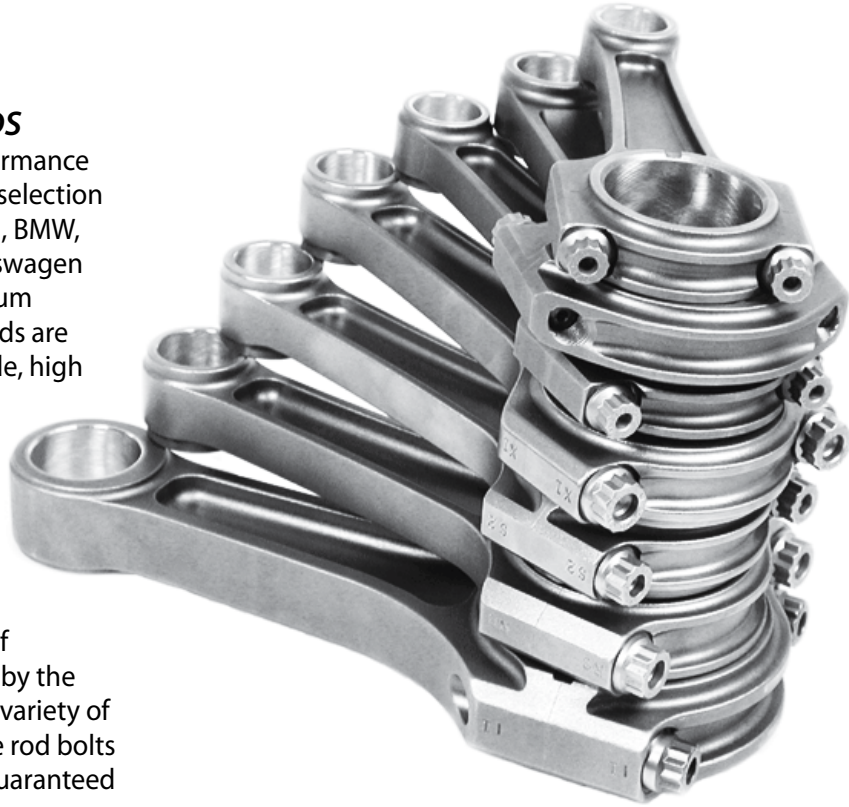

MANUFACTURING


Crower has the manufacturing capability to produce connecting rods for any type of performance requirement. As you can see by the Crowerod availability list, we make a wide variety of rods. All are equipped with cap screw style rod bolts and hollow dowel alignment sleeves for guaranteed ultimate clamping.

MATERIALS

Crowerods incorporates only the finest aircraft quality materials. They are heat treated to obtain that perfect balance of strength and durability.

- Premium Steel and Titanium.
- Uniform hardness developed by heat treatment.
- High fatigue strength is ideal for stressed parts.
- H-11 (220,000 psi) or AMS5844 (280,000 psi) bolts.

Proper bolt torque: Torque rod bolts to 10 ft lbs on both sides, then torque to proper spec with one pull.

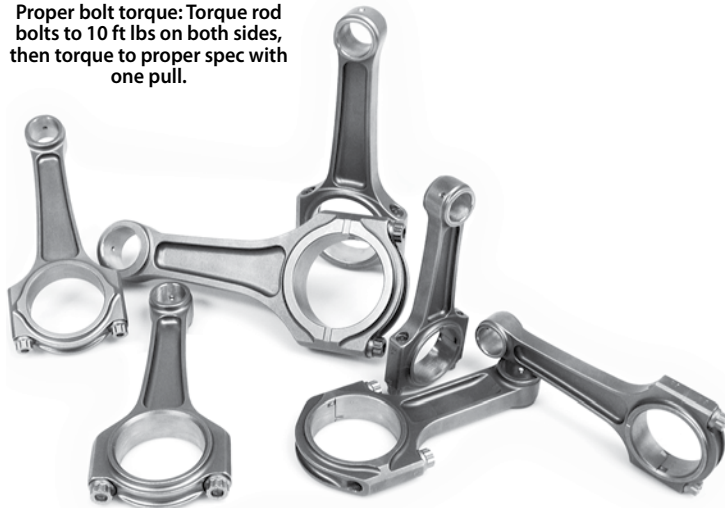

CROWEROD AVAILABILITY

TRUCKS	DOMESTICS	IMPORT	MOTORCYCLES
Chevrolet	Buick	BMW	BSA
Caterpillar	Cadillac	Nissan/Datsun	Ducati
Cummings	Chevrolet	Fiat	Harley Davidson
Dodge	Chrysler	Honda/Acura	Honda
Ford	Dodge	Jaguar	Indian
GMC	Ford	Mercedes Benz	Kawasaki
Jeep	GMC	Mitsubishi	Norton
John Deere	Mopar	Porsche	Royal Infield
Mack	Oldsmobile	Renault	Suzuki
Peterbuilt	Plymouth	Toyota/Lexus	Triumph
White	Pontiac	VW/Audi	Yamaha

BUICK

Part No	Description	Length	B.E. Bore	Pin Dia
B93907B-6	Buick 6 cyl	Custom	Specify	Specify
B93908B-8	Buick V8	Custom	Specify	Specify

If press fit pin is desired, specify "PF" after part number.

CHEVROLET/GM

Part No	Description	Length	B.E. Bore	Pin Dia
B93906B-6	Chevy 6 cyl	Custom	Specify	Specify
B93731B-4	GM Ecotec	5.767"	2.052"	.787"
B93732B-8	GM 2.4L	5.715"	2.015"	.866"
B93036B-8	GM Duramax 6600	6.420"	2.637"	1.358"
B93936B-8	GM Duramax 6600	Custom	Custom	Custom
B93051B-8	LS1 V8	6.100"	2.225"	.944"
B93737B-4	Saturn 99 & up	5.846"	1.976"	.787"
B93736B-4	Saturn 1.9L	5.712"	1.976"	.767"

If press fit pin is desired, specify "PF" after part number.

Steel Billet Connecting Rods

DIESEL RODS

Part No	Description	Length	B.E. Bore	Pin Dia
B93037B-6	Cummins 5.9 L6 Diesel	7.560"	2.874"	1.575"
B93022B-8	Ford 6.0L PowerStroke	6.929"	2.874"	1.340"
B93029B-8	Ford 7.3L PowerStroke	7.130"	2.691"	1.308"
B93036B-8	GM Duramax 6600	6.420"	2.637"	1.358"

FORD

Part No	Description	Length	B.E. Bore	Pin Dia
B93074B-4	2.0L 4 cyl	5.000"	2.165	.944"
B93075B-4	2.3L 4 cyl	5.200"	2.172	.912"
B93974B-4	2.0L-2.3L 4 cyl	Custom	Specify	Specify
B93788B-4	Focus ZX3	5.482"	1.965"	.787"
B93926B-6	Ford 6 cyl	Custom	Specify	Specify
B93024B-8	289-302 V8	5.090"	2.239"	.912"
B93025B-8	289-302 V8	5.155"	2.239"	.912"
B93026B-8	289-302 V8	5.315"	2.239"	.912"
B93925B-8	289-302 V8	Custom	Specify	Specify
B93020B-8	351C V8	5.780"	2.436"	.912"
B93921B-8	351C V8	Custom	Specify	Specify
B93023B-8	351W V8	5.956"	2.426"	.912"
B93923B-8	351W V8	Custom	Specify	Specify
B93018B-8	390-427 V8	6.488"	2.590"	.975"
B93918B-8	390-427 V8	Custom	Specify	Specify
B93027B-8	370-460 V8	6.605"	2.652"	1.040"
B93919B-8	370-460 V8	Custom	Specify	Specify
B93028B-8	5.4L	6.657"	2.239"	.866"

If press fit pin is desired, specify "PF" after part number.

MOPAR

Part No	Description	Length	B.E. Bore	Pin Dia
B93938B-10	Viper/RT10	Specify	Specify	Specify
B93031B-8	273-360 "A" V8	6.120"	2.250"	.984"
B93931B-8	273-360 "A" V8	Custom	Specify	Specify
B93935B-8	361-400 "B" V8	Custom	Specify	Specify
B93033B-8	413-440 "RB" V8	6.766"	2.500"	1.094"
B93934B-8	426 Hemi V8	Custom	Specify	Specify
B93785B-4	Neon/Eclipse 2.0L	5.472"	2.007"	.827"
B93786B-4	SRT- 4/PT Crsr 2.4L	5.945"	2.086"	.866"

Note: All non standard orders require a minimum 50% deposit.
All rods now available in Maxi- Light design. Specify "ML" before p/n

PONTIAC

Part No	Description	Length	B.E. Bore	Pin Dia
B93060B-8	Pontiac V8	6.625"	2.374"	.980"
B93960B-8	Pontiac V8	Custom	Specify	Specify

If press fit pin is desired, specify "PF" after part number.

PORSCHE

Part No	Description	Length	B.E. Bore	Pin Dia
B93784	Porsche	5.354"	2.243"	.866"

If press fit pin is desired, specify "PF" after part number.



OLDSMOBILE

Part No	Description	Length	B.E. Bore	Pin Dia
B93056B-8	Olds V8	6.735"	2.625"	.9806
B93956B-8	Olds V8	Custom	Specify	Specify

If press fit pin is desired, specify "PF" after part number.

STROKER BILLET, & STROKER MID WEIGHT SMALL BLOCK CHEVY

Part No	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
SB93000B-8	5.700"	2.125"	0.927"	0.941"
SB93003B-8	5.850"	2.125"	0.927"	0.941"
SB93002B-8	6.000"	2.125"	0.927"	0.941"
SB93004B-8	6.125"	2.125"	0.927"	0.941"
SB93040B-8	6.200"	2.125"	0.927"	0.941"
SB93900B-8	Custom	2.125"	0.927"	0.941"
SB93005B-8	5.700"	2.225"	0.927"	0.941"
SB93008B-8	5.850"	2.225"	0.927"	0.941"
SB93006B-8	6.000"	2.225"	0.927"	0.941"
SB93009B-8	6.125"	2.225"	0.927"	0.941"
SB93041B-8	6.200"	2.225"	0.927"	0.941"
SB93007B-8	6.250"	2.225"	0.927"	0.941"
SB93905B-8	Custom	2.225"	0.927"	0.941"

If Pressed Fit Pin desired, replace "B" after p/n (ex. SB93000PF-8).

For stroker mid weight, change SM instead of SB.

BILLET BIG BLOCK CHEVY

Part No	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
B93010B-8	6.136"	2.325"	0.990"	0.991"
B93011B-8	6.386"	2.325"	0.990"	0.991"
B93014B-8	6.405"	2.325"	0.990"	0.991"
B93012B-8	6.536"	2.325"	0.990"	0.991"
B93015B-8	6.625"	2.325"	0.990"	0.991"
B93016B-8	6.700"	2.325"	0.990"	0.991"
B93017B-8	6.800"	2.325"	0.990"	0.991"
B93911B-8	Custom	2.325"	0.990"	0.991"
B93909B-8	Custom	2.325"	0.990"	0.991"

If Pressed Fit Pin desired, replace "B" after p/n (ex. B93010PF-8).

Sport Compact Connecting Rods

NISSAN

Part No.	Description	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93771B-6	Patrol 4.5L	6.552"	2.361"	1.290"	.905"	23 1.025"
B93772B-6	Patrol 4.8L	6.436"	2.361"	1.290"	.905"	23 1.025"
B93773B-4	SR20	5.366"	2.008"	.896"	.866"	22 .896"
B93774B-4	240SX -KA24	6.495"	2.086"	.973"	.827"	21 1.000"
B93775B-6	350Z	5.677"	2.165"	.818"	.866"	22 .820"
B93776B-6	300ZX -VG30	6.069"	2.086"	.818"	.866"	22 .858"
B93777B-6	RB26DETT	4.783"	2.008"	.858"	.827"	21 .858"
B93778B-6	CA16DE / CA18DET 16 valve	5.236"	1.890"	.957"	.787"	20 .820"
B93770B-4	Altima QR25	5.632"	1.889"	.896"	.787"	20 .900"
B93779B-6	VR38DETT / GT-R	6.496"	2.323"	.896"	.905"	23 .896"

Proper bolt torque: Torque rod bolts to 10 ft lbs on both sides, then torque to proper spec with one pull.

ROD BOLTS

Part No.	Torque	Dimension
90821-1	45 ft lbs	3/8 x 1.600
90824A-1	30 ft lbs	5/16 x 1.500



GM/CHEVROLET

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93731B-4	GM	Ecotec 2.2L/2.0L	5.767"	2.052"	.943"	.787"	20 .945"
B93732B-4	GM	Ecotec 2.4L	5.715"	2.015"	.913"	.866"	22 .940"
B93736B-4	Saturn	1.9L	5.710"	1.976"	.974"	.787"	20 .975"
B93737B-4	Saturn	99 & up	5.846"	1.976"	.974"	.787"	20 .975"

FORD/MAZDA

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93787B-4	Ford/Mazda	2.0L 93-97	5.322"	2.008"	.860"	.748"	19 .860"
B93788B-4	Ford	2.0L Zetec	5.482"	1.965"	.957"	.787"	20 .800"
B93789B-4	Ford/Mazda	2.3L Duratec	6.093"	2.087"	.859"	.826"	21 .710"
B93791B-4	Mazda	Miata 1.8L	5.234"	1.890"	.860"	.787"	20 .860"

MINI COOPER / BMW

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93077B-4	Mini	01-up	5.180"	1.929"	.916"	.827"	21 .730"

VOLKSWAGEN / AUDI

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93780B-4	VW	1.8 - 2.0L	5.669"	1.992"	.980"	.787"	20 .980"
B93781B-4	VW	2.0L	6.258"	1.992"	.980"	.826"	21 .980"
B93782B-6	VW	VR6	6.460"	2.237"	.784"	.787"	20 .784"

CUSTOM APPLICATIONS

Part No.	Description	Engine	Length	B.E. Bore
B93978-3	Stock Spec	3cyl	Stock Spec	Stock Spec
B93970B-4	Custom	4 cyl	Specify	Specify
B93980B-4	Stock Spec	4 cyl	Stock Spec	Stock Spec
B93971B-6	Custom	6 cyl	Specify	Specify
B93981B-6	Stock Spec	6 cyl	Stock Spec	Stock Spec
B93972B-8	Custom	8 cyl	Specify	Specify
B93973B-12	Custom	12 cyl	Specify	Specify
B93979-3	Custom	3cyl	Specify	Specify

All rods come bushed for floating pin. If press fit pin is desired, replace "B" with "PF" after part number.

Crower Rods, incorporate only the finest aircraft quality materials, heat treated to obtain that perfect balance of strength and durability.

All rods now available in Maxi-Light design. Specify "ML" before p/n



Crower can rebuild your existing Crower connecting rods for extended use by rebushing the pin end, resizing, magna-flux inspection and new rod bolt installation. Send the rods to Crower with contact and payment information.

ROD BUSHINGS

Part No	Application	Dimension
90926-1	B16A, B Series, 4G63 (1g)	.827"
90947-1	D16, D15	.748"
90966-1	H22, H23, 4G63 (2g), Toyota	.866"
90987-1	VW, Toyota	.787"
90922-1	Custom application	Specify

Specify pin end width of your rods when ordering.

Sport Compact Connecting Rods



Crower can rebuild your existing Crower connecting rods for extended use by rebushing the pin end, resizing, magna-flux inspection and new rod bolt installation. Send the rods to Crower with contact and payment information.

All rods now available in Maxi-Light design. Specify "ML" before p/n



Crower Rods, incorporate only the finest aircraft quality materials, heat treated to obtain that perfect balance of strength and durability.

MITSUBISHI/DSM

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93761B-4	DSM	4G63 (1Gen)	5.906"	1.890"	1.115"	.827"	21 1.038"
B93762B-4	DSM	4G63 (2G) / Evo	5.906"	1.890"	1.038"	.866"	22 1.038"
B93763B-6	DSM	6G72 / VR-4	5.548"	2.086"	0.821"	.866"	22 0.835"
B93785B-4	DSM	420A / Neon	5.472"	2.007"	1.031"	.827"	21 1.031"
B93764B-4	DSM	4G93T	5.231"	1.890"	.860"	.748"	19 .860"

TOYOTA

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93724B-4	Toyota	7AFES	5.216	2.008"	.858	.787	20 .865"
B93725B-4	Toyota	Scion XB	5.545"	1.693"	.705"	.708"	18 .705"
B93750B-4	Toyota	2RZ	5.786"	2.205"	1.015"	.9447"	23 1.015"
B93752B-4	Toyota	4AGE	4.803"	1.772"	.859"	.787"	20 .860"
B93753B-4	Toyota	3SGTE	5.433"	2.008"	1.055"	.866"	22 1.055"
B93754B-4	Toyota	5SFE	5.435"	2.166"	1.055"	.866"	22 1.055"
B93755B-4	Toyota	3TC	4.844"	2.008"	1.053"	.866"	22 1.053"
B93756B-6	Toyota	2JZ	5.590"	2.166"	1.020"	.866"	22 1.020"
B93757B-6	Toyota	7M/5M	5.980"	2.166"	.977"	.866"	22 .980"
B93751B-4	Toyota	1ZZ	5.772"	1.851"	.779"	.787"	20 .780"
B93759B-4	Toyota	2ZZ	5.433"	1.891"	.780"	.787"	20 .780"
B93758B-6	Toyota	1FZ-FE LndCrsr	6.063"	2.383"	1.095"	1.023"	26 1.095"
B93760B-8	Toyota	2UZ-FE LndCrsr	5.748"	2.166"	.902"	.866"	22 .830"

SUBARU

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93765B-4	Subaru	EJ25 II - SOHC	5.162"	2.165"	0.842"	.905"	23 0.842"
B93768B-4	Subaru	EJ25 II - DOHC	5.185"	2.165"	0.842"	.905"	23 0.842"
B93767B-4	Subaru	EJ25 Phase I	5.185"	2.008"	0.841"	.905"	23 0.840"
B93766B-4	Subaru	WRX and STi	5.137"	2.165"	0.842"	.905"	23 0.842"

HONDA/ACURA

Part No.	Make	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore (mm)	P.E. Thick
B93726B-4	Acura	D16A (ZC)	5.394"	1.890"	.898"	.748"	19 .716"
B93727B-4	Acura	B17A VTEC	5.208"	1.890"	.935"	.827"	21 .900"*
B93728B-4	Acura	B18A-B/B20B	5.394"	1.890"	.935"	.827"	21 .900"*
B93729B-4	Acura	B18C VTEC	5.433"	1.890"	.858"	.827"	21 .900"*
B93733B-4	Honda	K20A3 5	5.453"	1.890"	.780"	.866"	22 .780"
B93735B-4	Honda	F22C (04-up)	5.893"	2.008"	.938"	.905"	23 .938"
B93738B-4	Acura	K20A	5.473"	2.008"	.780"	.866"	22 .780"*
B93739B-4	Honda	F20C	6.025"	2.008"	.938"	.905"	23 .940"
B93740B-4	Honda	D17A Civic	5.394"	1.890"	.780"	.748"	19 .900"*
B93741B-4	Honda	1.5L Civic	5.275"	1.772"	.899"	.748"	19 .710"
B93742B-4	Honda	1342cc	5.436"	1.693"	.898"	.748"	19 .710"
B93743B-4	Honda	1237cc	5.065"	1.693"	.858"	.669"	17 .710"
B93744B-4	Honda	B16A VTEC	5.287"	1.890"	.935"	.827"	21 .900"*
B93745B-4	Honda	D16 Series	5.394"	1.890"	.898"	.748"	19 .716"
B93746B-4	Honda	K24A	5.985"	2.008"	.780"	.866"	22 .900"*
B93747B-4	Honda	H23/F22	5.580"	2.008"	.935"	.866"	22 .940"*
B93748B-4	Honda	H22 VTEC	5.636"	2.008"	.935"	.866"	22 .940"*
B93749B-4	Honda	F23	5.550"	1.890"	.780"	.866"	22 .780"
B93720B-4	Honda	B16 Stroker	5.276"	1.890"	.935"	.787"	20 .900"
B93721B-4	Honda	B16 Stroker	5.356"	1.890"	.935"	.787"	20 .900"
B93722B-4	Honda	B18/20 Stroker	5.512"	1.890"	.935"	.787"	20 .900"
B93723B-4	Honda	B18/20 Stroker	5.564"	1.890"	.935"	.787"	20 .900"
B93718B-4	Honda	L15A7	5.866"	1.693"	.702"	.708"	18 .702"

* Not OEM thickness.

Motorcycle Connecting Rods



DUCATI

Part No.	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore	P.E. Thick
B93095B-2	996 Corsa	4.881"	1.772"	.863"	.748" / 19mm	.865"
B93078B-2	900SS / 906 / 907	5.118"	1.772"	.863"	.748" / 19mm	.865"
B93079B-2	851 / 748 / 916	4.882"	1.772"	.863"	.826" / 20mm	.860"

HONDA

Part No.	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore	P.E. Thick
B93094B-4	CBR600 F3	3.732"	1.338"	.821"	.669" / 17mm	.600"
B93090B-4	CBR1100XX Blackbird	4.301"	1.693"	.852"	.748" / 19mm	.710"
B93098B-4	CBR1000RR (04-up)	4.084"	1.551"	.855"	.669" / 17mm	.630"

KAWASAKI

Part No.	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore	P.E. Thick
B93072B-4	ZXR750	3.937"	1.456"	.898"	.708" / 18mm	.710"
B93091B-4	ZX9	4.112"	1.496"	.899"	.708" / 18mm	.710"
B93073B-4	ZX10 (04-up)	4.203"	1.477"	.822"	.669" / 17mm	.630"
B93076B-4	ZX11	4.370"	1.536"	.900"	.708" / 18mm	.900"
B93096B-4	ZX12	4.231"	1.575"	.932"	.827" / 21mm	.750"
B93066B-4	ZX14	4.428"	1.614"	.932"	.787" / 18mm	.755"
B93096B-4	ZX14 (09-up)	4.549"	1.614"	.931"		.755"

SUZUKI

Part No.	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore	P.E. Thick
B93071B-4	GSXR 600 (01-up)	3.750"	1.338"	.786"	.590" / 15mm	.635"
B93084B-4	GSXR 1300 Hayabusa(2008)	Call for Specs.				
B93087B-4	GSXR 750 (00-up)	4.060"	1.417"	.786"	.590" / 15mm	.635"
B93086B-4	GSXR 1000	4.370"	1.496"	.786"	.629" / 16mm	.632"
B93088B-4	GSXR 1100 (Watercooled)	4.606"	1.614"	.826"	.787" / 20mm	.826"
B93089B-4	GSXR 1300 Hayabusa	4.704"	1.614"	.826"	.787" / 20mm	.826"
B93093B-4	GSXR 1000	4.370"		.786"	.590" / 15mm	.635"
B93099B-4	GSXR 1300 Hayabusa Heavy Duty / 3/8" Bolts	4.704"	1.614"	.826"	.787" / 20mm	.826"

For titanium rods, replace "B" with "T" in front of p/n on all of rods listed on this page. Ex: T93089B-4

CUSTOM RODS



Available in 4340 Steel or Titanium made for any application

Motorecycle Connecting Rods

Crower motorcycle connecting rods are available for most popular engines and come in your choice of I-Beam or H-Beam design. H-11 alloy 220,000 p.s.i. rod bolts come standard, 280,000 p.s.i. rod bolts upgrade available upon request.



ROD BOLTS

Part No.	P.S.I.	Torque	Dimension
90824A-1	220,000	30 ft lbs	5/16 x 1.500
90845-1	280,000	45 ft lbs	5/16 x 1.500
90821-1	220,000	45 ft lbs	3/8 x 1.600
90842-1	280,000	65 ft lbs	3/8 x 1.600
90847-1	280,000	275 in. lbs	1/4 x 1.375

Proper bolt torque: Torque rod bolts to 10 ft lbs on both sides, then torque to proper spec with one pull.

Note: If using stretch method, Crower recommends .005" to .007".

CUSTOM APPLICATIONS

Part No.	Engine	Description
B93976B-4	4 cyl	Steel Alloy - Any Desired Specifications
T93976B-4	4 cyl	Titanium - Any Desired Specifications
B93975B-2	2 cyl	Steel Alloy - Any Desired Specifications
T93975B-2	2 cyl	Titanium - Any Desired Specifications

Note: To order the upgraded rod bolts (rated to 280,000 psi), refer to the rod bolt part numbers above and add the desired bolt to the end of the rod number. Ex: B93089B-4 / 90845

Note: Titanium rods are available by replacing "B" with "T" before p/n




Crower Rods incorporate only the finest aircraft quality premium steel and titanium materials, heat treated to obtain that perfect balance of strength and durability.

TRIUMPH

Part No.	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore	P.E. Thick
B93130B-2	650 Twin T120	6.500"	1.770"	1.041"	.687"	1.000"
B93131B-2	750 Twin T140	6.000"	1.770"	1.041"	.750"	1.000"
B93132B-3	Triple (95-up)	4.587"	1.732"	.875"	.748" / 19mm	.875"
B93930B-3	3Cyl	Custom	Custom	Custom	Custom	Custom

YAMAHA

Part No.	Engine	C-to-C	B.E. Bore	B.E. Thick	P.E. Bore	P.E. Thick
B93120B-4	R1 (04-up)	4.055"	1.456"	.885"	.669" / 17mm	.630"
B93121B-4	YZF R1	4.350"	1.536"	.819"	.669" / 17mm	.715"
B93122B-4	R6 (01-03)	3.603"	1.299"	.701"	.629" / 16mm	.630"
B93123B-4	YZF R6 (99-00)	3.622"	1.299"	.701"	.629" / 16mm	.700"
B93118B-4	YZF R6 (2009)	3.563"	1.339"	.701"	.590" / 15mm	.591"
B93119B-4	YZF R6 (06-08)	3.563"	1.339"	.702"	.590" / 15mm	.595"
B93124B-4	FJ 1100/1200	4.665"	1.614"	.936"	.708" / 18mm	.800"
B93125B-4	FZR 1000	4.310"	1.536"	.819"	.748" / 19mm	.630"
B93126B-2	V-Max	4.882"	1.614"	.784"	.748" / 19mm	.675"
B93127B-1	XTZ 660 Raptor	5.374"	1.772"	.864"	.866" / 22mm	.866"
B93128B-1	TT 500 / XT 500	5.710"	1.645"	.943"	.826" / 20mm	.945"
B93129B-1	XT 600	5.335"	1.693"	.865"	.866" / 22mm	.865"

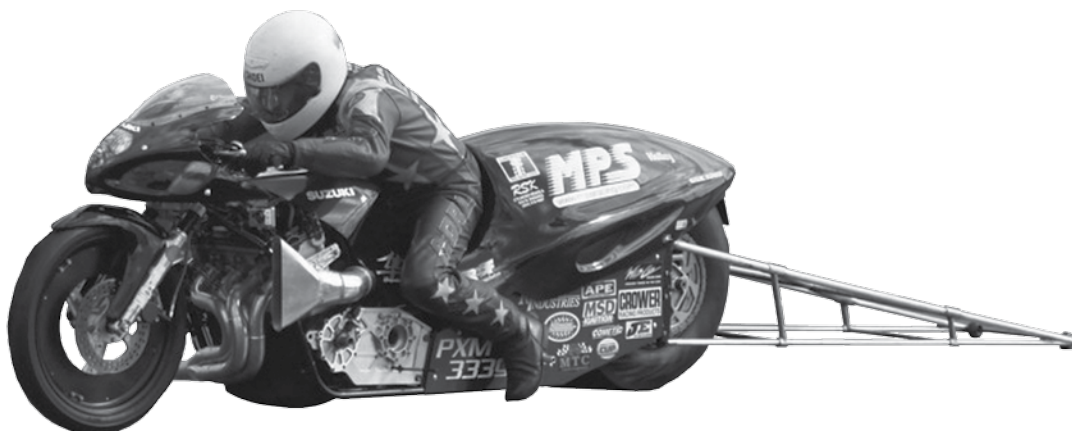

Titanium Connecting Rods

TITANIUM RODS

Crower uses only aerospace quality, titanium in the manufacturing of our billet Crowerods. Titanium has a lower thermal expansion rate than steel and much less than aluminum, which allows the racer to hold closer tolerances within the engine. Crower offers a wide variety of applications. Everything from a 4 cycle motorcycle to a 8" long big block Chevrolet for Pro Modified. All Crower titanium connecting rods are equipped with cap screw bolts and stroker designed to insure plenty of camshaft and case clearance, also reducing weight in noncritical areas.

Special "pressure fed" oiling hole from big end to pin end is available on all titanium and premium steel billet Crowerods. Specify this option when ordering.

All titanium rods come standard with aluminum/bronze bushings.

Crower uses only titanium, with a composition of 6% aluminum and 4% vanadium.

Crower is a complete production facility. Every step of manufacture is performed under rigid quality control standards

Custom rods available in most center to center pin end size and big end I.D.

Special plasma sprayed sides prevents galling that occurs when titanium rubs with steel.

Hollow dowel alignment fastening system provides positive cap alignment and "no hassle" removal.



Extremely reliable H-11 tool steel bolts, rated at 220,000 p.s.i. or aircraft quality, AMS5844 alloy bolts that are corrosion resistant and rated at 285,000 p.s.i. Both feature 12-point heads.

AMS5844 ROD BOLT UPGRADE

Crower now offers a new AMS5844 rod bolt upgrade option available for all steel billet and titanium rods. Highly recommended for extreme duty rpm and endurance applications. Rated at 280,000 p.s.i., these bolts are corrosion resistant, nonmagnetic and deliver ultimate clamping capabilities for the highest cycle life. Be sure and specify upgrade option when ordering.



Titanium Connecting Rods



Chevrolet

Part No.	Description	Length	B.E. Bore	Pin Dia.
ST93000B-8	262-400 V8	5.700"	2.125"	.927"
ST93003B-8	262-400 V8	5.850"	2.125"	.927"
ST93002B-8	262-400 V8	6.000"	2.125"	.927"
ST93900B-8	262-400 V8	Custom	2.125"	.927"
ST93005B-8	262-400 V8	5.700"	2.225"	.927"
ST93008B-8	262-400 V8	5.850"	2.225"	.927"
ST93006B-8	262-400 V8	6.000"	2.225"	.927"
ST93009B-8	262-400 V8	6.125"	2.225"	.927"
ST93007B-8	262-400 V8	6.250"	2.225"	.927"
ST93905B-8	262-400 V8	Custom	2.225"	.927"
ST93010B-8	396-454 V8	6.136"	2.325"	.990"
ST93011B-8	396-454 V8	6.386"	2.325"	.990"
ST93014B-8	396-454 V8	6.405"	2.325"	.990"
ST93012B-8	396-454 V8	6.536"	2.325"	.990"
ST93015B-8	396-454 V8	6.625"	2.325"	.990"
ST93016B-8	396-454 V8	6.700"	2.325"	.990"
ST93017B-8	396-454 V8	6.800"	2.325"	.990"
ST93909B-8	396-454 V8	Custom	(7.250" & over)	.990"
ST93911B-8	396-454 V8	Custom	(under 7.250")	.990"
ST93906B-6	Chevy 6 cyl	Custom	Specify	Specify

All Crower small & big block titanium rods are stroker designed.

Crower Titanium lube #90897 is supplied with all sets of titanium rods.

Approximate Chevrolet V8 Weights

Small Block: 5.700" @ 480g • 6.000" @ 495g • 6.250" @ 548g

Big Block: 6.136" @ 540g • 6.536" @ 625g • 7.650" @ 724g

Ford/Buick

Part No.	Description	Length	B.E. Bore	Pin Dia.
T93974B-4	Ford 2.0L / 2.3L 4 cyl	Custom	Specify	Specify
T93907B-6	Buick 6 cyl	Custom	Specify	Specify
T93908B-8	Buick V8	Custom	Specify	Specify

Mopar

Part No.	Description	Length	B.E. Bore	Pin Dia.
T93934B-8	426 Hemi V8	Custom	Specify	Specify

Import Applications

Part No.	Description	Length	B.E. Bore	Pin Dia.
T93970B-4	4 cyl	Custom	Specify	Specify
T93971B-6	6 cyl	Custom	Specify	Specify
T93972B-8	8 cyl	Custom	Specify	Specify
T93973B-12	12 cyl	Custom	Specify	Specify

Motorcycle (4 Cycle)

Part No.	Description	Length	B.E. Bore	Pin Dia.
T93088B-4	Suzuki GSX	4.606"	1.614"	.787"
T93089B-4	Suzuki Hayabusa	4.704"	1.614"	.787"
T93975B-2	2 cylinder	Custom	Specify	Specify
T93976B-4	4 cylinder	Custom	Specify	Specify

Custom Applications

Part No.	Description	Length	B.E. Bore	Pin Dia.
T93912B-4	Custom 4 cyl	Custom	Specify	Specify
T93913B-6	Custom 6 cyl	Custom	Specify	Specify
T93914B-8	Custom 8 cyl	Custom	Specify	Specify

Crower Moly lube #90897 is supplied with all titanium rods.

Crower has the capability of manufacturing just about any type of titanium connecting rod.



Proper bolt torque: Torque rod bolts to 10 ft lbs on both sides, then torque to proper spec with one pull.

Note: All non standard orders require a minimum 50% deposit.

Sportsman Connecting Rods

3/8 cap screw bolt delivers a lighter big end rotating weight.

Premium grade 3/8 cap screw bolts are rated at 180,000 p.s.i. (#90828)

Drilled and chamfered pin oil hole puts additional oil at the wrist pin to prevent galling.

Single ribbed cap delivers distortion free performance and removes excess weight at a noncritical area.

3/8 thru-bolt (#90805) and nut (#90814) are rated at 180,000 p.s.i.

**SP93206B-8
SB CHEVY 6.000"
CAP SCREW**

**SP91206B-8
SB CHEVY 6.000"
THRU-BOLT**

**SSP93306B-8
SB CHEVY 6.000"
STROKER**

Extra strength at this critical web area reduces the big end pinch found in other aftermarket brands.

The "Crowder" in the beam assures quality and reliability...don't settle for second best.

Separate forging dies for each length (5.7" and 6.0") to establish better grain flow. Lesser designs try and get by with just one die for several lengths, then cut to size.

Stroker design offers more cam-to-rod clearance and is intended for strokes of 3.750" and up. Can also be used in shorter stroke engines if 7/16 bolt is desired.

3/8 aircraft quality, 8740 chromoly steel thru-bolt and nut adheres to O.E.M. stock specs, making it stock legal for all major sanctioning bodies.


Properly engineered small end guarantees long, reliable pin alignment. Available in bushed aluminum/bronze or pressed fit pin.

Stroker design utilizes a larger 7/16 cap screw bolt for ultimate clamping ability (#90846).

Ribbed cap delivers distortion free performance at high horsepower and rpm.

Experienced engine builders know that heavy rods are notoriously hard on the wrist pin area. Crowder reduces unwanted loads by minimizing overall weight.

Sportsman Connecting Rods

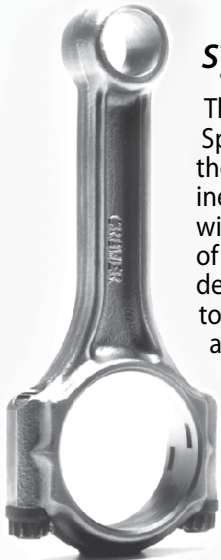

STROKER SPORTSMAN®

* Sportsman is a Registered Trademark of Crower, Inc.

The cap screw designed Sportsman incorporates all of the strength and value of our inexpensive Sportsman model with the clearance advantages of a stroker design. The stroker design allows additional cam-to-rod clearance for strokes above 3.750". Crower Stroker Sportsman's are forged from high strength alloy and feature extremely reliable 7/16 8740 steel alloy cap screw bolts (180,000 p.s.i.). Proven lightweight design (under 600g).

APPROX. WEIGHT: 5.7" @ 595g • 6.0" @ 635g

HORSEPOWER RANGE: 500

RPM RANGE: 8200

TORQUE SPECS: 75 foot lbs.

Part No.	Engine	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
SSP93300B-8	SB Chevy	5.700"	2.125"	.927"	.941"
SSP93302B-8	SB Chevy	6.000"	2.125"	.927"	.941"
SSP93303B-8	SB Chevy	6.125"	2.125"	.927"	.941"
SSP93305B-8	SB Chevy	5.700"	2.225"	.927"	.941"
SSP93306B-8	SB Chevy	6.000"	2.225"	.927"	.941"
SSP93307B-8	SB Chevy	6.125"	2.225"	.927"	.941"

If Pressed Fit Pin desired, replace "B" after p/n (ex. SSP93300PF-8).



SPORTSMAN® CAP SCREW

* Sportsman is a Registered Trademark of Crower, Inc.

Features a 3/8 cap screw design for easier cap removal and placement. The new fastening system features 8740 steel alloy bolts (180,000 p.s.i.) that thread directly into the rod fork. Fully CNC machined steel. Crower Sportsman rods are the lighter, yet stronger alternative to factory "pinks." Installs without the need of an expensive balance job.

APPROX. WEIGHT: 5.7" @ 585g • 6.0" @ 625g

HORSEPOWER RANGE: 500

RPM RANGE: 8200

TORQUE SPECS: 45 foot lbs.

Part No.	Engine	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
SP93200B-8	SB Chevy	5.700"	2.125"	.927"	.941"
SP93202B-8	SB Chevy	6.000"	2.125"	.927"	.941"
SP93203B-8	SB Chevy	6.125"	2.125"	.927"	.941"
SP93205B-8	SB Chevy	5.700"	2.225"	.927"	.941"
SP93206B-8	SB Chevy	6.000"	2.225"	.927"	.941"
SP93207B-8	SB Chevy	6.125"	2.225"	.927"	.941"
SP93270B-8	Chevy LS1	6.100"	2.225"	.927"	.944"
SP93271B-8	Chevy LS1	6.100"	2.225"	.944"	.944"
SP93273B-8	Chevy LS1	6.125"	2.225"	.927"	.944"
SP93272B-8	Chevy LS1	6.125"	2.225"	.944"	.944"
SP93208B-4	Chevy II 4 cyl.	5.700"	2.125"	.927"	(set/4)
SP93209B-4	Chevy II 4 cyl.	6.000"	2.125"	.927"	(set/4)
SP93210B-6	Chevy 6 cyl.	5.700"	2.125"	.927"	(set/6)
SP93211B-6	Chevy 6 cyl.	6.000"	2.125"	.927"	(set/6)

If Pressed Fit Pin desired, replace "B" after p/n (ex. SP93200PF-8).

For Cosworth Vega, use #SP93208B-4



SPORTSMAN® THRU-BOLT

* Sportsman is a Registered Trademark of Crower, Inc.

First introduced back in 1987, the Crower Sportsman rod was the original high performance stock replacement rod.

Features traditional thru-bolt and nut fasteners for stock legal classes. All Sportsman aircraft quality rods are forged from two separate dies, each dedicated to a specific length (5.7"/6.0"). This forms a more uniform molecular grain flow for a stronger, more reliable rod than other brands using one die for several lengths, then cutting to size. Includes 3/8 8740 bolts and nuts (180,000 p.s.i.).

APPROX. WEIGHT: 5.7" @ 585g • 6.0" @ 625g

HORSEPOWER RANGE: 550

RPM RANGE: 8200

TORQUE SPECS: 50 foot lbs. w/oil

Part No.	Engine	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
SP91200B-8	SB Chevy	5.700"	2.125"	.927"	.941"
SP91202B-8	SB Chevy	6.000"	2.125"	.927"	.941"
SP91203B-8	SB Chevy	6.125"	2.125"	.927"	.941"
SP91205B-8	SB Chevy	5.700"	2.225"	.927"	.941"
SP91206B-8	SB Chevy	6.000"	2.225"	.927"	.941"
SP91207B-8	SB Chevy	6.125"	2.225"	.927"	.941"
SP91208B-4	Chevy II 4 cyl.	5.700"	2.125"	.927"	(set/4)
SP91209B-4	Chevy II 4 cyl.	6.000"	2.125"	.927"	(set/4)
SP91210B-6	Chevy 6 cyl.	5.700"	2.125"	.927"	(set/6)
SP91211B-6	Chevy 6 cyl.	6.000"	2.125"	.927"	(set/6)

If Pressed Fit Pin desired, replace "B" after p/n (ex. SP91200PF-8).

Sportsman Connecting Rods

APPROXIMATE WEIGHT: 6.536" @ 830g • 6.800" @ 860g
HORSEPOWER RANGE: 1000+
RPM RANGE: 8500
TORQUE SPECS: 75 foot lbs.

Part No.	Engine	C-to-C	B.E. Bore	P.E. Bore
SP93415B-8	396-454 Chevy	6.536"	2.325"	.990"
SP93416B-8	396-454 Chevy	6.625"	2.325"	.990"
SP93417B-8	396-454 Chevy	6.700"	2.325"	.990"
SP93418B-8	396-454 Chevy	6.800"	2.325"	.990"
SP93419B-8	400-455 Pontiac	6.625"	2.374"	.980"

If Pressed Fit Pin desired, replace "B" after p/n (ex. SP93410PF-8).

WEIGHT: 5.090" @ 560g • 5.155" @ 580g
HORSEPOWER RANGE: 500
RPM RANGE: 8200
TORQUE SPECS: 45 foot lbs. w/oil

Part No.	Engine	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
SP91224B-8	302	5.090"	2.239"	.912"	.832"
SP91225B-8	302	5.155"	2.239"	.912"	.832"
SP91226B-8	302	5.315"	2.239"	.912"	.832"
SP91227B-8	302	5.090"	2.225"	.927"	.941"
SP91228B-8	302	5.155"	2.225"	.927"	.941"
SP91229B-8	302	5.315"	2.225"	.927"	.941"
SP91230B-4	2.0L	5.000"	2.165"	.944"	1.010"
SP91235B-4	2.0L	5.700"	2.165"	.927"	1.010"
SP91236B-4	2.0L	5.700"	2.125"	.927"	1.010"
SP91231B-4	2.3L	5.200"	2.172"	.912"	.990"
SP91232B-4	2.3L	5.400"	2.172"	.912"	.990"
SP91233B-4	2.3L	5.500"	2.172"	.912"	.990"
SP91234B-4	2.3L	5.700"	2.172"	.927"	.990"
SP91237B-4	2.3L	5.700"	2.125"	.927"	.990"
SP91220B-8	Custom 8 cylinder application (set/8)				
SP91221B-4	Custom 4 cylinder application (set/4)				

If Pressed Fit Pin desired, replace "B" after p/n (ex. SP91224PF-8). All weights are approximate.

SP91224 - Lt Model Stock / SP91225 - Early Model Stock
 SP91231 - Stock 2300cc
 .832" - Ford width, .941" - Chevy width

APROX. WEIGHT: 5.7" @ 625g • 6.0" @ 647g
HORSEPOWER RANGE: 500
RPM RANGE: 8200
TORQUE SPECS: 45 foot lbs.

Part No.	Engine	C-to-C	B.E. Bore	P.E. Bore	B.E. Width
SP93230B-4	2.0L	5.000"	2.165"	.944"	1.010"
SP93231B-4	2.3L	5.200"	2.172"	.912"	.990"
SP93232B-4	2.3L	5.400"	2.172"	.912"	.990"
SP93233B-4	2.3L	5.500"	2.172"	.912"	.990"
SP93234B-4	2.3L	5.700"	2.172"	.927"	.990"
SP93235B-4	2.0L	5.700"	2.165"	.927"	1.010"
SP93236B-4	2.0L	5.700"	2.125"	.927"	1.010"
SP93237B-4	2.3L	5.700"	2.125"	.927"	.990"
SP93238B-4	2.3L	6.000"	2.172"	.927"	.990"

If Pressed Fit Pin desired, replace "B" after p/n (ex. SP93230PF-4).
 SP93230B-4 is SCCA legal

BIG BLOCK SPORTSMAN®

* Sportsman is a Registered Trademark of Crower, Inc.

The big block version of our popular Sportsman design, at an economical price. Available for both Big Block Chevrolet and Pontiac applications. Features 7/16 high strength steel alloy cap screw bolts rated at 180,000 p.s.i. for unrivaled strength.



FORD SPORTSMAN®

* Sportsman is a Registered Trademark of Crower, Inc.

A Ford version of our extremely popular 4340 Sportsman high performance rod. Forged from USA made 4340 chromoly steel, these rods come standard with aircraft quality, 3/8 bolts (8740 material) and nuts rated to 180,000 p.s.i.



FORD SPORTSMAN®

* Sportsman is a Registered Trademark of Crower, Inc.

Crower offers the Ford Sportsman for the 2.0L & 2.3L Ford in a cap screw design. Forged from the best aircraft quality steel. Ford Sportsman's come standard with aircraft quality 3/8 8740 steel alloy cap screw bolts rated at 180,000 p.s.i.



For rod bushing specs. see pg. 35

Rod Bolts & Nuts

ROD BOLTS

Available in three unique styles, depending on your rod design and horsepower requirement. All Crower Sportsman feature high strength steel alloy bolts (180,000 p.s.i.), while all Crower steel billet and titanium rods come standard with H-11 tool steel bolts (220,000 p.s.i.). But for extreme rpm and endurance applications, Crower offers the new AMS5844 bolt (285,000 p.s.i.) available as an upgrade option. Both feature a 12-point head and rolled fillets, thread rolled after heat-treat. To determine which bolts are required for a particular rod, contact Crower. Sold by the piece or set. Bolt lengths are measured from under the head to the end of the threaded portion.



ROD NUTS

Crower offers two grades of quality rod nuts. The H-11 tool steel nuts are rated at 220,000 p.s.i., while the high strength steel alloy nuts are rated at 180,000 p.s.i. Sold separately, by the piece.



Part No.	Description	Dimension
90811-1	Billet or Forged Rods	7/16
90813-1	Billet Rods	11/32
90814-1	Billet & Sportsman Rods , 12-point Alloy	3/8

STRETCH GAUGE

Crower highly recommends using a stretch gauge to tighten rod bolts to their recommended stretch figures. This tool will provide accurate and repeatable results every time if used correctly. Includes dial indicator, fixture and instructions.



Part No.	Description
90700	Rod bolt stretch gauge indicator

ALIGNMENT SLEEVES

Crower hollow dowel connecting rod alignment sleeves are precision ground from high grade alloy. Sold by the piece.

Part No.	Description	Dimension
90850-1	Rod alignment sleeve (1 only)	5/16
90851-1	Rod alignment sleeve (1 only)	3/8
90852-1	Rod alignment sleeve (1 only)	7/16
90854-1	Rod alignment sleeve (1 only)	1/4
90855-1	Rod alignment sleeve (1 only)	1/2

ARP ULTRA TORQUE LUBE

In order to achieve proper preload during rod bolt installation, it is important to use the lubricant that is recommended for that particular bolt and rod combination.

- Steel rods with 8740 bolts and Steel rods with H-11 or upgraded AMS5844 bolts must use ARP Ultra-Torque Lube (#90894).
- Titanium rods with H-11 or AMS5844 bolts must use special Crower titanium lube (#90897).

Part No.	Description
90894	ARP Ultra Torque Lubricant 1/2 oz. tube

Note: Crower #90898 is same as Loctite #51609



Bushings

ROD BUSHINGS

Crower uses premium aluminum-bronze one piece billet bushings in all of the rods we manufacture. These high quality bushings are sold separately, by the piece.



Part Number	Wrist Pin	Rod Pin Size	Bushing O.D.	Final Rod Size
90991	.4907"	.547"	.550"	.4914"
90951	.5512"	.607"	.610"	.5519"
90959	.5905"	.647"	.650"	.5912"
90924	.6246"	.687"	.690"	.6253"
90929	.6299"	.687"	.690"	.6306"
90969	.6693"	.737"	.740"	.6700"
90988	.6883"	.747"	.750"	.6890"
90908	.7087"	.777"	.780"	.7094"
90928	.7283"	.787"	.790"	.7290"
90947	.7480"	.817"	.820"	.7487"
90950	.7500"	.817"	.820"	.7507"
90957	.7576"	.817"	.820"	.7583"
90906	.7663"	.827"	.830"	.7670"
90967	.7676"	.827"	.830"	.7683"
90987	.7874"	.857"	.860"	.7881"
90989	.7896"	.857"	.860"	.7903"
90979	.7913"	.857"	.860"	.7920"
90970	.8002"	.862"	.865"	.8009"
90911	.8122"	.877"	.880"	.8129"
90926	.8268"	.897"	.900"	.8275"
90966	.8622"	.932"	.935"	.8669"
90976	.8752"	.937"	.940"	.8759"
90901	.9009"	.967"	.970"	.9016"
90904	.9046"	.967"	.970"	.9053"
90905	.9055"	.967"	.970"	.9062"

Part Number	Wrist Pin	Rod Pin Size	Bushing O.D.	Final Rod Size
90912	.9122"	.979"	.982"	.9129"
90927*	.9272"	.994"	.997"	.9279"
90927N	.9272"	.979"	.982"	.9279"
90930	.9308"	.979"	.982"	.9315"
90937	.9375"	.997"	1.000"	.9328"
90939	.9398"	.997"	1.000"	.9405"
90944	.9447"	.997"	1.000"	.9454"
90977	.9678"	1.027"	1.030"	.9685"
90975	.9752"	1.039"	1.042"	.9759"
90980	.9802"	1.039"	1.042"	.9809"
90984	.9842"	1.039"	1.042"	.9849"
90900	.9998"	1.067"	1.070"	1.0005"
90923	1.0236"	1.087"	1.090"	1.0243"
90931	1.0306"	1.107"	1.110"	1.0313"
90940	1.0402"	1.107"	1.110"	1.0409"
90964	1.0639"	1.122"	1.125"	1.0646"
90994	1.0939"	1.152"	1.155"	1.0946"
90925	1.1253"	1.182"	1.185"	1.1260"
90948	1.2463"	1.307"	1.310"	1.2470"
90938	1.3080"	1.367"	1.370"	1.3087"
90933	1.3385"	1.422"	1.425"	1.3392"
90903	1.3582"	1.437"	1.440"	1.3590"
90962	1.6243"	1.762"	1.770"	1.6250"
90909	1.5748"	1.672"	1.675"	1.5753"

Note: Custom orders available, specify bore, pin dia and length. Customer needs to specify width or overall length.

CUSTOM ROD BUSHINGS

Part Number	Bushing O.D.
90922X000	up to 1.099"
90922X100	1.100" to 1.199"
90922X200	1.200" to 1.299"
90922X300	1.300" to 1.399"
90922X400	1.400" to 1.499"
90922X500	1.500" to 1.599"
90922X600	1.600" to 1.699"

Rod Bolt Stretch & Torque Specs

Connecting Rod Bolt Specification			Steel Connecting Rods				Titanium Connecting Rods		
Part #	Diameter x U.H.Length	PSI	Material	Assembly Lubricant	Bolt Stretch	Torque	Assembly Lubricant	Bolt Stretch	Torque
90847	1/4" x 1.375"	280,000	AMS	Crower #90894 *	.005"-.007"	275 in lbs	Crower Lube #90897	.005"-.007"	240 in lbs
90817	5/16" x 1.500"			Crower #90894 *	.005"-.007"	25 ft lbs	Crower Lube #90897	.005"-.007"	25 ft lbs
90824	5/16" x 1.500"	220,000	H-11	Crower #90894 *	.005"-.007"	30 ft lbs	Crower Lube #90897	.005"-.007"	35 ft lbs
90824A	5/16" x 1.500"	220,000	ARP2000	Crower #90894 *	.005"-.007"	30 ft lbs	Crower Lube #90897	.005"-.007"	25 ft lbs
90845	5/16" x 1.500"	280,000	AMS	Crower #90894 *	.005"-.007"	40 ft lbs	Crower Lube #90897	.005"-.007"	35 ft lbs
90844	5/16" x 1.500"			Crower #90894 *	.005"-.007"	45 ft lbs	Crower Lube #90897	.005"-.007"	35 ft lbs
90806	11/32" x 1.940"			20W/50 Motor Oil	.004"-.006"	35 ft lbs			
90821	3/8 x 1.600"	220,000	ARP2000	Crower #90894*	.005"-.007"	45 ft lbs	Crower Lube #90897	.005"-.007"	45 ft lbs
90818	3/8" x 1.600"	220,000	H-11	Crower #90894 *	.005"-.007"	45 ft lbs	Crower Lube #90897	.005"-.007"	50 ft lbs
90819	3/8" x 1.600"	220,000	H-11	Crower #90894 *	.004"-.006"	45 ft lbs	Crower Lube #90897	.005"-.007"	50 ft lbs
90827	3/8" x 1.600"	220,000	H-11	Crower #90894 *	.005"-.007"	45 ft lbs	Crower Lube #90897	.005"-.007"	50 ft lbs
90828	3/8" x 1.600"	180,000	8740	Crower #90894 *	.005"-.007"	45 ft lbs			
90842	3/8" x 1.600"	280,000	AMS	Crower #90894 *	.005"-.007"	65 ft lbs	Crower Lube #90897	.005"-.007"	50 ft lbs
90843	3/8 x 1.600"			Crower #90894 *	.005"-.007"	65 ft lbs	Crower Lube #90897	.005"-.007"	50 ft lbs
90805	3/8" x 1.920"			20W/50 Motor Oil	.004"-.006"	50 ft lbs			
90848	7/16" x 1.400"	180,000	8740	Crower #90894 *	.005"-.007"	75 ft lbs			
90846	7/16" x 1.440"	180,000	8740	20W/50 Motor Oil	.005"-.007"	75 ft lbs			
90826	7/16" x 1.540"	220,000	H-11	Crower #90894 *	.005"-.007"	75 ft lbs	Crower Lube #90897	.005"-.007"	75 ft lbs
90830	7/16" x 1.540"	280,000	AMS	Crower #90894 *	.005"-.007"	95 ft lbs	Crower Lube #90897	.005"-.007"	95 ft lbs
90826A	7/16" x 1.550"	220,000	ARP2000	Crower #90894 *	.005"-.007"	75 ft lbs	Crower Lube #90897	.005"-.007"	65 ft lbs
90823	7/16" x 1.650"	220,000	H-11	Crower #90894 *	.005"-.007"	75 ft lbs	Crower Lube #90897	.005"-.007"	75 ft lbs
90833	7/16" x 1.650"	280,000	AMS	Crower #90894 *	.005"-.007"	95 ft lbs	Crower Lube #90897	.005"-.007"	95 ft lbs
90802	7/16" x 1.700"			20W/50 Motor Oil	.004"-.006"	65 ft lbs			
90825	7/16" x 1.700"	220,000	H-11	Crower #90894 *	.005"-.007"	75 ft lbs	Crower Lube #90897	.005"-.007"	75 ft lbs
90831	7/16" x 1.700"	280,000	AMS	Crower #90894 *	.005"-.007"	95 ft lbs	Crower Lube #90897	.005"-.007"	95 ft lbs
90820	7/16" x 1.800"	220,000	H-11	Crower #90894 *	.005"-.007"	75 ft lbs	Crower Lube #90897	.005"-.007"	75 ft lbs
90829	7/16" x 1.800"	180,000	8740	Crower #90894 *	.005"-.007"	75 ft lbs			
90832	7/16" x 1.800"	280,000	AMS	Crower #90894 *	.005"-.007"	95 ft lbs	Crower Lube #90897	.005"-.007"	95 ft lbs
90803	7/16" x 1.940"			20W/50 Motor Oil	.004"-.006"	65 ft lbs			
90800	7/16" x 2.000"			Crower #90894 *	.005"-.007"	70 ft lbs			
90807	7/16" x 2.070"			20W/50 Motor Oil	.004"-.006"	65 ft lbs			
90804	7/16" x 2.320"			20W/50 Motor Oil	.004"-.006"	65 ft lbs			
90809	1/2" x 2.500"		ARP	Crower #90894*	.005"-.007"	95 ft lbs			
90849	1/2" x 1.885"		ARP	Crower #90894*	.005"-.007"	110 ft lbs			

* Note: Crower #90894 is ARP Ultra Torque Lubricant. Not all bolts listed are currently available.

Proper bolt torque: Torque rod bolts to 10 ft lbs on both sides, then torque to proper spec with one pull.

- *Thru-bolt torque specs based on steel rods using motor oil.
- *Cap Screw 8740 torque specs based on steel rods using oil
- *Cap Screw H-11 torque specs based on steel rods using anti-seize.
- *AMS5844 torque specs based on steel rods using anti-seize.
- * Bolts for titanium rods require special lubricant available from Crower.

Specify -8 after part number if four cylinder, -12 if six or -16 in eight cyl.
Note: If using stretch method, Crower recommends .005" to .007".

Rod Bolt Stretch & Torque Specs

The following information is vital for the proper connecting rod assembly installation:

STEP 1: Your Crower connecting rods came with a connecting rod specification tag. Check the tag to find the rod bolt part number used to fasten your connecting rods. Rod bolt length listed here is the measurement from under the head to the end.

STEP 2: Use the chart to determine the recommended lubricant, rod bolt stretch and torque amounts.

IMPORTANT DO NOT EXCEED THE TORQUE AMOUNT SHOWN FOR EACH BOLT PART NUMBER AND ITS RECOMMENDED LUBRICATION (If you are using lubrication other than shown, a stretch gauge must be used)

STEP 3: Taking the necessary precautions to protect the rod surfaces, secure the rod in a vise and leave the cap free to float. If the rod is titanium, take extra precautions to avoid damaging the plasma coating on the big end sides of the rod.

STEP 4: Apply a liberal amount of the recommended assembly lubricant to the bolt's threads and under the head of the bolt (the underside of the bolt's head).

STEP 5: (Use Stretch Method to determine exact torque) Since it is near impossible to use a stretch gauge when installing rods inside the motor, please use the following method to determine the exact torque that your wrench will read when the correct stretch is achieved. Using the above table, torque the rod bolts to achieve the required amount of stretch for your application. Record this torque spec as this is the exact torque spec that you will be using to install your rods in the motor.

STEP 6: (Torquing the bolt) When tightening bolts, especially in titanium rods it is best to torque all bolts to 20% of the total required torque and then in one smooth motion torque the bolt to the final torque spec without stopping.

Torquing your rod bolts without pre-determining the required torque to achieve the correct rod bolt stretch is not recommended. However if this is the only tightening method available to you, DO NOT EXCEED THE TORQUE AMOUNT INDICATED FOR YOUR BOLTS.

NOTE: Your Crowerods are totally rebuildable. We can make most used rods like new again, replace bolts, replace bushings, resize them, respray the plasma on Titanium rods and freshen them up as needed. If you have any questions as to the durability and application of your rods or whether it is time to rebuild or replace them, please call our tech line at (619) 661-6477 or email us at rods@crower.com


Crowerod Form

Quantity Desired: _____

- I-Beam H-Beam
- Premium Steel 94 Series Titanium


FAX COMPLETED FORM TO 619-661-6466
 EMAIL: engr@crower.com

PHOTO COPY

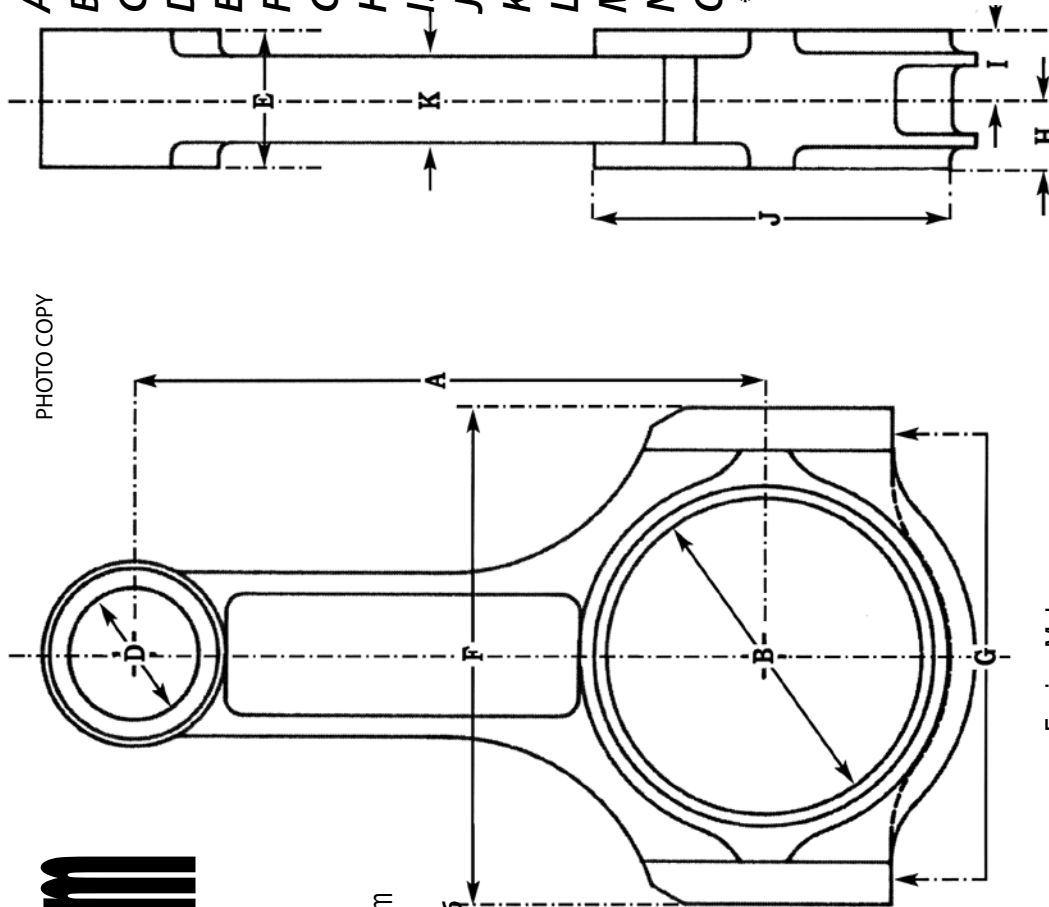

- A.* _____ Center to Center Length
- B.* _____ Big End Housing Bore
- C.* _____ Big End Width
- D.* _____ Pin End Bore
- E.* _____ Pin End Width
- F. _____ Overall BE Width
- G. _____ Bolt to Bolt Width
- H. _____ BE Offset
- I. _____ BE Offset
- J. _____ Big End Ring Diameter
- K. _____ Beam Width
- L. _____ Tang Positioning
- M. _____ Tang Width
- N. _____ Tang Dimension
- O. _____ Rib to Rib Width

*Required

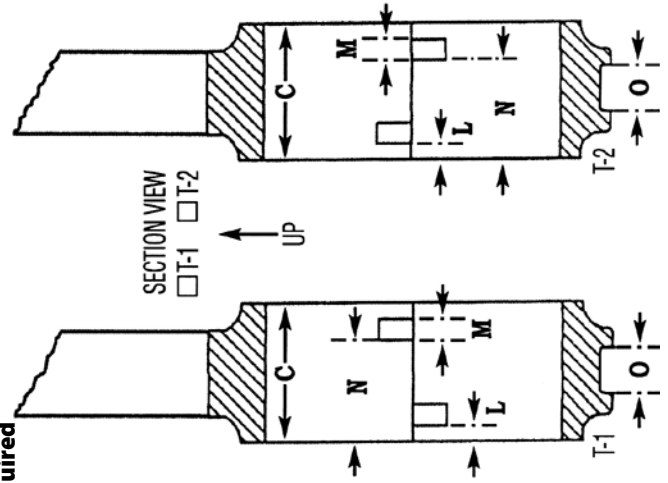

Measurement in inches or millimeters

Previous W.O. No.: _____

Customer: _____

Company: _____

Address: _____

Phone: _____

Fax: _____

Email: _____

Engine Make: _____

No. of Cylinders: _____

Cylinder Bore Size: _____

Target Weight: _____

Max RPM: _____

Max Horsepower: _____

Turbo/Boost: _____ p.s.i./bar

Nitrous Oxide: _____ HP Shot