



vi.0.0

CATALOG

IP CAMERAS FOR CCTV 2016

GENERAL TERM SALES 2016

3

I.1 IP Fixed Box Cameras

AXIS™ M10 Series Indoor Cameras	6
Accesories	7
AXIS™ M11 Series Box Cameras	7
Accesories	9
AXIS™ P13 Series Box Cameras	9
Accesories	11
AXIS™ Q16 Series Box Cameras	12
Accesories	13
AXIS™ Q17 Series Box Cameras	15
Accesories	15
HIKVISION™ SMART™ Series Box Cameras	16
HIKVISION™ DARKFIGHTER™ Series Box Cameras	17
Accesories	17
DAHUA™ Series Box Cameras	17
Accesories	18

I.2 Fixed IP Compact Cameras

AXIS™ M2014 Series Bullet Cameras	19
Accesories and options	19
AXIS™ P14 Series IP Outdoor Compact Cameras	19
AXIS™ Q17 Series IP Outdoor Compact Cameras	20
Accesories and options	22
HIKVISION™ IP Compact Cameras	22
HIKVISION™ SMART™ Series IP Compact Cameras	23
Accesories	23
DAHUA™ IP Compact Cameras	23
Accesories	25

I.3 Fixed IP Thermal Cameras

AXIS™ Q19 Series Fixed IP Outdoor Thermal Compact Cameras	26
Accesories and options	26
AXIS™ Q29 Series Fixed IP Outdoor Thermal Compact Cameras	30

I.4 Special IP Form Factor Cameras


AXIS™ P85 Series Height Strip Cameras	31
AXIS™ P12 Series Miniature Cameras	32
Accesories and options	32
AXIS™ Main Units	33
AXIS™ Sensor Units for AXIS™ Main Units	33

I.5 IP Mini Domes

AXIS™ M30 Series IP Mini Domes	35
Accesories and options	36
AXIS™ P32 Series IP Mini Domes	38
Accesories and options	39
AXIS™ P33 Series IP Mini Domes	40
Accesories and options	43
AXIS™ Q35 Series IP Mini Domes	45
Accesories and options	45
AXIS™ Q37 Series IP Mini Domes	46
HIKVISION™ Series IP Mini Domes	47
HIKVISION™ SMART™ Series IP Mini Domes	48
Accesories and options	49
DAHUA™ Series IP Mini Domes	49
DAHUA™ IP Mini Domes with IR LEDs	49
DAHUA™ 360° Series IP Mini Domes	51
Accesories and options	51

I.6 PTZ IP Domes

AXIS™ Q86 Series Outdoor Thermal Domes	52
AXIS™ M50 Series PTZ Mini Domes	53
AXIS™ P54 Series PTZ Domes	53
AXIS™ P55 Series PTZ Domes	54
Accesories	55
HIKVISION™ Outdoor IP Domes	56
HIKVISION™ Outdoor IP Domes with IR LEDs	57
Accesories and options	58
DAHUA™ Indoor IP Domes	58
DAHUA™ Outdoor PTZ IP Mini Domes	59
DAHUA™ Outdoor IP Domes with IR	59
Accesories and options	60

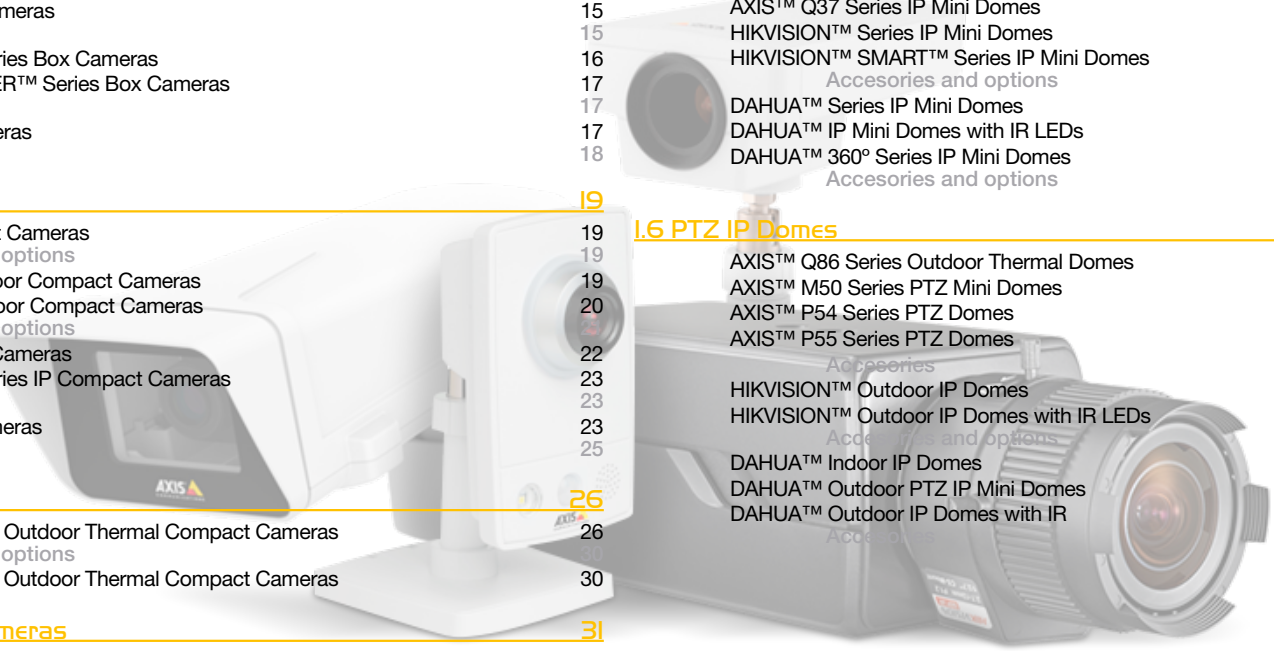

2016 GENERAL SALES TERMS

1. Prices are subject to change without notice.
2. Prices are in Euros. F.O.B. EMACS®, SPAIN Distribution Center, EEC Import Tax excluded.
3. All card orders are final. For details on changes or cancellations, please consult EMACS®.
 - a. Any changes required after order accepted by EMACS® will involve an extension of the deadline and possibly a change in price, which will be determined by our relevant department.
 - b. While the order is not definitively confirmed, the time indicated by EMACS® until then always will be an approximation.
4. The stipulated period of delivery will be automatically extended in time to be determined by our relevant department, if two things happen:
 - a. Introduction of amendments to the original order, at the request of the CUSTOMER while it is running.
 - b. Delayed essential documentation, specifications, designs or clarifications requested by EMACS®, to the implementation of the supply order.
5. The delivery period will be extended also in cases of irregular situations that modify the conditions of production, such as:
 - a. Lack of material caused by the failure of our suppliers or by the absence in the domestic market of materials whose acquisition was planned in that market.
 - b. Service disruption of transport, strikes, and other social or labour unrest, military demonstrations, wars, disasters, unusual weather causes, fires in our facilities, serious accidents indispensable machines in production order, unexpected power interruption for long periods restrictions, or opposition from the authorities.
6. During the execution of the order could be introduced any changes in the design of materials, only if this does not prejudice the quality levels of our supplies and resulting diminished assumed no guarantees for this reason.
7. Each and every one of the documents or studies of any kind as sketches, designs, reports, calculations, specifications and similar reports, supplied or shipped to the CUSTOMER are always the exclusive property of EMACS® and, in any case, may be used or disclosed to third parties, without our prior written consent; giving rise to the obligation to compensate the non-fulfilment of the above.
8. In the price of materials is not included any expenses incurred by the manufacturing inspection and receiving materials to be made by the CUSTOMER or by a representative, unless specific clause; then the inspection or review must be clearly specified.
9. When, for whatever reason, the client must send goods to EMACS®, will always do after obtaining an approval of a RMA (Return Number). You can contact us at (+34) 913 750 136 or by the email info@emacs.es.
10. When is received an RMA email approval, make the shipping, the procedure will be:
 - a. Indicate clearly the RMA number in the outer packaging, which protects the computer's original packaging for a safe shipment.
 - b. Make the shipment prepaid to the address provided in the RMA of EMACS®, may be some of our offices, or at the manufacturer itself, whose address is listed correctly.
- c. Wait for the technical review of the product and the resolution of the technicians.
11. The product will be returned repaired and prepaid if it is under warranty and it applies, will be changed if necessary in the case that it has been purchased within five days or a repair estimate shall be sent for approval by the client in the rest of the cases.
12. Change of a defective new product:
 - a. If within five working days of the delivery of the material, manufacturing defects are detected, an RMA request indicating the reason for the return then must be performed to proceed with the replacement.
 - b. This request shall be sent immediately so that it can count as defective material and thus expedite the change.
 - c. In case of acceptance of a return, EMACS® will replace the defective product with another of the same model.
 - d. In the case of negotiate the payment of the product with the commercial department, EMACS® will paid in the account of the customer the amount paid by it for future purchases.
 - e. In the case that in the customer credit there are other charges, the payment of the defective product may be used at the will of EMACS® to cancel all or part of the pending credit amount.
13. The equipment will be returned with all its components, manuals and original packaging in perfect condition.
14. The RMA must be sent prepaid and in the case of defective products out of warranty, the cost of shipping and return is always borne by the customer.
15. In no case will anticipate the shipping of any product to the customer to replace another subject to RMA before the receipt in EMACS® the allegedly defective equipment and once it has been reviewed and verified as defective and as it enters in the terms and conditions provided for this purpose.
16. Returns to repair a defective product: No change or bonus of defective material is accepted after this period of 5 working days from delivery of the order, time after which govern the normal warranty, shall also be requested the RMA prior to the shipping of the product.
17. The validity of the RMA number is fifteen calendar days from the date of issue, after this time no refund for revocation of the RMA will be accepted.
18. EMACS® reserves the right to refuse a return material for not complying with the above conditions.
19. EMACS® warranty covers manufacturing defects for a period of 2 years from the date of sale except for: Batteries, Hard Drives, CDRW/DVDRW Units, monitors and CCTV products that takes on the manufacturer's warranty and which own conditions and manufacturer's certificate are included.
20. EMACS® warranty does not include wear parts or damage caused by overloading, storms or misuse or abuse of the equipment.
21. EMACS® repair or replace products on warranty at no cost for parts and labor if found to the material is defective and the use, the shipping and the storage of the equipment have been suitable.

2016 GENERAL SALES TERMS

22. It is up to the Department of Quality of EMACS® to determine if a product under warranty must be repaired or replaced, within the established deadlines.
23. EMACS® is not responsible in any way for the consequences or accidental failures that are due to a failure or negligence.
24. EMACS® will have no liability for any personal injury, damage to property or any other loss based on claims that the product has failed technically or in the task for which it has been manufactured.
25. The uses of personnel outside our services to carry out work of modifications or repairs of our products, during the warranty period, immediately void the warranty.
26. All and any irregularities within the guarantee must be communicated in writing immediately, with urgent character and accompanied by information with the reasons which caused the failure, under the penalty of cancellation of that.
27. The products or components delivered to the service center for repair will generate starting from three months an amount of 2.00 € in concept of storage per day, passing to be EMACS® property at 6 months of deposit.
 - a. Costs for review (workshop technician time): 73.47 € / h + VAT.
28. In the case that reimbursement of the purchase amount, whole or partial is required, EMACS® will make a transfer to the IBAN confirmed (bank certificate will be required) by the customer.
29. In the case that the presence of technical staff of EMACS® is required in the customer premises, he will assume the costs of travel, accommodation and maintenance of the technical staff. They will bill the hours spent, with a maximum of 8 hours per working day. The service will be billed according to the current service fee.
30. All material left on deposit by the customer will be billed if 30 days have elapsed since the deposit is made, and has not been returned to our warehouse. They will also be billed when the material is not returned in perfect condition, including the preservation of its packaging.
31. Repair or modification or replacement of parts during the warranty period does not involve the extension of the term thereof.
32. Parts replaced within the warranty period shall be in possession or under possession of EMACS®.
33. All trademarks and registered trademarks are the properties of their respective companies.



1.0 | IP CAMERAS

IP Cameras for CCTV 2016









1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

AXIS™ M10 Series Indoor Cameras

	P/N	Model	Description	List Price
	0554-002	AXIS™ M1004-W Box Camera	Small-sized indoor network camera. Fixed lens and adjustable focus. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps and I/O ports. Video motion detection. Connects over wireless LAN (IEEE 802.11b/g/n) or wired Ethernet. Supports Wi-Fi Protected Setup protocol. Includes stand and clamp for easy mounting and power supply.	167,00 €
	0519-002	AXIS™ M1013 Box Camera	Small-sized indoor network camera. Fixed lens and adjustable focus. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA 800 x 600 resolution at 30 fps. Video motion detection. Connects over wired Ethernet. MicroSD/SDHC memory card slot for edge storage. Includes stand and clamp for easy mounting and power supply.	150,00 €
	0520-002	AXIS™ M1014 Box Camera	Small-sized indoor network camera. Fixed lens and adjustable focus. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Video motion detection. Connects over wired Ethernet. MicroSD/SDHC memory card slot for edge storage. Includes stand and clamp for easy mounting and power supply.	192,00 €
	0555-002	AXIS™ M1025 Box Camera	Small-sized indoor network camera. Fixed lens and adjustable focus. Multiple, individually configurable H.264 and Motion JPEG streams; full HDTV 1080p or 2 MP resolutions at 30 fps. Video motion detection. Connects over wired Ethernet and supports Power over Ethernet. Memory card slot for edge storage. HDMI output (Micro) for public view monitors. Includes stand and clamp for easy mounting and power supply.	251,00 €
	0521-002	AXIS™ M1033-W Box Camera	Small-sized indoor network camera. Fixed lens and adjustable focus. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA 800 x 600 resolution at 30 fps. Two-way audio with built-in microphone and speaker. Video motion and audio detection. Integrated passive infrared (PIR) sensor, white LED illuminator and I/O ports. Connects over wireless LAN (IEEE 802.11b/g/n) or wired Ethernet. Supports Wi-Fi Protected Setup™ PBC compatible. Includes stand and clamp for easy mounting, optional extension for stand and power supply.	234,00 €
	0522-002	AXIS™ M1034-W Box Camera	Small-sized indoor network camera. Fixed lens and adjustable focus. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Two-way audio with built-in microphone and speaker. Video motion and audio detection. Integrated passive infrared (PIR) sensor, white LED illuminator and I/O ports. Connects over wireless LAN (IEEE 802.11b/g/n) or wired Ethernet. Supports Wi-Fi Protected Setup™ PBC compatible. Includes stand and clamp for easy mounting, optional extension for stand and power supply.	234,00 €
	0338-002	AXIS™ M1054 Box Camera	Small-sized indoor network camera. Fixed lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Two-way audio with built-in microphone and speaker. Video motion and audio detection. Integrated passive infrared (PIR) sensor, white LED illuminator and I/O ports. Powered over Ethernet or by power supply. Includes stand and clamp for easy mounting, optional extension for stand and power supply.	312,00 €

1.1






IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

Accessories for AXIS™ M10 Series Cameras

P/N	Description	List Price
5502-381	Clamp to mount AXIS™ M10 series.	3,00 €
5502-391	Clamp to mount AXIS™ M10 series. 10 pack.	24,00 €
5502-701	AXIS™ M10-series 10 cm stand extension. 10 pcs. Cable clip included.	24,00 €
5700-481	Plastic stand for the AXIS™ M10-series	11,00 €
5505-661	USB power cable to power M10 cameras. Perfect to use with AXIS™ M1025 as PVM. Connect camera to a TV through HDMI and use this cable to the USB port on the TV to power the camera, no need for external power supply. DC plug 1.35x3.5mm. Length 1M (3.3 ft). White color.	12,00 €

AXIS™ M11 Series Box Cameras



	P/N	Model	Description	List Price
	0329-001	AXIS™ M1103 2.8mm Box Camera	SVGA camera with fixed, 2.8 mm, CS-mount lens. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.	273,00 €
	0339-001	AXIS™ M1104 2.8mm Box Camera	HDTV camera with fixed, 2.8 mm, CS-mount lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.	351,00 €
	0340-001	AXIS™ M1113 Box Camera	SVGA camera with varifocal 2.9-8.2 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.	351,00 €
	0341-001	AXIS™ M1114 Box Camera	HDTV camera with varifocal 2.8-8 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.	430,00 €
	0431-001	AXIS™ M1113-E Box Camera	Outdoor, IP66-rated SVGA camera with varifocal 2.9-8.2 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. Video motion detection and active tampering alarm. Operation in -20°C to +50°C (-4 °F to 122 °F). Power over Ethernet. Includes a removable sunshield and wall bracket. Midspan not included.	430,00 €

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

AXIS™ M11 Series Box Cameras

	P/N	Model	Description	List Price
	0432-001	AXIS™ M1114-E Box Camera	Outdoor, IP66-rated HDTV camera with varifocal 2.8-8 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. Video motion detection and active tampering alarm. Operation in -20°C to +50°C (-4 °F to 122 °F). Power over Ethernet. Includes a removable sunshield and wall bracket. Midspan not included.	508,00 €
	0747-001	AXIS™ M1124 Box Camera	HDTV 720p resolution, day/night, fixed camera with CS-mount varifocal 3-10.5 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p at 30 fps. WDR – Forensic Capture and Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage. Power over Ethernet or 8-28 VDC input. Includes stand. Power supply not included.	293,00 €
	0748-001	AXIS™ M1124-E Box Camera	Outdoor, NEMA 4X, IP66 and IK10-rated, lightweight, HDTV 720p resolution, day/night, fixed camera with CS-mount varifocal 3-10.5 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p at 30 fps. WDR – Forensic Capture and Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage. Power over Ethernet or 8-28 VDC input. Operation in -20°C to +50°C. Powered by IEEE 802.3af midspan. Includes a wall bracket, Torx T20 screw driver and IP66- rated cable glands. Midspan not included.	377,00 €
	0749-001	AXIS™ M1125 Box Camera	HDTV 1080p resolution, day/night, fixed camera with CS-mount varifocal 3-10.5 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p at 30 fps. WDR – Forensic Capture and Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage. Power over Ethernet or 8-28 VDC input. Includes stand. Power supply not included.	352,00 €
	0750-001	AXIS™ M1125-E Box Camera	Outdoor, NEMA 4X, IP66 and IK10-rated, lightweight, HDTV 1080p resolution, day/night, fixed camera with CS-mount varifocal 3-10.5 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p at 30 fps. WDR – Forensic Capture and Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage. Power over Ethernet or 8-28 VDC input. Operation in -20°C to +50°C. Powered by IEEE 802.3af midspan. Includes a wall bracket, Torx T20 screw driver and IP66- rated cable glands. Midspan not included.	436,00 €
	0436-001	AXIS™ M1144-L Box Camera	HDTV camera with varifocal boardmount 2.5-6 mm DC-iris lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. Video motion detection and active tampering alarm. Integrated IR LED illumination up to 15 meters and I/O ports. MicroSD/SDHC memory card slot for edge storage. Includes stand for easy mounting. Power over Ethernet. Midspan not included.	377,00 €
	0590-001	AXIS™ M1145 Box Camera	HDTV camera for day and night surveillance with varifocal 3-10.5mm P-iris lens. Remote 3.5 x optical zoom and focus with automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p or 2MP resolution at 30 fps. Video motion detection and active tampering alarm and I/O ports. MicroSD/SDHC memory card slot for edge storage. Includes stand for easy mounting. Power over Ethernet. Midspan not included.	419,00 €
	0591-001	AXIS™ M1145-L Box Camera	HDTV camera for day and night surveillance with varifocal 3-10.5mm P-iris lens. Remote 3.5 x optical zoom and focus with automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p or 2MP resolution at 30 fps. Video motion detection and active tampering alarm and I/O ports. Optimized IR, a power-efficient LED technology that provides an adaptable angle of IR illumination up to 15 meters (50 feet) MicroSD/SDHC memory card slot for edge storage. Includes stand for easy mounting. Power over Ethernet. Midspan not included.	461,00 €

1.1


IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

Accessories for AXIS™ M11 Series

P/N	Description	List Price
5502-741	Fixed Iris Megapixel Lens 16mm, F1.8, CS mount for AXIS™ M1103/4.	41,00 €
5503-171	Varifocal IR-corrected lens for cameras up to 5 mega pixel resolution. Compatible with e.g. AXIS™ M1114/-E, P1354/-E, P1355/-E, P1357/-E, Q1602/-E, Q1604/-E.	226,00 €
5502-761	Varifocal Mega Pixel DC-Iris Lens 15-50mm, F1.5, CS mount, for AXIS™ M1113/14.	167,00 €
5502-751	Varifocal 2.2-6mm DC-Iris Megapixel Lens, F1.3, CS mount for AXIS™ M1113/4.	125,00 €
5503-161	Barrel distortion corrected and IR corrected wideangle lens for cameras up to 5 mega pixel resolution. Compatible with e.g. AXIS™ M1114/-E, AXIS™ P1353/-E, P1354/-E, P1355/-E, P1357/-E, AXIS™ Q1602/-E, Q1604/-E, Q1614/-E, Q1615/-E.	251,00 €
5503-181	Manual iris lens, varifocal 2.4-6MM compatible with AXIS™ M1103 and M1104.	66,00 €
0344-001	Protective camera housing for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	167,00 €
0433-001	Outdoor PoE camera housing with window-/camera heaters and fan for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X-, Vibration 4M3 rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	276,00 €
5502-871	The protective housing, AXIS™ T93E05, is compatible with the AXIS™ M11 series. Made of ASA polymer, it is IP66-rated and the operating temperature ranges between -20 °C to +50 °C (-4 °F to 122 °F). Wall bracket and sun shield are included.	101,00 €
5900-161	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. The camera is mounted on the door of the cabinet. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included. Compatible cameras: AXIS™ M111X-E, P13XX-E, Q16XX-E, Q1755-E, Q191X-E Q192X-E.	226,00 €
5017-111	Plastic camera stand. Original stand for the AXIS™ M11-series.	13,00 €
5506-611	White aluminum stand for wall or hard ceiling mount. A cable hole in the base of the stand makes it possible to hide the hole in the wall out of which the cable is routed. A snap on cover gives a clean look without visible screws. Compatible with all standard tripod thread cameras e.g. AXIS™ M11, P13, Q16 series.	24,00 €
5505-141	Back box to enable external cable entry or use of cable protection equipment. Hole for 3/4 inch conduits or M25 cable protection pipes. Compatible with AXIS™ T94Q01A Wall mount, all AXIS™ M11-E/P13-E/Q16-E/Q1755-E/Q1910-E/21-E/22-E outdoor fixed box camera wall mounts and AXIS™ T92E Series and AXIS™ T93E05 Fixed camera housings.	29,00 €

AXIS™ P13 Series Box Cameras




P/N	Model	Description	List Price
 0343-001	AXIS™ P1347 Box Camera	5MP, day/night, fixed camera with varifocal 3.5-10 mm P-Iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max 5MP resolution at 12 fps, 3MP resolution at 20 fps, or HDTV 1080p at 30 fps. Digital PTZ support includes multi-view streaming of different view areas. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Power supply not included.	999,00 €

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

AXIS™ P13 Series Box Cameras




	P/N	Model	Description	List Price
	0368-001	AXIS™ P1347-E Box Camera	Outdoor, IP66-rated, 5MP, day/night, fixed camera with varifocal 3.5-10 mm P-Iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max 5MP resolution at 12 fps, 3MP resolution at 20 fps, or HDTV 1080p at 30 fps. Digital PTZ support includes multi-view streaming of different view areas. WDR. Video motion detection and active tampering alarm. Two-way audio. SD/SDHC memory card slot for optional local video storage. Operation in -30°C to +50°C when powered by IEEE 802.3af midspan or -40°C to +50°C with AXIS™ T8123 High PoE Midspan. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66 rated cable glands. Midspan not included.	1.249,00 €
	0523-001	AXIS™ P1353 Box Camera	Light-sensitive, SVGA resolution, day/night, fixed camera with varifocal 3-8 mm DC-iris lens and remote back focus. Lightfinder technology. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Power over Ethernet. Power supply not included.	569,00 €
	0527-001	AXIS™ P1353-E Box Camera	Outdoor, IP66-rated, Light-sensitive, SVGA, day/night, network camera with varifocal 3-8 mm DC-iris lens and remote back focus. Lightfinder technology. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio. MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Operation in -30°C to +50°C when powered by IEEE 802.3af compliant midspan or -40°C to +50°C with AXIS™ T8123/-E High PoE Midspan. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66 rated cable glands. Midspan not included.	769,00 €
	0524-001	AXIS™ P1354 Box Camera	Light-sensitive, HDTV resolution, day/night, fixed camera with varifocal 2.8-8 mm DC-iris lens and remote back focus. Lightfinder technology. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Power over Ethernet. Power supply not included.	568,00 €
	0528-001	AXIS™ P1354-E Box Camera	Outdoor, IP66-rated, HDTV, day/night, fixed network camera with varifocal 3-8 mm DC-iris lens and remote back focus. Lightfinder technology. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio. SD/SDHC memory card slot for optional local video storage. Operation in -30°C to +50°C when powered by IEEE 802.3af midspan or -40°C to +50°C with AXIS™ T8123 High PoE Midspan. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66 rated cable glands. Midspan not included.	768,00 €
	0525-001	AXIS™ P1355 Box Camera	1080p HDTV resolution, day/night, fixed camera with varifocal 2.8-8 mm P-iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Power over Ethernet. Power supply not included.	728,00 €
	0529-001	AXIS™ P1355-E Box Camera	Outdoor, IP66-rated, 1080p HDTV, day/night, fixed network camera with varifocal 2.8-8 mm P-iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p resolution at 30 fps. WDR- dynamics contrast. Video motion detection and active tampering alarm. Two-way audio. MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Operation in -30°C to +50°C when powered by IEEE 802.3af midspan or -40°C to +50°C with AXIS™ T8123/-E High PoE Midspans. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66 rated cable glands. Midspan not included.	929,00 €
	0690-001	AXIS™ P1365 Box Camera	HDTV 1080p resolution, day/night, fixed camera with CS-mount varifocal 2.8-8 mm P-iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p at 60 fps. WDR – Forensic Capture, Lightfinder and Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Power over Ethernet. Includes stand with cable management. Power supply not included.	629,00 €

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

AXIS™ P13 Series Box Cameras

	P/N	Model	Description	List Price
	0740-001	AXIS™ P1365-E Box Camera	Outdoor, NEMA 4X, IP66/67 and IK10-rated, lightweight, HDTV 1080p, day/night, fixed network camera with CS-mount varifocal 2.8-8 mm P-iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p resolution at 60 fps. WDR- Forensic Capture Lightfinder and Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. Two-way audio. MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Operation in -40°C to +50°C. Powered by IEEE 802.3af midspan. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66/67- rated cable glands. Midspan not included.	839,00 €
	0526-001	AXIS™ P1357 Box Camera	5MP resolution, day/night, fixed camera with varifocal 2.8-8 mm P-iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max 5MP at 12 fps, 3MP resolution at 20 fps, or HDTV 1080p at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Power over Ethernet. Power supply not included.	728,00 €
	0530-001	AXIS™ P1357-E Box Camera	Outdoor, IP66-rated, 5MP, day/night, fixed network camera with varifocal 2.8-8 mm P-iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, individually configurable H.264 and Motion JPEG streams; max 5MP resolution at 12 fps, 3MP resolution at 20 fps, or HDTV 1080p at 30 fps. WDR- dynamics contrast. Video motion detection and active tampering alarm. Two-way audio. MicroSD/MicroSDHC memory card slot for optional local video storage, serial port for RS422/485 communication. Operation in -30°C to +50°C when powered by IEEE 802.3af midspan or -40°C to +50°C with AXIS™ T8123/-E High PoE Midspans. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66 rated cable glands. Midspan not included.	930,00 €

Accessories for AXIS™ P13 Series

P/N	Description	List Price
5503-171	Varifocal IR-corrected lens for cameras up to 5 mega pixel resolution. Compatible with e.g. AXIS™ M1114/-E, P1354/-E, P1355/-E, P1357/-E, Q1602/-E, Q1604/-E.	226,00 €
5504-901	Varifocal IR-corrected P-iris tele lens compatible with AXIS™ P1355/-E, P1357/-E, AXIS™ Q1602/-E, Q1604/-E, Q1614/-E, Q1615/-E.	226,00 €
5800-791	Varifocal IR-corrected lens with DC-Iris. Compatible with e.g. AXIS™ P1353/-E, P1354/-E. AXIS™ Q1602/-E, Q1604/-E.	209,00 €
5800-801	Varifocal IR-corrected lens with P-Iris. Compatible with e.g. AXIS™ Q1602/-E, Q1604/-E, Q1614/-E, Q1615/-E, AXIS™ P1355/-E, P1357/-E.	209,00 €
5800-781	Varifocal IR-corrected lens with DC-Iris. Compatible with e.g. AXIS™ P1353/-E, P1354/-E, P1355/-E, P1357/-E, AXIS™ Q1602/-E, Q1604/-E.	125,00 €
5503-161	Barrel distortion corrected and IR corrected wideangle lens for cameras up to 5 mega pixel resolution. Compatible with e.g. AXIS™ M1114/-E, AXIS™ P1353/-E, P1354/-E, P1355/-E, P1357/-E, AXIS™ Q1602/-E, Q1604/-E, Q1614/-E, Q1615/-E.	251,00 €
0344-001	Protective camera housing for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	167,00 €
0433-001	Outdoor PoE camera housing with window-/camera heaters and fan for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X-, Vibration 4M3 rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	276,00 €
5900-261	Fixed box protective camera housing made of IK10 impact resistant and UV resistant polymer. IP66, NEMA 4X rated and UL listed. Compatible with AXIS™ P13 Series and AXIS™ Q16 Series. AXIS™ T94Q01A Wall mount included.	134,00 €
5900-271	Fixed box outdoor camera housing made of IK10 impact resistant and UV resistant polymer. IP66, NEMA 4X rated and UL listed. Powered by 24 V AC or 12-24 V DC. Temperature range -40C to -45C (-40F to 113F). Compatible with AXIS™ P13 Series and AXIS™ Q16 Series. AXIS™ T94Q01A Wall mount included.	201,00 €

1.1





IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

Accessories for AXIS™ P13 Series

P/N	Description	List Price
5900-281	Fixed box outdoor camera housing made of IK10 impact resistant and UV resistant polymer. IP66, NEMA 4X rated and UL listed. Powered by PoE IEEE802.3af. Temperature range -40C to -45C (-40F to 113F). Compatible with AXIS™ P13 Series and AXIS™ Q16 Series. AXIS™ T94Q01A Wall mount included.	201,00 €
5900-161	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. The camera is mounted on the door of the cabinet. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included. Compatible cameras: AXIS™ M111X-E, P13XX-E, Q16XX-E, Q1755-E, Q191X-E Q192X-E.	226,00 €
5506-611	White aluminum stand for wall or hard ceiling mount. A cable hole in the base of the stand makes it possible to hide the hole in the wall out of which the cable is routed. A snap on cover gives a clean look without visible screws. Compatible with all standard tripod thread cameras e.g. AXIS™ M11, P13, Q16 series.	24,00 €
5505-141	Back box to enable external cable entry or use of cable protection equipment. Hole for 3/4 inch conduits or M25 cable protection pipes. Compatible with AXIS™ T94Q01A Wall mount, all AXIS™ M11-E/P13-E/Q16-E/Q1755-E/Q1910-E/21-E/22-E outdoor fixed box camera wall mounts and AXIS™ T92E Series and AXIS™ T93E05 Fixed camera housings.	29,00 €
5505-331	Camera holder plate for mounting an AXIS™ Q1614 in a AXIS™ T92E05 and AXIS™ T92E20 housing. Or change the camera unit inside an AXIS™ P135X-E outdoor camera.	16,00 €
5505-341	Kit for mounting an AXIS™ Q1614 in a AXIS™ T92E05/AXIS™ T92E20 housing produced before 2014. Or change the camera unit inside an AXIS™ P134X-E outdoor camera.	33,00 €

AXIS™ Q16 Series Box Cameras






	P/N	Model	Description	List Price
	0437-001	Cámara AXIS™ Q1602	Extended D1 (768x576) resolution, day/night, fixed camera with varifocal 2.8-8 mm DC-iris lens and remote back focus. Lightfinder technology. Support for P-Iris, multiple, individually configurable H.264 and Motion JPEG streams; Extended D1 resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Power supply not included.	755,00 €
	0438-001	Cámara AXIS™ Q1602-E	Outdoor, IP66-rated, Extended D1 (768x576) resolution, day/night, fixed camera with varifocal 2.8-8 mm DC-iris lens and remote back focus. Lightfinder technology. Support for P-Iris, multiple, individually configurable H.264 and Motion JPEG streams; Extended D1 resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Arctic Temperature Control, Operation in -30°C to +50°C (-22 °F to 122 °F) when powered by IEEE 802.3af midspan or -40°C to +50°C (-40 °F to 122 °F) with High PoE Midspan. Includes a removable sunshield and wall bracket. Midspan not included.	1.007,00 €
	0439-001	AXIS™ Q1604 Box Camera	HDTV, day/night, fixed camera with varifocal 2.8-8 mm DC-iris lens and remote back focus. Support for P-Iris, Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at full frame rate. WDR-dynamic contrast and WDR-dynamic capture. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Power supply not included.	839,00 €
	0463-001	AXIS™ Q1604-E Box Camera	Outdoor, IP66-rated HDTV, day/night, fixed camera with varifocal 2.8-8 mm DC-iris lens and remote back focus. Support for P-Iris, Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at full frame rate. WDR-dynamic contrast and WDR-dynamic capture. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Arctic Temperature Control, Operation in -30°C to +50°C (-22 °F to 122 °F) when powered by IEEE 802.3af midspan or -40°C to +50°C (-40 °F to 122 °F) with High PoE Midspan. Includes a removable sunshield and wall bracket. Midspan not included.	1.091,00 €

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

AXIS™ Q16 Series Box Cameras

	P/N	Model	Description	List Price
	0550-001	Cámara AXIS™ Q1614	HDTV, day/night, fixed camera with varifocal 2.8-8 mm P-Iris lens and remote back focus. Support for DC-iris, multiple, individually configurable H.264 and Motion JPEG streams; HDTV 720p or 1MP resolution at 50/60 frames per second. WDR - dynamic capture and Lightfinder technology for demanding lighting conditions. Video motion detection, active tampering alarm and shock detection. Two-way audio with built-in microphone, audio detection and I/O for alarm/event handling. Serial port for RS422/485 communication. Memory card slot for optional local video storage. Power over Ethernet or 8-28 V DC input. Power supply not included.	755,00 €
	0551-001	Cámara AXIS™ Q1614-E	Outdoor, IP66-rated HDTV, day/night, fixed camera with varifocal 2.8-8 mm P-Iris lens and remote back focus. Support for DC-iris, multiple, individually configurable H.264 and Motion JPEG streams; HDTV 720p or 1MP resolution at 50/60 frames per second. WDR - dynamic capture and Lightfinder technology for demanding lighting conditions. Video motion detection, active tampering alarm and shock detection. Two-way audio, audio detection and I/O for alarm/event handling. Serial port for RS422/485 communication. Memory card slot for optional local video storage. Arctic Temperature Control, operation in -30°C to +50°C (-22 °F to 122 °F) when powered by IEEE 802.3af midspan or -40°C to +50°C (-40 °F to 122 °F) with PoE+ Midspan. Includes a removable sunshield and wall bracket. Midspan not included.	923,00 €
	0661-001	Cámara AXIS™ Q1615	HDTV, day/night, fixed camera with varifocal 2.8-8 mm P-Iris lens and remote back focus. Support for DC-iris, multiple, individually configurable H.264 and Motion JPEG streams; HDTV 1080p or 2 MP resolution at 50/60 frames per second. WDR - Forensic Capture and Lightfinder technology for demanding lighting conditions. Electronic image stabilization to improve video quality when the camera is subject to vibration. Video motion detection, active tampering alarm and shock detection. Two-way audio with built-in microphone, audio detection and I/O for alarm/event handling. Serial port for RS485/RS422 communication. Memory card slot for optional local video storage. Power over Ethernet or 8-28 V DC input. Power supply not included.	839,00 €
	0629-001	Cámara AXIS™ Q1615-E	Outdoor, IP66-rated HDTV, day/night, fixed camera with varifocal 2.8-8 mm P-Iris lens and remote back focus. Support for DC-iris, multiple, individually configurable H.264 and Motion JPEG streams; HDTV 1080p or 2 MP resolution at 50/60 frames per second. WDR - Forensic Capture and Lightfinder technology for demanding lighting conditions. Electronic image stabilization to improve video quality when the camera is subject to vibration. Video motion detection, active tampering alarm and shock detection. Two-way audio, audio detection and I/O for alarm/event handling. Serial port for RS485/RS422 communication. Memory card slot for optional local video storage. Arctic Temperature Control, operation in -30°C to 50°C (-22 °F to 122 °F) when powered by IEEE 802.3af midspan or -40°C to 50°C (-40 °F to 122 °F) with PoE+ Midspan. Includes a removable sunshield and wall bracket. Midspan not included.	1.175,00 €
	0630-001	Cámara AXIS™ Q1635	1/2" sensor, day/night, fixed camera with varifocal DC-iris lens and remote back focus, support for P-Iris lenses. Support for multiple, individually configurable H.264 and Motion JPEG streams; HDTV 1080p or 2 MP resolution at 50/60 frames per second. WDR-Forensic Capture and Lightfinder technology for demanding lighting conditions. Electronic image stabilization and a defogging functionality to improve video quality. Video motion detection, active tampering alarm and shock detection. Two-way audio with built-in microphone, audio detection and I/O for alarm/event handling. Serial port for RS485/RS422 communication. Memory card slot for optional local video storage. Power over Ethernet or 8-28 V DC input. Power supply not included.	923,00 €

Accessories for AXIS™ Q16 Series

P/N	Description	List Price
5503-171	Varifocal IR-corrected lens for cameras up to 5 mega pixel resolution. Compatible with e.g. AXIS™ M1114/-E, P1354/-E, P1355/-E, P1357/-E, Q1602/-E, Q1604/-E.	226,00 €
5504-901	Varifocal IR-corrected P-iris tele lens compatible with AXIS™ P1355/-E, P1357/-E, AXIS™ Q1602/-E, Q1604/-E, Q1614/-E, Q1615/-E.	226,00 €
5800-791	Varifocal IR-corrected lens with DC-Iris. Compatible with e.g. AXIS™ P1353/-E, P1354/-E. AXIS™ Q1602/-E, Q1604/-E.	209,00 €
5800-801	Varifocal IR-corrected lens with P-Iris. Compatible with e.g. AXIS™ Q1602/-E, Q1604/-E, Q1614/-E, Q1615/-E, AXIS™ P1355/-E, P1357/-E.	209,00 €
5503-421	Varifocal Megapixel DC-Iris Lens 15-50mm, F1.5, CS mount, Day/Night for AXIS™ Q1602.	167,00 €
5800-781	Varifocal IR-corrected lens with DC-Iris. Compatible with e.g. AXIS™ P1353/-E, P1354/-E, P1355/-E, P1357/-E, AXIS™ Q1602/-E, Q1604/-E.	125,00 €

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

Accessories for AXIS™ Q16 Series







P/N	Description	List Price
5503-161	Barrel distortion corrected and IR corrected wideangle lens for cameras up to 5 mega pixel resolution. Compatible with e.g. AXIS™ M1114/-E, AXIS™ P1353/-E, P1354/-E, P1355/-E, P1357/-E, AXIS™ Q1602/-E, Q1604/-E, Q1614/-E, Q1615/-E.	251,00 €
0344-001	Protective camera housing for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	167,00 €
0433-001	Outdoor PoE camera housing with window-/camera heaters and fan for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X-, Vibration 4M3 rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	276,00 €
5900-261	Fixed box protective camera housing made of IK10 impact resistant and UV resistant polymer. IP66, NEMA 4X rated and UL listed. Compatible with AXIS™ P13 Series and AXIS™ Q16 Series. AXIS™ T94Q01A Wall mount included.	134,00 €
5900-271	Fixed box outdoor camera housing made of IK10 impact resistant and UV resistant polymer. IP66, NEMA 4X rated and UL listed. Powered by 24 V AC or 12-24 V DC. Temperature range -40C to -45C (-40F to 113F). Compatible with AXIS™ P13 Series and AXIS™ Q16 Series. AXIS™ T94Q01A Wall mount included.	201,00 €
5900-281	Fixed box outdoor camera housing made of IK10 impact resistant and UV resistant polymer. IP66, NEMA 4X rated and UL listed. Powered by PoE IEEE802.3af. Temperature range -40C to -45C (-40F to 113F). Compatible with AXIS™ P13 Series and AXIS™ Q16 Series. AXIS™ T94Q01A Wall mount included.	201,00 €
5900-161	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. The camera is mounted on the door of the cabinet. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included. Compatible cameras: AXIS™ M111X-E, P13XX-E, Q16XX-E, Q1755-E, Q191X-E Q192X-E.	226,00 €
5506-611	White aluminum stand for wall or hard ceiling mount. A cable hole in the base of the stand makes it possible to hide the hole in the wall out of which the cable is routed. A snap on cover gives a clean look without visible screws. Compatible with all standard tripod thread cameras e.g. AXIS™ M11, P13, Q16 series.	24,00 €
5505-141	Back box to enable external cable entry or use of cable protection equipment. Hole for 3/4 inch conduits or M25 cable protection pipes. Compatible with AXIS™ T94Q01A Wall mount, all AXIS™ M11-E/P13-E/Q16-E/Q1755-E/Q1910-E/21-E/22-E outdoor fixed box camera wall mounts and AXIS™ T92E Series and AXIS™ T93E05 Fixed camera housings.	29,00 €
5505-331	Camera holder plate for mounting an AXIS™ Q1614 in a AXIS™ T92E05 and AXIS™ T92E20 housing. Or change the camera unit inside an AXIS™ P135X-E outdoor camera.	16,00 €
5505-341	Kit for mounting an AXIS™ Q1614 in a AXIS™ T92E05/AXIS™ T92E20 housing produced before 2014. Or change the camera unit inside an AXIS™ P134X-E outdoor camera.	33,00 €

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

AXIS™ Q17 Series Box Cameras

	P/N	Model	Description	List Price
	0303-001	Cámara AXIS™ Q1755 50HZ	2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. I/O for alarm/event handling. Two-way audio with audio detection alarm. Power over Ethernet. Power supply not included.	1.259,00 €
	0303-042	Cámara AXIS™ Q1755 50HZ OUTDOOR T92A KIT	Bundle with 1 unit of AXIS™ Q1755 50 Hz (0303-001) and AXIS™ T92A00 Housing (5015-001) aluminum outdoor housing. Including Wall mount (0217-031). NOT FOR USA	1.469,00 €
	0303-032	Cámara AXIS™ Q1755 50HZ POE	2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. I/O for alarm/event handling. Two-way audio with audio detection alarm. Power over Ethernet. Includes one-port Midspan.	1.301,00 €
	0304-001	Cámara AXIS™ Q1755 60HZ	2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. I/O for alarm/event handling. Two-way audio with audio detection alarm. Power over Ethernet. Power supply not included.	1.259,00 €
	0347-001	Cámara AXIS™ Q1755-E 50HZ	Outdoor, IP66-rated, 2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. Two-way audio. Arctic Temperature Control. Operation in -30 °C to 45 °C when powered by IEEE 802.3af midspan or down to -40 °C with AXIS™ T8123 High PoE Midspan. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66 rated cable glands. Midspan not included.	1.511,00 €
	0348-001	Cámara AXIS™ Q1755-E 60HZ	Outdoor, IP66-rated, 2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. Two-way audio. Arctic Temperature Control. Operation in -30 °C to 45 °C (-22 °F to 113 °F) when powered by IEEE 802.3af midspan or down to -40 °C (-40 °F) with AXIS™ T8123 High PoE Midspan. Includes a removable sunshield, wall bracket, Torx T20 screw driver and IP66 rated cable glands. Midspan not included.	1.511,00 €

Accessories for AXIS™ Q17 Series

P/N	Description	List Price
0344-001	Protective camera housing for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	167,00 €
0433-001	Outdoor PoE camera housing with window-/camera heaters and fan for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X-, Vibration 4M3 rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	276,00 €

1.1






IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

Accessories for AXIS™ Q17 Series

P/N	Description	List Price
5900-161	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. The camera is mounted on the door of the cabinet. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included. Compatible cameras: AXIS™ M111X-E, P13XX-E, Q16XX-E, Q1755-E, Q191X-E Q192X-E.	226,00 €
5505-141	Pre-assembled T98A Surveillance cabinet with following system components: (1) Breaker and surge protection, (2), 12 VDC DIN PSU, (3)AXIS™ T8604 Media Converter, (4) Internal cables and mounts. Tested and verified with AXIS™ cameras.	29,00 €

HIKVISION™ SMART™ Series Box Cameras



P/N	Model	Description	List Price
 DS-2CD4012F-A	HIKVISION™ DS-2CD4012F-A Smart™ Box Camera	Megapixel Box IP camera. Indoor. CMOS Sensor 1/3". Day/night mechanical switching. Sensitivity: 0.01 lux (colour), and 0.001 (B/W) - (F1.2, AGC ON). Resolution: 1.3 Megapixel 1280x960 @ 25 fps and 1280x720 @ 50 fps. Compression format H.264 / MPEG4 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions (only body, without lens): 69.8 x 58 x 145 mm.	471,42 €
 DS-2CD4012FWD-A	HIKVISION™ DS-2CD4012FWD-A Smart™ Box Camera	Megapixel Box IP camera. Indoor. CMOS Sensor 1/3". Day/night mechanical switching. Sensitivity: 0.01 lux (colour), and 0.001 (B/W) - (F1.2, AGC ON). Resolution: 1.3 Megapixel 1280x960 @ 25 fps and 1280x720 @ 50 fps. Compression format H.264 / MPEG4 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. WDR: 120 dB. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions (only body, without lens): 69.8 x 58 x 145 mm.	523,80 €
 DS-2CD4024F-A	HIKVISION™ DS-2CD4024F-A Smart™ Box Camera	Megapixel Box IP camera. Indoor. CMOS Sensor 1/3". Day/night mechanical switching. Sensitivity: 0.02 lux (colour), and 0.005 (B/W) - (F1.2, AGC ON). Resolution: 2 Megapixel 1920x1080 @ 25 fps and 1280x960 @ 25 fps. Compression format H.264 / MPEG4 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions (only body, without lens): 69.8 x 58 x 145 mm.	523,80 €
 DS-2CD4032FWD-A	HIKVISION™ DS-2CD4032FWD-A Smart™ Box Camera	Megapixel Box IP camera. Indoor. CMOS Sensor 1/3". Day/night mechanical switching. Sensitivity: 0.1 lux (colour), and 0.01 (B/W) - (F1.2, AGC ON). Resolution: 3 Megapixel 2048x1536 @ 20 and 1920x1080 @ 25 fps. Compression format H.264 / MPEG4 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. WDR: 120 dB. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions (only body, without lens): 69.8 x 58 x 145 mm.	698,40 €
 DS-2CD4065F-AP	Cámara Box HIKVISION™ DS-2CD4065F-AP Smart™ Box Camera	Megapixel Box IP camera. Indoor. CMOS Sensor 1/3". Day/night mechanical switching. Sensitivity: 0.02 lux (colour), and 0.001 (B/W) - (F1.2, AGC ON). Resolution: 6 Megapixel 3072x2048, 3072x1728, 2560x2048, 2560x1920, 2048x1536, 1920x1080 and 1280x720 @ 25 fps. Compression format H.264 / MPEG4 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions (only body, without lens): 69.8 x 58 x 145 mm.	CONS

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case



HIKVISION™ DARKFIGHTER™ Series Box Cameras

	P/N	Model	Description	List Price
	DS-2CD6026FHWD-A(3.8-16mm)	HIKVISION™ DS-2C D6026FHWD-A (3.8-16mm) Darkfighter™ Box Camera	Megapixel Box IP camera, able to provide color images in extreme darkness. Indoor. CMOS Sensor 1/3", 3.8-16mm lens included. Day/night mechanical switching. Sensitivity: 0.0002 lux (colour and B/W) - (F1.2, AGC ON). Resolution: 2 Megapixel 1920x1080 @ 25 fps (50 fps with WDR OFF). Compression format H.264 / MPEG4 / MJPEG. Double codec, embedded web server, IP output (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. Water mark. Progressive scan. ALC (Autoiris DC). Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 12VDC/24VAC (power source not included). Dimensions (only body, without lens): 69.8 x 58 x 145 mm.	1.778,01 €
	DS-2CD6026FHWD-A(11-40mm)	HIKVISION™ DS-2C D6026FHWD-A (11-40mm) Darkfighter™ Box Camera	Megapixel Box IP camera, able to provide color images in extreme darkness. Indoor. CMOS Sensor 1/3", 11-40mm lens included. Day/night mechanical switching. Sensitivity: 0.0002 lux (colour and B/W) - (F1.2, AGC ON). Resolution: 2 Megapixel 1920x1080 @ 25 fps (50 fps with WDR OFF). Compression format H.264 / MPEG4 / MJPEG. Double codec, embedded web server, IP output (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. Water mark. Progressive scan. ALC (Autoiris DC). Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 12VDC/24VAC (power source not included). Dimensions (only body, without lens): 69.8 x 58 x 145 mm.	1.972,01 €

Accessories for HIKVISION™ Box Cameras

P/N	Description	List Price
DS-1293ZJ	Indoor/Outdoor Wall Mount Bracket. Color: HIK white. Material: Aluminum alloy. Angle: Horizontal:360°;Vertical:-45°~45°. Dimension: 88x116.6x297.3mm.	CONS
DS-1292ZJ	Indoor/Outdoor Wall Mount Bracket. Color: HIK white. Material: Aluminum alloy. Angle: Horizontal:360°;Vertical:-45°~45°. Dimension: 70x97.1x217.9mm.	CONS
DS-1322HZ-C	HIKVISION™ white Aluminum alloy Suitable for Outdoor fan, AC24V 113x143x452mm.	89,46 €
DS-1322HZ-H	HIKVISION™ white Aluminum alloy Suitable for Outdoor fan, heater. AC24V 113x143x452mm.	55,66 €
DS-1322HZ-CW	HIKVISION™ white Aluminum alloy Suitable for Outdoor fan, windscreen wiper. AC24V 113x143x452mm.	CONS
DS-1322HZ-HW	HIKVISION™ white Aluminum alloy Suitable for Outdoor fan, windscreen wiper, heater. AC24V 113x143x452mm.	68,85 €
DS-1320HZ	Indoor camera housing. Total dimension: 300x115x108mm. Window dimension: 91x73mm. Color: HIKVISION™ white.	21,03 €

DAHUA™ Series Box Cameras


	P/N	Model	Description	List Price
	IPC-HF5200	DAHUA™ IPC-HF5200 Box IP Camera	1/2.8", 2 Megapixel progressive scan Exmor CMOS. H.264 & MJPEG dual-stream encoding. 25/30fps@1080P(1920x1080). DWDR, Day/Night(ICR), 3DNR, Auto iris, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Built-in 1/1 alarm in/out. Micro SD memory, PoE.	257,30 €
	IPC-HF8301E	DAHUA™ IPC-HF8301E Box IP Camera	1/3", 3 Megapixel progressive scan CMOS. Support H.264/ MJPEG dual codec. Smart triple streams supported. Max 25/30fps@3MP(2048x1536). Ultra WDR (Wide Dynamic Range) up to 120dB. Ultra 3D DNR. Ultra Defog, ROI, EIS. Smart detection: Face detection, Tripwire detection, Intrusion detection. Scene change detection. Auto back focus. Built-in Mic. 100/1000M Base -T Ethernet.	469,68 €

1.1

IP FIXED BOX CAMERAS

Indoor IP Cameras, or Outdoor with Protection Case

DAHUA™ Series Box Cameras

P/N	Model	Description	List Price
	IPC-HF81200E DAHUA™ IPC-HF81200E Box IP Camera	1/2.3", 12 Megapixel progressive scan CMOS. Support H.264/MJPEG dual codec. Smart triple streams supported. Max 15fps@12MP(4000x3000). Ultra Defog, ROI, EIS. Auto back focus. Bulit-in Mic. 100/1000M Base-T Ethernet.	913,85 €

Accessories for DAHUA™ Box Cameras


P/N	Description	List Price
PFB120W	Wall Mount Bracket. Material: Aluminum. Dimension (W x H x D): 188.7mm(W) x 58mm(H) x 80mm(D). Operating Temperature: -40°C ~60°C. Humidity: 0~90% RH. Load Bearing: 1.0Kg. Applicable Model: CA-F(E/F), CA-FW(D/H/J/K), HAC-HFW(B/D), HDC-HF3200, IPC-HF, IPC-HFW(D).	CONS
PFA121	Junction Box. Material: Aluminum. Dimension (W x D x H): 134mm x 134mm x 55mm. Pipe Thread: N/A. Operating Temperature: -40°C ~60°C. Humidity: 0~90% RH. Load Bearing: 3Kg. Applicable Model: CA-FW[I], HAC-HFW[E], HAC-HDW[M], IPC-HFW[E], PFB120W, PFB121W.	20,42 €
PFA151	Corner Mount Bracket. Material: SECC. Neat & Integrated design. 243mm x 170mm x 138mm. Working with PFB300S, PFB300W, PFB301W, PFA120, PFA130, PFA131, PFA140, PFB300C, HDC-HFW3200C, IPC-HFW(C).	22,13 €
PFA152	Pole Mount Bracket. Material: Aluminum. Neat & Integrated design. 117.5mm x 87mm x 21mm. Mast Diameter 80~130mm. For using with PFA121, PFA130, PFA122, PFA131, PFA123, PFA132, PFB302S . Brackets.	13,02 €
PFH600N	IP66, Indoor housing. Material: ASA + PC. Product Dimension: 312mm(L) x 133mm(W) x 103mm(H). Inside Dimension: 211mm(L) x 73mm(W) x 78(H). Window Dimension: 63(L) x 72(W). Humidity: ≤90% RH (no condensation)	CONS

1.2

FIXED IP COMPACT CAMERAS

Fixed Indoor and Outdoor IP Cameras


AXIS™ M2014 Series Bullet Cameras

	P/N	Model	Description	List Price
	0549-001	AXIS™ M2014-E Bullet Camera	Compact, bullet-style HDTV network camera comprising a main unit and a separate IP66-rated camera unit. Edge storage using microSD card or NAS, Support for ACAP and AXIS™ Camera Companion, I/O port, multiple video streams in H.264 and Motion JPEG. 25/30 fps in all resolutions up to 720p. PoE and 8-28 VDC support. Includes stand and clamp for camera unit and DIN rail mount for main unit. Midspan not included.	335,00 €

Accessories for AXIS™ M2014 Series Cameras

P/N	Description	List Price
5503-741	M20 Gasket for cable diameter 3,5mm to 7mm. 10 pcs.	8,00 €
5503-751	M20 Gasket for cable diameter 6-13mm, 10 pcs.	8,00 €
5503-791	M20 Gasket for cable 8-17mm, 10 pcs.	8,00 €
5503-761	M20 cable gland, 5 pcs.	8,00 €
5505-941	This gasket is specially made for flexible and easy installation. By using the included CONNECTOR GUARD A over the RJ45 connector, you do not need to re-terminate the network cable which gives a much faster and more secure installation. Made for M20 holes and cables from 5 to 15mm in outer diameter. 10 pcs.	8,00 €
5506-421	M20 gasket for small cables like I/O and audio cables. 10 pcs.	8,00 €
5503-951	M20 cable gland for RJ45. Ease of installation, no need of cutting the cable.	16,00 €
5504-041	Backbox for AXIS™ M3006-V, AXIS™ M3007-P/-PV, AXIS™ M3024-LVE/3025-VE/3026-VE/3027-PVE which enables safe cabling through 1/2" (M20) conduits.	24,00 €
5506-041	Cable protection attachment bracket for AXIS™ P32-V Series. Compatible with 1/2" Conduits, M20 pipes and AXIS™ ACI adapters. 5pcs.	16,00 €
5506-571	Stainless steel band for flexible mounting of AXIS™ F Series Sensor units and AXIS™ P12 sensor units. Sold in 10-pack. 10 x M20 x 1.5 nuts to lock the band to the sensor unit are included. Works with all AXIS™ P12 Sensor Units and all AXIS™ F Series Sensor units except AXIS™ F1015.	33,00 €

AXIS™ P14 Series IP Outdoor Compact Cameras







	P/N	Model	Description	List Price
	0620-001	AXIS™ P1405-E Compact Camera	Compact and outdoor-ready HDTV camera for day and night surveillance, IP66-rated, varifocal 2.8-10 mm P-iris lens . Remote 3.5 x optical zoom and focus. Automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p /2MP resolution at 30 fps.Video motion detection, active tampering alarm, corridor format and WDR – Dynamic Contrast. microSD/SDHC memory card slot for edge storage. Integrated bracket for easy mounting on wall and ceiling. Power over Ethernet. Operating conditions -10 °C to 50 °C (14 °F to 122 °F).	503,00 €

1.2


FIXED IP COMPACT CAMERAS

Fixed Indoor and Outdoor IP Cameras

AXIS™ P14 Series IP Outdoor Compact Cameras

	P/N	Model	Description	List Price
	0621-001	AXIS™ P1405-LE Compact Camera	Compact and outdoor-ready HDTV camera for day and night surveillance, IP66-rated, varifocal 2.8-10 mm P-iris lens . Remote 3.5 x optical zoom and focus. Automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p /2MP resolution at 30 fps.Video motion detection, active tampering alarm, corridor format and WDR – Dynamic Contrast. Built-in IR illumination covering up to 10 meters (33 feet). microSD/SDHC memory card slot for edge storage. Integrated bracket for easy mounting on wall and ceiling. Power over Ethernet. Operating conditions -10 °C to 50 °C (14 °F to 122 °F).	545,00 €
	0622-001	AXIS™ P1425-E Compact Camera	Compact and outdoor-ready HDTV camera for day and night surveillance, IP66-rated, varifocal 3-10.5 mm P-iris lens . Remote 3.5 x optical zoom and focus. Automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p /2MP resolution at 30 fps.Video motion detection, active tampering alarm, corridor format and WDR – Dynamic Contrast. I/O ports, microSD/SDHC memory card slot for edge storage. Integrated bracket for easy mounting on wall and ceiling. Power over Ethernet. Operating conditions -30 °C to 50 °C (-22 °F to 122 °F).	545,00 €
	0623-001	AXIS™ P1425-LE Compact Camera	Compact and outdoor-ready HDTV camera for day and night surveillance, IP66-rated, varifocal 3-10.5 mm P-iris lens . Remote 3.5 x optical zoom and focus. Automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p /2MP resolution at 30 fps.Video motion detection, active tampering alarm, corridor format and WDR – Dynamic Contrast. I/O ports, microSD/SDHC memory card slot for edge storage. OptimizedIR, a power-efficient LED technology with adaptable angle of IR illumination up to 15 meters (50 feet). Integrated bracket for easy mounting on wall and ceiling. Power over Ethernet. Operating conditions -30 °C to 50 °C (-22 °F to 122 °F).	587,00 €
	0624-001	AXIS™ P1427-E Compact Camera	Compact and outdoor-ready HDTV camera for day and night surveillance, IP66-rated, varifocal 2.8-9.8 mm P-iris lens . Remote 3.5 x optical zoom and focus. Automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max 5 MP resolution at 12.5 fps.Video motion detection, active tampering alarm, corridor format and WDR – Dynamic Contrast. I/O ports, microSD/SDHC memory card slot for edge storage. Integrated bracket for easy mounting on wall and ceiling. Power over Ethernet. Operating conditions -30 °C to 50 °C (-22 °F to 122 °F).	629,00 €
	0625-001	AXIS™ P1427-LE Compact Camera	Compact and outdoor-ready HDTV camera for day and night surveillance, IP66-rated, varifocal 2.8-9.8 mm P-iris lens . Remote 3.5 x optical zoom and focus. Automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max 5 MP resolution at 12.5 fps.Video motion detection, active tampering alarm, corridor format and WDR – Dynamic Contrast. I/O ports, microSD/SDHC memory card slot for edge storage. OptimizedIR, a power-efficient LED technology with adaptable angle of IR illumination up to 15 meters (50 feet). Integrated bracket for easy mounting on wall and ceiling. Power over Ethernet. Operating conditions -30 °C to 50 °C (-22 °F to 122 °F).	671,00 €
	0637-001	AXIS™ P1428-E Compact Camera	Compact and outdoor-ready 4K Ultra HD camera for day and night surveillance, IP66-rated, varifocal 3.3-9.8 mm P-iris lens . Remote 3 x optical zoom and focus. Automatic IR cut filter. Multiple, individually configurable H.264 and Motion JPEG streams; max 8.3 MP/4K Ultra HD resolution at 30 fps.Video motion detection, active tampering alarm and WDR – Dynamic Contrast. I/O ports, microSD/SDHC memory card slot for edge storage. Integrated bracket for easy mounting on wall and ceiling. Power over Ethernet. Operating conditions -30 °C to 50 °C (-22 °F to 122 °F).	839,00 €

AXIS™ Q17 Series IP Outdoor Compact Cameras


	P/N	Model	Description	List Price
	0509-001	AXIS™ Q1765-LE Compact Camera	Outdoor, IP66 and NEMA 4X-rated, 1080p HDTV camera with 18x optical zoom, auto focus and day/night mode. Integrated IR LED illumination. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p resolution at 25/30 fps. WDR- dynamic contrast. Video motion detection and active tampering alarm. Two way audio and I/O with multi-connector cable (not included). microSD/MicroSDHC memory card slot for optional local video storage. Operation in -40°C to +50°C. Powered by PoE (IEEE 802-3af), 8-28 V DC or 20-24 V AC. Includes a removable sunshield, integrated wall/ceiling mount. Power supply or midspan not included.	1.175,00 €

1.2

FIXED IP COMPACT CAMERAS

Fixed Indoor and Outdoor IP Cameras

AXIS™ Q17 Series IP Outdoor Compact Cameras

P/N	Model	Description	List Price
	0644-001	AXIS™ Q1765-LE Compact Camera with PTZ Head	1.175,00 €
		Outdoor, IP66 and NEMA 4X-rated, 1080p HDTV camera with 18x optical zoom, auto focus and day/night mode. Integrated IR LED illumination. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p resolution at 25/30 fps. WDR- dynamic contrast. Video motion detection and active tampering alarm. Serial port supporting RS422/485 communication for connection to a pan-tilt motor. MicroSD/MicroSDHC memory card slot for optional local video storage. Operation in -40°C to +50°C. Powered by PoE (IEEE 802-3af), 8-28 V DC or 20-24 V AC. Includes a removable sunshield. Power supply, midspan or pan-tilt motor not included.	

Accessories for AXIS™ Q17 Compac Series

P/N	Description	List Price
5502-461	YP3040 PAN TILT MOTOR is a compact PT motor for use with AXIS™ Q1755 Network Cameras and AXIS™ Q19 Series Network Thermal Cameras. Indoor and outdoor use. IP66-rated. 24VAC input. Compatible with AXIS™ T92A Housing and AXIS™ T92E Housing. YP3040 Wall bracket required. AXIS™ PS24 recommended.	419,00 €
5506-091	Sparepart foot chassis for AXIS™ Q1765-LE and AXIS™ Q193X-E. Note. This sales part does not include the mounting bracket (5506-081 AXIS™ T94G01S Mounting plate).	33,00 €
5801-101	Sparepart front window for AXIS™ Q1765-LE.	24,00 €
5015-001	Outdoor IP66 rated housing for AXIS™ 210/210A, 211/211A/211M/211W, 221/223M, Q1755 and P13 Series. Made of die-cast aluminum, the sunshield of ABS material. 110VAC-230VAC input and built in 12VDC camera power supply. NOT FOR USA.	209,00 €
5015-202	Outdoor High PoE powered IP66 rated housing for AXIS™ 210/210A, 211/211A/211M/211W, 221/223M, Q1755 and P13 Series. Made of die-cast aluminum, the sunshield of ABS material. Also includes heater, wall bracket with internal cable channel and AXIS™ T8121 single port High PoE midspan. Country Specific.	377,00 €
0344-001	Protective camera housing for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	167,00 €
0433-001	Outdoor PoE camera housing with window-/camera heaters and fan for P13XX, M11XX, Q16XX and Q1755. Die cast aluminum casing and wallbracket, polycarbonate sunshield. The housing is IP66-, Nema 4X-, Vibration 4M3 rated and IK10 impact-resistant. Sunshield, wallbracket and screwdriver included.	276,00 €
0217-191	Polycarbonate outdoor housing for the AXIS™ 210 (indoor only), 211, 211A, 211W, 221, 223, P13 Series and AXIS™ Q1755 Network Camera. Heater and sunshield included, bracket and power supply not included. NOT FOR USA	29,00 €
5900-161	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. The camera is mounted on the door of the cabinet. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included. Compatible cameras: AXIS™ M11X-E, P13XX-E, Q16XX-E, Q1755-E, Q191X-E Q192X-E.	226,00 €
5022-211	Metal stand for wall or hard ceiling mount. Compatible with all standard tripod thread cameras e.g. AXIS™ Q17/19 series and AXIS™ P13 series.	24,00 €
5017-211	Metal stand for wall or hard ceiling mount. Compatible with all standard tripod thread cameras e.g. AXIS™ Q17/19 series and AXIS™ P13 series.	24,00 €
5505-181	Back box for 3/4" (M25) conduits/cable protection pipes. Compatible with AXIS™ Q1765-LE and AXIS™ Q1931-E.	24,00 €
5506-081	Sparepart mounting bracket for AXIS™ Q1765-LE, Q1931-E, Q1932-E.	24,00 €

1.2







FIXED IP COMPACT CAMERAS

Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ Q17 Compac Series

P/N	Description	List Price
5504-711	Corner mount for AXIS™ P5414-E/15-E, AXIS™ Q1765-LE, AXIS™ Q1931-E and AXIS™ P33-VE series.	66,00 €
5505-141	Back box to enable external cable entry or use of cable protection equipment. Hole for 3/4 inch conduits or M25 cable protection pipes. Compatible with AXIS™ T94Q01A Wall mount, all AXIS™ M11-E/P13-E/Q16-E/Q1755-E/Q1910-E/21-E/22-E outdoor fixed box camera wall mounts and AXIS™ T92E Series and AXIS™ T93E05 Fixed camera housings.	29,00 €

HIKVISION™ IP Compact Cameras


P/N	Model	Description	List Price
	DS-2CD2012I-BUL HIKVISION™ DS-2CD2012I-BUL Compact Camera	Bullet IP camera Day / Night. CMOS sensor 1/3". Progressive scan. Mechanical switching. Optics 4 mm. Sensitivity: AGC ON F1.2 - 0.01 lux (0 lux with IR). Resolution: 1.3 Megapixels (1280x960 / 1280x720). Compression formats. H.264 / MJPEG. Short IR LEDs range. BLC, 3D-DNR, DWDR. Compatible with ONVIF, PSIA, CGI. Power supply: 12VDC 580mA / 802.3af PoE (Power source not included). IP66. Dimensions: 61x77x140 mm.	CONS
	DS-2CD2032I-BUL HIKVISION™ DS-2CD2032I-BUL Compact Camera	Bullet IP camera Day / Night. CMOS sensor 1/3". Progressive scan. Mechanical switching. Optics 4 mm. Sensitivity: AGC ON F1.2 - 0.01 lux (0 lux with IR). Resolution: 3 Megapixels (2048x1536). Compression formats. H.264 / MJPEG. Short IR LEDs range. BLC, 3D-DNR, DWDR. Compatible with ONVIF, PSIA, CGI. Power supply: 12VDC 650mA / 802.3af PoE (Power source not included). IP66. Dimensions: 61x77x140 mm.	CONS
	DS-2CD2612F-I HIKVISION™ DS-2CD2612F-I Compact Camera	Bullet IP camera Day / Night. CMOS sensor 1/3". Progressive scan. Mechanical switching. Optics 2.8-12 mm. Sensitivity: AGC ON F1.2 - 0.01 lux (0 lux with IR). Resolution: 1.3 Megapixels (1280x960 / 1280x720). Compression formats. H.264 / MJPEG. 20-30m IR LEDs range. BLC, 3D-DNR, DWDR. Compatible with ONVIF, PSIA, CGI. Supports SD card. Power supply: 12VDC 650mA / 802.3af PoE (Power source not included). IP66. Dimensions: 95x105x258.6 mm.	546,11 €
	DS-2CD2632F-I HIKVISION™ DS-2CD2632F-I Compact Camera	Bullet IP camera Day / Night. CMOS sensor 1/3". Progressive scan. Mechanical switching. Optics 2.8-12 mm. Sensitivity: AGC ON F1.2 - 0.01 lux (0 lux with IR). Resolution: 3 Megapixels (2048x1536 @ 12.5 fps, 1920x1080 @ 25 fps, 1280x720 @ 25 fps). Compression formats. H.264 / MJPEG. 20-30m IR LEDs range. BLC, 3D-DNR, DWDR. Compatible with ONVIF, PSIA, CGI. Supports SD card. Power supply: 12VDC 650mA / 802.3af PoE (Power source not included). IP66. Dimensions: 95x105x258.6 mm.	618,86 €
	DS-2CD2232-I5 HIKVISION™ DS-2CD2232-I5 Compact Camera	Bullet EXIR IP camera Day / Night. CMOS sensor 1/3". Progressive scan. Mechanical switching. Optics 4 mm. Sensitivity: AGC ON F2.0 - 0.19 lux (0 lux with IR). Resolution: 3 Megapixels (2048x1536 @ 15 fps, 1920x1080 @ 25 fps and 1280x720 @ 25 fps). Compression formats. H.264 / MJPEG. 50m IR LEDs range. BLC, 3D-DNR, DWDR. Compatible with ONVIF, PSIA, CGI. Water mark. Smart detection for motion. Supports SD card (64GB max). Power supply: 12VDC 750mA / 802.3af PoE (Power source not included). IP66. Dimensions: 100.5 x 88.1 x 157.3 mm.	361,81 €
	DS-2CD2T22-I5 HIKVISION™ DS-2CD2T22-I5 Compact Camera	Bullet EXIR IP camera Day / Night. CMOS sensor 1/3". Progressive scan. Mechanical switching. Optics 4 mm. Sensitivity: AGC ON F2.0 - 0.19 lux (0 lux with IR). Resolution: 2 Megapixels (1920x1080, 1080x960 and 1280x720 @ 25 fps). Compression formats. H.264 / MJPEG. 50m IR LEDs range. BLC, 3D-DNR, DWDR. Compatible with ONVIF, PSIA, CGI. Water mark. Smart detection for line cross, faces, tamper, motion and scene change. Supports SD card (64GB max). Power supply: 12VDC 600mA / 802.3af PoE (Power source not included). IP66. Dimensions: Ø105 x 300 mm.	307,49 €

1.2




FIXED IP COMPACT CAMERAS

Fixed Indoor and Outdoor IP Cameras

HIKVISION™ IP Compact Cameras

P/N	Model	Description	List Price
 DS-2CD2T22-I8	HIKVISION™ DS-2CD2T22-I8 Compact Camera	Bullet EXIR IP camera Day / Night. CMOS sensor 1/3". Progressive scan. Mechanical switching. Optics 4 mm. Sensitivity: AGC ON F2.0 - 0.19 lux (0 lux with IR). Resolution: 2 Megapixels (1920x1080, 1080x960 and 1280x720 @ 25 fps). Compression formats. H.264 / MJPEG. 80m IR LEDs range. BLC, 3D-DNR, DWDR. Compatible with ONVIF, PSIA, CGI. Water mark. Smart detection for line cross, faces, tamper, motion and scene change. Supports SD card (64GB max). Power supply: 12VDC 600mA / 802.3af PoE (Power source not included). IP66. Dimensions: Ø105 x 300 mm.	329,80 €


HIKVISION™ SMART™ Series IP Compact Cameras

P/N	Model	Description	List Price
 DS-2CD4212F-IZS	HIKVISION™ DS-2CD4212F-IZS Smart™ Compact Camera	Megapixel bullet IP camera. Outdoor IP66. CMOS Sensor 1/3". Motorized varifocal 2.8-12 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux (colour), and 0.014 (B/W) - (F1.2, AGC ON). Resolution: 1.3 Megapixel (1280x1024 @ 25 fps, 1280x960 @ 25 fps, 1280x720 @ 50 fps). Compression format H.264 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. TI 365 platform. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card (Max 64 GBytes). PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions: 98x105x328.8 mm.	825,47 €
 DS-2CD4224F-IZS	HIKVISION™ DS-2CD4224F-IZS Smart™ Compact Camera	Megapixel bullet IP camera. Outdoor IP66. CMOS Sensor 1/3". Motorized varifocal 2.8-12 mm lens. Day/night mechanical switching. Sensitivity: 0.02 lux (colour), and 0.027 (B/W) - (F1.2, AGC ON). Resolution: 2 Megapixel (1920x1080 @ 25 fps, 1280x960 @ 25 fps, 1280x720 @ 25 fps). Compression format H.264 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. TI 365 platform. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card (Max 64 GBytes). PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions: 98x105x328.8 mm.	1.074,76 €
 DS-2CD4232FWD-IZS	HIKVISION™ DS-2CD4232FWD-IZS Smart™ Compact Camera	Megapixel bullet IP camera. Outdoor IP66. CMOS Sensor 1/3". Motorized varifocal 2.8-12 mm lens. Day/night mechanical switching. Sensitivity: 0.02 lux (colour), and 0.027 (B/W) - (F1.2, AGC ON). Resolution: 3 Megapixel (2048x1536 @ 20 fps, 1920x1080 @ 25 fps, 1280x720 @ 25 fps). Compression format H.264 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR 120 dB. BLC, HLC, Smart Defog, EIS, ROI. Bidirectional audio. I/O interface. Reset button. TI 365 platform. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card (Max 64 GBytes). PoE 802.3af, 12VDC/800mA, 24VAC/400mA (power source not included). Dimensions: 98x105x328.8 mm.	1.204,74 €

Accessories for HIKVISION™ Compact Cameras

P/N	Description	List Price
DS-1260ZJ	Wall bracket for bullet HIKVISION™ IP cameras. Models DS-2CD2612 and DS-2CD2632. White. Outdoor.	23,28 €

DAHUA™ IP Compact Cameras









P/N	Model	Description	List Price
 IPC-HFW1000S	DAHUA™ IPC-HFW1000S IP Bullet Camera	1/4", 1Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 25/30fps@720P(1280x 720). DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (6mm,8mm optional). Max. IR LEDs Length 30m. IP66, PoE.	CONS

1.2

FIXED IP COMPACT CAMERAS

Fixed Indoor and Outdoor IP Cameras

DAHUA™ IP Compact Cameras




	P/N	Model	Description	List Price
	IPC-HFW1000S-W	DAHUA™ IPC-HFW1000S-W IP Bullet Camera	1/4" 1Megapixel progressive scan CMOS, H.264 & MJPEG dual-stream encoding. Max 25/30fps@720P(1280x720). DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (6mm optional). Max. IR LEDs Length 30m. Wi-Fi support. IP66 DC12V.	91,90 €
	IPC-HFW2100-0600	DAHUA™ IPC-HFW2100-0600 IP Bullet Camera	1/3" 1.3 Megapixel Aptina CMOS image sensor. High-performance TI DaVinci series DSP. H.264&MJPEG video compression and JPEG image capture. Max 25/30fps@720P(1280x720) , 15fps@1.3M(1280x960) resolution. Dual encoding streams supported. Lens: 6mm (3.6mm/8mm optional). Max. IR Distance: 20m. True Day/Night ICR. IP66 all-environments protection, 4000V thunder-proof, constant temperature automatic. Control & anti-fog. Support DC12V power supply, PoE. Built-in Web server, NVR, CMS(PSS/DSS) & DMSS.	192,30 €
	IPC-HFW2100R-VF	DAHUA™ IPC-HFW2100R-VF IP Bullet Camera	1/3" 1.3Megapixel progressive scan Aptina CMOS, H.264 & MJPEG dual-stream encoding, 25/30fps@1.3M (1280x960) & 25/30fps@720P (1280x720), DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC, Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS, 2.8-12mm varifocal lens, Max IR LEDs Length 30m, IP66, PoE.	190,60 €
	IPC-HFW5100-IRA	DAHUA™ IPC-HFW5100-IRA IP Bullet Camera	1/3" 1.3Megapixel progressive scan Aptina CMOS. H.264 ,H.264H & MJPEG dual-stream encoding. 25/30fps@1.3M(1280x960)& 25/30fps@720P(1280x720). DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.3mm-12mm varifocal lens(7mm-22mm optional). Max. IR LEDs Length 100m. IP66, PoE.	316,53 €
	IPC-HFW1200S-W	DAHUA™ IPC-HFW1200S-W IP Bullet Camera	1/3" 3Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 25/30fps@1080P(1920x1080). DWDR, Day/Night(ICR), AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (6mm optional). Max. IR LEDs Length 30m. Wi-Fi support. IP66 DC12V.	114,01 €
	IPC-HFW5200E-Z12	DAHUA™ IPC-HFW5200E-Z12 IP Bullet Camera	1/2.8" 2 Megapixel progressive scan CMOS. 5.1-61.2mm 12x optical zoom. H.264&MJPEG dual-stream encoding. Max 25/30fps@1080P(1920x1080). WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Built-in 1/1 alarm in/out. Micro SD memory, IP66, PoE.	599,01 €
	IPC-HFW1300S	DAHUA™ IPC-HFW1300S IP Bullet Camera	1/3" 3Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 20fps@3M(2048x1536)&25/30fps@1080P(1920x1080). DWDR, Day/Night(ICR), AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (6mm optional). Max. IR LEDs Length 30m. IP66, PoE.	CONS
	IPC-HFW2300R-Z	DAHUA™ IPC-HFW2300R-Z IP Bullet Camera	1/3" 3Megapixel progressive CMOS. H.264 & MJPEG dual-stream encoding. Max 20fps@3M(2048x1536) &25/30fps@1080P(1920x1080). DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 2.7-12mm varifocal lens. Max IR LEDs Length 30m. IP66, PoE.	CONS

1.2

FIXED IP COMPACT CAMERAS

Fixed Indoor and Outdoor IP Cameras

DAHUA™ IP Compact Cameras

P/N	Model	Description	List Price
 IPC-HFW5300E-Z	DAHUA™ IPC-HFW5300E-Z IP Bullet Camera	1/3" 3Megapixel progressive scan Aptina CMOS. H.264&MJPEG dual-stream encoding. Max 20fps@3M(2048x 1536), 25/30fps@1080P(1920x 1080). DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 2.8mm ~12mm varifocal lens (5300E-VF). 3-9mm varifocal motorized lens (5300E-Z). Max. IR LEDs Length 30m. IP66, PoE.	CONS
 IPC-HFW5421E-Z	DAHUA™ IPC-HFW5421E-Z IP Bullet Camera	1/3" 4Megapixel progressive scan CMOS. Support H.264&MJPEG dual codec. Max 20fps@4Mp(2688x1520),25/30fps@3M(2304x1296). Smart Detection supported. WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 2.7mm ~12mm motorized lens. 2/1 Alarm in/out, 1/1 audio in/out. Max. IR LEDs Length 50m. Micro SD memory, IP67, PoE.	399,91 €
 IPC-HFW8301E	DAHUA™ IPC-HFW8301E IP Bullet Camera	1/3" 3 Megapixel progressive scan CMOS. Support H.264/MJPEG dual codec. Smart triple streams supported. Max 25/30fps@3MP(2048x1536). Ultra WDR (Wide Dynamic Range) up to 120dB. Ultra 3D DNR. Ultra Defog, ROI, EIS. Smart IR technology. Smart detection: Face detection; Tripwire detection; Intrusion detection; Scene change detection. 100/1000M Base-T Ethernet. Micro SD memory, IP66, PoE.	658,58 €

Accessories for DAHUA™ Compact Cameras

P/N	Description	List Price
PFA121	Junction Box. Material: Aluminum. Dimension (W x D x H): 134mm x 134mm x 55mm. Pipe Thread: N/A. Operating Temperature: -40°C ~60°C. Humidity: 0~90% RH. Load Bearing: 3Kg. Applicable Model: CA-FW[I], HAC-HFW[E], HAC-HDW[M], IPC-HFW[E], PFB120W, PFB121W.	20,42 €
PFA151	Corner Mount Bracket. Material: SECC. Neat & Integrated design. 243mm x 170mm x 138mm. Working with PFB300S, PFB300W, PFB301W, PFA120, PFA130, PFA131, PFA140, PFB300C, HDC-HFW3200C, IPC-HFW(C).	22,13 €
PFA152	Pole Mount Bracket. Material: Aluminum. Neat & Integrated design. 117.5mm x 87mm x 21mm. Mast Diameter 80~130mm. For using with PFA121, PFA130, PFA122, PFA131, PFA123, PFA132, PFB302S . Brackets.	13,02 €

1.3

FIXED IP THERMAL CAMERAS

IP Cameras for High Security Environments

AXIS™ Q19 Series Fixed IP Outdoor Thermal Compact Cameras

	P/N	Model	Description	List Price
	0600-001	AXIS™ Q1931-E (7mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 30 fps, and 50° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €
	0596-001	AXIS™ Q1931-E (7mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 8.3 fps, and 50° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €
	0683-001	AXIS™ Q1931-E (7mm 30 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 30 fps, and 50° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €
	0679-001	AXIS™ Q1931-E (7mm 8.3 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 8.3 fps, and 50° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €
	0601-001	AXIS™ Q1931-E (13mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 30 fps, and 28° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €
	0597-001	AXIS™ Q1931-E (13mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 8.3 fps, and 28° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €
	0684-001	AXIS™ Q1931-E (13mm 30 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 30 fps, and 28° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €
	0680-001	AXIS™ Q1931-E (13mm 8.3 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 8.3 fps, and 28° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	2.938,00 €

1.3

FIXED IP THERMAL CAMERAS

IP Cameras for High Security Environments

AXIS™ Q19 Series Fixed IP Outdoor Thermal Compact Cameras

	P/N	Model	Description	List Price
	0602-001	AXIS™ Q1931-E (35mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 30 fps, and 10° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	3.526,00 €
	0598-001	AXIS™ Q1931-E (35mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 8.3 fps, and 10° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	3.526,00 €
	0685-001	AXIS™ Q1931-E (35mm 30 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 30 fps, and 10° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	3.526,00 €
	0681-001	AXIS™ Q1931-E (35mm 8.3 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 8.3 fps, and 10° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	3.526,00 €
	0603-001	AXIS™ Q1931-E (60mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 30 fps, and 6° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.205,00 €
	0599-001	AXIS™ Q1931-E (60mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 384x288 resolution, 8.3 fps, and 6° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.205,00 €
	0686-001	AXIS™ Q1931-E (60mm 30 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 30 fps, and 6° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.205,00 €
	0682-001	AXIS™ Q1931-E (60mm 8.3 FPS) Thermal Camera with PTZ Head	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 384x288 resolution, 8.3 fps, and 6° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.205,00 €

1.3

FIXED IP THERMAL CAMERAS

IP Cameras for High Security Environments

AXIS™ Q19 Series Fixed IP Outdoor Thermal Compact Cameras

	P/N	Model	Description	List Price
	0608-001	AXIS™ Q1932-E (10mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 30 fps, 57° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €
	0604-001	AXIS™ Q1932-E (10mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 8.3 fps and 57° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €
	0704-001	AXIS™ Q1932-E (10mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 30 fps and 57° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €
	0700-001	AXIS™ Q1932-E (10mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 8.3 fps and 57° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €
	0609-001	AXIS™ Q1932-E (19mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 30 fps and 32° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €
	0605-001	AXIS™ Q1932-E (19mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 8.3 fps and 32° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €
	0705-001	AXIS™ Q1932-E (19mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 30 fps and 32° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €
	0701-001	AXIS™ Q1932-E (19mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 8.3 fps and 32° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	5.877,00 €

1.3

FIXED IP THERMAL CAMERAS

IP Cameras for High Security Environments

AXIS™ Q19 Series Fixed IP Outdoor Thermal Compact Cameras

	P/N	Model	Description	List Price
	0610-001	AXIS™ Q1932-E (35mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 30 fps and 18° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	6.717,00 €
	0606-001	AXIS™ Q1932-E (35mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 8.3 fps and 18° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	6.717,00 €
	0706-001	AXIS™ Q1932-E (35mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 30 fps and 18° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	6.717,00 €
	0702-001	AXIS™ Q1932-E (35mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 8.3 fps and 18° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	6.717,00 €
	0611-001	AXIS™ Q1932-E (60mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 30 fps and 10° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	8.396,00 €
	0607-001	AXIS™ Q1932-E (60mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for wall and ceiling mount, IP66 and IP67-rated, 640x480 resolution, 8.3 fps and 10° angle of view. It supports ONVIF, H.264, audio, local storage, I/O, PoE, tampering alarm, motion and audio detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	8.396,00 €
	0707-001	AXIS™ Q1932-E (60mm 30 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 30 fps and 10° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	8.396,00 €
	0703-001	AXIS™ Q1932-E (60mm 8.3 FPS) Thermal Camera	Outdoor Thermal Network Camera for pan/tilt motor head, IP66-rated, 640x480 resolution, 8.3 fps and 10° angle of view. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, tampering alarm, motion detection, and AXIS™ Camera Application Platform. Shipped with AXIS™ ACAP VMD 3.0 and CLD (license included).	8.396,00 €





1.3 | FIXED IP THERMAL CAMERAS

IP Cameras for High Security Environments

Accessories for AXIS™ Q19 Series

P/N	Description	List Price
5502-461	YP3040 PAN TILT MOTOR is a compact PT motor for use with AXIS™ Q1755 Network Cameras and AXIS™ Q19 Series Network Thermal Cameras. Indoor and outdoor use. IP66-rated. 24VAC input. Compatible with AXIS™ T92A Housing and AXIS™ T92E Housing. YP3040 Wall bracket required. AXIS™ PS24 recommended.	419,00 €
5506-091	Sparepart foot chassis for AXIS™ Q1765-LE and AXIS™ Q193X-E. Note. This sales part does not include the mounting bracket (5506-081 AXIS™ T94G01S Mounting plate).	33,00 €
5900-161	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. The camera is mounted on the door of the cabinet. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included. Compatible cameras: AXIS™ M111X-E, P13XX-E, Q16XX-E, Q1755-E, Q191X-E Q192X-E.	226,00 €
5505-181	Back box for 3/4" (M25) conduits/cable protection pipes. Compatible with AXIS™ Q1765-LE and AXIS™ Q1931-E.	24,00 €
5506-081	Sparepart mounting bracket for AXIS™ Q1765-LE, Q1931-E, Q1932-E	24,00 €
5504-711	Corner mount for AXIS™ P5414-E/15-E, AXIS™ Q1765-LE, AXIS™ Q1931-E and AXIS™ P33-VE series.	66,00 €
5505-141	Back box to enable external cable entry or use of cable protection equipment. Hole for 3/4 inch conduits or M25 cable protection pipes. Compatible with AXIS™ T94Q01A Wall mount, all AXIS™ M11-E/P13-E/Q16-E/Q1755-E/Q1910-E/21-E/22-E outdoor fixed box camera wall mounts and AXIS™ T92E Series and AXIS™ T93E05 Fixed camera housings.	29,00 €

AXIS™ Q29 Series Fixed IP Outdoor Thermal Compact Cameras

	P/N	Model	Description	List Price
	0645-001	AXIS™ Q2901-E 9MM 8.3 FPS Camera	AXIS™ Q2901-E Temperature alarm camera for wall and ceiling mount, IP66-rated, 336x256 resolution, 8.3 fps, and 35° angle of view. Six temperature alarm zones, isothermal palettes and spot temperature. It supports ONVIF, H.264, audio, local storage, I/O, PoE, shock detection, AXIS™ Video Motion Detection 3.0, audio detection and AXIS™ Camera Application Platform.	4.366,00 €
	0646-001	AXIS™ Q2901-E PTMOUNT 9MM 8.3 FPS Camera	AXIS™ Q2901-E PT Mount Temperature alarm camera ready for pan/tilt motor head, IP66-rated, 336x256 resolution, 8.3 fps, and 35° angle of view. Six temperature alarm zones, isothermal palettes and spot temperature. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, shock detection, AXIS™ Video Motion Detection 3.0, and AXIS™ Camera Application Platform.	4.366,00 €
	0647-001	AXIS™ Q2901-E 19MM 8.3 FPS Camera	AXIS™ Q2901-E Temperature alarm camera for wall and ceiling mount, IP66-rated, 336x256 resolution, 8.3 fps, and 17° angle of view. Six temperature alarm zones, isothermal palettes and spot temperature. It supports ONVIF, H.264, audio, local storage, I/O, PoE, shock detection, AXIS™ Video Motion Detection 3.0, audio detection and AXIS™ Camera Application Platform.	4.366,00 €
	0648-001	AXIS™ Q2901-E PTMOUNT 19MM 8.3 FPS Camera	AXIS™ Q2901-E PT Mount Temperature alarm camera ready for pan/tilt motor head, IP66-rated, 336x256 resolution, 8.3 fps, and 17° angle of view. Six temperature alarm zones, isothermal palettes and spot temperature. It supports ONVIF, H.264, local storage, RS422/RS485, PoE, shock detection, AXIS™ Video Motion Detection 3.0, and AXIS™ Camera Application Platform.	4.366,00 €

1.4 | SPECIAL IP FORM FACTOR CAMERAS

Indoor Cameras. Compact Form-Factor





AXIS™ P85 Series Height Strip Cameras

	P/N	Model	Description	List Price
	0657-001	AXIS™ P8524 Height Strip Camera Black (Imperial)	Height strip camera with a pinhole sensor unit inside the height strip and a separate main unit. Black aluminum housing with an imperial (feet) height indicator. When mounted on a wall, it serves as an eye-level camera for facial identification. HDTV 720p resolution at 30 fps, fixed focal pinhole lens, multiple, individually configurable H.264 and Motion JPEG streams, video motion detection and active tampering alarm. Power over Ethernet and 8-28 V DC, input/output ports and microSD card slot for edge storage.	503,00 €
	0687-001	AXIS™ P8524 Height Strip Camera Silver (Metric)	Height strip camera with a pinhole sensor unit inside the height strip and a separate main unit. Silver aluminum housing with an metric height indicator. When mounted on a wall, it serves as an eye-level camera for facial identification. HDTV 720p resolution at 30 fps, fixed focal pinhole lens, multiple, individually configurable H.264 and Motion JPEG streams, video motion detection and active tampering alarm. Power over Ethernet and 8-28 V DC, input/output ports and microSD card slot for edge storage.	503,00 €
	0688-001	AXIS™ P8524 Height Strip Camera Black (Metric)	Height strip camera with a pinhole sensor unit inside the height strip and a separate main unit. Black aluminum housing with a metric height indicator. When mounted on a wall, it serves as an eye-level camera for facial identification. HDTV 720p resolution at 30 fps, fixed focal pinhole lens, multiple, individually configurable H.264 and Motion JPEG streams, video motion detection and active tampering alarm. Power over Ethernet and 8-28 V DC, input/output ports and microSD card slot for edge storage.	503,00 €
	0711-001	AXIS™ P8535 Height Strip Camera Silver (Imperial)	HDTV 1080p height strip camera with a pinhole sensor unit inside the height strip and a separate main unit. Silver aluminum housing with an imperial height indicator. When mounted on a wall, it serves as an eye-level camera for face identification. WDR – Forensic Capture, multiple, individually configurable H.264 and Motion JPEG streams, video motion detection and active tampering alarm. Two-way audio. Power over Ethernet and 8-28 V DC, Input/Output ports and SD card slot for Edge storage.	671,00 €
	0712-001	AXIS™ P8535 Height Strip Camera Black (Imperial)	HDTV 1080p height strip camera with a pinhole sensor unit inside the height strip and a separate main unit. Black aluminum housing with an imperial height indicator. When mounted on a wall, it serves as an eye-level camera for face identification. WDR – Forensic Capture, multiple, individually configurable H.264 and Motion JPEG streams, video motion detection and active tampering alarm. Two-way audio. Power over Ethernet and 8-28 V DC, Input/Output ports and SD card slot for Edge storage.	671,00 €
	0713-001	AXIS™ P8535 Height Strip Camera Silver (Metric)	HDTV 1080p height strip camera with a pinhole sensor unit inside the height strip and a separate main unit. Silver aluminum housing with a metric height indicator. When mounted on a wall, it serves as an eye-level camera for face identification. WDR – Forensic Capture, multiple, individually configurable H.264 and Motion JPEG streams, video motion detection and active tampering alarm. Two-way audio. Power over Ethernet and 8-28 V DC, Input/Output ports and SD card slot for Edge storage.	671,00 €
	0714-001	AXIS™ P8535 Height Strip Camera Black (Metric)	HDTV 1080p height strip camera with a pinhole sensor unit inside the height strip and a separate main unit. Black aluminum housing with a metric height indicator. When mounted on a wall, it serves as an eye-level camera for face identification. WDR – Forensic Capture, multiple, individually configurable H.264 and Motion JPEG streams, video motion detection and active tampering alarm. Two-way audio. Power over Ethernet and 8-28 V DC, Input/Output ports and SD card slot for Edge storage.	671,00 €

1.4 | SPECIAL IP FORM FACTOR CAMERAS

Indoor Cameras. Compact Form-Factor

AXIS™ P12 Series Miniature Cameras

	P/N	Model	Description	List Price
	0531-001	AXIS™ P1204 Miniature Camera	Miniature HDTV pinhole camera for discreet surveillance. Cable from sensor unit going with a 90° angle vs the lens. Edge storage using microSD card or NAS. ACAP support, I/O port, multiple video streams in H.264 and Motion JPEG. 25/30 fps in all resolutions up to 720p. PoE and 8-28 VDC support.	419,00 €
	0532-001	AXIS™ P1214 Miniature Camera	Miniature HDTV pinhole camera for discreet surveillance. Cable from sensor unit going in the direction of the lens. Edge storage using microSD card or NAS. ACAP support, I/O port, multiple video streams in H.264 and Motion JPEG. 25/30 fps in all resolutions up to 720p. PoE and 8-28 VDC support.	419,00 €
	0533-001	AXIS™ P1214-E Miniature Camera	Miniature HDTV camera for discreet outdoor surveillance. Cable from sensor unit going in the direction of the lens. Edge storage using microSD card or NAS. ACAP support, I/O port, multiple video streams in H.264 and Motion JPEG. 25/30 fps in all resolutions up to 720p. PoE and 8-28 VDC support.	419,00 €
	0654-001	AXIS™ P1224-E Miniature Camera	Miniature HDTV camera for discreet indoor/outdoor surveillance with 145° horizontal field of view. Edge storage using microSD card or NAS. ACAP support, I/O port, multiple video streams in H.264 and Motion JPEG. 25/30 fps in all resolutions up to 720p. PoE and 8-28 VDC support.	419,00 €



Accessories for AXIS™ P12 Series

P/N	Description	List Price
5800-421	Original mounting kit for AXIS™ P1204. Kit contents: Sensor unit cover skin, bracket, angled bracket and camera holder. 5 pack.	41,00 €
5800-431	Original mounting kit for AXIS™ P1214/-E. Kit contents: sensor unit housing, flush wall mount bracket. 5 pack.	83,00 €
5800-461	Mounting kit for AXIS™ P1204/E. Kit contents: Flush mount wall bracket. 5 pack.	24,00 €
5506-571	Stainless steel band for flexible mounting of AXIS™ F Series Sensor units and AXIS™ P12 sensor units. Sold in 10-pack. 10 x M20 x 1.5 nuts to lock the band to the sensor unit are included. Works with all AXIS™ P12 Sensor Units and all AXIS™ F Series Sensor units except AXIS™ F1015.	33,00 €
5506-271	Height strip housing for use with an AXIS™ F Series Main Unit and AXIS™ F1025 Sensor Unit. Can also be used with AXIS™ P1204. Comes with both a metric and an imperial height strip. Silver aluminium housing.	83,00 €






1.4 | SPECIAL IP FORM FACTOR CAMERAS

Indoor Cameras. Compact Form-Factor

AXIS™ Main Units

	P/N	Model	Description	List Price
	0658-001	AXIS™ F41 Main Unit	AXIS™ F41 Main Unit. To be used with any of AXIS™ F Series Sensor Units. Supports full HDTV 1080p and WDR - Forensic Capture. Two way audio, 4 configurable I/Os with 12 V output and RS232. Supports Edge Storage through NAS or SD card (optional). PoE and 8-28 V DC support.	377,00 €
	0659-001	AXIS™ F44 Main Unit	AXIS™ F44 Main Unit. 4-channel main unit to be used with any of AXIS™ F Series Sensor Units. Supports 1080p in 15/12.5 fps or 720p in full frame rate. Two way audio, 4 configurable I/Os with 12 V output and RS232. Supports Edge Storage through NAS or SD cards (optional). Two SD card slots. PoE and 8-28 V DC support.	461,00 €





AXIS™ Sensor Units for AXIS™ Main Units

	P/N	Model	Description	List Price
	0765-001	AXIS™ F1004 Sensor Unit	AXIS™ F1004 Sensor Unit with a fixed lens. Provides HDTV 720p and 102° horizontal FOV. Pigtail for a detachable 8-m (26-ft.) cable for connecting to an AXIS™ F Main Unit. A flush ceiling/wall mount kit is included.	83,00 €
	0675-001	AXIS™ F1005-E Sensor Unit 3M	AXIS™ F1005-E Sensor Unit with a 3 meter cable to the main unit. IP66 rated. To be used with AXIS™ F Series Main Units. Fixed lens that provides 113° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8201 Vari-angle Mounting Bracket.	209,00 €
	0676-001	AXIS™ F1005-E Sensor Unit 12M	AXIS™ F1005-E Sensor Unit with a 12 meter cable to the main unit. IP66 rated. To be used with AXIS™ F Series Main Units. Fixed lens that provides 113° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8201 Vari-angle Mounting Bracket.	226,00 €
	0677-001	AXIS™ F1015 Sensor Unit 3M	AXIS™ F1015 Sensor Unit with a 3 meter cable to the main unit. To be used with AXIS™ F Series Main Units. Vari-focal lens that provides 53° - 108° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8201 Vari-angle Mounting Bracket.	234,00 €
	0678-001	AXIS™ F1015 Sensor Unit 12M	AXIS™ F1015 Sensor Unit with a 12 meter cable to the main unit. To be used with AXIS™ F Series Main Units. Vari-focal lens that provides 53° - 108° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8201 Vari-angle Mounting Bracket.	251,00 €

1.4 | SPECIAL IP FORM FACTOR CAMERAS

Indoor Cameras. Compact Form-Factor

AXIS™ Sensor Units for AXIS™ Main Units









	P/N	Model	Description	List Price
	0735-001	AXIS™ F1025 Sensor Unit 3M	AXIS™ F1025 Sensor Unit with a 3 meter cable to the main unit. To be used with AXIS™ F Series Main Units. Pinhole lens that provides 92° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8202 Straight Mounting Bracket.	209,00 €
	0734-001	AXIS™ F1025 Sensor Unit 12M	AXIS™ F1025 Sensor Unit with a 12 meter cable to the main unit. To be used with AXIS™ F Series Main Units. Pinhole lens that provides 92° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8202 Straight Mounting Bracket.	226,00 €
	0737-001	AXIS™ F1035-E Sensor Unit 3M	AXIS™ F1035-E Sensor Unit with a 3 meter cable to the main unit. IP66 rated. To be used with AXIS™ F Series Main Units. Fisheye lens that provides 194° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8201 Vari-angle Mounting Bracket.	209,00 €
	0736-001	AXIS™ F1035-E Sensor Unit 12M	AXIS™ F1035-E Sensor Unit with a 12 meter cable to the main unit. IP66 rated. To be used with AXIS™ F Series Main Units. Fisheye lens that provides 194° horizontal FOV. Full HDTV 1080p resolution and support for WDR - Forensic Capture together with AXIS™ F41 Main Unit. Includes one AXIS™ F8201 Vari-angle Mounting Bracket.	226,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

AXIS™ M30 Series IP Mini Domes


	P/N	Model	Description	List Price
	0517-001	AXIS™ M3005-V IP Mini Dome	Ultra-compact, indoor fixed mini dome with dust- and vandal-resistant casing for easy mounting on wall or ceiling. Fixed lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p resolution at 30 fps. MicroSD/microSDHC memory card slot for optional local video storage. Video motion detection and active tampering alarm. Comes with a 2 m (6.6 ft.) network cable and is powered using Power over Ethernet. Midspan not included.	251,00 €
	0514-001	AXIS™ M3006-V IP Mini Dome	Compact, indoor fixed mini dome with dust- and vandal-resistant casing. Easy mounting on wall or ceiling. Fixed, 134° lens, and digital PTZ can be used as digital varifocal to set the angle of view. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p at 30 fps or 3 MP resolution at 20 fps. MicroSD/microSDHC memory card slot for optional local video storage. Video motion detection and active tampering alarm. Comes with a 2 m (6.6 ft.) network cable and is powered using Power over Ethernet. Midspan not included.	377,00 €
	0543-001	AXIS™ M3007-P IP Mini Dome	Ultra-discreet, smoke detector-like indoor fixed mini dome with tamper-resistant casing, offering 360°/180° panoramic views as well as quad and digital PTZ views. Multiple, individually configurable H.264 and Motion JPEG streams in up to 5MP resolution at 12 fps. Memory card slot for optional local video storage. Video motion detection and active tampering alarm. The camera comes with a 2 m (6.6 ft.) network cable and is powered using Power over Ethernet for easy installation. Midspan not included.	461,00 €
	0515-001	AXIS™ M3007-PV IP Mini Dome	Compact, indoor fixed mini dome with dust- and vandal-resistant casing, offering 360°/180° panoramic views as well as quad and digital PTZ views. Easy mounting on wall or ceiling. Multiple, individually configurable H.264 and Motion JPEG streams in up to 5MP resolution at 12 fps. MicroSD/microSDHC memory card slot for optional local video storage. Video motion detection and active tampering alarm. Comes with a 2 m (6.6 ft.) network cable and is powered using Power over Ethernet. Midspan not included.	461,00 €
	0535-001	AXIS™ M3024-LVE IP Mini Dome	Compact, day/night fixed mini dome in a vandal-resistant casing for outdoor or indoor installation. Fixed lens and built-in IR illumination. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Memory card slot for optional local video storage. Video motion detection, active tampering alarm and I/O for alarm/event handling. Comes with a 2 m (6.6 ft.) network cable and is powered using Power over Ethernet. Midspan not included.	461,00 €
	0536-001	AXIS™ M3025-VE IP Mini Dome	Compact, day/night fixed mini dome in a vandal-resistant casing for outdoor or indoor installation. Fixed lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p resolution at 30 fps. Memory card slot for optional local video storage. Video motion detection, active tampering alarm and I/O for alarm/event handling. Comes with a 2 m (6.6 ft.) network cable and is powered using Power over Ethernet. Midspan not included.	461,00 €
	0547-001	AXIS™ M3026-VE IP Mini Dome	Compact, day/night fixed mini dome in a vandal-resistant casing for outdoor or indoor installation. Fixed, 106° lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 1080p resolution at 30 fps or 3 MP resolution at 20 fps. Memory card slot for optional local video storage. Video motion detection, active tampering alarm and I/O for alarm/event handling. Comes with a 2 m (6.6 ft.) network cable and is powered using Power over Ethernet. Midspan not included.	545,00 €
	0556-001	AXIS™ M3027-PVE IP Mini Dome	Compact, day/night fixed mini dome in a vandal-resistant casing for outdoor or indoor installation, offering 360°/180° panoramic views as well as quad and digital PTZ views. Multiple, individually configurable H.264 and Motion JPEG streams in up to 5MP resolution at 12 fps. Memory card slot for optional local video storage. Video motion detection, active tampering alarm and I/O for alarm/event handling. Comes with a 2 m (6.6 ft.) cable with a male RJ-45 network connector and is powered using Power over Ethernet. Midspan not included.	629,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

AXIS™ M30 Series IP Mini Domes

	P/N	Model	Description	List Price
	0285-001	AXIS™ M3014 IP Mini Dome	Ultra-discreet fixed dome camera for recessed mounting in drop ceilings. Fixed lens, progressive scan CMOS sensor. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. Video motion detection. Power over Ethernet. Midspan not included.	293,00 €

Accessories for AXIS™ M30 Series

P/N	Description	List Price
5503-651	Optional lens, 6mm for M3004-V/M3005-V.	41,00 €
5503-941	Optional lens for AXIS™ M3006-V, 2.0mm, HFOV: 105°. Including lens tool.	83,00 €
5503-981	Optional lens for AXIS™ M3006-V, 2.8mm. Including lens tool.	66,00 €
5504-551	Optional lens for AXIS™ M3025-VE, 6mm. Including focus ring.	41,00 €
5502-161	Megapixel lens 16mm with M12 thread for AXIS™ M3113-R, AXIS™ M3114-R, AXIS™ 209FD, AXIS™ 209MFD, AXIS™ M3011, AXIS™ 3014. With IR filter. 10pcs	125,00 €
5502-101	Megapixel lens 2.8mm with M12 thread for AXIS™ M3113-R, AXIS™ M3114-R, AXIS™ 209FD, AXIS™ 209MFD, AXIS™ M3011, AXIS™ 3014. With IR filter. 10pcs.	167,00 €
5502-151	Megapixel lens 3.6mm with M12 thread for AXIS™ M3113-R, AXIS™ M3114-R, AXIS™ 209FD, AXIS™ 209MFD, AXIS™ M3011, AXIS™ 3014. With IR filter 10pcs.	125,00 €
5502-111	Megapixel lens 6mm lens with M12 thread for AXIS™ M3113-R, AXIS™ M3114-R, AXIS™ 209FD, AXIS™ 209MFD, AXIS™ M3011, AXIS™ 3014. With IR filter 10pcs.	125,00 €
5502-411	Megapixel lens 8mm with M12 thread for AXIS™ M3113-R, AXIS™ M3114-R, AXIS™ 209FD, AXIS™ 209MFD, AXIS™ M3011, AXIS™ 3014. With IR filter. 10pcs.	125,00 €
5502-421	Mixed pack of M12 Megapixel lenses. Focal length: 2.8mm, 3.6mm, 6mm, 8mm and 16mm for AXIS™ M3113-R, AXIS™ M3114-R, AXIS™ 209FD, AXIS™ 209MFD, AXIS™ M3011, AXIS™ 3014. With IR filter. 10pcs=2 pcs of each lens.	125,00 €
5504-881	Heavy duty weathershield for wall mounted AXIS™ M3024-LVE/25-VE/26-VE and AXIS™ P32-VE fixed dome cameras.	29,00 €
5502-171	White cover with clear bubble for AXIS™ M3011 and AXIS™ M3014. 10 pack.Sparepart.	125,00 €
5502-181	Black cover with clear bubble for AXIS™ M3011 and AXIS™ M3014. 10 pack.	125,00 €
5502-191	Silver cover with clear bubble for AXIS™ M3011 and AXIS™ M3014 Network Cameras. 10 pack.	125,00 €
5502-201	Gold cover with clear bubble for AXIS™ M3011 and AXIS™ M3014 Network Cameras. 10 pack.	125,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ M30 Series

P/N	Description	List Price
5502-341	Mixed covers with clear bubble for AXIS™ M3011 and AXIS™ M3014 Network Cameras. Includes 3 black, 3 silver, 3 gold and 1 white cover.	125,00 €
5503-591	Clip on black cover for AXIS™ M3004-V and AXIS™ M3005-V.	83,00 €
5503-601	Clip on white cover for AXIS™ M3004-V and AXIS™ M3005-V.	83,00 €
5503-611	Clip on black cover for AXIS™ M3006-V and AXIS™ M3007-PV. 10 pcs.	83,00 €
5503-621	Clip on white cover for AXIS™ M3006-V and AXIS™ M3007-PV. 10 pcs.	83,00 €
5504-031	Smoked domes for AXIS™ M3004-V and and M3005-V. 5pcs.	192,00 €
5504-011	Original white top cover with smoked dome for AXIS™ M3006, 5pcs.	209,00 €
5504-021	Original white top cover with smoked dome for AXIS™ M3007, 5pcs.	209,00 €
5500-381	With AXIS™ 225FD PENDANT KIT it is possible to mount the AXIS™ 225FD Network Camera on AXIS™ T91A Brackets, VT Dome mounts and on 1,5"NPT threaded brackets. Includes 1.5 inch to M30 Male adapter. Black.	66,00 €
5503-871	Pendant kit for AXIS™ M3004-V/M3005-V to enable use of AXIS™ T91A Brackets or 1.5"(NPT or NPS threaded) pipes. The camera network cable fits into the product and a RJ45 network cable coupler is included.	29,00 €
5503-891	Indoor recessed mount for drop ceiling installations. RJ45 network cable coupler included. Compatible with AXIS™ M3004-V/5-V.	58,00 €
5503-861	Bracket for mounting on 4" square, 4" octagon, single or double-gang junction box. RJ45 network cable coupler included. Compatible with AXIS™ M3004-V/5-V.	24,00 €
5504-531	Black mount bracket for mounting on standard tripod threading (1/4"-20 UNC) or single-gang junction box. Compatible with AXIS™ M3004-V/5-V.	41,00 €
5503-911	White mount bracket for mounting on standard tripod threading (1/4"-20 UNC) or single-gang junction box. Compatible with AXIS™ M3004-V/5-V.	41,00 €
5503-881	Indoor pendant kit for AXIS™ M3006/7, AXIS™ M3024-LVE/3025-VE/3026-VE. to enable use of AXIS™ T91A Brackets or 1.5"(NPT or NPS threaded) pipes. The camera network cable fits into the product and a RJ45 network cable coupler is included.	33,00 €
5900-021	Outdoor pendant kit for M3024-LVE/M3025-VE to enable use of AXIS™ T91A Brackets or 1.5"(NPT or NPS threaded) pipes.	33,00 €
5503-901	Indoor recessed mount for drop ceiling installations. RJ45 network cable coupler included. Compatible with AXIS™ M3006-V/M3007-PV,AXIS™ M3024-LVE/M3025-VE/M3026-VE.	75,00 €
5504-871	Indoor recessed mount for drop ceiling installations. RJ45 network cable coupler included. Compatible with AXIS™ M3007-P.	75,00 €
5503-921	Bracket for mounting on 4" square, 4" octagon, single or double-gang junction box. RJ45 network cable coupler included. Compatible with. Compatible with AXIS™ M3006/7, AXIS™ M3024-LVE/3025-VE/3026-VE.	24,00 €

1.5






IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ M30 Series

P/N	Description	List Price
5504-041	Backbox for AXIS™ M3006-V, AXIS™ M3007-P/-PV, AXIS™ M3024-LVE/3025-VE/3026-VE/3027-PVE which enables safe cabling through 1/2" (M20) conduits.	24,00 €
5505-171	Standard mount bracket for AXIS™ M3006-V, AXIS™ M3007-P/-PV, AXIS™ M3024-LVE/3025-VE/3026-VE.	16,00 €
5500-891	With AXIS™ 216FD PENDANT KIT it is possible to mount AXIS™ 212PTZ, 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras on AXIS™ T91A Brackets, VT Dome Brackets and on 1,5"NPT threaded brackets. Includes 1.5 inch to M30 Male adapter. White.	41,00 €
5500-881	With AXIS™ 216FD PENDANT KIT it is possible to mount AXIS™ 212PTZ, 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras on AXIS™ T91A Brackets, VT Dome Brackets and on 1,5"NPT threaded brackets. Includes 1.5 inch to M30 Male adapter. Black.	41,00 €
5502-441	Adapter to convert M30 to 1.5" thread. Used to convert VT Dome mounts to 1.5" NPT thread. Black color.	16,00 €

AXIS™ P32 Series IP Mini Domes




	P/N	Model	Description	List Price
	0612-001	AXIS™ P3214-V IP Mini Dome	Day/night fixed dome with a discreet, dust and IK08 vandal-resistant indoor casing. Varifocal 2.8-10 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes.	419,00 €
	0613-001	AXIS™ P3214-VE IP Mini Dome	Day/night fixed dome with an IK10 vandal-resistant outdoor casing. Varifocal 2.8-10 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Operation in -30°C to +50°C (-22°F to 122°F) powered by standard Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes and weather shield against sun, rain or snow.	545,00 €
	0614-001	AXIS™ P3215-V IP Mini Dome	Day/night fixed dome with a discreet, dust and IK08 vandal-resistant indoor casing. Varifocal 3-10.5 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max full HDTV 1080p/2MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes.	503,00 €
	0615-001	AXIS™ P3215-VE IP Mini Dome	Day/night fixed dome with an IK10 vandal-resistant outdoor casing. Varifocal 3-10.5 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max full HDTV 1080p/2MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Operation in -30°C to +50°C (-22°F to 122°F) powered by standard Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes and weather shield against sun, rain or snow.	629,00 €
	0759-001	AXIS™ P3224-LV IP Mini Dome	Day/night fixed dome with support for OptimizedIR with built-in adaptable IR illuminators, and WDR – Forensic Capture. Discreet, dust and IK08 vandal-resistant indoor casing. Varifocal 2.8-10 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 60 fps. Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes.	503,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

AXIS™ P32 Series IP Mini Domes

	P/N	Model	Description	List Price
	0758-001	AXIS™ P3224-LVE IP Mini Dome	Day/night fixed dome with support for OptimizedIR with built-in adaptable IR illuminators, and WDR – Forensic Capture. IK10 vandal-resistant outdoor casing. Varifocal 2.8-10 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 60 fps. Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Operation in -30°C to +50°C (-22°F to 122°F) powered by standard Power over Ethernet. Midspan not included. Includes mounting bracket for wall or junction boxes.	629,00 €
	0761-001	AXIS™ P3225-LV IP Mini Dome	Day/night fixed dome with support for OptimizedIR with built-in, adaptable IR illuminators, and WDR – Forensic Capture. Discreet, dust and IK08 vandal-resistant indoor casing. Varifocal 3-10.5 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max full HDTV 1080p/2MP resolution at 60 fps. Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes.	587,00 €
	0760-001	AXIS™ P3225-LVE IP Mini Dome	Day/night fixed dome with support for OptimizedIR with built-in adaptable IR illuminators, and WDR – Forensic Capture. IK10 vandal-resistant outdoor casing. Varifocal 3-10.5 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max full HDTV 1080p/2MP resolution at 60 fps. Axis' Zipstream technology for reduced bandwidth and storage needs. Video motion detection and active tampering alarm. Memory card slot for optional local video storage. Operation in -30°C to +50°C (-22°F to 122°F) powered by standard Power over Ethernet. Midspan not included. Includes mounting bracket for wall or junction boxes.	713,00 €

Accessories for AXIS™ P32 Series

P/N	Description	List Price
5504-881	Heavy duty weathershield for wall mounted AXIS™ M3024-LVE/25-VE/26-VE and AXIS™ P32-VE fixed dome cameras.	29,00 €
5506-031	Skin covers compatible with AXIS™ P32-V cameras for changing the appearance of the camera, simplify re-painting or covering screws. Black color. 5 pcs.	66,00 €
5506-131	Standard clear dome for AXIS™ P32-V Series, 5 pcs.	142,00 €
5506-021	Smoked domes for AXIS™ P32-V Series, 5 pcs.	142,00 €
5506-121	Standard clear dome for AXIS™ P32-VE Series, 5 pcs.	142,00 €
5505-081	Indoor pendant kit for AXIS™ P32-V Series- AXIS™ P33-V and AXIS™ Q3505-V, compatible with AXIS™ ceiling-/wall mounts, AXIS™ T91A67 Pole mount and 1.5" NPS threaded pipes.	33,00 €
5505-571	Indoor recessed mount compatible with AXIS™ P32-V Series, AXIS™ P33-V Series and AXIS™ Q3505-V.	33,00 €
5505-581	Outdoor recessed mount for AXIS™ P32-VE Series, P33-VE Series and Q3505-VE.	66,00 €
5506-061	Sparepart mounting bracket for AXIS™ P32-V Series. 4 pcs.	58,00 €
5505-871	Outdoor pendant kit for AXIS™ P32-VE Series, compatible with AXIS™ ceiling-/wall mounts, AXIS™ T91A67 Pole mount and 1.5" NPS threaded pipes.	41,00 €
5506-071	Sparepart mounting bracket for AXIS™ P32-VE Series. 4 pcs.	75,00 €

1.5





IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ P32 Series

P/N	Description	List Price
5505-191	Mechanical adapter that provides a U-shaped 30mm wide cable entry for use when a U-shape cable protection is required. The adapter is compatible with AXIS™ P54-series, AXIS™ P32-VE Series (requires AXIS™ ACI Mounting Bracket A), AXIS™ Q3505-VE, AXIS™ T91B6X mounts and AXIS™ T94R01P Conduit Back Box. 5 pcs.	20,00 €
5505-971	Cable protection attachment bracket for AXIS™ P32-VE Series. Compatible with 3/4" Conduits, M25 pipes and AXIS™ ACI adapters. 5pcs.	33,00 €
5506-041	Cable protection attachment bracket for AXIS™ P32-V Series. Compatible with 1/2" Conduits, M20 pipes and AXIS™ ACI adapters. 5pcs.	16,00 €
5505-541	Step up ACI adapter for attaching 3/4" conduits or M25 pipes to AXIS™ products with a 1/2" conduit interface such as AXIS™ P32-V series (requires AXIS™ ACI conduit bracket B) and AXIS™ Q3505-V. 2 pcs.	33,00 €
5505-521	Mechanical adapter that provides a U-shaped 20mm wide cable entry for use when a U-shape cable protection is required. The adapter is compatible with AXIS™ products with a 1/2" conduit interface such as AXIS™ P32-V series (requires AXIS™ ACI conduit bracket B) and AXIS™ Q3505-V. 5 pcs.	16,00 €

AXIS™ P33 Series IP Mini Domes









	P/N	Model	Description	List Price
	0352-001	AXIS™ P3304 IP Mini Dome	Fixed dome with discreet and tamper-resistant casing. Varifocal 2.8-10 mm lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone, and audio detection. I/O for alarm/event handling. Power over Ethernet. Power supply not included.	480,00 €
	0467-001	AXIS™ P3354 12mm IP Mini Dome	Light-sensitive, day/night fixed dome with Lightfinder in a discreet, tamper-resistant indoor casing. Varifocal 3.3-12 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	503,00 €
	0465-001	AXIS™ P3354 6mm IP Mini Dome	Light-sensitive, day/night fixed dome with Lightfinder in a discreet, tamper-resistant indoor casing. Varifocal 2.5-6 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	503,00 €
	0471-001	AXIS™ P3364-V 12mm IP Mini Dome	Light-sensitive, day/night fixed dome with Lightfinder in a discreet, vandal-resistant indoor casing. Varifocal 3.3-12 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	587,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

AXIS™ P33 Series IP Mini Domes








	P/N	Model	Description	List Price
	0481-001	AXIS™ P3364-V 6mm IP Mini Dome	Light-sensitive, day/night fixed dome with Lightfinder in a discreet, vandal-resistant indoor casing. Varifocal 2.5-6 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	587,00 €
	0486-001	AXIS™ P3364- LV 12mm IP Mini Dome	Light-sensitive, day/night fixed dome in a discreet, vandal-resistant indoor casing. Built-in, automatically or manually adjustable IR illumination. Varifocal 3.3-12 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included.	671,00 €
	0485-001	AXIS™ P3364- LV 6mm IP Mini Dome	Light-sensitive, day/night fixed dome in a discreet, vandal-resistant indoor casing. Built-in, automatically or manually adjustable IR illumination. Varifocal 2.5-6 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included.	671,00 €
	0511-001	AXIS™ P3384-V IP Mini Dome	Day/night fixed dome with support for WDR – dynamic capture in a discreet, vandal-resistant indoor casing. Varifocal 3-9 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Light sensitivity with Lightfinder. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	755,00 €
	0484-001	AXIS™ P3364- VE 12mm IP Mini Dome	Light-sensitive, day/night fixed dome with Lightfinder in a vandal-resistant, outdoor casing. Varifocal 3.3-12 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to 55°C (-40°F to 131°F) powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m (16 ft.) Ethernet cable with mounted gasket.	755,00 €
	0482-001	AXIS™ P3364- VE 6mm IP Mini Dome	Light-sensitive, day/night fixed dome with Lightfinder in a vandal-resistant, outdoor casing. Varifocal 2.5-6 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to 55°C (-40°F to 131°F) powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m (16 ft.) Ethernet cable with mounted gasket.	755,00 €
	0473-001	AXIS™ P3364- LVE 12mm IP Mini Dome	Light-sensitive, day/night fixed dome in a vandal-resistant, outdoor casing. Built-in, automatically or manually adjustable IR illumination. Varifocal 3.3-12 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes 5m Ethernet cable with mounted gasket.	839,00 €
	0476-001	AXIS™ P3364- LVE 6mm IP Mini Dome	Light-sensitive, day/night fixed dome in a vandal-resistant, outdoor casing. Built-in, automatically or manually adjustable IR illumination. Varifocal 2.5-6 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes 5m Ethernet cable with mounted gasket.	839,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

AXIS™ P33 Series IP Mini Domes

	P/N	Model	Description	List Price
	0512-001	AXIS™ P3384-VE IP Mini Dome	Day/night fixed dome with support for WDR – dynamic capture in a vandal-resistant outdoor casing. Varifocal 3-9 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Light sensitivity with Lightfinder. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to 55°C (-40°F to 131°F) powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m (16 ft.) Ethernet cable with mounted gasket.	923,00 €
	0369-001	AXIS™ P3346 IP Mini Dome	3 MP, day/night fixed dome with discreet, tamper-resistant indoor casing. Varifocal 3-9 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max 3MP resolution at 20 fps or HDTV 1080p at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	799,00 €
	0370-001	AXIS™ P3346-V IP Mini Dome	3MP, day/night fixed dome with discreet, vandal-resistant indoor casing. Varifocal 3-9 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max 3MP resolution at 20 fps or HDTV 1080p at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	829,00 €
	0371-001	AXIS™ P3346-VE IP Mini Dome	3MP, day/night fixed dome with vandal-resistant, IP66-rated outdoor casing. Varifocal 3-9 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max 3MP resolution at 20 fps or HDTV 1080p at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m Ethernet cable with mounted gasket.	959,00 €
	0586-001	AXIS™ P3365-V IP Mini Dome	Day/night fixed dome with discreet, vandal-resistant indoor casing. Varifocal 3-9 mm P-Iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max full HDTV 1080p/2MP resolution at 30 fps. WDR – dynamic contrast. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	671,00 €
	0587-001	AXIS™ P3365-VE IP Mini Dome	Day/night fixed dome with vandal-resistant, IP66-rated outdoor casing. Varifocal 3-9 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max full HDTV 1080p / 2MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m Ethernet cable with mounted gasket.	839,00 €
	0406-001	AXIS™ P3367-V IP Mini Dome	5MP, day/night, fixed dome with discreet, vandal-resistant indoor casing. Varifocal 3-9 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max 5MP resolution at 12 fps or HDTV 1080p at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	839,00 €
	0407-001	AXIS™ P3367-VE IP Mini Dome	5MP, day/night, fixed dome with vandal-resistant, IP66-rated outdoor casing. Varifocal 3-9 mm P-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max 5MP resolution at 12 fps or HDTV 1080p at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m Ethernet cable with mounted gasket.	1.007,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ P33 Series

P/N	Description	List Price
5502-331	Audio and I/O extension cable for AXIS™ P33 Series. Includes 4 pin terminal connector 2.5mm Female to Male, 2 x stereo plug 3.5mm Male to Female. 5 meter.	33,00 €
5024-101	IR-illuminator for AXIS™ P334X-VE cameras. 18-56 VDC input. Operating temperature -40 °C to 55 °C (-40 °F to 131 °F). IP66-, Nema 4X rated, vandal resistant. Premounted 5m power cable cable with gaskets.	293,00 €
5024-201	IR-illuminator for AXIS™ P334X-VE cameras. PoE IEEE802.3af compliant. Operating temperature -40 °C to 55 °C (-40 °F to 131 °F). IP66-, Nema 4X rated, vandal resistant. Premounted 5m network cable cable with gaskets.	293,00 €
5505-071	Intrusion switch for AXIS™ Q35-V and -VE as well as P33-VE cameras. Connects to camera I/O connector.	16,00 €
5900-171	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. The camera is mounted on the door of the cabinet. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included. Compatible cameras: AXIS™ P33-VE/-LVE.	226,00 €
5503-191	Interchangeable black casing with smoked dome for AXIS™ 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304.	23,00 €
5503-141	Black cover with clear dome for the AXIS™ P3343, P3344, P3353, P3354.	24,00 €
5503-151	Black cover with clear dome for AXIS™ P3346.	24,00 €
5504-401	Dome kit for AXIS™ P3364-LV. The dome is pre-mounted in a black top cover casing.	62,00 €
5005-051	Vandal-resistant casing with clear transparent cover. Can also upgrade an AXIS™ 216FD/216MFD/P330X/M320X to an AXIS™ 216FD-V/216MFD-V/P330X-V/M320X-V.	58,00 €
5500-821	Interchangeable black casing for AXIS™ 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras with transparent cover.	24,00 €
5500-771	Interchangeable black casing for AXIS™ 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras with transparent cover. 10-pack.	234,00 €
5504-701	AXIS™ T91A47 Pole Mount for Indoor and outdoor installations, for poles between 60-110 mm (2.4"-4.3") in diameter. AXIS™ T91A47 is compatible with all outdoor fixed and thermal cameras and most fixed outdoor dome cameras such as the AXIS™ P33-VE.	58,00 €
5504-581	AXIS™ T91A47 Pole Mount for Indoor and outdoor installations, for poles between 110-400 mm (2.4"-4.3") in diameter. AXIS™ T91A47 is compatible with all outdoor fixed and thermal cameras and most fixed outdoor dome cameras such as the AXIS™ P33-VE.	66,00 €
5017-631	Ceiling Bracket. 70 cm / 28 inch. For use with AXIS™ P55-series, AXIS™ Q60-series PTZ Dome Network Cameras, AXIS™ P33 Series Pendant kit, AXIS™ P33-VE Series Pendant kit, AXIS™ 225 Pendant kit and AXIS™ 216/P3301 Pendant kit. White.	100,00 €
5017-641	Corner Bracket. Requires AXIS™ T91A61 Wall Bracket. AXIS™ P55-series, AXIS™ Q60-series PTZ Dome Network Cameras, AXIS™ P33 Series Pendant kit, AXIS™ P33-VE Series Pendant kit, AXIS™ 225 Pendant kit and AXIS™ 216/P3301 Pendant kit. White.	100,00 €
5017-671	Pole Bracket. AXIS™ P55-series, AXIS™ Q60-series PTZ Dome Network Cameras, AXIS™ P33 Series Pendant kit, AXIS™ P33-VE Series Pendant kit, AXIS™ 225 Pendant kit and AXIS™ 216/P3301 Pendant kit. Includes steel pole straps. White. Requires mounting tool Part no: 21776.	83,00 €
5504-051	Recessed mount for AXIS™ P3364-L. For indoor use in drop ceilings installations.	58,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ P33 Series

P/N	Description	List Price
5034-111	Vandal resistant aluminum back box accessory for AXIS™ P33-/V series indoor cameras (except P3301/04) which enables safe cabling through 3/4" conduits.	33,00 €
5505-081	Indoor pendant kit for AXIS™ P32-V Series- AXIS™ P33-/V and AXIS™ Q3505-V, compatible with AXIS™ ceiling-/wall mounts, AXIS™ T91A67 Pole mount and 1.5" NPS threaded pipes.	33,00 €
5505-571	Indoor recessed mount compatible with AXIS™ P32-V Series, AXIS™ P33-/V Series and AXIS™ Q3505-V.	66,00 €
5505-581	Outdoor recessed mount for AXIS™ P32-VE Series, P33-VE Series and Q3505-VE.	92,00 €
5504-711	Corner mount for AXIS™ P5414-E/15-E, AXIS™ Q1765-LE, AXIS™ Q1931-E and AXIS™ P33-VE series.	66,00 €
5005-031	Drop ceiling mount kit for AXIS™ 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras including clear transparent cover.	50,00 €
5500-891	With AXIS™ 216FD PENDANT KIT it is possible to mount AXIS™ 212PTZ, 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras on AXIS™ T91A Brackets, VT Dome Brackets and on 1,5"NPT threaded brackets. Includes 1.5 inch to M30 Male adapter. White.	41,00 €
5502-021	With AXIS™ 216FD PENDANT KIT it is possible to mount AXIS™ 212PTZ, 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras on AXIS™ T91A Brackets and on 1,5"NPT threaded brackets. White.	33,00 €
5502-011	With AXIS™ 216FD PENDANT KIT it is possible to mount AXIS™ 212PTZ, 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras on AXIS™ T91A Brackets and on 1,5"NPT threaded brackets. Black.	33,00 €
5500-881	With AXIS™ 216FD PENDANT KIT it is possible to mount AXIS™ 212PTZ, 216FD, AXIS™ M32 Series, AXIS™ P3301 and P3304 Network Cameras on AXIS™ T91A Brackets, VT Dome Brackets and on 1,5"NPT threaded brackets. Includes 1.5 inch to M30 Male adapter. Black	41,00 €
5502-781	Drop ceiling mount for AXIS™ P3346, AXIS™ P3367-V and AXIS™ P3384-V including clear bubble. For indoor use.	58,00 €
5502-791	Drop ceiling mount for AXIS™ P3346, AXIS™ P3367-V and AXIS™ P3384-V including smoked bubble. For indoor use.	58,00 €
5502-361	Drop ceiling mount for AXIS™ P3343, AXIS™ P3344, AXIS™ P3353 and AXIS™ P3354 including clear transparent bubble. For indoor use.	58,00 €
5502-371	Drop ceiling mount for AXIS™ P3343, AXIS™ P3344, AXIS™ P3353 and AXIS™ P3354 including smoked transparent bubble. For indoor use.	58,00 €
5502-351	With AXIS™ P33 Series PENDANT KIT it is possible to mount the AXIS™ P3343/-V, AXIS™ P3344/-V, AXIS™ P3346/-V, AXIS™ P3353, AXIS™ P3354, AXIS™ P3363-V, AXIS™ P3364-V, AXIS™ P3367/-V and AXIS™ P3384-V Fixed Dome Network Cameras on AXIS™ T91A Brackets or on standard 1.5" NPT threaded brackets. White.	33,00 €
5502-401	Mounting plate for AXIS™ P3343/-V, AXIS™ P3344/-V, AXIS™ P3353, AXIS™ P3354, AXIS™ P3363-V and AXIS™ P3364-V. Used when mounted on a single or double gang box.	24,00 €
5700-691	Original AXIS™ P33XX-VE mounting bracket for wall or hard ceiling.	24,00 €
5503-711	Aluminum cable cover with stainless steel adapter used for mounting 3/4" NPS or NPT pipes to AXIS™ P33XX-VE cameras for cable protection.	33,00 €
5503-721	Aluminum cable cover with stainless steel adapter used for mounting 3/4" NPS or NPT pipes to AXIS™ P33XX-VE cameras for cable protection. Four complete units.	121,00 €
5503-131	Stainless steel adapter used for mounting 3/4" NPS or NPT pipes to AXIS™ P33XX-VE cameras for cable protection.	24,00 €

1.5





IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ P33 Series

P/N	Description	List Price
5502-321	With AXIS™ P33-VE Series PENDANT KIT it is possible to mount the AXIS™ P3343-VE, AXIS™ P3344-VE, AXIS™ P3346-VE, AXIS™ P3363-VE and AXIS™ P3364-VE, AXIS™ P3367-VE, AXIS™ P3384-VE Fixed Dome Network Cameras on AXIS™ T91A Brackets or on standard 1.5" NPT threaded brackets. White.	41,00 €
5503-731	Aluminum cable cover for AXIS™ P33XX-VE cameras. 4 pcs.	50,00 €

AXIS™ Q35 Series IP Mini Domes

P/N	Model	Description	List Price
	0616-001 AXIS™ Q3505-V 9mm IP Mini Dome	Day/night fixed dome with support for WDR – Forensic Capture in a discreet, dust and IK10 vandal-resistant indoor casing. Varifocal 3-9 mm P-Iris lens with remote zoom and focus for installation or monitoring. Multiple, individually configurable H.264 and Motion JPEG streams; full HDTV 1080p/2MP resolution at up to 60 fps. Electronic image stabilization. Video motion detection, shock detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. Memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes.	839,00 €
	0617-001 AXIS™ Q3505-V 22mm IP Mini Dome	Day/night fixed dome with support for WDR – Forensic Capture in a discreet, dust and IK10 vandal-resistant indoor casing. Varifocal 9-22 mm P-Iris lens with remote zoom and focus for installation or monitoring. Multiple, individually configurable H.264 and Motion JPEG streams; full HDTV 1080p/2MP resolution at up to 60 fps. Electronic image stabilization. Video motion detection, shock detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. Memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes.	923,00 €
	0618-001 AXIS™ Q3505- VE 9mm IP Mini Dome	Day/night fixed dome with support for WDR – Forensic Capture in an IK10+ vandal-resistant outdoor casing. Varifocal 3-9 mm P-Iris lens with remote zoom and focus for installation or monitoring. Multiple, individually configurable H.264 and Motion JPEG streams; full HDTV 1080p/2MP resolution at up to 60 fps. Electronic image stabilization. Video motion detection, shock detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. Memory card slot for optional local video storage. Operation in wide temperature range powered by standard Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes and weather shield against sun, rain or snow.	965,00 €
	0619-001 AXIS™ Q3505- VE 22mm IP Mini Dome	Day/night fixed dome with support for WDR – Forensic Capture in an IK10+ vandal-resistant outdoor casing. Varifocal 9-22 mm P-Iris lens with remote zoom and focus for installation or monitoring. Multiple, individually configurable H.264 and Motion JPEG streams; full HDTV 1080p/2MP resolution at up to 60 fps. Electronic image stabilization. Video motion detection, shock detection and active tampering alarm. Two-way audio and audio detection. I/O for alarm/event handling. Memory card slot for optional local video storage. Operation in wide temperature range powered by standard Power over Ethernet. Midspan not included. Includes mounting bracket for wall/ceiling or junction boxes and weather shield against sun, rain or snow.	1.049,00 €

Accessories for AXIS™ Q35 Series

P/N	Description	List Price
5505-191	Mechanical adapter that provides a U-shaped 30mm wide cable entry for use when a U-shape cable protection is required. The adapter is compatible with AXIS™ P54-series, AXIS™ P32-VE Series (requires AXIS™ ACI Mounting Bracket A), AXIS™ Q3505-VE, AXIS™ T91B6X mounts and AXIS™ T94R01P Conduit Back Box. 5 pcs.	20,00 €
5505-541	Step up ACI adapter for attaching 3/4" conduits or M25 pipes to AXIS™ products with a 1/2" conduit interface such as AXIS™ P32-V series (requires AXIS™ ACI conduit bracket B) and AXIS™ Q3505-V. 2 pcs	33,00 €
5505-521	Mechanical adapter that provides a U-shaped 20mm wide cable entry for use when a U-shape cable protection is required. The adapter is compatible with AXIS™ products with a 1/2" conduit interface such as AXIS™ P32-V series (requires AXIS™ ACI conduit bracket B) and AXIS™ Q3505-V. 5 pcs	16,00 €

1.5


IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

Accessories for AXIS™ Q35 Series

P/N	Description	List Price
5505-051	AC/DC to DC power converter for AXIS™ Q35-VE, 24 V AC or 12/24 V DC input. Backbox designed to match perfectly with camera.	167,00 €
5505-071	Intrusion switch for AXIS™ Q35-V and -VE as well as P33-VE cameras. Connects to camera I/O connector.	16,00 €
5505-121	Skin covers compatible with AXIS™ Q3505-V for changing the appearance of the camera, simplify re-painting or covering screws. Black color. 5 pcs	66,00 €
5505-201	Skin covers compatible with AXIS™ Q3505-VE for changing the appearance of the camera, simplify re-painting and covering screws. Black color. 5 pcs	66,00 €
5505-601	Smoked dome for AXIS™ Q3505-V. 5 pcs	150,00 €
5505-621	Smoked dome for AXIS™ Q3505-VE. 5pcs	167,00 €
5505-081	Indoor pendant kit for AXIS™ P32-V Series- AXIS™ P33-V and AXIS™ Q3505-V, compatible with AXIS™ ceiling-/wall mounts, AXIS™ T91A67 Pole mount and 1.5" NPS threaded pipes.	33,00 €
5505-571	Indoor recessed mount compatible with AXIS™ P32-V Series, AXIS™ P33-V Series and AXIS™ Q3505-V.	66,00 €
5505-551	Sparepart mounting bracket for AXIS™ Q3505-V. 4 pcs.	100,00 €
5505-091	Outdoor pendant kit for AXIS™ Q3505-VE compatible with AXIS™ ceiling-/wall mounts, AXIS™ T91A67 Pole mount and 1.5" NPS threaded pipes.	50,00 €
5505-581	Outdoor recessed mount for AXIS™ P32-VE Series, P33-VE Series and Q3505-VE	92,00 €
5505-561	Sparepart mounting bracket for AXIS™ Q3505-VE. 4 pcs	117,00 €

AXIS™ Q37 Series IP Mini Domes





	P/N	Model	Description	List Price
	0664-001	AXIS™ Q3709-PVE IP Mini Dome	Multi-sensor, day/night fixed dome in an IK10 vandal-resistant outdoor casing. Fixed focal, multi-megapixel lenses, focused from factory. Multiple, individually configurable H.264 and Motion JPEG streams; high-quality 4K video in 30 fps from each of 3 sensors and up to 33 MP resolution in total, together providing a 180° view. Video motion detection and active tampering alarm. Operation in wide temperature range powered by standard Power over Ethernet Plus. Midspan not included. Designed for pendant or wall mount arm with same bayonet joint interface as Axis' PTZ domes. Includes weather shield against sun, rain or snow, easily repaintable to blend in with the environment.	2.014,00 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

HIKVISION™ Series IP Mini Domes



	P/N	Model	Description	List Price
	DS-2CD2112F-I(40)	HIKVISION™ DS-2CD2112F-I(40) IP Mini Dome	Megapixel Mini-dome IP camera. CMOS Sensor 1/3". Fixed 4 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux F1.2. Resolution: 1.3 Megapixel 1280x960 / 25 IPS. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. IP66 Vandal-resistant casing. Progressive scan. Supports SD card. PoE (802.3af) and 12VDC 540mA (power source not included). Dimensions (Ø x L): 111 x 82 mm.	266,75 €
	DS-2CD2112F-I(28)	HIKVISION™ DS-2CD2112F-I(28) IP Mini Dome	Megapixel Mini-dome IP camera. CMOS Sensor 1/3". Fixed 2.8 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux F1.2. Resolution: 1.3 Megapixel 1280x960 / 25 IPS. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. IP66 Vandal-resistant casing. Progressive scan. Supports SD card. PoE (802.3af) and 12VDC 540mA (power source not included). Dimensions (Ø x L): 111 x 82 mm.	266,75 €
	DS-2CD2132F-I(40)	HIKVISION™ DS-2CD2132F-I(40) IP Mini Dome	Megapixel Mini-dome IP camera. CMOS Sensor 1/3". Fixed 4 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux F1.2. Resolution: 3 Megapixel 2084x1536 / 25 IPS. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. IP66 Vandal-resistant casing. Progressive scan. Supports SD card. PoE (802.3af) and 12VDC 540mA (power source not included). Dimensions (Ø x L): 111 x 82 mm.	311,37 €
	DS-2CD2132F-I(28)	HIKVISION™ DS-2CD2132F-I(28) IP Mini Dome	Megapixel Mini-dome IP camera. CMOS Sensor 1/3". Fixed 2.8 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux F1.2. Resolution: 3 Megapixel 2084x1536 / 25 IPS. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Vandal-resistant casing. Progressive scan. Supports SD card. PoE (802.3af) and 12VDC 540mA (power source not included). Dimensions (Ø x L): 111 x 82 mm.	311,37 €
	DS-2CD2112F-IWS	HIKVISION™ DS-2CD2112F-IWS IP Mini Dome	Megapixel Mini-dome IP camera. CMOS Sensor 1/3". Fixed 2.8 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux F1.2. Resolution: 1.3 Megapixel 1280x960/1280x720 @ 25 IPS. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M) and WIFI (802.11bgn). Bidirectional audio. I/O interface. Shutter Compatible Platform RAPTOR Onvif and PSIA. IP66 Vandal-resistant casing. Progressive scan. Advanced behaviours. Supports SD card. PoE (802.3af) and 12VDC 540mA (power source not included). Dimensions (Ø x L): 111 x 82 mm.	311,37 €
	DS-2CD2132F-IWS	HIKVISION™ DS-2CD2132F-IWS IP Mini Dome	Megapixel Mini-dome IP camera. CMOS Sensor 1/3". Fixed 2.8 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux F1.2. Resolution: 3 Megapixels: 2048x1536 @ 12.5IPS, 1920x1080 @ 25 IPS. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M) and WIFI (802.11bgn). Bidirectional audio. I/O interface. Shutter Compatible Platform RAPTOR Onvif and PSIA. IP66 Vandal-resistant casing. Progressive scan. Advanced behaviours. Supports SD card. PoE (802.3af) and 12VDC 540mA (power source not included). Dimensions (Ø x L): 111 x 82 mm.	355,99 €
	DS-2CD2312-I	HIKVISION™ DS-2CD2312-I IP Mini Dome	Megapixel outdoor Mini-dome IP camera. CMOS Sensor 1/3". Fixed 4 mm lens. Day/night switching. Digital WDR. Sensitivity: 0.019 lux F2. Resolution: 1.3 Megapixel 1280x960 @ 25 IPS. LEDs IR range: 30 m. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). BLC, 3D-DNR, DWDR. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Motion detection and water mark. IP66 Vandal-resistant casing. Progressive scan. Supports SD card. PoE (802.3af) and 12VDC 625mA (power source not included). Dimensions (Ø x L): 127 x 97.5 mm.	311,37 €
	DS-2CD2332-I	HIKVISION™ DS-2CD2332-I IP Mini Dome	Megapixel outdoor Mini-dome IP camera. CMOS Sensor 1/3". Fixed 4 mm lens. Day/night switching. Digital WDR. Sensitivity: 0.019 lux F2. Resolution: 3 Megapixel 2048x1536 @ 15 IPS, 1920x1080 @ 25IPS. LEDs IR range: 30 m. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). BLC, 3D-DNR, DWDR. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Motion detection and water mark. IP66 Vandal-resistant casing. Progressive scan. Supports SD card. PoE (802.3af) and 12VDC 625mA (power source not included). Dimensions (Ø x L): 127 x 97.5 mm.	361,81 €

1.5





IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

HIKVISION™ Series IP Mini Domes

	P/N	Model	Description	List Price
	DS-2CD2712F-I	HIKVISION™ DS-2CD2712F-I IP Mini Dome	Megapixel outdoor Mini-dome IP camera. CMOS Sensor 1/3". Varifocal 2.8-12 mm lens. Day/night switching. Digital WDR. Sensitivity: 0.019 lux F2. Resolution: 1.3 Megapixel 1280x960 @ 25 IPS. LEDs IR range: 30 m. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). BLC, 3D-DNR, DWDR. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Motion detection and water mark. IP66 Vandal-resistant casing. Progressive scan. Supports SD card (max 32GB). PoE (802.3af) and 12VDC 580mA (power source not included). Dimensions: 95x105x258.6 mm.	555,81 €
	DS-2CD2732F-I	HIKVISION™ DS-2CD2732F-I IP Mini Dome	Megapixel outdoor Mini-dome IP camera. CMOS Sensor 1/3". Varifocal 2.8-12 mm lens. Day/night switching. Digital WDR. Sensitivity: 0.019 lux F2. Resolution: 3 Megapixel 2048x1536 @ 12.5IPS, 1920x1080 @ 25IPS. LEDs IR range: 30 m. Compression format H.264 / MJPEG IR LEDs ALC (Autoiris DC). BLC, 3D-DNR, DWDR. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Motion detection and water mark. IP66 Vandal-resistant casing. Progressive scan. Supports SD card (max 32GB). PoE (802.3af) and 12VDC 580mA (power source not included). Dimensions: 95x105x258.6 mm.	618,86 €

HIKVISION™ SMART™ Series IP Mini Domes

	P/N	Model	Description	List Price
	DS-2CD4312F-IZS	HIKVISION™ DS-2CD4312F-IZS Smart™ IP Mini Dome	Megapixel mini-dome IP camera SMART™ series. Outdoor IP66. CCD Sensor 1/3". Motorized 2.8-12 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux (colour), and 0.014 (B/W) - (F1.2, AGC ON). Resolution: 1.3 Megapixel (1280x960 @ 25 fps and 1280x720 @ 50 fps). Compression format H.264 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. ALC (Autoiris DC). Bidirectional audio. I/O interface. Reset button. TI 365 Platform. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 24VAC/1.1A (power source not included). Dimensions: 159.8 x 146 mm.	867,18 €
	DS-2CD4312FWD-IZS	HIKVISION™ DS-2CD4312FWD-IZS Smart™ IP Mini Dome	Megapixel mini-dome IP camera SMART™ series. Outdoor IP66. CCD Sensor 1/3". Motorized 2.8-12 mm lens. Day/night mechanical switching. Sensitivity: 0.01 lux (colour), and 0.014 (B/W) - (F1.2, AGC ON). Resolution: 1.3 Megapixel (1280x960 @ 25 fps and 1280x720 @ 50 fps). Compression format H.264 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR 120dB. BLC, HLC, Smart Defog, EIS, ROI. ALC (Autoiris DC). Bidirectional audio. I/O interface. Reset button. TI 365 Platform. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 24VAC/800mA (power source not included). Dimensions: 159.8 x 146 mm.	907,92 €
	DS-2CD4324F-IZS	HIKVISION™ DS-2CD4324F-IZS Smart™ IP Mini Dome	Megapixel mini-dome IP camera SMART™ series. Outdoor IP66. CCD Sensor 1/2.8". Motorized 2.8-12 mm lens. Day/night mechanical switching. Sensitivity: 0.02 lux (colour), and 0.027 (B/W) - (F1.2, AGC ON). Resolution: 2 Megapixel (1920x1080 @ 25 fps, 1280x960 @ 25 fps, 1280x720 @ 25 fps). Compression format H.264 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. ALC (Autoiris DC). Bidirectional audio. I/O interface. Reset button. TI 365 Platform. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 24VAC/1.1A (power source not included). Dimensions: 159.8 x 146 mm.	1.116,47 €
	DS-2CD4332FWD-IZS	HIKVISION™ DS-2CD4332FWD-IZS Smart™ IP Mini Dome	Megapixel mini-dome IP camera SMART™ series. Outdoor IP66. CCD Sensor 1/2.8". Motorized 2.8-12 mm lens. Day/night mechanical switching. Sensitivity: 0.1 lux (colour), and 0.14 (B/W) - (F1.2, AGC ON). Resolution: 3 Megapixel (2048x1536 @ 20 fps, 1920x1080 @ 25 fps, 1280x720 @ 25 fps). Compression format H.264 / MJPEG. Double codec, embedded web server, output composite video and IP (Ethernet 10 / 100M). Shutter Compatible Platform RAPTOR Onvif and PSIA. Digital WDR. BLC, HLC, Smart Defog, EIS, ROI. ALC (Autoiris DC). Bidirectional audio. I/O interface. Reset button. TI 365 Platform. Water mark. Progressive scan. Smart detection for faces, motion, tamper, noise. Supports SD card. PoE 802.3af, 24VAC/1.1A (power source not included). Dimensions: 159.8 x 146 mm.	1.117,44 €

1.5


IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras



Accessories for HIKVISION™ Mini-domes

P/N	Description	List Price
DS-1258ZJ	Wall bracket for HIKVISION™ IP cameras DS-2CD2112F-I and DS-2CD2132F-I. Indoor. White.	10,67 €
DS-1272ZJ-110	Wall bracket for HIKVISION™ IP mini-dome DS-2CD2112I-MD and DS-2CD2132I-MD. White.	25,22 €
DS-1273ZJ-135	Wall bracket for HIKVISION™ IP mini-dome DS-2CD2712F-I and DS-2CD2732F-I. White. Outdoor.	30,07 €
DS-1273ZJ-130	Wall bracket for HIKVISION™ IP mini-dome DS-2CD4112F-IZ, DS-2CD4124F-IZ and DS-2CD4132FWD-IZ. White. Outdoor.	32,98 €
DS-1273ZJ-160	Wall bracket for HIKVISION™ IP mini-dome DS-2CD4312F-IZS, DS-2CD4324F-IZS and DS-2CD4332FWD-IZS. White. Outdoor.	39,77 €
DS-1273ZJ-160B	Wall bracket with junction box for HIKVISION™ IP mini-dome DS-2CD4312F-IZS, DS-2CD4324F-IZS and DS-2CD4332FWD-IZS. White. Outdoor.	68,87 €
DS-1227ZJ	Ceiling embedded bracket for HIKVISION™ IP mini-dome DS-2CD793PF(WD)-E(I), DS-2CD733/753/754/763/783F-E(I) and DS-2CD754FWD-E(I). White.	47,53 €

DAHUA™ Series IP Mini Domes

P/N	Model	Description	List Price
 IPC-HD1200C-W	DAHUA™ IPC-HD1200C-W IP Mini Dome	1/3" 3Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 25/30fps@1080P(1920x1080). DWDR, Day/Night, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (2.8mm optional). Wi-Fi support. DC12V.	154,86 €

DAHUA™ IP Mini Domes with IR LEDs





P/N	Model	Description	List Price
 IPC-HDW1000S	DAHUA™ IPC-HDW1000S IP Mini Dome with IR LEDs	1/4" 1Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 25/30fps@720P(1280x720). DWDR, Day/Night(ICR), 2DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (2.8mm,6mm optional). Max. IR LEDs Length 20m. DC12V, PoE(HDW1100S).	103,81 €
 IPC-HDBW1000E	DAHUA™ IPC-HDBW1000E IP Mini Dome with IR LEDs	1/4" 1Megapixel progressive scan CMOS. H.264&MJPEG dual-stream encoding. 25/30fps@720P(1280x720). DWDR, Day/Night(ICR), 3DNR,AWB,AGC,BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (2.8mm, 6mm optional). Max. IR LEDs Length 30m. Smoke glass & transparent glass optional. IP66, IK10, PoE.	91,90 €

1.5

IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

DAHUA™ IP Mini Domes with IR LEDs


	P/N	Model	Description	List Price
	IPC-HDBW1000E-W	DAHUA™ IPC-HDBW1000E-W IP Mini Dome with IR LEDs	1/4" 1Megapixel progressive scan CMOS. H.264&MJPEG dual-stream encoding. 25/30fps@720P(1280x 720). DWDR, Day/Night(ICR), 3DNR,AWB,AGC,BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (2.8mm, 6mm optional). Max. IR LEDs Length 30m. Smoke glass & transparent glass optional. Wi-Fi support. IP66, IK10,DC12V.	95,30 €
	IPC-HDBW2100R-VF	DAHUA™ IPC-HDBW2100R-VF IP Mini Dome with IR LEDs	1/3" 1.3Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. 25/30fps@1.3M(1280x 960). DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 2.7-12mm varifocal lens. Max IR LEDs Length 30m. IP66, IK10, PoE.	190,60 €
	IPC-HDW1200S-0360	DAHUA™ IPC-HDW1200S-0360 IP Mini Dome with IR LEDs	1/3" 3Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 25/30fps@1080P(1920 x1080)/720P(1280 x720). Day/Night(ICR), 2DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (6mm optional). Max. IR LEDs Length 20m. IP66, DC12V, PoE.	CONS
	IPC-HDBW1200E-W	DAHUA™ IPC-HDBW1200E-W IP Mini Dome with IR LEDs	1/3" 3Megapixel progressive scan CMOS. H.264&MJPEG dual-stream encoding. 25/30fps@1080P(1920x1080). DWDR, Day/Night(ICR), AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS) & DMSS. 3.6mm fixed lens (2.8mm, 6mm optional). Max. IR LEDs Length 30m. Smoke glass & transparent glass optional. Wi-Fi support. IP66, IK10 DC12V.	115,72 €
	IPC-HDW3200	DAHUA™ IPC-HDW3200 IP Mini Dome with IR LEDs	1/3" 2Megapixel progressive scan Exmor CMOS. H.264 & MJPEG dual-stream encoding. Max 25/30fps@1080p. DWDR,Day/Night(ICR), 2DNR, Auto iris, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.3-12mm varifocal lens. Built-in 1/1 alarm in/out. Max IR LEDs length 20m. Micro SD memory, PoE.	469,68 €
	IPC-HDW1300S	DAHUA™ IPC-HDW1300S IP Mini Dome with IR LEDs	1/3" 3Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 20fps@3M(2048x 1536)&25/30fps @1080P(1920x1080). DWDR, Day/Night(ICR), AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 3.6mm fixed lens (2.8mm,6mm optional). Max. IR LEDs Length 30m. IP66, PoE.	CONS
	IPC-HDBW2300R-Z	DAHUA™ IPC-HDBW2300R-Z IP Mini Dome with IR LEDs	1/3" 3Megapixel progressive CMOS. H.264 & MJPEG dual-stream encoding. Max 20fps@3M(2048x1536) & 25/30fps@1080P(1920 x1080). DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 2.7-12mm varifocal lens. Max IR LEDs Length 30m. IP66, IK10, PoE.	CONS
	IPC-HDBW5302	DAHUA™ IPC-HDBW5302 IP Mini Dome with IR LEDs	1/3" 3Megapixel progressive scan Aptina CMOS. H.264 & MJPEG dual-stream encoding. Max 20fps@3M(2052x1536) & 25/30fps@1080P(1920x1080). DWDR, Day/Night(ICR), 3DNR, Auto iris, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. 2.7 ~12mm varifocal lens (HDBW5300). 3 ~9mm varifocal motorized lens (HDBW5302). Built-in 1/1 alarm in/out. Max. IR LEDs length 20m. Micro SD memory, IP66, IK10, PoE.	374,38 €

1.5



IP MINI DOMES

Discrete Fixed Indoor and Outdoor IP Cameras

DAHUA™ IP Mini Domes with IR LEDs

P/N	Model	Description	List Price
 IPC-HDBW8301	DAHUA™ IPC-HDBW8301 IP Mini Dome with IR LEDs	1/3" 3 Megapixel progressive scan CMOS. Support H.264/MJPEG dual codec. Smart triple streams supported. Max 25/30fps@3MP(2048x1536). Ultra WDR (Wide Dynamic Range) up to 120dB. Ultra 3D DNR. Ultra Defog, ROI, EIS. Smart IR technology. Smart detection: Face detection; Tripwire detection; Intrusion detection; Scene change detection. 100/1000M Base-T Ethernet. Micro SD memory, IP66, IK10, PoE.	658,58 €

DAHUA™ 360° Series IP Mini Domes

P/N	Model	Description	List Price
 EBW8600	DAHUA™ 360° EBW8600 IP Mini Dome	1/1.8" 6Megapixel progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 25/30fps@6.0M(3072x2048). Multiple De-wrap Mode: Original ,Panoramic, Double Panoramic,1+3,Eptz,4 pictures. DWDR, Day/Night(ICR), 3DNR,ROI,AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max.IR LEDs Length 10m. 1/1 Audio in/out(Built in Mic). Micro SD memery,IP67,IK10,PoE.	779,40 €
 EBW81200	DAHUA™ 360° EBW81200 IP Mini Dome	1/2.3" 12M progressive scan CMOS. H.264 & MJPEG dual-stream encoding. Max 15fps@12M(4000x3000), 25/30fps@3M(2048x1536). Multiple Correct Mode:Original ,Panoramic, Double Panoramic,1+3,Eptz,4 pictures. DWDR, Day/Night(ICR), 3DNR,ROI, AWB, AGC, BLC. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max.IR LEDs Length 10m. 1/1 Audio in/out(Built in Mic). Micro SD memery,IP67,IK10,PoE.	1.075,51 €

Accessories for DAHUA™ Mini-domes



P/N	Description	List Price
PFB201W	Aluminium wall mount bracket. Neat & Integrated design. 250.5mm(W) x 160mm(H) x 155mm(D).	CONS
PFB200W	Aluminium and ABS wall mount bracket. Neat & Integrated design. 160mm(W) x 120mm(H) x 74mm(D).	10,38 €

1.6

PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

AXIS™ Q86 Series Outdoor Thermal Domes





	P/N	Model	Description	List Price
	0722-001	AXIS™ Q8631-E (24VAC 35mm 8.3 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 384x288 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 24V AC.	5.877,00 €
	0725-001	AXIS™ Q8631-E (24VAC 35mm 30 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 384x288 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 24V AC.	5.877,00 €
	0726-001	AXIS™ Q8631-E (230VAC 35mm 30 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 384x288 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 230V AC.	5.877,00 €
	0728-001	AXIS™ Q8632-E (24VAC 35mm 8.3 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 640x480 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 24V AC.	9.236,00 €
	0731-001	AXIS™ Q8632-E (24VAC 35mm 30 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 640x480 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 24V AC.	9.236,00 €
	0729-001	AXIS™ Q8632-E (230VAC 35mm 8.3 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 640x480 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 230V AC.	9.236,00 €
	0732-001	AXIS™ Q8632-E (230VAC 35mm 30 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 640x480 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 230V AC.	9.236,00 €
	0723-001	AXIS™ Q8631-E (230VAC 35mm 8.3 fps) PTZ IP Dome	High speed and precision PT-head design thermal PT camera with 640x480 thermal imaging resolution. Pan speed: 0.02°/s to 100°/s, tilt speed: 0.02°/s to 40°/s. Continuous pan rotation, 360° endless and +90° to -40° tilt. IP66-rated and NEMA 4X-rated, operating temperature -40 °C to 55 °C (-40 °F to 131 °F). Power input 230V AC.	5.877,00 €

1.6




PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

AXIS™ M50 Series PTZ Mini Domes

	P/N	Model	Description	List Price
	0398-001	AXIS™ M5013 PTZ IP Mini Dome	Ceiling-mount mini PTZ dome camera with SVGA resolution and 3x digital zoom. 800x600 @ 30fps in H.264 and Motion JPEG. IP51 protection against dust and water. Only PoE, midspan not included. Hard and soft ceiling mounting brackets included.	457,00 €
	0552-001	AXIS™ M5013-V PTZ IP Mini Dome	Vandal resistant IP66- and IK10-rated. Hard ceiling-mount PTZ dome camera with SVGA resolution and 3x digital zoom. 800x600 @ 30fps in H.264 and Motion JPEG. Only PoE, midspan not included.	549,00 €
	0399-001	AXIS™ M5014 PTZ IP Mini Dome	Ceiling-mount mini PTZ dome camera with HDTV 720p resolution, 16:9 format and 3x digital zoom. 1280x720 @ 30fps in H.264 and Motion JPEG. IP51 protection against dust and water. Only PoE, midspan not included. Hard and soft ceiling mounting brackets included.	549,00 €
	0553-001	AXIS™ M5014-V PTZ IP Mini Dome	Vandal resistant IP66- and IK10-rated. Hard ceiling-mount PTZ dome camera with HDTV 720p resolution and 3x digital zoom. 1280x720 @ 30fps in H.264 and Motion JPEG. Only PoE, midspan not included.	640,00 €

AXIS™ P54 Series PTZ Domes



	P/N	Model	Description	List Price
	0544-001	AXIS™ P5414-E 50HZ PTZ IP Dome	Intelligent Direct Drive PTZ camera with HDTV 720p, day/night and 18x zoom, designed for mounting on a wall or building. No extra bracket are needed, build in junction box. Audio In/Out, full size SD card, 24 V DC, 4 configurable I/Os and Ethernet connector with PoE. Repaintable sunshield covering the entire unit. Power supply not included.	1.343,00 €
	0546-001	AXIS™ P5415-E 50HZ PTZ IP Dome	Intelligent Direct Drive PTZ camera with HDTV 1080p, day/night and 18x zoom, designed for mounting on a wall or building. No extra bracket are needed, build in junction box. Audio In/Out, full size SD card, 24 V DC, 4 configurable I/Os and Ethernet connector with PoE. Repaintable sunshield covering the entire unit. Power supply not included.	1.679,00 €
	0589-001	AXIS™ P5415-E 60HZ PTZ IP Dome	Intelligent Direct Drive PTZ camera with HDTV 1080p, day/night and 18x zoom, designed for mounting on a wall or building. No extra bracket are needed, build in junction box. Audio In/Out, full size SD card, 24 V DC, 4 configurable I/Os and Ethernet connector with PoE. Repaintable sunshield covering the entire unit. Power supply not included.	1.679,00 €

1.6

PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

AXIS™ P55 Series PTZ Domes







	P/N	Model	Description	List Price
	0408-001	AXIS™ P5512 50HZ PTZ IP Dome	Compact pan/tilt/zoom (12x) camera including auto-iris, automatic day/night, and autofocus zoom lens. Up to 4CIF resolution at 25 fps frame rate. Simultaneous H.264 and Motion JPEG, standard IEEE 802.3af PoE (midspan not included), mounting kit for hard and drop ceiling and transparent cover smoked and clear. I/O connections for alarm/event handling. Two-way, full duplex audio requires multi connection cable (not included)	923,00 €
	0409-001	AXIS™ P5512 60HZ PTZ IP Dome	Compact pan/tilt/zoom (12x) camera including auto-iris, automatic day/night, and autofocus zoom lens. Up to 4CIF resolution at 30 fps frame rate. Simultaneous H.264 and Motion JPEG, standard IEEE 802.3af PoE (midspan not included), mounting kit for hard and drop ceiling and transparent cover smoked and clear. I/O connections for alarm/event handling. Two-way, full duplex audio requires multi connection cable (not included)	923,00 €
	0410-001	AXIS™ P5512-E 50HZ PTZ IP Dome	Outdoor, IP66-rated pan/tilt/zoom (12x) camera including auto-iris, automatic day/night, and autofocus zoom lens. Up to 4CIF resolution at 25 fps. Simultaneous H.264 and Motion JPEG. Power over Ethernet IEEE 802.3af, (midspan not included), clear and smoked dome bubble included. Brackets AXIS™ T91A are sold separately.	1.259,00 €
	0411-001	AXIS™ P5512-E 60HZ PTZ IP Dome	Outdoor, IP66-rated pan/tilt/zoom (12x) camera including auto-iris, automatic day/night, and autofocus zoom lens. Up to 4CIF resolution at 30 fps. Simultaneous H.264 and Motion JPEG. Power over Ethernet IEEE 802.3af, (midspan not included), clear and smoked dome bubble included. Brackets AXIS™ T91A are sold separately.	1.259,00 €
	0419-002	AXIS™ P5522 50 Hz PTZ IP Dome	PTZ camera with 18x optical zoom, D1 resolution (720x576) and IP51 classification in H.264 and Motion JPEG, Day & Night. Two way audio, four I/O and external power with multi-connector cable (not included). Includes High PoE midspan, smoked and clear dome covers, and mounting kit for hard and drop ceilings.	1.259,00 €
	0421-002	AXIS™ P5522-E 50 Hz PTZ IP Dome	Outdoor PTZ camera with 18x zoom, D1 resolution (720x576) and IP66 classification in H.264 and Motion JPEG, Day & Night. Includes High PoE midspan, smoked and clear dome covers. Brackets are sold separately	1.595,00 €
	0309-002	AXIS™ P5532 50HZ PTZ IP Dome	PTZ camera with 29x optical zoom, D1 resolution (720x576) and IP51 classification. H.264 and Motion JPEG, Day & Night, WDR, EIS. Two way audio, four I/O and external power with multi-connector cable (not included). Includes High PoE midspan, smoked and clear dome covers, and mounting kit for hard and drop ceilings.	1.511,00 €
	0311-002	AXIS™ P5532-E 50HZ PTZ IP Dome	Outdoor ready PTZ camera with 29x optical zoom, D1 resolution (720x576), IP66 and NEMA 4X classification. H.264 and Motion JPEG, Day & Night, WDR, Electronic Imaging Stabilization. Includes High PoE midspan, smoked and clear dome covers. Mounting brackets are not included.	1.846,00 €

1.6

PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

AXIS™ P55 Series PTZ Domes

	P/N	Model	Description	List Price
	0313-002	AXIS™ P5534 50HZ PTZ IP Dome	HDTV 720p compliant PTZ camera with 18x optical zoom for indoor use. HDTV 720p @ 25fps (1280x720) in H.264 and Motion JPEG, Day & Night, two-way audio, I/O, IP51. Two way audio, four I/O and external power with multi-connector cable (not included). Includes HiPoE midspan, smoked and clear dome covers and mounting kit for hard and drop ceilings	1.679,00 €
	0314-002	AXIS™ P5534 60HZ PTZ IP Dome	HDTV 720p compliant PTZ camera with 18x optical zoom for indoor use. HDTV 720p @ 30fps (1280x720) in H.264 and Motion JPEG, Day & Night, two-way audio, I/O, IP51. Two way audio, four I/O and external power with multi-connector cable (not included). Includes HiPoE midspan, smoked and clear dome covers and mounting kit for hard and drop ceilings	1.679,00 €
	0314-041	AXIS™ P5534 60HZ PTZ IP Dome (with Outdoor T95A00 Kit)	Bundle with unit of AXIS™ 5534 60Hz and 1 unit of AXIS™ T95A00 housing. Camera is delivered pre-mounted in the outdoor IP66 rated housing. Includes clear and smoked bubble. 100-240 VAC input. HDTV 720p compliant PTZ camera with 18x optical zoom. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night. Mounting bracket not included.	2.404,00 €
	0314-031	AXIS™ P5534 60HZ PTZ IP Dome (with Outdoor T95A10 Kit)	Bundle with unit of AXIS™ 5534 60Hz and 1 unit of AXIS™ T95A10 housing. Camera is delivered pre-mounted in the outdoor IP66 rated housing. Includes clear and smoked bubble. 24 VAC input. (Recommended power supply PS24). HDTV 720p compliant PTZ camera with 18x optical zoom. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night. Mounting bracket not included.	2.366,00 €
	0315-002	AXIS™ P5534-E 50HZ PTZ IP Dome	HDTV 720p compliant outdoor-ready, PTZ camera with 18x optical zoom. HDTV 720p @ 25fps (1280x720) in H.264 and Motion JPEG, Day & Night, IP66 and NEMA 4X classification. Advanced Gatekeeper. Includes High PoE 30 W midspan, smoked and clear dome. Mounting brackets are not included.	2.014,00 €
	0434-002	AXIS™ P5544 50HZ PTZ IP Dome	PTZ dome camera with 360-degree panoramic view, 18x optical zoom for indoor use. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night, two-way audio, I/O, IP51. Includes PoE+ midspan, clear dome covers and mounting kit for hard and drop ceilings	2.289,00 €

Accessories for AXIS™ Domes

P/N	Description	List Price
T95A64 (5010-641)	Corner bracket for AXIS™ T98A-VE Surveillance Cabinet and AXIS™ T95A00/T95A10 Dome Housings. When used with the AXIS™ T95 Dome Housings the wall bracket AXIS™ T95A61 is required.	75,00 €
T95A67 (5010-671)	Pole bracket for AXIS™ T98A-VE Surveillance Cabinet and AXIS™ T95A00/T95A10 Dome Housings. When used with the AXIS™ T95 Dome Housings the wall bracket AXIS™ T95A61 is required.	108,00 €

1.6







PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

Accessories for AXIS™ Domes

P/N	Description	List Price
T98A15-VE (5505-401)	IP66, IK10 and NEMA 4X rated outdoor-ready surveillance cabinet. Protects accessory devices such as power supply, media converter, midspan and fuse from tough weather and vandalism. Mounting bracket for wall, DIN-rail, device mounting bracket and Electrical safety cover is included.	755,00 €

HIKVISION™ Outdoor IP Domes



P/N	Model	Description	List Price
 DS-2DE5174-AE	HIKVISION™ DS-2DE5174-AE Outdoor PTZ IP Dome	IP PTZ Dome with x20 optical zoom (4.7-94mm lens). CMOS 1/3" sensor. Resolution 1.3 MegaPixels (1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.1A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø220x305mm.	821,59 €
 DS-2DE5176-A	HIKVISION™ DS-2DE5176-A Outdoor PTZ IP Dome	IP PTZ Dome with x30 optical zoom (4.3-129mm lens). CMOS 1/3" sensor. Resolution 1.3 MegaPixels (1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.1A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø220x305mm.	1.568,49 €
 DS-2DE5184-AE	HIKVISION™ DS-2DE5184-AE Outdoor PTZ IP Dome	IP PTZ Dome with x20 optical zoom (4.7-94mm lens). CMOS 1/3" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.1A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø220x305mm.	1.004,92 €
 DS-2DE5186-A	HIKVISION™ DS-2DE5186-A Outdoor PTZ IP Dome	IP PTZ Dome with x30 optical zoom (4.3-129mm lens). CMOS 1/3" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.7A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø 220 x 236 mm.	1.787,71 €
 DS-2DF5274-A	HIKVISION™ DS-2DF5274-A Outdoor PTZ IP Dome	IP PTZ Dome with x20 optical zoom (4.3-86mm lens) and x16 digital zoom. CMOS 1/3" sensor. Resolution 1.3 MegaPixels (1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.6A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø220x305mm.	1.904,11 €
 DS-2DF5276-A	HIKVISION™ DS-2DF5276-A Outdoor PTZ IP Dome	IP PTZ Dome with x30 optical zoom (4.3-129mm lens) and x16 digital zoom. CMOS 1/3" sensor. Resolution 1.3 MegaPixels (1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.6A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø220x305mm.	2.403,66 €

1.6

PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

HIKVISION™ Outdoor IP Domes

	P/N	Model	Description	List Price
	DS-2DF5284-A	HIKVISION™ DS-2DF5284-A Outdoor PTZ IP Dome	IP PTZ Dome with x20 optical zoom (4.3-86mm lens) and x16 digital zoom. CMOS 1/3" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.6A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø220x305mm.	2.196,08 €
	DS-2DF5286-A	HIKVISION™ DS-2DF5286-A Outdoor PTZ IP Dome	IP PTZ Dome with x30 optical zoom (4.3-129mm lens) and x16 digital zoom. CMOS 1/2.8" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -5° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.6A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø220x305mm.	2.651,01 €

HIKVISION™ Outdoor IP Domes with IR LEDs



	P/N	Model	Description	List Price
	DS-2DE7174-A	HIKVISION™ DS-2DE7174-A Outdoor PTZ IP Dome with IR LEDs	IP PTZ Dome with x20 optical zoom (4.7-94mm lens) with IR LEDs 100m range. CMOS 1/3" sensor. Resolution 1.3 MegaPixels (1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,01lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -15° tilt. Heating and fan inside. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.3A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø245x399mm.	955,45 €
	DS-2DE7184-AE	HIKVISION™ DS-2DE7184-AE Outdoor PTZ IP Dome with IR LEDs	IP PTZ Dome with x20 optical zoom (4.7-94mm lens) with IR LEDs 100m range. CMOS 1/2.8" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.6 AGC ON) / 0,01lux (BN F1.6 AGC ON). Compression format H.264 / MPEG4. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -15° tilt. Heating and fan inside. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.3A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø245x399mm.	1.127,14 €
	DS-2DE7186-A	HIKVISION™ DS-2DE7186-A Outdoor PTZ IP Dome with IR LEDs	IP PTZ Dome with x320 optical zoom (4.3-129mm lens) with IR LEDs 100m range. CMOS 1/2.8" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.6 AGC ON) / 0,01lux (BN F1.6 AGC ON). Compression format H.264 / MPEG4. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -15° tilt. Heating and fan inside. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/1.3A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø245x399mm.	742,47 €
	DS-2DF7274-A	HIKVISION™ DS-2DF7274-A Outdoor PTZ IP Dome with IR LEDs	IP PTZ Dome with x20 optical zoom (4.3-86mm lens) and x16 digital zoom, with IR LEDs 120m range. CMOS 1/3" sensor. Resolution 1.3 MegaPixels (1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.4 AGC ON) / 0,005lux (BN F1.4 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -2° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/2.1A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø245x399mm.	2.319,27 €
	DS-2DF7284-A	HIKVISION™ DS-2DF7284-A Outdoor PTZ IP Dome with IR LEDs	IP PTZ Dome with x20 optical zoom (4.3-86mm lens) and x16 digital zoom, with IR LEDs 120m range. CMOS 1/3" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.6 AGC ON) / 0,005lux (BN F1.6 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -2° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/2.1A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø245x399mm.	2.677,20 €

1.6

PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment



HIKVISION™ Outdoor IP Domes with IR LEDs

P/N	Model	Description	List Price
 DS-2DF7276-A	HIKVISION™ DS-2DF7276-A Outdoor PTZ IP Dome with IR LEDs	IP PTZ Dome with x30 optical zoom (4.3-129mm lens) and x16 digital zoom, with IR LEDs 120m range. CMOS 1/3" sensor. Resolution 1.3 MegaPixels (1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.6 AGC ON) / 0,005lux (BN F1.6 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -2° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/2.1A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø245x399mm.	2.989,54 €
 DS-2DF7286-A	HIKVISION™ DS-2DF7286-A Outdoor PTZ IP Dome with IR LEDs	IP PTZ Dome with x30 optical zoom (4.3-129mm lens) and x16 digital zoom, with IR LEDs 120m range. CMOS 1/2.8" sensor. Resolution 2 MegaPixels (1920x1080 @ 25 fps / 1280x960 @ 25 fps / 1280x720 @ 25 fps). Mechanical switching. Sensitivity: 0,05lux (colour F1.6 AGC ON) / 0,005lux (BN F1.6 AGC ON). Compression format H.264 / MPEG4 / MJPEG. BLC, Digital WDR, AGC, 3D-DNR, S/N Ratio >= 50dB. Supports SD card (max 32 GB, not included). Continuous pan rotation, 360° endless and +90° to -2° tilt. Heating and fan inside. 7 x I/O port for events. Bidirectional audio. 24 private masks. Embedded web server (IE7, IE8, IE9, Chrome 8, Firefox 3.5, Safari 5...). ONVIF, CGI, PSIA compatible. 24VAC/2.1A (power source not included). IP66. Operating temperature -30 °C to 65 °C. Dimensions: Ø245x399mm.	3.399,85 €

Accessories for HIKVISION™ Domes

P/N	Description	List Price
DS-1602ZJ	Wall bracket for 5" HIKVISION™ domes with or without IR LEDs. Long distance to wall. White.	34,92 €
DS-1601ZJ-POLE	Wall bracket for 5" HIKVISION™ domes with or without IR LEDs. Long distance to wall with pole adapter. White.	50,44 €
DS-1601ZJ-CORNER	Wall bracket for 5" HIKVISION™ domes with or without IR LEDs. Long distance to wall with corner adapter. White. Includes DS1601ZJ bracket and corner adapter.	50,44 €
DS-1602ZJ-BOX	Wall bracket with junction box for 5" HIKVISION™ domes with or without IR LEDs. Long distance to wall with corner adapter. White. Includes DS1601ZJ bracket and corner adapter.	159,08 €
DS-1661ZJ	Ceiling bracket for 5" HIKVISION™ domes with or without IR LEDs. 20 cms. White.	38,80 €
DS-1662ZJ	Ceiling bracket for 5" HIKVISION™ domes with or without IR LEDs. 50 cms. White.	42,68 €
DS-1663ZJ	Ceiling bracket for 5" HIKVISION™ domes with or without IR LEDs. Surface mount. White.	13,58 €

DAHUA™ Indoor IP Domes



P/N	Model	Description	List Price
 SD29204S-GN	DAHUA™ SD29204S-GN PTZ IP Dome	4x optical zoom. H.264 & MJPEG dual-streams encoding. Max. 25/30fps@1080P(1920 1080) & 50/60fps@720P resolution. DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 100°/s pan speed. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, Built-in Mic, POE. IR Distance up to 30m.	329,22 €
 SD29204S-GN-W	DAHUA™ SD29204S-GN-W PTZ IP Dome	4x optical zoom. H.264 & MJPEG dual-streams encoding. Max. 25/30fps@1080P(1920 1080) & 50/60fps@720P resolution. DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 100°/s pan speed. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, Built-in Mic, POE + Wifi. IR Distance up to 30m.	340,67 €

1.6






PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

DAHUA™ Outdoor PTZ IP Mini Domes

	P/N	Model	Description	List Price
	SD22204T-GN	DAHUA™ SD22204T-GN Outdoor PTZ IP Mini Dome	2Mp Full HD Network Mini PTZ Dome Camera. 4x optical zoom. H.264 & MJPEG Triple-streams encoding. Max. 25/30fps@1080P(1920x1080) & 50/60fps@720P resolution. WDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 100%/s pan speed. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, POE.	271,96 €
	SD42212S-HN	DAHUA™ SD42212S-HN Outdoor PTZ IP Mini Dome	2Mp Full HD 12x Mini Network PTZ Dome Camera. Powerful 12x optical zoom. H.264 & MJPEG dual-stream encoding. Max. 25/30fps@1080P(1920 1080) & 50/60fps@720P resolution. DWDR, Day/Night (ICR), DNR (2D&3D), Auto iris, Auto focus, AWB, AGC, BLC. Max 300%/s pan speed, 360° continuous pan rotation. Up to 80 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 2/1 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. IP66, POE+.	668,79 €

DAHUA™ Outdoor IP Domes with IR



	P/N	Model	Description	List Price
	SD59212S-HN	DAHUA™ SD59212S-HN Outdoor PTZ IP Dome with IR LEDs	2Mp Full HD 12x Network IR PTZ Dome Camera. Optical zoom. Support Triple-streams encoding. Max. 25/30fps@1080P(1920x1080) & 50/60fps@720P resolution. DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 400%/s pan speed, 360° endless pan rotation. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 2/1 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, IP66. IR Distance up to 100m(AC24V)/ 80m(DC12V).	709,63 €
	SD59230S-HN	DAHUA™ SD59230S-HN Outdoor PTZ IP Dome with IR LEDs	2Mp Full HD 30x Network IR PTZ Dome Camera. Optical zoom. Support Triple-streams encoding. Max. 25/30fps@1080P(1920x1080) & 50/60fps@720P resolution. DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 400%/s pan speed, 360° endless pan rotation. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 2/1 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, IP66. IR Distance up to 100m(AC24V)/ 80m(DC12V).	1.005,73 €
	SD6A220-HNI	DAHUA™ SD6A220-HNI Outdoor PTZ IP Dome with IR LEDs	2Mp Full HD 20x Network IR PTZ Dome Camera. Powerful 20x/30x optical zoom. H.264 & MJPEG dual-stream encoding. Max 60fps@720P and 30fps@1080P resolution. Defog(220/230), DWDR(WDR), Day/Night(ICR), Ultra DNR, EIS(220/230), Auto iris, Auto focus. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 240%/s pan speed, 360° endless pan rotation. Up to 255 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 7/2 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, IP66. IR Distance up to 150m.	1.962,13 €
	SD6AL230-HNI	DAHUA™ SD6AL230-HNI Outdoor PTZ IP Dome with IR LASER	"2Mp Full HD 30x Star Light Network Laser PTZ Dome Camera. Powerful 30x optical zoom. Ultra-low light star light camera. H.264 & MJPEG Three-stream encoding. Max 60fps@720P and 30fps@1080P resolution. Defog, WDR, EIS, ROI, Day/Night(ICR), DNR (2D&3D), Auto iris, Auto focus, AWB, AGC,BLC. Auto-tracking and IVS. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 240%/s pan speed, 360° endless pan rotation. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 7/2 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, IP67, Hi-POE. IR Distance up to 500m."	2.147,62 €
	SD6AL230F-HNI	DAHUA™ SD6AL230F-HNI Outdoor PTZ IP Dome with IR LASER	2Mp Full HD 30x WDR Star Light Network LASER PTZ Dome Camera. Powerful 30x optical zoom. Ultra-low light star light camera. H.264 & MJPEG Three-stream encoding. Max 60fps@720P and 30fps@1080P resolution. Defog, WDR, EIS, ROI, Day/Night(ICR), DNR (2D&3D), Auto iris, Auto focus, AWB, AGC, BLC. Auto-tracking and IVS. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 240%/s pan speed, 360° endless pan rotation. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 7/2 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, IP67, Hi-POE. IR Distance up to 500m.	2.282,05 €

1.6

PTZ IP DOMES

Pan-Tilt-Zoom IP Cameras for Indoor and Outdoor Deployment

DAHUA™ Outdoor IP Domes with IR

	P/N	Model	Description	List Price
	SD6AL240-HNI	DAHUA™ SD6AL240-HNI Outdoor PTZ IP Dome with IR LASER	2Mp Full HD 40x Network LASER PTZ Dome Camera. Powerful 40x optical zoom. H.264 & MJPEG Three-stream encoding. Max 60fps@720P and 30fps@1080P resolution. Defog, DWDR, EIS, ROI, Day/Night(ICR), DNR (2D&3D), Auto iris, Auto focus, AWB, AGC, BLC. Auto-tracking and IVS. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 240°/s pan speed, 360° endless pan rotation. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 7/2 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, IP67, Hi-POE. IR Distance up to 500m.	2.954,24 €
	SD6C230T-HN	DAHUA™ SD6C230T-HN Outdoor PTZ IP Dome with IR LED	2Megapixel Full HD 30x Network IR PTZ Dome Camera. 30x optical zoom. Support Triple-streams encoding. Max. 25/30fps @1080P(1920x1080) & 50/60fps @720P resolution. DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus. Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS. Max 240°/s pan speed, 360° endless pan rotation. Up to 300 presets, 5 auto scan, 8 tour, 5 pattern. Built-in 2/1 alarm in/out. Support intelligent 3D positioning with DH-SD protocol. Micro SD memory, IP66. IR Distance up to 100m.	995,53 €

Accessories for DAHUA™ Domes

P/N	Description	List Price
PFB300W	Wall Mount Bracket. Material: Aluminum. Neat & Integrated design. 210mm(W) x 115mm(H) x 160mm(D). For Speed dome DAHUA™ SD65/SD69/SD6A models.	13,02 €
PFB300C	Ceiling Mount Bracket. Material: Aluminum & PC. Neat & Integrated design. 133.6mm x 235.5mm. For using with PFA100, PFA101, PFA102, PFA110, PFA111, PFA114 brackets. Working with DAHUA™ SD29, SD32, SD42 domes.	20,42 €
PFA150	Pole Mount Bracket. Material: SECC. Neat & Integrated design. 130.4mm x 170mm x 45mm. Working with PFB300S, PFB300W, PFB301W, PFA120, PFA130, PFA131, PFA140, PFB300C, HDC-HFW3200C, IPC-HFW(C).	22,13 €
PFA151	Corner Mount Bracket. Material: SECC. Neat & Integrated design. 243mm x 170mm x 138mm. Working with PFB300S, PFB300W, PFB301W, PFA120, PFA130, PFA131, PFA140, PFB300C, HDC-HFW3200C, IPC-HFW(C).	22,13 €
PFA152	Pole Mount Bracket. Material: Aluminum. Neat & Integrated design. 117.5mm x 87mm x 21mm. Mast Diameter 80~130mm. For using with PFA121, PFA130, PFA122, PFA131, PFA123, PFA132, PFB302S . Brackets.	13,02 €
PFA100	Mount Adapter. Material: Aluminum. Neat & Integrated design. Dimension (W x H x D) 150.8mm x 37mm. For using with PFB302S or PFB300C brackets for DAHUA™ HDBW3, EB1, HDW2 models.	7,85 €
PFA102	Mount Adapter. Material: Aluminum. Neat & Integrated design. Dimension (W x H x D) 169mm x 37mm. For using with PFB302S or PFB300C brackets for DAHUA™ SD42 models.	7,85 €



EMACS

WWW.EMACS.ES

TEL. +34 913.750.136

FAX. +34 913.758.894

C\ SANTA LEONOR, 63. PLANTA 4, LOCAL 1. 28037 MADRID