



## Positioning your digital world



Affordable mounting  
& mobility for flat panel  
displays, laptops, tablets  
& computers

# Orderguide

## Ergotron Mounting Solutions

### Table of Contents


- Desk Mounts . . . . . 1**
- Wall Mounts . . . . . 7**
- Carts . . . . . 14**
- Work Stations . . . . . 20**
- Mobile WorkStand Cart . . . . . 22**
- Wall Track. . . . . 25**
- Wall Plate . . . . . 26**
- Command Post . . . . . 27**
- Pole Mount Components . . . . . 28**
- Slatwall Components . . . . . 29**
- Keyboard and Laptop Trays . . . . . 30**
- Accessory Selections . . . . . 30**
- Ergonomics . . . . . 34**








Content is subject to change without notification  
Some products may not be available in some regions of the globe—  
visit our web site for more information.

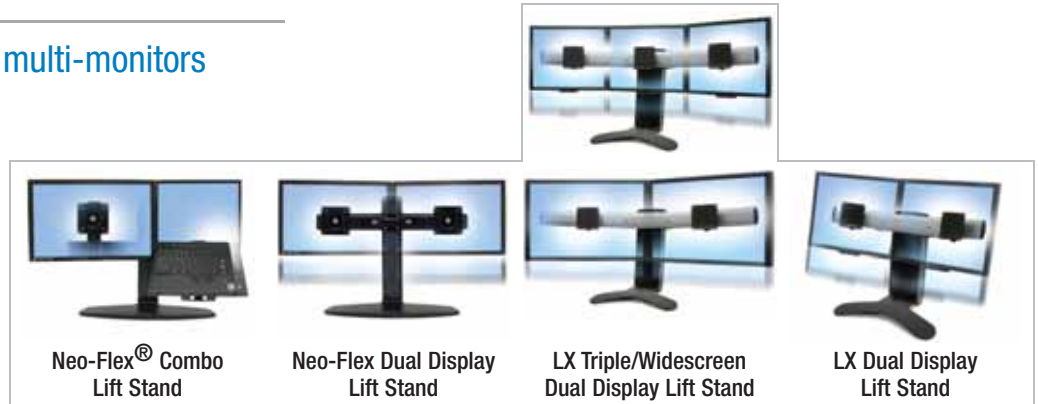Ergotron is a registered trademark of Ergotron, Inc.  
Reproduction of this material in whole or in part for any purpose  
other than that authorized by Ergotron, Inc. is prohibited.

# Desk Mounts








Real-time productivity with multi-monitors



Part # (color)	33-331-085 (black)	33-330-085 (black)	33-296-195 (black)	33-299-195 (black)
 <b>Typical LCD Size</b>	≤ 20"	Maximum LCD outside width 22" (55 cm)	Triple ≤ 21" Widescreen Dual ≤ 30"	≤ 24" Stand can be used to hold a single widescreen display of up to 30" (76 cm), call for more information
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>				
 <b>Weight Capacity</b>	LCD 6–16 lbs (2,7–7,2 kg) Laptop 6–12 lbs (2,7–5,4 kg)	Total weight capacity 14–34 lbs (6,4–15,4 kg). Monitors must be equal weight ± 1 lbs (0,45 kg)	Total weight capacity 24–48 lbs (10,9–21,8 kg)	Total weight capacity 12–34 lbs (5,4–15,4 kg)
 <b>Lift</b>	5" (13 cm)	5" (13 cm)	5" (13 cm)	5" (13 cm)
 <b>Tilt</b>	LCD 30°	—	20°	20°
 <b>Pan</b>	Base 360°	Base 360°	—	—
 <b>Rotation</b>	LCD 360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation
 <b>VESA</b>	MIS-D	MIS-D	MIS-D	MIS-D
<b>Warranty</b>	3 years	3 years	5 years	5 years

# The adjustable office



Part # (color)	Light Duty 33-342-200 (black and polished aluminum)	Heavy Duty 33-344-200 (black and polished aluminum)	33-341-200 (black and polished aluminum)	33-340-200 (black and polished aluminum)
<b>Includes</b>	Height-adjustment column, desk clamp, LCD pivot, keyboard tray with left/right mouse tray	Height-adjustment column, desk clamp, LCD pivot, keyboard tray with left/right mouse tray	Height-adjustment column, desk clamp, crossbar, two (2) LCD pivots, keyboard tray with left/right mouse tray	Height-adjustment column, desk clamp, crossbar, LCD pivot, laptop tray, keyboard tray with left/right mouse tray
Desk Clamp attaches to surface edge .4–2.4" (10–60 mm) thick				
 <b>Typical LCD Size</b>	≤ 22"	≤ 30"	Maximum LCD outside width: 21.25" (54 cm)	≤ 20" Monitor depth may affect weight capacity. See website for details
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>				
 <b>Weight Capacity</b>	LCD Pivot capacity 6–16 lbs (2,7–7,3 kg) Maximum load on height-adjustment assembly 24 lbs (11 kg). Includes weight of display in addition to contents on Keyboard Tray	LCD Pivot capacity 16–28 lbs (7,3–12,7 kg) Maximum load on height-adjustment assembly 35 lbs (16 kg). Includes weight of display in addition to contents on Keyboard Tray	LCD weight 6–14 lbs (2,7–6,3 kg) each, 12–28 lbs (5,5–12,7 kg) combined. Monitors must be equal in weight or +/- 1 pound (.45 kg)	Laptop 6–10 lbs (2,7–4,5 kg) LCD 6–16 lbs (2,7–7,2 kg)
 <b>Lift</b>	LCD/keyboard adjust 18" (46 cm) in tandem; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 23" (58 cm)	LCD/keyboard adjust 18" (46 cm) in tandem; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 23" (58 cm)	LCDs/keyboard adjust 18" (46 cm) in tandem; LCDs adjust 5" (13 cm) independently; maximum LCD height adjustment 23" (58 cm)	LCD/notebook/keyboard adjust 18" (46 cm) in tandem; LCD and laptop adjust 5" (13 cm) independently; maximum LCD height adjustment 23" (58 cm)
 <b>Tilt</b>	30°	30°	—	LCD only 30°
 <b>Pan</b>	—	—	—	—
 <b>Rotation</b>	360° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	LCD only 360° Portrait to landscape screen rotation
 <b>VESA</b>	MIS-D	MIS-D/E/F	LD: MIS-D HD: MIS-D/E/F	MIS-D
<b>Warranty</b>	5 years	5 years	5 years	5 years

# Desk Mounts

## Verifiable difference with dual displays

### Multi-monitor outperforms single monitor

#### Productivity benefits

- 33% fewer errors
- 18% faster in errorless editing of multiple tasks
- 16% faster edits throughout the task
- 10% more errorless edits generated
- 6% quicker access to tasks (opening, sizing, aligning windows, etc.)

#### Usability benefits

- 45% easier task tracking (finding windows, referencing text, etc.)
- 38% easier to move sources of information around
- 32% faster to perform tasks
- 29% more effective for tasks
- 24% more comfortable to use in tasks
- 19% easier to recover from mistakes
- 17% easier to learn how to accomplish the task

NEC Display Solutions, University of Utah and ATI Technologies, Productivity and Multi-Screen Displays, October 2003



**LX Dual  
Side-by-Side Arm**

**LX Dual  
Stacking Arm**

Part # (color)	45-245-026 (polished aluminum)	45-248-026 (polished aluminum)
Includes	Desk clamp and grommet mount, pole, two (2) LCD arms, two (2) extensions. Desk clamp attaches to edge up to 2.6" (66 mm) thick; grommet mount attaches through hole 9/16"-2" (7-51 mm) wide and up to 3" (80 mm) thick	Desk clamp and grommet mount, pole, two (2) LCD arms, two (2) extensions, one (1) laptop tray, laptop fastening kit (choose: Velcro, non-slip pad or clips). Desk clamp attaches to edge up to 2.6" (66 mm) thick; grommet mount attaches through hole 9/16"-2" (7-51 mm) wide and up to 3" (80 mm) thick
Typical LCD Size	≤ 24" Monitor depth may affect weight capacity. See website for details	≤ 24" Monitor depth may affect weight capacity. See website for details
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>		
Weight Capacity	20 lbs (9,1 kg) per arm	LCD weight 7-20 lbs (3,2-9,1 kg) Laptop weight 2.5-12 lbs (1,1-5,4 kg) Total weight capacity 40 lbs (18,1 kg)
Lift	13" (33 cm)	13" (33 cm)
Tilt	85°	85°
Pan	360° Extend LCD up to 25" (64 cm)	360° Extend LCD up to 25" (64 cm)
Rotation	LCD 360° Portrait to landscape screen rotation	LCD 360° Portrait to landscape screen rotation
VESA	MIS-D	MIS-D
Warranty	5 years	5 years

# Desk Mounts

Adjust your view – affordable ergonomics promotes wellness



	Neo-Flex All-In-One Lift Stand	Neo-Flex Notebook Lift Stand	Neo-Flex Widescreen Lift Stand	Neo-Flex LCD Stand	Neo-Flex LCD Arm
<b>Part # (color)</b>	Secure Clamp (SC) 33-338-085 (black) Strap 33-326-085 (black)	33-334-085 (black)	33-329-085 (black)	33-310-060 (black & silver)	45-174-300 (silver)
<b>Includes</b>	—	Recommended usage with keyboard and mouse, not included	—	—	Clamp and grommet bases. Clamp to surfaces 1/2–1 1/8" (13–48 mm) thick or grommet mount through holes 9/16–2" (8–51 mm) wide, up to 2 1/2" (63 mm) thick
<b>Typical LCD Size</b>	≤ 24" Some motion may be restricted on 22–24" monitors when in portrait mode	≤ 17" Works with most 17" (43 cm) notebooks with or without port replicator	20–32"	≤ 24"	≤ 22"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>					
<b>Weight Capacity</b>	6–16 lbs (2,7–7,2 kg)	3.5–14 lbs (1,6–6,3 kg)	16–36 lbs (7,2–16,3 kg)	6–16 lbs (2,7–7,2 kg)	≤ 18 lbs (8,2 kg) Monitor depth may affect weight capacity. See website for details
<b>Lift</b>	5" (13 cm)	6" (15,2 cm)	5" (13 cm)	5" (13 cm)	8" (20,3 cm)
<b>Tilt</b>	30°	25°	30°	30°	180°
<b>Pan</b>	Base 360°	Base 360°	Base 360°	270°	360° Extend LCD up to 19.3" (49 cm)
<b>Rotation</b>	360° Portrait to landscape screen rotation	—	90° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation. Portrait orientation may be incompatible on > 19" widescreen LCDs	360° Portrait to landscape screen rotation
<b>VESA</b>	MIS-D	—	MIS-D/E/F See website for details	MIS-D	MIS-D
<b>Warranty</b>	3 years	3 years	3 years	3 years	3 years



	Neo-Flex Extend LCD Arm	MX Desk Mount LCD Arm	LX Desk Mount LCD Arm
<b>Part # (color)</b>	45-235-194 (silver)	45-214-026 (polished aluminum)	45-241-026 (polished aluminum)
<b>Includes</b>	Clamp and grommet bases. Clamp to surfaces 1/2–1 1/8" (13–48 mm) thick or grommet mount through holes 9/16–2" (8–51 mm) wide, up to 2 1/2" (63 mm) thick	Clamp and grommet bases. Desk clamp attaches to surface edge 0–2.6" (0–66 mm) thick; grommet mount attaches through surface holes .31–2" (8–51 mm) wide and up to 3" (80 mm) thick	Clamp and grommet bases. Desk clamp attaches to surface edge. 4–2.4" (10–60 mm) thick; grommet mount attaches through surface hole. .31–2" (8–50 mm) wide and up to 3" (76 mm) thick
<b>Typical LCD Size</b>	≤ 24"	≤ 30"	≤ 24"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>			
<b>Weight Capacity</b>	7–20 lbs (3,1–9,1 kg) Monitor depth may affect weight capacity. See website for details	14–30 lbs (6,3–13,6 kg) Monitor depth may affect weight capacity. See website for details	7–20 lbs (3,1–9,1 kg) Monitor depth may affect weight capacity. See website for details
<b>Lift</b>	—	5" (13 cm)	13" (33 cm)
<b>Tilt</b>	80°	80°	85°
<b>Pan</b>	360°	360°	360°
<b>Rotation</b>	90° Portrait to landscape screen rotation	90° Portrait mode is incompatible with 30" displays	90° Portrait to landscape screen rotation
<b>VESA</b>	MIS-D	MIS-D/E/F See website for details	MIS-D
<b>Extension</b>	≤ 22" (56 cm)	≤ 16.7" (42,4 cm)	≤ 25" (64 cm)
<b>Warranty</b>	3 years	5 years	5 years

# Desk Mounts


Fixed-height stands save space, improve productivity



Part # (color)	33-322-200 (black), available Americas, EMEA	33-091-200 (black)	33-323-200 (black), available Americas, EMEA	33-324-200 (black)	33-325-200 (black)
Base	Grommet mount base also available (60-350-200). Order separately.	Grommet mount base also available (60-350-200). Order separately.	Grommet mount base also available (60-350-200). Order separately.	Grommet mount base also available (60-350-200). Order separately.	Grommet mount base also available (60-350-200). Order separately.
Typical LCD Size	≤ 24" Maximum LCD outside width 23¼" (59 cm)	≤ 24"	≤ 21" (53 cm) Maximum LCD outside width 20" (51 cm)	≤ 24" Maximum LCD outside width 23¼" (59 cm)	≤ 17" Maximum LCD outside width 16" (40.6 cm)
LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.					
Weight Capacity	31 lbs (14 kg) per LCD	23 lbs (10,4 kg) per LCD	31 lbs (14 kg) per LCD	31 lbs (14 kg) per LCD	31 lbs (14 kg) per LCD
Lift	—	—	—	—	—
Tilt	—	180°	—	—	—
Pan	—	180°	—	—	—
Rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation
VESA	MIS-D	MIS-D	MIS-D	MIS-D	MIS-D
Warranty	5 years	5 years	5 years	5 years	5 years

## Set-up Options

Multiple monitors can be arranged in a parabola with Ergotron's patented Paraview Technology. This layout increases data visibility, maintains a single focal length for viewer's eyes (less work for eye muscles), and utilizes available space efficiently. Install monitors with 4° offset: position them inward, upward or downward for optimized viewing conditions. Monitors can be adjusted to different heights on the pole to accommodate user preference.



# DS100 Desk Stands Individual Components

## 28" Pole

**20-137-200** black

Shipping weight: 5 lbs (2.3 kg)

The DS Pole measures 1-1/2" (38 mm) in diameter and mounts to a Free Standing, Desk Clamp or Grommet Mount Base\*

\*Attaches to base with set screws from base mounting kit.



## Free Standing Base

Flexible, quick, DS mounting

**33-262-200** black

Shipping weight: 2 lbs (.9 kg)

Place directly on works surface, no hardware necessary.\*

\*Observe balance requirements to prevent tipping.



## Grommet Mount Base

Quick, stable mounting utilizes grommet hole

**60-350-200** black

Shipping weight: 5 lbs (2.3 kg)

Attaches to openings in worksurface from 3/8–3" in diameter (10 to 76 mm) and up to 3-1/4" (83 mm) thick.



## DS Clamping Pivot

Single Pivot with P/L motion

**47-058-200** black

LCD weights (each): 25 lbs (11.3 kg)  
Shipping weight: 4 lbs (1.8 kg)

Attaches to 28" Pole.

Observe balance requirements to prevent tipping.




## DS Clamping Double Pivot

Double Pivot with P/L motion

**47-051-200** black

LCD weights (each): 23 lbs (10.4 kg)  
Shipping weight: 5 lbs (2.3 kg)

Attaches to 28" Pole.



## Outboard Pole Clamps


Greater stability for expanded, multi-display configurations

**60-443-200\*** black

Shipping weight: 3 lbs (1.4 kg)

Attaches 55" Crossbar using two (2) base/Pole assemblies.

\*One set consists of two (2) clamps.



## DS Sliding Pivot

Flexible, quick, DS mounting

**47-100-009** black

LCD weights (each): 28 lbs (12.7 kg)  
Shipping weight: 2 lbs (.9 kg)

Attaches to Crossbar

Observe balance requirements to prevent tipping.



## 28" Crossbar


For multi-display applications

**60-409-200** black

Shipping weight: 6 lbs (2.7 kg)

Attaches to 28" pole.

Requires two (2) Sliding Pivots, order separately.




## Crossbar Extender

Short

**97-446-200** black

Shipping weight: 6 lbs (2.7 kg)

Use Short Extenders to increase width of 28" Crossbar, 60-409-200 to 46". Includes center pivot for mounting an LCD in the middle of the crossbar.




## Crossbar Extender

Long


**97-447-200** black

Shipping weight: 6 lbs (2.7 kg)


Use Long Extenders to increase width of 28" Crossbar, 60-409-200 to 55". Includes center pivot for mounting an LCD in the middle of the crossbar.




# DS100 Desk Stands Dimensions

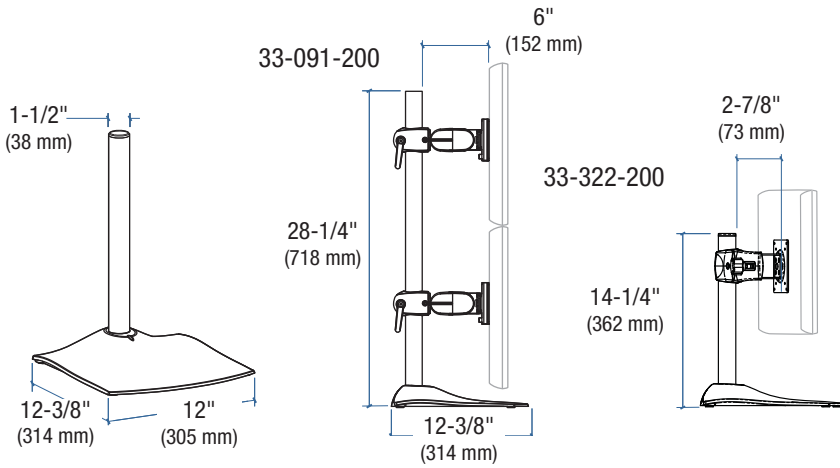


**Crossbar**  
for 33-322-200 and 33-324-200



**Crossbar for 33-323-200**

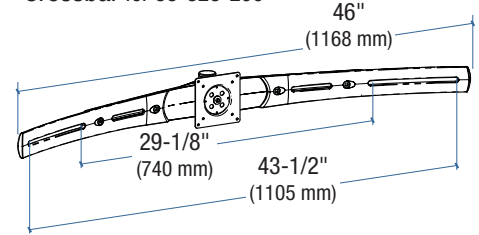

**Crossbar for 33-325-200**

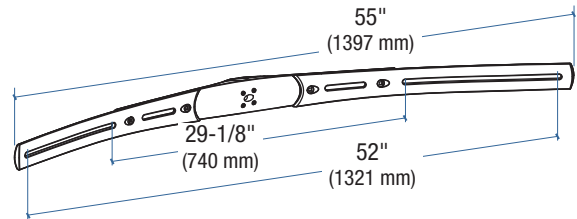

**Attention:** Listed allowable widths assume monitor thickness is 4" (102 mm). If monitor thickness is less, allowable width may be more. Contact Ergotron for details.

## Available Monitor Widths Using Crossbars

Number of Monitors (Horizontal Crossbar)	Allowable Monitor Width*
Dual-Monitor (28" Crossbar)	23-1/4" (590 mm)
Triple-Monitor (46" Crossbar)	20" (508 mm)
Triple-Monitor (55" Crossbar)	24.5" (622 mm)
Quad-Monitor (55" Crossbar)	16" (406 mm)








\* Width refers to monitor's physical outside dimension – not screen size.



# Wall Mounts








Wall mounted solutions for large TVs, displays and digital signage applications







Part # (color)	60-603-003 (silver) XL 60-601-003 (silver)	60-604-003 (silver) XL 60-602-003 (silver)	60-600-009 (black)
 <b>Typical LCD Size</b>	32-65" XL 42-65"	32-65" XL 42-65"	≤ 32"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>			
 <b>Weight Capacity</b>	≤ 175 lbs (79 kg)	≤ 175 lbs (79 kg)	≤ 115 lbs (52,2 kg)
 <b>Lift</b>	—	—	—
 <b>Tilt</b>	20°	—	15°
 <b>Pan</b>	—	—	—
 <b>Rotation</b>	—	—	90° Portrait to landscape screen rotation. See website for details
 <b>VESA</b>	MIS-D/E/F See website for details	MIS-D/E/F See website for details	MIS-F See website for details
<b>Depth</b>	3.5" (8,9 cm)	1.25" (3,2 cm)	4.8" (12,1 cm)
<b>Warranty</b>	5 years	5 years	5 years

Secure assurance for your display investment



Part # (color)	45-194-194 (silver)	45-195-194 (silver)
 <b>Typical LCD Size</b>	19-32"	19-32"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>		
 <b>Weight Capacity</b>	≤ 50 lbs (22,7 kg) Adding second extension (45-244-026) reduces maximum weight capacity to 36 lbs (16,3 kg)	≤ 50 lbs (22,7 kg)
 <b>Lift</b>	—	—
 <b>Tilt</b>	20°	20°
 <b>Pan</b>	360°	40°
 <b>Rotation</b>	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation
 <b>VESA</b>	MIS-D/E/F Works with 200 x 200 mm VESA MIS-F compliant and MIS-D/E compliant displays (all hardware provided). See website for details	MIS-D/E/F Works with 200 x 200 mm VESA MIS-F compliant and MIS-D/E compliant displays (all hardware provided). See website for details
<b>Depth</b>	Folds to 3.7" (9,1 cm)	3.7" (9,1 cm)
<b>Extension</b>	13" (33 cm)	—
<b>Warranty</b>	5 years	5 years

# Wall Mounts

	 200 Series Dual Monitor Arm	 200 Series Wall Mount Pivot	 200 Series Wall Mount Arm, 1 Extension	 200 Series Wall Mount Arm, 2 Extensions
<b>Part # (color)</b>	45-231-200 (black), available Americas	45-232-200 (black), available Americas	45-233-200 (black), available Americas	45-234-200 (black), available Americas, EMEA
<b>Typical LCD Size</b>	≤ 22"	≤ 24"	≤ 24"	≤ 24"
<b>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</b>				
<b>Weight Capacity</b>	Weight capacity 13 lbs (5,9 kg) per mount, 26 lbs (11,8 kg) total. Monitors must be equal in weight or +/-1 pound (0,45 kg)	≤ 25 lbs (11,3 kg)	≤ 25 lbs (11,3 kg)	≤ 25 lbs (11,3 kg)
<b>Lift</b>	—	—	—	—
<b>Tilt</b>	—	180° Display size may restrict motion	180° Display size may restrict motion	180° Display size may restrict motion
<b>Pan</b>	360°	180° Display size may restrict motion	360°	360°
<b>Rotation</b>	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation
<b>VESA</b>	MIS-D	MIS-D	MIS-D	MIS-D
<b>Depth</b>	Folds to 5.8" (14,8 cm)	5.8" (14,8 cm)	Folds to 5.8" (14,8 cm)	Folds to 5.8" (14,8 cm)
<b>Extension</b>	23.7" (60,1 cm)	—	14.8" (37,6 cm)	23.8" (60,5 cm)
<b>Warranty</b>	5 years	5 years	5 years	5 years

# Wall Mounts

Perfect for Apple Cinema displays, all-in-one computers and medium-sized TVs




Part # (color)	45-228-026 (polished aluminum)	Single 47-092-800 (grey/black) Double 47-093-800 (grey/black)	60-239-007 (black)	28-514-800 (grey & black) 28-513-100 (grey)
Includes	—	Grey and black pivot covers Attaches directly to surface, although Wall Plate (97-101-003) is recommended. See Accessories	—	28-514-800: Dual LCD pivots, 26" (66 cm) Wall Track 28-513-100: Slide-out keyboard tray, 10" (25.4 cm) Wall Track, wrist rest, mouse pad, mouse holder
Typical LCD Size	≤ 30"	≤ 24"	≤ 27"	≤ 24"
LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.				
Weight Capacity	14–30 lbs (6.3–13.6 kg) Monitor depth greater than 4" (10.2 cm) may diminish weight capacity	Single ≤ 25 lbs (11.3 kg) Double ≤ 23 lbs (10.4 kg)	≤ 30 lbs (13.6 kg)	≤ 50 lbs (22.7 kg) 25 lbs (11.3 kg) per pivot
Lift	5" (13 cm)	—	—	—
Tilt	80° Monitor tilts 75° up and 5° down	180°	—	180°
Pan	360° Base 180°; extension 360°; monitor 180°	—	—	—
Rotation	90° with lock Portrait mode is incompatible with 30" displays	360° Portrait to landscape screen rotation	—	360°
VESA	MIS-D/E/F See website for details	MIS-D	MIS-D	MIS-D
Depth	Folds to 5" (13 cm)	Single 3.4" (8.6 cm) Double 5.4" (13.7 cm)	.77" (2 cm)	4.5" (11.4 cm)
Extension	21.6" (55 cm)	—	—	11.3" (46.4 cm)
Warranty	5 years	5 years	5 years	5 years

## 100 Series Keyboard Pivot

Offers flexibility in placement, movement of keyboard

47-094-800 grey/black



Includes:  
Grey and black pivot covers


Weight Capacity	Lift	Tilt	Pan	Rotation	VESA
≤ 7.5 lbs ≤ 3.4 kg	—	90°	—	—	NA

Keyboard/Mouse Tray (77-050) ordered separately.


# Wall Mounts




## Monitor Mount Pivots

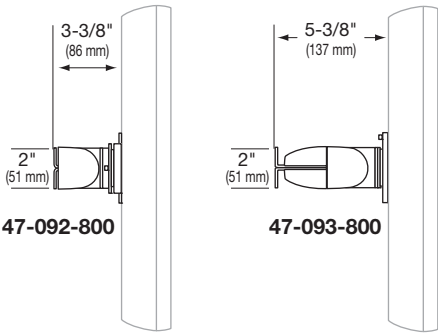


## Keyboard Mount Pivot

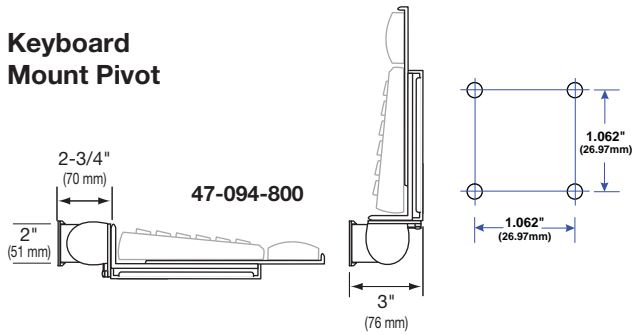


## Single Pivot w/ P/L Interface



## Double Pivot w/ P/L Interface




## Recommended Installation Heights:

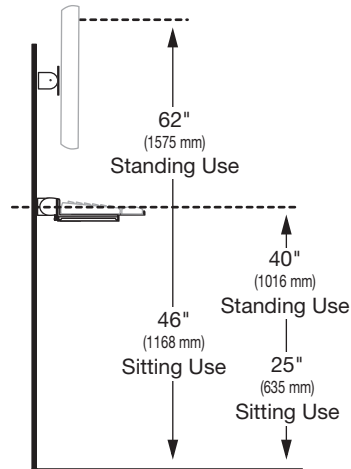


100 Series


## Dimensions:

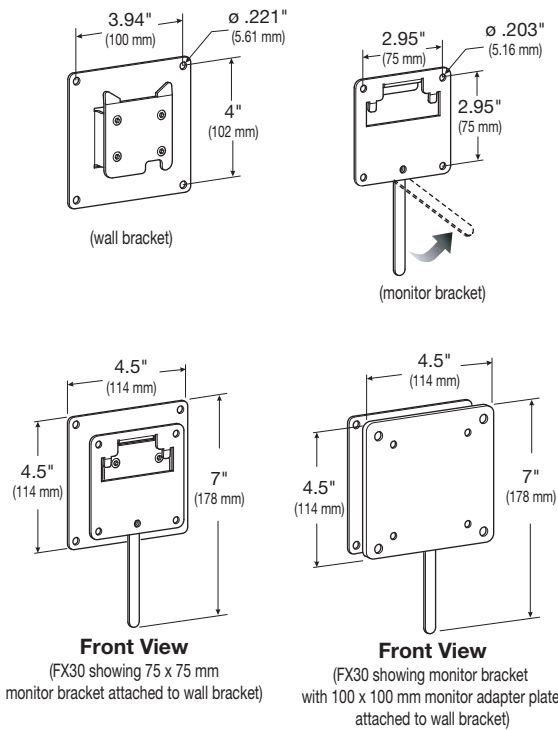

## Wall/Display Clearance:





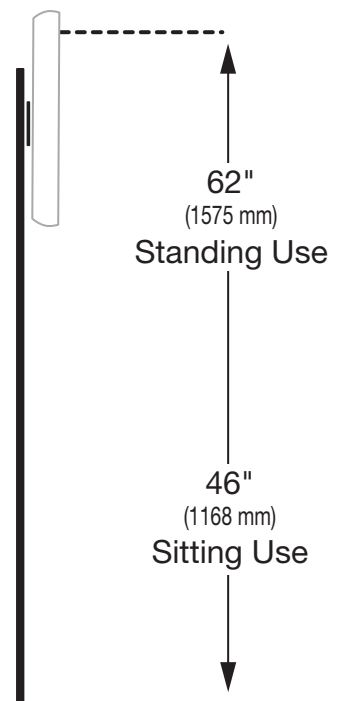


## Recommended Installation Heights:



# Wall Mounts

## Complete point-of-care workstations

					
	200 Series Combo Arm	LX Wall Mount System	StyleView® VL Enclosure	StyleView HD Combo System	StyleView HD Combo Arm
<b>Part # (color)</b>	45-230-216 (white) 45-230-200 (black)	Universal CPU Holder (silver): 45-247-026 (polished aluminum) Vertical Small CPU Holder (black): 45-253-026 (polished aluminum)	60-595-062 (white)	Universal CPU Holder (silver): 45-216-216 (white), available globally Universal CPU Holder (silver): 45-216-200 (black), available Americas, EMEA Vertical Small CPU Holder (black): 45-252-216 (white), available globally Vertical Small CPU Holder (black): 45-252-200 (black), available Americas, EMEA	45-215-216 (white), available globally 45-215-200 (black), available Americas, EMEA
<b>Includes</b>	200 Combo Arm, wall mount bracket, height-adjustable LCD mount, wrist rest, scanner and mouse holder, integrated keyboard tray with left/right mouse tray, handle, manual, VESA mounting kit, cable ties	LX Wall Mount LCD Arm, LX Keyboard Arm, CPU Holder and 10" (25.4 cm) Wall Track, wrist rest, mouse holder, 34" (86.4 cm) Wall Track, two (2) 24" (61 cm) cable channels, anchor hardware kit	Enclosure, wall plate, mounting template, vertical lift, slide-out keyboard tray, wrist rest, mouse pouch, scanner holder, internal cable management, batteries, monitor mounting hardware, wall mounting hardware, keys	HD Combo Arm, 34" Wall Track with (2) black track covers, CPU Holder, (2) 10" cable channels, track anchor hardware kit, CPU and Arm track mount bracket kits, Wall Track fasteners for hollow walls/concrete/wood, CPU direct wall mount kit, height-adjustable LCD mount, wrist rest, scanner and mouse holders, integrated keyboard tray with left/right mouse tray, handle, VESA monitor mounting kit, cable ties	HD Combo Arm, Wall mount bracket, height adjustable LCD mount, wrist rest, scanner and mouse holder, integrated keyboard tray with left/right mouse tray, handle, VESA monitor mounting kit, cable ties
<b>Typical LCD Size</b>	≤ 24"	≤ 24"	≤ 22" Maximum monitor physical dimensions 20.7" W x 14.7" H x 2.8" D (52.6 x 37.3 x 7 cm). Assumes VESA hole pattern is centered on the back of the display	≤ 24"	≤ 24"
<b>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</b>					
<b>Weight Capacity</b>	LCD 6–18 lbs (2.7–8.2 kg); keyboard, mouse and barcode scanner 5 lbs (2.3 kg)	LCD 7–20 lbs (3.1–9.1 kg) Monitor depth may affect weight capacity. See website for details Keyboard ≤ 5 lbs (2.3 kg) CPU ≤ 40 lbs (18 kg)	8–33 lbs (3.6–14.9 kg) Listed weight capacity represents total load, including monitor and contents of keyboard tray, mouse pouch and scanner holder. Maximum load capacity: monitor pivot 18 lbs (8.2 kg); CPU compartment 20 lbs (9.1 kg); door/worksurface 50 lbs (22.6 kg)	Display 6–18 lbs (2.7–8.2 kg); keyboard, mouse and barcode scanner 5 lbs (2.3 kg)	Display 6–18 lbs (2.7–8.2 kg); keyboard, mouse and barcode scanner 5 lbs (2.3 kg)
<b>Lift</b>	5" (13 cm)	LCD 13" (33 cm) Keyboard 13" (33 cm)	9" (23 cm)	LCD and keyboard adjusts 15" (38 cm) in tandem; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 20" (51 cm)	LCD and keyboard adjusts 15" (38 cm) in tandem; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 20" (51 cm)
<b>Tilt</b>	30° Monitor up/down tilt +25°/-5° Negative-tilt keyboard tray adjustable 0° to -10°	LCD 85° Keyboard 80°	—	30° Monitor up/down tilt +25°/-5° Negative-tilt keyboard tray adjustable 0° to -10°	30° Monitor up/down tilt +25°/-5° Negative-tilt keyboard tray adjustable 0° to -10°
<b>Pan</b>	360°	360°	10° Monitor pans left/right ± 5° (based on typical 17" monitor; will vary with monitor size). Keyboard tray pans left/right up to 120°	360°	360°
<b>Rotation</b>	90° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation	—	90° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation
<b>VESA</b>	MIS-D	MIS-D	MIS-D	MIS-D	MIS-D
<b>Depth</b>	Folds to 12.1" (31 cm)	Folds to 5.3" (13.4 cm)	Footprint: 27.2"W x 60.6"H x 6.75"D (69 cm x 154 cm x 17 cm) closed or 20.6"D (53 D cm) open	Folds to 12" (30 cm)	Folds to 12" (30 cm)
<b>Extension</b>	≤ 39" (99 cm)	LCD ≤ 25" (64 cm) Keyboard ≤ 35" (89 cm)	—	≤ 39" (99 cm)	≤ 39" (99 cm)
<b>Warranty</b>	5 years	5 years	5 years 1-year warranty on all electronic components (excludes AA batteries)	5 years	5 years

# Wall Mounts

Smart point-of-care mounting and mobility solutions for your entire facility



Keyboard tray folded-up for low-profile



Part # (color)	60-609-216 (white) 60-609-195 (black), available Americas	60-593-216 (white), available Americas 60-593-195 (black), available Americas	97-487-800 (black/white/grey), available Americas Vertical Lift High Traffic models only
Includes	Vertical Lift, slide out panning keyboard tray, mouse pad (built into keyboard tray) wrist rest, mouse pouch, mouse and scanner holder	Vertical Lift, mouse pad, wrist rest, mouse pouch	Keyboard tray lift assembly, wrist rest, multiple covers (grey, black, white), Velcro and adhesive strips
<b>Optional Accessories:</b> Vertical CPU Holder 97-468-202 (silver); Vertical Small CPU Holder 80-063-200 (black)			
Typical LCD Size	≤ 24"	≤ 24"	—
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>			
Weight Capacity	8–33 lbs (3,6–14,3 kg)	5–30 lbs (2,3–13,6 kg)	Keyboard, mouse, mouse pad, wrist rest, and adhesive materials 0.75–2.5 lbs (0,34–1,13 kg)
Lift	9" (23 cm)	9" (23 cm)	—
Tilt	10° Back-tilt keyboard tray adjustable 0° to -10°	10° Back-tilt keyboard tray adjustable 0° to -10°	—
Pan	50° May vary based on monitor Keyboard tray pans left/right up to 120°	—	—
Rotation	—	—	—
VESA	MIS-D	MIS-D	—
Depth	Folds to 4.5" (11,4 cm)	Folds to 4" (10,2 cm)	—
Extension	18.8" (47,9 cm)	12" (30,5 cm)	—
Warranty	5 years	5 years	5 years


## Minimizing Vertical Lift Storage Profile

For VL Series to remain less than 4" (102 mm)\* from the wall\* when in storage position, follow these guidelines:

1. Monitor must not be more than 2-1/2" (63 mm) thick.
2. Keyboard should not be more than 7-1/4" (184 mm) deep.
3. Dimension "A" must be no greater than 8-3/4" (222 mm).
4. Use Standard Keyboard Tray option only (Slide-Out Keyboard Tray option depth ≥ 4-1/2", 114 mm).


\* Exceptions: If you want to install your keyboard in a forward position while remaining ≤ 4" (102 mm) from the wall, "A" ≤ 7" (178 mm). See Figure 1.

If you want to use a keyboard wrist rest, dimension "A" can be calculated by adding 3-1/2" (89 mm) to the keyboard depth "B" and subtracting this sum from 16-1/2" (419 mm). See Figure 2.

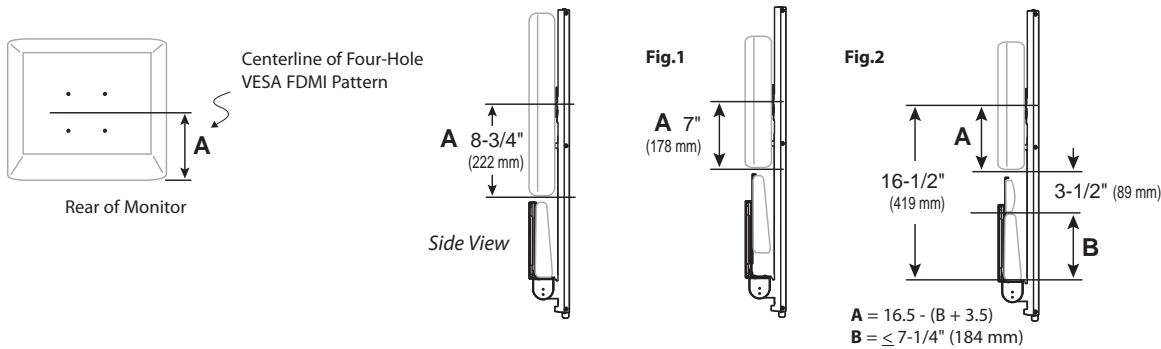

# Wall Mounts

Space-saving technology for optimal viewing

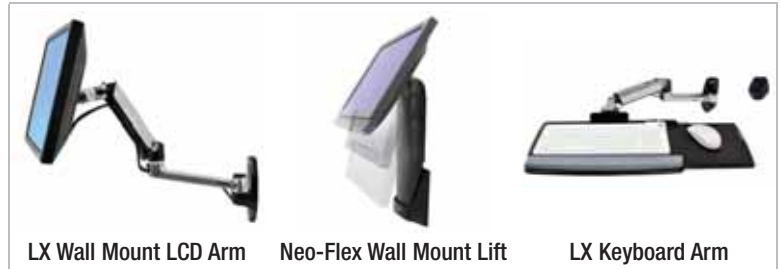


Part # (color)	45-243-026 (polished aluminum)	60-577-195 (black)	45-246-026 (polished aluminum)
Includes	—	—	Wrist rest, mouse holder
Typical LCD Size	≤ 24"	≤ 24"	Keyboard ≤ 17.5" x 10.1" (44,5 x 25,7 cm)
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>			
Weight Capacity	7–20 lbs (3,1–9,1 kg) Monitor depth greater than 2" (5 cm) may diminish weight capacity	6–16 lbs (2,7–7,2 kg)	≤ 5 lbs (2,2 kg)
Lift	13" (33 cm)	5" (13 cm)	13" (33 cm)
Tilt	85°	35°	80°
Pan	360°	70°	360°
Rotation	90° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation	—
VESA	MIS-D	MIS-D	—
Depth	Folds to 5.3" (13,4 cm)	3.5" (9 cm)	Folds to 3.5" (9 cm)
Extension	25" (64 cm)	—	35" (89 cm)
Warranty	5 years	3 years	5 years

# 400 Series





## 400 Series Vertical Mount Arms

Part Number	Description	Weight Capacity	Shipping Weight
45-007-099, grey	Rotate, Double Pivot w/ P/L	23 lbs (10.4 kg)	13 lbs (5.9 kg)
45-007-085, black			



45-007-xxx

## Vertical Mount Monitor Arms

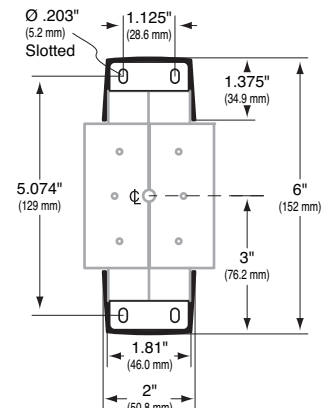

# EMR Carts

## Electronic Medical Records

Attractive, lightweight and ergonomic, these carts meet the individual needs of the caregiver while supporting the application-specific needs of point-of-care.



- ① True ergonomics! Accommodates the largest range of caregiver heights with single-motion adjustment for sitting or standing and bifocal users; StyleView carts help promote caregiver wellness
  - ② Ergonomic back-tilt keyboard tray with left or right mouse tray ensures wrists remain in a neutral position during data entry. LCD and keyboard swivel side-to-side for closer access while interacting with patients
  - ③ Push-button Ethernet ready-on function embedded in worksurface: awakens enclosed computer from energy-saving hibernation mode with the touch of an external button—facilitates easy compliance with EnergyStar 4.0 guidelines
  - ④ Lockable, ventilated enclosed storage for closed laptop, thin client or CPU up to 15.75"W x 14.75"D x 3.75"H (40 x 37.5 x 9.5 cm). Keys and locks are heavy-duty
  - ⑤ Surfaces are treated with Agion® Antimicrobial for product protection; handles are smooth and continuous for improved cleanability
  - ⑥ Durable, easy-to-clean exterior composed of aluminum, high-grade plastic and zinc-plated steel promotes infection control
  - ⑦ Fifth-generation power system and easy to replace batteries: Sealed Lead Acid (SLA) battery technology remains the safest and most cost-effective solution available
  - ⑧ StyleView's small footprint, with ultra-smooth gliding casters, travels across carpeted or hard floors with ease—perfect for moving within space-constrained areas
- For patient and caregiver safety, the cart and power system are certified to UL 60601-1 and NFPA leakage current limits
- Environmentally responsible: RoHS, REACH, WEEE and EU (94/62/EC) packaging compliant



	Certification Standard	Certification Mark	Grounded Plug & Outlet
USA	UL 60601-1	cTUVus	North American NEMA 5-15P Hospital Grade
Canada	CAN/CSA C22.2 No. 601.1 M90	cTUVus	North American NEMA 5-15P Hospital Grade
Mexico	—	—	North American NEMA 5-15P Hospital Grade
Europe	EN 60601-1	CE	European CEE 7
Ireland/United Kingdom	EN 60601-1	CE	United Kingdom BS 1363
Hong Kong/Malaysia/Singapore	IEC 60601-1	Not Applicable	United Kingdom BS 1363
China	IEC 60601-1	Not Applicable	GB2009-1 GB1002-1
Australia/New Zealand	IEC 60601-1	C-Tick	Australian AS/NZS 3112
Japan	IEC 60601-1	Not Applicable	JIS 8303



# Carts



Includes **FREE** StyleLink™ with enterprise capabilities—Install, access and manage your StyleView power systems and drawers from a remote location across WAN, LAN, or VPN. StyleLink's three-part software package maximizes your IT tech-support time by giving you real-time centralized control over carts across campus, the city, country, or the world.

Features include worksurface, Ethernet ready-on function and four-port USB hub, scanner holder bracket, mouse holder, wrist rest, back-tilt keyboard tray, left/right mouse tray, rear handle, storage basket, cable storage, four casters (two locking)

	Typical Size	Weight Capacity	Lift	Tilt	Pan	Rotation	VESA
<b>LCD Powered</b>	≤ 22"	≤ 35 lbs (16 kg)	Arm 27" (68,6 cm) Lift Pivot 25" (63,5 cm)	Arm 65° Lift Pivot 25°	Arm 180° Lift Pivot 24°	Arm 360° P/L Lift Pivot 90° P/L	MIS-D
Includes two-battery 66 Ah power system, 10-foot coiled cord, four hospital-grade AC outlets, power system user interface, StyleLink™ software, secure CPU compartment							
<b>LCD Non-powered</b>	≤ 22"	≤ 35 lbs (16 kg)	Arm 27" (68,6 cm) Lift Pivot 25" (63,5 cm)	Arm 65° Lift Pivot 25°	Arm 180° Lift Pivot 24°	Arm 360° P/L Lift Pivot 90° P/L	MIS-D
Includes secure CPU compartment							
<p>Total maximum load of height-adjustment assembly 35 lbs (15,9 kg). This is the sum of the following components: capacity of LCD pivot 5–14 lbs (2,3–6,4 kg); capacity of worksurface and keyboard tray ≤ 8 lbs (3,6 kg); capacity of CPU compartment ≤ 13 lbs (5,9 kg). Note: locking the height of the LCD lift pivot changes the weight capacity to ≤ 20 lbs (9,1 kg) to accommodate use of all-in-one monitors – contact Ergotron for details</p> <p>If the CPU weight is greater than 13 lbs (6 kg) then the CPU must be mounted to the rear of the cart using the Universal CPU Holder accessory (ordered separately)</p> <p>Lift range Arm: LCD and worksurface adjust 20" (51 cm) in tandem; LCD Arm adjusts 7" (17,8 cm) independently; maximum LCD height adjustment 27" (68,6 cm). Lift range Lift Pivot: LCD and worksurface adjust 20" (51 cm) in tandem; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 25" (63,5 cm)</p> <p>Portrait orientation may be incompatible with &gt; 19" widescreen LCDs</p>							
<b>Laptop Powered</b>	≤ 17"	≤ 18 lbs (8 kg)	20" (51 cm)	—	—	—	—
Includes two-battery 66 Ah power system, 10-foot coiled cord, four hospital-grade AC outlets, power system user interface, StyleLink software, secure laptop compartment							
<b>Laptop Non-powered</b>	≤ 17"	≤ 18 lbs (8 kg)	20" (51 cm)	—	—	—	—
Includes secure laptop compartment. SV40-40001 does not include Ethernet ready-on function and four-port USB hub, scanner holder bracket, rear handle, storage basket							
Maximum physical dimensions of a notebook used in the cart: 16" W x 14.9" D x 2.5" H (40,6 x 37,8 x 6,4 cm)							
Total maximum load of height-adjustment assembly 18 lbs (8 kg). This is the sum of the following components: capacity of work-surface and keyboard tray ≤ 8 lbs (3,6 kg); capacity of CPU compartment ≤ 10 lbs (4,5 kg)							
5-year warranty, excluding electrical/electronic components, see website for details							



	EMR SV40 Laptop Non-powered	EMR Laptop Non-powered	EMR LCD Pivot Non-powered	EMR LCD Arm Non-powered	EMR Laptop Powered	EMR LCD Pivot Powered	EHR LCD Arm Powered
<b>USA</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	SV42-42102 120V60Hz, 66Ah	SV42-42201 120V60Hz, 66Ah	SV42-42221 120V60Hz, 66Ah
<b>Canada</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	SV42-42102 120V60Hz, 66Ah	SV42-42201 120V60Hz, 66Ah	SV42-42221 120V60Hz, 66Ah
<b>Mexico</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	SV42-42102 120V60Hz, 66Ah	SV42-42201 120V60Hz, 66Ah	SV42-42221 120V60Hz, 66Ah
<b>Europe</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	SV42-42104 230V50Hz, 66Ah	SV42-42203 230V50Hz, 66Ah	SV42-42223 230V50Hz, 66Ah
<b>Ireland/ United Kingdom</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	SV42-42106 230V50Hz, 66Ah	SV42-42205 230V50Hz, 66Ah	SV42-42225 230V50Hz, 66Ah
<b>Hong Kong/ Malaysia/Singapore</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	—	SV42-42205 230V50Hz, 66Ah	SV42-42225 230V50Hz, 66Ah
<b>China</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	—	SV42-42209 230V50Hz, 66Ah	SV42-42229 230V50Hz, 66Ah
<b>Australia/ New Zealand</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	—	SV42-42207 230V50Hz, 66Ah	SV42-42227 230V50Hz, 66Ah
<b>Japan</b>	SV40-40001	SV41-41001	SV41-41021	SV41-41002	—	SV42-42213 100V50Hz, 66Ah	SV42-42233 100V50Hz, 66Ah

# Carts

## PHD Carts

Patient Healthcare Delivery



### Improved workflow for nurses

Ergotron's innovative, truly ergonomic and easy-to-maneuver PHD healthcare carts offer caregivers simple, flexible and efficient non-controlled medication management at the point-of-care. Features include an auto-locking drawer system that lets caregivers choose the configuration that best meets their individual needs, sit-to-stand height adjustment, independent screen positioning and an adjustable back-tilt keyboard tray.

- Fifth-generation power system and easy to replace batteries
- For patient and caregiver safety the power system is certified to UL 60601-1 (and most country-equivalent standards) and NFPA leakage current limits; FULL cart-level certification is in progress



Enterprise Management: **FREE** StyleLink Software secures access to drawers and allows remote monitoring/configuration with established Microsoft tools

**EXPERIENCE** the difference with our Global Service Program  
See complete details at [www.ergotron.com](http://www.ergotron.com)



	PHD Laptop Non-powered 1 drawer	PHD LCD Non-powered 1 drawer	PHD Laptop Powered 1 drawer	PHD Laptop Powered 2 drawer	PHD Laptop Powered 4 drawer	PHD Laptop Powered 6 drawer	PHD LCD Powered 1 drawer	PHD LCD Powered 2 drawer	PHD LCD Powered 4 drawer	PHD LCD Powered 6 drawer
<b>USA</b>	Non-powered	Non-powered	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah
<b>Canada</b>	Non-powered	Non-powered	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah
<b>Mexico</b>	Non-powered	Non-powered	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah	120V60Hz, 66Ah
<b>Europe</b>	Non-powered	Non-powered	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah
<b>Ireland/United Kingdom</b>	Non-powered	Non-powered	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah	230V50Hz, 66Ah
<b>Hong Kong/Malaysia/Singapore</b>	Non-powered	Non-powered	—	—	230V50Hz, 66Ah	—	230V50Hz, 66Ah	—	230V50Hz, 66Ah	—
<b>China</b>	Non-powered	Non-powered	—	—	220V50Hz, 66Ah	—	220V50Hz, 66Ah	—	220V50Hz, 66Ah	—
<b>Australia/New Zealand</b>	Non-powered	Non-powered	—	—	230V50Hz, 66Ah	—	230V50Hz, 66Ah	—	230V50Hz, 66Ah	—
<b>Japan</b>	Non-powered	Non-powered	—	—	100V50Hz, 66Ah	—	100V50Hz, 66Ah	—	100V50Hz, 66Ah	—

## Ergotron Service Program

Save time and money by allowing the experts to install and service Ergotron products

- Improve asset management and extend asset life cycle
- Reduce maintenance costs
- Safeguard operational efficiencies and maintain uptime
- Resolve potential problems in a timely manner
- Free up valuable resources to focus on your business
- Maximize product life and achieve optimum product conditioning, reducing total cost of ownership

StyleView Carts	Part Number North America/APAC	Part Number EMEA	Power	Carts Per Site
<b>Site Readiness</b>	SRVC-SR-01	SRVCE-SR-01	—	—
<b>Integration</b>	SRVC-CINP-01A	SRVCE-CINP-01A	Non-powered	10-99
	SRVC-CINP-01B	SRVCE-CINP-01B	Non-powered	100+
	SRVC-CIP-01A	SRVCE-CIP-01A	Powered	10-99
	SRVC-CIP-01B	SRVCE-CIP-01B	Powered	100+
<b>Preventive Maintenance, 3 Year</b>	SRVC-PMNP-03	SRVCE-PMNP-03	Non-powered	10+
	SRVC-PMP-03	SRVCE-PMP-03	Powered	10+
<b>Preventive Maintenance, One Visit</b>	SRVC-PMPNO-01	SRVCE-PMPNO-01	—	10+
<b>Integration &amp; Preventive Maintenance, 3 Year</b> Combines Integration and 3-Year Preventive Maintenance	SRVC-ANP-03A	SRVCE-ANP-03A	Non-powered	10-99
	SRVC-ANP-03B	SRVCE-ANP-03B	Non-powered	100+
	SRVC-AP-03A	SRVCE-AP-03A	Powered	10-99
	SRVC-AP-03B	SRVCE-AP-03B	Powered	100+
<b>Battery Replacement</b>	SRVC-BR-33	—	33 amp/hr batteries	—
<b>Complete Service, 3 Year</b> Combines Integration and 3-Year Preventive Maintenance	SRVC-COMP-03	—	Powered	10+
<b>StyleLink Remote Analysis</b>	SRVC-STYLK-01	SRVCE-STYLK-01	—	—
Non StyleView Carts	Part Number North America/APAC	Part Number EMEA	Tier	Units Per Site
<b>Product Integration</b>	SRVC-PI-01	SRVCE-PI-01	1	25+
	SRVC-PI-02	SRVCE-PI-02	2	10+
	SRVC-PI-03	SRVCE-PI-03	3	10+



Coming Soon: med drawer control available with PHD powered carts

## FREE, industry leading StyleLink Software with enterprise capabilities

StyleLink's three-part software package (Enterprise, Client, removable Graphing Tool) for global healthcare customers deploying Ergotron StyleView powered carts offers broad system and platform compatibility.

### Extend Asset Life Cycle

Optimizes balance between runtime and cycle life

Helps prevent deep discharging, which maximizes battery cycle life and minimizes battery replacement cost

### Proactive Power System Management

Eliminate surprises through use of diagnostic tools, simplifying power system management and reducing time required to fix problems

Email alerts sent by each cart at different stages of battery life facilitate proactive power system management

Remote configuration: remotely configure or change email alerts, names, passwords and communication thresholds on each cart, or a group of carts, using your MS Network

### Reduce Total Cost of Ownership

Reduce costs for maintenance; eliminate need for expensive onsite technical support by leveraging diagnostic capabilities. Simply email StyleLink's history data file to Ergotron Tech Support and they will help troubleshoot power system performance issues

Plan battery replacement based on custom views or email alerts, rather than being surprised by a (higher cost) replacement situation during caregivers' active work hours

### Enterprise Capabilities

Remote enterprise monitor: access your carts across WAN, LAN, or VPN to get real-time information

Custom views: view those carts that meet your specific rules, e.g., carts unplugged, carts not connected, carts not reporting in the last 7 days, etc.

Group view: organize your carts into groups and subgroups. Set views for specific areas of your facilities; troubleshoot power system performance issues

### Coming Soon: Advanced Drawer Management

Each drawer individually controlled with PIN; program locally or remotely

Drawer event log and report capability

Two points of console access for PIN updates: Unit Clerk or IT



Get real-time centralized control over mobile computing deployments across multi-facility healthcare campuses.

**Dynamic Icon**

- Green/Yellow/Red
- Corresponds to Charge Remaining

**Time Remaining**

- Hours, Minutes
- No Load
- Charging

**Charge Remaining**

- 0-100%
- Color Coded to Match RUI

**Percent Load**

- 0-100%
- Color Coded to Show Preferred Load Range

**System Fault**

- No Fault
- Temperature High
- Not Connected

**Power Source**

- Line Mode
- Battery Mode
- Not Connected

**Battery**

- Good
- Replace
- Unknown

**System Metrics In Real Time**

- Time Remaining
- Charge Remaining
- Load
- Battery Voltage: 27.2 VDC
- Input Voltage: 122.7 VAC
- Charge Current: 8.0 DCA
- System Temperature: 81 °F
- Battery Cycles: 0
- System Status: Normal
- Power Source: Line
- Battery: Good

# Carts

No walls? No problem!



Cable shelf shown with optional Power Strip



4" (10,2 cm) locking casters


Part # (color)	Light Duty 24-190-057 (grey)	Very Heavy Duty 24-191-057 (grey)	Ultra Heavy Duty 24-192-057 (grey)
<b>Optional Accessories:</b> Camera Shelf Kit 97-491-057; 660/700/800 mm Kit 97-489; VESA CPU Kit 97-527-009			
Typical LCD Size	27-40"	37-55"	50-65"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>			
Weight Capacity	25-50 lbs (11,4-22,7 kg)	50-90 lbs (22,7-40,9 kg)	90-120 lbs (40,9-54,4 kg)
Lift	20" (51 cm)	20" (51 cm)	20" (51 cm)
Tilt	20°	20°	20°
Pan	—	—	—
Rotation	90° Portrait to landscape screen rotation. See website for details	90° Portrait to landscape screen rotation. See website for details	90° Portrait to landscape screen rotation. See website for details
VESA	MIS-D/E/F See website for details	MIS-D/F See website for details	MIS-D/F See website for details
Warranty	3 years	3 years	3 years



# Carts


Many configuration options!



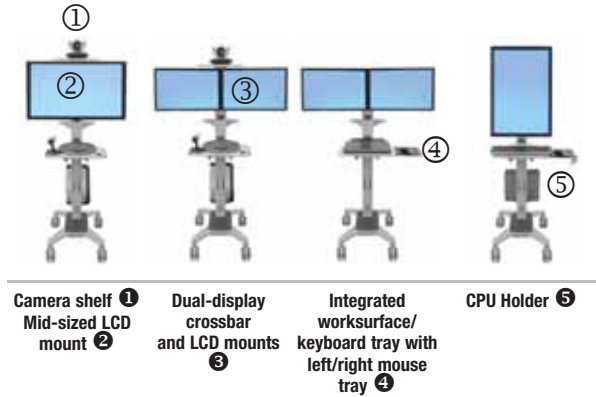

Suggested accessories:  
 NF Extended Worksurface 97-483-055  
 NF Basket and Handle Kit 97-488-055

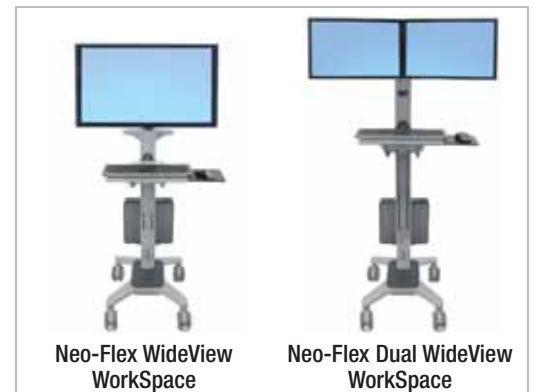

	 <b>Neo-Flex Mobile WorkSpace</b>	 <b>Neo-Flex Laptop Mobile WorkSpace</b>
<b>Part # (color)</b>	24-182-055 (two-tone grey)	24-186-055 (two-tone grey)
<b>Includes</b>	Integrated worksurface/keyboard tray with left/right mouse tray, scanner holder bracket, mouse holder, rear handle, cable storage box, four (4) dual casters (two locking), 5" (13 cm) lift monitor pivot, CPU holder	Integrated worksurface/keyboard tray with left/right mouse tray, scanner holder bracket, mouse holder, rear handle, cable storage box, four (4) dual casters (two locking), laptop security system
<b>Typical LCD Size</b>	LCD ≤ 22" Laptop 12–17" Keyboard ≤ 16.5 x 9" (42 x 22,8 cm)	Laptop 12–17"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>		
<b>Weight Capacity</b>	Total load of height-adjustment assembly 28 lbs (13 kg), includes contents of LCD pivot, worksurface and cable storage box. LCD capacity 5–18 lbs (2,3–8,1 kg); CPU Holder capacity 30 lbs (13,6 kg)	Total load of height-adjustment assembly 32 lbs (14,5 kg), includes contents of laptop worksurface, cable storage box
<b>Lift</b>	≤25" (63 cm) LCD/worksurface adjust 20" (51 cm) in tandem; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 25" (63 cm)	20" (51 cm)
<b>Tilt</b>	LCD 25°	—
<b>Pan</b>	—	—
<b>Rotation</b>	LCD 90° Portrait to landscape screen rotation	—
<b>VESA</b>	LCD MIS-D	—
<b>Warranty</b>	3 years	3 years



	 <b>Neo-Flex WideView WorkSpace</b>	 <b>Neo-Flex Dual WideView WorkSpace</b>
<b>Part # (color)</b>	24-189-055 (two-tone grey)	24-194-055 (two-tone grey)
<b>Optional Accessories: WideView Camera Shelf Kit 97-500-055 (grey)</b>		
<b>Typical LCD Size</b>	≤30"	two ≤ 22"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>		
<b>Weight Capacity</b>	LCD capacity 16–30 lbs (7,3–13,6 kg)	LCD capacity 6–14 lbs (2,7–6,4 kg) per mount, 12–28 lbs (5,4–12,7 kg) for both displays Maximum load on height-adjustment assembly 40 lbs (18 kg). Includes weight of display in addition to contents on Worksurface and in Cable Storage Box. Display weight capacity is diminished by 5 lbs (2,3 kg) plus weight of camera with Camera Shelf Kit.
<b>Lift</b>	20" (51 cm)	20" (51 cm)
<b>Tilt</b>	30°	Install dual displays at 3.5° or 8.5° upward angle for optimized viewing conditions. Dual displays are not tilt adjustable
<b>Pan</b>	—	—
<b>Rotation</b>	90°	90°
	Portrait to landscape screen rotation. Portrait orientation of display may not be compatible with Camera Shelf. Shelf maximum weight capacity 4 lbs (1,8 kg)	
<b>VESA</b>	MIS-D/E/F See website for details	MIS-D
<b>Warranty</b>	3 years	3 years

# Carts

## Mobile computing for anywhere you want to go



Suggested accessories:

- NF Cart Handle and Basket Kit 97-545 (grey)
- Universal CPU Holder 80-105-064 (dark grey)
- NF Cart Wire Basket Kit 97-544
- NF Cart Laptop Vertical Kit 97-546



Neo-Flex LCD Cart

Neo-Flex Laptop Cart

Part # (color)	24-206-214 (two-tone grey)	24-205-214 (two-tone grey)
<b>Includes</b>	LCD arm, Integrated worksurface/ keyboard tray with left/right mouse tray, scanner holder bracket, mouse holder, cable storage area, four dual casters (two locking), quick-release VESA-CPU mount	Integrated worksurface/keyboard tray with left/right mouse tray, scanner holder bracket, mouse holder, cable storage area, four dual casters (two locking), laptop security system
<b>Typical LCD Size</b>	≤ 22"	Notebook 13–17"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>		
<b>Weight Capacity</b>	≤ 26 lbs (11,8 kg)	Total maximum load on height-adjustment assembly 15 lbs (6,8 kg). Includes contents of laptop worksurface and cable storage area
<b>Lift</b>	≤ 27" (68 cm) LCD and worksurface adjust 20" (51 cm) in tandem; LCD Arm adjusts 7" (17,8 cm) independently; maximum LCD height adjustment 27" (68 cm)	≤ 20" (51 cm)
<b>Tilt</b>	+60°/-5°	—
<b>Pan</b>	180°	—
<b>Rotation</b>	360° Portrait to landscape screen rotation Portrait screen orientation may be incompatible with widescreen displays > 19"	—
<b>VESA</b>	MIS-D	—
<b>Warranty</b>	3 years	3 years

# Work Stations

## TeachWell: the mobile digital platform for 21st-century education



- ① The TeachWell® swiveling document camera tray is compatible with today's most popular portable document cameras. Tray can attach to one of four locations on the worksurface to accommodate specific camera models. Mountings holes for mechanically securing camera are provided (this feature only applies to certain makes/models). Contact Ergotron for detailed list of compatible models
- ② Open-Front Compartment: interior dimensions 17"W x 3.25"H x 13"D (43 x 8 x 33 cm)
- ③ Ergonomic negative-tilt keyboard tray ensures wrists remain in a neutral position during data entry. Includes concealed mouse tray that slides out on left or right
- ④ Durable, easy-to-clean exterior composed of aluminium, high-grade plastic and powder coated painted steel
- ⑤ Worksurface Dimensions: 23"W x 20"D (58 x 51 cm)
- ⑥ Four dual casters – lockable front casters  
Wheel-to-wheel base dimensions 17"W x 20.5"D (43 x 52 cm)

**Recommended accessories:**

- ⑦ TeachWell Locking Drawer 97-516-053  
Power Strip 83-066 (available in North America only)
- ⑧ Large Utility Shelf 97-540-053 (recommended for mounting projector)  
Power Strip Mounting Kit 60-590 (recommended for laptop version)



Explore TeachWell at <http://teachwell.ergotron.com>










Part # (color)	24-199-053 (white & grey)	24-203-053 (white & grey)
	Locking Drawer (optional) 97-516-053 (two-tone grey)	
Includes	Cart, laptop/tablet pivot, document camera tray and bracket, integrated worksurface, wrist rest, keyboard tray with left/right mouse tray, mouse holder, open-front compartment, rear handle, document bin, four dual casters (two locking)	Cart, LCD pivot, CPU Holder, Cable Winding Bracket, Power Strip mounting brackets, document camera tray and bracket, integrated worksurface, wrist rest, keyboard tray with left/right mouse tray, mouse holder, open-front compartment, rear handle, document bin, four dual casters (two locking)
Size	Laptop ≤ 19" <small>LAPTOP TRAY CAN ACCOMMODATE ALMOST ANY SIZE LAPTOP IN TERMS OF SCREEN SIZE OR CHASSIS DIMENSIONS. WEIGHT OF LAPTOP IS DETERMINING FACTOR FOR COMPATIBILITY. LAPTOP TRAY WEIGHT CAPACITY 3-10 lbs (1.4-4.5 kg)</small>	LCD ≤ 22" <small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>
Weight Capacity	Maximum load on height-adjustment assembly 40 lbs (16.8 kg). Includes weight of laptop/keyboard in addition to contents of worksurface, open-front compartment, document bin and camera tray	6-30 lbs (2.7-13.6 kg) CPU required. Maximum load on height-adjustment assembly 40 lbs (16.8 kg). Includes weight of LCD/keyboard in addition to contents of worksurface, open-front compartment, document bin and camera tray; when Locking Drawer is added total weight capacity decreases to 30 lbs (13.6 kg)
Lift	Keyboard/notebook/worksurface adjusts 20" (51 cm) in tandem. Notebook screen adjusts 5" (13 cm) independently; maximum screen height adjustment 25" (63 cm)	Keyboard/LCD/worksurface adjusts 20" (51 cm) in tandem. LCD screen adjusts 5" (13 cm) independently; maximum screen height adjustment 25" (63 cm)
Tilt	—	—
Pan	180°	30°
Rotation	—	360° Portrait to landscape screen rotation
VESA	—	MIS-D
Warranty	5 years	5 years



# Work Stations

Sit-stand on-demand  
WorkFit: the platform  
for balance



	WorkFit C-Mod, LCD LD	WorkFit C-Mod, LCD HD	WorkFit C-Mod, Dual	WorkFit C-Mod, Combo
<b>Part # (color)</b>	Light Duty 24-198-055 (two-tone grey)	Heavy Duty 24-197-055 (two-tone grey)	24-196-055 (two-tone grey)	24-195-055 (two-tone grey)
 <b>Typical LCD Size</b>	≤ 22"	≤ 30"	≤ 22"	≤ 20"
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>				
 <b>Weight Capacity</b>	LCD Pivot capacity 5–18 lbs (2,3–8,1 kg)	LCD Pivot capacity 16–30 lbs (7,3–13,6 kg)	LCD capacity 12–28 lbs (5,45–12,7 kg) total. Monitors must be equal in weight or +/-1 pound (.45 kg)	Laptop 6–10 lbs (2,7–4,5 kg) Monitor 6–16 lbs (2,7–7,2 kg)
Maximum load on height-adjustment assembly 37 lbs (16,8 kg). Includes weight of display in addition to contents on Worksurface and in Cable Storage Box				
 <b>Lift</b>	25" (63 cm)	25" (63 cm)	25" (63 cm)	25" (63 cm)
 <b>Tilt</b>	25°	30°	—	30°
 <b>Pan</b>	—	—	—	—
 <b>Rotation</b>	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation
 <b>VESA</b>	MIS-D	MIS-D/E/F	MIS-D	MIS-D
<b>Warranty</b>	5 years	5 years	5 years	5 years




# Mobile WorkStand Cart

## Mobile WorkStand

Configure a mobile mounting solution that works for you

No matter how demanding the mobile computing application, or what type of computing equipment you need to mobilize, Ergotron has a computer cart to get the job done. The Mobile WorkStand integrates technology and convenience, allowing the user to move a computer system from room to room. It quickly adjusts to a sitting or standing user height, providing an ergonomically-correct work environment at all times.

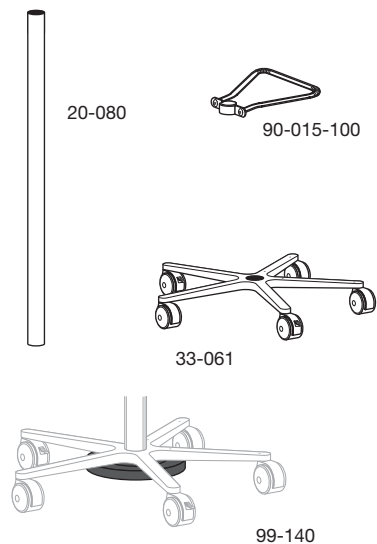

### Configure Your Own Mobile WorkStand

Start with the basic components below. Then add peripherals and components from selections on the next page. Finally, choose arms/pivots to mount your monitor, keyboard and/or laptop: Ergotron's LX, 400 and 200 Series mounting solutions are all compatible with Mobile WorkStand.

Part Number	Description	Dimensions H x W x D	Shipping Weight
20-080, chrome	2" Round Pole	48" x 2" x 2" (1270 x 51 x 51 mm)	7 lbs (3.2 kg)
33-061, black	Base & Casters	7" x 27" x 27" (178 x 686 x 686 mm)	13 lbs (5.9 kg)
90-015-100, chrome	Handle	1" x 9-1/4" x 11" (25 x 235 x 279 mm)	2 lbs (.9 kg)
99-140*, black	Stabilizer Weight 25 lbs (11.4 kg)	1" x 11-1/4" x 11-1/4" (25 x 286 x 286 mm)	26 lbs (11.8 kg)

Mobile WorkStand with LX Laptop Arm - pole mount brackets allow easy attachment of many Ergotron mounts, placed at any point along the pole



Mobile WorkStand with 400 Series LCD and Keyboard Arms offer vertical adjustment range of 22"-24" (56-61 cm) for sit-to-stand flexibility



Ergotron's Universal CPU Holder attaches to the base and accommodates a wide range of CPU/UPS sizes


# Mobile WorkStand Cart

## Optional Peripherals & Components for Mobile WorkStand

Order these options to complete your cart to your exact specifications. CPU Holders and the Wire Storage Basket can be mounted to the backs of the monitor or keyboard brackets or a separately ordered Pole Mount Bracket is required.



50-180-180



97-468-200




99-068-100


Part Number	Description	Dimensions H x W x D	Shipping Weight
50-180-180, grey	Base Tray w/ Mounting Straps	1" x 14" x 12" (25 x 356 x 305 mm)	10 lbs (4.5 kg)
97-468-200, black	Vertical Universal CPU Holder	6-1/2" x 10" x 3-3/8-7-5/8" (165 x 254 x 86-194 mm)	10 lbs (4.5 kg)
99-068-100**, grey	Wire Storage Basket	6-1/8" x 13-1/8" x 4-1/8" (156 x 333 x 105 mm)	3 lbs (1.4 kg)
60-144-003	Pole Mount Bracket for CPU Holders & Wire Storage Basket		1 lbs (.5 kg)
80-102-064, dark grey	Universal CPU Holder	50 lbs (22.7 kg) Weight capacity	2 lbs (.9 kg)

\* Recommended for system stability.

\*\* Requires separately ordered Pole Mount Bracket. May be mounted to Bracket shared by another component.




60-131-003



60-144-003



60-199-003



97-094-099

Number	Description	Mounts	Weight
60-131-003, aluminum	Pole Mount Brackets (2 Brackets)	Mounts LX, 400, 200 Series and 400 Combo	2 lbs (.9 kg)
60-144-003, aluminum	Pole Mount Bracket (1 Bracket)	Mounts CPU Holders and Wire Storage Basket	1 lbs (.5 kg)
60-199-003**, aluminum	Split Pole Bracket (1 Bracket)	Mounts LX, 400 & 200 Series, 400 Combo, CPU Holders and Storage Basket For use with Pole having no open end – facilitates mounting after Mounting Solutions are in place	2 lbs (.9 kg)
97-094-099, grey	Pole Bracket Kit (1 bracket, 1 plate)	Mounts 100 Series to 2" Pole	2 lbs (.9 kg)

\* Refer to the peripheral's description to see whether Bracket is necessary.

\*\* LX, 400, 200 Series, and 400 Combo require two Brackets for installation.

Note: Brackets provide attachment holes on two sides. This allows an additional Arm or peripheral to be mounted on the opposite side.

# Wall Track

## Wall Track



Wall Track provides a common interface for mounting multiple Ergotron components. When mounting components to Wall Track, you must order the appropriate Track Mount Bracket Kits.

- 31-016-182 silver** 10" High x 5" wide Wall Track  
Shipping Weight: 2 lbs (.9 kg)
- 31-017-182 silver** 26" High x 5" wide Wall Track  
Shipping Weight: 4 lbs (1.8 kg)
- 31-018-182 silver** 34" High x 5" wide Wall Track  
Shipping Weight: 7 lbs (3.2 kg)
- 31-039-182 silver** 42" High x 5" wide Wall Track  
(Available North America, EMEA)  
Shipping Weight: 8 lbs (3.6 kg)



31-016-182




31-017-182



31-018-182

## Wall Track Hole Pattern

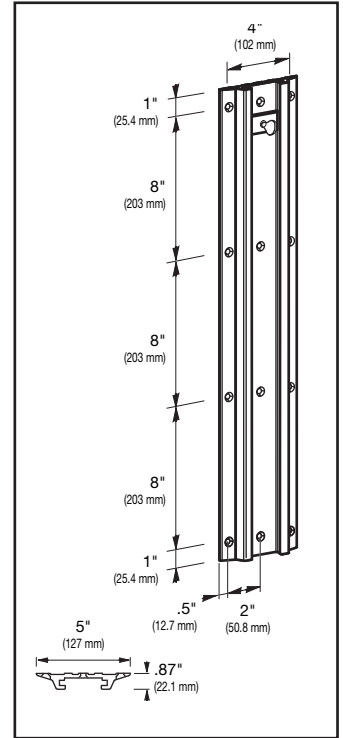

## Wall Track Mounting Kits

Choose a Wall Track Mounting Kit appropriate for the type of wall construction - Sheet Metal/Wood Studs or Hollow Walls.\*

### Wall Track Mounting Fastener Kit - For Metal or Wood Wall Studs.

**97-531** (Available North America)

Consists of (6) Phillips oval head CR, ST6.3 x 2.5 - 50 mm (2") screws and (6) Phillips oval head self tapping CR, ST6.3 x 1.8 - 50 mm (2") screws

Shipping Weight: 1 lbs (.5 kg)

\* Check with local building code to ensure Kit is compatible with structure and applied load. Earthquake zone approved brackets (OSHPD) are available.

### Wall Track Mounting Kit for Hollow Walls

**90-011** (Available North America, EMEA)

Consists of 10 Phillips 1/4"-20 x 1.5 Lag Screws/Toggle Anchors

Shipping Weight: 1 lbs (.5 kg)

## Track Mounting Bracket Kits

Choose a Track Mounting Kit by product and Wall Track orientation (vertical or horizontal)

### Track Mount Bracket Kit

**97-091 aluminum**

Mounts LX Arms, Neo-Flex HD Wall Mounts, 400, 200 and 100 Series Arms and Pivots, and Universal CPU Holder

Shipping Weight: 1 lbs (.5 kg)




### Vertical Track Mount Bracket Kit\*

**60-151-099 grey** (Available North America, EMEA)

Mounts StyleView HD Arms

Shipping Weight: 1 lbs (.5 kg)

\*Kit provided with StyleView HD Combo Arm (45-215-XXX) and StyleView HD Combo System (45-216-XXX).




### Peripheral Track Mount Bracket Kit

**60-156 zinc**


Mounts Vertical Universal CPU Holders and Small CPU Holders

Shipping Weight: 1 lbs (.5 kg)




# Wall Track Component Configurations

## Wall Track Mount Bracket Examples




97-091

Mounts for LCD's keyboards and laptops (except HD Arms)



HD Arms

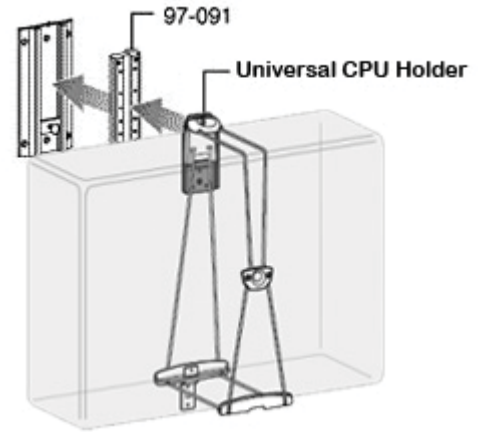

97-091

Universal CPU Holder

## Wall Plates

### Wall Mount Plate

Extra support for Ergotron Mounting Systems

Wall Plate 97-101-003 (aluminum)  
Use with 100 or 200 Series, LX Arms or CPU Holders to add extra support



Shipping Weight: 1 lbs (.5 kg)

\* Does not include fasteners for attaching to vertical surface. Customer supplied.

### Wall Mount Bracket

Extra support for HD Arm

60-152-100\* grey





The Wall Mount Bracket provides better support for HD Arm\*\* by spreading weight over a larger area.

Shipping Weight: 1 lbs (.5 kg)

\* Does not include fasteners for attaching to vertical surface. Customer supplied.


\*\* 60-152-100 does not support HD Extender.

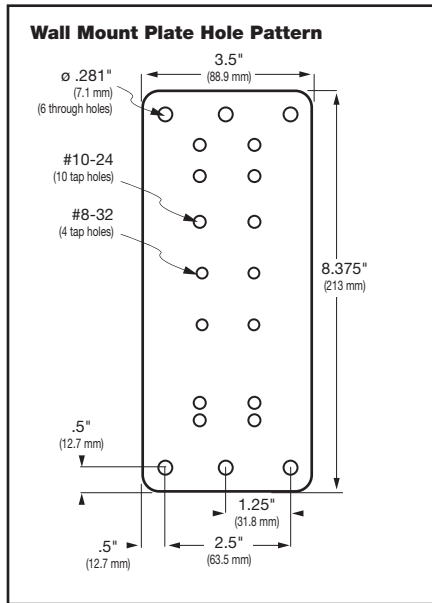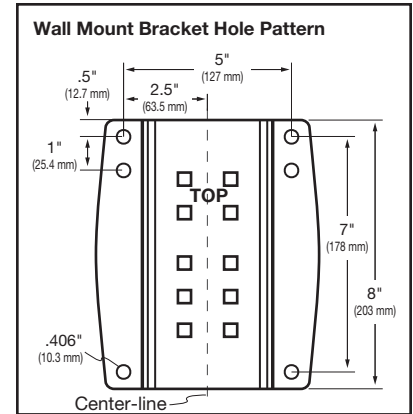

### External Wall Track Kit for OSHPD

California Office of Statewide Health Planning And Development

This bracket must be ordered for use with wall track in any configuration where OSHPD compliance is required. Specific guidelines for wall type and allowable mounting solutions apply. Contact Ergotron Customer Care for full details.

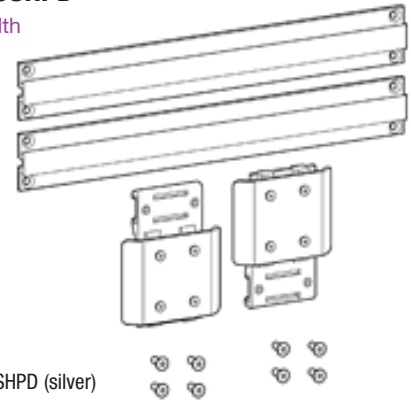

Part Number: 97-523-202

Description: External Wall Track Kit for OSHPD (silver)

Includes brackets for spanning 16" studs, hardware fasteners for mounting spanning brackets to the wall  
OPA Pre-Approval number 2339-07

Approved products that can mount to an Ergotron Wall Track (excluding 10" Wall Track) installed on this External Mount include: StyleView HD Combo Arms (with or without extension), 200 Combo Arms, LX Wall Mount System, MX Wall Mount, 200 Arms, NF Swing Arm and NF Pivot. Contact Ergotron for a complete list of compatible products

Metal/woods studs must be 16" on center

These Office of Statewide Health Planning and Development (OSHPD) OPA Pre-Approved numbers are also compliant with the Japan Acceptance Criteria AC-156. AC-156 is the standard test for certification for international earthquake resistance as developed by the International Code Council

Shipping Weight: 19" x 8.5" x 3.25" (48.3 x 21.6 x 8.3 cm)

Shipping Weight: 4 lbs (1.8 kg)


### Steel Stud Wall Mounting Kit

Extra support for Ergotron Mounting Systems

60-591-003 (Available North America, EMEA)

Fastener kit and wall plate that securely attaches Ergotron wall mounts to steel-stud constructed walls.

Compatible Ergotron Mounts: Neo-Flex HD Wall Mounts, LX Wall Mount Arms, 100 Series Pivots, 200 Series Wall Mounts, 400 Series Wall Mount Arms



Shipping Weight: 2.2 lbs (1 kg)

# Command Post - Components

## Command Post

20-076-100 grey

Command Post gives you the flexibility to mount one or more computer systems to a floor or ceiling using little or no floor space\*. Constructed from heavy-duty 11-gauge steel for long-lasting durability.

Dimensions: 80" high x 3" wide x 3" deep (2032 x 76 x 76 mm)

Shipping Weight: 32 lbs (14.5 kg)

\* To mount to horizontal surface, order Command Post Base, 60-360-100 separately.




## 3" x 3" Post Mounting Solutions Bracket

60-154-100 grey

Mounts HD Arm\* to 3"x3" Command Post

Shipping Weight: 1 lbs (.5 kg)


\* 60-154-100 does not support HD Extender.



## 3" x 3" Post Bracket

60-366-100 grey


Mounts 200, 400 Series Arms, LX Arm, Universal CPU, HD and Neo-Flex products to 3"x3" Command Post



## 3" x 3" Post Peripheral Bracket

60-158-100 grey

Mounts CPU Holder products to 3"x3" Command Post





## Base

60-360-100 grey

Attaches command post to horizontal surface.\*

Shipping Weight: 1 lbs (.5 kg)

\* If mounting base to concrete surface, the hardware kit for concrete, 90-018-100 should be ordered, see below.

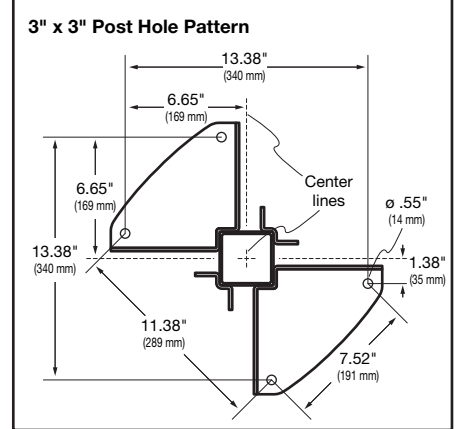


## Hardware Kit for Concrete

90-018 grey

The Kit contains 4 stud anchors for attaching the command post base, 60-360-100, to a concrete surface.

Shipping Weight: 1 lbs (.5 kg)

# Command Post Configuration Examples

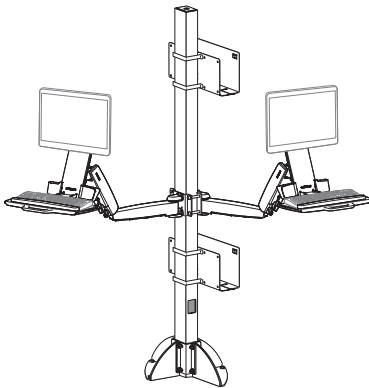


Ceiling Mount



Floor Mount

Example System 2: Order these components

- (2) 45-215-216, white, StyleView HD Combo Arms
  - (2) 45-219-216, White, 18" (46 cm), SV HD Extenders
  - 20-076-100, grey, 80" x 3" x 3" (2030 x 75 x 75 mm) Post
  - 60-360-100, grey, 7" x 17" x 17" (178 x 432 x 432 mm) base
  - 90-018, hardware kit for concrete surface attachment
  - 60-154-100, grey, HD Arm Post Bracket (allows for single or dual back-to-back mounting)
  - (2) 97-468-200, Vertical Universal CPU Holders
  - (2) 60-158-100, grey, CPU Holder Brackets
- Wrist rests, mouse holders, mouse pads are also available

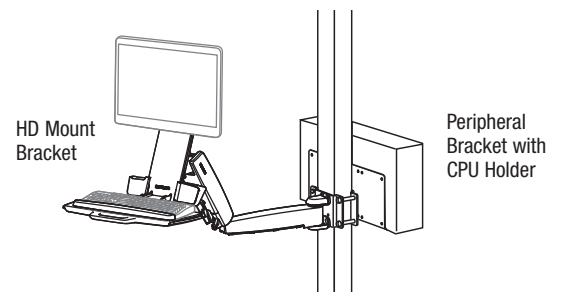

## 2" Diameter Pole Components

### 2" Round Pole, 50" long

20-080-100 chrome

Use in conjunction with appropriate Bracket for mounting Ergotron LX, 200, 400 Series, Extenders, CPU Holders, Wire Storage Basket.

Dimensions: 2" diameter, 50" (127 cm) Long

Shipping Weight: 7 lbs (3.2 kg)




### Pole-Mount Brackets

60-131-003 aluminum

Two Brackets for mounting LX, 200, 400 Series, Extenders, on vertical 2" Round Pole

Shipping Weight: 2 lbs (.9 kg)




### Pole-Mount Bracket

60-144-003 aluminum

Use this single bracket to mount CPU Holders, Wire Storage Basket on vertical 2" Round Pole

Shipping Weight: 2 lbs (.9 kg)




### Split Pole-Mount Bracket

60-199-003 aluminum

Split Pole-Mount Bracket (1 Bracket) - use with Pole having no open end to mount LX, 200, 400 Series, Extenders, CPU Holders, and Wire Storage Basket on vertical 2" Round Pole

Shipping Weight: 2 lbs (.9 kg)




### Pole-Mount Bracket Kit

97-094-099 grey

Pole-Mount Bracket Kit (1 Bracket, 1 Plate) - use on 2" Pole to mount 100 Series pivots.

Shipping Weight: 2 lbs (.9 kg)



## 1½" Diameter Pole Components

### 1½" Round Pole, 28" long

20-137-200 black

Mount Pole to worksurface using Grommet Mount Base, 60-350-00

Dimensions: 1½" diameter, 28" (71 cm) Long

Shipping Weight: 5 lbs (2.3 kg)



### Grommet Mount Base

60-350-200 black

Grommet Mount Base for 1½" Round Pole attaches to worksurface through holes 3/8" to 3" (10 to 76 mm) wide, up to ≤ 4" (102 mm) thick

Shipping Weight: 5 lbs (2.3 kg)




### Split Pole-Mount Bracket

60-423-003 aluminum

Split Pole-Mount Bracket (1 Bracket) - use to mount LX, 200, 400 Series, Extenders, CPU Holders, and Wire Storage Basket on vertical 1½" Round Pole\*

Shipping Weight: 2 lbs (.9 kg)

\* Order two Brackets for LX, 200, 400 Series and Extenders installation.





### Large Clamp


60-420-200 aluminum

Large Clamp features adjustment lever for easy height repositioning. Applications: LX, 200 Series on 1½" Round Pole

Shipping Weight: 3 lbs (1.4 kg)



200 Series mount with Large Clamp




1½" Pole mounted to slatwall with Large Clamp

# Slatwall Components

## Slatwall Brackets

Attach LX, MX, 200 and 100 Series Mounting Solutions to slatwall\*. Order according to slatwall manufacturers. Standard color is black.



### Slatwall Bracket

60-274-009\* black

60-271-009\*\* black


(not available in EMEA)

Shipping Weight: 2 lbs (.9 kg)

\* LaCOUR, Wall Street Trading, Wright Line

\*\* Woodtronics, Knoll, Infra-structure, Evans, Eurocraft, Teknion, Steelcase, EDP, CBA, Kimball, Innovant

## Sample Configurations

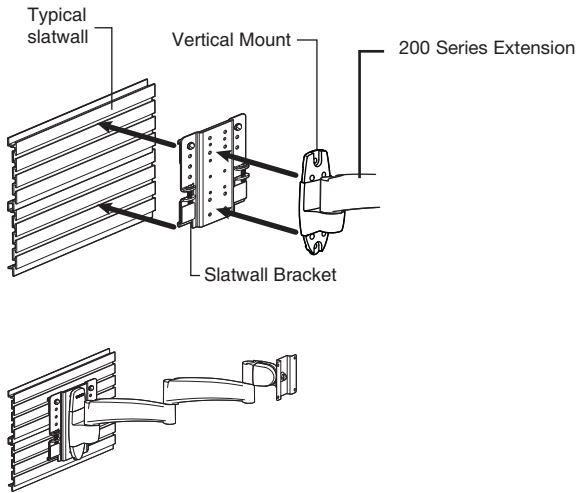


LX Wall Mount Arm



# Keyboard Trays, Laptop Trays & Accessories

Use the Keyboard/Mouse Tray in conjunction with 400 and 100 Series Keyboard Mounts. Use the Laptop Tray with any LCD arm or pivot with a 75 x 75 mm mounting hole pattern.



50-193-200



85-025-079



97-469



99-033-064 dark grey



75-038  
Keyboard  
Holder


77-026-098  
Keyboard Tray  
with Slide-out  
Mouse Tray



**LX Extension**  
45-244-026 (polished aluminum)  
Add a second extension  
to your LX Arm and  
increase its reach by 9"  
(23 cm). Only one additional  
extension is allowed per  
configuration. Extension cannot be  
added to Dual Desk Mount Arms  
(45-245-026,  
45-248-026)

Part Number	Description	Dimensions W x D x H	Shipping Weight
<b>Keyboard/Mouse Trays</b>			
77-050-180, grey 77-050-200, black	Keyboard Tray w/ Sliding Mouse Tray and Wrist Rest Holder	17-1/2" x 9 to 12" x 2-1/2" (445 x 229 to 305 x 64 mm)	7 lbs (3.2 kg)
<b>Laptop Trays</b>			
50-193-200, black	LX Laptop Tray	(see below)	3 lbs (1.4 kg)
<b>Wrist Rests &amp; Mouse Accessories</b>			
97-469, grey	Foam Wrist Rest		1 lbs (.5 kg)
85-025-079, blue/white	Mouse Pad		1 lbs (.5 kg)
99-033-064, dark grey	Mouse Holder		1 lbs (.5 kg)
<b>Keyboard Holder, Articulating Mechanism</b>			
75-038, black	Keyboard Tray, 360° rotating, with lever, tiltable		
77-026-098, black	Keyboard Tray w/Slide-out Mouse Tray for Articulating Keyboard Holder (75-038)		

## 50-193-200 Notebook Tray Dimensions

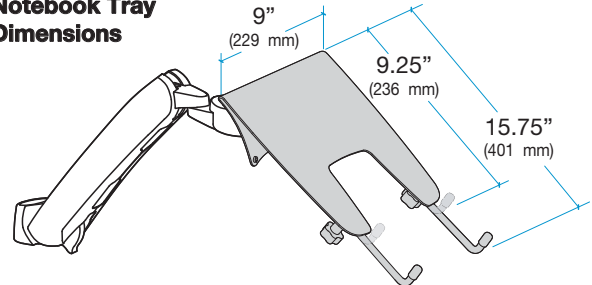



# Accessories

## Cart Accessories

These optional accessories, including lockable medication drawers and utility shelf, are engineered to increase productivity and reduce errors.

**SV** = StyleView

**NF1** = Neo-Flex Mobile WorkSpace

**NF2** = Neo-Flex Mobile MediaCenter

**NF3** = Neo-Flex WideView




SV21/SV22/NF1/NF2

**Mouse Holder**  
99-033-064 dark grey



SV21/SV22/NF1/NF2

**Locking Drawers**  
68-124-201



**Power Strip Mounting Kit for Ergotron Carts**  
60-590 clear zinc coated steel  
SV/NF1/NF2/NF3



SV21/SV22/NF1/NF2/NF3

**T-Slot Bracket**  
60-575-003




**NF Extended Worksurface**  
97-483-055 NF1/NF3




SV

**LX Laptop Tray with Pivot Extension** 28-510-200



**T-Slot Bracket Kit**  
60-587-207 aluminum  
NF1/NF2/NF3



**Security Kit for Lithium Battery** for blue SV Carts  
60-558-064



**StyleView Power System Batteries**

**SV21 Replacement Battery**  
55 Amp Hour, 12 Volt, Sealed Lead Acid with connection harness  
99-163-00

**SV22 Replacement Battery Kit**  
55 Amp Hour, 12 Volt, Sealed Lead Acid (available through Batteries Plus®) 99-166

**SV32 Replacement Battery, 33 Ah**  
Sealed lead-acid 33 Ah battery replaces batteries in StyleView 32-series 66 Ah Powered Carts. Batteries must be purchased and replaced in pairs (available through Batteries Plus®) 97-479



SV31/SV32

**CPU Holder for SV31/32**  
97-480-003



NF1

**NF MWS Laptop Security Bracket** 97-465-057



**NF Storage Basket**  
97-488-055 NF1/NF3



SV32

**Autolock Drawer** 97-462-053



**MMC 660/800 mm Kit**  
97-489 NF2



**MMC Camera Shelf Kit**  
97-491-057 NF2



**WideView Camera Shelf Kit**  
97-500-055 NF3



**Large Utility Shelf (grey)**  
97-540-053

This secure and sturdy shelf supports projectors, printers and other small peripherals. Compatible with TeachWell, WorkFit-C, StyleView 32-Series Carts and Neo-Flex Mobile Workspaces. Also attaches to vertical surfaces using Ergotron Wall Track or Wall Plate.

# Accessories



**Power Strip 83-066**  
15" cord, 15 amp, six outlets (non-medical grade) Available North America



**Coiled Extension Cord Accessory Kit 97-464**  
(Available North America)



**Medical-Grade Power Strip 97-466-214**  
(Available North America)



97-563-057

## Power Strip

Part Number	Description	Dimensions L x W x D	Shipping Weight
83-066	Power Strip, 6 outlets, 15' Cord, 15 amp non-medical grade	13.5" x 2" x 2" (34 x 5 x 5 cm); cord = 15' (4.5 m)	1 lbs (.5 kg)

## Organize and route excess cables easily with Cable Channel

Part Number	Description	Dimensions L x W x D	Shipping Weight
97-563-057, grey*	Cable Management Kit, grey	11.25" x 1.75" x .75" (286 x 44 x 19 mm)	0.5 lbs (0.2 kg)

\*Includes one (1) piece of 30" (76 cm) cable wrap, two (2) pieces of 11" (28 cm) cable management channel, two (2) adhesive strips, four (4), mounting screws, and four (4) hollow wall anchors.

## The Wire Storage Basket adds extra storage to a configuration.



99-068-100

Part Number	Description	Dimensions H x W x D	Shipping Weight
99-068-100, grey*	Wire Storage Basket	6-1/8" x 13-1/8" x 4-1/8" (156 x 333 x 105 mm)	3 lbs (1.4 kg)

\* Compatible with Wall Track and 2" Pole. To attach to Wall Track, Bracket 97-091 is required.

# CPU Holders



**Universal CPU Holder 80-102-064 dark grey**

CPU Holders: attach directly to wall, or use with Wall Track (requires 97-091) or Wall Plate



**Vertical Universal CPU Holder 97-468-202 (silver)**

Attach directly to wall, or use with Wall Track (requires 60-156) or Wall Plate. Size range: 2-8" (5-20 cm) wide; includes plastic spacer to accommodate most small form factor and ultra small form factor CPUs



**Vertical Small CPU Holder 80-063-200 (black)**

Attach directly to wall, or use with Wall Track (requires 60-156) or Wall Plate (Available N. America, EMEA). Size range: 1-3/8" to 3-3/4" (3,5-9,5 cm) wide; accommodates most small form factor and ultra small form factor CPUs

## CPU Holders

Part Number	Description	Weight Capacity	Shipping Weight
80-102-064*, dark grey	Universal CPU Holder	50 lbs (22.7 kg)	2 lbs (.9 kg)
97-468-200, black	Vertical Universal CPU Holder		
80-063-200, black	Small CPU Holder		


\*Mounting Options: Directly to wall; under a desk; to Ergotron Wall Track (interface bracket required, 97-091); to Ergotron Command Post (interface bracket required, 60-366); to 2" round pole (interface bracket required, 60-131-003); on Ergotron Mobile WorkStand Cart (interface bracket required, 60-131-003); on Ergotron StyleView Cart; on Ergotron LX Large Display Cart. Maximum CPU Dimensions: 18" x 8.5" (457 x 216 mm). Minimum CPU Dimensions: 12" x 3" (305 x 76 mm)

Note: To attach to Wall Track, Bracket 60-156 is required. To attach to Command Post, order Bracket 60-158-100. Also mounts directly to surface: fasteners supplied by user when direct mounting.

## Display Interface Accessories



60-589-060,  
Quick Release  
LCD Bracket



97-474,  
VESA Adaptor Kit  
100 x 200, 200 x 200,  
400 x 200 mm  
clear zinc  
coated steel



97-435-009,  
Display Security  
Bracket

Part Number	Description	Application	Shipping Weight
60-254-007, black	75 x 75 mm to 100 x 100 mm Conversion Plate Kit	Mounts 100 x 100 mm monitor to Ergotron mount with 75 x 75 mm interface	1 lbs (.5 kg)
60-487	600 x 200 mm Adapter Plate Kit	Attaches Ergotron mounts with 100 x 100 mm interface to monitors with 600 x 200 mm VESA MIS-F mounting hole pattern	2 lbs (.9 kg)
97-435-009	VESA Adaptor Security Bracket	Works with Kensington security product to secure LCD to mounting solution.	3 oz (85 g)
60-589-060	Quick Release LCD Bracket	Allows for quick removal and connection of displays to an Ergotron arm, stand or wall mount	
97-474	VESA Adaptor Kit clear zinc coated steel	Mounts 100 x 200, 200 x 200, 400 x 200 mm monitor to Ergotron mount with 100 x 100 mm interface	
97-501	Spacer Kit for Mounting to VESA Recess Monitors	Mounts to 75 x 75mm VESA Recess Monitors Includes: (1) spacer and (4) Phillips pan head M4 x 25 mm screws	0.13 lbs (0.06 kg)

\* 800 x 400 mm Adapter Plate will increase distance from the wall to the back of the display by 1-3/8" (35 mm).

Note: Fasteners to attach VESA FDMI compliant monitors and most Ergotron adapter interfaces are provided. However, user may need to supply own fasteners for some applications.

## Interface Brackets for Motion Computing Tablet PCs



Interface Bracket for  
Motion Computing C5  
Tablet PC  
**60-588-200**



## Tablet PC Interfaces for Motion Computing

Part Number	Description	Application	Shipping Weight
60-588-200, black*	Motion Computing Interface Bracket for C5	see below	1.4 lbs (.6 kg)

\* Includes interface bracket only. Tablet PC or FlexDock not included.

Part Number: 60-588-200

Description: Interface Bracket for Motion Computing C5 Tablet PC (black)

Includes: Bracket, mounting hardware, manual

Ergotron mount and Motion Computing C5 not included

Compatible with any LCD mount that uses a VESA MIS-D (75 x 75 mm) mounting hole pattern

The C5's docking station includes a 75 x 75 mm interface—where a mount's backward tilt is sufficient, the C5 can attach directly to any Ergotron mount with a VESA MIS-D interface

It is the perfect add-on to any StyleView or Neo-Flex Mobile WorkSpace Cart—dock the tablet at the rear of the cart while using an external LCD and keyboard. Also works well with FX30 and VL.

Shipping Dimensions: 6" x 6" x 4" (152 x 152 x 104 mm)

Shipping Weight: 1.4 lbs (.6 kg)

Warranty: Five (5) years

# Find your ergonomic zone

The ergonomic equation for comfortable, healthier and more productive computing begins with you, your computer and the mount you choose. The right mount will give you the maximum amount of flexibility to get into the right ergonomic zone. Once you are there, the use of these basic elements – Posture + Movement + Rest – aids mind and body balance while you are there.

## What do you need to do?



Learn more about Ergotron's Ergonomic Equation and all the tools that will help you reach the zone, including:

- Top 10 tips and The Ergonomic Equation
- Workspace Planner tool
- Payback Calculator for an ergonomic workspace
- Comfortable computing white papers

## Laptop ergonomics

If computing for longer than an hour or two, take the following steps for ergonomic wellness: elevate your laptop so you can see the screen without bending your neck; connect a separate keyboard and place it where wrists are flat while shoulders and elbows are relaxed; pay attention to your posture. For a quick solution, check out our Neo-Flex Laptop Lift Stand.



## 1 Posture

Arrange computer display, keyboard & chair to support body's neutral posture

RESULT? Less structural strain, lower energy spend & reduced fatigue

## 2 Movement

Incorporate movement into computer routine

RESULT? Prevents static loading & fatigue which leads to computer related disorders; improves circulation



## 3 Rest

Take frequent breaks for rest & recoup time

RESULT? Body rejuvenates from any negative effects of faulty posture or static loading



**Industry compliant**  
Ergotron video display mounts are compliant with mounting interface standards set by the Video Electronics Standards Association (VESA).

### Display Compatibility Guide

VESA	LCD Size	LCD Weight	Hole Mounts
MIS-B	4–7.9" 10,2–20,1 cm	≤ 4.4 lbs ≤ 2 kg	50 x 20 mm
MIS-C	8–11.9" 20,3–30,2 cm	≤ 10 lbs ≤ 4,5 kg	75 x 35 mm
MIS-D	12–22.9" 30,5–58,3 cm	≤ 30.8 lbs ≤ 14 kg	75 x 75 mm 100 x 100 mm
MIS-E	23–30.9" 58,4–78,6 cm	≤ 50 lbs ≤ 22,7 kg	200 x 100 mm
MIS-F	≤ 31" ≤ 78,7 cm	N/A	200 mm increments

**LCD Size** in all charts is approximation only. Use **LCD Weight** as guide for choosing mounting solution; exact capacity depends on thickness of display. **Hole Mounts** are width x height. Compatibility is predicated on the assumption that displays are VESA compliant (hole mount is centered on display's center of gravity.)

# Ergonomics Data & Mounting Heights

## Ergonomic Ground Rules – English Units

To obtain optimum performance from a workstation, consider the following topics during installation of your Flat Panel Mounting Solutions:

- The adjustment range of the Mounting Solutions product.
- The use-mode of the Mounting Solutions product...
  - > Monitoring/viewing only?
  - > Data entry?
  - > User will be sitting?
  - > User will be standing?
  - > User will be sitting *and* standing at different times?
- Vertical mounting height of the Mounting Solutions product in respect to user(s)...
  - > Female or male only?
  - > Female and male both?
  - > Average height of users?

Using the Eye-Height / Elbow-Height Tables:

Use these tables to help determine mounting heights of Mounting Solutions products.

Follow these Ergonomic Ground Rules during installation of Mounting Solutions products:


- Screen Height: Top of screen should be level with, or slightly below, Eye Height of user.
- Keyboard Height: Center-line of keyboard should be level with Elbow Height of the operator with forearms and wrists in a level position.
- Screen/Keyboard Height Variance: The distance from top of monitor screen to center-line of keyboard reflects Eye-to-Elbow Measurement of the average female to male users.

Remember that the actual attachment-point height of Mounting Solutions products varies because:

- Dimensions of monitors vary.
- Configurations of Mounting Solution products vary.


### Eye-Height / Elbow-Height Tables

For average range of users – anthropometric<sup>†</sup> data expressed in inches

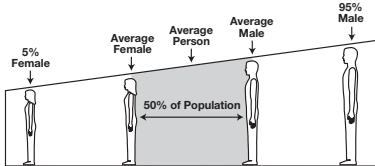

1	Eye Height 4			Elbow Height 4			Eye-to-Elbow Measurement	
	Stand	Sit	Var.	Stand	Sit	Var.	Stand	Sit
Av. Female	59.4	44.0	15.4	38.8	23.0	15.8	20.6	21.0
Av. Person	61.7	46.1	15.6	40.4	24.9	15.5	21.3	21.2
Av. Male	64.4	48.5	15.9	42.5	27.0	15.5	21.9	21.5
Variance F/M	5.0	4.5	—	3.7	4.0	—	—	—

For 5% female to 95% male range of users

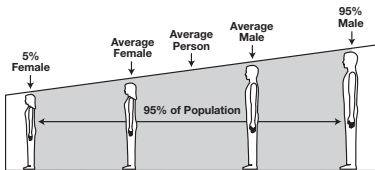

	Stand	Sit	Var.	Stand	Sit	Var.	Stand	Sit
5% Female*	55.7	40.8	14.9	36.5	20.8	15.7	19.2	20.0
95% Male**	68.6	52.1	16.5	45.4	29.5	15.9	23.2	22.6
Variance F/M	12.9	11.3	—	8.9	8.7	—	—	—

<sup>†</sup> Anthropometry: The study of human body measurements. Data based on studies of US population.

\* Denotes the female who is at the 5% mark of a scale ranging 0% to 100%.

\*\* Denotes the male who is at the 95% mark of a scale ranging 0% to 100%.

1 Fixed-height applications: Mount at height for average person.  
Height-adjustable applications...

2 Sitting *or* standing for average range of users: ≥ 5" vertical adjustment range required.

3 Sitting *or* standing for 95% range of users: ≥ 12.9" vertical adjustment range required.

4 Sitting *&* standing for average range of users: ≥ 19.5" vertical adjustment range required.  
Keyboard placement...

5 Keyboard to monitor relationship: The optimal distance is 21" in all applications.

# Ergonomics Data & Mounting Heights

## Ergonomic Ground Rules – Metric Units

To obtain optimum performance from a workstation, consider the following topics during installation of your Flat Panel Mounting Solutions:

- The adjustment range of the Mounting Solutions product.
- The use-mode of the Mounting Solutions product...
  - > Monitoring/viewing only?
  - > Data entry?
  - > User will be sitting?
  - > User will be standing?
  - > User will be sitting *and* standing at different times?
- Vertical mounting height of the Mounting Solutions product in respect to user(s)...
  - > Female or male only?
  - > Female and male both?
  - > Average height of users?

Using the Eye-Height / Elbow-Height Tables:

Use these tables to help determine mounting heights of Mounting Solutions products.

Follow these Ergonomic Ground Rules during installation of Mounting Solutions products:


- Screen Height: Top of screen should be level with, or slightly below, *Eye Height* of user.
- Keyboard Height: Center-line of keyboard should be level with *Elbow Height* of the operator with forearms and wrists in a level position.
- Screen/Keyboard Height Variance: The distance from top of monitor screen to center-line of keyboard reflects *Eye-to-Elbow Measurement* of the average female to male users.

Remember that the actual attachment-point height of Mounting Solutions products varies because:

- Dimensions of monitors vary.
- Configurations of Mounting Solution products vary.

### Eye-Height / Elbow-Height Tables


For average range of users – anthropometric† data expressed in millimeters

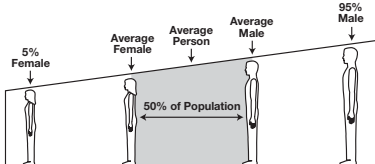

1	Eye Height 4			Elbow Height 4			Eye-to-Elbow Measurement	
	Stand	Sit	Var.	Stand	Sit	Var.	Stand	Sit
Av. Female	1509	1118	391	986	584	401	523	533
Av. Person	1567	1171	396	1026	632	394	541	538
Av. Male	1636	1232	404	1080	686	394	556	546
Variance F/M	127	114	—	94	102	—	—	—

2 5

For 5% female to 95% male range of users

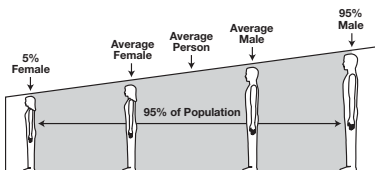

	Stand	Sit	Var.	Stand	Sit	Var.	Stand	Sit
5% Female*	1415	1036	378	927	528	399	488	508
95% Male**	1742	1323	419	1153	749	404	589	574
Variance F/M	328	287	—	226	221	—	—	—

3

† Anthropometry: The study of human body measurements. Data based on studies of US population.

\* Denotes the female who is at the 5% mark of a scale ranging 0% to 100%.

\*\* Denotes the male who is at the 95% mark of a scale ranging 0% to 100%.

- 1 Fixed-height applications: Mount at height for average person.  
Height-adjustable applications...
- 2 Sitting *or* standing for average range of users: ≥ 127 mm vertical adjustment range.
- 3 Sitting *or* standing for 95% range of users: ≥ 328 mm vertical adjustment range.
- 4 Sitting & standing for average range of users: ≥ 495 mm vertical adjustment range.  
Keyboard placement...
- 5 Keyboard to monitor relationship: The optimal distance is 533 mm in all applications.

# Take a stand!

At Ergotron, our team of engineers, designers and ergonomic specialists have considered all the theory, creating products that help get people into their personal zone where comfort, productivity and wellness can happen. Join the uprising.

<http://computingcomfort.org>  
[www.juststand.org](http://www.juststand.org)



© 2010 Ergotron, Inc. rev. 11/04/10 E-03-005 **Content is subject to change without notification**  
Some products may not be available in some regions of the globe—visit our web site for more information

**Americas Sales and Corporate Headquarters**

St. Paul, MN USA  
(800) 888-8458  
+1-651-681-7600  
[www.ergotron.com](http://www.ergotron.com)  
[sales@ergotron.com](mailto:sales@ergotron.com)

**EMEA Sales**

Amersfoort, The Netherlands  
+31 33 45 45 600  
[www.ergotron.com](http://www.ergotron.com)  
[info.eu@ergotron.com](mailto:info.eu@ergotron.com)

**APAC Sales**

Tokyo, Japan  
[www.ergotron.com](http://www.ergotron.com)  
[apaccustomerservice@ergotron.com](mailto:apaccustomerservice@ergotron.com)

**Worldwide OEM Sales**

[www.ergotron.com](http://www.ergotron.com)  
[info.oem@ergotron.com](mailto:info.oem@ergotron.com)