

✉ info@certaups.com ☎ 03333 130251

www.CertaUPS.com

CertaUPS, Rotherside Road, Sheffield, S21 4HL

CertaUPS

PRICE LIST

CONTENTS

Useful Information	Page 2
C60	Page 3
C200	Page 4
C300R	Page 5
C400	Page 7
C400R	Page 9
C550R	Page 11
C550	Page 13
C500E	Page 15
Software	Page 16
Accessories	Page 17
Competitor comparison	Page 19



USEFUL INFORMATION

CONSIDERATIONS WHEN SIZING A UPS

1. What is the load size and type of equipment being supported? It is important to also accommodate for leading and lagging loads
2. What is the required autonomy? Consider the amount of time required for a controlled system shut down and for bridging the gap between a power failure and generator start up
3. Is a Modbus required? For instances where a gateway between the building management system and UPS is necessary
4. What environment will the UPS be installed into? The ambient temperature around the UPS is important to consider. Will the UPS be going into a server rack?
5. What is the power supply type and size?
6. Are any other UPS accessories required? For example; a PDU, EMP, bypass, ATS or SNMP card


UNDERSTANDING PART CODES

The CertaUPS UPS systems follow a standard part code format always starting with C followed by a number which represents the model. The form factor follows, where an R is present the UPS can be rackmounted or if there is no letter the UPS is tower only.

After the hyphen is a 3 digit number, this shows the power output.

The final letter stand for the battery type. B indicates that the UPS has internal batteries, C indicates that the UPS is a charger model and Li indicates that the UPS contains Lithium-ion batteries.

C300R-020-B

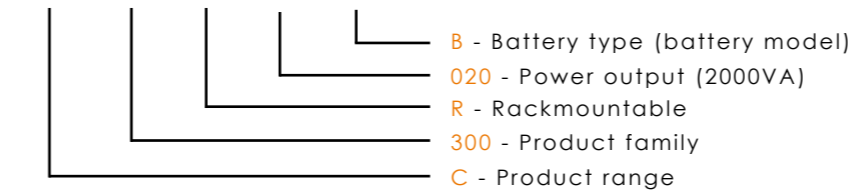

3 YEARS WARRANTY ON ALL UPS UNITS
DESIGNED TO BE MORE PROFITABLE FOR YOU

C60

PART NO	DESCRIPTION	MEASUREMENTS (mm)	RRP
C60-800	C60 800VA	90W x 285D x 140H - 5KG	£83
C60-1000	C60 1000VA	146W x 350D x 160H - 8KG	£150
C60-1500	C60 1500VA	146W x 397D x 205H - 12KG	£216
C60-2000	C60 2000VA	146W x 397D x 205H - 14KG	£245



MODELS	C60-800	C60-1000	C60-1500	C60-2000
Power (VA) max	800	1000	1500	2000
Power (W) max	480	600	900	1200
Dimensions W x D x H (mm)	146 x 285 x 140	146 x 350 x 160	146 x 397 x 205	
AC Outlets	4 x IEC C13		6 x IEC C13	

C60 RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C60-800	0	2	4	9	25
C60-1000	0	6	10	9	44
C60-1500	0	2	5	10	27
C60-2000	0	1	2	6	19



1. AC input
2. C13 IEC outlets
3. C13 surge only outlet
4. USB connectivity
5. Telephone protection

* Image shown is reverse of C60-800

C200

PART NO	DESCRIPTION	MEASUREMENTS (mm)	RRP
C200-1000	C200 1000VA	146W x 350D x 160H - 9KG	£224
C200-1500	C200 1500VA	146W x 397D x 205H - 12KG	£312
C200-2000	C200 2000VA	146W x 397D x 205H - 14KG	£419



MODELS	C200-1000	C200-1500	C200-2000
Power (VA) max	1000	1500	2000
Power (W) max	700	1050	1400
Dimensions W x D x H (mm)	146 x 350 x 160	146 x 397 x 205	
AC Outlets	4 x IEC C13	6 x IEC C13	

C200 RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C200-1000	0	2	5	10	27
C200-1500	0	1	2	5	16
C200-2000	0	1	1	2	10



1. AC input
2. C13 IEC outlets
3. C13 surge only outlet
4. USB connectivity
5. Telephone protection

* Image shown is reverse of CRT200-1000

C300R

PART NO	DESCRIPTION	MEASUREMENTS (MM)	RRP
C300R-010-B	C300R 1000VA Int. Battery	440W x 430D x 88H - 20KG	£434
C300R-015-B	C300R 1500VA Int. Battery	440W x 430D x 88H - 22KG	£476
C300R-020-B	C300R 2000VA Int. Battery	440W x 600D x 88H - 30KG	£665
C300R-030-B	C300R 3000VA Int. Battery	440W x 600D x 88H - 37KG	£734
C300R-BB36VP	C300R 1000VA - 1500VA EBM	440W x 430D x 88H - 25KG	£340
C300R-BB72VP	C300R 2000VA - 3000VA EBM	440W x 600D x 88H - 40KG	£552

MODELS	C300R-010-B	C300R-015-B	C300R-020-B	C300R-030-B
Power (VA) max	1000	1500	2000	3000
Power (W) max	900	1350	1800	2700
Dimensions W x D x H (mm)	440 x 430 x 88		440 x 600 x 88	
AC Outlets	8 x IEC C13		8 x IEC C13 + 1 x IEC C19	

*The CertaUPS C300R internal battery models are used as charger units in conjunction with EBMs (External Battery Modules)

* A maximum of 2 EBMs can be used per charger unit



C300R RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C300R-010-B	0	6	10	19	44
	1	31	44	81	184
	2	59	94	148	300
C300R-BB36VP	n/a				
C300R-015-B	0	2	4	9	27
	1	18	27	43	110
	2	35	49	91	209
C300R-BB36VP	n/a				
C300R-020-B	0	5	9	18	43
	1	30	43	78	178
	2	57	91	143	300
C300R-BB72VP	n/a				
C300R-030-B	0	2	4	9	27
	1	18	27	43	110
	2	35	49	91	209
C300R-BB72VP	n/a				



* Image shown is reverse of CRT300R-030-B

C400

PART NO	DESCRIPTION	MEASUREMENTS (MM)	RRP
C400-010-C	C400 1000VA Int. Charger	102W x 346D x 228H - 4KG	£296
C400-010-B	C400 1000VA Int. Battery	144W x 356D x 228H - 10KG	£332
C400-020-C	C400 2000VA Int Charger	102W x 390D x 327H - 7KG	£460
C400-020-B	C400 2000VA Int. Battery	190W x 399D x 327H - 18KG	£532
C400-030-C	C400 3000VA Int. Charger	102W x 390D x 327H - 7KG	£588
C400-030-B	C400 3000VA Int. Battery	190W x 399D x 327H - 23KG	£672
C400-BB1P	C400 1000VA EBM	133W x 356D x 228H - 26KG	£262
C400-BB2P	C400 2000VA EBM	190W x 399D x 327H - 45KG	£466
C400-BB3P	C400 3000VA EBM	190W x 399D x 327H - 37KG	£466

Models	C400-010-B	C400-010-C	C400-020-B	C400-020-C	C400-030-B	C400-030-C
Power (VA) max	1000		2000		3000	
Power (W) max	900		1800		2700	
Dimensions W x D x H (mm)	144 x 356 x 228	102 x 346 x 228	190 x 399 x 327	102 x 390 x 327	190 x 399 x 327	102 x 390 x 327
AC Outlets	3 x IEC C13		6 x IEC C13		6 x IEC C13	

*A maximum of 4 EBMs can be used per charger (C) unit with the 1000VA-2000VA systems

*A maximum of 6 EBMs can be used per charger (C) unit with the 3000VA system



C400 RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C400-010-B	0	2	4	9	26
C400-010-C	0				
	1	32	46	79	179
	2	79	111	179	300
	3	128	179	290	300
C400-BB1	n/a				
C400-020-B	0	6	9	17	44
C400-020-C	0				
	1	30	44	76	172
	2	76	107	172	300
	3	122	172	278	300
C400-BB2	n/a				
C400-030-B	0	6	9	17	43
C400-030-C	0				
	1	17	25	43	106
	2	43	63	106	239
	3	75	106	170	300
	4	106	149	239	300
	5				
C400-BB3	n/a				



1. AC input
2. 3 C13 IEC outlets
3. Intelligent port
4. USB connectivity
5. Battery connector

C400R

PART NO	DESCRIPTION	MEASUREMENTS (MM)	RRP
C400R-010-C	C400R 1000VA Int. Charger	440W x 436D x 88H - 12KG	£496
C400R-010-B	C400R 1000VA Int. Battery	440W x 436D x 88H - 15KG	£528
C400R-020-C	C400R 2000VA Int. Charger	440W x 436D x 88H - 15KG	£673
C400R-020-B	C400R 2000VA Int. Battery	440W x 436D x 88H - 20KG	£737
C400R-030-C	C400R 3000VA Int. Charger	440W x 605D x 88H - 20KG	£726
C400R-030-B	C400R 3000VA Int. Battery	440W x 605D x 88H - 29KG	£908
C400R-BB1	C400R 1000VA EBM	440W x 435D x 88H - 22KG	£344
C400R-BB2	C400R 2000VA EBM	440W x 436D x 88H - 30KG	£439
C400R-BB3	C400R 3000VA EBM	440W x 605D x 88H - 45KG	£551

MODELS	C400R-010-B	C400R-010-C	C400R-020-B	C400R-020-C	C400R-030-B	C400R-030-C
Power (VA) max	1000		2000		3000	
Power (W) max	900		1800		2700	
Dimensions W x D x H (mm)	440 x 436 x 88			440 x 605 x 88		
AC Outlets	8 x IEC C13			8 x IEC C13 + 1 x IEC C19		

* A maximum of 6 EBMs can be used per charger (C) unit



C400R RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C400R-010-B	0	12	18	32	80
C400R-010-C	0				
	1	32	46	80	182
	2	80	113	182	300
	3	130	182	295	300
	4	182	256	300	300
	5				
	6				
C400R-BB1	n/a				
C400R-020-B	0	6	10	18	46
C400R-020-C	0				
	1	18	26	46	111
	2	46	68	111	253
	3	79	111	179	300
	4	111	157	253	300
	5				
	6				
C400R-BB2	n/a				
C400R-030-B	0	6	9	17	43
C400R-030-C	0				
	1	17	25	43	106
	2	43	63	106	239
	3	75	106	170	300
	4	106	149	239	300
	5				
	6				
C400R-BB3	n/a				

For tech specs and application information please visit <https://www.certaups.com/downloads/>



* Image shown is reverse of C400R-030-B

1. AC input
2. C13 IEC outlets
3. C19 IEC outlets
4. Intelligent port
5. USB / RS232

C550R

PART NO	DESCRIPTION	MEASUREMENTS (MM)	RRP
C550R-060-C	C550R 6kVA Int. Charger	440W x 575D x 88H - 14KG	£1,496
C550R-100-C	C550R 10kVA Int. Charger	440W x 575D x 88H - 16KG	£1,870
C550R-BB	C550R 6/10kVA EBM	440W x 595D x 129H - 55KG	£854


MODELS	C550R-060-C	C550R-100-C
Power (VA) max	6000	10000
Power (W) max	6000	10000
Dimensions W x D x H (mm)	440 x 575 x 88	440 x 575 x 88
AC outlets	2 x IEC C13	2 x IEC C13

* A maximum of 6 EBMs can be used per charger (C) unit



C550R RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C550R-060-C	0				
	1	20	30	51	122
	2	51	75	122	278
	3	86	122	199	300
	4	122	172	278	300
	5				
C550R-BB6	n/a				
C550R-100-C	0				
	1	10	15	26	67
	2	26	39	67	155
	3	45	67	110	250
	4	67	96	155	300
	5				
C550R-BB10	n/a				

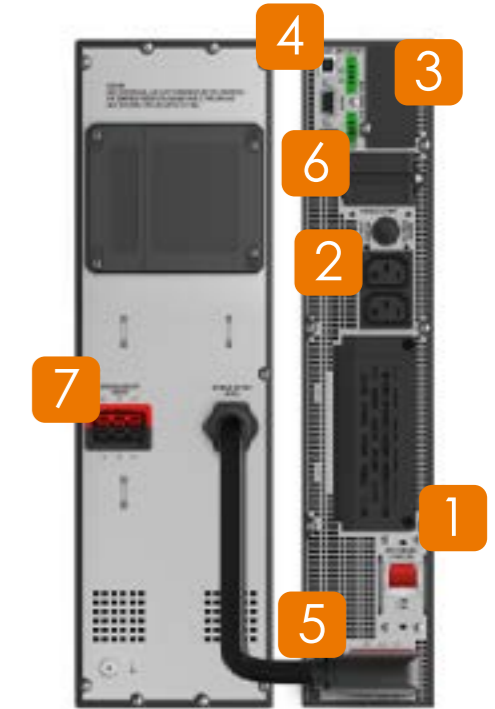

* Image shown is reverse of C550R-100-C

1. Input breaker
2. C13 IEC outlets
3. Intelligent slot
4. USB / RS232
5. Battery connection terminal
6. Parallel port
7. EBM connector

C550

PART NO	DESCRIPTION	MEASUREMENTS (MM)	RRP
C550-060-C	C550 6kVA Int. Charger	220W x 495D x 350H - 14KG	£1,352
C550-100-C	C550 10kVA Int. Charger	220W x 495D x 350H - 16KG	£1,689
C550-BB	C550 6-10kVA EBM	220W x 490D x 590H - 105KG	£1,390

MODELS	C550-060-C	C550-100-C
Power (VA) max	6000	10000
Power (W) max	6000	10000
Input/output phase	1/1	1/1
Dimensions W x D x H (mm)	220 x 495 x 350	
AC Outlets	Hardwired	

* A maximum of 4 EBMs can be used per charger (C) unit



C550 RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C550-060-C	0				
	1	20	30	51	122
	2	51	75	122	278
	3	86	122	199	300
	4	122	172	278	300
C550-BB	n/a				
C550-100-C	0				
	1	10	15	26	67
	2	26	39	67	155
	3	45	67	110	250
	4	67	96	155	300
C550-BB10	n/a				

1. Input breaker
2. Maintenance bypass switch
3. Hardwired mains
4. Intelligent slot
5. USB / RS232
6. Parallel port
7. EBM connector



* Image shown is reverse of C550-100-B

C500E

PART NO	DESCRIPTION	MEASUREMENTS (MM)	RRP
C500E-100-C	C500E 10kVA Int. Charger	350W x 650D x 890H - 70KG	£3,916
C500E-100-B	C500E 10kVA Int. Battery	350W x 650D x 890H - 127KG	£3,390
C500E-200-C	C500E 20kVA Int. Charger	350W x 650D x 890H - 75KG	£5,366
C500E-200-B	C500E 20kVA Int. Battery	350W x 650D x 890H - 195KG	£4,688
C500E-BB	C500E 10-20kVA EBM	260W x 550D x 710H - 170KG	£1,951

MODELS	C500E-100	C500E-200
Power (VA) max		20000
Power (W) max	8000	18000
Input/output phase	1/1 or 1/3	1/1 or 1/3
Dimensions W x D x H (mm)	350 x 650 x 890	
AC Outlets		

* A maximum of 3 EBMs can be used per charger (C) unit

C500E RUNTIMES

PART NO	EBM QTY	AUTONOMY (MINS)			
		100%	75%	50%	25%
C500E-100-B	0	7	11	20	51
C500E-100-C	0	24	31	40	90
	1	31	40	60	160
	2	40	60	90	180
C500E-200-C	0	7	11	20	51



* Image shown is reverse of C500E-200

1. Input / output terminals (hardwired)
2. Input breakers
3. Intelligent port
4. AS400 / USB / RS232
5. Parallel port



SOFTWARE



CertaUPS provides all of its partners and clients with intelligent UPS software support with no ongoing license fees or upfront charges.

With the most advanced capabilities on the market, our software delivers cutting edge server shutdown capabilities and is fully configurable for controlled shutdown of IT equipment following a mains failure.

It's compatible with a wide range of virtualised environments including VMware, Xenserver, Virtualbox and Hyper-V.

Software from CertaUPS allows monitoring of up to 1000 online UPS devices through a client's internal network and in doing so provides graphical data on the flow of power through each UPS individually.

All CertaUPS solutions can be monitored 24/7, where the status of a UPS can be sent via email and SMS notifications.

Additional information about software configuration and setup can be found on the website. Please visit <https://certaups.com/software>

- Scheduled multi-system shutdown / restart
- Power flow display for monitoring UPS status
- Warning notification via email / SMS / Windows system log
- Scheduled UPS test

- Password security protection
- Remote monitor / control via LAN
- SNMP central monitoring up to 1000 units
- UPS parameter setting and record logs for analysis

ACCESSORIES

PART NO	DESCRIPTION	C300R	C400	C400R	C500	C500E	C500R	RRP
C-NMC	Internal SNMP card	✓		✓	✓	✓	✓	£210
C-NMC (Mini)	Internal SNMP card		✓					£210
C-EMP	External temperature & humidity sensor (C-NMC / C-NMC (Mini) required)		✓	✓	✓	✓	✓	£182
C-RELAY	Internal programmable hardwired relay card			✓	✓	✓	✓	£62
C300R-RELAY	Internal programmable hardwired relay card	✓						£62
C-RELAY (Mini)	Internal programmable hardwired relay card		✓					£62
C-DB9RELAY	Internal DB9 relay card			✓	✓	✓	✓	£62
C300R-DB9RELAY	Internal DB9 relay card for C300R	✓						£62
C-DB9REL (Mini)	Internal DB9 relay card		✓					£62
C-MODBUS	Internal RS485 Modbus card			✓	✓	✓	✓	£90
C-MODBUS (Mini)	Internal RS485 Modbus card		✓					£90
C-RAILS	Mounting rails for installation into 19" server rack	✓		✓				£58
C500R-RAILS	Mounting rails for installation into 19" server rack						✓	£72
C-ATS-16A	16A Automatic transfer switch 1U			✓			✓	£474
C-MBSTower1-3								£188
C-MBSRack1-3								£198

PART NO	DESCRIPTION	C300R	C400	C400R	C500	C500E	C500R	RRP
MBSTOWER 1-3	External maintenance bypass switch 1-3kVA Plug n Play	✓	✓	✓				£188
MBSRACK 1-3	External rackmount maintenance bypass switch 1U 1-3kVA Plug n Play	✓		✓				£198
MBSRACK 6-10	External rackmount maintenance bypass switch 2U 6-10kVA						✓	£304
WBYP6	6kVA (32A) Wallmount maintenance bypass switch				✓		✓	£532
WBYP10	10kVA (63A) Wallmount maintenance bypass switch				✓	✓	✓	£532
WBYP20	20kVA (125A) Wallmount maintenance bypass switch					✓		£1,200
WBYP1031	10kVA (63A) Wallmount maintenance bypass switch 3/1 phase					✓		£678
WBYP2031	20kVA (125A) Wallmount maintenance bypass switch 3/1 phase					✓		£1,220
C8PK (10-20kVA)	C800 Series Parallel kit for N+1 configuration (10-20kVA)							£250
C8PK (30kVA)	C800 Series Parallel kit for N+1 configuration (30kVA)							£340
C88TP	C800 Battery temperature compensation probe							£110
C8COLDSTART	C800 Battery cold start kit (10kVA & 15kVA)							£358
C8SNMP	C800 SNMP for monitoring/shutdown applications							£464

*All wallmount maintenance bypass switches are 300W X 200D X 500H (mm)

*All wallmount maintenance 20kVA bypass switches are 500W X 200D x 500H (mm)



COMPETITOR COMPARISON

APC	EATON	VERTIV	TRIPPLITE	SALICRU	RIELLO	CertaUPS
BE325-UK BK350EI BK500EI BE400-UK BH500INET BK500 - BK500BLK	3S550	PSP500MT3-230U	POS500 INTERNETOFFICE500 INTERNET550SER ECO550UPS INTERNET550U	SPS.400 SOHO+ SPS.800 SOHO+ SPS.700	NPW600 NPW800 VST800	C60-800
BE550G BK650EI BE700G BE650G1/M1 BN600G BE600M BN650M1	3S750	PSP650MT3-230U	INTERNET600U ECO650LCD ECO650UPSM INTERNETOFFICE700 ECO750UPS INTERNET750U ECO750UPSTAA	SPS 850 SOHO+ IEC 850VA / 480W SPS.500		C60-800
				SPS.1100	NPW1000	C60-1000
				NPW1500 VST1100 VST1500	SPS.1500	C60-1500
				NPW2000 VST2000	SPS 2000 SOHO+ SPS.2000	C60-2000
BR500I SC420I BG500	3S750	PSA500MT3-230U	INTERNET600U ECO650LCD ECO650UPSM INTERNETOFFICE700 ECO750UPS INTERNET750U ECO750UPSTAA			C200-1000
BR550GI BR800 SC620I BR700G	5S700LCD	PSA650MT3-230U	TE600,OMNI700LCD OMNISMART700 SMART700SER SMART700HG SMART750USBTAA ETR700LCD / EP700LCD			C200-1000
BR900GI BR1000I	5S1000LCD	PSA1000MT3-230U	OMNIVS1000 OMNIVS1000TAA OMNI1000ISO SMART1050 OMNISMART1050			C200-1000
BR1200LCDI SC1000I BR1200GI BR1500GI BR1500I, BR1500LCDI SC1500I	5S1500LCD	PSA1500MT3-230U	OMNISMART1050			C200-1000
SMT750I SMT750RM2U SUA750I SUA750RM1U/2U	5P750 5P750RT	PS750RT3-230	PSA650MT3-120U PSA800MT3-120U		VSD1100	C300R-1000-B

APC	EATON	VERTIV	TRIPPLITE	SALICRU	RIELLO	CertaUPS
SMT1000I SMT1000RM2U SUA1000I SUA1000RM1U/2U	5P1000RT 5P1000RC	PS1000RT3-230	SMART1000RM1U SMART1000RM2U SMC10002URM SM1000RM1UTAA SM1000RM2UTAA			C300R-1000-B
SMT1500I SMT1500RM2U SUA1500I SUA1500RM2U	5P1500RT 5P1500RC	PS1500RT3-230	SMART1500RM2U SMC15002URM		VSD1500	C300R-1500-B
SMT2200I SMT2200RM2U SUA2200I SUA2200RM2U	5P2200RT	PS2200RT3-230	SMART2200RM2UN SMART2200RMXLN			C300R-2000-B
SMT3000I SMT3000RM2U SUA3000I SUA3000RM2U	5P3000RT	PS3000RT3-230	SMART2600RM2U SMART3000RM2U SM3000RM2UTAA		VSD2200 VSD3000	C300R-3000-B
SMX750I SMX1000I SUA750XLI SUA1000XLI	5PX1000RT 5PX1000RTN	PS1000RT3-230	SMART750RMXL2U SMART1000RMX- L2U			C300R-1000-B
SMX1500RM2U SU1400RMXL3U SUM1500RMXL2	5PX1500RT 5PX1500RTN	PS1500RT3-230	SMART1500RMXL2UA SMART1500CRMXL SM1500RMXL2UTAA	SPS.1500 ADV T SA		C300R-1500-B
SMX2200RMHV2U SUA2200XLI SUA2200RMXL3	5PX2200RT 5PX2200RTN	PS2200RT3-230	SMART2200RMXL2U SMART2200CRMXL SM2200RMXL2UP SM2200RMXL2UP	SPS.1500 ADV T SA		C300R-2000-B
SMX3000RMHV2U SUA3000RMXL3U SUA3000XLI SUM3000RMXL2U	5PX3000RT 5PX3000RTN	PS3000RT3-230	SMART3000RMXL2U SMART3000CRMXL SMART3000R- MOD2U SM3000RMXL2UTAA	SPS.3000.ADV RT2		C300R-3000-B
	9PX700RT	GXT3-48VBATTE	SU750XL SU750RTXL2U SU750RTXLCD2U		SDH1000	C400R-010-B
SURT1000XLI SURT1000RMXLI	9PX1000RT	GXT3-48VBATTE	SU1000TXL2UA SU1000RTXLCD2U			C400R-010-B
SURTA1500XLI SURTA1500RMXLI	9PX1500RT	GXT3-48VBATTE	SU1500TXL2UA SU1500RTXLCD2U		SDH1500 SER1500	C400R-020-B
SURT2000XLI SURT2000RMXLI	9PX2000RT	GXT3-48VBATTE	SU2200TXL2UA SU2200RTXLCD2U			C400-020-B
SURTD3000XLI SURTD3000RMXLI	9PX3000RT	GXT3-72VBATTE	SU3000TXL2U SU3000TXL3U SU3000TXLCD2U SU3000TXLCD3U SU3000TXR3U SU3000TXR3UHW	6A0EA000005 SPS.3000 ADV T SA 699CA000019 SLC-3000-TWIN PRO2 - Tower IEC		C400-030-B
					SEP700 SEP1000	C400-010-B
					SEP1500	C400-020-B

APC	EATON	VERTIV	TRIPPLITE	SALICRU	RIELLO	CertaUPS
				SLC-3000-TWIN PRO2 - Tower IEC	SEP2200 SEP3000	C400-030-B
SURT10000XLI	9PX10KSP	GXT3-240TBATTC	SU10000RT3U SU10000RT3U2TF			C550-100-B
SURTD5000XLI SURTD5000RMLLI	9PX5K 9PX6KSP	GXT3-240VBATTE	SU5000RT3U SU5000RT4U SU5000RT4UTF			C550-060-B
SURT6000XLI SURT6000RMLLI	9PX6KSP 9PX6K	GXT3-240VBATTE	SU6000RT3UHV SU6000RT3UHVXL SU6000RT3U			C550-060-B
SURT10000RMLLI	9PX10KSP	GXT3-240VBATTE	SU10000RT3U SU10000RT3U2TF			C550-100-B
SMT2200I SMT2200RM2U SUA2200I SUA2200RM2U	5P2200RT	PS2200RT3-230	SMART2200RM2UN SMART2200RMLN			C300R-2000-B
SMT3000I SMT3000RM2U SUA3000I SUA3000RM2U	5P3000RT	PS3000RT3-230	SMART2600RM2U SMART3000RM2U SM3000RM2UTAA		VSD2200 VSD3000	C300R-3000-B
SMX750I SMX1000I SUA750XLI SUA1000XLI	5PX1000RT 5PX1000RTN	PS1000RT3-230	SMART750RML2U SMART1000RML- L2U			C300R-1000-B
SMX1500RM2U SU1400RMLIB3U SUM1500RMLI2	5PX1500RT 5PX1500RTN	PS1500RT3-230	SMART1500RML2UA SMART1500CRMXL SM1500RML2UTAA		SPS.1500 ADV T SA	C300R-1500-B
SMX2200RMHV2U SUA2200XLI SUA2200RMLI3	5PX2200RT 5PX2200RTN	PS2200RT3-230	SMART2200RML2U SMART2200CRMXL SM2200RML2UP SM2200RML2UP		SPS.1500 ADV T SA	C300R-2000-B
"SMX3000RMHV2U SUA3000RMLI3U SUA3000XLI SUM3000RMLI2U"	5PX3000RT 5PX3000RTN	PS3000RT3-230	SMART3000RML2U SMART3000CRMXL SMART3000R- MOD2U SM3000RML2UTAA		SPS.3000.ADV RT2	C300R-3000-B
	9PX700RT	GXT3-48VBATTE	SU750XL SU750RTL2U SU750RTLCD2U		SDH1000	C400R-010-B
SURT1000XLI SURT1000RMLLI	9PX1000RT	GXT3-48VBATTE	SU1000RTL2UA SU1000RTLCD2U			C400R-010-B
SURTA1500XLI SURTA1500RMLLI	9PX1500RT	GXT3-48VBATTE	SU1500RTL2UA SU1500RTLCD2U		SDH1500 SER1500	C400R-020-B
SURT2000XLI SURT2000RMLLI	9PX2000RT	GXT3-48VBATTE	SU2200RTL2UA SU2200RTLCD2U			C400-020-B
SURTD3000XLI SURTD3000RMLLI	9PX3000RT	GXT3-72VBATTE	SU3000RTL2U SU3000RTL3U SU3000RTLCD2U SU3000RTLCD3U SU3000RTXR3U SU3000RTXR3UHW	6A0EA000005 SPS.3000 ADV T SA 699CA000019 SLC-3000-TWIN PRO2 - Tower IEC		C400-030-B

APC	EATON	VERTIV	TRIPPLITE	SALICRU	RIELLO	CertaUPS
SURTD5000XLI SURTD5000RMLLI	9PX5K 9PX6KSP	GXT3-240VBATTE	SU5000RT3U SU5000RT4U SU5000RT4UTF			C550R-060-B
SURT6000XLI SURT6000RMLLI	9PX6KSP 9PX6K	GXT3-240VBATTE	SU6000RT3UHV SU6000RT3UHVXL SU6000RT3U			C550R-060-B
SURT10000RMLLI	9PX10KSP	GXT3-240VBATTE	SU10000RT3U SU10000RT3U2TF			C550R-100-B
SURT10000XLI	9PX10KSP	GXT3-240TBATTC	SU10000RT3U SU10000RT3U2TF			C550R-100-B
					SDL4000 STW5000 STW6000	C550-060-B
					STW8000 STW10000	C550R-100-B

IF YOU CANNOT FIND WHAT YOU ARE LOOKING FOR DO NOT HESITATE TO CONTACT US ON 03333130251
FOCUS ON THE TECHNOLOGY, NOT THE BRAND

✉ info@certaups.com ☎ 03333 130251
www.CertaUPS.com
CertaUPS, Rotherside Road, Sheffield, S21 4HL

CertaUPS

UNINTERRUPTIBLE POWER SUPPLIES