


2-Port VGA Video Splitter with Audio - USB Powered

ST122LEA

DE: Bedienungsanleitung - de.startech.com
 FR: Guide de l'utilisateur - fr.startech.com
 ES: Guía del usuario - es.startech.com
 IT: Guida per l'uso - it.startech.com
 NL: Gebruiksaanwijzing - nl.startech.com
 PT: Guia do usuário - pt.startech.com

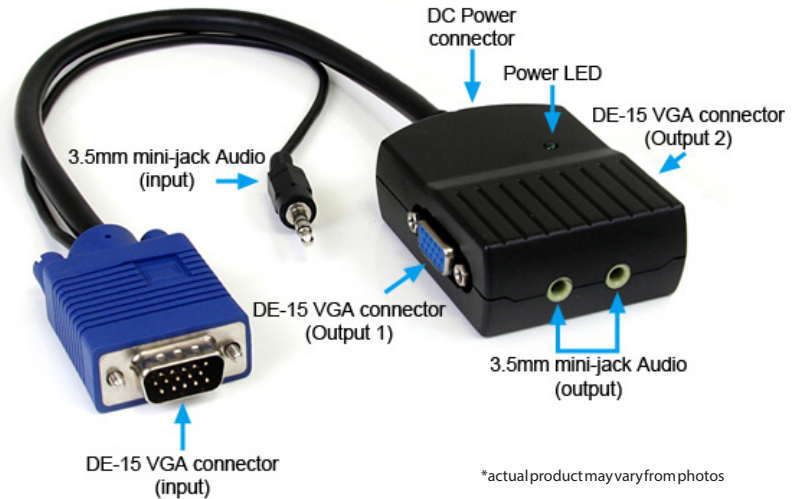

Packaging Contents

- 1 x Video Splitter
- 1 x USB to DC power cable
- 1 x User Manual

System Requirements

- VGA enabled video source device
- Available USB port on the video source device
- VGA enabled display device
- Analog stereo audio source with 3.5mm mini-jack interface
- Stereo speakers with 3.5mm mini-jack interface

Installation

1. Make sure all devices are powered off and unplugged before attempting installation.
2. Connect the male VGA connector on the ST122LEA to the VGA output on the video source device (i.e. computer system).
3. If using audio, connect the integrated 3.5mm mini-jack audio connector to the audio output on the source device.
4. Connect the video display devices (i.e. monitor, projector, etc.) to the female VGA connectors on the ST122LEA, using standard male/male VGA cables.
5. If using audio, connect a set of stereo speakers (or integrated speakers on the display device) using 3.5mm mini-jack audio cables to the splitter unit.

NOTE: Both outputs on the ST122LEA are identical, so the same audio and video will be output.

6. Connect the USB power cable from the DC power connector on the ST122LEA splitter unit to an available USB port on the source device.
7. Power on the display devices and speakers (if applicable).
8. Power on the video source device.

Specifications

Video Signal	RGBHV (VGA)
Number of Ports	2
Connectors	2 x DE-15 VGA female 1 x DE-15 VGA male 2 x 3.5mm mini-jack female 1 x 3.5mm mini-jack male 1 x DC power
LEDs	1 x Power
Maximum Video Resolution	2048 x 1536
Maximum Distance	65 m (213 ft.)
Maximum Video Bandwidth	300 MHz
DDC Support	DDC, DDC2, DDCB2 (Port 1 only)
Operating Temperature	0°C ~ 70°C (32°F ~ 158°F)
Storage Temperature	-20°C ~ 85°C (-4°F ~ 185°F)
Humidity	0% ~ 95% RH
Dimensions	68.0mm x 53.0mm x 23.0mm
Weight	115g

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.