

MAINTENANCE BYPASS FOR MICRO-UPS SYSTEMS



When your computer system can't be without power — even for maintenance — a Liebert MicroPOD ensures continuous uptime. The MicroPOD provides maintenance bypass capability as well as power output distribution, and can be used with virtually any micro-UPS system.

The MicroPOD allows you to manually transfer your connected equipment to utility power via a maintenance bypass switch, permitting scheduled maintenance or UPS replacement without power disruption. Transferring back to UPS power is just as easy — just turn the switch to the indicated position and your load is protected by the UPS.

Available in plug and play or hard wired options at 120V or 208V rating. Includes brackets for rack mounting in any direction.

Use of the MicroPOD offers these benefits:

- Provides utility power to your attached equipment when switched to maintenance bypass mode
- Allows UPS maintenance or replacement of the UPS without discontinuing power to critical equipment
- Easily installed — the UPS and utility power are both connected to the MicroPOD with the supplied cords
- Rotary switch and LED indicators make the unit simple to operate




Specifications

| Part Number | Plug to Utility | Receptacle to UPS Input | Plug to UPS Output | Micro POD Output Receptacles |
|---------------------------------|--|-------------------------|--------------------|--|
| 120V UL Listed MicroPODs | | | | |
| MP2-115A | 5-15P | 5-15R | 5-15P | (8)5-15R |
| MP2-120C | 5-20P | 5-20R | 5-20P | (8)5-20R (T-Slot) |
| MP2-130C | L5-30P | L5-30R | L5-30P | (8)5-20R (T-Slot) |
| MP2-130E | L5-30P | L5-30R | L5-30P | (2)5-15R, (4) 5-20R (T-Slot) (1) L5-30R |
| MP2-130P | L5-30P | L5-30R | L5-30P | (4) 5-15R, (2) L5-20R |
| MP2-115HW | Hardwired | 5-15R | 5-15P | Hardwired |
| MP2-120HW | Hardwired | 5-20R | 5-20P | Hardwired |
| MP2-130HW | Hardwired | 5-30R | 5-30P | Hardwired |
| MP2-220N | L6-20P OR Hardwire Connection (plug is removable for hardwire applications) | L6-20R | L6-20P | (2) L6-20R, (2) L6-15R, OR Hardwire Connections (receptacles are removable for hardwire applications) |
| 230V CE Marked MicroPODs | | | | |
| MP2-210K | EN60320/C14 | EN60320/C13 | EN60320/C14 | (4) EN 60320/C13 |
| MP2-220L | EN60320/C20 | EN60320/C19 | EN60320/C20 | (4) EN60320/C13, (1)EN60320/C19 |

Configuration

The MicroPOD plugs into the utility and UPS, and the UPS is plugged into the MicroPOD. All protected devices are connected to the MicroPOD, allowing maintenance bypass for the UPS.

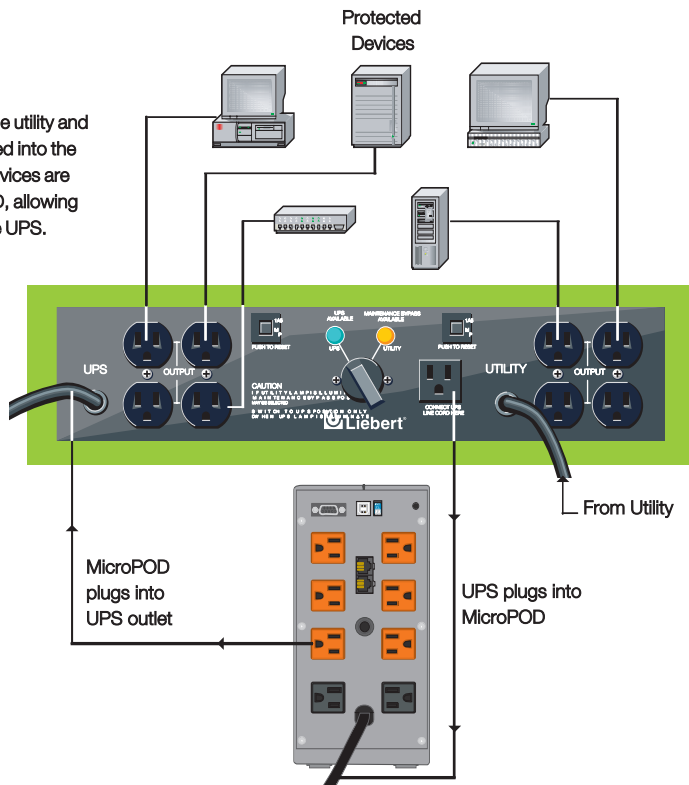

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2004 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert and the Liebert logo are registered trademarks of the Liebert Corporation.

© Keeping Business in Business is a registered trademark of the Liebert Corporation.

The Emerson logo is a trademark and service mark of Emerson Electric Co.

SL-23800 (9/04)
Printed in USA



1300 662 435
poweronaustralia.com.au

Power On Australia Pty Ltd - ABN 48 110 752 442

Unit 20, 256-258 Musgrave Road, Coopers Plains QLD 4108 (Head Office)

Po Box 5322, Daisy Hill QLD 4127