

Features

Up to 4 detector heads can report to one ground level controller

Photoelectric transmitter and receiver are combined in a single, compact housing:

- An infrared beam is reflected from a matching prism with the reflected light analyzed by an on-board microprocessor providing area smoke detection
- Operating range covers 26 ft, 3 inches to 330 ft (8 m to 100 m)
- Modular design with *easyfit* mounting system and LASER assisted prism mounting provides convenient mounting and adjustment
- *Auto-Align* beam alignment operation conveniently rotates beam to align to the prism center during installation
- *AutoOptimise* operation automatically maintains alignment for reliable operation
- 5 Year Warranty
- UL listed to Standard 268

Microprocessor controlled operation includes:

- Easy setup and alignment with sensitivity selectable from 10% to 60% (35% default)
- Password protected settings
- Built-in electronic UL/ULC obscuration acceptance test
- Automatic gain control; contamination compensation, and building shift compensation
- Current monitoring for gimbals motor position
- Ground level system controller with backlit LCD provides user feedback of operating parameters; remote status display, programming access, and test
- Operating voltage range of 14 to 28 VDC
- Alarm latching or alarm auto-reset
- Separate alarm and trouble contacts

Applications:

- Open areas where ceiling height exceed 25ft (7.6 m) (warehouses, hotel atriums, industrial plants, and school gymnasiums)
- Public areas where cosmetics are of prime importance and detector heads need to be small and unobtrusive (shopping malls, libraries, theaters, and churches)

Optional Accessories:

- Detector: adjustment bracket, back box, and cover plate
- Controller back box
- Extended prism mounting options



Fireray 5000 Reflective Beam Detector Head



Fireray 5000 Control Station

Description

Convenient Installation and Alignment. The Fireray 5000 System is an auto-aligning infrared beam smoke detector. Once the detector head is installed using the *easyfit* mounting system, an integral LASER can be activated that is aligned along the optical path of the infrared beam, allowing the reflective prism to be located quickly and with confidence. The *Auto-Align* beam alignment feature then allows the reflective prism to be located quickly and accurately.

AutoOptimise Beam Alignment. The *AutoOptimise* beam alignment system automatically steers and maintains the beam in the optimum position for reliable performance. The signal is generated in the transmitter element and reflected by the prism back to the receiver element, then analyzed for the presence of smoke. The internal microprocessor determines an alarm condition when a predetermined level is reached. The system is designed to be mounted so the beam will project between 1ft (0.31 m) and 2 ft (0.61 m) below and parallel to the ceiling. Lateral detection may be up to 30 ft (9.144 m) on either side of the beam, providing a maximum total coverage area of up to 19,800 square feet (60 ft x 330 ft or 18.29 m x 100 m).

Application Note. Reflective beam smoke detectors may not be suitable for areas with highly reflective surfaces. Separate transmitter/receiver models may be required.

Refer to NFPA 72 and Installation Instructions supplied with product for further information.

* Listings are by Fire Fighting Enterprises. Refer to CSFM 7260-1508:104.

Engineering Specification

The projected beam type smoke detector shall be listed to UL 268 and shall consist of up to four integrated transmitter, receiver detector heads and single low level remote control unit. The detector shall operate between a range of 26.25 ft to 330 ft (8 m to 100 m). The temperature range of the system shall be -4° F to 131° F (-20° C to 55° C). The beam detector heads shall include an integral built-in laser pointer to assist prism mounting. The beam detector shall feature automatic gain control which will compensate for gradual signal deterioration from dirt accumulation on the lenses. The beam detector heads shall include AutoOptimise Self-Correcting motorized head feature to ensure unit is always receiving maximum signal available, and shall automatically compensate for Building Shift.

The unit shall include a low level remote display and control unit with LCD readout for set-up, reporting and testing of up to 4 separate detector heads. The system shall be capable of programming obscuration thresholds for 10% to 60% in 1% increments. The system shall be capable of programming delay to fault and delay to alarm from 2 seconds to 30 seconds in 1 second increments.

Test and acceptance of the system shall be carried out by using the UL approved internal electronic obscuration fire test. The projected beam type smoke detector shall be a 4-wire 24 VDC device to be used with a Nationally Recognized Testing Laboratory's Listed separately supplied 4-wire control panel. The Reflective beam type smoke detector shall be a Fire Fighting Enterprises Fireray 5000.

Ordering Information

Ordering Number	Description	Dimensions
5000-103	Fireray 5000 Reflective Auto Align Beam Smoke Detector System; includes one detector head, one controller, and one prism; for control of up to four detector heads	Head 5-9/32" H x 5-5/16" W x 5-9/32" D (135 mm x 134 mm x 132 mm)
		Controller 9-1/4" H x 7-7/8" W x 2-13/16" D (235 mm x 200 mm x 71 mm)
		Prism 4-1/8" x 3-15/16" x 3/8" D (105 mm x 100 mm x 9.5 mm)
5000-031	Additional Detector Head and Prism, select up to 3 additional heads per 5000-103 System	5-9/32" H x 5-5/16" W x 5-9/32" D (135 mm x 134 mm x 132 mm)
5000-011	5000 Series Detector Uni-Box back box includes: hinged cover plate, conduit knock-outs on all sides, captive screw lock on cover plate, universal back plate mounting holes, and cover plate mounting holes for optional 1000-018 wire cage; box may be surface or flush mounted	7-1/8" square x 2-1/16" D (181 mm x 52 mm) (including cover plate)
5000-012	Detector Cover Plate for mounting 5000 Series Detector to a double gang electrical box, surface or flush mount	6-7/16" square (164 mm) with 3/16" lip (5 mm)
5000-005	Alignment Bracket for detector or prism, surface mount; pivots horizontally or vertically for accurate alignment; order detector and prism parts separately	5-1/4" square footprint x 2-13/16" D (134 mm x 71 mm)
5000-009	Controller Back Box, surface or flush mount; mounts to single gang, double gang, or 4" square box for surface mounting	8-7/16" H x 7-7/16" W x 1-3/4" D (214 mm x 189 mm x 45 mm)
5000-010	Controller Back Box Semi-Flush Mount Trim Plate (for 5000-009 box)	10-5/16" H x 8-3/4" W (263 mm x 222 mm)
5000-006	Prism Wall Mount Bracket; mounts a single prism, for up to 160 ft (49 m); or four prisms, for 160 ft to 330 ft (49 m to 100 m); prisms are ordered separately	11-3/16" x 8-5/16" x 1/2" D (284 mm x 211 mm x 13 mm)
5000-008	Single Prism Alignment Adapter, mounts on 5000-005 Alignment Bracket; order Prism and Alignment Bracket separately	4" square (102 mm)
5000-007	Four Prism Alignment Adapter, mounts on 5000-005 Alignment Bracket; order Prisms and 5000-005 Alignment Bracket separately	8" square (204 mm)
23901.01	Replacement Prism	
5000-004	Long Range Prism Kit; provides three, 23901 Prisms for distances between 160 ft and 330 ft (50 m to 100 m)	
5000-014	Ceiling Pendant Mounting Bracket	
1000-018	Protective Wire Cage for 5000 Series Detector Heads	
1000-019	Protective Wire Cage for 5000 Serie4s Controllers	

Internal Ordering Note: These products can be found in Job Design under Fire Fighting Enterprises, OP category OPFFE.


Accessory Reference (not shown to scale)




Beam Detector on 5000-005 Alignment Bracket




Beam Detector on 5000-011 Uni-Box




23901 Prism Reflector



5000-006 Prism Mounting Bracket with One Prism

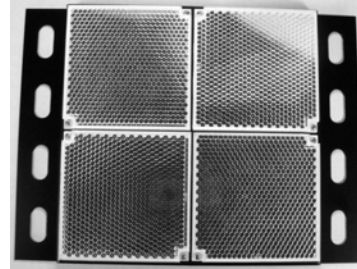

5000-006 Prism Mounting Bracket with Four Prisms




5000-008 Single Prism Adapter on a 5000-005 Alignment Bracket



5000-007 Four Prism Adapter on 5000-005 Alignment Bracket

Controller Display Detail Reference

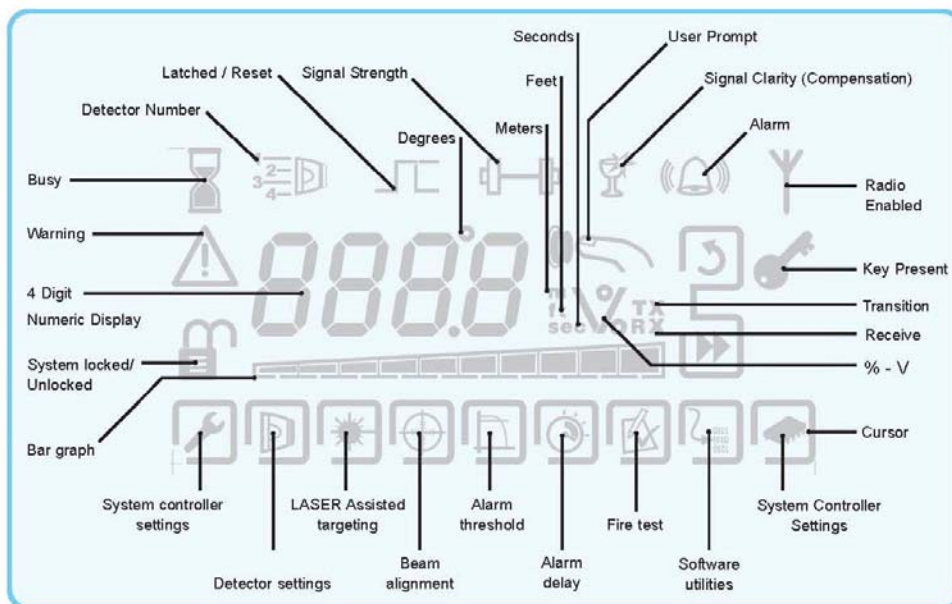

Specifications

(Refer to Installation Instructions shipped with the product for additional information.)

Mechanical and General Reference

Housing	Flame Retardant ABS; IP rating = IP54
Finish	Light Grey/Black
Manufacturer	Fire Fighting Enterprises (A Halma Group Company); website: www.ffeuk.com/

Electrical

Input Voltage	14 to 28 VDC	
Standby and Alarm Currents, @ 24 VDC	Low power mode	10 mA for one detector head 12 mA for two detector heads 14 mA for three detector head 16 mA for four detector heads
	High power mode	50 mA (mode is selected to enable faster beam movement during Auto-Align, Hand Align, and Laser Targeting)
Alarm and Trouble Relays	Dedicated, separate Form C relays, rated 1 A @ 30 VDC resistive	
Wiring to Controller	Terminal block connections; 18 to 14 AWG (0.82 mm ² to 2.08 mm ²)	
Wiring, Controller to Head	328 ft (100 m) maximum distance; use shielded wire pair; 18 to 16 AWG (1 mm ² to 1.5 mm ²)	
Optical Wavelength	850 nm	

Operating

Startup Time	45 seconds
Reset Time	5 seconds maximum
Sensitivity	10% to 60%; 35% default setting
Operating Distance	26 ft, 3 inches to 330 ft (5 m to 50 m)
Status Indicators; Head and Controller	Normal = Green LED; Alarm = Red LED; Fault (Trouble) = Yellow LED; LEDs flash every 10 seconds to indicate status
Alarm Types	Select latching or non-latching operation
Trouble Conditions	Improper setup alignment; 87% or more obscuration
UL Listed Temperature Range	32° F to 100° F (0° C to 38° C)
Operating Temperature Range	-22° F to 131° F (-30° C to 55° C)
Relative Humidity	0 to 93% RH, non-condensing

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 is a trademark of the National Fire Protection Association (NFPA).



Tyco Fire Protection Products • Westminster, MA • 01441-0001 • USA

S4098-0042-2 12/2011

www.simplexgrinnell.com

© 2011 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.