


SHURE®

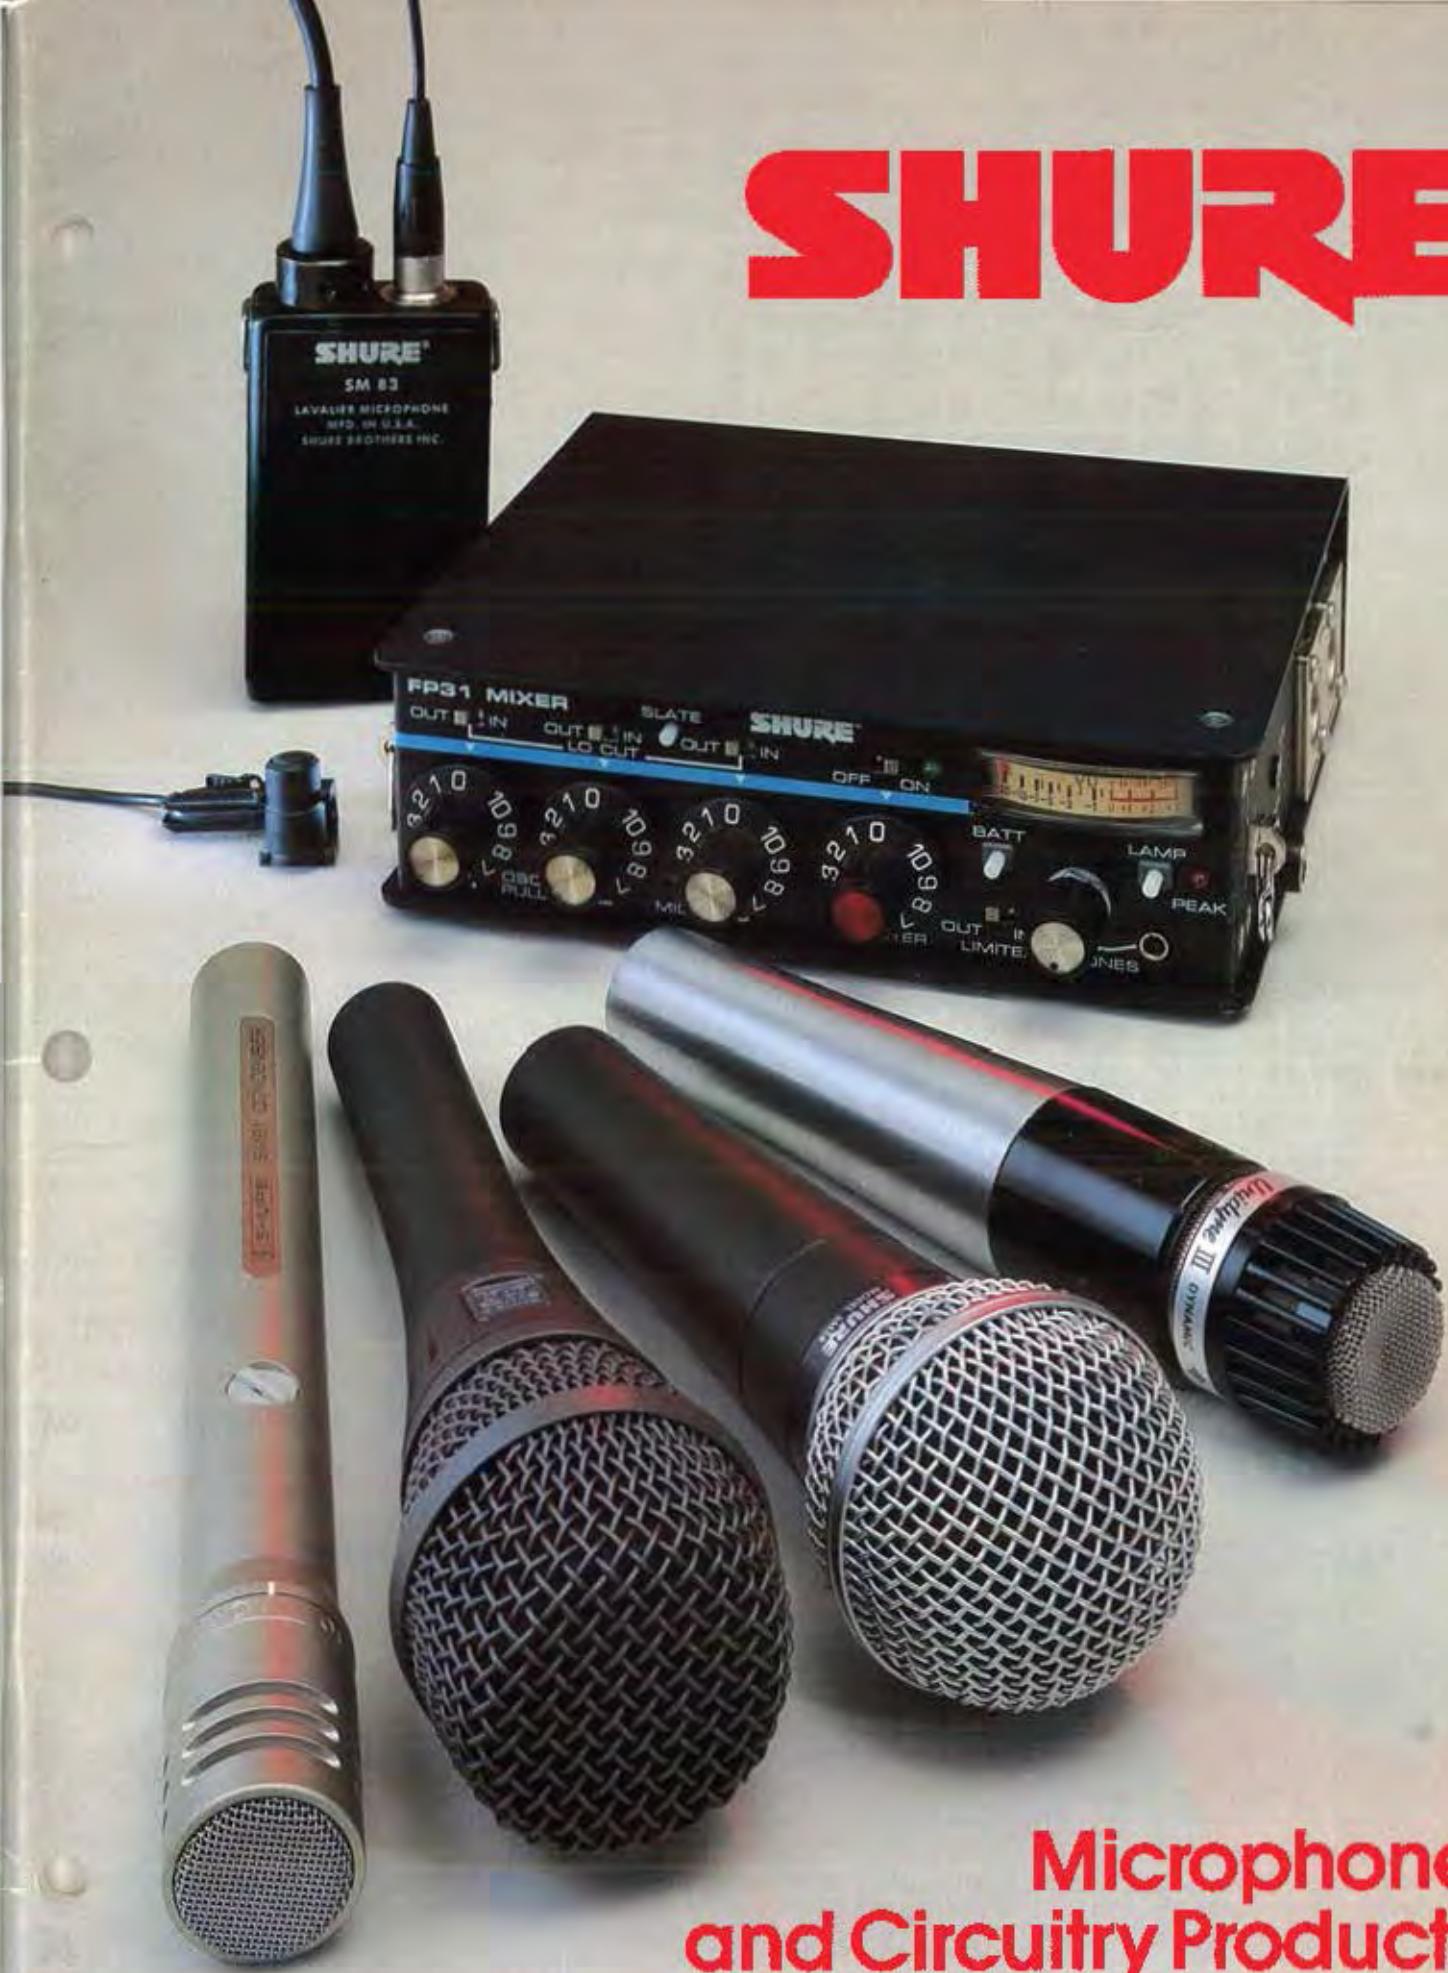

Microphone
and Circuitry Products

TABLE OF CONTENTS

Page	Page	
Shure...		
A Commitment to Excellence	1	
Shure Microphones:		
The Sound You Take for Granted	2-3	
Shure Microphone Specifications...		
...and What They Mean	4-5	
Microphone Selection Guides		
Professional Microphones	6	
General Purpose Microphones	7	
Professional Studio Microphones	8-18	
About Professional Studio Microphones	8	
Unidirectional Dynamic Microphones		
SM5B	9	
SM7	10	
SM53, SM54	11	
Omnidirectional Dynamic Microphones		
SM63, SM63L	12	
SM61, SM78	13	
Condenser Microphones		
SM80, SM81	14-15	
Line Level Condenser Microphone		
SM82	16	
Lavalier Condenser Microphone		
SM83	17	
Telephone Acoustic Coupler		
50AC	18	
Professional Performance Microphones	19-26	
About Professional Performance Microphones	19	
Supercardioid Condenser Microphone		
SM87	20-21	
Unidirectional Condenser Microphone		
SM85	22	
Unidirectional Dynamic Microphones		
SM77, SM78 Series	23	
SM58	24	
SM56, SM57	25	
Musical Instrument and Head-Worn Microphones		
SM17, SM10A, SM12A, SM14A	26	
General Purpose Microphones	27-43	
About General Purpose Microphones	27	
Unidirectional Dynamic Microphones		
SM59	28	
SM62	29	
515 Series	30	
545 Series, 546	31	
565 Series	32	
586 Series	33	
588 Series	34	
55SH	35	
Omnidirectional Dynamic Microphones		
578, 579SB	36	
533 Series	37	
571, 575 Series	38	
Gooseneck Microphones		
515BG, 515SBG, 515SB-G18, 545L,		
561, 562, 572G	39	
Lavalier Microphones		
SM11, SM51	40	
570 Series, 545L, 580	41	
Surface-Mounted Microphones		
SM18 Series	42	
Taping Microphone		
SP19	43	
Communications Microphones	44-49	
About Communications Microphones	44	
Voice Processing Microphones		
VR230, VR300	45	
Mobile and Paging Microphones		
104C, 404B, 404C, 405K,		
414A, 414B, 514B, 407B,		
527B, 52TC	46	
401A, 401B, 488T, 577B	47	
Paging Base Station Microphones		
450, 522	48	
Amateur Radio Fixed Station Microphones		
444D, 528T Series II	49	
Microphone Accessories	50-59	
About Microphone Accessories	50	
Problem Solvers		
Windscreens		
Desk and Floor Stands		
Mounts and Adapters		
Cables, Brackets and Boom Extension Pipe	55	
Goosenecks, Lavalier Assemblies,		
Accessory Bag, Slide Rule and Calculator	56	
Power Supplies and Monitor Adapter	57	
Replacement Parts and Accessories		
Selection Guide	58-59	
Circuitry Products	60-68	
About Circuitry Products	60	
Mixers		
FP31	61	
M267	62	
M268	63	
M67, M68	64	
Gated Compressor Mixer	SE30	65
Automatic Microphone System		66-67
Stereo Preamplifier	M64	68
Circuitry Accessories	69	
Carrying Case, Rack Panels, Battery Power		
Supplies, Security Panel, Panel Lamp,		
Microphone Preamplifier	69	
Professional Phonograph Cartridges		
V15 Type V-MR, SC39 Series and SC35C	70	
Data Sheet Reference Guide		71
Index	72	
Shure...		
Quality is our First Consideration	73	
New Products From Shure!		
Please see the special Insert between pages 36 and 37		
for information on Shure's newest products:		
• FP11 and FP12		
• 838		
• SM90 and SM91		
• 512		
• 520D		
• SM98		

SHURE...a commitment to excellence

Shure microphones are singularly uniform. When you buy more than one, you automatically have a matched set—in sound, coloration, output level, frequency response, and pickup pattern. If you later buy another unit of the same model number, even in a different city (or in any of one hundred and fifty other countries in which Shure microphones are sold), it will be the performance twin of the original unit.

Let's consider the cable. Frequently, it can be a trouble spot so Shure gives it special attention. We anticipate the worst and test accordingly. We test samples from every production lot because we know the microphone will be dragged by the cable, and swung about by the cable. We also know that the cable will be stretched, stepped upon, tripped over, yanked, overflexed, and be generally misused and abused. Shure-developed flex and stretch testing equipment and procedures are state-of-the-art and have been adopted as industry standards by leading cable manufacturers.

Thoroughbred quality throughout

Shure microphones are sometimes copied in appearance, but they are never duplicated in performance and reliability.

Shure has always published both frequency response curves and complete polar patterns for its microphones (we were the first to do so) together with detailed specifications that are scrupulously accurate, conservative, and accompanied by all necessary reference figures. This is not always the case with other manufacturers or assemblers who often do not have the sophisticated equipment required for thorough and trustworthy analysis. You know the performance to expect from your Shure microphone—and the performance you'll get. You can make valid comparisons between models. Most importantly, Shure microphones perform up to or beyond published specifications—without exception!


No Shure microphone was designed overnight. Nor was quality and uniformity achieved instantly. Take the heart of the microphone, the transducer, for instance. It takes a minimum of two years of intensive development, design, and engineering. It must then be manufactured using carefully selected and monitored materials, with precise tolerances and exact relationships among interdependent parts. It is built using sophisticated equipment under the guidance of experienced specialists, so that there is identical conformance to specifications from one unit to the next. When finally assembled, it must pass a battery of demanding tests to insure its ability to maintain this high level of performance under severe conditions.

Every Shure microphone goes through all these steps. Such attention to detail is rare, because it is costly. Yet, this is the only way to assure the quality of a finished product upon which you will be depending for many years to come. We will not take cost-cutting short cuts. We never have. We never will.



S. N. Shure
Chairman, Board of Directors

Ultra-precise laser measurements.

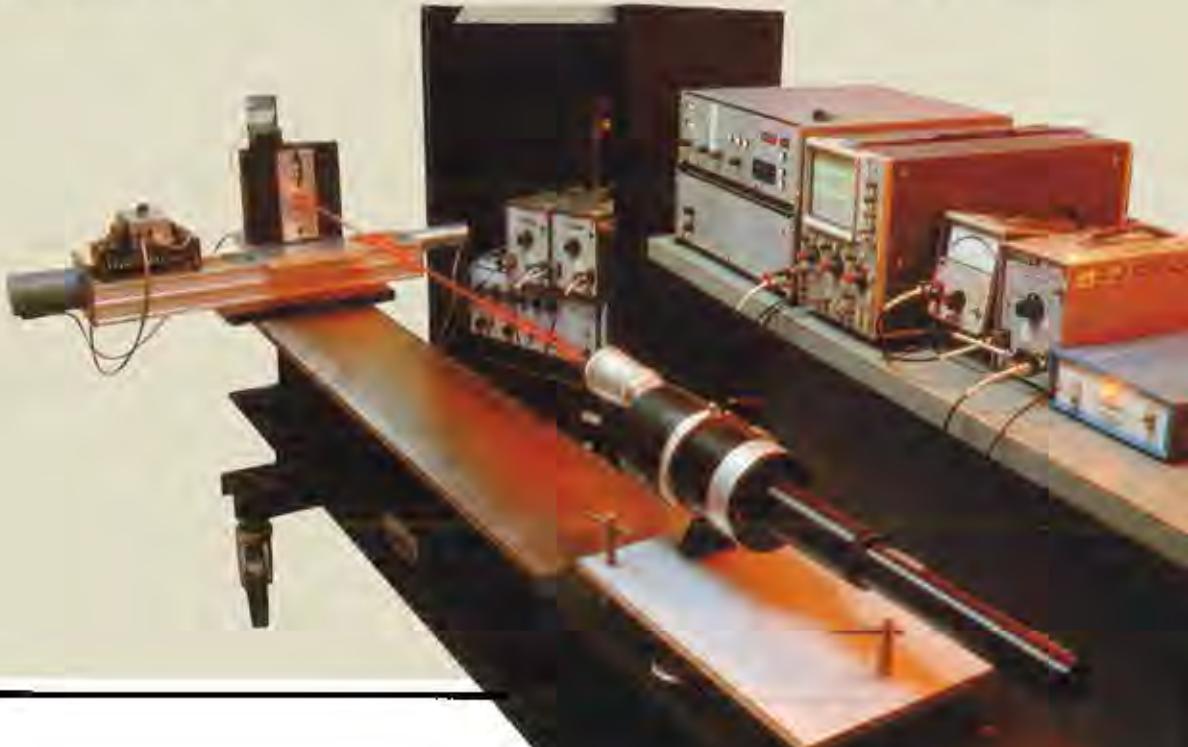

SHURE MICROPHONES: the sound you take for granted...because we don't



When a raging Cumberland River flooded Opryland U.S.A., many Shure microphones, as well as a large number of Shure amplifiers, mixers, and consoles, lay submerged in mucky water for days. When the waters receded, the sound technicians at Opryland washed the microphones and circuitry equipment with very hot, soapy water, rinsed them with hot water, blew out the water with compressed air, and submerged everything in a bath of LPS-1, a petroleum base de-wetting agent. Then, the equipment was kept under five 1000-watt studio lights day and night for three days at a temperature of 40.5°C (105°F). At the end of this ordeal, they worked!

Shure microphones have survived fires, car crashes, and earthquakes. Though scuffed up or burned externally, they still worked.

On-the-spot news teams daily cover fast-breaking stories under the worst possible conditions for their microphones—such as dense smoke and intense heat, rain, sleet, blowing debris, thundering shock waves of rocket launches, and unpredictable abuses by rioting crowds. From long experience, they know that their Shure microphones will work—and they do.

Professional vocalists depend upon their microphones much as musicians depend upon their instruments, but many don't hesitate to throw their Shure microphones across the stage and down on the floor—violently—as part of their live performances. They never give it a second thought. They know that Shure microphones shrug off abuse that would make others inoperative.

50 years of experience with microphones has taught us one thing: they are not always used under ideal conditions—far from it—so we develop, design, build, and test them for the worst conditions we can imagine.

We know they'll be called upon to function at humidity levels near 100%.

We know they'll be flung into equipment boxes after performances.

We know they'll be left in the direct rays of the mid-day sun for hours, awaiting important addresses by world-renowned dignitaries.

Speaking of dignitaries, every president since Herbert Hoover has used Shure microphones in situations as critical as war and peace announcements, as widely heard as inaugurations, and as important as news conferences. And yet, reliability and dependability are only part of the story.

Choice—not chance

Versatility in sound characteristics is another important Shure plus factor. There is no single "Shure Sound." Shure tailors the sound to the application.

For instance, if you are in public safety communications—a fireman, policeman, ambulance driver—you don't need, or want, high fidelity across the audible range. What you do need is highly intelligible sound in the speech range, coupled with exceptional reliability under the most adverse conditions. Shure's landmark pioneering with CONTROLLED MAGNETIC® microphone elements for use in gun turrets of battleships and inside tanks during World War II formed the basis of ongoing research and development in the highly specialized area of speech intelligibility. That is one kind of "Shure Sound."





If you are a performer, your special needs are entirely different. As a vocalist, you may want the crisp sound that comes from the carefully placed presence peak of the Shure Unidyne or Unisphere dynamic series or the new SM87 Condenser Microphone—another "Shure Sound."

As an instrumentalist, you may want the unaccentuated smoothness of the Shure SM59 Dynamic Microphone or SM81 Condenser Microphone.

Shure gives you a choice of sounds.

Shure also gives you the widest choice of other options, including polar patterns (cardioid, super-cardioid, omnidirectional, bi-directional); configurations (hand-held, stand-mounted, gooseneck, lavalier, desk-top, boom-mounted); and a host of other features such as built-in windscreens, shock mounts, on-off switches, response modification switches, cables, and even case colors.

The first Shure catalog—dated 1932—was 2 pages. This one is 72 pages. There are over 150 microphones described in this catalog. No one person or installation needs them all. But because of this wide selection—the broadest in the world—you will find the models that

are right for you. Wherever you are using a microphone—on stage; in recording; in an auditorium, concert hall, or meeting room; in a moving vehicle; on the ground, in the air, or on the sea; Shure offers you the broadest selection in the world. And to simplify selection, we offer suggestions for the most appropriate applications in the section where each microphone is individually described as well as easy-to-use charts on pages 6 and 7. If you have a special sound problem write our "Customer Services" department (or call 312/866-2553) and we'll call you back with an answer.

Shure took microphones out of the category of delicate instruments and made them practical, rugged tools for everything from a hard rock concert to an open-air symphonic concert.

If you are not a trained professional, Shure goes to great lengths to provide singular ease of use combined with rugged reliability.

The cardioid pickup pattern—first made practical by Shure in the late thirties—is very "forgiving" in the hands of an amateur. Shure found how to make this pattern symmetrical about the axis and uniform in response at all frequencies and in all planes, so the positioning of the microphone relative to the user is not critical. It's possible to move from side to side without causing audio chaos—such as extreme changes in volume or distracting changes in coloration. Feedback problems are minimized—even when an amateur is riding the gain.

In the hands of an experienced user, the same microphone has such uniform and predictable characteristics that it can be worked like a fine musical instrument—close to the mouth for accented proximity effect, farther away for smooth diminuendos . . . or it can be "aimed" at the subject of an impromptu, on-the-run news interview with assurance of clear, intelligible sound.

Shure microphones are built to take hard knocks and prolonged vibrations. Pack them in the trunk of a car with no special protection and drive dusty back roads in searing summer heat, or travel the length of the Alcan Highway in winter with assurance that they will perform when their time comes. In fact, you can drop them six feet onto a hardwood floor. (Shure does just that as a standard test . . . more about that and other tests on the inside back cover.)

MICROPHONE SPECIFICATIONS... and what they mean

The specifications provided for each Shure microphone in this catalog are not "laboratory standards" or theoretical figures developed in optimum acoustic environments...they are consistently accurate measurements of the performance you can expect from actual production models. By reviewing and comparing

specifications, you will be able to select the proper Shure microphone that best meets your performance requirements.

Below is a sample listing of Shure microphone specifications—along with the frequency response and polar patterns—taken from the SM58. Because specifications are worded in technical terms,

Microphone Types:

Shure Microphones are classified by the principle of operation of the microphone cartridge, i.e., the method by which the microphone converts acoustical energy to electrical energy.



Dynamic: In a dynamic microphone, a coil of wire, fastened to a diaphragm moves in a magnetic field in response to sound waves arriving at the diaphragm. This motion induces minute voltages in the coil. These voltages constitute the electrical output of the microphone.

Shure dynamic microphones are capable of response to the full range of audio frequencies and are designed for every use from studio recording to CB radio. These microphones are not only rugged, but also reliable under all conditions of heat and humidity, indoors or out.

Ribbon: Similar to the dynamic, the ribbon microphone has a thin strip of metal foil that functions as both a diaphragm and voice-coil. Magnetic signals are induced in the ribbon as it moves through a magnetic field in response to sound waves.

Shure ribbon microphones are excellent for both voice and music for indoor broadcast recording and sound reinforcement. They provide superior sound fidelity and are quite rugged, except for their susceptibility to damage from fast-moving air currents. This limits them to indoor use.

Condenser: The diaphragm in a condenser microphone serves as one plate of a variable capacitor. Diaphragm motion due to sound waves varies the spacing between the capacitor plates, changing the capacitance and, through additional circuitry, generating minute voltage changes. This mode of operation requires an integral impedance-converting preamplifier and external power source.

Shure condenser microphones have earned the reputation of being among the most rugged and reliable condenser microphones in the industry. Their exceptional performance and features make them ideal for voice or music in applications where the highest quality sound is required.

CONTROLLED MAGNETIC[®]: CONTROLLED MAGNETIC[®] microphones contain a diaphragm that moves an iron armature which conducts a magnetic field through a stationary coil to generate an electrical signal. The frequency response is generally "tailored" excluding both very low and very high frequencies, to suit the requirements of voice communications systems.

Shure CONTROLLED MAGNET C[®] microphones are ideal for radio communications and paging systems where reliable performance and modest price are prime considerations. They are extremely rugged, provide high output, and can be used under all conditions of heat and humidity, indoors and out.

Ceramic: In ceramic microphones, diaphragm movement is coupled to a ceramic element having piezoelectric properties—the ability to generate a voltage as a result of applied force. The stress on the ceramic element results in the generation of minute voltage variations between surfaces of the element. Shure ceramic microphones are good general-purpose types with limited high-frequency response.

Carbon: Oldest of all microphones, the carbon microphone has a cylindrical cavity containing tiny carbon granules suspended between a conductive diaphragm and a conductive backplate. Sound waves striking the diaphragm compress the granules, varying their resistance to a current from a battery or external power source. The changing resistance modulates the current, resulting in an audio output voltage.

Shure carbon microphones have a tailored frequency response, making them ideal for use in communications systems. They are quite rugged, with high output, and can be used in virtually any environment.

Frequency Response Curve:



The frequency response curve shown for each Shure microphone provides an accurate picture of the microphone's range and response. The curve represents the output voltage, expressed in dB (decibels) versus frequency in hertz. Note that the frequency scale is truly logarithmic, the voltage scale is uniform, and the scales are in the proportion recommended by the Electronic Industries Association (EIA). Where important to proper usage of the microphone, Shure response curves show normal response, response at closer distances, and selectable response effect.

Polar Pattern Charts:

Polar patterns are a visual representation of a microphone's pickup pattern: unidirectional (cardioid); omnidirectional; bidirectional—see Page 5 for an explanation of the importance of directionality. Because directional characteristics may vary with frequency, Shure shows the pickup pattern at several frequencies—often as many as six frequencies.

Actually, most Shure unidirectional and bidirectional microphones have pickup patterns that are uniform about their axes. For instance, imagine a perfectly round balloon—now, poke your finger into one side of it and push in hard...the resultant configuration closely represents the symmetrical pickup pattern of a cardioid microphone.

Ideally, this pattern should be broad at the front, uniform at all frequencies—with uniform sound quality at any point within the pattern, off axis as well as on-axis. Otherwise, movements of the performer about the axis tend to distort the sound. Shure microphones come very close to reaching the ideal...their patterns are uniform with frequency and symmetrical about the axis.

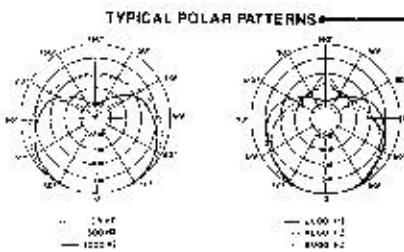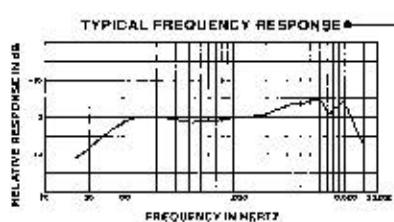

their meanings may be misunderstood by the nonprofessional.

For this reason, we have provided a brief explanation of each of these terms in nontechnical language, to clarify their meaning and thereby better enable you to select the microphone most in line with your application requirements.

Frequency Response:

This is the relative output of the microphone at all frequencies in the audio spectrum, specified in a range, such as 50 to 15,000 Hz (hertz). Because of the variety of microphone applications, the frequency response and range are usually "shaped" or "tapered" to some particular use. For instance, a musical instrument microphone is ideally "flat" across its full range, whereas a vocal microphone may have a "presence peak" in its voice-frequency area, so that the voice stands out from the instruments.

Similarly, microphones for musical instruments are "wide range" to capture the full output, including rich overtones and harmonics of the instruments. The frequency response of a communication microphone is carefully tailored to the wide-frequency spectrum to eliminate unwanted high- and low-frequency background noise.

Polar Pattern:

The relative sensitivity of a microphone to sounds arriving from different directions is collectively referred to as its polar or pickup pattern. A **non-directional** or **omnidirectional** microphone displays little variation in output voltage as a sound source moves around it. The **unidirectional** type of microphone is least sensitive to sounds originating at its rear has reduced sensitivity to sounds from its sides, and is most sensitive to sounds from the front. The most common form of this microphone is the **cardioid** (heart-shaped) pattern, which has a null at its rear and is half as sensitive to sounds arriving from the sides as to sounds from the front. The **supercardioid** microphone is somewhat more directional, being about 40% as sensitive to sounds from the sides and rear as it is to sounds from the front. **Bidirectional** (figure-eight) microphones are equally sensitive to sounds from the front and rear, and least sensitive to sounds from the sides. A special case of directionality is the **noise-canceling** microphone; in addition to being insensitive to sounds from the sides, it discriminates against distant sounds in favor of near sound sources.

Impedance Rating:

Selecting the proper microphone impedance versus the input impedance of a mixer, amplifier, or recorder is done for: (1) maximize the microphone output signal; (2) preserve the full frequency response; and (3) minimize pickup of unwanted signals. In general, for optimum performance, the **actual** equipment input impedance should be five to 10 times that of the microphone.

Microphone impedance is specified as a rating or rated number lowered by the actual impedance in ohms. Common ratings are 150 ohms (actual impedance may be from 75 to 300 ohms), 600 ohms (actual impedance from 300 to 1,200 ohms), 2,400 ohms (actual impedance from 1,200 to 4,800 ohms), and high impedance (actual impedance greater than 10,000 ohms).

High-impedance microphones have a higher signal voltage than low-impedance microphones, but are more susceptible to hum and buzz pickup and high-frequency loss in their cables. For this reason, high-impedance microphones are generally limited to cable lengths under 20 feet. For longer cable runs, low-impedance microphones will avoid these problems.

Output Level:

The output level (or sensitivity) of a microphone is an expression of the voltage or power output for a given sound pressure. The **open circuit voltage** is an "unloaded" figure, that is, there is no voltage drop due to the measuring instrument. The output is specified in both volts and decibels (dB) for convenience. A typical open circuit voltage for a low-impedance microphone could read -60 dB re 1V/microbar, or -80 dBV. This means that for a sound pressure of 1 microbar (74 dB SPL—the pressure produced by a normal speaking voice two or three feet away), the unloaded output voltage would be -80 dB with 0.01 dB equal to 1 volt. A less sensitive microphone would have a larger negative dB number (e.g., -82 dB) and a more sensitive microphone would have a smaller negative number (e.g., -78 dB).

In general, the open circuit voltage of high-impedance microphones is about 10 times (20 dB) greater than that of low-impedance microphones and the impedance is about 100 times greater. The significantly lower impedance of low-impedance microphones enables the use of long cables without signal loss or change in frequency response.

(Note: If additional specifications and technical description of a particular Shure microphone are required, write Shure Brothers, Attention: Customer Services, requesting the technical data sheet of that model. For a complete list of the Shure microphone and circuitry product data sheets and their corresponding "ordering number," please refer to page 71.)

SM58

Model:	SM58
Frequency Response:	50Hz - 15,000Hz
Polar Pattern:	Cardioid
Impedance Rating:	600 ohms
Output Level	Open Circuit Voltage: -50dB re 1V/microbar (38mV) -60dB re 1V/microbar (30mV) -70dB re 1V/microbar (22mV)
Power Level:	-25dB re 1mW (0.0001W)
Cable:	SM58-S: 15' long low conductivity shielded with three soldered conductors. Includes one male XLR connector, one 1/4" TRS connector, and a three-conductor audio connector to the microphone end and premium male six-pole XLR connector to equipment.
Dimensions:	162mm L x 40mm Dia. (6.35 x 1.57 in.)
Net Weight:	290 grams (10 oz.)
Packed Weight:	14.075 lbs. (6.37 kg.)
Supplied Accessories:	Swivel adapter, carrying bag, vinyl storage bag.

The **power level** is supplied with a matched load, for instance, an actual 200 ohm microphone matched to an actual 200-ohm amplifier input impedance. A power level for this microphone might be -80 dB re 1 mW/10 microbars. This means that the maximum power delivered is -60 dB with 0 dB equivalent to 1 milliwatt for a 10-microbar sound pressure (94 dB SPL). Note that the power output for a microphone with either low- or high-impedance would be about the same.

Hum Pickup/mOe:

Hum (60 Hz or its harmonics) from fluorescent lights, amplifiers, power cables, and other electromagnetic sources can be picked up by a microphone voice coil, transformer, or by an ungrounded or unshielded case. A hum bucking coil greatly reduces pickup of magnetic hum, and careful attention to grounding and shielding in the design reduces hum pickup through the case.


Magnetic hum pickup is specified as sound pressure equivalent (expressed in dB SPL) from a million oersted (mOe) hum field. For instance, a hum pickup of 17 dB equivalent SPL means that the microphone's hum output will be the same as from an acoustic source of 17 dB SPL, a soft whisper about 3 feet away. A 1 million oersted field roughly corresponds to the hum fields found in a typical studio environment.

Cable:


Cables supplied with Shure low-impedance microphones are generally a two-conductor shielded balanced line cable. The equipment ends of these cables are either equipped with a three-pin professional, and no connector to male 1/4" Carron XL series, Switchcraft A3 (C.C.) series, or equivalent connectors, or are bare leads, thus enabling the user to match the connector required to properly mate with the equipment.

Cables supplied with Shure high-impedance microphones are generally single conductor shielded. The equipment ends of these cables are either equipped with a standard phone plug or have no connector.

SELECTION GUIDE FOR SHURE PROFESSIONAL MICROPHONES

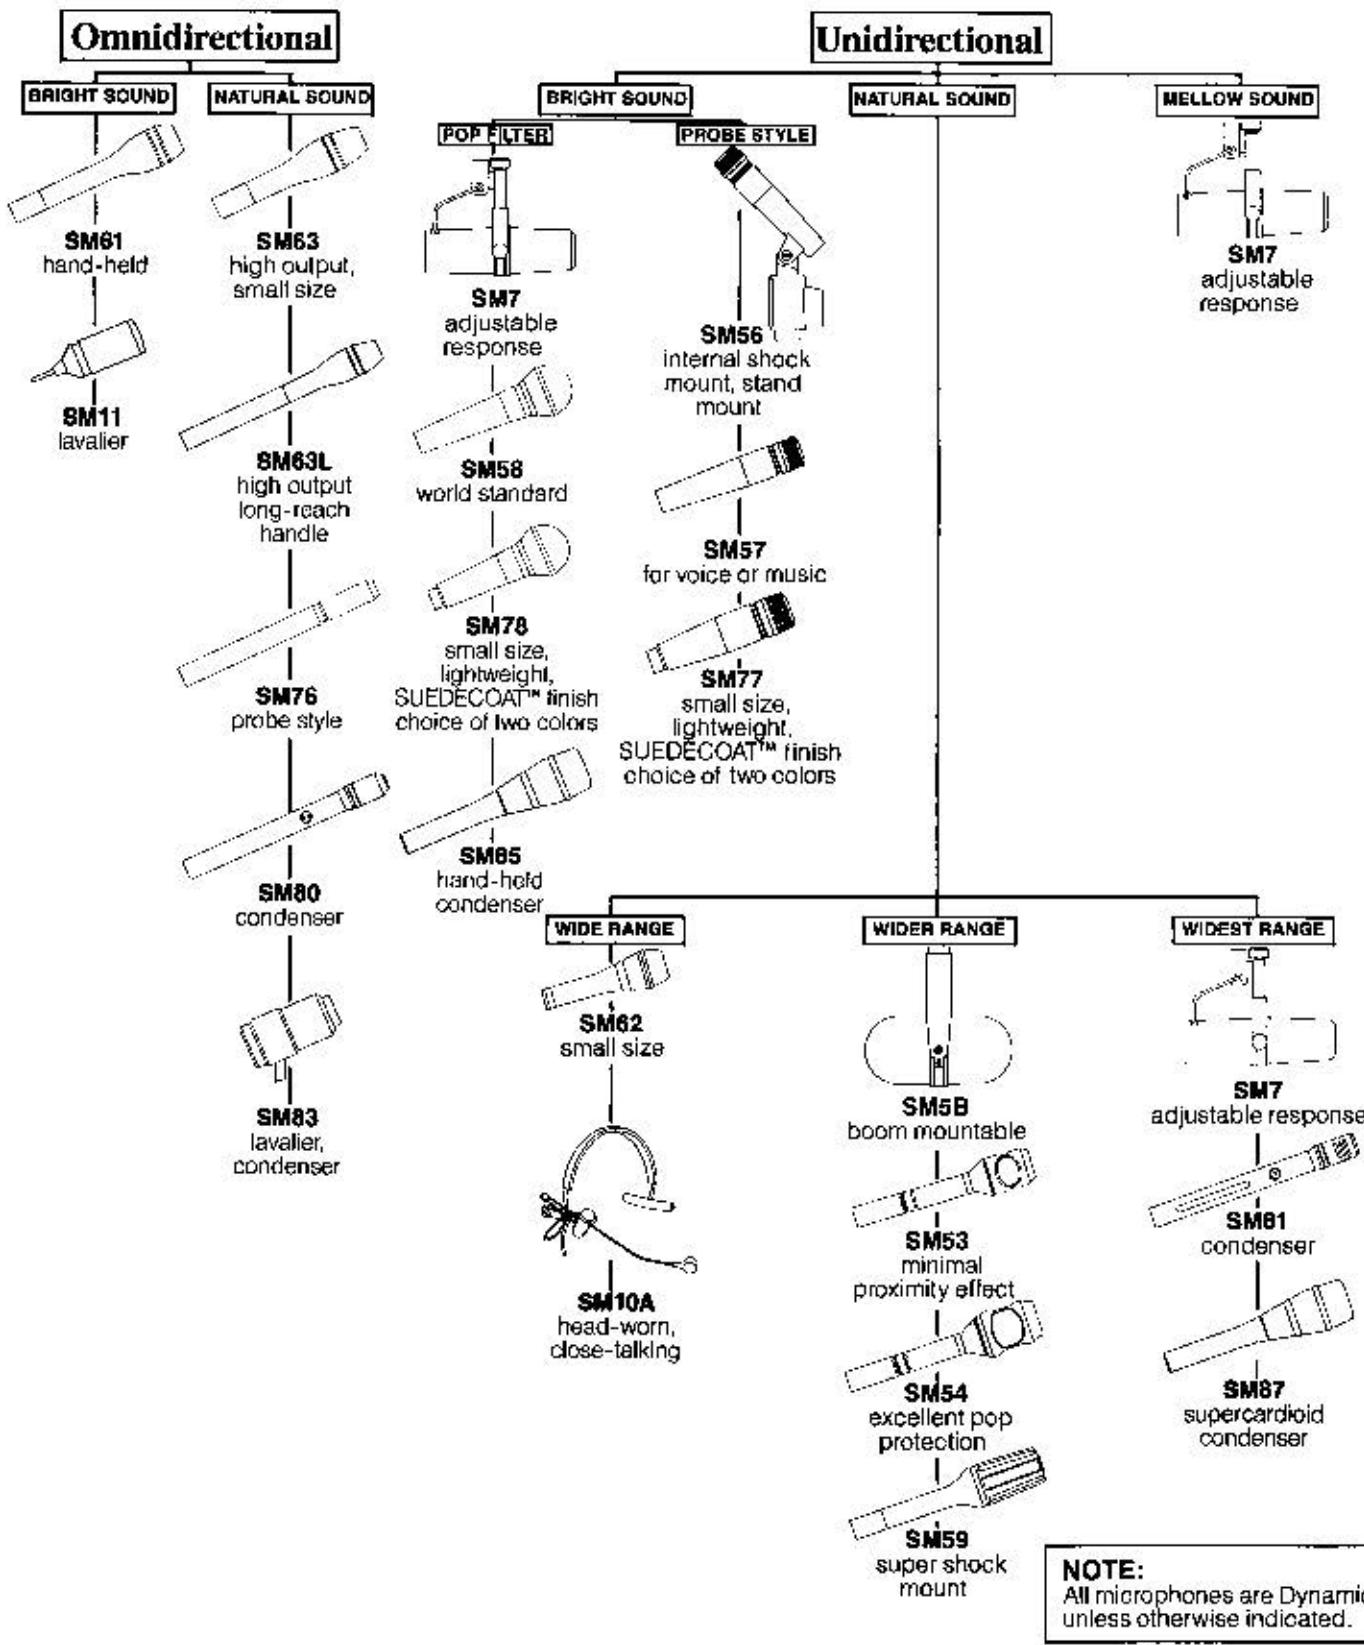

SELECTION GUIDE FOR SHURE GENERAL PURPOSE MICROPHONES

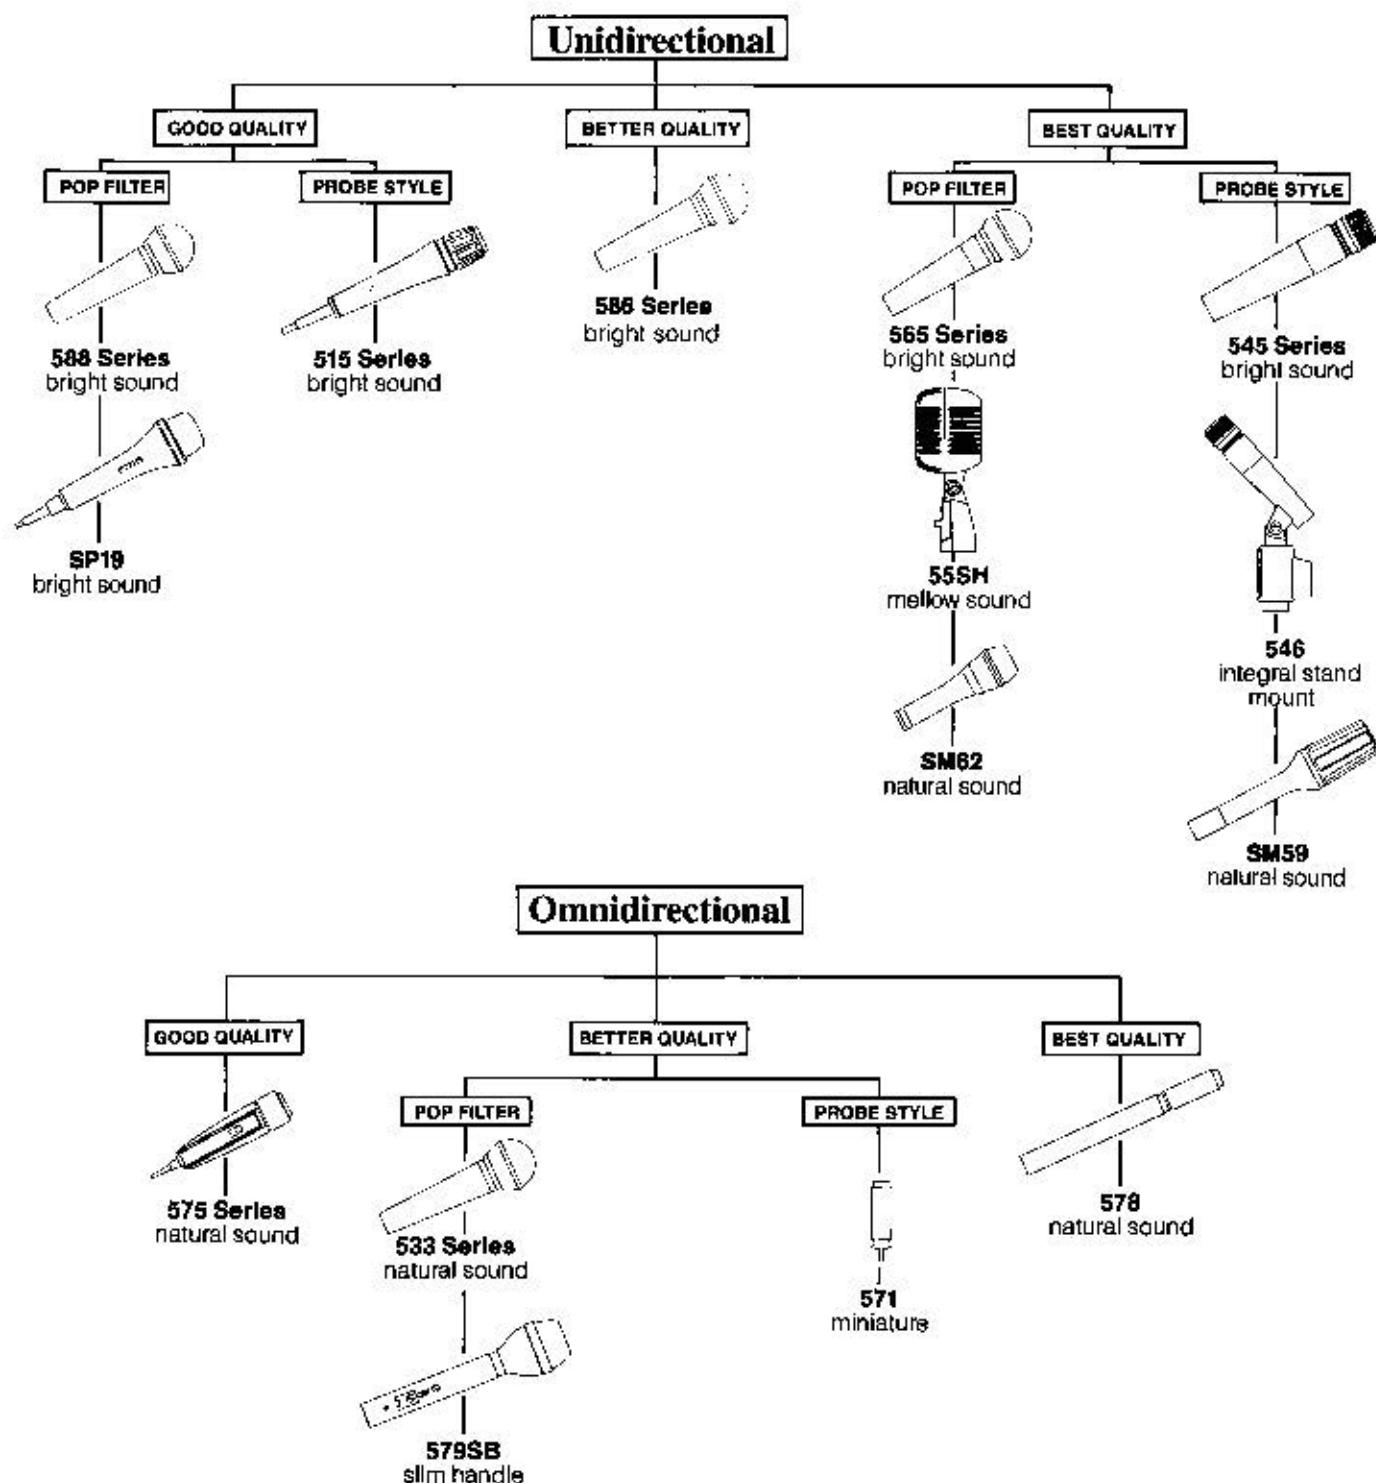

ABOUT SHURE PROFESSIONAL STUDIO MICROPHONES

The microphones featured in this section were engineered specifically for professional use in broadcasting, recording, motion picture and highest quality sound reinforcement systems. You'll find a complete line of microphones, each with a distinctive sound or physical characteristic optimized for particular applications, voices, or effects. For outstanding performance in applications as diverse as radio and TV, studio recording, hotel and auditorium sound reinforcement, and legislative chambers, professionals choose, and use Shure.

All professional studio microphones are made to strict quality control standards, ensuring consistent performance in each model series. All are finished in an extremely durable, non-glare finish that resists chipping and peeling. All are balanced, low impedance and are equipped with three-pin professional audio connectors.

In addition to the Professional Studio Microphones found in this section, you may wish to examine the microphones found in the rest of this catalog, particularly in the Professional Performance Microphones Section. (Page 19)



The Shure SM63I (Page 12) The hard-working microphone for the working areas.



On-camera talent like the SM83 (Page 17) because its electronics provide for a dip in the mid-range giving both male and female voices a smoother, more natural sound.



The Shure SM62 (Page 16) Cardioid Condenser Microphone - It's the on-the-line level microphone tough enough for the rigors of day-to-day remote E&C broadcast assignments.

PROFESSIONAL STUDIO/unidirectional dynamic microphone

SM5B

Specifically designed to minimize boom microphone problems in television and motion picture sound stage and location recording. Also excellent for voice-over and radio D.J. use. A smooth, wide-range frequency response with moderate presence rise makes it especially suitable for vocal pickup as well as scoring assignments. The SM5B has a cardioid pickup pattern with exemplary off-axis uniformity, even at the extreme low end, giving minimal coloration and maximum rejection of unwanted sounds.

A highly effective integral windscreens completely surrounds

the microphone suspension elements to provide maximum wind noise suppression with fast boom swings or in outdoor locations. A humbucking coil and a balanced circuit combined with an absence of transformers and response-correcting inductors make the SM5B highly resistant to electrical noise, even in extreme hum fields around studio or stage lighting.

The exposed metal parts of the microphone are finished in unobtrusive non-glare dark gray; the front windscreens is light gray open-cell foam; the rear is dark gray foam.




specifications


SM5B

Model:	SM5B
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	150 ohms
Output Level:	
Open Circuit Voltage:	0.11 mV (-79 ± 6, 0 dB = 1 V/ μ bar)
Power Level:	57.5 dB C 4 dB -1 mW/10 μ bar
Hum Pickup/m0e:	24 dB SPL equivalent
Connector:	Three-pin professional audio
Dimensions:	206 mm H x 25.7 mm W x 128 mm D (8-3/16 x 9-29/32 x 5-1/32 in.)
Net Weight:	964 grams (2 lb. 2 oz.)
Packaged Weight:	1.98 kg (4 lb. 8 oz.)
Supplied Accessories:	Boom adapter, boom adaptor
Optional Accessories:	See Page 58

TYPICAL FREQUENCY RESPONSE,
SM5B

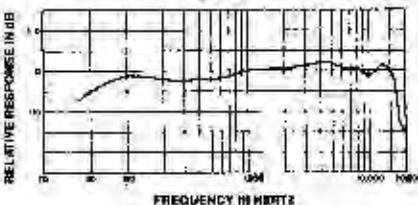

TYPICAL POLAR PATTERNS, SM5B

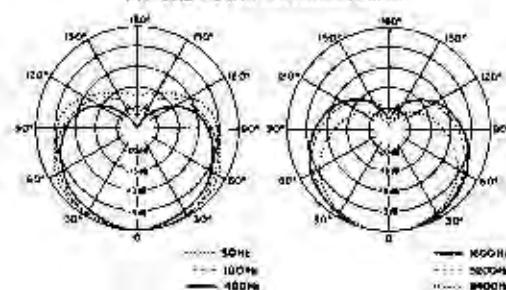

PROFESSIONAL STUDIO/unidirectional dynamic microphone

SM7

The SM7, designed in conjunction with professional users, is among the finest studio professional dynamic microphones in use today. Its "smooth and silky" sound has made it extremely popular for voice-over recording in radio and television work. It is also an excellent microphone for use with either instruments or voice in multi-track recording situations.

It features a wide-range, very smooth frequency response with graphic response-tailoring switches to permit the choice of four different microphone response curves: (1) flat response from 40 to 16,000 Hz; (2) midrange boost (presence peak) for enhanced speech or vocal intelligibility (+3 dB at 3,000 Hz); (3) low-frequency rolloff for natural close-up miking (-6 dB at 100 Hz); (4) combination response with both midrange boost and bass rolloff. The slide switches provide a visual indication of the response selected (as shown at right). The microphone is supplied with a switch cover plate to guard against accidental switching.

The SM7 has an accurate, symmetrical cardioid pickup pattern, uniform with frequency. It provides maximum rejection of unwanted background noise along with minimum coloration of off-axis sound.

The microphone is designed for boom or stand mounting. Mechanical noise is reduced by a Shure-patented air suspension integral shock mount; outdoor wind and moving boom noise as well as breath pop in close-up use are minimized by the integral foam windscreens, and electrical hum pickup is canceled by the built-in humbucking coil. A rigid metal case under the foam windscreens makes the SM7 extremely rugged. Exposed metal parts are non-glaud dark gray enamel; foam is dark gray.



VISUAL RESPONSE TAILORING

Flat Response

Bass Rolloff



Presence Boost

Presence Boost and Bass Rolloff

specifications

SM7

Model:	SM7
Frequency Response:	40 to 16,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	150 ohms
Output Level:	
Open Circuit Voltage:	0.11 mV (-79.0 dB, 0.00 - 1V/mbar)
Power Level:	-57 dB, 0 dB, +1 mW (16 ohms)
Hum Pickup/mdb:	13 dB SPL equivalent
Connector:	Three-pin unbalanced audio
Dimensions:	143 mm (1 x 191 mm W x 96 mm D), (5.27/32 x 7 1/32 x 3 25/32 in)
Net Weight:	761 grams (1 lb. 11 oz.)
Packaged Weight:	2.04 kg (4 lb. 8 oz.)
Supplied Accessories:	Switch cover plate, front-linen storage/carrying case
Optional Accessories:	See Page 59

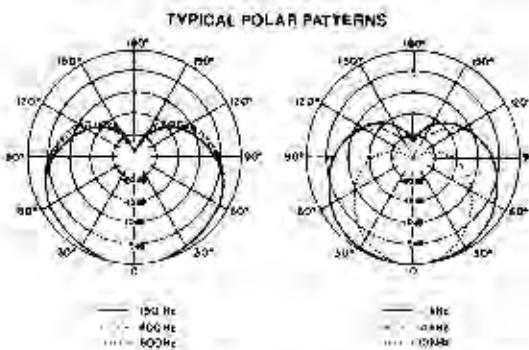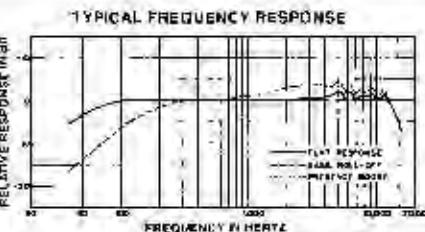

PROFESSIONAL STUDIO/unidirectional dynamic microphones

SM53 and SM54

Two versatile studio-quality microphones combine a smooth, wide-range, flat frequency response without strident peaks or false coloration—plus excellent noise rejection. They are highly recommended for use in recording, broadcasting, and high quality sound reinforcement.

Both microphones feature an additional acoustic port for improved low-frequency directional control which effectively reduces proximity effect (the increase in bass response when a microphone is used close up). They also feature a broad front working angle that provides constant tone quality despite user movement. This insures uniform sound quality even when the performer-to-microphone position and distance varies throughout a performance.

The SM53 and SM54 can be hand-held, stand-mounted, or used in an overhead boom. The special internal shock mounting reduces susceptibility to mechanical noise, and an internal humbucking coil prevents interference from strong hum fields, even for distant pickup applications. Their cardioid polar response is uniform over a broad frequency range so off-axis reflections, reverberation, and background noises can be controlled. Further, low-frequency background noise can be suppressed by means of a switch-selectable bass rolloff. Both microphones provide extraordinary ruggedness and are finished in durable champagne enamel.

SM53-LC Without cable.

SM54-LC Without cable. Same as SM53 LC but features an ultra-effective built-in "pop" and wind-blast filter that provides truly exceptional suppression of breath and wind noises.



specifications


SM53 and SM54

Models:	SM53 and SM54
Frequency Response:	70 to 16,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	150 ohms
Output Level	
Open Circuit Voltage:	0.09 mV (-81.0 dB, 0 nB = 1 V/dB)
Power Level:	-65 CdB, 0 dB = 1 mW/10 μBar
Hum Pickup/mΩ:	13 dB SPL equivalent
Connector:	Three-pin professional audio
Dimensions:	SM53: 182 mm L x 38 mm Dia. (7-5/32" L x 1-1/2" Dia.) SM54: 194 mm L x 44 mm Dia. (7-5/8" L x 1-3/4" Dia.)
Net Weight:	241 grams (8½ oz.)
Packaged Weight:	1.06 kg (3 lb)
Supplied Accessories:	Swivel adapter, foam-lined storage/cleaning case
Optional Accessories:	See Page 59

TYPICAL FREQUENCY RESPONSE, SM53, SM54



TYPICAL POLAR PATTERNS SM53, SM54

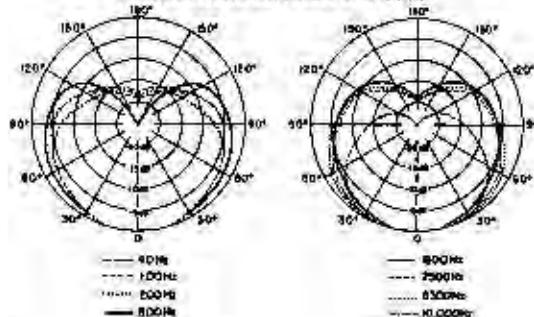

SM63 and SM63L

The SM63 is a small, elegant, rugged microphone with very high output — up to 6 dB higher than comparable omnidirectional microphones. Its low profile (so it won't obscure the performer's face) makes it the perfect choice for on-camera applications. Its design and light weight make it easy to hold and reduce performer fatigue, even when it's continuously handheld throughout long studio sessions.

The SM63 is particularly well-suited to handheld vocal and electronic news gathering applications. The smooth, extended frequency response provides a clear, crisp sound and a low-frequency roll-off gives natural sounding pickup with the absence of any "boominess." The Shure-designed and patented mechano-pneumatic shock mount isolation system cuts handling noise to an unobtrusive level and an effective humbucking coil rejects the strong magnetic fields found in broadcast situations and near-stage lighting.

SM63



SM63L



specifications

SM63 and SM63L

Model:	SM63 and SM63L
Frequency Response:	50 to 20,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	150 ohms
Output Level:	
Open Circuit Voltage:	0.18 mV (-76.0 dB, 0 dB = 1V/μbar)
Power Level:	-56.6 dB, 0 dB = 1mW/10 μbar
Hum Pickup/mΩe:	13 dB SPL equivalent
Connector:	Three pin professional audio
Dimensions:	SM63: 145 mm L x 23 mm Dia. (5 11/16 x 1 1/4 in.) SM63L: 233 mm L x 33 mm Dia. (9 3/16 x 1 7/8 in.)
Net Weight:	SM63: 39 grams (3.5 oz) SM63L: 74 grams (4.2 oz)
Packaged Weight:	SM63 - LC: 567 grams (1 lb 4 oz) SM63 - C: 592 grams (1 lb 5 oz)
Supplied Accessories:	Swivel adaptor
Optional Accessories:	See pg. 59



The integral wind and pop filter is extremely effective for normal wind and breath pop noise; however, for adverse wind and pop conditions, the SM63 is furnished with an accessory dual-density, two-layer windscreens. The SM63 also features the Shure developed VFRAFLEX® grille. This grille is nearly indestructible as it is impervious to rust, moisture and denting.

The SM63L is, in every way, the technological equal of the SM63. This model features an extra long, streamlined handle (90 mm [3 1/2 inches] longer than the SM63), making it an exceptional choice for handheld interviewing and electronic news gathering assignments. The longer handle gives the reporter, interviewee or talk show host extra reach, while its superior balance enables the user to hold the microphone in a natural, relaxed position, reducing hand and arm fatigue.

Both the SM63 and SM63L offer an innovative blend of handsome appearance and broadcast quality performance. They are beautifully finished in durable champagne enamel and are supplied with matching swivel adaptor.

SM63-LC without cable

SM63L-LC Same as SM63-LC but features 90 mm (3 1/2 inch) longer handle, without cable

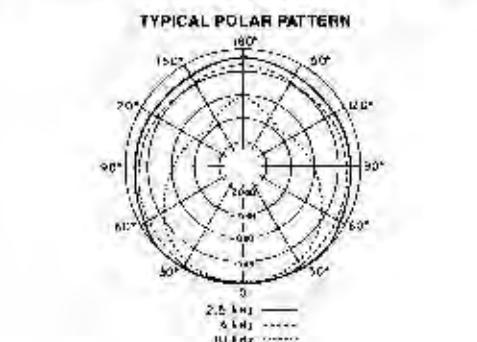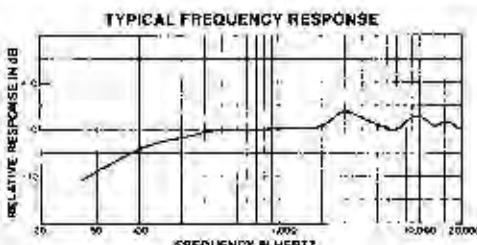

PROFESSIONAL STUDIO/omnidirectional dynamic microphones

SM61

The SM61 is a lightweight microphone with a smooth, wide frequency response, plus a Shure-patented shock mounting system, an effective built-in "pop" screen, and a VERAFLEX® grille. It is well-suited for applications as diverse as remote broadcast interviews or sports coverage to onstage and television hand-held use. The SM61 is finished in champagne enamel and is supplied with a matching swivel adapter. Supplied cable has three-socket connector at microphone end only.

SM61-CN Same as SM61 but cable has a professional three-pin audio connector at the equipment end.

SM61-LC Same as SM61 but without cable.

SM76

A slender microphone with an extremely wide, smooth frequency response, the SM76 is ideal for studio and remote use in television, radio, and professional recording, and is suitable for pickup of instruments as varied as a delicate acoustic guitar and a full-throated pipe organ. The inconspicuous dark gray enameled steel case can be hand-held or used on a stand, indoors or out. Although lightweight, the SM76 is dependable and extremely rugged—it will continue to perform up to its original specifications even after long term rigorous use. Supplied cable has three-socket connector at microphone end only.



specifications

Model:

SM61

Frequency Response: 50 to 14,000 Hz

Polar Pattern: Omnidirectional

Impedance Rating: 150 ohms

Output Level

Open Circuit Voltage: 0.08 mV (-82.0 dB, 0 dB = 1V/ μ bar)

Power Level: -60.5 dB, 0 dB = 1 mW/10 μ bar

Cable:

6.1 m (20 ft) two conductor shielded with three-socket professional audio connector at microphone end

Dimensions: 181mm L x 40mm D a. ($7\frac{1}{4}$ " x $1\frac{1}{2}$ " d.)

Net Weight: 147 grams (5.2 oz.)

Packaged Weight: 307 grams (2 lbs.)

Supplied Accessories: Windscreen, swivel adapter, vinyl storage bag

Optional Accessories: See Page 59

SM76

45 to 20,000 Hz

Omnidirectional

Dial: 38/150 ohms

0.24 mV (-88.0 dB, 0 dB = 1V/ μ bar) 38 ohms

0.30 mV (-81.5 dB, 0 dB = 1V/ μ bar) 150 ohms

-61.0 dB, 0 dB = 1 mW/10 μ bar

6.1 m (20 ft) two-conductor shielded with three-socket professional audio connector at microphone end

210mm L x 19.6 mm (8W \times 3/8 in.)

198 grams (7 oz.)

964 grams (2 lbs. 2 oz.)

Swivel adapter, foam-lined storage/carrying case

See Page 59

TYPICAL FREQUENCY RESPONSE, SM61



TYPICAL FREQUENCY RESPONSE, SM76



PROFESSIONAL STUDIO/unidirectional condenser microphone

SM81

A matchless standard in high-quality professional condenser microphones, the SM81 is a superb studio instrument that also meets the most demanding needs of location recording and sound reinforcement. Use it for instrument pickup on drums, acoustic guitars... even cathedral pipe organs, or as an overhead microphone for orchestras and choirs. And, the SM81 is the only high performance, professional quality condenser microphone at a price affordable for home semi-pro recording studios.

Years of design research and operational testing have resulted in a microphone of optimum performance and dependability. Until the introduction of the SM81, condenser microphones commonly failed under field extremes of temperature, humidity or physical punishment. The SM81 not only survives these conditions, but maintains its standards of excellence despite the environment.

The extremely wide-range, flat frequency response of the SM81 means exceptionally accurate operation in recording, broadcast and sound reinforcement. And low-frequency response can be selected to match the application: choose either flat for ideal mixing conditions, 6 dB/octave rolloff at 100 Hz to compensate for close-miking proximity effect, or 18 dB/octave cutoff at 80 Hz for reduction of low-frequency disturbances such as wind, air-moving equipment or stage traffic noise. The SM81 handles up to a whopping 135 dB maximum SPL without clipping, and has a built-in selectable 10 dB attenuator to allow operation at up to 145 dB SPL.

The SM81 also features a unique backplate structure designed to maximize signal-to-noise ratio and insure long-term charge stability. This high signal-to-noise ratio and a controlled directional pickup pattern offer outstanding "reach" (the ability to pick up distant sound while reducing unwanted noise) and discrimination (the rejection of unwanted sound or noise).

The SM81 exhibits unusually low total harmonic distortion below its clipping point—significantly below that of other professional condenser microphones. It's quiet, too; handling and stand-borne noise and internal electrical noise are minimal. And special shielding keeps RF susceptibility extremely low for elimination of hum and buzz.

Incredibly rugged and durable, the SM81 is capable of withstanding extreme physical abuse, while maintaining the high

quality performance expected from a studio condenser microphone. The transducer and electronics housing are of heavy-wall steel construction and all internal components are rigidly supported for maximum strength. Rugged enough for road tours, the SM81 is designed to withstand 6-foot drops onto a hardwood floor without significant performance degradation or damage to the case. It's reliable over a temperature range of -20° to +160°F at relative humidity from 0 to 95%.

The SM81 can be simplex (phantom) powered from the Shure PS1 and PS1E2 power supplies, or any standard voltage (12 to 48 Vdc) available from most recording consoles. (For more information and specifications on the PS1 and PS1E2 see the accessory section of this catalog.)

The SM81 has it all: performance... quality... reliability. In electronic, acoustic and mechanical design, it's truly the state-of-the-art. Supplied cable has three-socket connector at microphone end and three-pin connector at equipment end.

SM80/Omnidirectional Condenser Microphone

The SM80 is an omnidirectional version of the SM81 designed for the most demanding professional applications in studio recording, broadcasting and sound reinforcement. It offers the same performance features, ruggedness and reliability that the SM81 is noted for.

SM80-CN	Omnidirectional condenser microphone supplied with cable
SM80-LC	Omnidirectional condenser microphone supplied without cable
SM81-CN	Unidirectional condenser microphone supplied with cable
SM81-LC	Unidirectional condenser microphone supplied without cable
R104A	Omnidirectional cartridge—permits instant changeover of SM81 to omnidirectional microphone



SM83

The SM83 has been specifically designed to provide superior quality sound reproduction in professional broadcasting, film, and related sound reinforcement applications. It features a wide-range frequency response, specially tailored to provide more natural sound. This response is achieved by an electronically created dip at 730 Hz to overcome the chest resonance phenomenon, and by an acoustically generated high-frequency boost above 3 kHz resulting in a cleaner, more pleasing sound than other lavalier mics. In addition, a 12 dB per octave rolloff below 100 Hz helps reduce room noise and other undesirable low-frequency signals.

The Shure-developed amplifier supplied with the SM83 is compact, lightweight and can easily clip onto a belt or fit into a pocket. It is powered by a standard, readily available nine-volt battery or by simplex power from an external source (such as Shure M267 and M268 Mixers or PS1 and PS1E2 Power Supplies) or virtually any microphone power supply providing 5 to 52 Vdc simplex voltage. And, the amplifier has extensive RF and hum shielding to reduce the effects of electromagnetic and electro-

static interference. The microphone and cable are easily detached from the amplifier for easy storage.

To minimize cable visibility, the SM83's cord exits from the side and can be easily hidden behind a tie, blouse or shirt. This unique design feature combined with the microphone's innovative mounting hardware, small size and non-reflective black finish provide for an inconspicuous on-camera appearance.

The SM83 is supplied with a versatile system of hardware that permits a wide variety of unobtrusive mounting techniques. Three mounting means are provided: a single-mount tie bar; a dual-mount tie bar (for mounting two microphones simultaneously); and two multi-purpose mounting blocks which may be connected to a lanyard, or sewn, pinned or taped onto clothing. Also supplied is an acoustic windscreens for outdoor use.

The SM83 is extremely rugged and offers outstanding reliability. In addition, it is field-serviceable. The cartridge assembly is accessible by simply unscrewing the microphone cap. Cable replacement requires only a screwdriver, no soldering is necessary.



specifications

Model:**SM83****Frequency Response:** 80 to 20,000 Hz**Polar Pattern:** Omnidirectional**Impedance Rating:** 1k ohms**Output Level****Open Circuit Voltage:** 0.35 mV (-30.0 dB, 0 dB = 1V/ μ bar)

(Equivalent sound pressure levels: measured with true rms voltmeter)

22 dB typical, A-weighted

20 dB typical, weighted per DIN 45406

-40.0 dB equivalent SPL in a 1-millitersted field (60 Hz)

Hum Pickup: -40.0 dB**Cables:** Microphone: 3m (10 ft), two-conductor,

shielded with miniature 3 pin connector

Amp. Ifier: 2m (6 ft), two-conductor, shielded,

TRIPLE-FLEX™ with 3-pin professional audio connector

Dimensions:Microphone: 9.6 mm L x 11.2 mm Dia.
(3/4" x 7/16 in.)Amplifier: 23.1 mm H x 9.0 mm W x 94.8 mm D
(29/32 x 115/16 x 3 3/4 in.)**Net Weight:**

Microphone: 45 grams (1.56 oz)

Amplifier: 270 grams (9.45 oz) inc. battery

Battery: 9 Vdc (two AAA: radio type, alkaline recommended) approximately 1000 hours continuous use with fresh battery

Simplex Voltage: 5 to 52 Vdc; 0.93 mA current draw

Supplied Accessories:Single-mount tie bar, dual-mount tie bar,
two multi-purpose mounting blocks,
windscreen, storage/carrying bag

PROFESSIONAL STUDIO/telephone acoustic coupler

50AC

The 50AC is designed to acoustically couple tape-recorded information to a telephone handset transmitter. This is most useful in recorded interview broadcast applications when a tape recorder cannot be "hard-wired" to a telephone line. A simple strap assembly easily attaches and holds the 50AC in place on almost any telephone handset. Its rubber case seals the 50AC to the telephone, blocking out external sounds, thereby enhancing the intelligibility of the transmitted information. Depressing an integral lever breaks the seal and permits the operator to comment or add supplemental material without interrupting the tape or removing the 50AC from the handset.

The 50AC can also be used in real-time broadcast applications with a mixer that has a line-level output. In addition, the 50AC can be used as a tape recorder microphone; its frequency response approximates that of a telephone.

The 50AC consists of a dynamic transducer cartridge in a small, lightweight molded rubber and plastic case. The attached 1.5m (5 ft) cable terminates in a $\frac{1}{8}$ in. "mini plug" connector for attachment to the earphone or external speaker jack of most portable cassette recorders.



specifications

Model: 50AC

Frequency Response: 300 to 3,000 Hz

Impedance Rating

As Acoustic Coupler: 200 ohms

As Microphone: 150 ohms

Output Level

As Acoustic Coupler: 119 dB SPL at 1 Vrms into 8 cc cavity

As Microphone

Open Circuit Voltage: 0.22 mV (-73.0 dB, 0 dB = 1 V/μbar)

Power Level: -59.0 dB 0 dB = 1 mW/10 μbar

Cable: 1.5m (5 ft) single-conductor, shielded, with "mini plug" earphone plug

Dimensions: 94 mm L x 27 mm H x 51 mm D a.

(3 $\frac{1}{2}$ x 1 $\frac{1}{4}$ x 2 in.)

Net Weight: 112 grams (3.95 oz)

Packaged Weight: 200 grams (7 oz)

ABOUT SHURE PROFESSIONAL PERFORMANCE MICROPHONES

Entertainers from every corner of the music world rely on Shure Professional Performance Microphones to complement their performance.



Dolly Parton



Mick Jagger • Rolling Stones



Keith Knudsen



Dionne Warwick

The Shure SM Professional Performance Series are microphones the professionals stand behind. Nowhere is reliance on Shure quality more evident than in the world of entertainment. On stages everywhere, music legends like Mick Jagger, Judy Collins, Ronnie Milsap, Tina Turner, Eddie Rabbitt, Dolly Parton, Charles Aznavour, Billy Squier, Paul Anka, Dionne Warwick, Roger Daltrey and Peter Townshend insist on Shure microphones.

Shure microphones continually perform up to tough standards because they are manufactured with an intense commitment to quality - using carefully selected and monitored materials that are assembled with the greatest degree of care and accuracy. The shock mount in Shure SM Professional Performance Microphones is made of three specially selected elastomers with damping characteristics that provide optimum handling noise reduction. Advanced pop filters are designed into every Shure SM Professional Performance Microphone to greatly reduce explosive wind and breath sounds... without altering the microphone's sound integrity. The diaphragms in all dynamic SM microphones are superior to those found in competitive brands, because they are specially laminated with strategically placed spokes and tangential grooves which stabilize the diaphragm resulting in a minimal number of breakup modes and true reproduction of the voice or instrument.

In this section, you'll find the complete line of Shure SM Professional Performance Microphones, each with a distinctive sound or physical characteristic. You'll also discover the superior quality and rugged reliability that have made these microphones The Sound of the Professionals... Worldwide.

SM87

The SM87 is a studio-quality supercardioid condenser vocal microphone with Shure's legendary ruggedness and dependability. An innovative new cartridge element features a highly directional supercardioid polar pattern, which rejects unwanted sound bleed and allows a surprising amount of gain before feedback. This enables the SM87 to perform flawlessly, even in high gain, multiple-monitor situations.

The extremely smooth and accurate response characteristics of the SM87 offers soundmen now flexibility at the mixing board. Its vocal contoured response permits quick, easy equalization (many engineers think it needs no equalization). The SM87 provides extremely accurate voice reproduction across the entire frequency spectrum by making optimum use of proximity effect. The performer has better control of low-frequency sound, from the warm intimacy of close miking to the natural sounds of normal-to-distant miking.

In addition, the SM87 performs with extremely low distortion and low susceptibility to RF and electro-magnetic interference.

The SM87 features an exclusive Shure elastomer "spaced frame" shock mount, which isolates the capsule from virtually all hand-held and mechanical vibrations. An effective built-in multi-stage filter minimizes pop and wind noise.

The SM87 will withstand years of use (and abuse) because it's "tough tested" to meet Shure's worldwide reputation for ruggedness and reliability. What's more, the SM87 far exceeds normal specs for resistance to extremes of temperature and humidity, making it an ideal choice for indoor or outdoor use, in any weather condition.

The non-glare, two-tone steel gray finish and the sleek, handsome shape of the SM87 perfectly complement its outstanding performance capability. The result: a new standard in hand-held, vocal microphones.

The SM87 can be simplex (phantom) powered from the Shure PS1 and PS1E2 power supplies, or any standard voltage (11 to 48 Vdc) available from most mixing consoles. (For more information and specifications on the PS1 and PS1E2, see the accessory section of this catalog.)


SM87-CN with cable

SM87-LC without cable


SM87

Model	SM87
Frequency Response	50 Hz to 15,000 Hz
Polar Pattern	Supercardioid
Impedance Rating	150 ohms (recommended minimum load impedance: 200 ohms)
Output Level	
Open Circuit Voltage	-71 dB (0.2 mV) (0 mB 1V/pair)
Hum Pickup/mOe	-7.5 dB SPL equivalent
Clipping Level (at 1,000 Hz)	800-ohm Load... -14dBV (0.63V) 150-ohm Load... -15dBV (0.18V)
Maximum SPL	142 dB with 800-ohm Load 134 dB with 150-ohm Load
Output Noise	Equivalent sound pressure levels: measured with true rms voltmeter 29 dB typical, A-weighted 32 dB typical, weighted per IEC 45-102
Simplex Power	Voltage... 11 to 52 Vdc, positive pins 2 and 3 Current Drain... 1.0 mA to 1.2 mA
Cable (Model SM87-CN)	7.8m (25 ft), two conductor shielded, TRIPLE-I-LEX® with three-pin and three-socket professional audio connectors (microphone connector finish is black)
Dimensions	199mm L x 43.9mm Dia. (7 1/2" x 1 1/2" in.)
Net Weight	160 grams (6.3 oz)
Packaged Weight	SM87-LC: 887 grams (1 lb. 15 oz); SM87-CN: 1.47 kilograms (3 lb. 4 oz)
Supplied Accessories	Swivel adapter, vinyl storage bag
Optional Accessories	See Page 59.

TYPICAL FREQUENCY RESPONSE, SM87

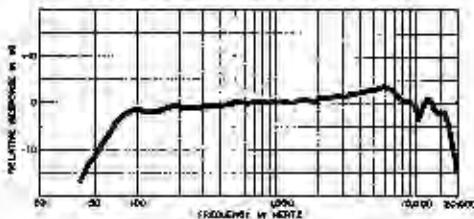

TYPICAL POLAR PATTERNS, SM87

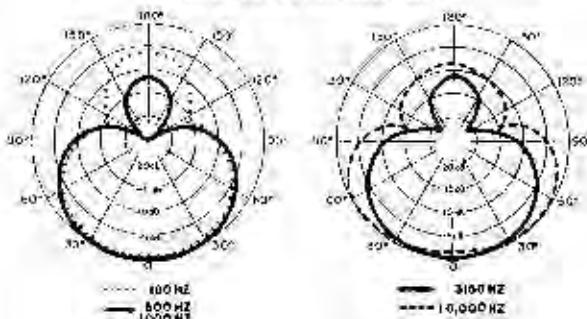

SM87 The Crowd Pleaser™

The SM87's design is the result of months of testing and consultation with leading sound reinforcement professionals. During this development period, the microphone's frequency response and polar pattern were fine-tuned to meet the needs and standards of a number of top performing artists in the pop, rock, and country fields. The finished product has received enthusiastic acclaim from virtually all of the artists and sound engineers who have tried it. Below are just a few of the comments we have received.



"This new microphone is fantastic. I've never used a microphone that made me sound so much like me."

Melissa Manchester



"It's my favorite mic. It gives me a warm, smooth, rich sound and I can get breathy when the song calls for it."

Lee Greenwood



"By eliminating bleed, the SM87 provides much greater separation than previously available and still provides a vocalist a comfortable working distance."

Harold Blumberg

Monitor Engineer for Melissa Manchester

"The SM87 has a beautiful, natural sound throughout the singer's range. Its supercardioid pattern isolates the vocalist from the loud music on stage and it handles the humidity better than any other condenser I've used."

Mark Hogue

Chief Sound Engineer for Melissa Manchester



"The SM87 condenser has a smooth, natural, uncolored sound with a tight response pattern that enables me to lay the mix with ease."

Dave Harvey

Chief Sound Engineer for Lee Greenwood



"This is the vocal mic of the 80's. It has a broad spectrum and an insatiable appetite for gain. Every location engineer could use an SM87 Condenser Mic."

Jon Jabolian

House Engineer, Poplar Creek

SM85

The SM85 is a lightweight, rugged condenser microphone designed for hand-hold live or television vocal applications. It is capable of withstanding the physical abuse inherent in on-the-road use, yet maintains the highest quality performance expected of a studio condenser microphone. It is ideal for the most demanding live sound reinforcement applications as well as broadcasting and studio recording requirements.

The frequency response of the SM85 is tailored to enhance the performance of the artist throughout the sound spectrum. A controlled low-frequency rolloff minimizes the handling noise and "boominess" sometimes associated with close-up hand-held microphone use. Its response in the mid-range is tailored in the Shure tradition to add "crispness" and presence through carefully placed accentuation in the critical vocal frequencies, giving the artist's voice a clear, sharply defined sound that sets it apart from instrumental back up. In the upper register, the SM85's clean, clear scintillating high frequencies delineate subtle overtones and enhance high-frequency timbre.

The SM85 is constructed with a lightweight, yet extremely tough aluminum case and a TFFI ON[®]-coated all-steel grille. An exclusive elastomer "space-frame" isolates and cushions the condenser element from virtually all mechanical vibration. The integral wind and multi-stage pop filters eliminate ordinary wind and breath pop noise. For more demanding applications, an accessory windscreens is available.



The SM85 exhibits remarkably low distortion (right up to its overload point) over the entire audio spectrum... considerably less than other more expensive condenser microphones. Special shielding techniques eliminate magnetic and RF interference resulting from studio lights and broadcast equipment.

The SM85 can be simplex (phantom) powered from the Shure PS1 and PS1E2 power supplies, or any standard voltage (12 to 48 Vdc) available from most recording consoles. (For more information and specifications on the PS1 and PS1E2, see the accessory section of this catalog.)

SM85-CN with cable
SM85-LC without cable

**specifications****SM85**

Model:	SM85
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Cardioid unidirectional response
Impedance Rating:	150 ohms (recommended minimum load impedance: 800 ohms)
Output Level	
Open Circuit Voltage:	-4 dB (0.2 mV) (0 dB = 1V/ μ bar)
Hum Pickup/mGc:	-75 dB SPL equivalent
Cable (Model SM85-CN):	7.5 ft. (2.5 m), two-conductor shielded TRIPLEX-FX [®] with three-pin and three-socket professional audio connectors (microphone connector finish is black)
Dimensions:	192 mm L x 48 mm Dia. (7 $\frac{1}{4}$ in. x 1 $\frac{1}{4}$ in.)
Net Weight:	180 grams (0.3 oz.)
Packaged Weight:	SM85-LC: 887 grams (1.9 lb., 15 oz.) SM85-CN: 1.47 kg (3 lbs., 4 oz.)
Clipping Level (at 1,000 Hz):	800-ohm load ... -4 dBV (0.63V) 150-ohm load ... -15 dBV (0.18V)
Maximum SPL:	142 dB with 800 ohm load 134 dB with 150-ohm load
Output Noise:	(equivalent sound pressure levels; measured with 1n.c. rms voltmeter) 29 dB typical A-weighted 32 dB typical, weighted per DIN 45 406
Power Supply:	Voltage ... 11 to 52 Vdc, positive pins 2 and 3 Current Drain ... 1.0 mA to 1.2 mA
Supplied Accessories:	Swivel adapter, carrying case
Optional Accessories:	See page 53

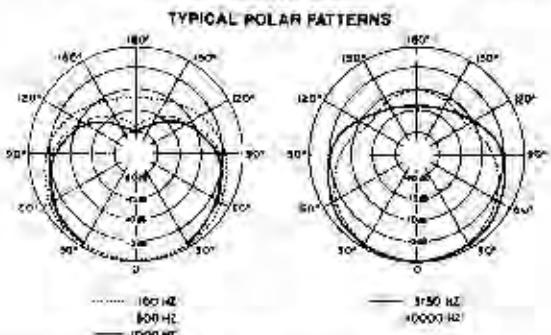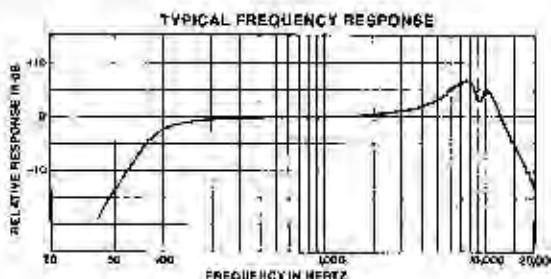

SM77 and SM78 The STAMAKER™ Series

The STAMAKER Series is made up of two very lightweight, extremely rugged microphones featuring Shure's exclusive SUEDECOAT™ non-reflecting, textured ebony or tan finish.

The SM77 has slim styling, and is especially effective on instrument pickup where brilliant and defined sound is demanded. The SM78 has the added superior wind and pop protection of a spherical screen and grille, making it a "first choice" microphone for rock, pop, R & B, country, gospel, and jazz vocalists.

Both microphones have a fixed low-frequency roll-off plus a slight mid frequency presence rise in their frequency response. This results in highly intelligible vocals as well as penetrating reproduction of rhythm and keyboard instruments.

In addition, the microphone's uniform cardioid pattern rejects background noise for maximum amplifier gain before feedback, and prevents coloration when performers are off-axis.

STAMAKER microphones are 28% lighter, on average, than similar stage microphones with absolutely no sacrifice in performance, ruggedness or reliability. This reduction in weight reduces performer fatigue in hand-held applications, and

the small profile of the SM77 and SM78 won't obscure the performer's face.

The SUEDECOAT finish has a great look, is pleasant to "feel," easy to clean and is durable enough to stand up to the roughest stage performance. In addition, the grilles of both microphones are treated with a Shure exclusive coating which never rusts or tarnishes.

SM77BR-CN	Slim styling, brown SUEDECOAT, with cable
SM77BR-LC	Slim styling, brown SUEDECOAT, without cable
SM77EB-CN	Slim styling, ebony SUEDECOAT, with cable
SM77EB-LC	Slim styling, ebony SUEDECOAT, without cable
SM77TN-CN	Slim styling, tan SUEDECOAT, with cable
SM77TN-LC	Slim styling, tan SUEDECOAT, without cable
SM78BR-CN	Ball grille, brown SUEDECOAT, with cable
SM78BR-LC	Ball grille, brown SUEDECOAT, without cable
SM78EB-CN	Ball grille, ebony SUEDECOAT, with cable
SM78EB-LC	Ball grille, ebony SUEDECOAT, without cable
SM78TN-CN	Ball grille, tan SUEDECOAT, with cable
SM78TN-LC	Ball grille, tan SUEDECOAT, without cable



specifications

Model: **SM77**

Frequency Response: 50 to 15,000 Hz

Polar Pattern: Cardioid (unidirectional)

Impedance Rating: 150 ohms

Output Level

Open Circuit Voltage: 0.11 mV (-79.0 dB, 0 dB = 1V/μbar)

Power Level: 57.5 dB, 0 dB = 1mW/10 μbar

Connector: Three-pin professional audio

Cable (-CN Models only): 7.0m (25') two-conductor shielded with three-soccket professional audio connector at microphone end and three-pin professional audio connector at equipment end.

Dimensions: 120 mm L x 32 mm Dia. (5 1/8" x 1 1/4 in.)


Net Weight: 168 grams (6 oz)

Packaged Weight: w/o cable: 379 grams (1 lb, 15 oz); with cable: 1.33 kg (2 lb, 15 oz)

Supplied Accessories: Swivel adapter, foam-lined storage/carrying case

Optional Accessories: See Page 59

SM77

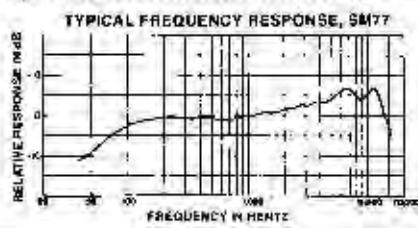

TYPICAL POLAR PATTERNS, SM77, SM78



SM78

50 to 15,000 Hz

Cardioid (unidirectional)

150 ohms

0.11 mV, -79.0 dB, 0 dB = 1V/μbar

57.5 dB, 0 dB = 1mW/10 μbar

Three-pin professional audio

7.0m (25') two-conductor shielded with three-soccket professional audio connector at microphone end and three-pin professional audio connector at equipment end.

144 mm L x 51.1 mm Dia. (5 1/4" x 2 1/4")

204 grams (7.2 oz)

w/o cable: 313 grams (2 lb); with cable: 1.36 kg (3 lb)

Swivel adapter, foam-lined storage/carrying case

See Page 59

TYPICAL FREQUENCY RESPONSE, SM78



SM58

The world-standard professional stage microphone, with the distinctive Shure upper mid-range presence peak for an intelligible, lively sound. A tough, handsome microphone that weighs less than 11 oz...the SM58 is often imitated in appearance, but never duplicated in performance, ruggedness, or reliability. It is still the unsurpassed first choice among rock, pop, R & B, country, gospel, and jazz vocalists.

The SM58 is preferred for its punch in live vocal applications...especially where close miking is important. In addition to the slight presence rise in mid-frequencies, it has a fixed low-frequency roll-off to minimize the "boominess" usually accented by close pickup. A built-in spherical windscreens takes the pop out of close-up use, and minimizes breath and wind noise distortion. The uniform cardoid pickup pattern greatly reduces off-axis coloration and rejects background noise to permit higher amplifier gain before feedback.

The SM58 is world renowned for its ability to withstand the kind of abuse that would destroy many other microphones, and is rugged enough to withstand a six-foot drop onto a hardwood floor with no adverse effects.

The distinctive shape perfectly fits the hand and the superior balance and weight distribution make the SM58 unusually comfortable in hand-held applications. The non-glare gray finish provides for exceptional on-camera appearance.

SM58 Supplied cable has three-soclet connector at microphone end only


SM58-CN Same as model SM58 but Triple Flex® Cable and has a three-pin professional audio connector at the equipment end

SM58-LC Same as SM58 but without cable


**specifications****SM58**

Model:	SM58
Frequency Response:	50 Hz to 15 kHz
Polar Pattern:	Cardioid (Unidirectional)
Impedance Rating:	Dual 38/50 ohms
Output Level	
Open Circuit Voltage:	0.08 mV (-10.5 dB 0 dB = 1 V/μbar) 12.5 ohms
0.18 mV (-7.0 dB 0 dB = 1 V/μbar) 150 ohms	
Power Level:	-56 dB (0.01W - 1mW/10 μbar)
Cable:	SM58: 8.1m (26 ft) two-conductor shielded with three-soclet professional audio connector at microphone end and three-pin professional audio connector at equipment end
Dimensions:	182mm L x 51mm Dia. (6 1/2" x 2 in.)
Net Weight:	298 grams (10 1/2 oz)
Packaged Weight:	~ 4 kg (2 lb. 8 oz)
Supplied Accessories:	Swivel adapter connector locking & vinyl storage bag
Optional Accessories:	See Page 59

TYPICAL FREQUENCY RESPONSE

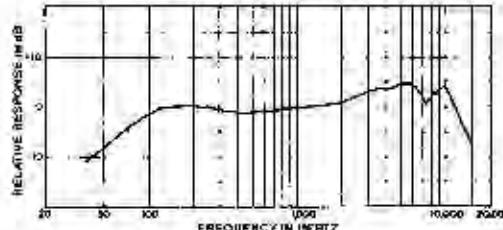

TYPICAL POLAR PATTERNS

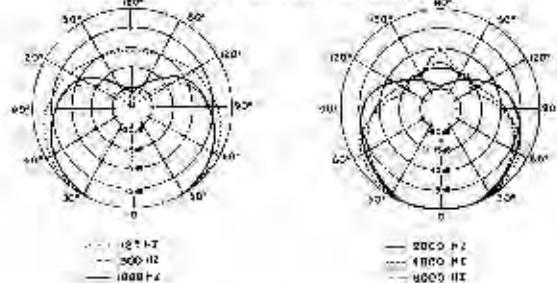

SM56 and SM57

The SM56 and SM57 are frequently seen, and heard, on television entertainment programs, on the concert stage, at lectures, panel discussions, news conferences, and political conventions. The SM56 is a permanently stand-mounted model with an effective vibration isolator shock mount in the attached swivel. The SM57 can be hand-held or stand-mounted.

The outstanding performance and ruggedness of the SM56 and SM57 are identical. The presence boost of these microphones results in clean, beautiful defined drum, string, and amplified instrument reproduction. Their wide frequency response with a fixed bass rolloff and slight midrange presence boost also make them exceptional for intelligible voice pickup.

The well-controlled cardioid polar pattern minimizes background noise in all planes and permits higher amplifier gain before feedback.

Both microphones are finished in non-glare dark gray enamel. The optional A2WSA windscreens are particularly effective in controlling breath or wind noise on both microphones. Supplied cables have three socket connectors at microphone end only.

SM56 Permanently stand-mounted model. Permits tilting of microphone through 135°.

SM57 For hand held or stand-mount applications.

SM57-CN Same as model SM57 but Triple Flex™ cable and has a three-pin professional audio connector at the equipment end.

SM57-LC Same as SM57 but without cable.




specifications


SM56 and SM57

Models:	SM56 and SM57
Frequency Response:	40 to 15,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	200 ohms
Output Level	
Open Circuit Voltage:	0.08 mV (-82.0 dB, 0 dB = 1V/μbar; 30 ohms)
	0.11 mV (-75.5 dB, 0 dB = 1V/μbar; 150 ohms)
Power Level:	56.5 dB (0 dB = 1 mW, 10 μbar)
Cable:	SM56, SM57: 8.1 m (26 ft) two-conductor shielded with three-screw professional audio connector at microphone end only SM57-CN: 7.6 m (25 ft) two-conductor shielded Triple-Flex™ with three-screw professional audio connector at microphone end and three-pin professional audio connector at equipment end
Dimensions:	SM56: 125 mm H x 21 mm W x 42.1 mm Dia. (4 1/2" x 4 1/4" x 1 1/2") SM57: 157 mm L x 32 mm Dia. (6 1/4" x 1 1/4" in.)
Net Weight:	SM56: 1.01 kg (2 lb, 3 1/2 oz) SM57: .784 grams (10 oz)
Packaged Weight:	SM56: 1.33 kg (2 lb, 15 oz) SM57: 1.05 kg (2 lb, 10 oz)
Supplied Accessories:	SM56: Connector locking kit, vinyl storage bag SM57: Swivel adapter, connector locking kit, vinyl storage bag
Optional Accessories:	See Page 59

TYPICAL FREQUENCY RESPONSE, SM56, SM57

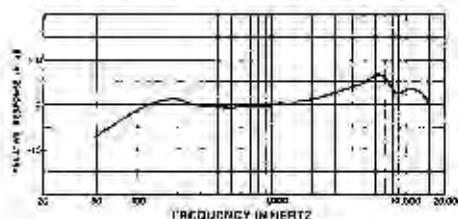

TYPICAL POLAR PATTERNS, SM56, SM57

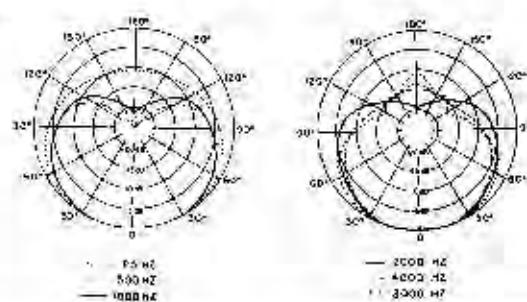

PROFESSIONAL PERFORMANCE/musical instrument and head-worn microphones

SM17

The Shure Model SM17 is the first miniature microphone designed specifically for use on acoustic musical instruments. It is a quality dynamic microphone, superior to a direct contact pickup in its strong, natural, acoustically live sound, with excellent separation and remarkable freedom from overload and distortion—even at high sound levels. Yet, it is scarcely longer than a paperclip!

The SM17 may be attached to most instruments with no modifications. It is supplied with an expansion mount for violins, violas, or cellos; and a cushioned spring clip for acoustic guitars, string basses, or any other instrument with a convenient surface (as the bell of a brass instrument).

The SM17 case is made of aluminum for light weight and strength. The attached 3m (10 ft), small-diameter cable is extremely flexible, with a three-pin professional audio connector at the equipment end. Two cable clips for securing the cable to flat surfaces are supplied.



specifications

SM17

Model:	SM17
Frequency Response:	30 to 15,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	150 ohms
Output Level	
Open Circuit Voltage:	-0.06 mV (+86.0 dB 0.03 - 1V/μbars)
Power Level:	+44 dB (+0 dB = 1mW/0 μbar)
Hum Pickup/mΩe:	35.3 dB SPL equivalent
Cable:	Aluminum 2m (10 ft), two conductor shielded with three-pin professional audio connector at equipment end

Dimensions:	
Microphone:	30.5 mm L x 12.7 mm Dia. (1 1/8 x 5/8 in.)
Boom:	
Net Weight:	7.8 grams (0.28 oz) less cable
Packaged Weight:	180 grams (2 lb)
Supplied Accessories:	Expansion mount with three bushings, cable clips
Optional Accessories:	See Page 59

SM10A, SM12A and SM14A

The hands-free operation drummers and keyboard players demand. Wherever you twist or turn, these adjustable headset dynamic microphones remain precisely at the distance and angle you set. The noise-reducing cartridge in the SM10A, SM12A and SM14A gives you high output for punch in live vocal situations, and a crisp, clear, balanced midrange. In addition, these microphones reject background noise and minimize leakage from other sound sources on stage.

The SM10A, SM12A and SM14A head worn microphones are also designed for use in sports and newsgathering, interviewing, and intercommunications systems, special event reliable broadcasting, and computer interactive systems.

The microphone in each model is identical. They are unidirectional and close-talking, with a strong, professional sound quality voice response. Their lightweight, padded headphones eliminate user fatigue and an adjustable boom maintains proper mouth-to-microphone distance and position.

SM10A-CN Can be removed from headset for attachment to stereo headphones.

SM12A-CN Features integral, adjustable earphone.

SM14A-CN Features two earphones with independent signal feeds.

SM10A, SM12A, and SM14A

Model:	SM10A, SM12A, SM14A
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Cardioid (Unidirectional)
Impedance Rating:	150 ohms
Output Level	
Open Circuit Voltage:	-1.5 mV (-47.0 dB, 0 dB = 1V/100 μbars)
Power Level:	-86.0 dB (-0 dB = 1mW/0 μbar)
Hum Pickup/mΩe:	36.4 SPL equivalent
Cable:	SM10A: Attached 1.5m (5 ft) two conductor shielded with three-pin professional audio connector at equipment end. SM12A, SM14A: Attached 1.5m (5 ft) two conductor shielded with three-pin professional audio connector at equipment end. 162 mm (2 ft) two-conductor receiver cable attached to microphone connector. SM14A also furnished with 2.9m (0.5 ft) two conductor cable attached to second receiver.
Dimensions:	14 mm H x 15.9 mm Dia. (5/8 x 5/8 in.)
Weight:	203 mm L (8 in.)
Net Weight:	SM10A: 78 grams (2.7 oz); SM12A: 84 grams (3.0 oz); SM14A: 103 grams (3.5 oz);
Packaged Weight:	SM10A: 752 grams (1 lb. 10 oz); SM12A: 797 grams (1 lb. 12 oz); SM14A: 880 grams (1 lb. 15 oz)
Supplied Accessories:	Connector belt clips, foam windscreens, storage/carrying case
Optional Accessories:	SM10A also supplied with headphone adapter plate. See Page 59

ABOUT SHURE GENERAL PURPOSE MICROPHONES

Shure General Purpose Microphones, shown in this section, comprise the largest group of microphones in the Shure line. They are available in a broad range of product features, performance characteristics and price ranges enabling users to select the Shure Microphones that best suit their performance requirements.

General Purpose Microphones are designed for a multiplicity of applications such as in auditoriums, stadiums, lounges, theme parks, meeting rooms, schools, churches... anywhere top quality performance for public address, sound reinforcement or recording is needed.

Featured in this section are the highly regarded Shure UNIDYNE® and UNISPHERE® Series of microphones. These models are preferred overwhelmingly by sound installers and microphonic users throughout the world for their value, performance and reliability. There are more Shure UNIDYNE and UNISPHERE microphones used in sound reinforcement and public address than any other microphones.

SHURE MICROPHONE BRAND NAME GUIDE

While all Shure General Purpose Microphones have model numbers, many of them are known best by their brand name. In order to help you identify the microphone you want, we have cross-indexed Shure's General Purpose Microphones with the brand names with which you may be more familiar.

BRAND NAME	MODEL/SERIES NUMBER
OMNIDYNE	571,5/8
SOUND BRIDGE™	SP19 Series
SPHER-O-DYNE®	533
UNIDYNE® II	555II
UNIDYNE® III	545 Series, 546
UNIDYNE® B	515 Series
UNISPHERE® I	565 Series
UNISPHERE® A	586 Series
UNISPHERE® B	588 Series
VERSADYNE	575 Series
VOCAL SPHERE	579SB



When sound installers are instructed to create the finest sound possible they select Shure Microphones. Perhaps nowhere in the world are Shure Microphones in more ornate surroundings than in the Town Hall in Barcelona, Spain.

SHURE MODEL NUMBER SUFFIX CODES

Below is a guide to the suffix coding used for Shure General Purpose Microphones.

SUFFIX	DESCRIPTION
A or H	High Impedance
B or L	Low Impedance
C	Supplied cable has an MC1 connector and phone plug adapter at equipment end
CN	Supplied cable has three-pin socket professional audio connector at microphone end and three-pin professional audio connector at equipment end
G	Gooseneck - these models have threaded case to accommodate standard 5/8"-27 gooseneck
L	Lavalier - these models are supplied with lavalier assemblies
S	Switch



The SM18 Series surface-mounted, low-profile microphones (page 47) are designed to give excellent voice pickup while remaining virtually invisible. Available in white or brown foam enclosures. Perfect for meeting rooms, church alters, etc.



Shure exclusive design features and performance characteristics make the SM59 (page 28) the perfect choice for courtrooms, legislative chambers, large meeting rooms, pulpits and other public address applications.

GENERAL PURPOSE/unidirectional dynamic microphone

SM59

Performance... appearance... quiet operation—the hallmarks of a great microphone. The SM59 is widely used for distinguished TV studio productions... especially musical shows, where sound quality is a major consideration. Its wide, ultra-flat response is enhanced by a controlled low-frequency rolloff, providing a clean, natural sound for voice or instruments. In addition, the performer can control the amount of bass increase by moving toward or away from the microphone. The tightly controlled cardioid pickup pattern is virtually textbook-perfect, minimizing feedback and unwanted background noise. For vocal groups, on stage or in the studio, around podiums or pulpits, the SM59 is a superlative performer. It's superb for miking horns, drums, and vocalists.

The revolutionary design of the SM59 makes this microphone virtually immune to extraneous noise. An extraordinarily efficient

Shure-patented mechano-pneumatic shock mount shields the cartridge from rumble and other mechanically transmitted noise, whether on a stand or hand-held. An integral windscreens provides excellent pop protection, and a built-in humbucking coil minimizes hum due to nearby electromagnetic interference, even strong RF fields found near TV studios. These performance features make the SM59 an exceptional choice for permanent installations such as legislative chambers and court houses where minimum handling noise is essential. The slim profile and elegant champagne finish give the SM59 a distinctive sleek appearance. Although it weighs less than 8 ounces, this microphone is remarkably rugged.



SM59-CN with cable
SM59-LC without cable



specifications

SM59

Model:	SM59
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Cardioid (Unidirectional)
Impedance Rating:	150 ohms
Output Level	
Open Circuit Voltage:	0.01 mv (-83.0 dB, 0 nR = 1V/μbar)
Power Level:	61.0 dB, 0 dB = 1mW/10 μbar
Hum Pickup/mΩ:	-2.5 dB SPL equivalent
Cable:	7.6m (25 ft) two-conductor shielded "Pipel Flex" with three-socotra professional audio connector at microphone end and three-pin mini-solder and a connector at equipment end
Dimensions:	197 mm L x 41.4 mm Dia. (7 7/16" x 1 15/16")
Net Weight:	215 grams (7.6 oz)
Packaged Weight:	1.02 kg (3 lb. 9 oz)
Supplied Accessories:	Swivel adapter, foam-lined storage/carrying case
Optional Accessories:	See Page 59

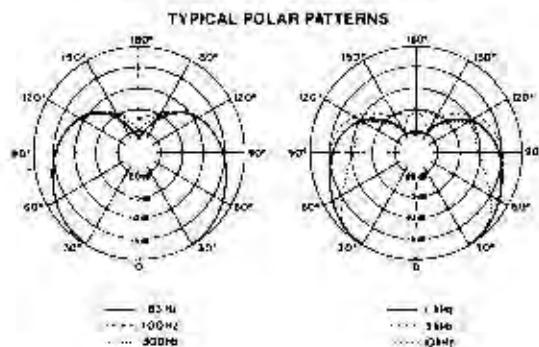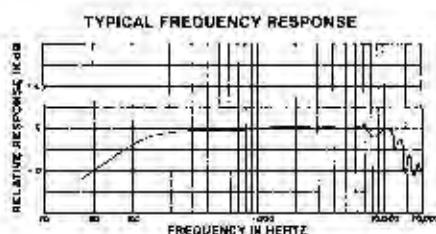

GENERAL PURPOSE/unidirectional dynamic microphone

SM62

Don't let its small size fool you... Shure's SM62 is a big-time performer in every way. Use it wherever a high-quality compact microphone is needed—on stage, in interviews, on podiums. Less than 5 inches long and weighing only 4 ounces, it's unobtrusive in both hand-held and stand-mounted use.

The SM62's flat, uncolored frequency response and uniform cardioid pickup pattern provide excellent performance as well as control of feedback and unwanted background noise. A carefully

controlled low-frequency roll-off prevents the "boominess" associated with close miking. A rubber cartridge shock mount keeps handling noise low, and the integral windscreens minimizes breath pop.

The SM62 is finished in beautiful, durable champagne enamel, and comes with matching swivel adapter.

SM62-CN With cable.

SM62-LC Without cable.



specifications

Model: SM62

Frequency Response: 100 to 10,000 Hz

Polar Pattern: Cardioid (unidirectional)

Impedance Rating: 150 ohms

Output Level:

Open Circuit Voltage: 3.08 mV (-62.0 dB, 0 dB = 1V/μbar)

Power Level: 60.5 dB (0 dB = 1mW/10 μbar)

Cable: 6.1m (20 ft) two conductor shielded with three-soccket professional audio connector at microphone end

Dimensions: 124 mm L x 38.1 mm Dia. (4-29/32" x 1-1/2 in.)


Net Weight: 112.4 grams (4 oz)

Packaged Weight: 160 grams (2 lb. 2 oz)


Supplied Accessories: Swivel adapter, vinyl storage bag

Optional Accessories: See Page 59

TYPICAL FREQUENCY RESPONSE, SM62

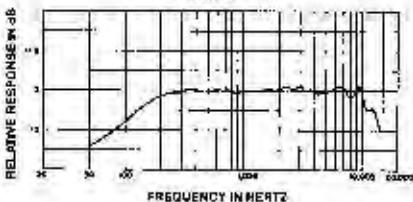

TYPICAL POLAR PATTERNS, SM62

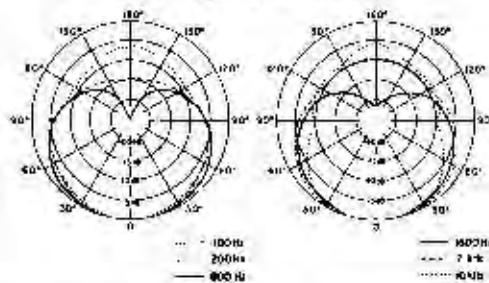

GENERAL PURPOSE/unidirectional dynamic microphone

515 Series

The lowest cost UNIDYNE® microphones, the 515 Series, feature the uniform, symmetrical cardioid pickup pattern, feedback suppression, and high-quality performance characteristics that have made the UNIDYNE models world famous. These microphones are particularly suitable for sound reinforcement and recording of speech, vocals, and most instruments.

UNIDYNE B microphones have a wide-frequency response, shaped with a low-frequency rolloff and high-frequency presence boost for maximum intelligibility and clarity. In addition, an effective shock mount isolates the cartridge from unwanted handling or stand-transmitted mechanical noise.

Each model in the 515 Series (except 515BG) is equipped with an on-off switch to control of the amplifier input at the performer's position. A lockplate is supplied with Models 515SA and 515SB. Model 515SA is high impedance; all other models are low impedance.

515SA: High impedance; for hand-held or stand-mounted use

515SAC: Same as 515SA, but cable has an MC1F connector and a phone plug adapter on equipment end

515SB: Low impedance; for hand-held or stand-mounted use

515BG, 515SBG, and 515SB-G18: Low impedance; for gooseneck applications (see page 39)




specifications


515 Series

Model:	515SA, 515SB, 515SBG, 515SB-G18
Frequency Response:	-80 to +3,000 Hz
Polar Pattern:	Cardioid (mid sections)
Impedance Rating:	515SA: High; 515SB: 515SBG, 515SB-G18: 1k ohms
Output Level	
Open Circuit Voltage:	515SA: 1.12 mV/F; -69.0 dB, 0 dB = 1V/ μ bar 515BG, 515SB, 515SBG, 515SB-G18: 0.001 mV/F; -92.0 dB, 0 dB = 1V/ μ bar
Power Level:	.61 Cd@, 0 dB = 1mW/10 μ bar
Cable Attached:	515SA: 4.6m (15 ft) single-conductor shielded; 515SB: 4.6m (15 ft) two-conductor shielded; 515BG: 1.8m (7 ft) two-conductor shielded; 515SBG: 1.8m (7 ft) four-conductor; two-conductor shielded; 515SB-G18: 1.3m (5 ft) four-conductor, two-conductor shielded
Dimensions:	515SA, 515SB: 164 mm L x 37.5 mm Dia. (6 1/2" x 1 1/2 in.) 515BG, 515SBG: 159 mm L x 37.3 mm Dia. (6 1/4" x 1 1/2 in.) 515SB-G18 (with gooseneck): 625 mm L x 37.3 mm Dia. (25 x 1 1/2 in.)
Net Weight:	515SA, 515SB: 510 grams (1 lb. 2 oz); 515SB-G18: 624 grams (1 lb. 6 oz) 515BG, 515SBG: 426 grams (15 oz); 515SB-G18 (with gooseneck): ~0.2 kg (2 lb. 4 oz)
Packaged Weight:	515SA, 515SB: 580 grams (1 lb. 8 oz); 515SB-G18: 1,024 g 515BG, 515SBG: 567 grams (1 lb. 4 oz); 515SB-G18: 1,034 g (2 lb. 4 oz)
Supplied Accessories:	515SA, 515SB: Swivel adapter; 515SB-G18: 457 mm (18 in.) gooseneck, mounting flange
Optional Accessories:	See Page 58

TYPICAL FREQUENCY RESPONSE, 515 SERIES

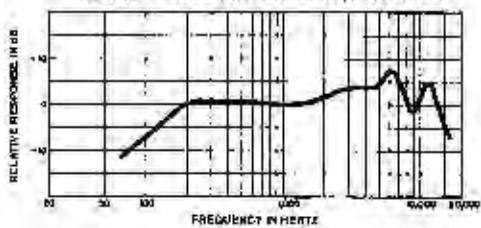

TYPICAL POLAR PATTERNS, 515 SERIES

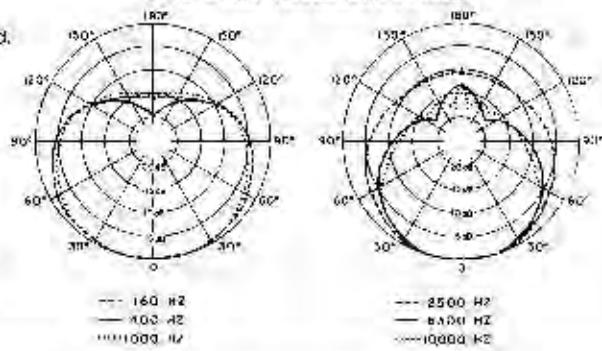

GENERAL PURPOSE/unidirectional dynamic microphones

545 Series and 546

Small and strikingly good-looking, the acoustic design of the UNIDYNE® III Series Microphones approaches the theoretical ideal for voice and music pickup. Their natural and remarkably faithful response makes them a favorite choice of singers and entertainers and excellent microphones for drum and instrument reproduction. The response extends from 50 to 15,000 Hz and is shaped for natural, clear and crisp pickup from voice and instruments.

Their unusually effective and uniform cardioid polar pattern is particularly well-suited for applications where feedback or background noise are problems. In addition, a cartridge shock mount minimizes handling and stand-borne noise.

The high output of the 545 Series and Model 546 provides for excellent signal-to-noise ratio.

These microphones are lightweight for handling comfort, yet rugged enough to keep on working under punishing conditions. All models (except 545L) are dual impedance to match the variety of amplifiers found in the field.

The microphone connector is the popular three-pin professional audio connector and the supplied cable has three-socket connector at microphone end (except the 545L, which offers an attached cable).

545D Without switch; for hand-held or stand-mounted use

545SD With an on/off switch; for hand-held or stand-mounted use

545SD-CN Same as 545SD but cable has a professional three-pin audio connector at the equipment end and of the 6.1m (20 ft) cable

545SD-LC Same as 545SD but without cable

545SH With an on/off switch and built-in swivel mount; for stand mounting

546 Dual low impedance with covered impedance-selecting switch;

attached swivel with special shock mount, for stand mounting



545L Low impedance only; attached cable; for lavalier and gooseneck applications (see Pages 39 and 41)



specifications

545 Series


Model:	50 to 15,000 Hz
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	Dual, 150 ohms/High
Output Level	
Open Circuit Voltage:	0.3 mV (-78.0 dB, 0 dB = 1V/ μ bar) 150 ohms 1.76 mV (-65.0 dB, 0 dB = 1V/ μ bar) High
Power Level:	-58.5 dB, 0 dB = 1mW/10 μ bar
Cable:	545D, 545SD, 545SH: 4.6m (15 ft) two-conductor shielded with three-sucker professional audio connector at microphone end 545L: attached 6.1m (20 ft) two-conductor shielded
Dimensions:	545D, 545SD: 15.7 mm L x 31.9 mm D (6.15/16 x 1 1/4 in.) 545SH: 115 mm H x 31.8 mm W x 138 mm D (4-17/32 x 1 1/4 x 5-7/16 in.)
Net Weight:	545D, 545SD: 265 grams (9 oz); 545SH: 425 grams (15 oz)
Packaged Weight:	545D, 545SD: 914 grams (21 3/4 oz); 545SH: 1.07 kg (2 lb, 6 oz)
Supplied Accessories:	545D, 545SD: swivel adapter, connector locking kit 545SH: switch lock cable
Optional Accessories:	See Page 58

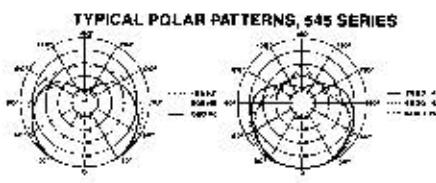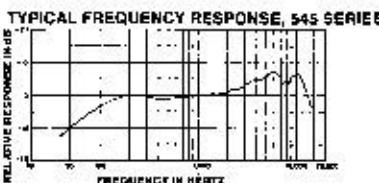

546

50 to 15,000 Hz
Cardioid (unidirectional)
Dual, .38 ohms (L), 150 ohms (H)
0.07 mV (-82.5 dB, 0 dB = 1V/ μ bar) L 0.16 mV (-76.0 dB, 0 dB = 1V/ μ bar) H
-57.5 dB 0 dB = 1mW/10 μ bar
6.1m (20 ft) two-conductor shielded with three-socket professional audio connector at microphone end
'25 mm H x 34.0 mm W x 138 mm D (4-29/32 x 1 3/16 x 5-7/16 in.)
510 grams (1 lb, 2 oz)
* 13 kg (2 lb, 6 oz)

See Page 58

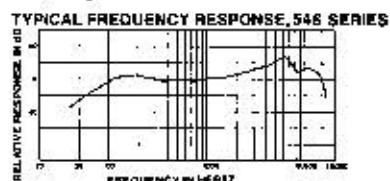

GENERAL PURPOSE/unidirectional dynamic microphones

565 Series

The UNISPHERE® I Model 565 Series Microphones are world-renowned for solving difficult acoustic problems in sound reinforcement, broadcast and recording. They are excellent reproducers of voice or music, and have extremely effective built-in spherical windscreens to permit close-up use without wind noise and breath popping. Their uniform cardioid pattern minimizes off-axis coloration, suppresses undesirable background noise, and permits higher gain before feedback. These features make them excellent in performance situations, particularly for handheld use.

The microphones have high output for excellent signal-to-noise ratio after amplification. Their wide frequency response of 50 to 15,000 Hz is shaped with a low-frequency rolloff to prevent the "booming" often associated with close-talking into a unidirectional microphone, and they have a presence boost at

high frequencies for a bright, crisp sound which enhances the intelligibility of speech and vocals.

The 565 Series Microphones are oval impedance, with ratings of 150 ohms or "High," for connection to the wide variety of amplifiers in the field. The microphone connector is the popular three-pin professional audio connector. Supplied cable has three-socket connector at microphone end.

565D With no switch, only the sound engineer controls the microphone at the console; for hand-held or stand-mounted use.

565SD With an on/off switch to control the microphone at the performer's position; for hand-held or stand-mounted use.

565SD-CN Same as 565SD, but 6.1m (20 ft) cable has a professional three-pin audio connector at the equipment end.

565SD-LC Same as 565SD but without cable.

565SH With an on/off switch and built-in swivel mount, for stand-mounted use.




specifications


565 Series

Model:	565D, 565SD, 565SH
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	Dual 150 ohms/High
Output Level	
Open Circuit Voltage:	0.4mV (+76.0 dB, 0 dB = 1V/ μ bar) 150 ohms 2.0mV (+54.0 dB, 0 dB = 1V/ μ bar) High
Power Level:	565D: 0.35, 0 dB 565SD: 1mW/100mV
Cable:	4.6m (15 ft) two conductor with three socket professional audio connector at microphone end.
Dimensions:	565D, 565SD: 162 mm L x 51 mm Dia. (6 23/64 x 2 in.) 565SH: 126 mm H x 51 mm W x .67 mm D (4 25/32 x 2 x 6 3/16 in.)
Net Weight:	565D, 565SD: 298 grams (.10 oz); 565SH: 454 grams (.1 lb)
Packaged Weight:	565D, 565SD: 0.97 kg (2 lb, 2 oz); 565SH: 1.07 kg (2 lb, 6 oz)
Supplied Accessories:	565D, 565SD: swivel adaptor, connector locking kit. 565SH: switch lockplate
Optional Accessories:	See Page 58

TYPICAL FREQUENCY RESPONSE, 565 SERIES

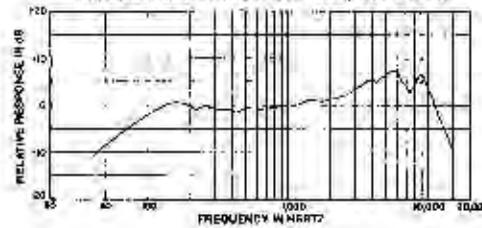

TYPICAL POLAR PATTERNS, 565 SERIES

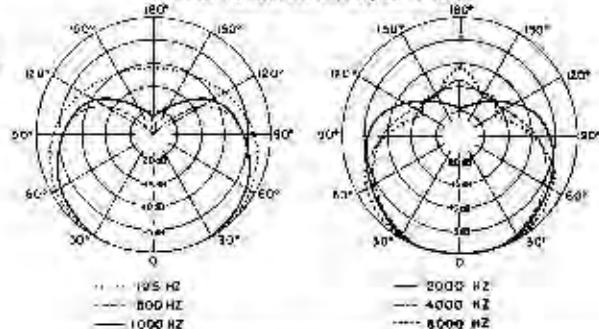

GENERAL PURPOSE/unidirectional dynamic microphones

586 Series

The UNISPHERE® A Model 586 Series are highly versatile microphones with a wide frequency response and unidirectional pickup pattern, particularly well-suited for sound reinforcement and recording. They feature a wire mesh windscreens and very effective filter that subdues wind noise in outdoor applications and provides excellent protection from breath "pop," enabling singers and speakers to perform close to the microphone. Handling and stand noise is reduced by means of an internal shock mount.

The microphones' effective cardioid polar pattern reduces feedback and echoing (boominess) even in proximity to loudspeakers. These microphones are equipped with an on-off switch with a supplied on-position lock. Their frequency response of 50 to 13,000 Hz is highly suitable for voice or music. A fixed low-frequency rolloff provides a natural-sounding closeup voice response, and a high-frequency presence boost

produces a clear, crisp sound for enhanced intelligibility of speech and vocals.

The 586 Microphones are available as either high impedance or low impedance. Both models are equally effective in hand-held or stand-mounted applications. The microphone connector is the popular three-pin professional audio connector that makes setup fast and simple.

586SA-C	High impedance; supplied cable has professional three pin audio connector at microphone end and 1/4-inch phone plug at equipment end
586SA-LC	High impedance; supplied without cable
586SB-CN	Low impedance; supplied cable has professional three-pin audio connectors at both ends
586SB-LC	Low impedance; supplied without cable




specifications


586 Series

Model:	586SA, 586SB, 586SA-LC, 586SB-CN, 586SB-LC
Frequency Response:	50 to 13,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	586SA: High; 586SB: 150 ohms
Output Level	
Open Circuit Voltage:	586SA: 1.6 mV (+56.0 dB); 586SB: 0.11 mV (-79.5 dB), 0.5dB = 1V/uBar
Power Level:	-69.5 dB, 0 dB = 1 mW/10 uBar
Cable:	586SA-C: 6.1 m (22 ft) single-conductor shielded with professional three pin audio connector at microphone end and 1/4 inch phone plug at equipment end. 586SB-CN: 6.1 m (20 ft) two-conductor shielded with professional three pin audio connectors at both ends.
Dimensions:	187 mm L x 49.2 mm Dia. (6 1/2" x 1 15/16")
Net Weight:	Less cable: 354 grams (12 1/2 oz)
Packaged Weight:	586SA-C: 709 grams (1 lb. 8 oz); 586SB-CN: 851 grams (1 lb. 4 oz); 586SA-LC: 586SB-LC: 470 grams (1 lb. 2 oz)
Supplied Accessory:	Swivel adapter
Optional Accessories:	See Page 59

TYPICAL FREQUENCY RESPONSE, 586 SERIES

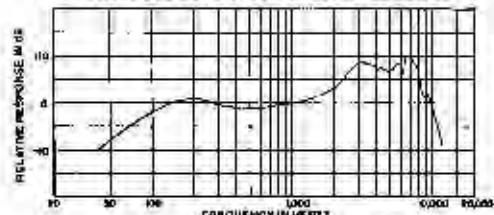

TYPICAL POLAR PATTERNS, 586 SERIES

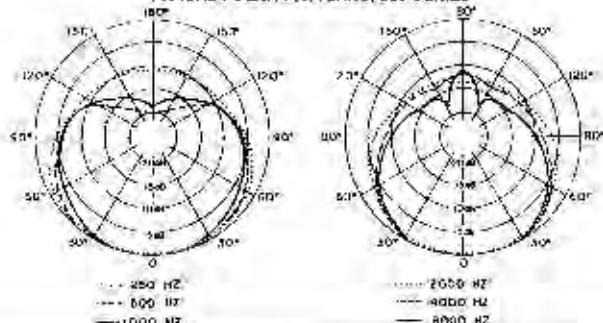

GENERAL PURPOSE/unidirectional dynamic microphones

588 Series

All the most desirable features in a unidirectional dynamic microphone at an economy price, that's the UNISPI IERE® B Model 588 Series. A built-in windscreen minimizes breath popping when used close-up and subdues wind noise when used outdoors. An on-off switch permits controlling the microphone at the performer's position. These microphones use the same three-pin professional audio connector found on professional studio microphones and consoles. A built-in locking plate permanently locks the microphone in the on position when the sound engineer wants to control the microphone at the console.

The 588 Series Microphones have a uniform cardioid polar pattern that reduces feedback even in acoustically difficult locations. Their frequency response is 80 to 13,000 Hz, suitable for sound reinforcement or recording of voice and most instruments. The response is shaped with a fixed bass roll-off to provide natural sounding close-up voice reproduction, and with a high-

frequency presence boost to heighten intelligibility of speech and vocals. In addition, an effective shock mount isolates the cartridge from unwanted handling or stand-transmitted mechanical noise.

The microphones in the 588 Series are either high impedance or low impedance. All microphones in the series can be hand-held or stand-mounted. Supplied cable has three-socket connector at microphone end.


588SA High impedance, with on-off switch

588SAC Same as 588SA, but cable has an MC1F connector and a phone plug adapter at equipment end

588SB Low impedance, with on-off switch

588SB-CN Same as 588SB, but cable has a professional three-pin audio connector at equipment end of 6' 1in (20 ft) cable



588SB-LC Same as 588SB but without cable

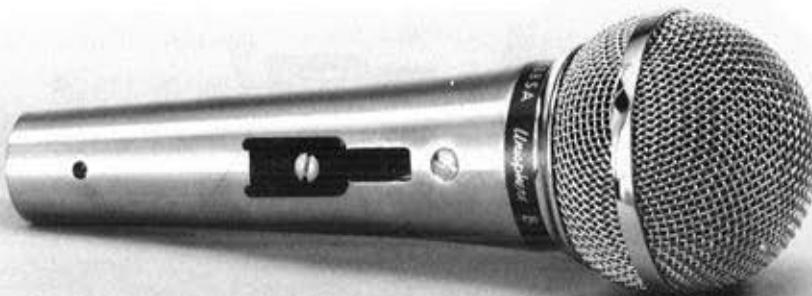

specifications

588 Series

Model:	588 Series
Frequency Response:	80 to 13,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	588SA: High; 588SB: 150 ohms
Output Level	
Open Circuit Voltage:	588SA: 1.16mV (-59.5 dB, 0 dB = 1V/ μ bar) 588SB: 0.08mV (-89.0 dB, 0 dB = 1V/ μ bar)
Power Level:	-60.5 dB, 0 dB = 1mW/10 μ bar
Cable:	588SA: 4.8m (15 ft) single-conductor shielded with three-socket professional audio connector at microphone end 588SB: 4.6m (15 ft) two-conductor shielded with three-socket professional audio connector at microphone end
Dimensions:	184 mm L x 54 mm Dia (6 15/32 x 2 7/16 in.)
Net Weight:	340 grams (12 oz)
Packaged Weight:	794 grams (1 lb, 12 oz)
Supplied Accessories:	Swivel adapter
Optional Accessories:	See Page 59

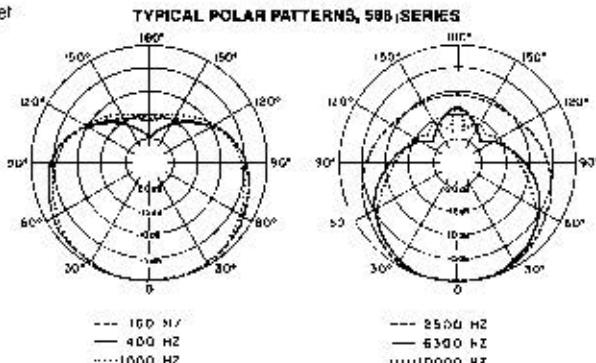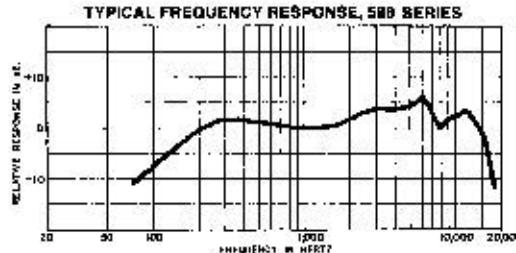

GENERAL PURPOSE/unidirectional dynamic microphone

55SH

Classic appearance combined with modern acoustics. The UNIDYNE® II Model 55SH is an excellent microphone for sound reinforcement and recording as well as for on-camera use in motion pictures or publicity situations where an instantly recognizable microphone is necessary.

The 55SH features a smooth, flat frequency response that conveys a mellow quality to voice and minimizes "bassiness" and sibilance. Its uniform cardioid polar pattern is well-suited for

optimum performance in adverse acoustic environments. The microphone is mounted on a self-tensioning, adjustable swivel and the cartridge is shock-mounted for quiet operation.


The 55SH is dual impedance and is equipped with a lockable on-off switch. The microphonic connector is the popular three-pin professional audio connector. Supplied cable has three-socket audio connector at microphone end.




specifications

55SH

Models:	55SH
Frequency Response:	50 to 12,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	Dual 150 ohms/Freq
Output Level:	
Open Circuit Voltage:	0.13 mV (-77.5 dB) @ 1000 ohms 1.07 mV (-65.3 dB) @ 100 ohms (0 dB = 1 V/ μ bar)
Power Level:	56.5 dB, 0.2 B - 1 mW/10 μ bar
Cable:	4 fm (15') two conductor shielded with three-socket professional audio connector at microphone end
Dimensions:	188 mm H x 55.6 mm W x 77.8 mm D (7-3/32 x 2-3/16 x 3-1/16 in.)
Net Weight:	1.36 grams (1 lb, 10 oz)
Packaged Weight:	1.4 kg (3 lb, 2 oz)
Supplied Accessories:	Switch lockplate
Optional Accessories:	See Page 56

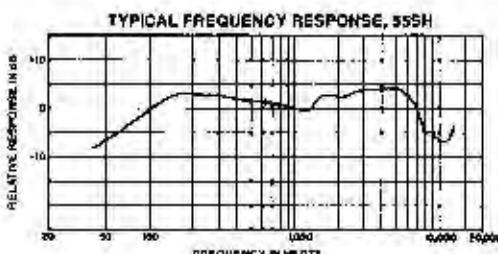

TYPICAL POLAR PATTERN



GENERAL PURPOSE/omnidirectional dynamic microphones

578

The OMNIOYNL Model 578 Microphone is ideal for high quality sound reinforcement, theater-stage sound systems, broadcast and recording applications. It is also recommended for hand-held interview use.

Its smooth, flat response from 50 to 15,000 Hz is suitable for accurate pickup of musical instruments as well as speech and vocals. A rugged steel case and stainless steel grille ensure dependability under the heaviest use, indoors and out. The 578 can be hand held or stand-mounted, is equipped with a locking on-off switch, is dual impedance to match the wide variety of amplifiers found in the field, and is equipped with an attached cable.

579SB

The VOCAL SPHERE Model 579SB Microphone is designed to provide very natural and intelligible voice reproduction with freedom from annoying wind and breath noises. This slim, neat-appearing microphone is a rugged unit built to withstand the severest field use. The performance, small size, and ruggedness make it an ideal choice for sound reinforcement, broadcast, theater-stage sound systems, meeting rooms, recording, and other field and studio applications.

Many professional features are standard on the 579SB, including balanced-line low impedance configuration to permit unlimited cable lengths, and effective built-in wind and "pop" filter to reduce breath noise. It is equipped with a long-life on-off switch, with a lockplate to lock the switch on, and is equally effective as a hand-held or stand-mounted microphone. Supplied cable has three-socket connector at microphone end.


579SB

578


specifications

578

Model:	578
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	Dual: 160 ohms/High
Output Level:	
Open Circuit Voltage:	0.1 mV (-80.0 dB, 0 dB = 1V/μbar) 150 ohms
	1.12 mV (-59.0 dB, 0 dB = 1V/μbar) High
Power Level:	-60.0 dB, 0 dB = 1 mW/10 μbar
Cable:	Attached 4.6m (15 ft) three conductor shielded
Dimensions:	188 mm L x 20 mm Dia. (7 1/2" x 3/4" in.)
Net Weight:	454 grams (1 lb)
Packaged Weight:	768 grams (1.7 lb, 14 oz)
Supplied Accessories:	Swivel adapter
Optional Accessories:	See Page 59

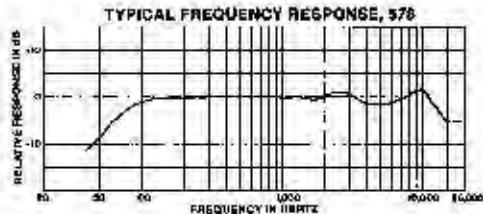

TYPICAL POLAR PATTERNS, 578



579SB

Model:	579SB
Frequency Response:	50 to 14,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	160 ohms
Output Level:	
Open Circuit Voltage:	0.13 mV (-78.0 dB, 0 dB = 1V/μbar)
	-57.0 dB, 0 dB = 1 mW/10 μbar
Power Level:	6.1 m (20 ft) two conductor shielded with three-socket professional audio connector at microphone end
Cable:	162 mm L x 39.7 mm Dia. (6 1/2" x 1 1/2" in.)
Dimensions:	156 grams (5 1/4 oz)
Net Weight:	217 grams (1 lb, 10 oz)
Packaged Weight:	Swivel adapter
Supplied Accessories:	See Page 59

TYPICAL FREQUENCY RESPONSE, 579SB



NEW PRODUCTS FROM SHURE!

In recent months, Shure has introduced several new microphone and circuitry products and has reintroduced the legendary 520D "Green Bullet" Microphone. Features and specifications on these exciting new products are inside:

FP11 Mic-to-Line Level Amplifier and
FP12 Headphone Bridging Amplifier

838 Lavalier Condenser Microphone

SM90 Omnidirectional Surface-Mounted Microphone and
SM91 Unidirectional Surface-Mounted Microphone

512 Headworn Microphone

520D Harmonica Microphone

SM98 Miniature Musical Instrument Microphone

FP11

The FP11 is a portable, 1-input, 1-output microphone-to-line level amplifier designed for field production applications including electronic news gathering (ENG), electronic field production (EFP), and on location film production. It is ideal for use where long lines must be driven at higher than microphone or aux levels. It can also be used to interface between equipment requiring different signal levels.

The FP11 provides up to 84 dB of gain so that microphone and auxiliary level devices can be boosted to line level. The gain is controlled by a 15-position, precision stepped rotary switch providing accurate gain indication and ease of resetting. Each step provides a 6 dB gain change.

The balanced, locking XLR input and output provide for excellent rejection of hum and RF interference. A switchable peak limiter prevents output overload distortion. Additional features include a peak/limiter LED indicator, aux level mini-phone jack input, balanced line-level binding post output, and a removable belt clip. The FP11 is powered by one standard 9V battery.

**FP12**

The FP12 is a 1-input, 2-output headphone bridging amplifier designed to provide headphone feeds from any type of audio input. Unlike other headphone amplifiers that unbalance and "terminate" the input signal, the FP12 may be operated in-line. The signal is greatly amplified to drive headphones while leaving the "looped through" input signal undisturbed. The FP12 can be used for a wide variety of applications such as multiple headphones feeds, audio line troubleshooting, extra power for existing headphone circuits, a two-station intercom system, or a means of practicing electronic instruments through headphones.

The FP12 features two XLR in/out connectors and two 1/4 inch in/out jacks. In addition, two pairs of headphone outputs are provided, each consisting of one stereo 1/4-inch phone jack and one stereo 3.5 mm mini-phone jack. Other features include a Mic/Line input switch, Hi Z/Low Z headphones switch, headphone level control, and removable belt clip. The FP12 is powered by one standard 9V battery.

**specifications****Model:** FP11

Frequency Response:	20 to 20,000 Hz, +/- 3 dB
Voltage Gain at 1,000 Hz:	Low impedance microphone input: +84 dB High-level input: +63 dB
Equivalent Input Noise:	129 dBV
Distortion:	Under 0.5% THD from 40 to 20,000 Hz at 115 dBm
Input Clipping Level:	20 dBV
Output Clipping Level:	+18 dBm
Limiter:	Threshold: +12 dBm
Power:	9V alkaline battery; provides approximately 25 hours of continuous operation
Overall Dimensions:	80.9 mm x 150 mm x 55.5 mm (3 1/4" x 5 7/8" x 2 1/8")
Net Weight:	521 grams (1 lb 2 oz)

Model: FP12

Frequency Response:	45 to 15,000 Hz, +/- 3 dB
Voltage Gain at 1,000 Hz:	100-70 dB (Mic); 20 dB (Line) 100-60 dB (Mic); 40 dB (Line)
Equivalent Input Noise:	116 dBV
Distortion:	Under 1% THD from 40 to 15,000 Hz
Input Clipping Level:	Microphone: -14 dBV Line: +35 dBV
Output Clipping Level:	Low impedance: -25 dBV High-impedance: +23 dBV
Power:	9V alkaline battery; provides approximately 25 hours of continuous operation
Overall Dimensions:	80.9 mm x 150 mm x 55.5 mm (3 1/4" x 5 7/8" x 2 1/8")
Net Weight:	501 grams (1 lb 2 oz)

GENERAL PURPOSE/lavalier microphone

838 NEW


The Shure 838 is a miniature, lavalier condenser microphone, ideal for sound reinforcement applications where high quality is required and where cost is a consideration. The 838 is extremely rugged and reliable and offers outstanding performance. Its wide frequency response, low distortion and low RF susceptibility make it an exceptional microphone for use in churches, schools, hotels and budget-minded broadcast, film and video productions, or for mixing musical instruments.

The 838 features a specially tailored frequency response designed to provide more natural sound when the microphone is chest-worn. This response is achieved by an acoustically generated high-frequency boost for a flatter response in the lavalier position. In addition, a 12 dB/octave rolloff below 100 Hz helps reduce room noise and other undesirable low-frequency signals.

To minimize cable visibility, the 838's cable emerges from

the side, rather than the bottom, of the microphone housing. This arrangement makes the thin, strong microphone cable even more unobtrusive by eliminating the distracting cable loop visible below most lavalier microphones. Other features include: a universal tie bar that allows the 838 to be mounted in four different positions—offering total flexibility to the wearer or when mixing acoustic musical instruments; a field-replaceable cartridge that is easily detached from the cable without unsoldering; and an attached power supply which uses a standard 9-volt battery and can be pocketed or clipped to a belt or waistband.

The 838 is finished in an attractive platinum beige color and the microphone and electronics assembly may be stored in the supplied durable vinyl zipper bag. An acoustic windscreens for outdoor use is also supplied.

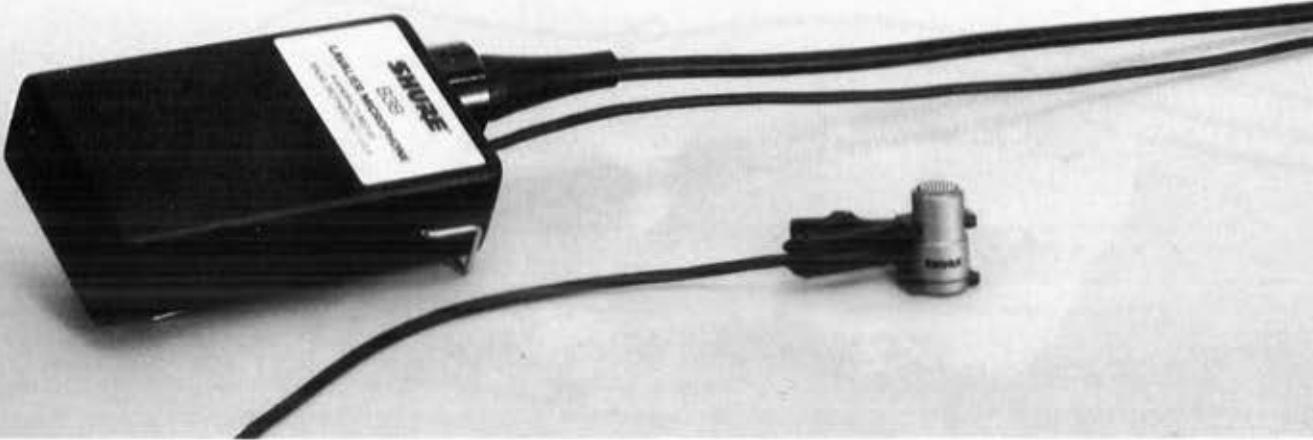

specifications

Model

838

Frequency Response

80 Hz to 20,000 Hz

Polar Pattern

Omnidirectional

Impedance Rating

800 ohms

Output Level

0.22 mV (-73.0 dB, 0 dB = 1V/uBar)

(equivalent sound pressure level is measured with true rms voltmeter)

26 mV typical, A-weighted

32 dB typical, weighted per DIN 45 405

Maximum SPL

137 dB with 2000-ohm load

132 dB with 800-ohm load

Hum Pickup

20 dB equivalent SPL in a 1 millitered field (60 Hz)

Cables

Microphone: 1.5 m (5 ft) attached, two-conductor shielded Power Supply: 3m (10 ft) attached, two conductor, shielded TRIP-FIT™ with 3-pin professional audio connector


Dimensions

Microphone: 19.6 mm L x 1.2 mm Dia. (7/8 x 1/2 in.)
Power Supply: 23.1 mm H x 49.0 mm W x 94.8 mm D
(9 1/2 x 1 1/2 x 3 3/4 in.)

Net Weight Microphone: 6 grams (0.21 oz)
Power Supply: 771 grams (1.69 oz) including battery and cables

Power Battery: 9 Vdc (type 1604A, a alkaline recommended); 0.2 mA current drain; approximately 2500 hours continuous use with fresh alkaline battery
Mechanically protected against reverse voltage application

TYPICAL FREQUENCY RESPONSE, 838

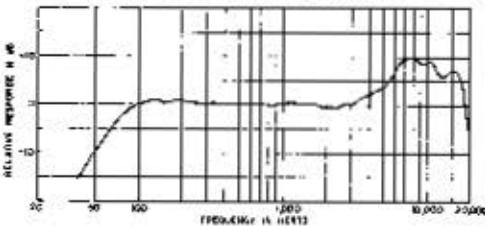

PROFESSIONAL STUDIO/unidirectional and omnidirectional surface-mount microphones

SM90 and SM91 NEW

The SM91 is a surface mounted, permanently biased condenser microphone with a half-cardioid directional pattern (cardioid in the hemisphere above the mounting surface). It is designed for broadcast and recording as well as installations in meeting rooms, courtrooms, legislative chambers, churches, and stages... anywhere high performance surface-mounted microphones are employed.

Because of its half-cardioid pattern, the SM91 discriminates against sounds originating from the rear, making the SM91 for conditions where an omnidirectional "pressure zone" type surface mounted microphone would be unsuitable. In addition, the unidirectional pattern permits the microphone to operate with much less reverberant pickup and muddiness than omnidirectional models.

The unidirectionality of the SM91 can be a great benefit when it is desirable to isolate a particular vocalist, instrument or group from the rest of an ensemble being recorded. It can also be used for individual instrument pickup such as mounted inside the lid of a grand piano or on the floor next to a bass drum. And because of the

cardioid pickup pattern, no physically isolating barriers are required and directionality is maintained to low frequencies.

The SM91 includes a totally new microphone element developed at Shure. The result is high output, notably accurate sound reproduction over the entire audio frequency range, and off-axis performance comparable to the finest unidirectional microphones.

For those cases where an omnidirectional microphone is preferred or necessary, the SM90 omnidirectional surface-mounted microphone is also available. Mounted in the same housing as the SM91, and using the same electronics pack, the SM90 offers all the esthetic values of the SM91, and all the operational characteristics of an omnidirectional microphone, such as smooth pickup in a 360° pattern allowing a single microphone to be used for a group pickup or where feedback is not a concern.


Both the SM90 and the SM91 are supplied with a low distortion preamplifier which powers the microphones either by batteries or phantom power. A low frequency cut-off switch allows tailoring the response of the SM90 or SM91 to suit the need.




specifications

Models:	SM90 and SM91
Frequency Response:	20 to 20,000 Hz at 30° incidence to infinite surface
Polar Pattern:	SM90: Omnidirectional in hemisphere above mounting surface SM91: Half-cardioid (cardioid in hemisphere above mounting surface)
Impedance Rating:	150 ohms (min-max recommended load: 800 ohms)
Output Level	SM90: 0.5 mV (-60 dB, 0 dB = 1 V/ubar) SM91: 0.35 mV (-69.0 dB, 0 dB = 1 V/ubar)
Open Circuit Voltage:	SM90: 20 dB SPL A-weighted 23 dB SP, weighted per DIN 45 405 SM91: 23 dB SP, A-weighted 20 dB SP, weighted per DIN 45 405
Output Noise:	SM90: 14 dB at 800 ohm load SM91: 14 dB at 800 ohm load
Maximum SPL:	SM90: 141 dB at 800 ohm load SM91: 141 dB at 800 ohm load
Power:	Battery: Two, 9 Volt alkaline (approx. max. 300 hours continuous with fresh batteries) Supply voltage: 11 to 52 Volt, 1.8 mA current drain
Cable:	7.6m (25 ft) two-conductor shielded, small connector, interconnecting cable with 3.5x10 mm miniature connector on each end to mate with microphone output connector and unshielded input connector
Dimensions:	Microphone: 16.2 mm H x 65.8 mm W x 120 mm D (1.18" x 2.58" x 4.76" in.) Preamplifier: 27 mm H x 60.8 mm W x 12 mm D (1.07" x 2.38" x 0.47" in.)

TYPICAL FREQUENCY RESPONSE, SM90

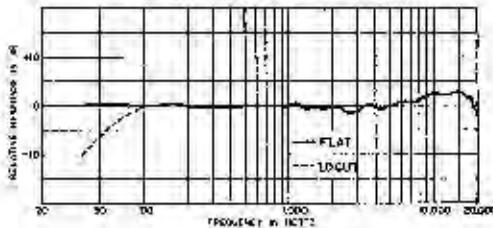

TYPICAL FREQUENCY RESPONSE, SM91

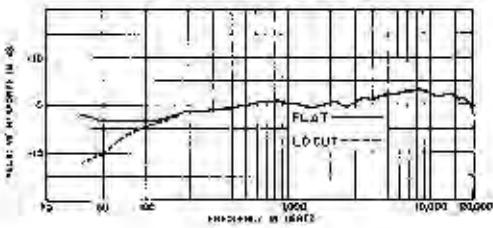

GENERAL PURPOSE/headworn microphone

512 NEW

The Shure Model 512 is a new specially designed headset combining an efficient "open air" headphone with a unidirectional close-talking dynamic microphone. The 512 offers many of the high quality features of the well-known Shure SM12A at a more economical price. The headset design allows hands-free operation without user fatigue—it is light weight, durable, and extremely comfortable. The tightly controlled frequency response and pickup pattern of the 512 microphone reduces unwanted background noise, permitting its use in noisy environments. The receiver

response is tailored to enhance voice intelligibility.

The 512 is an excellent choice for drummers and keyboard players because it allows freedom of movement while the adjustable boom maintains proper mouth-to-microphone distance. Other applications include sports and news announcing, communications systems, and special events remote broadcasting.

The 512 is supplied complete with cable, connectors, boom pop filter, and cable clip to secure the cable to clothing, keeping it out of the way and reducing cable noise.




specifications


512

Model:	512
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	150 ohms (microphone); 8 ohms (headphones)
Output Level (microphone)	
Open Circuit Voltage:	4.5 mV (-27.0 dB, 0 dB = 1W/100 μbar)
Power Level:	-86.0 dB, 0 dB = 1W/10 pbar
Output level (headphones)	94 dB SPL at ear with 1 mW input
Hum Pickup/mΩe:	38.4 SPL equivalent
Cable:	2.1 m (7 ft) attached cables: one two-conductor shielded with braided 3-pin XLR connector; one conductor; and one single conductor shielded with two-circuit phone plug (recessed)
Dimensions:	Microphone: 14 mm H x 15.9 mm D x (1/8 x 5/8 in.) Boom: 203 mm L (8 in.)
Net Weight:	186 grams (6.5 oz) including cables and connectors
Supplied Accessories:	boom windsor/pop filter, cable clip


TYPICAL HEADPHONE RESPONSE, 512

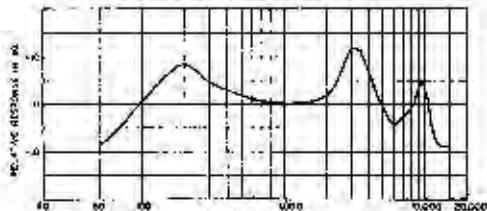

TYPICAL FREQUENCY RESPONSE, 512

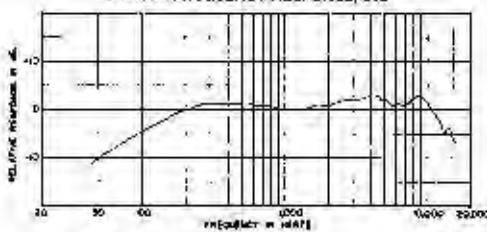

TYPICAL POLAR PATTERN, 512

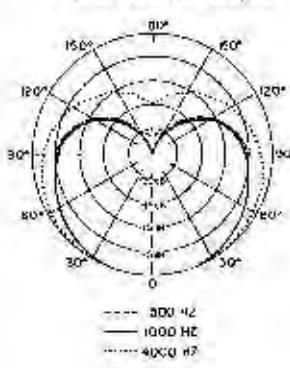

GENERAL PURPOSE/harmonica microphone

520D

The legendary 520D CONTROLLED MAGNETIC® "Green Bullet" microphone is world-renowned for delivering the "downharmonica" sound that has made it so popular with harmonica players. It features a controlled low-end frequency response which reduces "bassiness" and delivers the "gritty" sound and response harmonica players want. Its size, weight and styling make it an exceptional choice for performers who want freedom to move about the stage—and still be heard.

The microphone can be cupped in the hands, used on a stand, stand with boom, or gooseneck-mounted to suit the needs of the individual performer. The 520D can be connected as supplied to high or unbalanced low-impedance microphone inputs, or it can be connected to balanced low-impedance inputs after a simple internal modification. The 520D includes a sturdy die-cast metal case and grille, and a reliable permanently-attached two conductor shielded cable.




specifications

Model: ...

520D

Type:	CONTROLLED MAGNETIC®	
Frequency Response:	100 to 5,000 Hz	
Polar Pattern:	Omni-directional	
Load Impedance (ohms):	Low	High
Minimum:	150	15 kilohms
Recommended:	1,000	100 kilohms
Output Level:	Low	High
Open Circuit Voltage*,	0.22 mV (-73.0 dB)	1.6 mV (-58.0 dB)
Power Level**	51.0 dB	
	*0 dB = 1 volt per microbar	
	**0 dB = 1 milliwatt per 10 microbar	
Cable:	6.1m (20 ft) two conductor shielded (mm connector)	
Dimensions:	62.7 mm diameter, 82.6 mm long (2 1/2 in. x 3 1/4 in.)	
Net Weight:	830 grams (22 oz)	

TYPICAL FREQUENCY RESPONSE, 520D

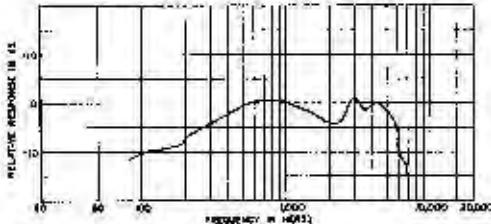

SM98 NEW

The Shure SM98 is a professional-quality, miniature unidirectional condenser microphone that combines the convenience and adaptability of small size with outstanding performance capabilities.

The advantages and features of the SM98 make it an ideal choice for many acoustic instrument or amplified instrument miking situations—especially drums. The SM98 utilizes a high performance, low-noise, low-distortion preamp, allowing it to be used for close miking of drums, brass instruments, amplifiers and other high SPL sources without danger of overload problems. It features a wide, extremely smooth frequency response for accurate, faithful reproduction of acoustic instruments. Attributed to its small size, the SM98 also boasts a nearly perfect cardioid polar pattern at all frequencies for superior source isolation.

The SM98 is an excellent choice for sound reinforcement applications where an extremely small, professional-quality unidirectional microphone is required—such as theater, podium, altar and lectern applications.


The SM98 incorporates a detachable cable which adds to the ease of set up and tear down. The preamp is powered by two standard 9-volt batteries or an 11 to 52 Vdc simplex (phantom) supply. It features a battery on/off switch and a 12 dB/octave low-cut-off switch.

Included with the SM98 is a unique swivel adapter which allows the miniature microphone to be used with all standard mic stands, booms and goosenecks. Both microphone and preamp are finished in matte black for a professional appearance. All components fit into a black, hinged storage box with polyurethane inserts for secure storage.

**specifications**

Model:	SM98
Frequency Response:	.4K to 20,000 Hz
Polar Pattern:	Unidirectional (cardioid)
Impedance Rating:	50 ohms
Output Level:	0.1 mV / 76.0 dB U.S.L = 1V/1000
Open Circuit Voltage:	0.1 mV / 76.0 dB U.S.L = 1V/1000
Output Noise:	Equivalent sound pressure level measured with true rms voltmeter 32 dB SPL, A-weighted 35 dB SPL, weighted ps SPL at 40° at 1,000 Hz 15.1 dB with 600 ohm load
Maximum SPL:	-7 dB equivalent SPL in 1 millisecond load (80 Hz)
Hum Pickup:	< -70 dB equivalent SPL in 1 millisecond load (80 Hz)
Cable:	4.6 m (15 ft) two-conductor shielded, small diameter, mic connecting cable with 1/4-inch female Switchcraft 111 GLC connector on each end to mate with microphone output connector and preamplifier input connector
Dimensions:	Microphone: 21.8 mm L x 11.9 mm D (1 1/4" x 1 1/2") Preamplifier: 112 mm L x 60.8 mm W x 27 mm D (4 3/4" x 2 3/4" x 1 1/16")
Net Weight:	Microphone: 12 grams (0.4 oz) less cable Preamplifier: 320 grams (1.3 oz) with batteries

Power:	Battery: Two 9-Vdc alkaline, approximately 300 hours continuous use with fresh battery Simplex (phantom) Voltage: 11 to 52 Vdc; 1.8 mA current drain
Supplied Accessories:	Windscreen, swivel adapter

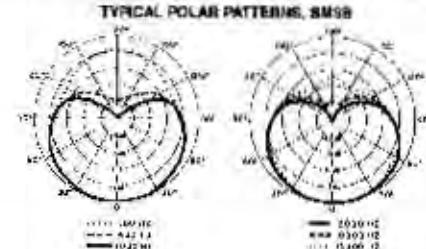

GENERAL PURPOSE/omnidirectional dynamic microphones

533

The SPHER-O-DYNE® Model 533 Series Microphones are dynamic omnidirectional microphones with a spherical grille. The units provide wide-range reproduction of music and voice, making them ideal for general purpose use in public-address, theater-stage sound systems, and tape recording applications where feedback isn't a problem. Their convenient size and light weight are particularly well-suited to rock and other performing groups. They are also recommended for interview applications where the spherical pickup pattern of the microphone is important.

The built-in pop filter is ideal for close-up use, minimizing explosive breath sounds. Good reproduction of voice and music is provided by the wide, flat frequency response from 40 to 11,000 Hz.

The microphones are equipped with an on-off switch, and a lockplate is supplied for occasions when it is desirable to lock the microphone on. They operate equally well as hand-held or stand-mounted units. Supplied cable has MC1F connector at microphone end.

533SA: High impedance


533SAC: Same as 533SA, but cable has an MC1F connector and a phone plug adapter on equipment end.



specifications

533

Model:	533
Frequency Response:	40 to 11,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	High
Output Level:	
Open Circuit Voltage:	1.77 mV (-56.0 dB, 0 dB = 1V/μbar)
Power Level:	-56.0 dB = 1 mW/10 μbar
Cable:	533SA: 4.6m (15 ft) single conductor shielded with Amphenol type MC1F connector at microphone end 533SAC: 4.6m (15 ft) single conductor shielded with Amphenol type MC1F connector at microphone end and 1/4 inch phone plug at equipment end
Dimensions:	168 mm L x 52.4 mm Dia. (6-13/32 x 2-1/16 in.)
Net Weight:	312 grams (11 oz)
Packaged Weight:	709 grams (1 lb. 11 oz)
Supplied Accessories:	Sw vol adapter
Optional Accessories:	See Page 58

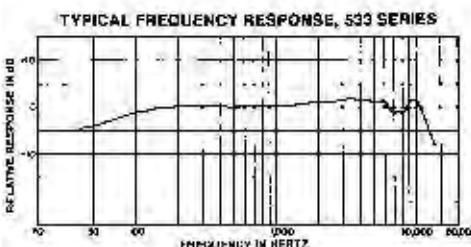

GENERAL PURPOSE/omnidirectional dynamic microphones

571

The OMNIDYNE Model 571 is a studio-quality, miniature omnidirectional microphone. It features excellent voice reproduction characteristics including a smooth, peak free frequency response of 50 to 10,000 Hz.

Recommended for applications in TV, motion picture, theaters, and sound reinforcement where a high-quality, inconspicuous microphone is required. It is remarkably rugged and reliable... even under adverse operating conditions.

The 571 is a low-impedance microphone suitable for hand-held or stand-mounted use, as well as suspended over-the-stage applications. The microphone is equipped with an attached cable.

575 Series

The VERSADYNE Model 575 Series Microphones offer excellent quality and performance at a very modest price. They feature a wide (40 to 15,000 Hz) frequency response and omnidirectional pickup characteristics that are excellent for both music and voice reproduction in taping and general sound reinforcement applications.

The 575 Series Microphones are ruggedly built to withstand rough usage and wide variations in temperature and humidity. Their small size and light weight make them suitable for a wide variety of applications: wall- or panel-mounted, on a desk or floor stand, for lavalier or hand held use.

They are equipped with a built-in on-off switch and an attached cable.

575S high impedance



575SB low impedance



specifications


571

Model:	571
Frequency Response:	50 to 10,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	150 ohms
Output Level	
Open Circuit Voltage:	3.08 mV (-81.5 dB, 0 dB = 1V/ μ bar)
Power Level:	60.5 dB 0 dB = 1mW/10 μ bar
Cable—Attached:	Attached 9' ft (3m) two-conductor shielded
Dimensions:	66 mm L x 20.5 mm Dia. (2 $\frac{1}{2}$ " L x $\frac{1}{4}$ " Dia.)
Net Weight:	58 grams (2 oz)
Packaged Weight:	680 grams (1 lb. 8 oz)
Supplied Accessories:	Swivel Adapter
Optional Accessories:	See Page 59

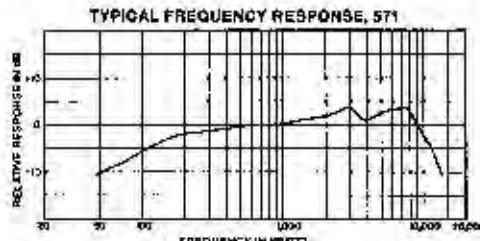

575 Series

40 to 15,000 Hz
Omnidirectional
575S, High: 150 ohms
575SB, Low: 150 ohms
575S: 1.5mV (-56.0 dB); 575SD: 0.11mW (-79.0 dB)
-58.0 dB, 0 dB = 1mW/10 μ bar
2.1mV (-11.5 dB); single conductor shielded
121mm L x 34.7 mm Dia. (4 $\frac{1}{2}$ " L x 1-11/32" Dia.)
220 grams (7.8 oz); 275S: 198 grams (7 oz)
482 grams (1 lb. 8 oz); 275S: 454 grams (1 lb.)
Stand adapter lavalier assembly
See Page 59

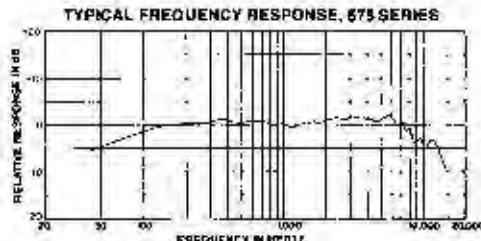

GENERAL PURPOSE/gooseneck microphones

515BG, 515SBG, 515SB-G18, 545L, 561, 562, and 572G

Shure makes a complete line of gooseneck mountable microphones to meet virtually every requirement in gooseneck applications. These microphones offer exceptional performance and features for many different purposes such as sound reinforcement and recording; in TV or radio newsrooms; on podiums; for control room talkback; or for communications or paging. They are ideal wherever fixed permanent or semi-permanent installations are required.

Shure gooseneck microphones are available in unidirectional, omnidirectional, or noise-canceling types. Frequency responses range from the very wide 545L (50 Hz to 15 kHz) to the very narrow, noise-canceling 562 (100 Hz to 6 kHz). The 515SBG and 515SB-G18 feature PTT momentary switches for those applications that require push-to-talk operation. The very small, inconspicuous, omnidirectional 572G is supplied with a small diameter gooseneck and is highly suited for voice applications.

All models are low impedance, are furnished with an attached cable, and have standard 5/8"-27 threads.

The chart below will aid in selecting the right Shure gooseneck microphone for your application.

Model	Type	Frequency Response	Switch	Gooseneck
515BG	Unidirectional	80 Hz to 13 kHz	None	Not supplied*
515SBG	Unidirectional	80 Hz to 13 kHz	PTT Momentary	Not supplied*
515SB-G18	Unidirectional	80 Hz to 13 kHz	PTT Momentary	Supplied 18 in. with mounting flange
545L	Unidirectional	50 Hz to 15 kHz	None	Not supplied*
561	Omnidirectional	40 Hz to 10 kHz	None	Not supplied*
562	Noise-Canceling	100 Hz to 6 kHz	None	Not supplied*
572G	Omnidirectional	50 Hz to 10 kHz	None	Supplied 12 in. with mounting flange

*For accessory goosenecks, see page 56



specifications

Model:

561

Frequency Response: 40 to 10,000 Hz

Polar Pattern: Omnidirectional

Impedance Rating: 150 ohms

Output Level

Open Circuit Voltage: -0.13 mV (-77.5 dB, 0 dB = 1V/μbar)

Power Level: -56 dB (0 dB = 1 mW/10 μbar)

Cable—Attached: 1.2m (4 ft) two-conductor shielded

Dimensions: 67.1 mm L x 34.5 mm Dia. (2 1/2" x 1 3/8")


Net Weight: 142 grams (5 oz)

Packaged Weight: 256 grams (9 oz)

Supplied Accessories: No. 4 Allen wrench

Optional Accessories: See Page 56

TYPICAL FREQUENCY RESPONSE, 561

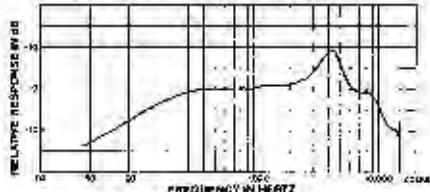

For specifications on 515 Series Gooseneck Microphones see page 30, for 545L see page 31.

562

100 to 6,000 Hz

Unidirectional noise-canceling

150 ohms

Output Level

Open Circuit Voltage: -0.08 mV (-82.0 dB, 0 dB = 1V/μbar)

Power Level: -62.0 dB (0 dB = 1 mW/10 μbar)

Cable—Attached: 1.2m (4 ft) two-conductor shielded

Dimensions: 67 mm L x 34.6 mm Dia. (2 1/2" x 1 3/8")


Net Weight: 128 grams (4 1/2 oz)

Packaged Weight: 241 grams (8 1/2 oz)

Supplied Accessories: No. 4 Allen wrench

See Page 56

TYPICAL FREQUENCY RESPONSE, 562

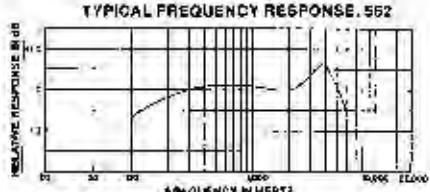

572G

50 to 10,000 Hz

Omnidirectional

150 ohms

Output Level

Open Circuit Voltage: -0.08 mV (-82.0 dB, 0 dB = 1V/μbar)

Power Level: -61.0 dB (0 dB = 1 mW/10 μbar)

Cable—Attached: 1.5m (5 ft) two-conductor shielded

Dimensions: 87.8 mm L x 18.8 mm Dia. (3 1/2" x 7/8")


Net Weight: 339 grams L x 39.7 mm Dia. (13/8" x 1 1/4") total including gooseneck and mounting flange

Packaged Weight: 340 grams (12 oz)

Supplied Accessories: No. 4 Allen wrench

See Page 56

TYPICAL FREQUENCY RESPONSE, 572G

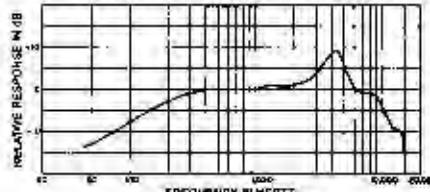

GENERAL PURPOSE/lavalier microphones

SM11

Tiny, rugged, with wide-range frequency response—the SM11 is the world's smallest dynamic element lavalier microphone! Less than half the size of a standard microphone connector, it is ideal for on-camera TV and motion picture applications. It has a smooth, natural sound quality that's optimized for lavalier use. Its dynamic cartridge and aluminum case are amazingly rugged and reliable, with excellent humidity and heat resistance. All this and full field serviceability! The SM11 comes with three mounting options: a lavalier cord assembly, tie bar, and tie tack. In addition, a special clip secures the cable connector to the performer's belt or clothing.

SM51

The SM51 is designed for use in radio, TV and motion picture applications—anywhere a small, wearable, professional-quality microphone is required. Its lavalier-optimized frequency response matches the sound of most hand-held or stand-mounted microphones. Although small and lightweight, the SM51 is ruggedly constructed—its steel case provides both strength and excellent magnetic shielding. Smooth exterior surfaces and a recessed grille minimize clothing noise. The SM51 is supplied with a 'Positive-Lock' lavalier holder for simple, noise-free adjustment and firm grip; a belt clip to relieve cable weight, absorb sudden tugs on the cable, and minimize cable noise, and an attached 9.1m (30 ft) two-conductor shielded cable.




specifications

SM11

- Model:
Frequency Response: 50 to 15,000 Hz
Polar Pattern: Omnidirectional
Impedance Rating: 150 ohms
Output Level
 Open Circuit Voltage: 0.06 mV (-81.5 dB, 0 dB = 1V/ μ bar)
 Power Level: -64.0 dB, 0 cR = 1mW/10 μ bar
Hum Pickup/mOe: 35.3 dB SF, equivalent
Cable: Attached, 1.2m (4 ft), two-conductor, shielded with three-pin professional audio connector
Dimensions: 38.1 mm L x 14.7 mm Dia. (1 1/2 in. x 5/8 in.)
Net Weight: 7.8 grams (0.28 oz) less cable
Packaged Weight: 340 grams (12 oz)
Supplied Accessories: Lavalier assembly, tie bar assembly, tie tack assembly, belt clip
Optional Accessories: See Page 50


TYPICAL FREQUENCY RESPONSE, SM11

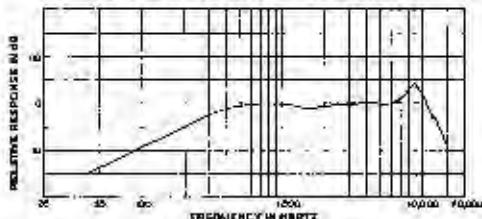

SM51

- Model:
Frequency Response: 10 to 12,000 Hz
Polar Pattern: Omnidirectional
Impedance Rating: 150 ohms
Output Level
 Open Circuit Voltage: 0.06 mV (-81.5 dB, 0 dB = 1V/ μ bar)
 Power Level: -60.5 dB, 0 dB = 1mW/10 μ bar
Hum Pickup/mOe: 35.3 dB SF, equivalent
Cable: 9.1m (30 ft), two-conductor shielded, attached
Dimensions: 67.7 mm L x 20.6 mm Dia. (2 7/8 in. x 7/8 in.)
Net Weight: 50 grams (2 oz)
Packaged Weight: 780 grams (1 lb. 11 1/2 oz)
Supplied Accessories: Lavalier assembly, belt clip
Optional Accessories: See Page 50

TYPICAL FREQUENCY RESPONSE, SM51

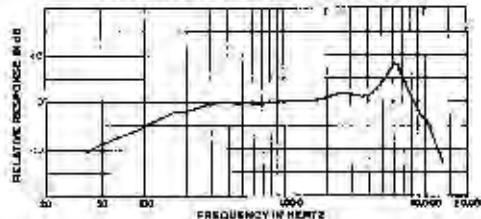

GENERAL PURPOSE/lavalier microphones

570 Series

Excellent, studio-quality lavalier microphones designed for broadcast and sound reinforcement assignments and for use by lecturers, moderators, panelists, clergy, or wherever an inconspicuous, wearable unit is indicated. Special "shaped" response provides superior lavalier performance and reduced clothing and cable noise pickup. Included are the exclusive "Flex-Grip" rapid attachment/adjustment lavalier assembly, a belt clip to secure the cable, and a 9.1m (30 ft) attached, small-diameter cable.

570 Without on-off switch

570S With on-off switch

545L

One of the most versatile microphones available: in addition to being worn as a lavalier unit, the 545L can be hand-held, mounted on a floor or desk stand, or affixed to a flexible gooseneck. It has a wide-range frequency response for voice and music reproduction, a unidirectional pickup pattern to reject unwanted nearby sound sources, and a low-impedance output for unlimited cable lengths. Rugged shock-mounted cartridge keeps clothing and cable noise to a minimum. Supplied with easily attached lavalier assembly, belt clip, and attached 6.1m (20 ft), small-diameter cable.


560

Professional lavalier microphone features at a modest price. The 560 is a dual-impedance, dynamic unit with a tailored frequency response that makes it an excellent choice for lecturers, performers, and clergymen. In addition to lavalier use, the 560 can be used as a hand-held or desk stand unit. Impedance can be changed quickly and easily by a simple internal adjustment. The compact, lightweight case is made of high-strength aluminum, finished in black satin, with a stainless steel grille. The supplied lavalier assembly provides convenient attachment and adjustment by the user. A very flexible, small-diameter, 5.5m (18 ft) cable is attached.

specifications


570 Series

Model:	570
Frequency Response:	50 to 2,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	50 ohms
Output Level	
Open Circuit Voltage:	0.08 mV (-21.5 dB, 0 dB = 1V/μbar)
Power Level:	-60.0 dB, 0 dB = 1mW/10μbar
Cable:	Attached, 9.1m (30 ft), two-conductor shielded, small diameter
Dimensions:	570: 66 mm L x 20.1mm Dia. (2 1/2 in. x 2 1/2 in.) 570S: 112 mm L x 20.1mm Dia. (4 1/2 in. x 2 1/2 in.)
Net Weight:	570: 58 grams (2 oz); 570S: 113 grams (4 oz)
Packaged Weight:	570: 182 grams (1 lb, 1 oz); 570S: 367 grams (1 lb, 4 oz)
Supplied Accessories:	Lavalier assembly, belt clip
Optional Accessories:	See Page 58

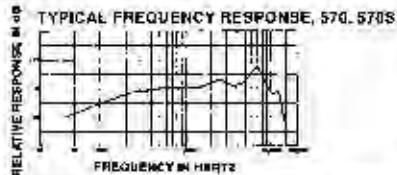


545L

Model:	545L
Frequency Response:	50 to 15,000 Hz
Polar Pattern:	Unidirectional
Impedance Rating:	150 ohms
Output Level	
Open Circuit Voltage:	0.13 mV (-77.5 dB, 0 dB = 1V/μbar)
Power Level:	-57.5 dB, 0 dB = 1mW/10μbar
Cable:	Attached, 6.1m (20 ft), two-conductor shielded, small diameter
Dimensions:	130 mm L x 31.8mm Dia. (5 1/8 in. x 1 1/8 in.)
Net Weight:	254 grams (12 1/2 oz)
Packaged Weight:	367 grams (1 lb, 4 oz)
Supplied Accessories:	Lavalier assembly, belt clip
Optional Accessories:	See Page 58

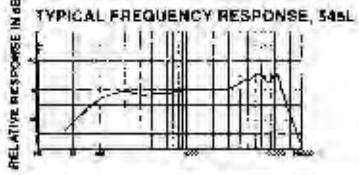

560

Model:	560
Frequency Response:	40 to 10,000 Hz
Polar Pattern:	Omnidirectional
Impedance Rating:	Dual 150 ohms/low
Output Level	
Open Circuit Voltage:	0.13 mV (-78.0 dB, 0 dB = 1V/μbar)
Power Level:	1.41 mV (-57.0 dB) High (0 dB = 1V/μbar)
Cable:	-56.0 dB, 0 dB = 1mW/10μbar
Dimensions:	Attached, 5.5m (18 ft), two-conductor shielded
Net Weight:	299 mm L x 35 mm Dia. (3 1/2 in. x 1 3/8 in.)
Packaged Weight:	284 grams (10 oz)
Supplied Accessories:	454 grams (16 oz)
Optional Accessories:	Lavalier assembly See Page 58



GENERAL PURPOSE/surface-mounted microphones

SM18 Series

The SM18's are high-quality dynamic microphones with color-coordinated foam enclosures and matching cables. The palm-size microphones "disappear" by blending into their surroundings in conference rooms, auditoriums, and churches. The physical and acoustic characteristics of these microphones make them ideal for use on altars or on conference tables where ordinary stand-mounted microphones might be visually distracting. The White SM18W is virtually unnoticeable on a white marble or linen-covered altar, while the Brown SM18B blends into a brown wood-finished surface.

Small as they are, the sound quality and intelligibility of the SM18 Series Microphones are outstanding. Their carefully tailored voice-range frequency response minimizes low frequency boominess and rolls off high frequencies above 10 kHz, thus minimizing pickup of spurious noise from undesirable sources such as rustling papers.

The SM18 Series Microphones offer a unique solution to the problem of sound pickup near a hard surface such as a desk,

tabletop, lectern or altar. The microphone is mounted in the foam enclosure at an angle that places the cartridge about $\frac{1}{2}$ in. from the hard surface. This minimizes the influence of sound reflections from the hard surface, thereby eliminating the uneven frequency and "hollow" sound which reduces intelligibility. In addition, as the reflected and direct sound waves are combined, the microphone output is increased by about 6 dB.

SM18B Brown foam enclosure, 2.7m (9 ft) attached brown cable with three-pin professional audio connector.

SM18B-50 Brown foam enclosure, 15m (50 ft) attached brown cable without connector.

SM18W White foam enclosure, 2.7m (9 ft) attached white cable with three-pin professional audio connector.


SM18W-50 White foam enclosure, 15m (50 ft) attached white cable without connector.



specifications

SM18 Series

Model:	SM18 Series
Frequency Response:	50 to 10,000 Hz
Polar Pattern:	Cardioid (uni-directional)
Impedance Rating:	150 ohms
Output Level	
Open Circuit Voltage:	0.18 mV (-75.0 dB, 0 dB = 1V/μbar)
Power Level:	-53.0 dB, 0 dB = 1 mW/10 mbars
Cable: SM18B, SM18W:	Attached 2.7m (9 ft) two-conductor shielded small diameter cable with three-pin, oroless, male audio connector at equipment end; SM18B-50, SM18W-50: Attached 15m (50 ft) two-conductor shielded small diameter cable
Dimensions:	.44.5 mm H x .89 mm W x .47.0 mm D (1 3/8 x 3 1/8 x 1 7/16 in.) (foam enclosure)
Net Weight:	1.0 grams (.34 oz)
Packaged Weight:	3.0 grams (.12 oz)

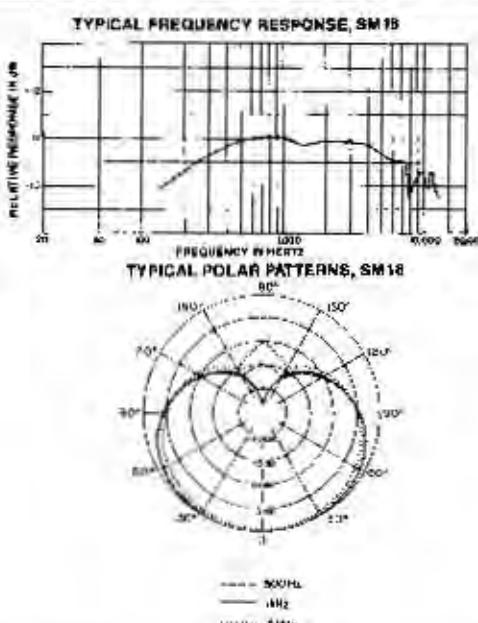

GENERAL PURPOSE/taping microphone

SP19 Series

Shure SP19 Series Microphones are lightweight, economical units with several built-in design features that make them outstanding for home recording. Their performance characteristics also make them an exceptional budget-minded choice for public address applications in schools, churches and meeting halls.

The low-impedance SP19L-CN is for use with mixers with XLR-type inputs and the SP19H-C high-impedance version can be plugged directly into a guitar amplifier, mixer or tape deck which feature the standard 1/4" phone jack. Both are unidirectional dynamic microphones that eliminate background noise in home recordings, excessive reverberation in church or hall recordings, and annoying feedback in PA applications.

No other microphone in this price range affords as many professional features. An internal shock mount reduces microphone noise and rumble associated with handling and stand vibration. In public address applications, the shock mount minimizes extraneous noises like podium tapping. A built-in, multi-stage windscreens virtually eliminates breath and wind noises, as well as "p" and "f" popping sounds. The tailored frequency response of the SP19 Microphones produces the Shure exclusive "live", clear sound, well-known in its higher priced professional microphones.

SP19 Series Microphones also feature a high-impact handle, on/off switch and permanently attached 15 foot microphone cable with connector for quick and easy connection.

SP19H-C High impedance
SP19L-CN Low impedance



specifications

SP19

Model:	SP19
Frequency Response:	80 to 13 000 Hz
Polar Pattern:	Cardioid (unidirectional)
Impedance Rating:	SP19H-C: High; SP19L-CN: Low (150 ohms rating)
Output Level	
Open Circuit Voltage:	SP19H-C: 0.9 mV (-60.5 dB 0 dB = 1V/ μ bar); SP19L-CN: 0.08 mV (-82.0 dB, 0 dB = 1V/ μ bar)
Power Level:	-62.5 dB, 0 dB = 1 mW/10 μ bar
Cable:	SP19H-C: 4.6m (15') single conductor shielded with phone plug at equipment end; SP19L-CN: 4.8m (15') single-conductor shielded with three pin audio connector at equipment end
Dimensions:	179 mm x 50.8 mm Dia. (7 $\frac{1}{16}$ x 2 in.)
Net Weight:	284 grams (10 oz)
Packaged Weight:	451 grams (1 lb)
Supplied Accessories:	Swivel adapter
Optional Accessories:	See Page 59

ABOUT SHURE COMMUNICATIONS MICROPHONES

The following section features the Shure line of Communications microphones, the "field standard" microphones in commercial, public safety and amateur applications. Shure microphones have been the overwhelming choice of communications users all over the world for over 30 years. As the leader in the development and manufacture of a wide variety of microphones, Shure's communications line covers virtually every requirement in communications installations.

With a wide selection of product features, performance characteristics and prices, more Shure microphones are used in prestigious communications applications than any other brand, and in police, fire and other public safety applications where reliability is critical, Shure mobile microphones are the preferred choice over the other brands.

In applications as diverse as voice processing, computer voice recognition, dispatching, public address, transportation services, ship-to-shore, and aircraft, as well as citizens band and amateur radio, the Shure communications microphone line has a model that fits your specific equipment and application needs.

Amateur Radio Microphone Selection Guide

To improve on-air intelligibility we suggest the following Shure Microphones for amateur radio applications:

	Mobile Application	Fixed-Station Application
AM/SSB	414A*	444D
	404C*	526T Series II
FM	414B*	444D
	527B*	526T Series II
	577B**	

*General recommendation: Consult equipment instruction manual for correct microphone impedance.

**Noise-cancelling.



Over 90% of all Voice Recognition Systems in use today use a Shure Microphone



The Shure name on the back of your mobile communications microphone is your assurance of proven quality, reliability and performance.

COMMUNICATIONS/voice processing microphones

VR230

The VR230 microphone is an exceptional choice for voice processing and computer voice recognition applications where hands-free operation is necessary. Its close-talking characteristics and unidirectional pickup pattern reduce unwanted background noise, permitting its use in noisy environments. The microphone characteristics are tightly controlled, resulting in consistent response and output, while the receiver response is especially tailored to enhance voice intelligibility.

The VR230 combines an efficient "open air" headphones with a wide frequency range, close-talking dynamic microphone. The headset-microphone combination is very lightweight, durable, and extremely comfortable.

The headband easily adjusts to fit any head-size or hairstyle, and the microphone boom length and cartridge position are fully adaptable to any facial conformation.

The VR230's light weight reduces user fatigue even when worn for long sessions.



specifications

Model VR230

Model	VR230
Frequency Response	Microphone: 50 to 15,000 Hz Receiver: 100 to 10,000 Fz
Polar Pattern	Cardoid (unidirectional)
Impedance	Microphone: 150 ohms Receiver: 8 ohms at 1,000 Hz
Output Level	Microphone: Open Circuit: Vc lage: +47.5 dB (4.5 mV) (0 dB = 1V/100 μbar) Power Level: -03.0 dB, (0 dB = 1mW/10 μbars) Receiver: 94 dB SPL at ear with 1 mW input
Open Circuit Voltage	-41.0 dB (8.9 mV) (0 dB = 1V/100 μbar)
Power Level	-59.5 dB (0 dB = 1 mW/10 μbar)
Hum Pickup/mΩe	Typical 38.4 dB SP, equivalent
Cable	2.1 m (7 ft) attached, two single conductor shielded
Dimensions:	
Microphone	12mm H x 15.9 mm Dia. (9/16 x 5/8 in.)
Boom	.703 mm L (8 in.)
Net Weight	100 grams (3.5 oz.)
Packaging	Bulk
Optional Accessories	A120S Switch Replacement Cartridge R93

Available on an OEM basis to manufacturers only.

VR300

The VR300 is designed especially for use in computer voice recognition applications. It is also suitable for such other uses as paging, talkback, and other communications-type applications where excellent voice fidelity and reduction of background noise are needed.

The frequency response is tailored to produce an essentially constant output voltage over the voice spectrum when used close to the sound source. The transducer is a low-impedance, moving coil type with an integral humbucking coil, allowing it to be used in close proximity to a CRT with minimal hum interference.

The microphone case is aluminum with a black enameled finish. It has a standard 5/8"-27 thread suitable for mounting on a flexible gooseneck, fixed pipe, or microphone stand.

SM10A, SM12A, SM14A

Shure's SM10A, SM12A and SM14A head-worn microphones are also excellent choices for computer voice processing applications. These headset microphones deliver the exact signals computers require. A sophisticated mechanical system controls precise microphone placement to insure repeatable voice input, even in noisy environments. For more information and specifications on SM10A, SM12A and SM14A head-worn microphones, please refer to page 26.

VR300

Frequency Response	100 to 7,000 Hz
Polar Pattern	Cardoid (unidirectional)
Impedance	170 ohms actual
Output Level	-41.0 dB (8.9 mV) (0 dB = 1V/100 μbar)
Open Circuit Voltage	-59.5 dB (0 dB = 1 mW/10 μbar)
Power Level	Maximum 16 dB SPL equivalent 1.2m (4 ft) two-conductor shielded
Hum Pickup/mΩe	Typical 38.4 dB SP, equivalent
Cable	2.1 m (7 ft) attached, two single conductor shielded
Dimensions:	
Microphone	12mm H x 15.9 mm Dia. (9/16 x 5/8 in.)
Boom	.703 mm L (8 in.)
Net Weight	120 grams (4.5 oz.)
Packaging	Bulk
Optional Accessories	A120S Switch

Available on an OEM basis to manufacturers only.

COMMUNICATIONS/mobile microphones

104C, 404B, 404C, 405K

These "world standard" omnidirectional microphones provide high speech intelligibility and are used extensively in police, taxi, bus, sports, industrial and commercial applications. They are unusually rugged and heavy duty--for use in the most demanding outdoor and indoor installations. They fit comfortably in the palm of the hand and their "Million-Cycle" switch and durable neoprene cable. The high impact ARMO-DUR® case of the 514R is black and the 414 Series is grey.

414A, 414B, 514B

The 514B dynamic, omnidirectional microphone and the 414 Series CONTROLLED MAGNETIC® omnidirectional microphones are about half the size and weight of conventional microphones, yet perform as well or better. These models are unparalleled for ruggedness and dependability. The 514B is designed specifically for use in paging systems. The 414A and 414B are recommended for critical outdoor/indoor communications in mobile and fixed station use.

Each model features the "Million-Cycle" switch and durable neoprene cable. The high impact ARMO-DUR® case of the 514R is black and the 414 Series is grey.

407B, 527B, 527C

These models are examples of ruggedness, reliability and top performance in efficient, modular-designed microphones that disassemble quickly and make every part accessible--permitting easier in-the-field maintenance. The ARMO-DUR cases are lightweight, immune to shock, and unaffected by oil, sun, salt, spray, acids, rust or corrosion. Neoprene cables provide extra durability and longer flex life. Small, easy-to-handle design is hum shielded and insulated against shock. Model 407B features a rugged CONTROLLED MAGNETIC® element. Models 527B and 527C feature a dynamic element with extended frequency response, especially suitable for mobile FM transmitters. The transistor amplifier in the 527C is designed to match carbon microphone-type input circuitry. The 407 is grey and the 527B and 527C are black.



specifications

Model	Type	Frequency Response	Load Impedance (ohms)	Output Level (Volts/100 microbars)	Switch Circuits	Cable	
		Minimum	Recommended	Mic	Relay		
104C	Carbon†	300 to 4,000 Hz	50	(0.0)	0.36V (-5.0 dB*)	Open	1.8m (6 ft.), coiled, 4-conductor*
401A	CONTROLLED MAGNETIC®	200 to 4,000 Hz	150k	100k	0.27V (-11.5 dB*)	Closed	1.8m (6 ft.), coiled, 4 conductor, 2 shielded
401B	CONTROLLED MAGNETIC®	200 to 4,000 Hz	200	1k	33 mV (-29.5 dB*)	Open	1.8m (6 ft.), coiled, 4-conductor, 1-shielded
404B	CONTROLLED MAGNETIC®	200 to 4,000 Hz	150	1k	22 mV (-33.0 dB*)	Open	1.8m (6 ft.), coiled, 4-conductor, 2-shielded
404C	CONTROLLED MAGNETIC®	200 to 4,000 Hz	15k	100k	0.21V (-13.5 dB*)	Closed	1.8m (6 ft.), coiled, 3-conductor, 1-shielded
405K	CONTROLLED MAGNETIC®	200 to 4,000 Hz	15k	100k	0.20V (-14.0 dB*)	Open	1.8m (6 ft.), coiled, 3-conductor, 1-shielded*
407B	CONTROLLED MAGNETIC®	300 to 4,000 Hz	200	14	22 mV (-3.5 dB*)	Open (2)	1.8m (6 ft.), coiled, 4-conductor, 2 shielded

*0 dB = 1 volt per 100 microbars. **w/Amphenol MC4M type plug (offset key ring). †Requires external power source. (a) Simple change to normally closed.

COMMUNICATIONS/mobile microphones

401A, 401B

These microphones provide excellent performance at an economical cost. They are designed for clear, crisp voice response of high intelligibility. Each features a heavy-duty push-to-talk switch and extremely sturdy, high-impact ARMO-DUR® case. They are recommended for all types of outdoor and indoor communication activity, in mobile and fixed-station use. They are ideal replacement microphones in all communications equipment. The 401 Series are CONTROLLED MAGNETIC® units with quality neoprene cables.

488T

Model 488T is a noise-cancelling, transistorized microphone for highly intelligible speech communications under all types of noise conditions. It is specifically designed for use in commercial and private aircraft, and is FAA-certified for aircraft applications. The transistor amplifier matches

carbon microphone type input circuitry. The 488T incorporates a CONTRONIC MAGNETIC® cartridge and a "Million-Cycle" switch in a rugged, lightweight ARMO-DUR® case and neoprene cable.

577B

The 577B low-impedance, dynamic, noise-cancelling microphone shuts out background noise, permitting clear, crisp transmission, even where the noise level is so great that the operator cannot hear himself talking. It represents a significant improvement over most microphones having anti-noise features. This high-quality, dynamic microphone is small size, lightweight and extremely reliable. It features Shure's exclusive ARMO-DUR® case, "Million Cycle" switch, and neoprene cable, and its modular construction greatly simplifies field service.



specifications

Model	Type	Frequency Response	Load Impedance (ohms)	Output Level (Volts/100 microbars)	Switch Circuits	Cable		
		Minimum	Recommended	(Volts/100 microbars)	Mic	Relay		
414A	CONTROLLED MAGNETIC®	200 to 5,000 Hz	15k	100*	27V (-11.5 dB*)	Closed	Open	1.8m (6 ft.) coiled, 4 conductor 2 shielded
414B	CONTROLLED MAGNETIC®	200 to 5,000 Hz	150	1k	28 mV (-31.0 dB*)	Open	Open	1.8m (6 ft.) coiled, 4 conductor 2 shielded
488T	CONTROLLED MAGNETIC® transistor amplifier†	200 to 4,000 Hz	100	2.2k	0.56V (-5.0 dB*)	Open	Open	1.7m (5 1/2 ft.) coiled, 3 conductor w/PJ-068 2-ckt. phone plug
514B	Dynamic	100 to 6,000 Hz	75	300	15 mV (-36.5 dB*)	Open	Open	1.5m (5 ft.) coiled, 4-conductor 2-shielded
527B	Dynamic	200 to 5,000 Hz	200	1k	16 mV (-36.5 dB*)	Open	Open	1.7m (5 1/2 ft.) coiled, 4 conductor 2-shielded
527C	Dynamic transistor amplifier†	200 to 5,000 Hz	250	2.2k	0.45V (-7.0 dB*)**	Open	Open	1.7m (5 1/2 ft.) coiled, 4 conductor
577B	Dynamic	100 to 5,000 Hz	175	1k	5 mV (-46.0 dB*)	Open(a)	Open	1.8m (6 ft.) coiled, 4 conductor 2-shielded

*0 dB = 1 volt per 100 microbars. **with 500 ohm and 10 volt source. †Requires external power source. (a) Simple change to normally closed.

COMMUNICATIONS/paging base station microphones

450

The Model 450 is a rugged, omnidirectional microphone designed especially for radio communications, paging, and dispatching systems. It has a CONTROLLED MAGNETIC® cartridge for high speech intelligibility, exceptional reliability, high output level, and smooth response. The microphone features switchable high and low impedance and telescoping height adjustment over a 63.5 mm (2 1/2 in.) range, plus a case of rugged gray ARMO-DUR® which won't crack, peel, rust, or dent. A "Million-Cycle" push-to-talk switch activates both microphone and relay circuits, and a locking feature locks the microphone on. The cable is connected for balanced low-impedance operation designed for paging systems where long cable runs are encountered.

522

This is a dynamic microphone with a unidirectional pickup pattern that suppresses unwanted background noise, such as generated by other dispatchers working nearby, ventilating equipment, or office machines in the same area. It also supresses feedback in public address applications.

A finger tip control bar (locking and non-locking action) actuates the microphone circuit and normally open external relay circuit, and is equipped with a long-life "Million-Cycle" switch to satisfy the rigorous requirements of communications and paging.

The 522 features switchable high and low impedance, an adjustable stand that raises or lowers the microphone to the most comfortable talking position (63.5 mm, 2 1/2 in. range), and a sturdy, high impact ARMO-DURO® case. The cable is connected for balanced low-impedance operation designed for paging systems where long cable runs are encountered.



specifications

450

Model:	450
Type:	CONTROLLED MAGNETIC®
Frequency Response:	100 to 10,000 Hz
Load Impedance (ohms):	
Minimum	150/15K
Recommended	1K/100K
Output Level Volts/microbar:	0.20 mV (+71.0 dB) (Low) 2.2 mV (-53.0 dB) (High) (1dB = 1 volt per microbar)
Switch Circuits:	
Mic:	Normally open in low impedance; closed in high
Relay:	Normally open
Cable:	2.1 m (7 ft) four-conductor, two-shielded
Dimensions:	236 mm H x 131 mm W x 142 mm D (9 1/4" x 5 1/8" x 5 1/2")
Net Weight:	736 grams (1 lb. 10 oz.)
Packaged Weight:	1,020 grams (2 lbs. 4 oz.)

OPTIONAL CONVERSIONS: To increase the versatility of the 450, two optional modifications are available:

- a 2.1 m (7 ft) straight cable - 90BR2600
- a Split pair transistional switch conversion kit - HK1995

522

Dynamic	60 to 11,000 Hz
	75° ±5°
	300/100K
	0.09 mV (~80.5 dB) (Low) 1.3 mV (~59.0 dB) (High) (1dB = 1 volt per microbar)
Switch Circuits:	Normally closed
Mic:	Normally open
Relay:	2.1 m (7 ft) four-conductor, two-shielded
Dimensions:	248 mm H x 112 mm W x 114 mm D (9 1/2" x 4 1/2" x 4 1/2")
Net Weight:	736 grams (1 lb. 10 oz.)
Packaged Weight:	1,020 grams (2 lbs. 4 oz.)

444D

Model 444D offers a multitude of features designed for the serious ham enthusiast, including the Shure-designed, high-output CONTROLLED MAGNETIC® cartridge for unmatched performance characteristics and a tailored response for maximum voice intelligibility.

Other features include: dual impedance with an impedance selector switch for convenient changeover; a Normal/VOX slide switch; telescoping height adjustment; continuous RF shielding from microphone base to metalized case; sturdy, high-impedance ARMO-DUR® case; "Million-Cycle" switch with press-to-talk, momentary or locking switch bar; and a coiled cable.

The cable leads and switch are arranged for immediate hookup to transmitters with either isolated or grounded switching. Each 444D is supplied with an Amateur Radio Wiring Guide which provides easy-to-understand instructions for connection to most amateur radio equipment. In addition, purchasers of the 444D can receive a free individualized nameplate with their station's call letters.

526T Series II

A transistorized preamplifier gives the Model 526T Series II maximum versatility in fixed station operation. It can be used to replace ceramic or dynamic, high- or low-impedance microphones supplied as original equipment... or to turn a mobile FM unit into an indoor fixed station. The dynamic element provides clean, crisp, undistorted transmission and the frequency response is tailored with a rising response characteristic ideal for SSB and FM communications. It's the perfect match for almost any transceiver made, from 500 ohms and up.

An adjustable volume control cuts through QRM and provides optimum transmitter modulation and maximum intelligibility. The "Million Cycle" press-to-talk switch provides trouble-free momentary or locking operation and an electronic or relay switching circuit enables hookup of speech processors, an antenna relay, on-the-air lights, etc. The case is of virtually indestructible ARMO-DUR® and is fully shielded for low hum pickup and minimum susceptibility to RF interference.

The switch and six-wire coiled cable are arranged for immediate hookup to practically every transceiver input. A wiring guide is supplied with each unit to further simplify installation.

**specifications**

Model:	444D
Type:	CONTROLLED MAGNETIC™
Frequency Response:	200 Hz to 6,000 Hz
Load Impedance (Ohms):	
Minimum	200/1k
Recommended	1k/10k
Output Level	
Voltage/microbar:	0.39mV (-43.5 dB) (Low) 2.4mV (-5V 9dB) (High) (0 dB = 1 volt per microbar)
Switch Circuits:	
Mic:	Normally open
Relay:	Normally open
Cable:	2 m (7 ft) coiled, three-conductor, one-shielded
Dimensions:	236 mm H x 101 mm W x 236 mm D (9-1/8" x 3-63/64" x 5-11/16")
Net Weight:	784 grams (1 lb. 12 oz.)
Packaged Weight:	1.37 kg (3lb. 6 oz.)

OPTIONAL CONVERSIONS: To increase the versatility of the 444D, two optional modifications are available:

a 2.1m (7 ft) straight cable ... 90BR2600
a Split-bar Transmit/Monitor switch conversion kit, RK199S

526T Series II

Dynamic transistor amplified (requires 9 volt battery)
200 Hz to 6,000 Hz

50Ω	15Ω or higher
0.63 to 14 mV (-64.0 to -37.0 dB)	(0 dB = 1 volt per microbar)
Normally open	
SPDT and SPST	
>1m (7 ft) coiled five-conductor, one-shielded	
264 mm H x 108 mm W x 148 mm D (10-1/8" x 4-1/8" x 5-1/2")	
920 grams (2 lb.)	
1.2 kilograms (2 lb. 11 oz.)	

ABOUT SHURE MICROPHONE ACCESSORIES

Special needs and problems that arise in the field require special solutions. Shure recognizes these needs, and has designed a complete line of microphone accessories to meet them. They extend the versatility of Shure microphones and allow them to be used in situations where problems might otherwise occur.

All accessories featured in this section are designed specifically for use with Shure microphones to insure optimum compatibility and maximum performance. And, as with all Shure products, microphone accessories must survive rigorous testing which simulates years of heavy service...and still perform up to their original specifications.

REPLACEMENT PARTS AND ACCESSORIES

SELECTION GUIDE

Determining the correct replacement part or accessory model number for a given Shure microphone is easy with the Replacement Parts and Accessories Selection Guide located on pages 58 and 59 of this catalog. Simply locate the microphone model number in the left column of the chart...then read across, under the appropriate heading, until you find the model number of the part or accessory you require.



Shure engineers studied the action of reflected sound waves and their effects on sound quality in distant-mic applications, and developed the first microphone stands designed especially for eliminating the "hollow" sound that results when conventional stands are used. The Shure S53P and S65P...breakthroughs in distant miking technique.



Z-bracket (Page 55)

Designed for easy placement in mixing guitar amplifiers and speaker cabinets. Small, lightweight alternative to standard microphone stand and boom combination.



Shock-Stoppers (Page 54)

Microphone mounts that significantly reduce mechanical and vibration noises. Available in half-mount or full circle versions.



Problem Solvers (Page 51)

An accessory line designed to solve the most common microphone problems including input overload, low or high frequency noise, lack of presence, and excessive sibilance.



A15 Series

"Plug-In" Microphone Attenuators, Equalizers and Adapters

Solve acoustic and electrical problems without time-consuming rewiring. Shure "in-line," low-impedance microphone attenuators, equalizers, and adapters plug in to give instant modifications of response and performance in microphones and sound systems. Only 14 mm (4 1/2 in.) long x 19 mm (3/4 in.) dia., with color-coded nameplates for quick identification. Units are intended to be driven from 150 ohms, low level source except for A15LA—up to 50,000 ohms and -24 dBm. A15PRS—any balanced impedance, any level. Three-socket input and three-pin output professional audio connectors.*

A15AS Switchable Microphone Attenuator: Prevents preamp overload in applications where very strong signals are applied to a microphone input. Inserts a 15, 20, or 25 dB loss. Optimized for use with simplex powered condenser microphone or other low-impedance microphone.

A15BT Bridging Transformer: Matches balanced or unbalanced devices of different impedances. (32 kilohm primary, and 600 or 7,500 ohm secondary.)

A15HP High Pass Filter: Provides a low frequency cutoff to reduce unwanted low-frequency noises.

A15LA Line Input Adapter: Converts balanced low-impedance microphone input to bridging line level input.

A15LP Low Pass Filter: Provides a high frequency cutoff to reduce objectionable high-frequency noises.

A15PA Presence Adapter: Adds "presence" to vocals or instruments in recording, broadcasting, and PA applications.

A15PRS Switchable Phase Reverser: Instant switch selection of normal or reversed phase of a balanced line without modification of equipment.

A15RS Response Shaper: Provides sibilance filtering in recording, broadcasting, and PA applications.

A15TG Tone Generator: Produces a continuous 700 Hz balanced signal capable of driving low-impedance balanced lines, and is extremely useful in setting up and troubleshooting audio equipment. Plugs into microphone input to enable engineer to check levels, connections, mixer inputs, cables and speakers. Permits one person to do the work of two. Powered by a miniature mercury battery.

Special Note: Only the A15AS and A15PRS are recommended between phantom (simplex) powered condenser microphone systems and their power supplies.

*A15PRS and A15PA are symmetrical and can be used in either direction.

A95UF



A95 Series

Low-Impedance to High-Impedance Line Matching Transformers

High-quality transformers that make it possible to connect a low-impedance (38 or 150 ohm) microphone to a high-impedance amplifier input or vice versa. Solve problems of excessive high frequency loss and objectionable hum when long cable lengths are used.

A95U: Low-impedance connector—three-pin professional audio connector. High-impedance connector—Amphenol MC1M type connector with mating standard 1/4 in. phone jack and phone plug.

A95UF: Low-impedance connector—three-socket professional audio connector. High-impedance connector—Amphenol MC1M type connector with mating standard 1/4 in. phone jack and phone plug.

A97F



A97A

A97A and A97F

Low-Impedance to Medium-Impedance Line Matching Transformers

High quality transformers designed to properly match low-impedance (150 ohm to 600 ohm) microphone outputs to medium-impedance (1 kilohm to 10 kilohm) inputs, such as those frequently used in cassette recorders. Mating connectors for both sides are supplied with the transformer.

A97A: Low-impedance connector—three-pin professional audio connector. Medium impedance connector—Amphenol MC1M type connector. With mating standard 1/4 in. phone jack and phone plug.

A97F: Low-impedance connector—three-socket professional audio connector. Medium-impedance connector—Amphenol MC1M type connector with mating short cable, terminated by a 3.5mm (9/64 in.) diameter miniature phone plug.



A1WS

Gray foam windscreens, controls wind noise and "pop" for the Shure 515 Series Microphones.



A2WSA Series

High performance rugged windscreens with molded rubber collar for snug fit. Effectively minimizes wind noise in outdoor locations and controls explosive breath sounds in any location. For 545, 546, SM56, SM57 and SM77 Series Microphones.

A2WSA Gray
A2WSA-BK Black



A81WS

Unique heavy-duty windscreens, specially designed for the SM80 and SM81. Special dual density construction overcomes even high wind noise without significantly affecting frequency response. Two distinctly different layers of material are used, each with complementary acoustical properties. Gray foam.



A61WS Series

"Color-Charged" Windscreens

Ends microphone mix-ups when soundmen color-code these eight windscreens rainbow colors with control knobs, connectors, and mic cables (matching set of self adhesive "color dots" included). Windscreens fit 515, SM61, and SM62 Series Microphones and all Shure "ball-type" microphones for greater protection from wind noise and "pop."

A61WS Gray
A61WS-BK Black
A61WS-BL Blue
A61WS-BR Brown
A61WS-GN Green

A61WS-OR Orange
A61WS-RD Red
A61WS-WH White
A61WS-YL Yellow



A81G

Pop Filter Grille

Increases the versatility of the SM80 and SM81 by permitting their use in windy conditions with minimal pickup of rushing sounds produced by wind. By attenuating breath popping sounds it allows the SM80 and SM81 to be used in close-talking applications.

The grille fastens securely to the microphone and can be used with the standard unidirectional cartridge or the R104A Omnidirectional Cartridge.

Replacement Windscreens

For the model numbers of direct replacement windscreens originally supplied with Shure Microphones, refer to pages 58 and 59.

MICROPHONE ACCESSORIES/floor and desk stands



BB-44*

Baby Boom

A 787 mm (31 in.) chrome-plated, adjustable boom arm. Fits Model MS-10C Floor Stand (below). Single positive action triangular knob to control motion and position. Tapered 1.36 kg (3 lb) counter weight. Use for keyboard, drum vocals, and instrument pickup.

MS-10C*

Floor Stand

Quickly and easily adjusts from 0.9m (35 in.) to 1.6m (64 in.) high. Positive ring lock maintains desired height. Circular, 254 mm (10 in.), cast iron, 4.54 kg (10 lb) base.



S55P

Low-Profile Microphone Stands

A breakthrough in "distant" mixing technique. Holds microphone just a fraction of an inch above the floor for better sound quality in "footlight" type distant pickup recording or sound reinforcement of choral, orchestral, or ensemble musical events or dramatic presentations. Minimizes the "hollow sound" by eliminating phase cancellation caused by floor reflections. Provides very effective mechanical noise isolation. Height: 121 mm (4-25/32 in.).

S55P For Models 545D, SM57, and SM77



S15*

Tripod Floor Stand

Extra-tall, rugged, and stable... yet portable and lightweight. Tripod legs provide an excellent base, even when the stand is fully extended. Stand may be used at any height between 1.07m (3½ ft) and 4.27m (14 ft). Five telescoping sections. Convenient vinyl bag and cable strain relief included. Ideal for stereo orchestra and choir pickup with a pair of SM81 Microphones.



S33 Series*

Desk Stands

Low silhouette, ideal for TV use. Heavy, 1.14 kg (2 lb, 8 oz) for rock steady support. Base size: 68 mm H x 136 mm W x 152 mm D (2-11/16 x 5% x 6 in.).

S33B Black

S33P Gray



S37A*

Desk Stand

Modern, low profile design. Non-reflective, textured gray finish. Stable 681 gram (1 lb, 6 oz) base. Base size: 73 mm H x 116 mm W x 165 mm D (2 5/8 x 4-9/16 x 6 1/2 in.).



S39A*

Vibration Isolation Stand

Isolates microphone from even extreme mechanical vibration. For tables, desks, podiums, etc. Heavy-duty "non-fatigue" foam rubber internal isolation element. Low silhouette. Black high-impact non-glare plastic housing. Weight: 691 grams (1 lb, 8 oz). Base size: 44.5 mm H x 133 mm W x 184 mm D (1 1/2 x 5 1/4 x 7 1/4 in.).

*Standard 5/8"-27 thread accepts all Shure microphones with permanent mount connectors and all Shure microphone mounts and swivel adapters.

MICROPHONE ACCESSORIES/mounts and adapters



A25B



A57D



A57E



A24A* and A25B*

Swivel Adapters

A24A Black. Designed for use with SP19 microphone.

A25B Black. Designed for use with 515, 533, 545, 560, 565, 586, 588, SM57, SM58, SM77, and SM78 Series Microphones.



A55M



A55HM

A53M*, A53HM*, A55M* and A55HM*

Shock-Stopper™ Isolation Mounts

Black. A breakthrough in noise isolation. Reduces mechanical and vibration noises by more than 20dB. For desk, floor stand and fishpole use. Not recommended for microphones with on/off switches on the handle.

A53M Designed for use with Models SM53, SM54, SM59, SM61, SM62, SM63, SM76, SM80, SM81, SM82, SM85, and SM87.

A53HM Half-mount version of A53M. Permits instant removal of microphone from mount on stage.

A55M Designed for use with Models 545D, 565D, SM57, SM58, SM77, and SM78.

A55HM Half-mount version of A55M. Permits instant removal of microphone from mount on stage.

A45

Quick Disconnect Isolation Unit

Designed for use with microphones normally mounted on desk or floor stands but which are periodically removed from stand for hand-hold or carry-around use. A molded rubber insert isolates the microphone from mechanical vibration.

A45 Satin Aluminum finish. Designed for use with Models 546 and SM66.



A57 Series*

Swivel Adapters

A57D Champagne. Designed for use with Models 578, 579SB, SM53, SM54, SM59, SM61, SM62, SM63, SM80, SM81, and SM82.

A57E Black. Designed for use with Models 570, 571, SM51, SM76, SM85, and SM87.

CO-1*

Stand Adapter

Black. Screw-type clamp for mounting second microphone on floor stand or for mounting a microphone directly to a desk or table. Adjustable 360° swivel aids horizontal positioning. Ideal for vocalists who also play a guitar and need two microphones.



A27M*

Stereo Microphone Adapter

Black. Permits mounting two microphones on one stand such as MS 10C or S15. Either microphone can be independently swiveled in a full circle facilitating numerous microphone angles for stereo pickup systems, such as X-Y, ORTF, NOS, MS, and others. Standard 1/4"-27 thread. Accepts all Shure microphone mounts and swivel adapters.



A25M* and A26M*

Dual Microphone Mounts

Black. Ideal for mounting microphones feeding separate systems or when one microphone is needed as a back-up, such as on a speaker's rostrum.

A25M Designed for use with 545, SM57, and SM77 Series Microphones

A26M Designed for use with microphones listed above when using A2WSA Windscreen and with 515, 533, 565, 586, 588, SM58, and SM78 Series Microphones.

*Standard 1/4"-27 thread connectors.

Microphone Cable Selection Chart:

The cables listed in this chart represent just some of the many cables available from Shure. These cables are high durability and shielded for use with low or high impedance microphones.

Model	Microphone Connector	Equipment Connector	Cable Jacket	Cable Length	Cable Conductors
C20A	3-Socket	1/8" Phone Plug	Hi-Flex	20 ft (6.1m)	1
C201I*	3-Socket	3-Pin	Heavy Gauge	20 ft (6.1m)	2
C25B	3-Socket Black	3-Pin	Heavy Gauge	25 ft (7.6m)	2
C25E	3-Socket Black	3 Pin	TRIPLE-FLEX®	25 ft (7.6m)	2
C25F	3-Socket	3-Pin	TRIPLE-FLEX®	25 ft (7.6m)	2
C25G	3-Socket Black Low Impedance	High Impedance Matching Transformer 1/4" Phone Plug	Heavy Gauge Rubber	25 ft (7.6m)	2
C25J**	3-Socket	3-Pin	Hi-Flex	25 ft (7.6m)	?

*Also available without connector or with stripped and tinned leads (C20D)

**Also available in 50 (15m) and 100 (30m) ft. lengths. (C50J and C100J)



A53E Boom Extension Pipe

Rugged boom extension pipe with isolation cable pre-installed. Lowers the microphone 508 mm (20 in.) below boom to reduce shadows and lighting problems.



A45Z Z-Bracket

Small, lightweight alternative to standard microphone stand and boom combination. Can be positioned on top or underneath any speaker cabinet or guitar amplifier. An adjustable mic clip adaptor allows versatility in speaker-to-mic placement and angular position for optimum tonal response. Black.

MICROPHONE ACCESSORIES

/goosenecks, lavalier assemblies,
accessory bag, slide rule and calculator



Lavalier Assemblies

Six different professional quality lavalier assemblies designed to fit Shure Lavalier Microphones. "Positive-lock" design holds the microphone securely, yet allows easy, noiseless adjustment of microphone position. Snaps on and off in an instant.

A51L Plastic. Fits Models 570, 570S, 571, and SM51.

A54L Plastic. Fits Model 545L.

A57L Rubber. Fits Models 570, 570S, and SM51.

Goosenecks

High-quality, flexible goosenecks. "Silent-type" design limits mechanically induced noises. All models have standard $\frac{5}{8}$ "-27 threads at base.

G6A 152 mm (6 in.) flexible gooseneck with side vent

G12 305 mm (12 in.) flexible gooseneck

G12A 305 mm (12 in.) flexible gooseneck with side vent

G12-CN 305 mm (12 in.) flexible gooseneck with three-socket professional audio connector

G18 457 mm (18 in.) flexible gooseneck

G18A 457 mm (18 in.) flexible gooseneck with side vent

G18-CN 457 mm (18 in.) flexible gooseneck with three-socket professional audio connector

90B1120A 305 mm (12 in.) small diameter, lightweight gooseneck for lightweight microphones


A12 Mounting Flange With standard $\frac{5}{8}$ "-27 external thread



26A04


Microphone Accessory Bag

Practical, multiple purpose bag provides protection of microphones from the elements and offers convenient storage of accessories. Made of handsome black vinyl with double-stitched seams for durability. Nylon zipper is impervious to rust. Dimensions: 114 mm H x 267 mm W (4½ x 10½ in.).

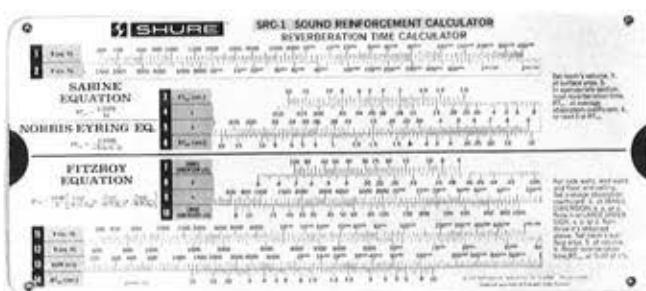

SRC-1 Sound Reinforcement Calculator

Provides a convenient means for calculating (1) room reverberation time and acoustic absorption coefficients; (2) microphone output voltage and sensitivity ratings; (3) attenuation pad resistance values. Sixteen-page instruction brochure included.

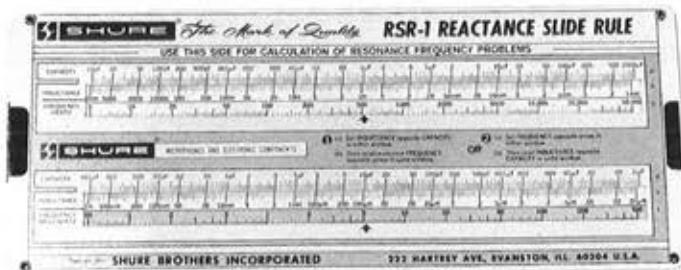

RSR-1 Reactance Slide Rule

Simplifies calculation of resonance frequency, capacitive reactance, inductive reactance, C_0 , "Q" and dissipation factor problems. Instructions and example problems included.



PS1 and PS1E2 Power Supplies

The Shure Models PS1 and PS1E2 are ac power supplies that provide simplex (phantom) power for one or two Shure SM80, SM81, SM82, SM85, SM87 or other condenser microphones. They contain a power switch, power-on indicator, two input and two output professional audio connectors.

The PS1 and PS1E2 are identical except that the PS1 is designed to operate from 90 to 132 Vac, 50/60 Hz, and the PS1E2 operates from 90 to 125 Vac or 180 to 250 Vac, 50/60 Hz (switch-selectable). In addition to the voltage selector switch and ac fuse, the PS1E2 is supplied with a detachable ac line cord (without power plug).

The PS1 (only) is Listed by Underwriters' Laboratories, Inc., and is listed by Canadian Standards Association as Certified.

Model Features:

- Simplex power for one or two SM80 and SM81, SM82, SM85, SM87 or similar condenser microphones.
- Low no ac, hum and RF susceptibility.
- Short-circuit-proof operation.
- Handles both microphone and line level signals.
- Operates over wide ac voltage range.
- Three pin professional audio connectors.
- Lightweight.
- Rugged construction.

Type:	All silicon transistor power supply.
Open Circuit Supply Voltage:	21.5 ± 1.5 Vdc regulated.
Supply Voltage Polarity:	Positive (+) on microphone input connector pins 2 and 3; negative (-) on pin 1 and case.
Typical Supply Operating Conditions (each channel):	20W at 1.1mA with Shure Model SM81 or SM85; 15V at 3mA (with Shure Vocal SM81).
Power Supply Resistors:	1.894 ± 1% (fixed per channel)
Frequency Response:	137 - 3.2 dB, 20 to 20,000 Hz (with SM81/SM82 or SM85 microphone and 1k load).
Maximum Operating Level:	Greater than +24 dBm.
Short Circuit Supply Current:	250mA (each channel (pins 2 and 3 to pin 1)) (20 Hz to 20 kHz, Unweighted).
Hum and Noise:	Common Mode 96 dBV max Differential Mode 113 dBV max
Noise:	(300 Hz to 20 kHz, Unweighted) Common Mode 100 dBV max Differential Mode 110.1 dBV max
Crosstalk:	115 dB less.
Phasing:	Corresponding pins of all connectors are in phase.
Operating Voltage:	PS1—90 to 132 Vac, 50/60 Hz ac only. PS1E2—90 to 125 or 180 to 250 Vac, 50/60 Hz ac only. Power consumption—0.5 watts max.
Temperature Range:	Operating -7° to 57°C (-19° to 139°F) Storage 29° to 71°C (-20° to 160°F)
Connectors:	Professional audio three-pin (OLIPU) and three-socket (MICROPHONE).
Dimensions:	50.3 mm (L) x 152 mm (W) x 75 mm (D) (2 1/16" x 6" x 5 1/2")
Weight:	0.25 kg (0.56 lb.)
Construction:	Aluminum chassis with steel cover, finished in gray enamel.
Certifications:	Listed by Underwriters' Laboratories, Inc. Listed by Canadian Standards Association as Certified (PS1 only).



(earphone not supplied)

A82MA Monitor Adapter

A cable and connector assembly designed to provide the user of a Shure Model SM82 Line Level Unidirectional Microphone with a capability for monitoring the microphone output. A 5000-ohm 2000-ohm headset is required (such as the Takk EMY-2 or EMW-2 "Larsen"). The A82MA can also be used on a "talkback" circuit, permitting the microphone user to communicate with the audio console or mixer operator during off-the-air periods.

The A82MA consists of a 2.1m (7 ft.) 1 Hi-PLI-FLEX® heavy-duty, two conductor shielded cable with three-socket professional audio connectors at microphone end and three-pin professional audio connector at equipment end. Mounted in the side of the microphone connector is a "micro-plug" jack (.097 in. diameter) for use with the headset. Internal circuitry provides shorting protection, dc blocking, and protection against acoustic shock from line transients. A matching insulated micro-plug for installation on the handset is supplied.

The A82MA is designed to withstand voltages normally encountered on telephone lines. If used with a dialed-up telephone line, it is recommended that a voice coupler (Western Electric Type 300 or equivalent) be used to protect the user from any possible shock hazards, and to comply with telephone company tariff regulations.

The A82MA can also be connected to the Shure Model 50AC Acoustic Coupler, eliminating the need to "hard-wire" to the telephone line. The 50AC is held in place over the transmitter of a telephone handset by a rubber strap. The A82MA weighs 164 grams (5.7 oz.).

REPLACEMENT PARTS AND ACCESSORIES/selection guide

Microphone Model No.	Cable	Cartridge	Screen Grille Assembly	Desk Stand ①	Swivel Adapter ②	Wind Screen ③	Miscellaneous	Microphone Model No.
50AC	-	-	-	-	-	-	-	50AC
55SH	C59	R55	H10A	-	-	-	A47	55SH
104C	C15C	R10A	-	-	-	-	-	104C
401A	C20C	R5D	-	-	-	-	-	401A
401B	C21C	R5E	-	-	-	-	-	401B
404B	C14C	R5E	-	-	-	-	-	404B
404C	C12C	R5F	-	-	-	-	-	404C
405K	C11C	R5D	-	-	-	-	-	405K
407B	70A1107	99A1556	-	-	-	-	-	407B
414A	C24C	R14A	-	-	-	-	-	414A
414B	C25C	R14B	-	-	-	-	-	414B
444D	70A149	R111	90F1060	-	-	-	90BP2600 PK199S	444D
450	70A194	R44D	90A1060	-	-	-	-	450
488T	C22C	R88T	-	-	-	-	-	488T
514B	C25C	R103	-	-	-	-	-	514B
515BG	70A2045	R15	HK54G	S33**	A25B	A61WS	A2BM ④	515BG
515SA	C62	R15	HK54G	S33**	A25D*	A61WS	A2BM	515SA
515SAC	70A2013	R15	HK54G	S33**	A25B*	A61WS	A2BM	515SAC
515SB	C63	R15	HK54G	S33**	A25B*	A61WS	A2BM	515SB
515SBG	70A4063	R15	HK54G	S33**	A25B	A61WS	A2BM. ④	515SBG
515SB-G18	70A1063	R15	HK54G	-	-	A61WS	G18*	515SB-G18
522	70A494	R89	90A1358	-	-	-	-	522
526T Series II	70A1544	R86	90U1644	-	-	-	-	526T Series II
527B	70A410	R131	-	-	-	-	-	527B
527C	70A410	H132	-	-	-	-	-	527C
533SA	C58	H33	H33	S33**	A25H*	A61WS	A2BM	533SA
533SAC	C58P	R33	R33	S33**	A25D*	A61WS	A2BM	533SAC
533SB	C57	H33	H33	S33**	A25B*	A61WS	A2BM	533SB
545D	C59	R45	-	S33**	A25L*	A2WSA	A25M†, A55M, SSSP	545D
545L	C71	H45	-	S33**	A25B	A2WSA	A10CH, A25M†, A54L * ④	545L
545SD	C59	R45	-	S33**	A25B*	A2WSA	A25M†	545SD
545SD-CN	C201	H45	-	S33**	A25H*	A2WSA	A25M†	545SD-CN
545SH	C59	R45	-	-	-	A2WSA	A47	545SH
546	C65	R46	-	S33**	-	A2WSA	A461	546
560	70A285	R60	-	S33**	A25B	A10CH, A34,*	-	560
561	70A292	R60	HK85G	-	-	-	④	561
562	70A292	R60	HK183G	-	-	A61WS	④	562
565D	C59	R65	R65	S33**	A25D	A61WS	A2BM, A55M	565D
565SD	C59	R65	R65	S33**	A25B	A61WS	A2BM	565SD
565SD-CN	C20H	R65	R65	S33**	A25B	A61WS	A2BM	565SD-CN
565SH	C59	R65	-	-	-	-	-	565SH
570	C76	R70	RK91G	S33**	A57C	A2WSA	A10CH, A57L*	570
570S	C77	R70	RK91G	S33**	A57E	A2WSA	A10CH, A57L*	570S
571	70A287	90F996	RK91G	S33**	A57E*	A2WSA	-	571
572G	70A299	90F996	-	-	-	A2WSA	90B1120A	572G
575S	-	H50	-	S33**	A75A*	-	A27I*	575S
575SB	-	R50	-	S33**	A75M*	-	A27L*	575SB
577B	C89	R98B	-	-	-	-	-	577B
578	R78	RK12/G	S33**	A6/D*	A2WSA	-	-	578

① S3/A Desk Stand and S39A Vibration-Isolation Stand accommodate all Shure swivel adapters.

② All Shure swivel adapters fit MS-10C and S15 Microphone Stands and A27M Stereo Adapter.

③ A2WSA and A61WS Windscreens are available in an assortment of colors.

④ For use with any Shure Gooseneck.

-Indicates accessory cannot be used with product.

*Turn shoe Accessory.

**S33B-Black Finish, S33P-Gray Finish.

†A45 Aluminum Finish.

‡With A2WSA Windscreen, use A2EM.

††PS1-for 90 to 132 Vac, PS1E2-for 90 to 125 Vac or 180 to 250 Vac

REPLACEMENT PARTS AND ACCESSORIES/selection guide

Microphone Model No.	Cable	Cartridge	Screen Grille Assembly	Desk Stand ①	Swivel Adapter ②	Wind Screen ③	Miscellaneous	Microphone Model No.
579SB	C20D	R50	HK*61G	S33**	A57D*	A61WS	-	579SB
586SA-C	C20A	H115	RK2166	S33**	A25B*	A61WS	A26M	586SA-C
586SB-CN	C20H	R115	RK2166	S33**	A25B*	A61WS	A26M	586SB-CN
588SA	C83	R8	RK82G	S33**	A25B*	A61WS	A26M	588SA
588SAC	CR3P	R8	RK82G	S33**	A25B*	A61WS	A26M	588SAC
588SB	C59	RU	RK82G	S33**	A25B*	A61WS	A26M	588SB
588SB-CN	C50H	R8	RK82G	S33**	A25B*	A61WS	A26M	588SB-CN
SM5B	70A2001	99R347		S33**	-	-	A62E	SM5B
SM7	-	H13	HK154G	S33**	-	-	A53E	SM7
SM10A		R93				A61WS	A10C-I	SM10A
SM11	C81	R99			-	-	A10CH	SM11
SM12A		H93		-	-	RK184WS*	A10CH	SM12A
SM14A	-	R93			-	RK184WS*	A10CH	SM14A
SM17	9032505	H93		-	-	RK184WS*	A10CH	SM17
SM18B	C92	R105			-	-	-	SM18B
SM18B-50	C95	H105			-	-	-	SM18B-50
SM18W	C93	H105		-	-	-	-	SM18W
SM18W-50	C96	H105		-	-	-	-	SM18W-50
SM51	70A2001	H52		S33**	A57D	-	A10CH, A51L*	SM51
SM53	C20D	R53	RK101G	S33**	A57D*	A61WS	A53E, A53G, A53M, S53P	SM53
SM53-CN	C20H	R53	RK101G	S33**	A57D*	A61WS	A53F, A53G, A53M, S53P	SM53-CN
SM54	C20D	R53	A53G	S33**	A57D*	-	A53E, A53M, S53P	SM54
SM54-CN	C20H	R53	A53G	S33**	A57D*	-	A53E, A53M, S53P	SM54-CN
SM56	C20D	H57	-	S33**	-	A2WSA	A45†	SM56
SM57	C20D	R57	S33**	A25B*	A2WSA	A25M††, A55M, S55P	-	SM57
SM57-CN	C20H	R57	S33**	A25B*	A2WSA	A25M††, A55M, S55P	-	SM57-CN
SM58	C20D	H59	RK143G	S33**	A25B*	A61WS	A26M, A55M	SM58
SM58-CN	C20H	R59	RK143G	S33**	A25B*	A61WS	A26M, A55M	SM58-CN
SM59	C20I	H102	RK192G	S33**	A57D*	A61WS	A53M	SM59
SM61	C20D	R61	RK164G	S33**	A57D*	A61WS*	A53M, S53P	SM61
SM61-CN	C20I	R61	RK164G	S33**	A57D*	A61WS*	A53M, S53P	SM61-CN
SM62	90A2159	R62	RK176G	S33**	A57D*	A61WS	A53M, S53P	SM62
SM62-CN	90A2454	R62	RK176G	S33**	A57D*	A61WS	A53M, S53P	SM62-CN
SM63-CN	C94CN	R106		S33**	A57D	49A55*	A53M, S53P	SM63-CN
SM63L-CN	C25F	80B2902	-	S33**	A57D	RK229WS	-	SM63L-CN
SM76	C20C	H76	-	S33**	A57F*	A61WS	A53M	SM76
SM77EB-CN	C25F	R107		S33**	A25B*	A61WS	A26M††, A55M, S55P	SM77EB-CN
SM77TN-CN	C25L	H108	-	S33**	A25B*	A61WS	A26M††, A55M, S55P	SM77TN-CN
SM78EB-CN	C25F	R109	RK210G	S33**	A25B*	A61WS	A26M, A55M	SM78EB-CN
SM78TN-CN	C25C	R110	RK210G	S33**	A25B*	A61WS	A26M, A55M	SM78TN-CN
SM80-CN	C25F	H104A		S33**	A57D	A61G	A61WS, HS1	SM80-CN
SM81	C25E	R104	-	S33**	A57D*	A61G*	A53C, A53M, A61WS, PS1†††, R104A, S53P	SM81
SM82	C20D	R82	RK174G	S33**	A57D*	A62WS*	50AC, A82GA, A82MA, PS1†††	SM82
SM83-CN	C106	H127				RK242WS	A10CH	SM83-CN
SM85-CN	C25F	H112	RK214G	S33**	A57D*	49A57B*	A53M, PS1†††	SM85
SM87-CN	C25C	R128	RK243G	S33**	A57F	A61WS	A53M, PS1†††	SM87-CN
SP19H-C	C102	R123	RK230G	S37A	A25B	-	-	SP19H-C
SP19L-CN	C103	R123	RK230G	S37A	A25B	-	-	SP19L-CN

VR230/VH300 - For replacement parts contact Shure Brothers Inc. (312) 866-2509

- ① S37A Desk Stand and S39A Vibration Isolation Stand accommodate all Shure swivel adapters.
- ② All Shure swivel adapters fit MS-10C and S15 Microphone Stands and A27M Stereo Adapter.
- ③ A2WSA and A61WS Windscreens are available in an assortment of colors.
- ④ For use with any Shure Gooseneck.

*Indicates accessory cannot be used with product.

*Furnished Accessory.

**S33B Black Finish; S33P-Gray Finish

†A45-Aluminum Finish

††W/H A2WSA Windscreens use A26M

†††PS1-for 90 to 132 Vac, PS1E2 for 90 to 125 Vac or 180 to 250 Vac.

ABOUT SHURE CIRCUITRY PRODUCTS

Each of the Shure circuitry products featured in this section is small in size, simple to operate and modest in cost, yet they can handle virtually any assignment in which multiple microphones or other audio sources must be controlled. They are ideal for practical, efficient, economical audio control in studio, broadcasting, public address, sound reinforcement and recording applications.

Dollar for dollar, Shure circuitry products provide more features and performance than competitive brands on the market. All units are built with the input-output flexibility that equips them for an extremely wide variety of audio control applications... and by stacking or combining various Shure components, the user can get exactly the audio control needed for virtually any applications.

For years, Shure portable microphone mixers have been the standard in the broadcast industry, as well as the most popular moderately-priced units in general use. They are recognized worldwide for their value, versatility, quality and reliability.

CIRCUITRY ACCESSORIES

On page 69 of this section you'll find a complete line of accessories designed to make handling, installation, and use of Shure circuitry products easier and more trouble-free.

Below are photographs of the back panels of the circuitry products featured in this section.



FP34 Audio Mixer (page 61)



M267 Mixer (page 62)



M268 Mixer (page 63)



M67 Mixer (page 64)



M68 Mixer (page 65)



S630 Coded Compensation Mixer (page 66)



AMS8000 Mixer (page 66)

FP31

A compact, portable microphone mixer specially designed for electronic news gathering (ENG) and electronic field production (EFP) use, including film, video, and remote broadcast applications. Measuring just 6 5/16" x 5 7/16" x 1 1/8", the FP31 incorporates the features most requested by audio engineers, electronic news professionals, sportscasters, and film and video sound engineers.

The FP31 provides a wide, flat frequency response, low distortion, and up to +18 dBm output (up to +22 dBm with 18Vdc supply). The unit features extremely low internal noise and switchable low-cut filters for each input that effectively reject low-frequency handling and wind noise.

Three XLR connector inputs and two outputs are provided, each switchable for either microphone or line-level operation. A master level control sets the output level. Incorporated in the FP31 is a built-in slate microphone for voice announcements and emergency field use. The microphone is controlled by a pushbutton that also activates a timed (one second) low-frequency slate tone.

Additional features include a flashing LED to remind you the mixer is on, professional quality VU meter, lit red master lamp, peak LED overload/limiter indicator, adjustable limiter, tone oscillator and stereo headphone mini- and 1/4" jacks. The headphone outputs can be used as additional unbalanced line feeds for connection to tape recorders, power amplifiers, or to the Shure 50AC Acoustic Coupler.

The FP31's versatility is enhanced by switchable simplex (phantom) or A-B power at each input for use with condenser microphones, a tape out mini-jack for connection to a cassette recorder, a coaxial battery jack permitting optional connection to external battery or power supplies, and a battery compartment that accommodates three standard 9V batteries. Batteries can be tested without program interruption.

Supplied with the FP31 is a removable shoulder strap and a rugged, carrying case which allows easy access to every mixer function and lets you piggyback the mixer on your VTR or other equipment.

**specifications****Model:****FP31****Frequency Response:**

+2 dB from 30 to 20,000 Hz

Voltage Gain:

Outputs terminated line 600 ohms; microphone 150 ohms; headphone 200 ohms

Input**Input**

	Line	Output
Microphone	-90 dB	-40 dB
Line	-40 dB	-10 dB

dB

dB

Noise: Equivalent input noise: less than -129 dBV**Distortion:** Under 0.25% T.D. from 50 to 20,000 Hz at 14 dBm output**Input Clipping Level:** Microphone: -17 dBV to -17 dBV

Line: -3 to -33

Output Clipping Level: Microphone: -34 dBV

Line: +18 dBm

Line: +6 dBV

Phone: 14 dBW

Limiter: Threshold: -14 dBm (adjustable to other levels)

Recovery time: 500 msec (typical)

Peak Indicator: Peak LED below clipping or at onset of lim (20 sec min)**VU Meter:** Calibrated for +1 dBm line 600 ohms at 0 VU; adjustable to other standards**Slate Microphone:** Omnidirectional electret condenser with AGC (8 hour life, typical)**Power:** Supplied by two 9V alkaline batteries or external 11 to 18 Vdc supply

11 to 18 Vdc nominal through 6220

Simplex Power: Supplied by additional 3V alkaline battery**A-B Power:** Supplied by additional 3V alkaline battery**Dimensions:** 48.3 mm (L) x 160 mm (W) x 35 mm (D)
(1 15/16" x 6 1/8" x 1 3/8")**Net Weight:** 1 kg (2 lb. 3 oz.)**Supplied Accessories:** Removable shoulder strap, carrying case

M267

The Shure M267 compact, lightweight professional microphone mixer offers performance and capabilities never before available in a modestly priced professional mixer. It was designed to fill more of the specific needs of broadcasters in both studio and remote applications, recording studios and sound reinforcement. Its outstanding performance and versatility also make it an exceptional choice for use in public address systems and as a studio quality "add-on" mixer for expanding existing facilities.

The M267 has all the features that made the Shure M67 the industry standard mixer, plus additional features and performance improvements that promise to make it the new industry standard. Features new to the M267 include peak program limiter—eliminates overload distortion by monitoring program levels and power supply level; simplex (phantom) power—switchable 30 Vdc on all microphone inputs to power condenser microphones; built-in battery pack—switches silently to battery power if ac fails; LED peak indicator—indicates onset of limiting or when program levels approach overload; headphone level control—adjusts monitor volume; gold contact headphone amp/line switch—

Amplifier position for high level monitoring or Line position for talkback, automatic muting circuit—prevents annoying clicks and thumps when unit is turned on or off; active gain controls provide lower noise, greater dynamic range and automatic input attenuation; and electronic power supply regulation—improved performance on low or high ac line voltage.

Improvements over the M67 include: Gold contact Mic/Line switches—on each XLR input and output, battery check function—does not interrupt program; more headphone power, lower distortion and noise; and front panel headphone jack and gold contact tone oscillator switch.

The M267 has the same ruggedness and reliability that made the M67 the top-selling mixer in the industry. It also includes all of these M67 features: transformer balanced inputs and outputs; mix bus VU meter; low cut filters; low RFI and line noise susceptibility.

With the addition of two brackets (RKC169), the M267 will fit into an M67 rack panel, or it may be mounted in the accessory panel (A268R).

**specifications****M267**

Model:	M267		
Frequency Response:	+2 dB from 30 to 20,000 Hz		
Voltage Gain:	Outputs terminated to 600 ohms, microphone 150 ohms, mix bus 3.3 x 100ms, headphones 200 ohms, tip-sleeve, ring-sleeve		
Input	Line	Microphone	Mix Bus
Low-impedance microphone	-22 dB	-42 dB	-25 dB
Line	+40 dB	-10 dB	-27 dB
Mix bus	+46 dB	+4 dB	
Noise:	Equivalent input noise: -129.5 dBV		
	Equivalent input hum and noise: -127 dBV		
Distortion:	Under 0.3% (110 dB from 30 to 20,000 Hz at 1.5 dBm output, under 0.5% distortion up to 1.15 dBm output level)		
Input Clipping Level:	Microphone: +32 dBV to -6 dBV (depending on input control setting)		
	Line: +20 dBV		
	Mix bus: +38 dBV		
Output Clipping Level:	Microphone: -32 dBV		
	Line: +18 dBm		
Limiter:	Threshold: +4.5 dBm; no output level; adapts automatically to power supply variations		
	Attack time: 3 msec typical		
	Release time: 500 msec typical		
Peak Indicator:	Lights 6 dB below clipping or onset of limiter action		
Simplex Power:	30 Vdc open circuit 3.3 kilohms series resistance, input switches in MIC position only		
Operating Voltage:	105-125 volts, 50/60 Hz		
Battery Operation:	Built-in battery compartment uses three ready available 9V alkaline batteries; provides approximately 20 hours of continuous operation		
Certification:	UL listed and CSA listed as Certified		
Dimensions:	75.3 mm H x 309 mm W x 227 mm D (2 3/4" x 12 1/4" x 9 in.)		
Net Weight:	2.3 kg (5 lb. 2 oz)		

*Can be rewired for 210-260Vac operation.

M268

The M268 is a compact, lightweight, two-channel microphone mixer that offers significant improvements in design, performance and versatility over other value-priced mixers, including the Shure M68. It is ideal for public address and paging in hotels, schools, community centers, and hospitals, as well as an excellent add-on mixer for expanding current equipment. It is also an excellent mixer for use by the serious tape recording enthusiast.

Features new to the M268 include: mix bus—for simple mixer interconnection; simplex (phantom) power—switchable 30 Vdc on all low-impedance microphone inputs to power condenser microphones; automatic muting circuit—prevents annoying clicks and thumps when the unit is turned on or off; active gain controls—provide lower noise, greater dynamic range and automatic input attenuation; and electronic power supply regulation—improved performance on low or high ac line voltage. In addition, when used with the optional accessory battery power supply (A268R), the M268 switches automatically and silently to battery power if the ac fails.

Improvements over the M68 include: a dramatic reduction in

distortion—typically less than 0.1%; substantial increases in gain and dynamic range; lower hum and noise; and higher output. Also, the M268 has four transformer-coupled low-impedance balanced line microphone inputs and four high-impedance phone jack inputs. Both high- and low-impedance microphones can be used at the same time.

The M268 also includes all these M68 features: high-level auxiliary input—suitable for tape recorder, tuner and accessories; individual volume controls; a master volume control; and the ruggedness and reliability for which Shure mixers are recognized worldwide.

The M268 makes an ideal add-on mixer to the M267 Mixer. The two models are matched in performance and styling, and the mix bus gives the user nine inputs plus the peak indicator and metered output of the M267—no loss of inputs on either mixer.

With the addition of two brackets (HCK169), the M268 will fit into an M68 rack panel, or it may be mounted in the accessory panel (A268R).



specifications

Model:

M268

Frequency Response: ±3 dB from 40 to 20,000 Hz

Voltage Gain: Outputs terminated, mic 150 ohms/33k ohms aux 47 kilohms m × bus 0.3% ohms.

Input

Output

	To 1/4" Mic	To 1/4" Mic	Aux Out	Mix Bus
Low-impedance microphone	30 dB	54 dB	78 dB	24 dB
High-impedance microphone	7 dB	31 dB	55 dB	1 dB
Aux in	15 dB	9 dB	33 dB	-21 dB
M bus	-6 dB	19 dB	22 dB	

Noise: Equivalent input noise: -128 dBV

Equivalent input hum and noise: -125 dBV

Distortion: Under 0.2% THD from 40 to 20,000 Hz at 16 dBV output

Input Clipping Level (minimum): Low-impedance microphone: -32 to -5 dBV
High-impedance microphone: -10 to 10 dBV*
Aux: -4 to 30 dBV*
M bus: 8 dBV

*Depending on control setting.

Output Clipping Level

(minimum): Low-impedance microphone: -20 dBV (100 mW)
High-impedance microphone: 4.5 dBV (1.7 V)
Aux: 17 dBV (7.1 V)
M bus: -8 dBV (0.4 V)

Simplex Power: 30 Vdc open circuit, 3.3 kilohms series resistance

Operating Voltage: 105-125 VAC 50/60Hz*
*Can be rewired for 210-250 VAC operation

Certification: UL Listed and CSA listed as Certified

Dimensions: 75.3 mm L × 309 mm W × 227 mm D
(2 7/8" × 12 1/8" × 9 in.)

Net Weight: 1.9 kg (4 lb. 2 oz.)

M67

A compact, lightweight and economical microphone mixer/remote amplifier specifically designed for professional use in remote broadcasting, studio recording, sound reinforcement, and as an "add-on" mixer for expanding existing facilities and providing additional microphone inputs for audio and video tape recorders. The M67 features a wide 1:1 frequency response, with extremely low distortion up to -18 dBm output, and low noise and RF susceptibility.

Four low-impedance, balanced microphone inputs (one convertible to line level) are provided, with the line-level switchable for 600-ohm termination or bridging. Each input has a switchable low-cut filter. The illuminated VU meter is calibrated for +4 and -10 dBm output, with a convenient range switch. Equipped with a headphones jack for monitoring and a mix bus jack for "stacking" mixers. Battery operation (with optional accessory A67B) permits automatic switchover if the ac power fails. A battery check switch monitors battery condition.

M68, M68FC

The M68 is a practical, efficient and economical way to increase the usefulness and flexibility of audio-visual, paging, sound reinforcement and tape recording systems requiring multiple microphone inputs. The M68 can also be used to provide additional microphone inputs to another mixer such as the M67 or to another M68.

Each of four microphone-level inputs has its own switch for selection of low impedance (balanced or unbalanced) or high-impedance (unbalanced) microphones, and a high level auxiliary input is suitable for inputs from tape recorders, tuners, or other sources. The M68 has two outputs: one is a microphone-level output (low- or high-impedance, switch-selectable) for connection to a sound system amplifier or tape recorder input. The other is a high impedance, high level output to feed any power amplifier or tape recorder requiring a 0.5 to 2V input signal. The M68 can also be powered by an external power source such as the A67B.

M68: Four pin inputs.

M68FC: Three socket inputs.

**specifications****Models:****M67**

Frequency Response: ±2 dB from 30 to 20,000 Hz
Voltage Gain: 40, 1,000 Hz

Input	Output	Microphone
Low impedance microphone	91 dB	31 dB
Line, bridging	41 dB	19 dB
Line, terminating	-35 dB	-25 dB

Noise: Equivalent input noise: -120 dBV
Equivalent input hum and noise: -125 dBV

Distortion: Under 1% THD from 20 to 20,000 Hz at +10 dBm output (0.5% typical)

Input Clipping Level (minimum): Low impedance microphone: -30 dBV
Line, bridging: Greater than -22 dBV
Line, terminating: Greater than -24 dBV

Output Clipping Levels (minimum): Microphone: 6 mV, -44 dBV
Line: -18 dBm

Operating Voltage: 108 to 132 volts, 50/60 Hz

Certification: UL Listed and CSA listed as Certified

Dimensions: 49.9 mm H × 289 mm W × 190 mm D
(2 1/4" × 11 1/8" × 7 1/2 in.)

Net Weight: 9.18 kg (4 lb. 13 oz.)

M68, M68FC

±3 dB from 30 to 20,000 Hz
At 1,000 Hz

Input	Output	Microphone	Aux
Low impedance microphone	0 dB	30 dB	57 dB
High impedance microphone	10 dB	8 dB	36 dB
AUX	39 dB	14 dB	43 dB

Equivalent input noise: -123 dBV
Output hum and noise: 70 dB below rated output
Under 1% THD, 2.0 volt level

Low impedance microphone: -30 dBV
High impedance microphone: -7 dBV

Low impedance microphone: 60 mV, -24 dBV
High impedance microphone: 350 mV, -1 dBV
Aux: 4 volts, 1.2 dBV

108 to 132 volts, 50/60 Hz

UL Listed and CSA listed as Certified

49.9 mm H × 289 mm W × 190 mm D
(2 1/4" × 11 1/8" × 7 1/2 in.)

1.8 kg (4 lb.)

SE30

The SE30 is a professional mixer with a 600-ohm line output (for remote or studio applications) and a high-quality "hands-free" gain riding compressor in a single portable unit. Makes output control in remote pickups, talk shows, recording, program line compression and professional sound reinforcement smoother, surer and more trouble-free than it's ever been before.

The SE30 provides a 40 dB compression range - adjustable to varying input requirements with a compression ratio of approximately 10 to 1. Once set, the SE30 rides gain automatically, increasing or decreasing the system gain to maintain a constant output level. Because compression is properly achieved in the mixer itself, the signal-to-noise ratio is optimized for both talk phone line transmission or remotes. In studio applications, it allows maximum program level without overloading other components. The SE30's variable response rate control allows the proper time constant to be selected for the type of program material involved; fast for voice applications such as sporting events, medium to slow for musical program sources.

A unique Gated Memory circuit solves the "pumping" problem

normally associated with an audio compressor by holding when the desired signal (such as voice or music) is not present, and putting a "hold" on the compressor level at that point. For example, this eliminates the crowd noise build up when the announcer stops talking during a sporting event. As soon as the desired program material returns, the "hold" is released and the compressor goes back into action.

Loaded with useful features, such as: wide range of input and output options, microphone, line and high level auxiliary; feedback-type gain controls that automatically increase the input clipping level as the individual gain controls are turned down; a built-in low distortion 1 kHz tone oscillator, three-function VU meter, stereo parallel jack, self-contained battery and ac power supply, with automatic switchover to battery in case of ac failure; auxiliary meter light source for battery operation; removable ac line cord; disable switches for compressor and Gated Memory; and extremely low distortion, noise and RF susceptibility.

**specifications****SE30**

Model:	SE30		
Frequency Response:	Flat ± 2 dB, 30 to 20,000 Hz		
Voltage Gain:	Below compression threshold, output terminated Line 600 ohms, Microphone 150 ohms, Aux 17 kilohms.		
Input	Line	Microphone	Aux
Low impedance microphone	105 dB	55 dB	55 dB
Line or Aux	57 dB	7 dB	37 dB
Noise (maximum):	Equivalent input noise: -129.5 dBV Equivalent input hum and noise: -126 dBV		
Distortion:	Recreational compression threshold, under C 5% THD from 30 to 20,000 Hz at ± 1.5 dB output		
Compression Ratio:	A 1 minimum from 10 to 20 dB compression A 1 minimum from 10 to 30 dB compression		
Compression Threshold:	Microphone: -90 dBV at maximum input gain Line: -48 dBV at maximum input gain		
Attack and Recovery Time:	100 microseconds to 8 seconds		
Gated Memory:	In hold condition, less than 20 dB gain recovery after one millisecond		
Input Clipping Level:	Microphone: -38 dBV to $+10$ dBV Line or Aux: -13 dBV to $+38$ dBV		
Output Clipping Level:	Microphone: -34 dBV, 20 mV Line: $+18.1$ dBm, 6.2 V Aux: $+4$ dBV, 0.63 V		
Mix Bus:	Impedance 5.9 kilohms		
Operating Voltage:	108-132 volts, 50/60 Hz		
Battery Operation:	Estimated 80 hours at 4 hrs. use per day, Six 9-volt Eveready type 222 or 210 or equivalent. One heavy duty 1.5 volt "D" size cell		
Certification:	JL Listed and CSA listed as Commercial		
Dimensions:	17.75" W x 3.9" H x 23.4" D (45 x 10 x 60 cm)		
Net Weight:	4.5 kg (9 lb, 13 oz)		

AMS

The Shure Automatic Microphone System (AMS) is a dedicated, totally integrated system consisting of complementary mixers and microphones that work together to solve the problems associated with multiple microphone installations. The system's excellent performance, versatility, and ease of operation make it an ideal choice for use in multiple microphone public address and recording systems such as conference rooms, legislatures, churches, courtrooms, broadcast studios and panel discussions.

The AMS features direction sensitive microphones that turn on automatically only when addressed within their own 120° "window of acceptance." In addition, each microphone continuously samples its own local acoustic environment, and compensates for changing room audio conditions... automatically.

The Shure AMS incorporates advanced signal processing circuitry. It turns on to the sound source quickly, quietly and automatically and turns off just as quietly. From beginning to end there are no clicks, pops, noise "pumping," or missed syllables.

Logic terminals on each AMS input offer unprecedented flexibility for advancing the system's capabilities. For example, when connected to the Shure AMS880 Video Switcher Interface, the AMS will control commercially available video switchers, causing video

cameras to "track" microphone turn-on. And for large gatherings, AMS mixers (both 4- and 8 channel models available) can easily be combined to effectively control over 200 individual microphones.

As the AMS operates as an integrated system, it solves many of the problems associated with multiple microphone installations, such as boomy or muddy sound, insufficient sound level because of feedback, and operator errors. It also solves problems encountered with other automatic mixers, such as complicated setup adjustments, unreliable turn-on, and choppy sound

AMS4000 Four-channel mixer (expandable to up to eight channels)

AMS8000 Eight-channel mixer

AMS880 Video switcher interface

AMS22 Low-profile microphone

AMS24 Gooseneck microphone

AMS26 Probe microphone

AMS28 Lavalier microphone

IMPORTANT

Shure AMS4000 and AMS8000 Mixers are designed for use only with Shure AMS Condenser Microphones. Conventional condenser or other microphones will not operate properly with AMS mixers.



AMS/automatic microphone system

Four Microphone Styles—An Edge In Design and Versatility

**AMS26
Probe Microphone**

Perfect for lectern or stand use.

**AMS24
Gooseneck Microphone**

Designed for mounting to surfaces such as conference table, desk, or lectern. Comes complete with black miniature 18-inch gooseneck and mounting flange.

**AMS22
Low-Profile Microphone**

Sleek, modern design with a look so unintimidating, even a first-time speaker won't shy away from it.

**AMS28
Lavalier Microphone**

Worn around the neck, giving the wearer mobility for slide shows & chalk talks.

specifications AMS4000 & AMS8000 Mixers

Output Level:

		OUTPUT				Input Clipping
INPUT	Line	Mic	Aux	Direct	Phones	Level at 1 kHz
Microphone Input	+15.6 dBV	-34	+117	-56	-5	+25 dB
(+15.6 dBV)	(-15.6 dBV)	(+117 dBV)	(+117 dBV)	(-56 dBV)	(-5 dBV)	(+25 dBV)
Aux Input	+15.6 dBV	-34	+117	-56	-5	+25 dB
(+15.6 dBV)	(-15.6 dBV)	(+117 dBV)	(+117 dBV)	(-56 dBV)	(-5 dBV)	(+25 dBV)

*Depending on Aux control setting.

Frequency Response:

Aux Input to Outputs: 30 to 20,000 Hz ± 2 dB
Mic Input to Outputs: 70 to 20,000 Hz ± 7 dB
(extended low-frequency roll-off below 50 Hz)

Outputs:

IMPEDANCE		OUTPUT	Clipping Level
OUTPUT	Designed for Use With	Actual (Internal)	Clipping Level
Mic	150Ω balanced lines	10Ω	+15.6 dBV
Line	500Ω balanced lines	150Ω	+15.6 dBV
Aux	100Ω or greater	2.2k	+15.6 dBV
Direct	100Ω (unbalanced)	900Ω	0.0 dBV
Phones	200Ω	2.2k (imp)	4.5 dBV
		2.2k (imp)	4.5 dBV

Equivalent Input Noise:

27 dB SPL A-weighted, with AMS26 Probe Microphone

Distortion:

THD (0.3% or less) 30 to 20,000 Hz at -15 dBm output
THD (0.5% or less up to +15 dBm output)

Gating:

Attack Time: 4 msec
(Hold time: 0.5 to 1.0 sec; (switchable);
Decay 1 ms; 0.2 sec after hold interval)

Off-Automation:

Fixed: -5 dB Variable: -5 to -9.5 dB
(Single mix out; attenuation increases as additional mixers are linked)

Operating Voltage:

100-132 Vac, 50/60 Hz, 20W. Can be rewired for 210-264 Vac, 50/60 Hz, 20W.

Dimensions:

Height: 80 mm (3.1 in.) AMS8000: 0.6 kg (1.3 lb 5 oz)
Width: 483 mm (19 in.) AMS1000: 5.8 kg (12 lb 10 oz)
Depth: 298 mm (11.8 in.) AMS8010 (pkgd): 7.8 kg (17 lb 4 oz);
AMS8000 (pkgd): 7.1 kg (15 lb 9 oz);

Certifications: Listed by Underwriters Laboratories, Inc.; listed by Canadian Standards Association as Certified

specifications AMS Microphones

AMS22

Type: Condenser (electret bias)
Polar Pattern: Hemi-Cardioid
Acceptance Angle: Microphone turns on for sounds within 60° (typical) of front axis
Output Level: -47 dB typical
(0 dB = 1 V/μbar)
at AMS mixer Direct Output

Connector: Three-pin professional audio
Cable: Attached, 5.1 m (20 ft)
two-conductor shielded

Dimensions: 31.9 mm L x 68.9 mm W x 6.2 mm D
(1 1/8 x 2 1/2 x 3 in.)

Net Weight: 1.17 / 1.27 grams (6.1 oz)

Supplied Accessories:

AMS 24 & AMS26

Type: Condenser (electret bias)
Polar Pattern: Cardioid
Acceptance Angle: Microphone turns on for sound within 60° (typical) of front axis
Output Level: -56 dB typical
AMS24: -54 dB typical
(0 dB = 1 V/μbar)
at AMS mixer Direct Output

Connector: Three-pin professional audio
Cable: Attached, 6.1 m (20 ft)
two-conductor shielded

Dimensions: 51.8 mm L (including gooseneck) x 36.9 mm Dia. (at top)
(2 1/8 x 1 3/8 in. D x L)

Weight: 178 grams (6.2 oz)
AMS24: 177 grams (6.2 oz)

Supplied Accessories: Windscreen

AMS26: Windscreen and swivel adapter

AMS28

Type: Condenser (electret bias)
Polar Pattern: Cardioid
Acceptance Angle: Microphone turns on for sound within 60° (typical) of front axis
Output Level: -56 dB typical
(0 dB = 1 V/μbar)
at AMS mixer Direct Output

Connector: Three-pin professional audio
Cable: Attached, 6.1 m (20 ft)
two-conductor shielded

Dimensions: 64.1 mm L x 20.1 mm Dia.
(2 1/2 x 7 1/2 in.)

Net Weight: 155 grams (5.5 oz)

Supplied Accessories: Lavalier assembly

For availability on the AW5886 Vista Switcher interface, contact Shure Brothers Inc.

M64

The M64 is a compact, professional stereo preamplifier which solves a variety of preamplification and equalization problems. A three-position slide switch selects different equalization depending on the desired application.

In the Phono position, the M64 provides standard RIAA equalization. Using the M64 in this mode, magnetic phono cartridges can operate into auxiliary level inputs, inputs without RIAA equalization or ceramic phono cartridge inputs. A balanced line output can be obtained using a Shure A95U Impedance Matching Transformer.

In the Tape position, playback heads on tape recorders are provided with NAB equalization.

In the Flat position, the M64 can be used as a microphone preamplifier or a low-gain buffer amplifier where long cable lengths are necessary.

All input and output connectors are standard phone jacks. In addition, the M64 can be powered by an external 24-36 Vdc power source such as Shure's A67B Battery Power Supply.

**specifications****M64**

Model:			
Frequency Response:	Flat: ±2 dB from 20 to 20,000 Hz Phono: ±2 dB from 40 to 15,000 Hz (Standard RIAA curve) Tape: ±2 dB from 50 to 16,000 Hz (7% ips NAB curve)		
Voltage Gain:	At 1,000 Hz through 680 ohms. 47K output termination		
Equalization Switch Position	High Level Output	Low Level Output	
Flat	27.5 dB	4.0 dB	
Phono	34.5 dB	11.0 dB	
Tape	37.0 dB	13.5 dB	
Noise:	Flat: Better than 61 dB below 10 mV input from 20 to 20,000 Hz Phono: Better than 71 dB below 10 mV input from 20 to 20,000 Hz		
Distortion:	Under 1% THD for an output of 2V at 1,000 Hz in Phono, Tape or Flat positions		
Clipping Level:	Minimum input clipping levels at 1,000 Hz: Flat: 250 mV Phono: 100 mV Tape: 80 mV		
Channel Separation:	50 dB min. at 1,000 Hz		
Channel Balance:	Within 2 dB at 1,000 Hz		
Operating Voltage:	108 to 132 volts, 50/60 Hz		
Certification:	UL Listed		
Dimensions:	67.1 mm H x 142 mm W x 114 mm D (2 11/16" x 5 15/16" x 4 1/2" in.)		
Net Weight:	794g (1 lb, 12 oz)		

CIRCUITRY ACCESSORIES

carrying case, rack panels, battery power supplies, security panel, panel lamp, microphone preamplifier

A30A Carrying Case

Sturdy, weather-resistant case designed to provide protection to Shure audio components during travel and portable use. Both front and back panels are hinged and completely removable for ease of access to controls and connections. The A30A is covered in heavy-duty, fabric-backed, black vinyl and features a heavy-duty handle.



Provides 3½ in. x 19 in. (89 mm x 483 mm) of rack-mounting area. Accommodates units up to 285 mm (11⅓ in.) in depth below the mounting surface. May be used with one M67 or M68 (with A68R Rack Panel), one M267 or M268 (with A268R Rack Panel) or one SE30 (with A100B Rack Panel). Dimensions: 361 mm H x 515 mm W x 143 mm D (15 x 20⅔ x 5⅜ in.).

A68L Security Panel

Steel panel that fastens to Shure audio components to prevent tampering of the controls once they have been set. For use with the M67 and M68 Series components. Includes small padlock and two keys.



A68R, A68R-BL,

A100B, and A268R Rack Panels

Equips Shure audio components for rack-mounting in standard 19 in. x 3½ in. (89 mm x 483 mm) audio equipment racks.

A68R For use with the M67 and M68 Series components. Dark gray/brown finish.

A68R-BL Same as A68R, except black finish (matching the case of Shure audio components).

A100B For use with the SE30. Black finish.

A268R For use with M267 and M268 Series components. Black finish.

RKC169 Accessory brackets for mounting M267 or M268 in an A68R Rack Panel.



A67B and A268B Battery Power Supplies

Designed to power the Shure M-Line Series of audio components to full rated output. Eliminates the need for 120 Vac power.


A67B For use with M67 and M68 Series components. May be used with the M67 as either the sole power source or as a standby safety during ac operation, providing automatic noiseless switch-over in case of ac failure. The automatic switchover feature is not recommended for use with the M68, as some battery drain may occur at line voltages less than 120 Vac. Uses three standard 9V transistor batteries.

A268B For use with the M268 Mixer. Features automatic noiseless switchover in case of ac failure. Uses three standard 9V transistor batteries.



A101B Panel Lamp

A small, low-intensity light unit to illuminate audio console controls in dimly lit areas. Attaches with screw-down connector to Amphenol 80-PC2F receptacle and draws its power from the console. Flexible neck affords variable positioning.

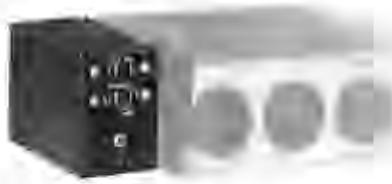

A68M

Microphone Preamplifier

Designed to provide a balanced line input or additional microphone input channel to Shure audio components. Mounts to the left side of the "master" component and is powered from this component's power jacks. The Input Selector Switches have positions for matching the input to either a balanced line, a low-impedance balanced microphone, or a high-impedance unbalanced microphone. The Aux Output is terminated in a shielded cable with phono plug for connection to the Shure audio component. For use with the M68 series.

PROFESSIONAL PHONOGRAPH CARTRIDGES

The V15 Type V-MR

The critically acclaimed V15 Type V-MR is acknowledged to be the finest cartridge available today. The technological breakthrough of the Micro-Ridge Tip offers the ultimate in low distortion sound reproduction through its highly accurate tracking ability. Coupled with the incredible trackability of the revolutionary new high stiffness, low mass Beryllium MICROWALL/Be™ Stylus Shank, it represents the pinnacle of state-of-the-art cartridge technology.

The V15 Type V-MR features Shure's exclusive Dynamic Stabilizer which functions like a miniature shock absorber to compensate for record warps that result in groove skipping, cartridge bottoming, and signal wow. The stabilizer's conductive fibers also simultaneously discharge static electricity from the record surface and sweep microscopic dust out of the record groove.

Also featured is the unique SIDE-GUARD Stylus Protection System which protects the stylus from damage by guiding it into a protected area in the stylus housing when it accidentally bumps against a record or the edge of the turntable platter.

Designed for the standard $\frac{1}{2}$ " mount tone arm, the V15 Type V-MR brings together important new construction features, performance capabilities, and high technology instrumentation.



The SC39 Series

The SC39 Series Phonograph Cartridges were specially designed for use in broadcasting, recording, discos, libraries, and other demanding professional applications. These cartridges offer true high fidelity performance, providing clean, undistorted playback even on the toughest-to-track, hottest recordings.

A Shure-designed bearing assembly and telescoped shank structure help the SC39 Series Cartridges achieve exceptional trackability. The frequency response of the SC39ED is essentially flat and compares favorably with top-quality high fidelity cartridges. It is well suited to duplicating and auditioning masters in addition to full range applications such as disco or mastering. The response of the SC39EJ and SC39B is extremely flat through the upper mid-range with a smooth rolloff at the highest frequencies to minimize many sources of high-frequency "soldering" in broadcast applications.

This series of professional cartridges is specially engineered for backtracking. An internal support wire and special elastomer bearing make stable and accurate backtracking without groove jumping. These cartridges feature Shure's patented SIDE-GUARD Stylus Protection System. This unique deflection assembly prevents the most common causes of stylus damage by withdrawing the entire stylus shank and tip safely into the stylus housing before it can be bent by sideways thrust from contact with a record or turntable edge.

The stylus tip of the SC39 Cartridges is MASAR™ polished. This is an exclusive Shure process which reduces surface noise and relieves record wear. MASAR™ polishing gives superlative results on 45 rpm records made from reprocessed substandard vinyl or polystyrene, as well as on lacquer masters.

SC39ED $\frac{1}{2}$ to $1\frac{1}{2}$ grams, Bi-radial (Elliptical) stylus

SC39EJ $1\frac{1}{2}$ to 3 grams, Bi-radial (Elliptical) stylus

SC39B 1 to 3 grams, Spherical stylus



The SC35C

The SC35C is designed for use on the heaviest and most rugged broadcast tone arms which require a tracking force of 4 to 5 grams. The stylus assembly of the SC35C is rigid enough to withstand the punishment of continuous backtracking, yet compliant enough to offer excellent mid- and high-frequency reproduction.

specifications

Model Number	Stylus Configuration	Tracking Force Range (grams)	Trackability (cm/sec.)			Frequency Response	Channel Separation	Replacement Stylus Model Number
			400 Hz	1,000 Hz	10,000 Hz			
V15 Type V-MR	Micro-Ridge	1g Optimum	30	46	60	1g	10 to 25,000 Hz	25 dB at 1 kHz
SC39ED	Bi-radial (Elliptical)	$\frac{1}{2}$ $1\frac{1}{2}$ g	24	32	29	1g	20 to 20,000 Hz	25 dB at 1 kHz
SC39EJ	Bi-radial (Elliptical)	1.5 3g	30	40	35	2g	20 to 20,000 Hz	20 dB at 1 kHz
SC39B	Spherical	$1\frac{1}{2}$ 3g	30	40	35	2g	20 to 20,000 Hz	20 dB at 1 kHz
SC35C	Spherical	4.5g	14	27	20	4g	20 to 20,000 Hz	20 dB at 1 kHz

DATA SHEET/reference guide

There is a product data sheet available for every microphone and circuitry product Shure manufactures. They provide information such as detailed specifications, technical descriptions, product features, impedance change instructions, optional conversions, circuit diagrams, wiring considerations, descriptions of controls, connectors and indicators, as well as a list of optional accessories and replacement parts.

Many of these data sheets also include a "Shure Architect's Specifications" section to provide the sound installer, contractor, architect or their consultants a quick and easy reference for specifying "Shure or equivalent" in specifications and bids. Forward your request for Shure Data Sheets to Shure Brothers, Inc., Attention: Customer Services, 222 Hartley Ave., Evanston, IL 60204. When ordering, please list both product model number and data sheet ordering number.

Microphones

Model/Series	Data Sheet Ordering Number
50AC	27A1301
55SH	27A1B40
104C	27A1149
401 Series	27A196
404 Series	27A179
405K	27A259
407B	27A972
414 Series	27A2B7
444D	27A1618
460	27A246
488T	27A1343
514B	27A1387
615BG	27A1494
515SA & 515SB	27A2052
515SBG & 515SB-G18	27A1B81
522	27A687
526T Series II	27A1468
527B	27A2083
527C	27A2084
533SA	27A332
545D	27A1841
545L	27A2060
545SD	27A1844
545SH	27A1842
546	27A176
560	27A213
561	27A2057
562	27A2053
585D & 585SD	27A1846
585SH	27A1843
570	27A2056
570S	27A2054
571	27A2055
572G	27A2061
575 Series	27A2068

Microphones

Model/Series	Data Sheet Ordering Number
578	27A2082
579SB	27A2059
586 Series	27A2051
588SA & 588SB	27A1845
R104A	27A1679
SM5B	27A959
SM7	27A990
SM10A	27A2034
SM11	27A1471
SM12A	27A2036
SM14A	27A2035
SM17	27A1996
SM18 Series	27A1802
SM51	27A372
SM53 & SM54	27A1734
SM56	27A1980
SM67	27A2025
SM58	27A2026
SM69	27A1706
SM61	27A1733
SM62	27A1728
SM63 & SM63L	27A1801
SM78	27A1547
SM77 Series	27A2003
SM78 Series	27A2002
SM80	27A1743
SM81	27A1770
SM82	27A1103
SM63	27A1928
SM85	27A1992
SM87	27A2049
SP19	27A1783
VR220	27A8069
VR300	27A8048

Circuitry Products

Model/Series	Data Sheet Ordering Number
AMS22	27A1793
AMS24	27A2065
AMS26	27A1793
AMS28	27A1814
AMS880	27A8057
AMS4000	27A8040
AMS8000	27A8040
FP31	27A8055
M64	27A2076
M67	27A1098
M68	27A872
M267	27A8008
M268	27A8038
SE30	27A8026

Phonograph Cartridges

Model/Series	Data Sheet Ordering Number
SC35C	27A2082
SC39B	27A1377
SC39ED	27A1377
SC39EJ	27A1377
V15 Type V-MR	27A1909

INDEX

Microphones		Microphone Accessories		Circuitry	
Model/Series	Page No.	Model/Series	Page No.	Model/Series	Page No.
50AC	18	SM83	17	AMS22	66, 67
65SH	35	SM85	22	AMS24	66, 67
104C	46	SMB7	20, 21	AMS26	66, 67
401 Series	47	SP19	43	AMS28	66, 67
404 Series	48	VR230	45	AMS880	66, 67
405K	48	VR300	45	AMS4000	66, 67
407B	46	A2WSA Series	62	AMS8000	66, 67
414 Series	48	A12	56	FP31	61
444D	49	A15 Series	51	M64	68
450	48	A24A	54	M67	64
488T	47	A25B	54	M68	64
614B	46	A25M	54	M267	62
515 Series	30	A26M	54	M268	63
515BG	30, 39	A27M	54	SE30	65
515SBG	30, 39	A45	54		
515SB-G18	30, 39	A45Z	56		
522	48	A51L	56		
526T Series II	49	A53E	55		
527 Series	46	A53HM	54		
533 Series	37	A53M	54		
545 Series	31	A54L	56		
545L	31, 39, 41	A55HM	54		
546	31	A55M	54		
560	41	A57D	54		
561	39	A57E	54		
562	39	A57L	56		
565 Series	32	A61WS Series	52		
570 Series	41	A81G	52		
571	38	A81WS	52		
572G	39	A82MA	57		
575 Series	38	A95 Series	51		
577B Series	47	A97A	51		
578	36	A97F	51		
579SB	36	BB-44	53		
586 Series	33	C20A	55		
588 Series	34	C20H	55		
SM5B	9	C25B	55		
SM7	10	C25E	55		
SM10A	26	C25F	55		
SM11	40	C25G	55		
SM12A	26	CO-1	54		
SM14A	26	G6A	56		
SM17	26	G12	56		
SM18 Series	42	G12A	56		
SM51	40	G12-CN	56		
SM53	11	G18	56		
SM54	11	G18A	56		
SM56	25	G18-CN	56		
SM57	25	MS-10C	53		
SM58	24	PS1	57		
SM59	28	PS1E2	57		
SM61	13	R104A	14, 16		
SM62	29	RSR-1	56		
SM63, SM63L	12	S15	53		
SM78	13	S33B	53		
SM77 Series	23	S33P	53		
SM78 Series	23	S37A	53		
SM80	14, 15	S39A	53		
SM81	14, 15	S55P	53		
SM82	16	SRC-1	56		

Circuitry Accessories	
Model/Series	Page No.
A30A	69
A67B	69
A68L	69
A68M	69
A68R	69
A68R-BL	69
A100B	69
A101B	69
A268B	69
A268R	69
RKC169	69

Professional Phonograph Cartridges	
Model/Series	Page No.
SC35C	70
SC39 Series	70
V15 Type V-MR	70

SHURE... quality is our first consideration

During the second world war, microphone testing for durability and reliability was forced upon manufacturers building for government contracts. When this was no longer required, most companies stopped. Shure did not. In fact, we made the tests progressively tougher and the standards even higher.

Shure has a staff of specialists whose sole function is to uncover any weaknesses BEFORE Shure microphones are put into quantity production. They work with such test facilities, equipment, and instrumentation as Environmental Test Chambers, Helmholtz Magnetic Coils which generate controlled magnetic fields that induce electrical hums, and Vibration Exciters.

Microphones are fried at temperatures up to 85°C. (185°F.)—often for entire days; frozen down to -46°C. (-50°F.) for half-hour periods during the heat test; shaken from side-to-side, back-and-forth, and up-and-down, simultaneously and violently; subjected to steamy humidities—up to 100% at room temperature, and 93% at 38°C. (100°F.); subjected to ultraviolet rays, salt sprays, alcohol, sand, and water.

Then, for good measure, we drop them repeatedly 2 meters (6 ft.) onto hardwood floors! That is our standard test procedure. All during production, units chosen at random are put through these same tests. Failure of any one microphone brings production to a halt until the original design requirements are again met. Knowing all this puts special burdens on Shure design engineers. That they consistently succeed in designing better products is the result of Shure's incomparable experience in applying ingenious and unique solutions to knotty microphone design problems.

Shure makes more brand name microphones than any other company in the world. We have been told by our customers that this is a reflection of user-satisfaction with the quality and reliability of our products coupled with an outstanding reputation for credibility. We make no unverifiable claims. We do not publish exaggerated or misleading data.

Shure has been in the business of supplying microphones longer than any other manufacturer. We've learned a lot about what it takes to design and make a microphone that works well. Our development and engineering groups draw upon a unique "bank" of microphone design background and experience. They regularly publish significant technical papers on microphone design and use in prestigious audio journals. Many of these papers are available at no charge by writing to Shure. Our engineers have been granted patents covering many significant aspects of microphone design. They virtually "wrote the book" on the subject of modern microphones.

Our reputation rides on every Shure microphone
There is probably no country in the world where Shure microphones are not used and respected. Shure's worldwide reputation for quality is built on the twin foundations of engineered performance and of manufactured reliability. Our emphasis is on maintaining these high standards.

Shure's reputation for quality is the result of the dedication of everyone at Shure. They are encouraged to question established methods so that we can continue to provide the very best value for you. We've been told that ours is the largest staff of quality assurance specialists of any microphone manufacturer. But, in a larger sense, quality assurance is everybody's job at Shure. All of our people care about what happens to the products they make—before and after these products leave the factory. And, we stand behind what we make with the industry's largest international distribution and service network.

To the purchasers of the millions of microphones bearing the name Shure during the past years and to those now buying their first Shure microphone, we can assure you that we continue to follow the philosophy and policies that keep Shure microphones working dependably year after year after year.

Quality is our first consideration.



Great performers rely on the great performance of Shure Microphones



Melissa Manchester



Russell Hitchcock
of Air Supply



Ricky Skaggs



Mick Jagger
of the Rolling Stones



Lee Greenwood



Roger Daltrey
of The Who



Peter Townshend
of The Who




Randy Owen
of Alabama



Billy Squier



Eddie Rabbitt

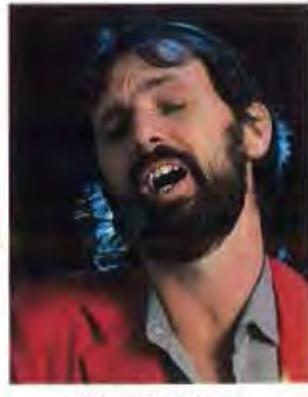

Keith Knudsen



Tina Turner

THE SOUND OF THE PROFESSIONALS...WORLDWIDE®

SHURE

Shure Brothers, Inc.
222 Hurley Avenue
Evanston, IL 60204