

AD-A082 071

NAVAL OCEANOGRAPHY COMMAND CENTER/JOINT TYPHOON WARNI--ETC F/6 4/2  
ANNUAL TYPHOON REPORT 1979.(U)  
1979 J W DIERCKS, J K LAVIN, J H BELL


UNCLASSIFIED


NL

1 of 3

AD-A082 071




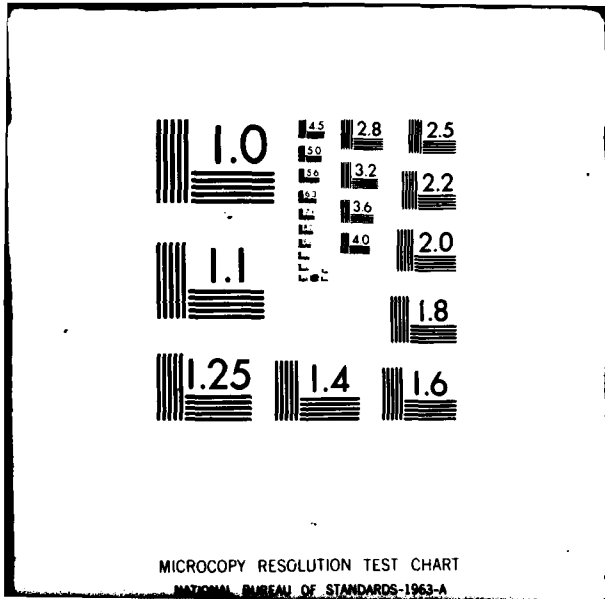

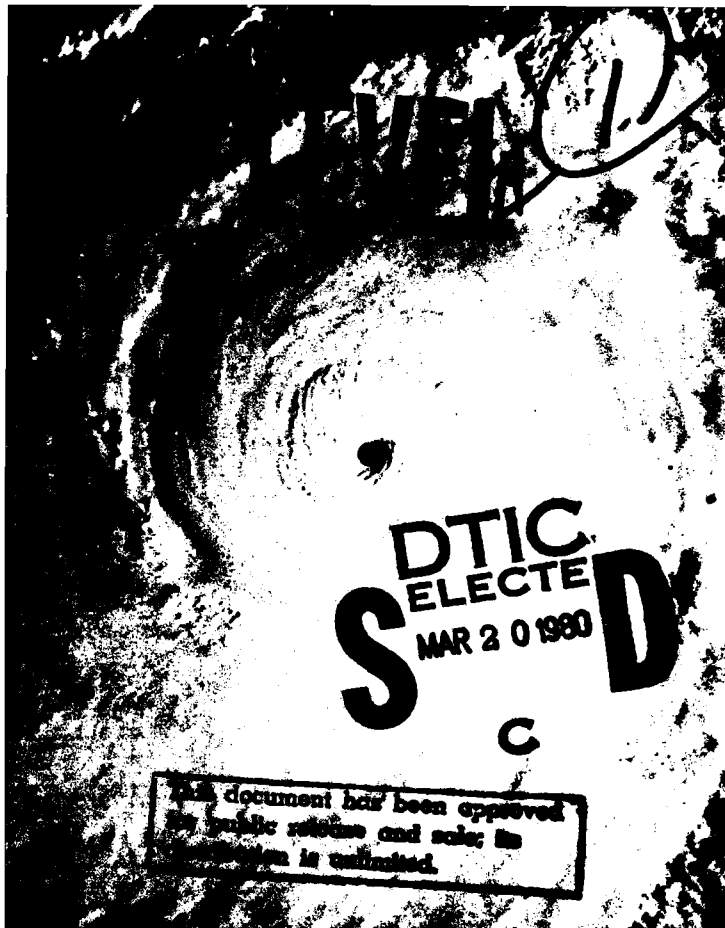

DTIC  
ELECTE  
MAR 20 1980

This document has been approved  
for public release and sale; its  
distribution is unlimited.

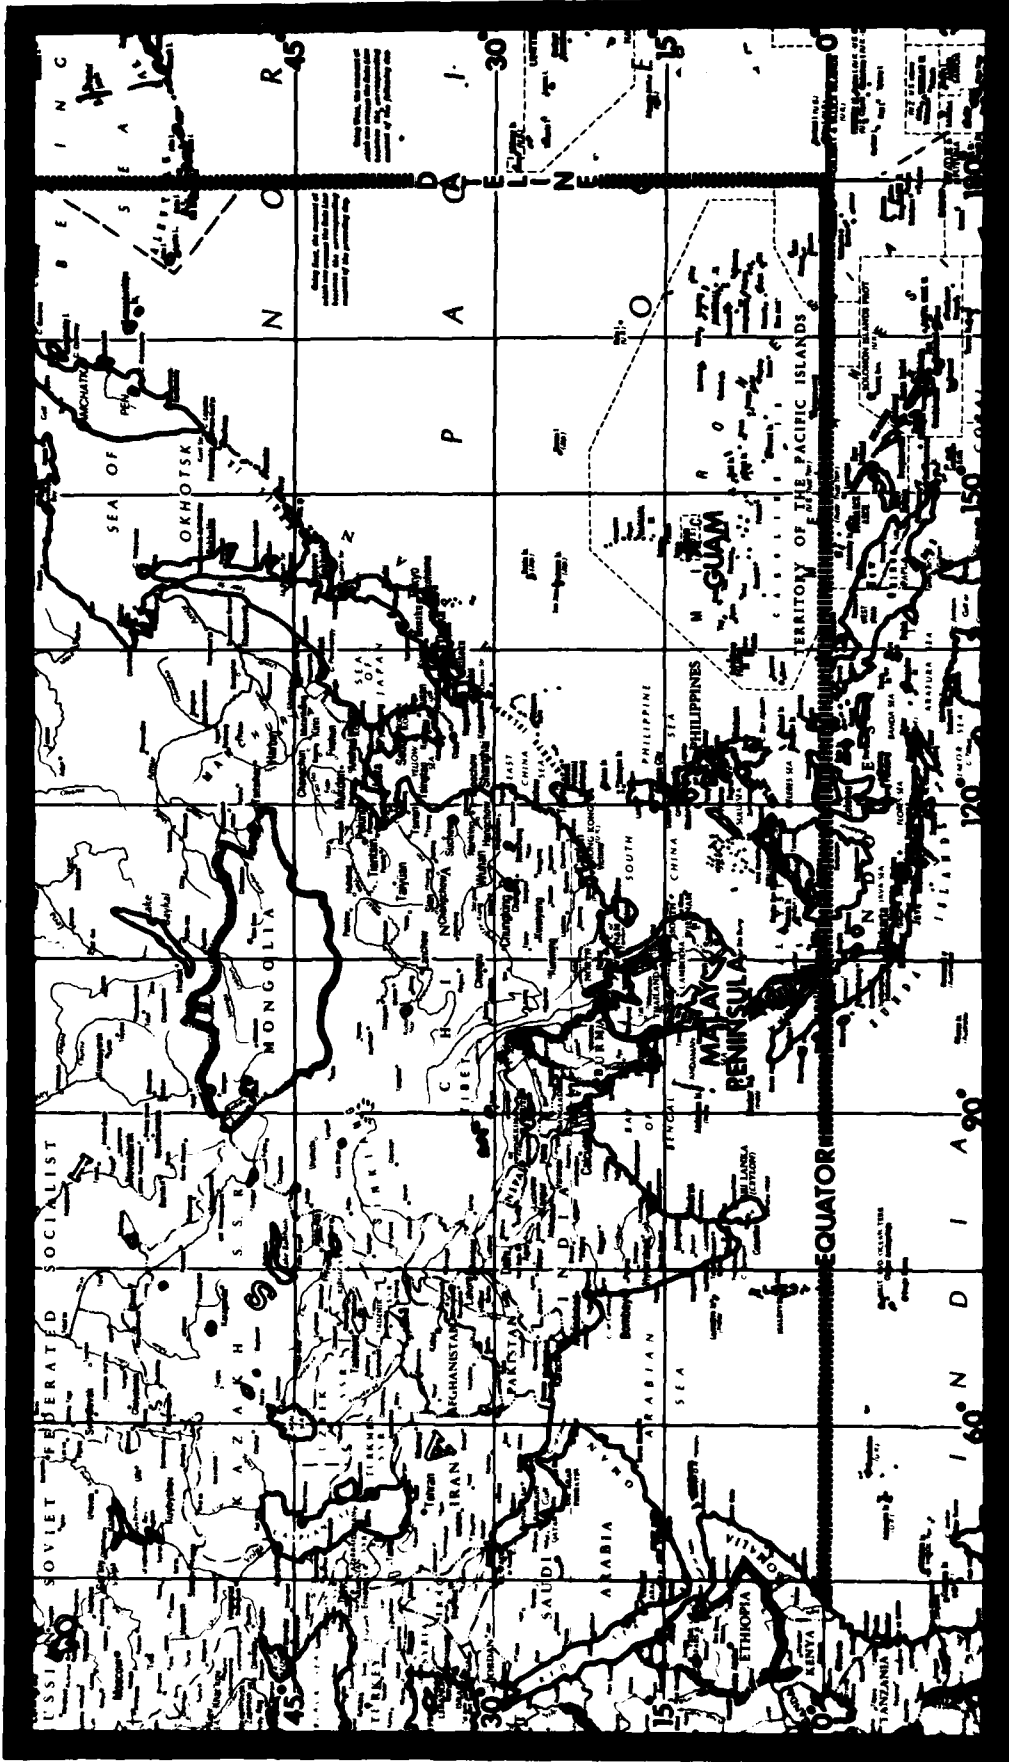


Indian Ocean Area (Malay Peninsula to Africa)

Pacific Area (Dateline to Malay Peninsula)

**AREA OF RESPONSIBILITY - JOINT TYPHOON WARNING CENTER, GUAM**



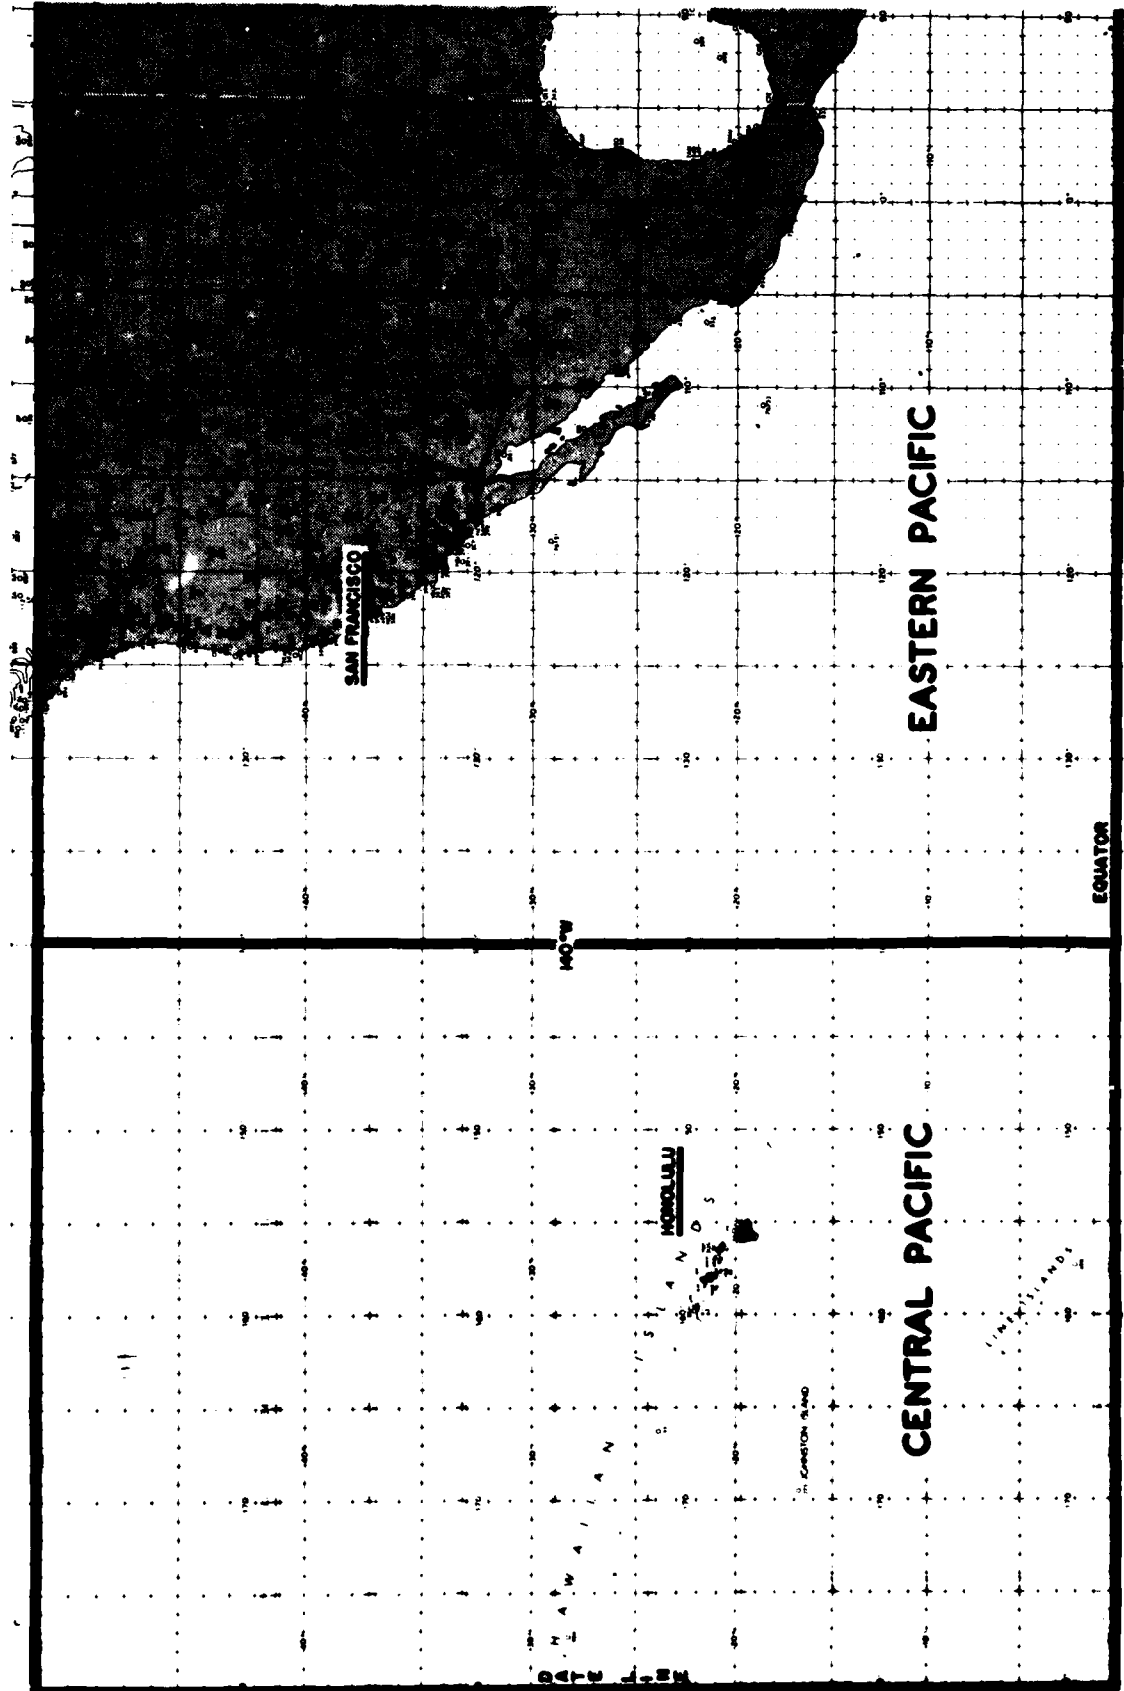

**Areas of Responsibility - Central and Eastern Pacific Hurricane Centers**

## DISCLAIMER NOTICE

**THIS DOCUMENT IS BEST QUALITY PRACTICABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.**

**CORRECTIONS TO ANNEX B - for 1978 and 79 Annual Typhoon Reports (ATR)**

**1. The following tropical cyclones have aircraft fix data (eye characteristics) listed incorrectly:**

1978 ATR

RITA  
VIOLA

1979 ATR

VERA  
TIP  
OWEN

**2. The diameters of circular and concentric eye walls are incorrectly listed under the EYE ORIENTATION column. (Only elliptical eye walls have an orientation specified. These are specified correctly.) The misplaced diameters must be divided by 10 to obtain the correct figure and located in the EYE DIAMETER column.**

# Annual Typhoon Report 1979.

*New*  
U. S. NAVAL OCEANOGRAPHY COMMAND CENTER  
JOINT TYPHOON WARNING CENTER  
~~COMNAVSTA SAN FRANCISCO BOX 17~~  
FPO SAN FRANCISCO 96630

9  
Rept. for  
Jan-Dec 79,

THOMAS R. MURRAY  
\*DEAN R. MORFORD  
Captains, United States Navy

## COMMANDING

10 JOHN W. / DIERCKS  
\*JAMES K. / LAVIN  
Lieutenant Colonels, United States Air Force

DIRECTOR, JOINT TYPHOON WARNING CENTER

## STAFF

LCDR James H. / Bell, USN  
\*LCDR Carl B. / Ihli, Jr., USN  
CAPT Clifford R. / Matsumoto, USAF  
\*LT Olaf M. Lubeck, USNR  
CAPT John D. Shewchuk, USAF  
CAPT Gerald A. Guay, USAF  
LTJG George M. Dunnavan, USN  
LTJG Jack E. Huntley, USNR  
\*LTJG William T. Curry, USN  
AG1 Donald L. McGowan, USN  
\*TSGT Bobby L. Setliff, USAF  
SSGT Charles J. Lee, USAF  
SSGT William H. Taylor, USAF  
AG2 Kenneth A. Kellogg, USN  
SGT Konrad W. Crowder, USAF  
AG3 Victoria J. Macke, USN  
AG3 Stephani A. Bubanich, USN  
AG3 Winifred A. Few, USN  
AG3 Carl A. Gantz, USN  
SRA John W. Archambeau, USAF  
\*SRA Timothy J. Sowell, USAF  
\*AGAN Kathleen S. Minerich, USN  
\*AGAN Gregory M. Hardyman, USN  
AGAN Sally E. Stege, USN  
\*AGAN Thomas E. Stockner, USN

CONTRIBUTOR: Det 1, 1WW - USAF

\*MAJ John L. Thoma  
CAPT David C. Danielson  
CAPT John E. Oleyar  
\*CAPT Michael L. D'Spain  
\*CAPT Mike W. Kowa  
CAPT James P. Millard  
CAPT Marsha A. Korose

\*Transferred during 1979

This document has been approved  
for public release and sale; its  
distribution is unlimited.

DTIC  
ELECTE  
S MAR 20 1980 D  
C

411659

*Ince*

FRONT COVER: *Super Typhoon Tip near maximum intensity of 160 kt (82 m/sec), 11 October 1979, 2127Z. The minimum sea-level pressure was 870 mb and the associated circulation pattern was 1200 nm (2222 km) in diameter at that time. Details on Tip can be found on page 72. (DMSP imagery)*

## FOREWORD

The Annual Typhoon Report is prepared by the staff of the Joint Typhoon Warning Center (JTWC). JTWC is a combined USAF/USN entity operating under the command of the U. S. Naval Oceanography Command Center, Guam. The senior Air Force Officer assigned is designated as Director, JTWC and is responsible to the Commanding Officer, U. S. Naval Oceanography Command Center, Guam for the operation of the JTWC. The senior Naval Officer of the JTWC is designated as the Deputy Director/Operations Officer. The JTWC was established by CINCPACFLT message 280208Z April 1959 when directed by CINCPAC message 230233Z April 1959. Its operation is guided by the CINCPACINST 3140.1 (series).

The Naval Oceanography Command Center/Joint Typhoon Warning Center, Guam has the responsibility to:

- 1) Provide continuous meteorological watch of all tropical activity north of the equator, west of the Date Line, and east of the African coast (JTWC area of responsibility) for potential tropical cyclone development.
- 2) Provide warnings for all significant tropical cyclones in the assigned area of responsibility.
- 3) Determine tropical cyclone reconnaissance requirements and assign priorities.

4) Conduct an annual post-analysis of all tropical cyclones occurring within the JTWC area of responsibility and prepare an Annual Typhoon Report for issuance to interested agencies.

5) Conduct tropical cyclone forecasting and detection research as practicable.

In the event of incapacitation of the JTWC, the alternate (AJTWC) assumes the responsibility for issuing warnings. The U. S. Naval Western Oceanography Center, Pearl Harbor, Hawaii is designated as the AJTWC. Assistance in determining tropical cyclone reconnaissance requirements and in obtaining reconnaissance data is provided by Detachment 4, 1st Weather Wing, Hickam AFB, Hawaii.

The meteorological services of the United States are planning to implement the metric system of measurement over the next few years. Some civilian and military agencies have started the education program by showing the metric equivalents to current units of measure. This Annual Typhoon Report includes metric equivalents to most measures.

Unless otherwise stated, all satellite data used in this ATR are Air Force Air Weather Service DMSP Data as acquired by OL-C, 27CS personnel and analyzed by Det 1, 1NW personnel collocated with the JTWC at Nimitz Hill, Guam.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	
Justification _____	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A C	23 8

# TABLE OF CONTENTS

CHAPTER I	OPERATIONAL PROCEDURES	page			
	1. General-----	1			
	2. Data Sources-----	1			
	3. Communications-----	1			
	4. Analyses-----	1			
	5. Forecast Aids-----	2			
	6. Forecasting Procedures-----	2			
	7. Warnings-----	3			
	8. Prognostic Reasoning Message-----	3			
	9. Significant Tropical Weather Advisory-----	3			
	10. Tropical Cyclone Formation Alert-----	3			
CHAPTER II	RECONNAISSANCE AND FIXES				
	1. General-----	4			
	2. Reconnaissance Availability-----	4			
	3. Aircraft Reconnaissance Summary-----	4			
	4. Satellite Reconnaissance Summary-----	5			
	5. Radar Reconnaissance Summary-----	6			
	6. Tropical Cyclone Fix Data-----	6			
CHAPTER III	SUMMARY OF TROPICAL CYCLONES				
	1. Western North Pacific Tropical Cyclones-----	10			
	INDIVIDUAL TROPICAL CYCLONES				
<u>TROPICAL CYCLONE</u>	<u>AUTHOR</u>	<u>page</u>	<u>TROPICAL CYCLONE</u>	<u>AUTHOR</u>	<u>page</u>
TY ALICE	SHEWCHUK-----	16	TS KEN	SHEWCHUK-----	53
TY BESS	GUAY-----	18	TY LOLA	LUBECK-----	54
TY CECIL	LUBECK-----	22	TY MAC	GUAY-----	56
TS DOT	SHEWCHUK-----	24	TS NANCY	DUNNAVAN-----	58
TD 05	GUAY-----	26	TY OWEN	LUBECK-----	60
TY ELLIS	DUNNAVAN-----	28	TS PAMELA	GUAY-----	64
TS FAYE	DUNNAVAN-----	30	TS ROGER	MATSUMOTO-----	66
TD 08	MATSUMOTO-----	34	TY SARAH	HUNTLEY-----	68
ST HOPE	CURRY-----	36	ST TIP	DUNNAVAN-----	72
TS GORDON	SHEWCHUK-----	40	ST VERA	MATSUMOTO-----	78
TD 11	LUBECK-----	42	TS WAYNE	LUBECK-----	80
TY IRVING	GUAY-----	44	TD 26	GUAY-----	82
ST JUDY	DUNNAVAN-----	48	TY ABBY	HUNTLEY-----	84
TD 14	MATSUMOTO-----	52	TS BEN	SHEWCHUK-----	88
			2. North Indian Ocean Tropical Cyclones-----		90
TC 17-79	CURRY-----	92	TC 24-79	SHEWCHUK-----	97
TC 18-79	LUBECK-----	94	TC 25-79	HUNTLEY-----	97
TC 22-79	MATSUMOTO-----	96	TC 26-79	SHEWCHUK-----	98
TC 23-79	SHEWCHUK-----	96			
CHAPTER IV	SUMMARY OF FORECAST VERIFICATION				
	1. Annual Forecast Verification-----	100			
	2. Comparison of Objective Techniques-----	105			
CHAPTER V	APPLIED TROPICAL CYCLONE RESEARCH SUMMARY				
	1. JTWC Research-----	108			
	Establishment of the JTWC Tropical Cyclone Data Base				
	NEDS/Computer Applications				
	Tropical Cyclone Minimum Sea-Level Pressure-Maximum Sustained Wind Relationship				
	Objective Tropical Cyclone Initial Positioning with a Weighted Least Squares Algorithm				
	Equivalent Potential Temperature/Minimum Sea-Level Pressure Relationships for Forecasting Tropical Cyclone Intensification				
	Basic Streamline Analysis and Tropical Cyclone Forecasting Technique Guide				
	Improvement and Extension of the JTWC Climatology				

	Page
2. NEPRF Research-----	109
Tropical Cyclone Modeling	
Tropical Cyclone Wind Distribution	
Tropical Cyclone Strike Probabilities	
A Statistically Derived Prediction Procedures for	
Tropical Cyclone Genesis	
Extreme Sea States within a Typhoon	
Tropical Cyclone Origin, Movement and Intensity	
Characteristics Based on Data Compositing	
Techniques	
Improved Upper-Level Tropical Cyclone Steering	
Techniques	
Airborne Expendable Bathythermograph Observations	
Immediately Before and After Passage of Typhoon	
Phyllis (Aug 75)	
Mesoscale Effects of Topography on Tropical	
Cyclone Associated Surface Winds	
Typhoon Haven Studies	
ANNEX A	TROPICAL CYCLONE TRACK DATA
	1. Western North Pacific Cyclone Track Data-----112
	2. North Indian Ocean Cyclone Track Data-----131
ANNEX B	TROPICAL CYCLONE FIX DATA
	1. Western North Pacific Cyclone Fix Data-----135
	2. North Indian Ocean Cyclone Fix Data-----185
APPENDIX	1. Contractions-----188
	2. Definitions-----189
	3. References-----190
DISTRIBUTION	-----191

# CHAPTER I - OPERATIONAL PROCEDURES

## 1. GENERAL

Routine services provided by the Joint Typhoon Warning Center (JTWC) include the following: (1) Significant Tropical Weather Advisories issued daily describing all tropical disturbances and their potential for further development; (2) Tropical Cyclone Formation Alerts issued whenever interpretation of satellite and synoptic data indicates likely formation of a significant tropical cyclone; (3) Tropical Cyclone Warnings issued four times daily for significant tropical cyclones; and (4) Prognostic Reasoning messages issued twice daily for tropical storms and typhoons in the Pacific area.

JTWC responds to changing requirements of activities serviced. Therefore, contents of routine services are subject to change from year to year usually as a result of deliberations at the Tropical Cyclone Conference.

## 2. DATA SOURCES

### a. COMPUTER PRODUCTS:

The Naval Oceanography Command Center (NAVOCEANCOMCEN) Guam provides computerized meteorological/oceanographic products for JTWC. In addition, the standard array of synoptic-scale computer analyses and prognostic charts are available from the Fleet Numerical Oceanography Center (FLENUMOCEANCEN) at Monterey, California. With the installation of the Naval Environmental Display Stations (NEDS) during 1978, JTWC now has very timely access to necessary FLENUMOCEANCEN products and is thereby able to more efficiently and effectively use this information.

### b. CONVENTIONAL DATA:

Conventional meteorological data are defined as surface and upper-air observations from island, ship and land stations plus weather observations from commercial and military aircraft (AIREPS). Conventional data charts are prepared daily at 0000Z and 1200Z for the surface, 700 mb, and 500 mb levels. A chart of upper-air data is prepared which utilizes 200 mb rawinsonde data and AIREPS above 29,000 ft within 6 hours of the 0000Z and 1200Z synoptic times.

### c. AIRCRAFT RECONNAISSANCE:

Aircraft weather reconnaissance data are invaluable in the positioning of centers of developing systems and essential for the accurate determination of the eye/center, maximum intensity, minimum sea-level pressure and radius of significant winds exhibited by tropical cyclones. Winds and pressure-height data at the 500 and/or 400 mb level, provided by reconnaissance aircraft while enroute to, or returning from, fix missions, are also used to supplement the sparse data in the tropics and subtropics. These data are plotted on large-scale sectional charts for each mission flown. A comprehensive discussion of aircraft weather reconnaissance is presented in Chapter II.

### d. SATELLITE RECONNAISSANCE:

Meteorological satellite data from the Defense Meteorological Satellite Program (DMSP) and the National Oceanic and Atmospheric Administration played a major role in the early detection and tracking of tropical cyclones in 1979. A discussion of this role is presented in Chapter II.

### e. RADAR RECONNAISSANCE:

During 1979, as in recent years, land radar coverage was utilized extensively when available. Once a storm moved within the range of a land radar site, reports were usually received hourly. Use of radar during 1979 is discussed in Chapter II.

## 3. COMMUNICATIONS

a. JTWC currently has access to three primary communications circuits:

(1) The Automated Digital Network (AUTODIN) is used for dissemination of warnings and other related bulletins to Department of Defense installations. These messages are relayed for further transmission over U. S. Navy Fleet Broadcasts, U. S. Coast Guard CW (continuous wave morse code) and voice communications. Inbound message traffic for JTWC is received via AUTODIN addressed to NAVOCEANCOMCEN GUAM.

(2) The Air Force Automated Weather Network (AWN) provides weather data to JTWC through a dedicated circuit from the automated digital weather switch (ADWS) at Clark AB, R.P. The ADWS selects and routes the large volume of meteorological reports necessary to satisfy JTWC requirements for the right data at the right time. Weather bulletins prepared by JTWC are inserted into the AWN circuit by the Nimitz Hill Naval Telecommunications Center (NTCC) of the Naval Communications Area Master Station Western Pacific.

(3) The Naval Environmental Data Network (NEDN) provides the communications link with the computers at FLENUMOCEANCEN. JTWC is able to both receive environmental data from FLENUMOCEANCEN and access the computers directly to run various programs.

b. Besides providing forecasters with the ability to rapidly access computer products, the NEDS has recently become the backbone of the JTWC communications system. AUTODIN and AWN message tapes can now be prepared by JTWC personnel for insertion into the AUTODIN and AWN circuits by the NTCC. The NEDS is also used by the TDO to request forecast aids which are processed by the computers at Monterey and transmitted back to the TDO over the NEDN circuit.

## 4. ANALYSES

A composite surface/gradient level (3000 ft) manual analysis is accomplished on the 0000Z and 1200Z conventional data. Analysis of the wind field using streamlines is stressed for tropical and subtropical



regions. Analysis of the pressure field is stressed for higher latitudes and in the vicinity of tropical cyclones.

Manual analysis of the 500 mb level is accomplished on the 0000Z and 1200Z data. Although the analysis of the 500 mb height field is stressed, knowledge of the wind field to more clearly delineate steering currents is equally important.

A composite upper-tropospheric manual analysis, utilizing rawinsonde data from 300 mb through 100 mb, wind directions extracted from satellite data by Det 1, LW and AIREPS (plus or minus 6 hours) at or above 29,000 feet is accomplished on 0000Z and 1200Z data daily. Wind and height data are used to arrive at a representative analysis of tropical cyclone outflow patterns, of steering currents and of areas that may indicate tropical cyclone intensity change. All charts are hand plotted over areas of tropical cyclone activity to provide all available data as soon as possible to the TDO. These charts are augmented by the computer-plotted charts for the final analyses.

Additional sectional charts at intermediate synoptic times and auxiliary charts such as checkerboard diagrams and pressure-change charts are also analyzed during periods of significant tropical cyclone activity.

## 5. FORECAST AIDS

### a. CLIMATOLOGY:

Climatological publications utilized during the 1979 typhoon season include previous JTWC Annual Typhoon Reports and climatic publications from local sources, Naval Environmental Prediction Research Facility, Naval Postgraduate School, Air Weather Service, First Weather Wing and Chanute Technical Training Center. Publications from other Air Force and Navy activities, various universities and foreign countries are also used by the JTWC.

### b. OBJECTIVE TECHNIQUES:

The following objective techniques were employed in tropical cyclone forecasting during 1979. A description of these techniques is presented in Chapter IV.

- (1) TYFN75 (Analog)
- (2) MOHATT (Steering)
- (3) 12 HR EXTRAPOLATION
- (4) CLIMATOLOGY
- (5) HPAC (Combined extrapolation and climatology)
- (6) TROPICAL CYCLONE MODEL (Dynamic)
- (7) INJAH74 (Analog)
- (8) CYCLOPS (Steering)
- (9) TYAN78 (Analog)

## 6. FORECASTING PROCEDURES

### a. INITIALIZATION:

In the preparation of each warning, the actual surface location (fix) of the tropical cyclone eye/center just prior to (within three hours of) warning time is of prime importance. JTWC uses the Selective Reconnaissance Program (SRP) to levy an optimum mix of aircraft, satellite and radar resources to obtain fix information. When tropical cyclones are either poorly defined or the actual surface location cannot be determined, or when conflicting fix information is received, the "best estimate" of the surface location is subjectively determined from the analysis of all available data. If fix data are not available due to reconnaissance platform malfunctions or communication problems, synoptic data or extrapolation from previous fixes are used. The initial forecast (warning time) position is then obtained by extrapolation using the current fix and a "best track" of the cyclone movement to date.

### b. TRACK FORECASTING:

An initial forecast track is developed based on the previous forecast and the objective techniques. This initial track is subjectively modified based on the following:

- (1) The prospects for recurvature are evaluated. This evaluation is based primarily on present and forecast position and amplitude of middle tropospheric mid-latitude troughs from the latest 500 mb analysis and numerical prognoses.
- (2) Determination of steering level is partly influenced by maturity and vertical extent of the system. For mature cyclones located south of the 500 mb subtropical ridge, forecast changes in speed of movement are closely correlated with forecast changes in the intensity of the ridge. When steering currents are very weak, the tendency for cyclones to move northward due to their internal forces is an important consideration.
- (3) The proximity of the tropical cyclone to other tropical cyclones is evaluated to determine if there is a possibility of Fujiwhara interaction.
- (4) Over the 12- to 72-hr forecast spectrum, speed of movement during the early time frame is biased toward persistence (12-hr extrapolation) while that near the end of the time frame is biased towards objective techniques and climatology.
- (5) A final check is made against climatology to determine the likelihood of the forecast track. If the forecast deviates greatly from climatology, the forecast rationale is reappraised and the track adjusted as necessary.

### C. INTENSITY FORECASTING:

In forecasting intensity, heavy reliance is placed on aircraft reconnaissance reports, the Dvorak satellite interpretation model, wind and pressure data from ships and land stations in the vicinity of the cyclone, and the objective techniques. Additional considerations are the position and intensity of the tropical upper-tropospheric trough (TUTT), extent and intensity of upper-level outflow, sea-surface temperature, terrain influences, speed of movement and proximity to an extratropical environment.

### 7. WARNINGS

Tropical cyclone warnings are issued when a definite closed circulation is evident and maximum sustained wind speeds are forecast to increase to 34 or more knots within 48 hours, or the cyclone is in such a position that life or property may be endangered within 72 hours. Warnings are also issued in other situations if it is determined that there is a need to alert military and civil interests to conditions which may become hazardous in a short period of time. Each tropical cyclone warning is numbered sequentially and includes the initial warning time, eye/center position, intensity, the radial extent of 30, 50 and 100 knot surface winds (when applicable), the levied reconnaissance platform used, the instantaneous speed and direction of movement of the cyclone's surface center at warning time and the forecast information. The forecast intervals for all tropical cyclones, regardless of intensity, are 12-, 24-, 48- and 72-hr. Warnings within the JTWC Pacific area are issued within two hours of 0000Z, 0600Z, 1200Z and 1800Z with the constraint that two consecutive warnings may not be more than seven hours apart. Warnings in the JTWC Indian Ocean area are issued within two hours of 0200Z, 0800Z, 1400Z and 2000Z with the constraint that two consecutive warnings may not be more than seven hours apart. These variable warning times allow for maximum use of all available reconnaissance platforms and more effectively distribute the workload in multiple cyclone situations. If warnings are discontinued and a cyclone reintensifies, warnings are numbered consecutively from the last warning issued. Warning forecast positions are verified against the corresponding post-

analysis "best track" positions. A summary of the verification results for 1979 is presented in Chapter IV.

### 8. PROGNOSTIC REASONING MESSAGE

In the Pacific Area, prognostic reasoning messages are transmitted based on the 0000Z and 1200Z warnings or whenever the previous reasoning is no longer valid. This plain language message is intended to provide users with the reasoning behind the latest JTWC forecast. Prognostic reasoning messages are not prepared for tropical depressions nor for cyclones in the Indian Ocean area.

For the 1979 season, JTWC included confidence statements for the 24 and 48-hour forecasts. The confidence values were percentage probabilities that the 24-hour forecast position error would be less than 100 nm and less than 150 nm, respectively, and that the 48-hour error would be less than 200 nm and less than 300 nm, respectively. These probabilities were based on objective data from error analysis studies of past cyclones and were a function of latitude, longitude, storm intensity, organization and the number of western Pacific storms in existence.

Prognostic reasoning information applicable to all customers is provided in the remarks section of warnings when significant forecast changes are made or when deemed appropriate by the TDO.

### 9. SIGNIFICANT TROPICAL WEATHER ADVISORY

This plain language message, summarizing significant weather in the entire JTWC area of responsibility, is issued by 0600Z daily. It contains a detailed, non-technical description of all significant tropical disturbances and the JTWC evaluation of potential for significant tropical cyclone development within the 24-hour forecast period.

### 10. TROPICAL CYCLONE FORMATION ALERT

Alerts are issued whenever interpretation of satellite and other meteorological data indicates significant tropical cyclone formation is likely. These alerts will specify a valid period not to exceed 24 hours and must either be cancelled, reissued or superseded by a warning prior to expiration of the valid period.

## CHAPTER II RECONNAISSANCE AND FIXES

### 1. GENERAL

The Joint Typhoon Warning Center depends on reconnaissance to provide necessary, accurate and timely meteorological information in support of each warning. JTWC relies primarily on three sources of reconnaissance: aircraft, satellite and radar. Optimum utilization of all available reconnaissance resources is obtained through use of the Selective Reconnaissance Program (SRP) whereby various factors are considered in selecting a specific reconnaissance platform for each warning. These factors include: cyclone location and intensity, reconnaissance platform capabilities and limitations, and the cyclone's threat to life/property afloat and ashore. A summary of reconnaissance fixes received during 1979 is included in Section 6.

### 2. RECONNAISSANCE AVAILABILITY

#### a. Aircraft:

Aircraft weather reconnaissance is performed in the JTWC area of responsibility by the 54th Weather Reconnaissance Squadron (54 WRS). The squadron, presently equipped with six WC-130 aircraft, is located at Andersen Air Force Base, Guam. From July through October, augmentation by the 53rd WRS at Keesler Air Force Base, Mississippi brings the total number of available aircraft to nine. The JTWC reconnaissance requirements are provided daily throughout the year to the Tropical Cyclone Aircraft Reconnaissance Coordinator (TCARC). These requirements include area(s) to be investigated, tropical cyclone(s) to be fixed, fix times and forecast positions of fixes. The following priorities are utilized in acquiring meteorological data from aircraft, satellite and land-based radar in accordance with CINCPACINST 3140.1N:

- "(1) Investigative flights and vortex or center fixes for each scheduled warning in the Pacific area of responsibility. One aircraft fix per day of each cyclone of tropical storm or typhoon intensity is desirable.
- (2) Center or vortex fixes for each scheduled warning of tropical cyclones in the Indian Ocean Area of responsibility.
- (3) Supplementary fixes.
- (4) Synoptic data acquisition."

As in previous years, aircraft reconnaissance provided direct measurements of height, temperature, flight-level winds, sea level pressure, estimated surface winds (when observable) and numerous additional parameters. The meteorological data are gathered by the Aerial Reconnaissance Weather Officers

(ARWO) and dropsonde operators of Detachment 4, Hq AWS who flew with the 54th. These data provide the Typhoon Duty Officer (TDO) indications of changing cyclone characteristics, radius of cyclone associated winds, and present cyclone position and intensity. Another important aspect of this data is its availability for research in tropical cyclone analysis and forecasting. Aircraft reconnaissance will become even more important in years to come when high-resolution tropical cyclone dynamic steering programs will require a dense input of wind and temperature data.

#### b. Satellite

Satellite fixes from USAF ground sites and USN ships provide day and night coverage in the JTWC area of responsibility. Interpretation of this satellite imagery provides cyclone positions and estimates of storm intensities through the Dvorak technique (for daytime passes).

Detachment 1, 1st Weather Wing, which receives and processes DMSF data, is the primary fix site for the northwestern Pacific. DMSF fix positions received at JTWC from the Air Force Global Weather Central (AFGWC), Offutt Air Force Base, Nebraska were the major source of satellite data for the Indian Ocean. GOES fixes were also provided by the National Environmental Satellite Service, Honolulu, Hawaii for tropical cyclones near the dateline.

#### c. Radar

Land radar provides positioning data on well developed cyclones when in proximity (usually within 175 nm of the radar site) of the Republic of the Philippines, Taiwan, Hong Kong, Japan, the Republic of Korea, Kwajalein, and Guam.

#### d. Synoptic

In 1979, the JTWC also determined tropical cyclone positions based on the analysis of the surface/gradient level synoptic data. These positions were helpful in situations where the vertical structure of the tropical cyclone was weak or accurate surface positions from aircraft were not available due to flight restrictions.

### 3. AIRCRAFT RECONNAISSANCE SUMMARY

During the 1979 tropical season, the JTWC levied 289 six-hourly vortex fixes and 52 investigative missions. In addition to the levied vortex fixes, 150 supplemental fixes were also obtained. The number of levied investigative missions has increased steadily over the past four years in response to JTWC's increased efforts to detect initial tropical cyclone development.

Of 1979's 28 tropical cyclones, investigative missions were not flown on four. The average vector error for all aircraft fixes received at the JTWC during 1979 was 13.0 nm (24.1 km).

Reconnaissance effectiveness is summarized in Table 2-1 using the criteria as set forth in CINCPACINST 3140.IN.

EFFECTIVENESS	NUMBER OF LEVIED FIXES	PERCENT
COMPLETED ON TIME	258	89.3
EARLY	2	0.7
LATE	15	5.2
MISSED	14	4.8
TOTAL	289	100.0

	LEVIED	MISSED	PERCENT
AVERAGE 1965-1970	507	10	2.0
1971	802	61	7.6
1972	624	126	20.2
1973	227	13	5.7
1974	358	30	8.4
1975	217	7	3.2
1976	317	11	3.5
1977	203	3	1.5
1978	290	2	0.7
1979	289	14	4.8

#### 4. SATELLITE RECONNAISSANCE SUMMARY

The Air Force provides satellite reconnaissance support to JTWC using imagery data from DMSP polar orbiting spacecraft. Data from similar NOAA spacecraft (TIROS-N/NOAA-6) were not available to the tactical sites of the network but could be processed on a backup basis by the Air Force Global Weather Central (AFGWC).

The DMSP network consists of both tactical and centralized facilities. Tactical DMSP sites are located at Nimitz Hill, Guam; Clark AB, Philippines; Kadana AB, Japan; Osan AB, Korea; and Hickam AFB, Hawaii. These sites provide a combined coverage that blankets the JTWC area of responsibility in the western Pacific from near the dateline westward to the Malay Peninsula.

The centralized member of the DMSP network is the Air Force Global Weather Central located at Offutt AFB, Nebraska. AFGWC receives worldwide satellite imagery coverage four times daily from two DMSP spacecraft. In addition, AFGWC has the capability to process either TIROS-N or NOAA-6 should one of the primary DMSP spacecraft fail. Imagery taken over the JTWC area of responsibility is recorded on board

the spacecraft and later downlinked to AFGWC via command/readout sites and communications satellites. With their coverage, AFGWC is able to fix a storm anywhere within the JTWC area of responsibility. As the only site in the network that receives coverage over the entire Indian Ocean, AFGWC has the primary responsibility for satellite reconnaissance in this area as well as a small portion of the central Pacific near the dateline. On occasion, AFGWC is tasked to provide storm positions in the western Pacific as backup to the tactical sites.

The thread that ties the network together is Det 1, LWV collocated with JTWC atop Nimitz Hill, Guam. Based on available satellite coverage, Det 1 coordinates satellite reconnaissance requirements with JTWC and tasks the individual DMSP sites to provide the necessary storm fixes. The tasking concept is to fix every storm or tropical disturbance (alert area) once from each satellite pass over the area of the storm. When a satellite position is required as the basis for a warning (levy), a dual-site tasking concept is applied. Under this concept, two sites are tasked to fix the storm off the same satellite pass. This provides the necessary redundancy to virtually guarantee JTWC a successful satellite fix of the storm. Using the dual-site tasking concept, the satellite reconnaissance network was able to meet 98 percent of JTWC's satellite fix requirements. Dual-site tasking is not available over the Indian Ocean since only AFGWC receives the satellite coverage for most of that area.

The network provides JTWC with several products and services. The main service is one of surveillance. With the exception of Osan, each site reviews its daily coverage for any indications of development. If an area shows indications of development, JTWC is notified. Once JTWC issues either an alert or warning, the network is tasked to provide three products: storm positions, storm intensity estimates, and 24-hour storm intensity forecasts. Satellite storm positions are assigned position code numbers (PCN) depending on the availability of geography for precise gridding and the degree of organization of the storm's circulation center (Table 2-2). During 1979, the network provided JTWC with 1970 satellite fixes of tropical cyclones in warning status. A comparison of those fixes made on numbered tropical cyclones with their corresponding JTWC best track positions is shown in Table

TABLE 2-2. POSITION CODE NUMBERS

PCN	METHOD OF CENTER DETERMINATION/GRIDDING
1	EYE/GEOGRAPHY
2	EYE/EPHEMERIS
3	WELL DEFINED CC/GEOGRAPHY
4	WELL DEFINED CC/EPHEMERIS
5	POORLY DEFINED CC/GEOGRAPHY
6	POORLY DEFINED CC/EPHEMERIS

CC=Circulation Center

TABLE 2-3. MEAN DEVIATIONS (NM) OF DMSF DERIVED TROPICAL CYCLONE POSITIONS FROM JTWC BEST TRACK POSITIONS. NUMBER OF CASES SHOWN IN PARENTHESIS.

PCN	WESTPAC 1974-1978 AVERAGE (ALL SITES)	WESTPAC 1979 (ALL SITES)	INDIAN OCEAN 1979 (ALL SITES)
1	13.3 (178)	14.4 (268)	13.5 ( 7)
2	18.5 ( 68)	17.9 ( 61)	23.1 ( 7)
3	21.2 (270)	18.6 (341)	23.4 (16)
4	25.6 (101)	20.5 ( 70)	18.0 ( 8)
5	37.1 (368)	37.8 (605)	34.1 (22)
6	47.2 (190)	43.3 (232)	42.2 (66)
1&2	14.8 (246)	15.0 (329)	18.3 (14)
3&4	22.0 (371)	18.9 (411)	21.6 (24)
5&6	40.6 (558)	39.4 (837)	40.2 (88)

2-3. Estimates of the storm's current and 24-hour forecast intensity are made once each day by applying the Dvorak technique (NOAA Technical Memorandum NESS 45 as revised) to daylight visual data. Satellite derived storm positions, intensity estimates, and forecasts constitute the satellite portion of the JTWC forecast data base.

The availability of satellite data varied during the year. At the start, the network had access to three DMSF spacecraft: F-1 (late-morning), F-2 (mid-morning), and F-3 (sunrise). In June, a fourth DMSF spacecraft, F-4, was launched into a late morning orbit. The network had access to these four spacecraft until mid-September when F-1 failed. Three months later, in early December, F-3 failed reducing the active DMSF fleet to only two spacecraft with similar mid- to late-morning coverages. The network was able to partially compensate for this loss by depending on AFGWC to provide fixes for the entire network based on its unique ability to process TIROS-N as a replacement for F-3. Therefore, the 1979 season ended with available satellite coverage at its lowest point for the entire year.

Besides the network provided fixes, JTWC also receives satellite-derived storm positions from several secondary sources. These include: U.S. Navy ships equipped for satellite direct readout; the National Environmental Satellite Service using NOAA and GOES data; and the Naval Polar Oceanography Center, Suitland, Maryland using stored DMSF and NOAA data. Fixes from these secondary sources are not included in the network statistics.

## 5. RADAR RECONNAISSANCE SUMMARY

Sixteen of the 28 significant tropical cyclones occurring over the western North Pacific during 1979 passed within range of land based radars with sufficient cloud pattern organization to be fixed. The hourly and oftentimes, half-hourly land radar fixes that were obtained and transmitted to JTWC totaled 1143.

The WMO radar code defines three categories of accuracy: good (within 10 km (5.4 nm)), fair (within 10-30 km (5.4-16.2 nm)) and poor (within 30-50 km (16.2-27 nm)).

This year, 1139 radar fixes were coded in this manner; 25% were good, 29% fair and 46% poor. Compared to the JTWC best track, the mean vector deviation for land radar sites was 15 nm (28 km).

Of the 16 tropical cyclones which were monitored with land radar, 11 were typhoons: Alice, Cecil, Ellis, Hope, Irving, Judy, Mac, Owen, Sarah, Tip and Vera. These 11 typhoons accounted for 89% of all radar fixes received for this season. Excellent support through timely and accurate radar fix positioning allowed JTWC to track and forecast tropical cyclone movement through even the most difficult and erratic tracks.

The 54 WRS made four radar center fixes from their WC-130 aircraft when actual penetration was restricted. One ship radar center fix was received on Typhoon Bess. No radar fixes were received on Indian Ocean tropical cyclones.

## 6. TROPICAL CYCLONE FIX DATA

A total of 3318 fixes on 28 northwest Pacific tropical cyclones and 166 fixes on 7 northern Indian Ocean tropical cyclones were received at JTWC. Table 2-4, Fix Platform Summary, delineates the number of fixes per platform for each individual tropical cyclone. Season totals and percentages are also indicated.

Annex B lists individual fixes sequentially for each tropical cyclone. Fix data is divided into four categories: Satellite, Aircraft, Radar and Synoptic. Those fixes labeled with an asterisk (\*) were determined to be unrepresentative of the surface center and were not used in determining the best tracks. Within each category, the first three columns are as follows:

**FIX NO.** - Sequential fix number

**TIME (Z)** - GMT time in day, hours and minutes

**FIX POSITION** - Latitude and longitude to the nearest tenth of a degree

Depending upon the category, the remainder of the format varies as follows:

TABLE 2-4. FIX SUMMARY FOR 1979

FIX SUMMARY

	<u>AIRCRAFT</u>	<u>DMSP</u>	<u>TIROS-N</u>	<u>GOES3</u>	<u>RADAR</u>	<u>SYNOPTIC</u>	<u>TOTAL</u>
<u>WESTERN PACIFIC</u>							
TY ALICE	43	80	-	5	42	-	170
TY BESS	17	47	-	-	1*	-	65
TY CECIL	29	87	-	-	51	-	167
TS DOT	7	71	-	-	12	3	93
TD 05	-	20	-	-	11	2	33
TY ELLIS	12	66	-	-	14	7	99
TS FAYE	14	48	-	-	-	5	67
TD 08	1	29	-	-	-	7	37
ST HOPE	22	78	-	-	44	1	145
TS GORDON	8	40	-	-	25	-	73
TD 11	6	33	-	-	-	2	41
TY IRVING	25	124	-	-	148**	-	297
ST JUDY	26	140	-	-	177	2	345
TD 14	3	23	-	-	-	2	28
TS KEN	5	41	-	-	73	-	119
TY LOLA	17	63	-	-	-	-	80
TY MAC	14	86	-	-	55***	-	155
TS NANCY	-	33	-	-	-	15	48
TY OMEN	34	87	-	-	312	8	441
TS PAMELA	5	9	-	-	-	-	14
TS ROGER	6	32	-	-	-	6	44
TY SARAH	13	112	-	-	5	4	134
ST TIP	59	99	-	-	109	-	267
ST VERA	14	54	-	-	60***	9	137
TS WAYNE	11	44	-	-	-	1	56
TD 26	2	11	-	-	-	1	14
TY ABBY	40	66	7	-	-	3	116
TS BEN	4	20	2	-	7	-	33
<b>TOTAL</b>	<b>437</b>	<b>1643</b>	<b>9</b>	<b>5</b>	<b>1146</b>	<b>78</b>	<b>3318</b>
<b>% OF TOTAL NO. OF FIXES</b>	<b>13.1</b>	<b>49.5</b>	<b>.3</b>	<b>.2</b>	<b>34.6</b>	<b>2.3</b>	<b>100</b>
		<u>DMSP</u>	<u>TIROS-N</u>			<u>SYNOPTIC</u>	<u>TOTAL</u>
<u>INDIAN OCEAN</u>							
TC 17-79		28	5			-	33
TC 18-79		16	4			5	25
TC 22-79		8	2			2	12
TC 23-79		30	6			1	37
TC 24-79		19	3			-	22
TC 25-79		17	-			-	17
TC 26-79		20	-			-	20
<b>TOTAL</b>		<b>138</b>	<b>20</b>			<b>8</b>	<b>166</b>
<b>% OF TOTAL NO. OF FIXES</b>		<b>83</b>	<b>13</b>			<b>4</b>	<b>100</b>
* SHIP RADAR FIX							
** INCLUDES TWO ACFT RADAR FIXES							
*** INCLUDES ONE ACFT RADAR FIX							

a. Satellite

(1) ACCRY - Position Code Number (PCN) (see Sec. 5) or Confidence (CONF) number (see table 2-5) is listed depending on method used to determine the fix position.

TABLE 2-5. CONFIDENCE (CONF) NUMBERS AS A FUNCTION OF DVORAK T NUMBER AND RADIUS OF 90% PROBABILITY AREA (NM).

TROPICAL CYCLONE INTENSITY	CONF (1)	CONF (2)	CONF (3)
T1.5	60	120	170
T2.0	60	120	170
T2.5	60	120	170
T3.0	50	100	150
T3.5	45	90	140
T4.0	45	90	140
T4.5	45	90	140
T5.0	40	90	130
T5.5	40	80	130
T6.0	40	80	130
T6.5	30	70	120
T7.0	30	70	120
T7.5	30	60	100
T8.0	30	60	100

(2) DVORAK CODE - Intensity evaluation and trend utilizing DMSP visual satellite data. (For specifics refer to NOAA TM; NESS-45)

FOR TROPICAL TODAY'S T-NUMBER CURRENT INTENSITY NUMBER INDICATION OF ONGOING CHANGE PLUS D PAST CHANGE AMOUNT OF PAST CHANGE HOURS SINCE PREVIOUS OBS.  
 T ( ) / ( ) MINUS / S ( ) / ( ) hrs  
 LEAVE W

EXAMPLE: T5/6 MINUS/W1.5/24hrs.

(3) SAT - Specific satellite used for fix position (DMSP 35, 36, 37 or 39, TIROS-N or Geostationary Operational Environmental Satellite (GOES, 135W)).

(4) COMMENTS - For explanation of abbreviations see Appendix.

(5) SITE - ICAO call sign of the specific satellite tracking station.

b. Aircraft

(1) FLT LVL - The constant pressure surface level, in mb, maintained during the penetration. 700 mb is the normal level flown in developed cyclones due to turbulence factors with low-level missions flown at 1500 ft.

(2) 700 MB HGT - Minimum height of the 700 mb pressure surface within the vortex recorded in meters.

(3) OBS MSLP - If the surface center can be visually detected (e.g., in the eye), the minimum sea level pressure is obtained by a dropsonde released above the surface vortex center. If the fix is made at the 1500-foot level, the sea level pressure is extrapolated from that level.

(4) MAX-SFC-WND - The maximum surface wind (knots) is an estimate made by the ARWO based on sea state. This observation is limited to the region of the flight path, and may not be representative of the entire cyclone. Availability of data is also dependent upon the absence of undercast conditions and the presence of adequate illumination. The positions of the maximum flight level wind and the maximum observed surface wind do not necessarily coincide.

(5) MAX-FLT-LVL-WND - Wind speed (knots) at flight level is measured by the AN/APN 147 doppler radar system aboard the WC-130 aircraft. Values entered in this category represent the maximum wind measured prior to obtaining a scheduled fix. This measurement may not represent the maximum flight level wind associated with the tropical cyclone because the aircraft only samples those portions of the tropical cyclone along the flight path. In many instances the flight path may be through the weak sector of the cyclone. In areas of heavy rainfall, the doppler radar may track energy reflected from precipitation rather than from the sea surface; thus preventing accurate wind speed measurement. In obvious cases, such erroneous wind data will not be reported. In addition, the doppler radar system on the WC-130 restricts wind measurements to drift angles less than or equal to 27 degrees if the wind is normal to the aircraft heading.

(6) ACCRY - Fix position accuracy. Both navigational (OMEGA and LORAN) and meteorological (by the ARWO) estimates are given in nautical miles.

(7) EYE SHAPE - Geometrical representation of the eye based on the aircraft radar presentation. Reported only if center is 50% or more surrounded by wall cloud.

(8) EYE DIAM/ORIENTATION - Diameter of the eye in nautical miles. In case of an elliptical eye, the lengths of the major and minor axes and the orientation of the major axis are respectively listed.

c. Radar

(1) RADAR - Specific type of platform utilized for fix (land radar site, aircraft or ship).

(2) ACCRY - Accuracy of fix position (good, fair or poor) as given in the WMO ground radar weather observation code (FM20-V).

(3) EYE SHAPE - Geometrical representation of the eye given in plain language (circular, elliptical, etc.).

(4) EYE DIAM - Diameter of eye given in nautical miles.

(5) RADOB CODE - Taken directly from WMO ground weather radar observation code FM20-V. First group specifies the vortex parameters, while the second group describes the movement of the vortex center.

(6) RADAR POSITION - Latitude and longitude of tracking station given in tenths of a degree.

(7) SITE - WMO station number of the specific tracking station.

d. Synoptic

(1) INTENSITY ESTIMATE - TDO's analysis of low-level synoptic data to determine a cyclone's maximum sustained surface wind (knots).

(2) NEAREST DATA - Accuracy of fix based on distance (nautical miles) from the fix position to the nearest synoptic report or to the average distance of reports in data sparse cases.



## CHAPTER III SUMMARY OF TROPICAL CYCLONES

### I. WESTERN NORTH PACIFIC TROPICAL CYCLONES

During 1979, the western North Pacific experienced a below normal year of tropical cyclone activity with a total of 28 cyclones (Table 3-1). By comparison, 1978 was a near normal year with 32 cyclones and 1977 was a near record low year with a total of 21 cyclones. Five significant tropical cyclones never developed beyond tropical depression (TD) stage, and nine developed into tropical storms (TS). Of the 14 cyclones that devel-

oped to typhoon (TY) stage, only 4 reached the 130 kt (67 m/sec) intensity necessary to be classified as a super typhoon (ST). This season, beginning with Typhoon Bess, tropical cyclones attaining tropical storm strength or greater were assigned names on an alternating male/female basis. This change was a result of the 1979 Tropical Cyclone Conference, and the list of names can be found in CINCPACINST 3140.1N CH-1. A similar but different series of cyclone names is used for eastern North Pacific and North Atlantic cyclones. Each tropical cyclone's

TABLE 3-1. WESTERN NORTH PACIFIC

#### 1979 SIGNIFICANT TROPICAL CYCLONES

CYCLONE	TYPE	NAME	PERIOD OF WARNING	CALENDAR DAYS OF WARNING	MAX SFC WIND	MIN OBS SLP	NUMBER OF WARNINGS	DISTANCE TRAVELLED
01	TY	ALICE	01 JAN-14 JAN	14	110	930	51	2597
02	TY	BESS	20 MAR-25 MAR	6	90	958	21	1804
03	TY	CECIL	11 APR-20 APR	10	80	965	40	2535
04	TS	DOT	10 MAY-16 MAY	7	40	984	24	2876
05	TD	TD-05	23 MAY-24 MAY	2	30	998	6	2170
06	TY	ELLIS	01 JUL-06 JUL	6	85	955	22	1612
07	TS	FAYE	01 JUL-06 JUL	6	40	998	20	1837
08	TD	TD-08	24 JUL-25 JUL	2	20	1004	5	1264
09	ST	HOPE	27 JUL-03 AUG	10	130	898	33	3928
10	TS	GORDON	26 JUL-29 JUL	4	60	980	13	1058
11	TD	TD-11	03 AUG-06 AUG	4	25	997	14	1088
12	TY	IRVING	09 AUG-18 AUG	10	90	954	38	2732
13	ST	JUDY	16 AUG-26 AUG	11	135	887	39	2502
14	TD	TD-14	18 AUG-20 AUG	3	20	1006	9	605
15	TS	KEN	01 SEP-04 SEP	5	60	985	13	1418
16	TY	LOLA	02 SEP-08 SEP	7	90	950	23	1298
17	TY	MAC	15 SEP-24 SEP	10	70	984	35	1831
18	TS	NANCY	19 SEP-22 SEP	4	45	993	14	528
19	TY	OMEN	22 SEP-01 OCT	10	110	918	37	2151
20	TS	PAMELA	25 SEP-26 SEP	3	45	1002	6	984
21	TS	ROGER	03 OCT-07 OCT	6	45	985	16	1920
22	TY	SARAH	04 OCT-15 OCT	12	110	929	43	1194
23	ST	TIP	05 OCT-19 OCT	16	165	870	60	3972
24	ST	VERA	02 NOV-07 NOV	6	140	915	23	1868
25	TS	WAYNE	08 NOV-13 NOV	6	50	990	22	1559
26	TD	TD-26	01 DEC-02 DEC	2	30	998	6	1070
27	TY	ABBY	01 DEC-14 DEC	14	110	951	52	4044
28	TS	BEN	21 DEC-23 DEC	3	60	990	10	2245
1979 TOTALS				149*			695	

\*OVERLAPPING DAYS INCLUDED ONLY ONCE IN SUM.

maximum surface wind (MAX SFC WND), in knots, and minimum observed sea-level pressure (MIN OBS SLP), in millibars, were obtained from best estimates of all available data. The distance travelled, in nautical miles, was calculated from the JTWC official best track (see Annex A).

Table 3-2 provides further information on the monthly distribution of tropical cyclones and statistics on Tropical Cyclone Formation Alerts and Warnings. Even though there were 4 fewer cyclones this season compared to last season, there were 18 more warning days.


TABLE 3-2.


1979 SIGNIFICANT TROPICAL CYCLONE STATISTICS

WESTERN NORTH PACIFIC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	TOTAL	(1959-78) AVERAGE
TROPICAL DEPRESSIONS	0	0	0	0	1	0	1	2	0	0	0	1	5	4.8
TROPICAL STORMS	0	0	0	0	1	0	2	0	4	1	1	1	10	10.0
TYPHOONS	1	0	1	1	0	0	2	2	2	2	1	1	13	18.0
ALL CYCLONES	1	0	1	1	2	0	5	4	6	3	2	3	28	32.8
(1959-78) AVERAGE	0.6	0.4	0.6	0.9	1.4	2.1	5.2	6.8	6.0	4.8	2.7	1.3	32.8	


FORMATION ALERTS 23 of the 27 (85%) Formation Alert Events developed into tropical cyclones.  
5 of the 28 (18%) tropical cyclones did not have a Formation Alert.


WARNINGS  
Number of warning days: 149  
Number of warning days with 2 cyclones: 38  
Number of warning days with 3 or more cyclones: 5

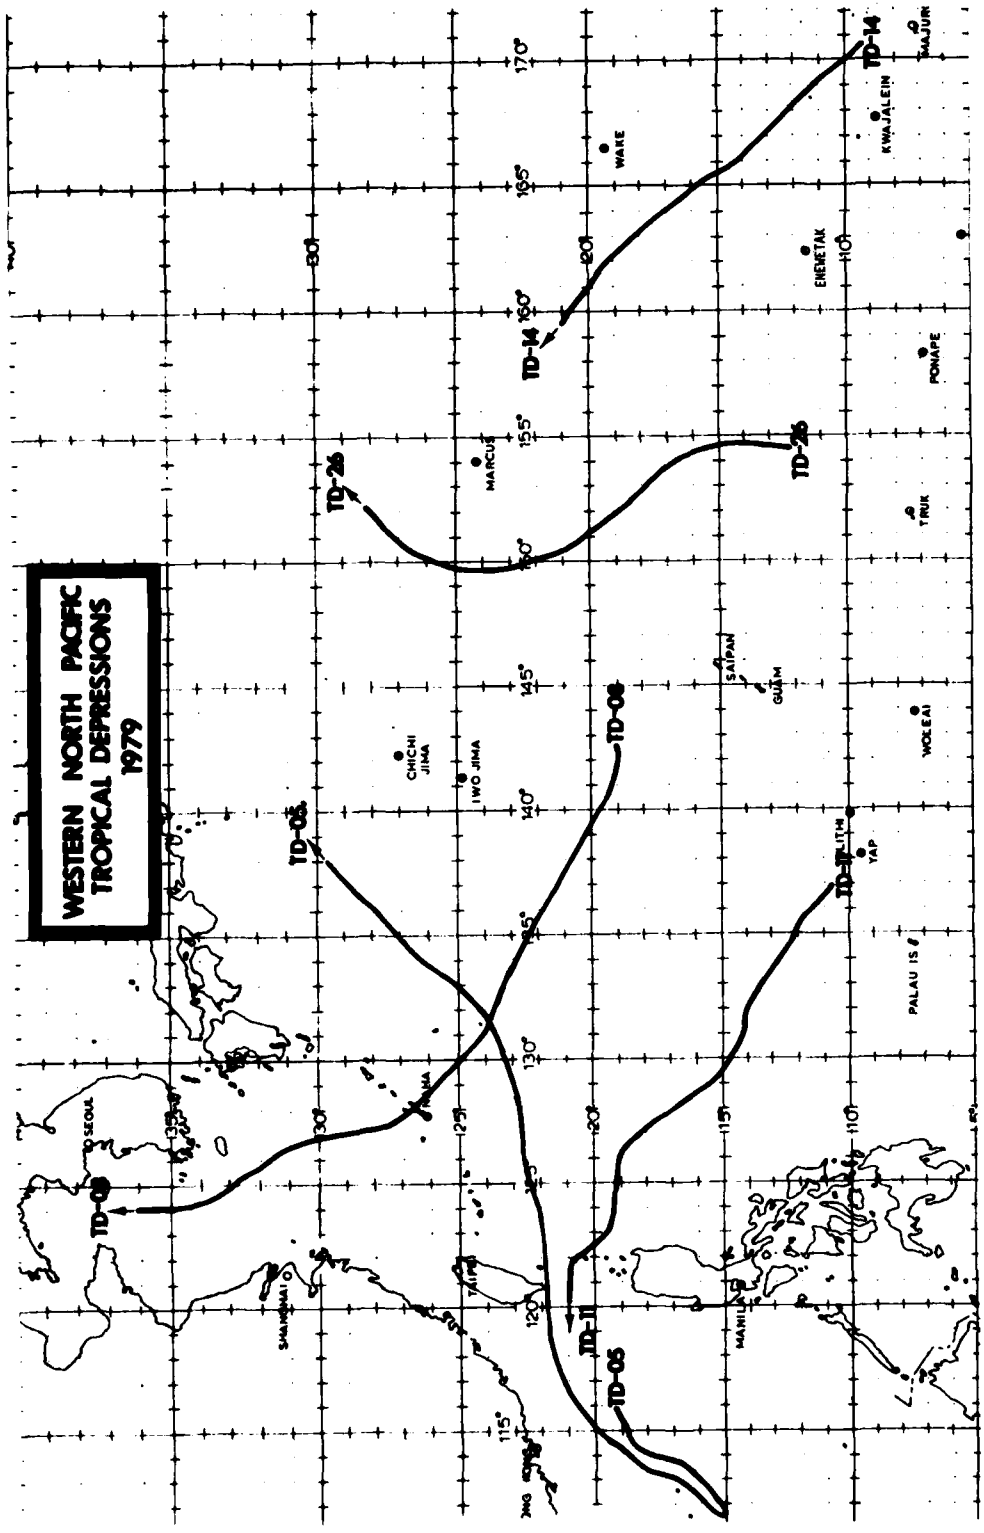

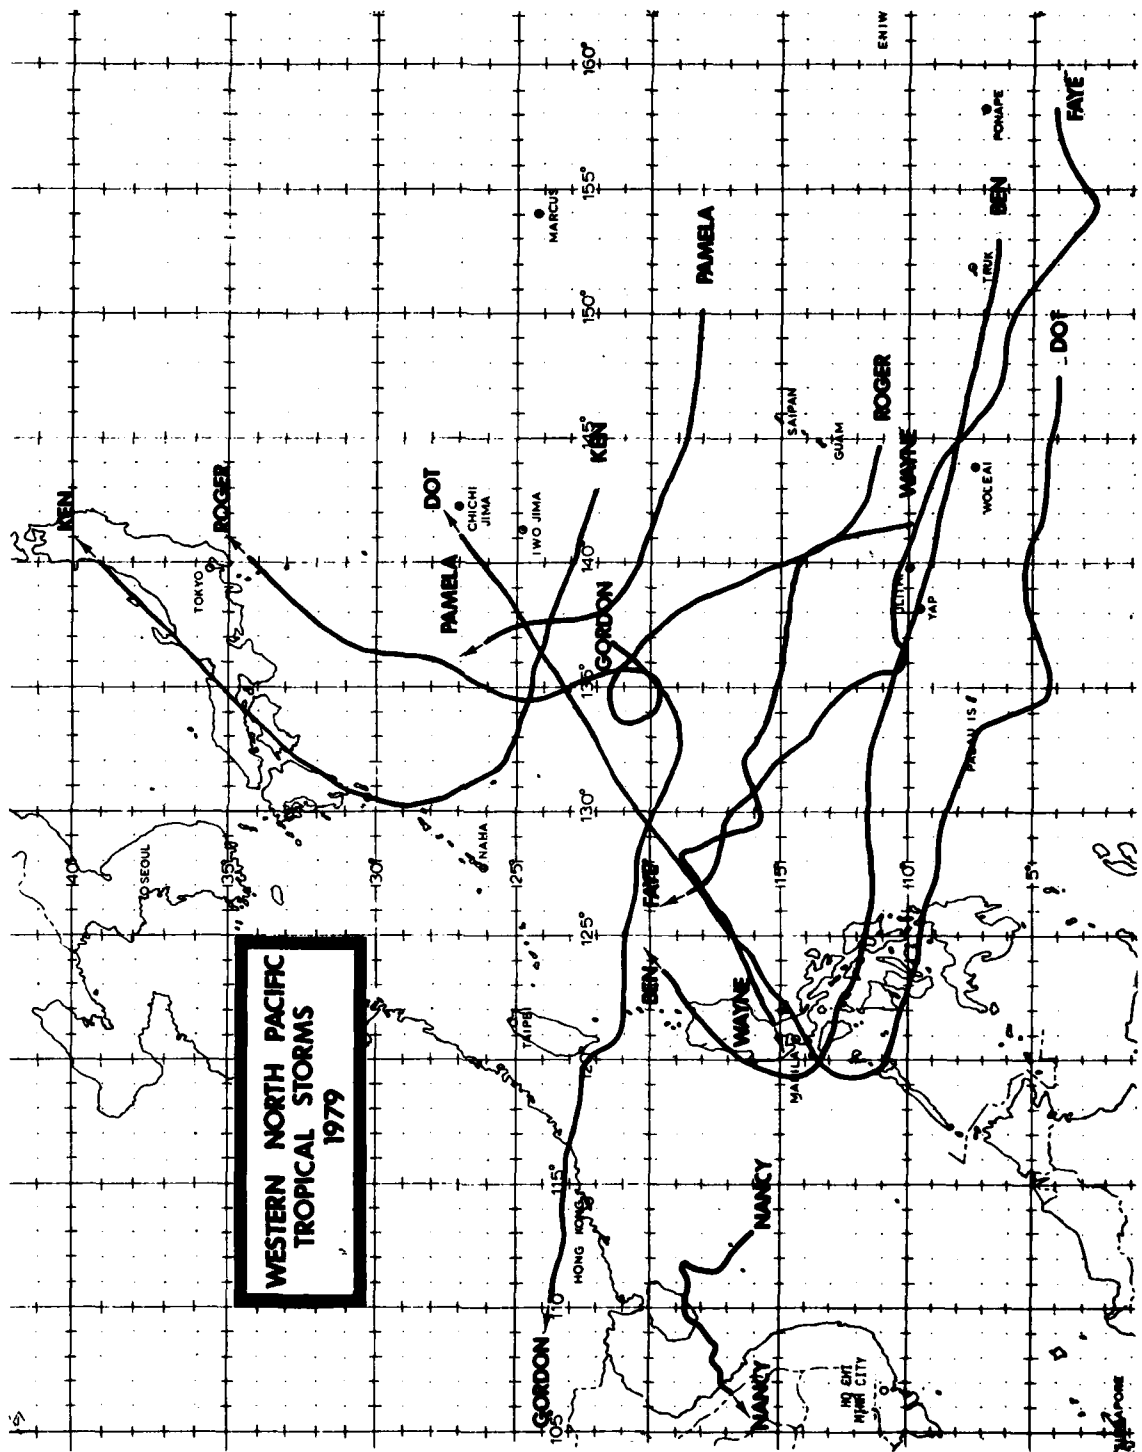


**WESTERN NORTH PACIFIC  
TROPICAL STORMS  
1979**

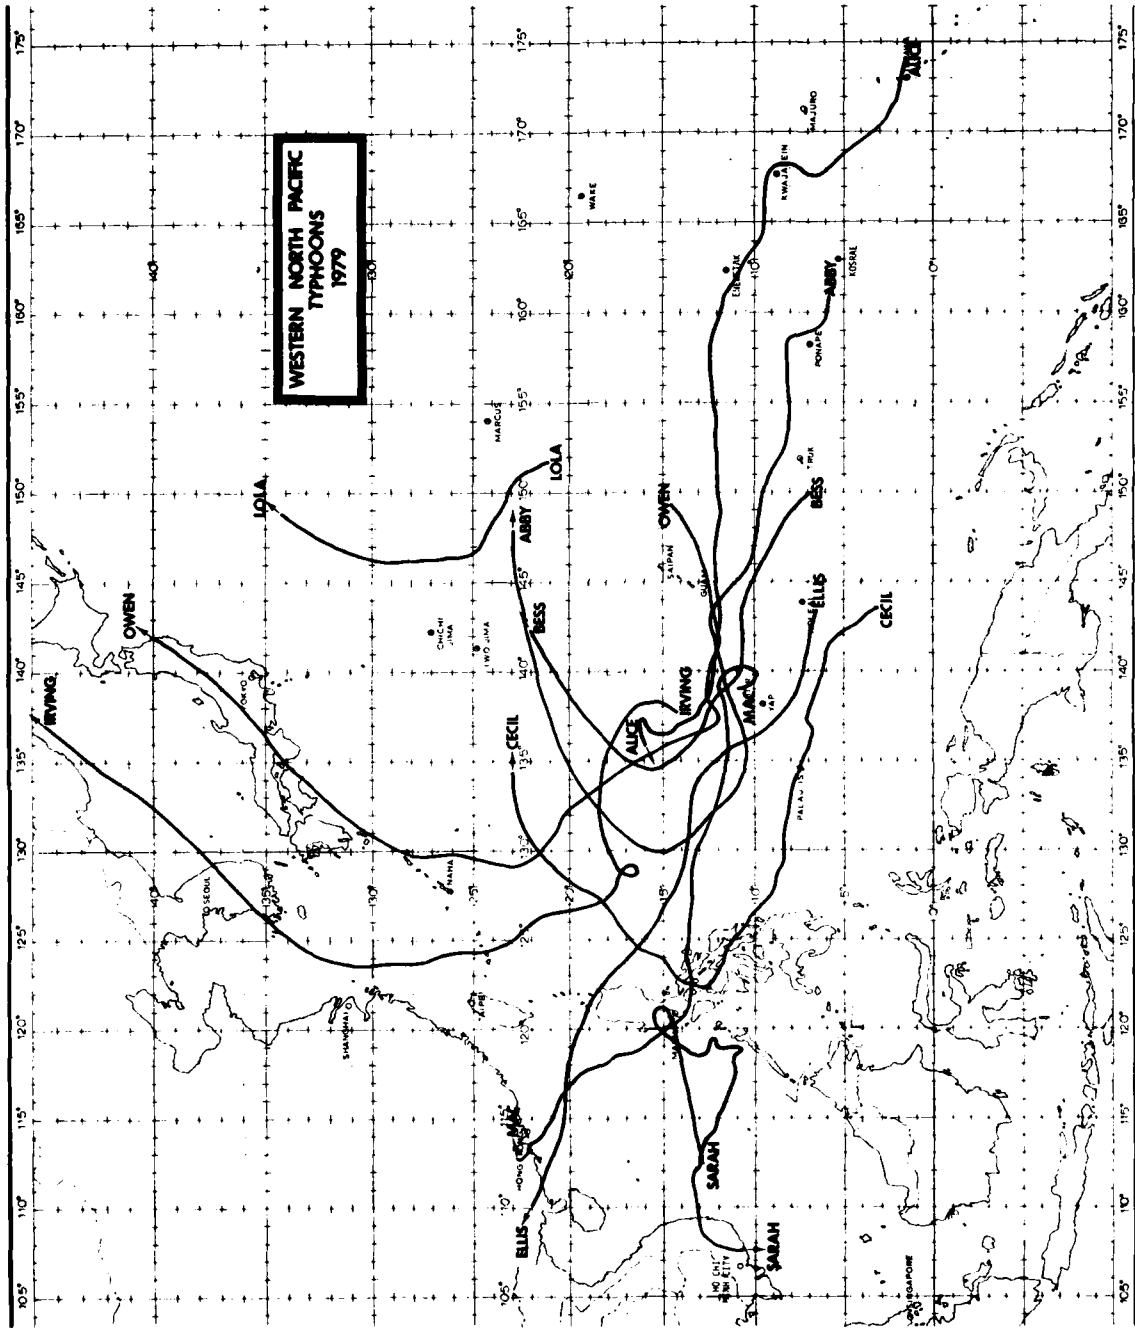

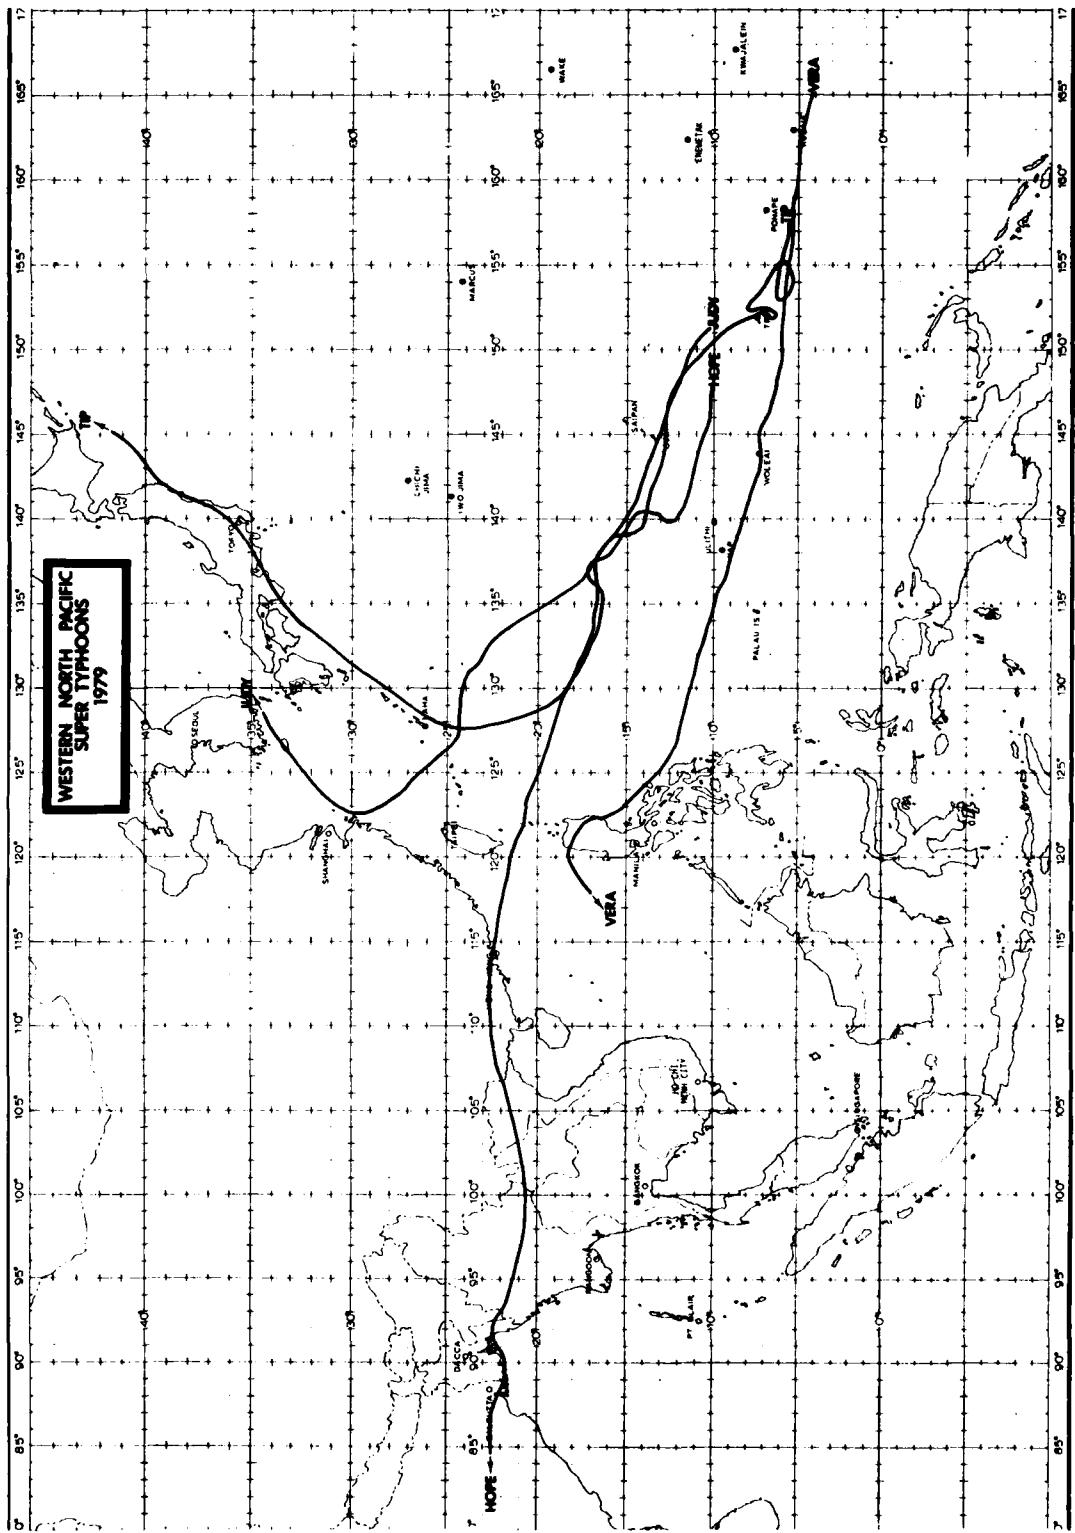

**WESTERN NORTH PACIFIC  
SUPER TYPHOONS  
1979**

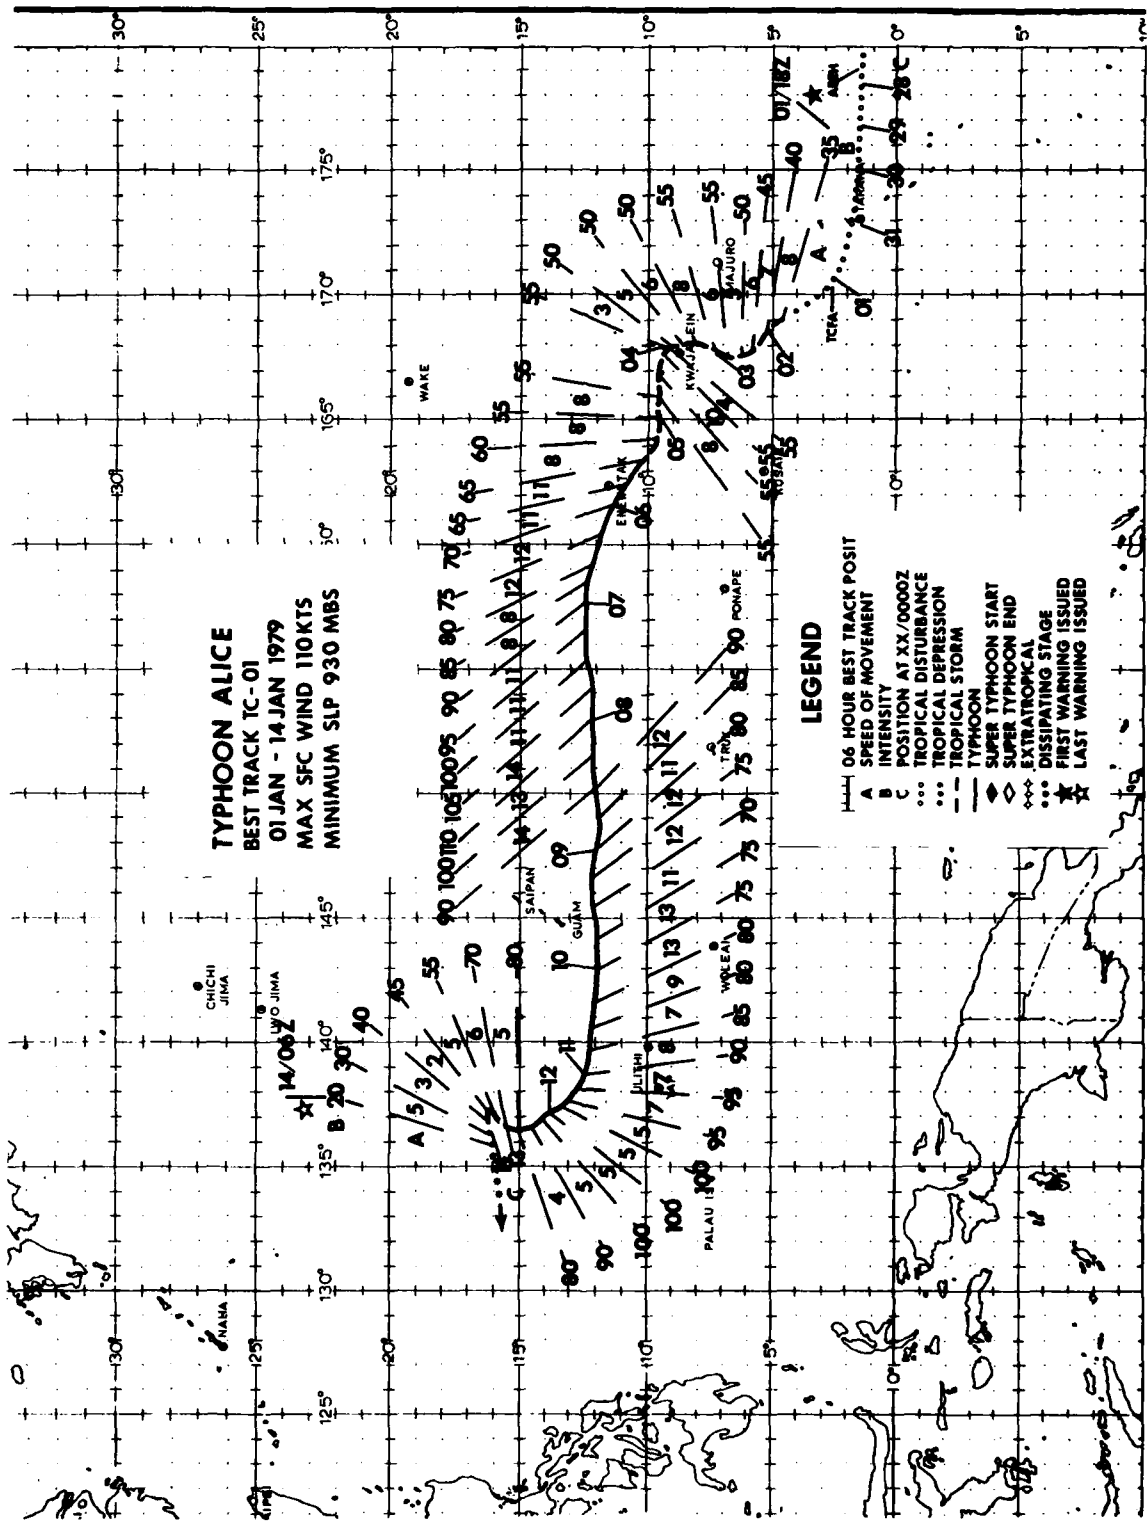

**TYPHOON ALICE**  
**BEST TRACK TC-01**  
**01 JAN - 14 JAN 1979**  
**MAX SFC WIND 110KTS**  
**MINIMUM SLP 930 MBS**

- LEGEND**
- 06 HOUR BEST TRACK POSIT
  - A SPEED OF MOVEMENT
  - B INTENSITY AT XX/0000Z
  - C TROPICAL DISTURBANCE
  - ... TROPICAL DEPRESSION
  - - - TROPICAL STORM
  - ◆ TYPHOON
  - ◇ SUPER TYPHOON START
  - ◇ SUPER TYPHOON END
  - ◇ EXTRATROPICAL
  - ... DISSIPATING STAGE
  - ★ FIRST WARNING ISSUED
  - ★ LAST WARNING ISSUED

TYPHOON ALICE (01)

Typhoon Alice, the first tropical cyclone of the 1979 season, was actually first sighted as a tropical disturbance on the 27th of December 1978. Being over the Gilbert Islands quite close to the equator, the potential for development was considered poor. A tropical cyclone formation alert was issued at 0300Z 1 January 1979 when satellite data showed the disturbance progressively increasing in organization. Soon after, the suspect area accelerated northwest to higher latitudes where development conditions were more favorable, and by 011800Z, tropical storm Alice was named. Post-analysis showed that the tropical depression stage began near 010000Z at low latitudes, contrary to the general rule that cyclones do not form close to the equator.

Although a climatologically unfavored period for western North Pacific tropical cyclone development, the fact that Alice did form supports the non-existence of a definitive "typhoon season" for WESTPAC; tropical cyclones are possible anytime of the year. The greatest forecasting difficulties and concomitant large forecast errors occurred during Alice's formative and dissipating stages. Double intensification also contributed to Alice's notoriety.

Early in her lifetime, Alice meandered through the Marshall Islands as if determined to visit each island. One week later, on 12 January 1979, President Carter declared the Marshall Islands a major disaster area.

A satellite reconnaissance fix at 022133Z showed Alice had moved northeastward when forecast to continue northwestward. Being a fix on a poorly defined satellite image (PCN 6), it was not taken verbatim; northwest movement continued to be forecast. An aircraft reconnaissance fix at 030053Z confirmed the earlier satellite fix as did a follow-on 030310Z aircraft fix. Post-analysis revealed that a mid-latitude, short-wave trough passed north of Alice during this time period. The trough extended deep enough into the tropics to weaken the mid-tropospheric ridge. This weakness permitted a southward intrusion of mid-latitude westerlies into Alice's vicinity, temporarily steering her northeastward. As the short-wave trough continued eastward, the subtropical ridge quickly reestablished itself north of Alice producing strong easterly steering flow, temporarily accelerating her from 4 to 10 kt (8 to 19 km/hr) toward the northwest when continued northeast movement was forecast. During this time, decision makers on Enewetak (also within the Marshall Islands), noting the low forecast confidence stated on prognostic reasoning messages, kept a condition of readiness which paid off.

From the 6th to the 11th, Alice traveled due west. On the 8th, Alice attained 110 kt (57m/sec) intensity and simultaneously accelerated to a speed of 14 kt (26 km/hr) (the fastest observed along track), whereupon she began weakening slowly.

During the 9th, Alice began an unexpected northward movement trend and showed further weakening. Post-analysis of low-level synop-

tic data and satellite imagery (Fig. 3-01-1) indicated that an approaching frontal shear-line was the responsible agent. The shear-line began interacting with Alice while she was southeast of Guam. As Alice neared Guam, radar data from Andersen AFB and aircraft data indicated that Alice's previously well-defined wall cloud became larger and somewhat less organized. Cooler, drier air north of the shear-line was likely responsible for this weakening trend. A weakness in the subtropical ridge vertically above the shear-line apparently allowed for Alice's northward deviation.

The most unusual portion of Alice's track occurred during the final 3 days of Alice's life. Based on interpretation of PE progs, the subtropical ridge was expected to persist and maintain Alice in the easterlies. As a result, the JTWC forecasts (supported by the majority of objective forecast aids) indicated westward movement until 120000Z, 18 hours after Alice had actually begun tracking northwestward. The subtropical ridge weakened in response to a long-wave trough deepening over eastern Asia. Easterly steering currents in Alice's vicinity diminished and veered in direction, permitting a more northward track. Alice reached a secondary intensity maximum of 100 kt (51 m/sec) during this period due to her slowing in speed of movement, the increased absolute vorticity of higher latitudes and good outflow aloft.

By the 13th, Alice turned northeastward and began weakening rapidly. The subtropical ridge was now completely severed and upper-air westerlies were shearing Alice significantly in the vertical. Close proximity of yet another frontal shear-line contributed to further weakening. The biggest surprise, however, came when Alice's low-level circulation turned almost 180 degrees back toward the west at about 131200Z under the influence of strong, low-level easterlies and weakened rapidly in the strong, vertical-shear environment. As a result of vertical decoupling, Alice as a shallow depression, dissipated during the following 12-hour period.


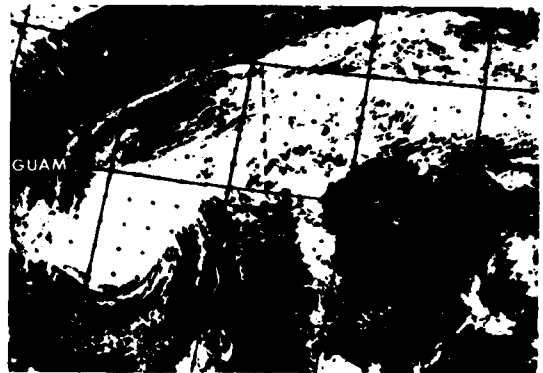


FIGURE 3-01-1. Typhoon Alice merging with the trailing end of a frontal shear-line, 9 January 1979, 0054Z. (DMSP imagery)



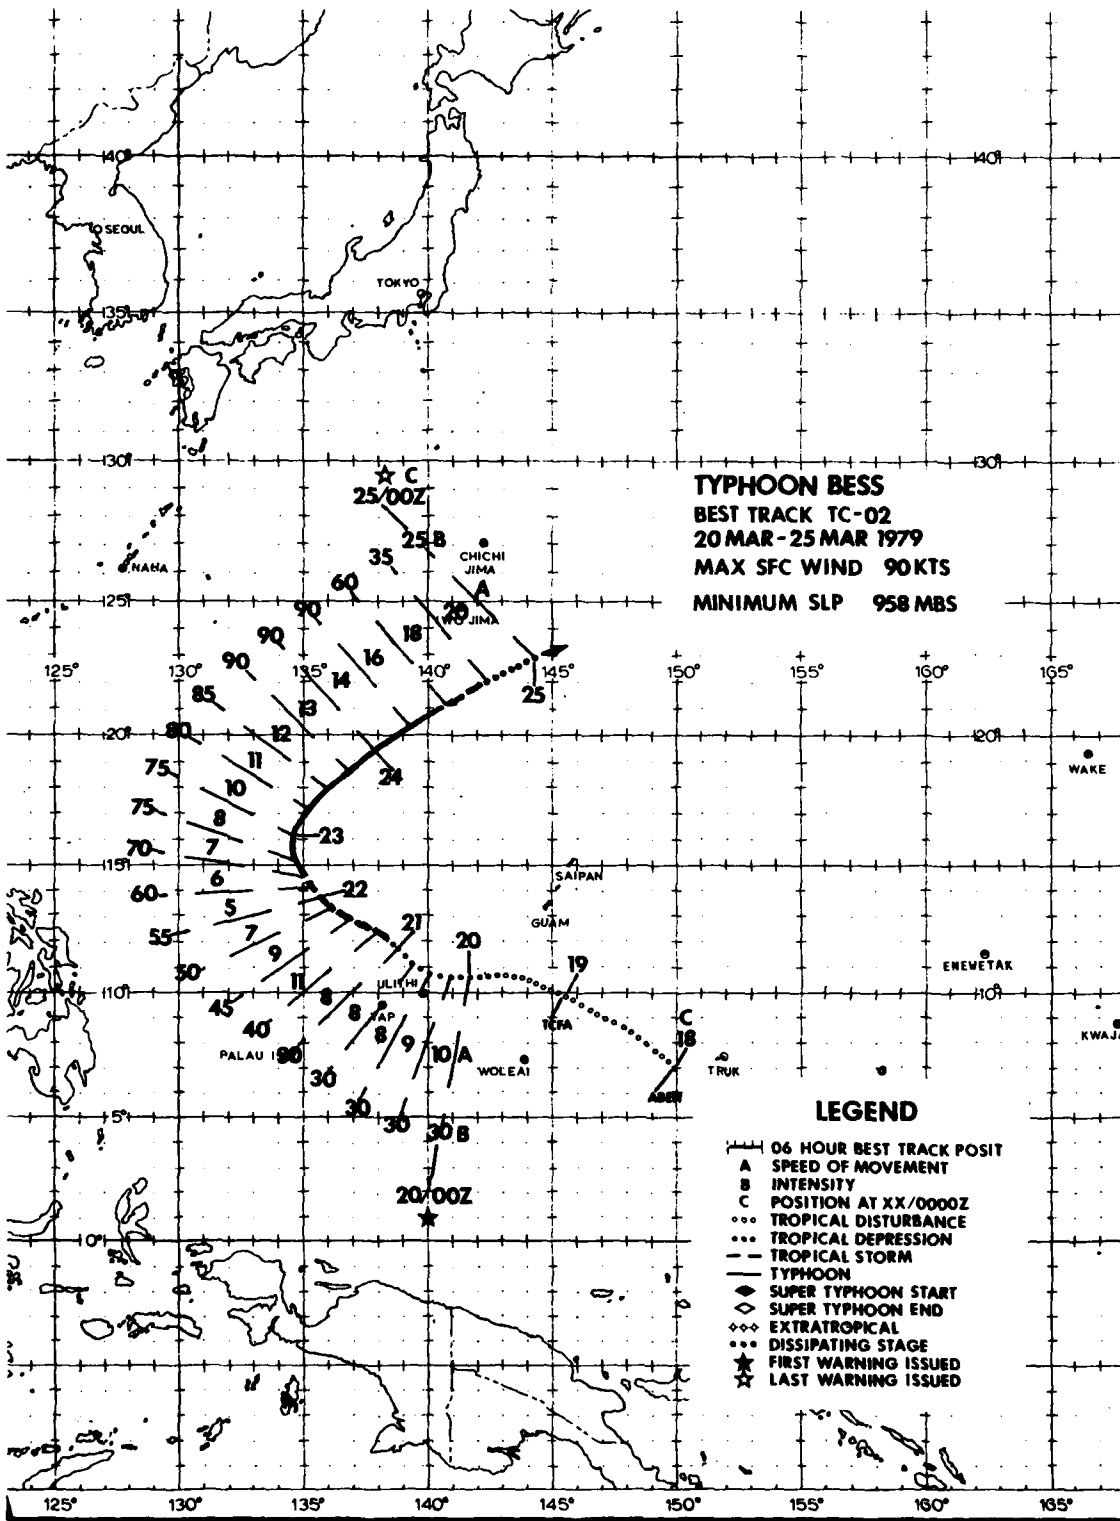

Since 1959, only three typhoons have developed over the Western Pacific in March. Of these three, only Bess developed in the last decade with Typhoon Tess developing in 1961 and Typhoon Sally in 1967. Tropical cyclone development in March is usually inhibited by a southward adjustment in the subtropical ridge axis. Although not recognized in advance, Typhoon Bess' development paralleled Typhoon Tess, which developed in the eastern Caroline Islands and reached tropical depression strength near Woleai Atoll. Continuing northwestward between Guam and Yap, both recurved northward near 135E (Fig. 3-02-1) before dissipating north of 20N under the influence of a strong vertical shear.



FIGURE 3-02-1. Typhoon Bess tracking northwestward between Guam and Yap at 8 kt (15 km/hr), 21 March 1979, 0103Z. Satellite imagery captured increased organization in the convective banding just prior to Bess reaching tropical storm intensity. (DMSP imagery)

Synoptic data at 160000Z suggested the existence of a weak surface circulation near 3.0N 152.5E at the base of a wave in the easterly flow. Satellite imagery at 160119Z indicated that an ill-defined area of convection existed near the surface circulation. By 161109Z, however, increased upper-level organization suggested development of a weak 200 mb anticyclone (Fig. 3-02-2). Increased curvature in the mid-level convective cloud pattern hinted at the possibility of tropical cyclone formation. As often observed in weak

developing systems, 162207Z satellite imagery showed a significant decrease in the mid- to upper-level convective organization, while the synoptic analysis continued to support a weak circulation southeast of Guam. Continuing to pulsate, the suspect area presented a curious, but intensified upper-level convective pattern on 172151Z and 172333Z satellite imagery. Synoptic analysis at 180000Z indicated that, in addition to the circulation near 3.5N 147.5E, a secondary low had developed on the slow moving wave axis near 7.1N 150.0E and that the earlier ill-defined convection had been associated with these two circulations. As this secondary low tracked northward up the wave axis, increased cyclon-



FIGURE 3-02-2. Infrared imagery of very early development stage of Bess, 16 March 1979, 1109Z. Streamline pattern indicates an upper-level anticyclone. A surface circulation had not yet developed. (DMSP imagery)

ic shear between strong easterly flow north of the wave and weak equatorial westerlies south of the wave caused the northern circulation to become the dominant center as the initial low weakened. Simultaneously, the upper-level anticyclone intensified, producing an excellent outflow signature on 182315Z satellite imagery (Fig. 3-02-3). Although a formation alert was issued based on 182315Z satellite imagery, continued rapid development did not occur as expected. Aircraft data at 200259Z found strong enhanced easterly flow of 20-30 kt (10-15 m/sec) to the northeast, but only weak cyclonic flow to the south and east. Aircraft reports finally confirmed tropical storm strength early on the 21st (Fig. 3-02-4), five days after Bess was initially observed.

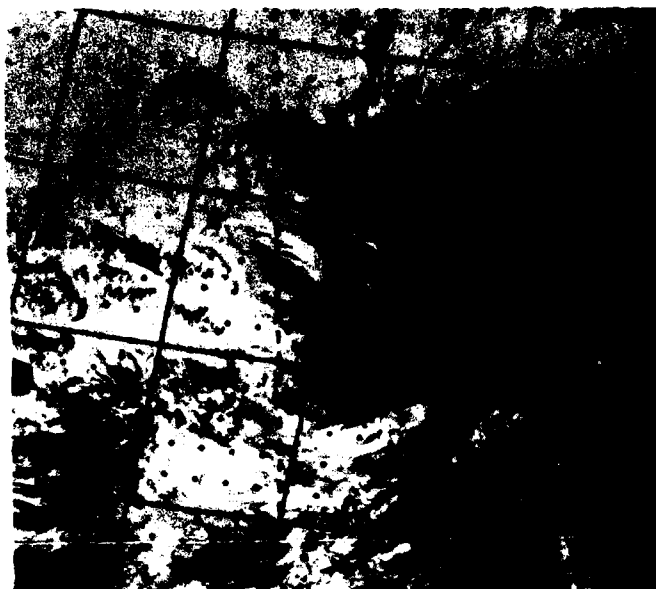


FIGURE 3-02-3. Infrared imagery of Typhoon Bess developing under good upper-level outflow which is visible from the southeast through the northwest, 18 March 1979, 2315Z. (DMSP imagery)

Sea Surface Temperature (SST) plays a vital role in the development and maintenance of tropical cyclones. A study by Charles P. Guard (1979) indicates that tropical cyclones which move over water cooler than 26C are less likely to intensify due to a reduction in latent heat. The study further states that tropical cyclones which develop prior to June intensify up to 10 kt (5 m/sec) after recurvature. This intensification, if experienced, will occur within the 12-24 hour period following recurvature. Typhoon Bess followed this recurvature pattern. The axis of recurvature was crossed at 230000Z. Slow intensification occurred over the next 18 hours with Bess reaching her maximum intensity of 90 kt (46 m/sec) at 231800Z. Bess maintained 90 kt (46 m/sec) for 18 hours and then rapidly weakened, dissipating by 250000Z. SST analyses during 24-27 March (Fig. 3-02-5) indicate that the area in which Bess weakened from 90-60 kt (46-31 m/sec) in a six-hour period corresponds closely to the location of water cooler than 26C. The reduction of latent heat input, coupled with increased vertical shear produced by strong westerlies aloft, literally sheared Bess apart during the final 12-18 hours.



FIGURE 3-02-4. Typhoon Bess just prior to reaching her maximum intensity of 90 kt (46 m/sec), 23 March 1979, 0235Z. Bess displays a large elliptical eye with strong radial cirrus outflow in all directions. (DMSP imagery)


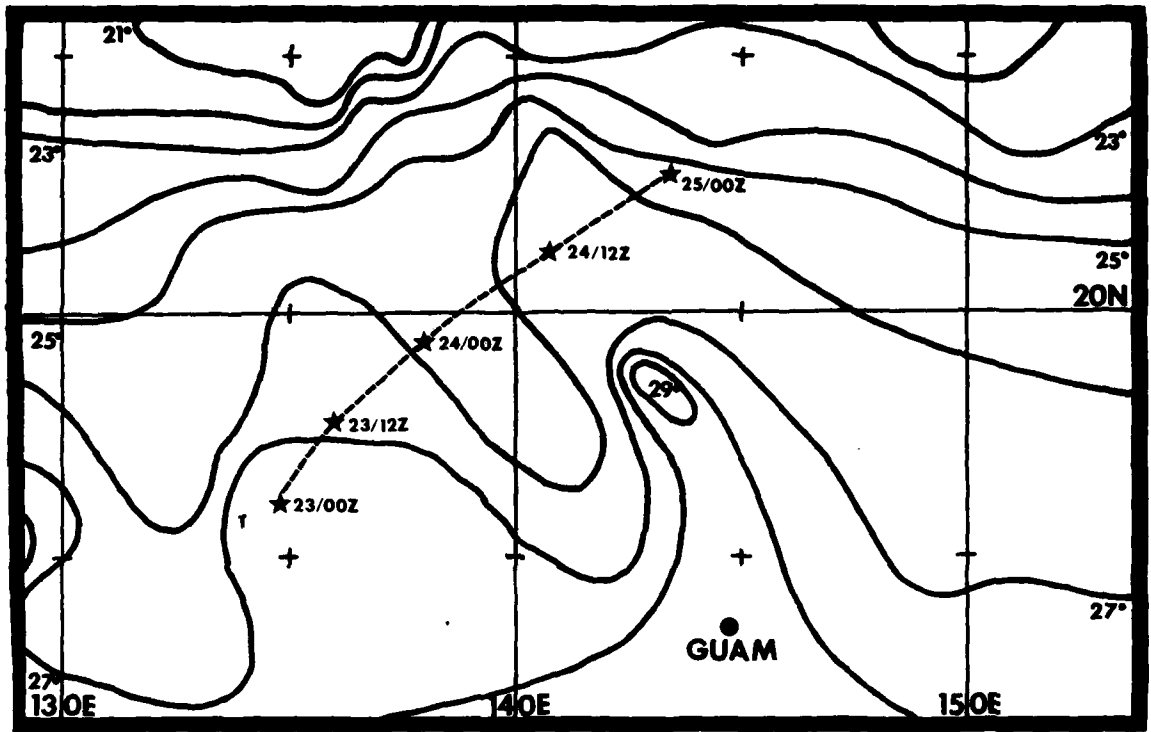


FIGURE 3-02-5. Composite of sea surface temperature analyses from 24-27 March 1979. Northeastward track of Typhoon Bess during dissipation stage is indicated by a dashed line with 12-hour positions.

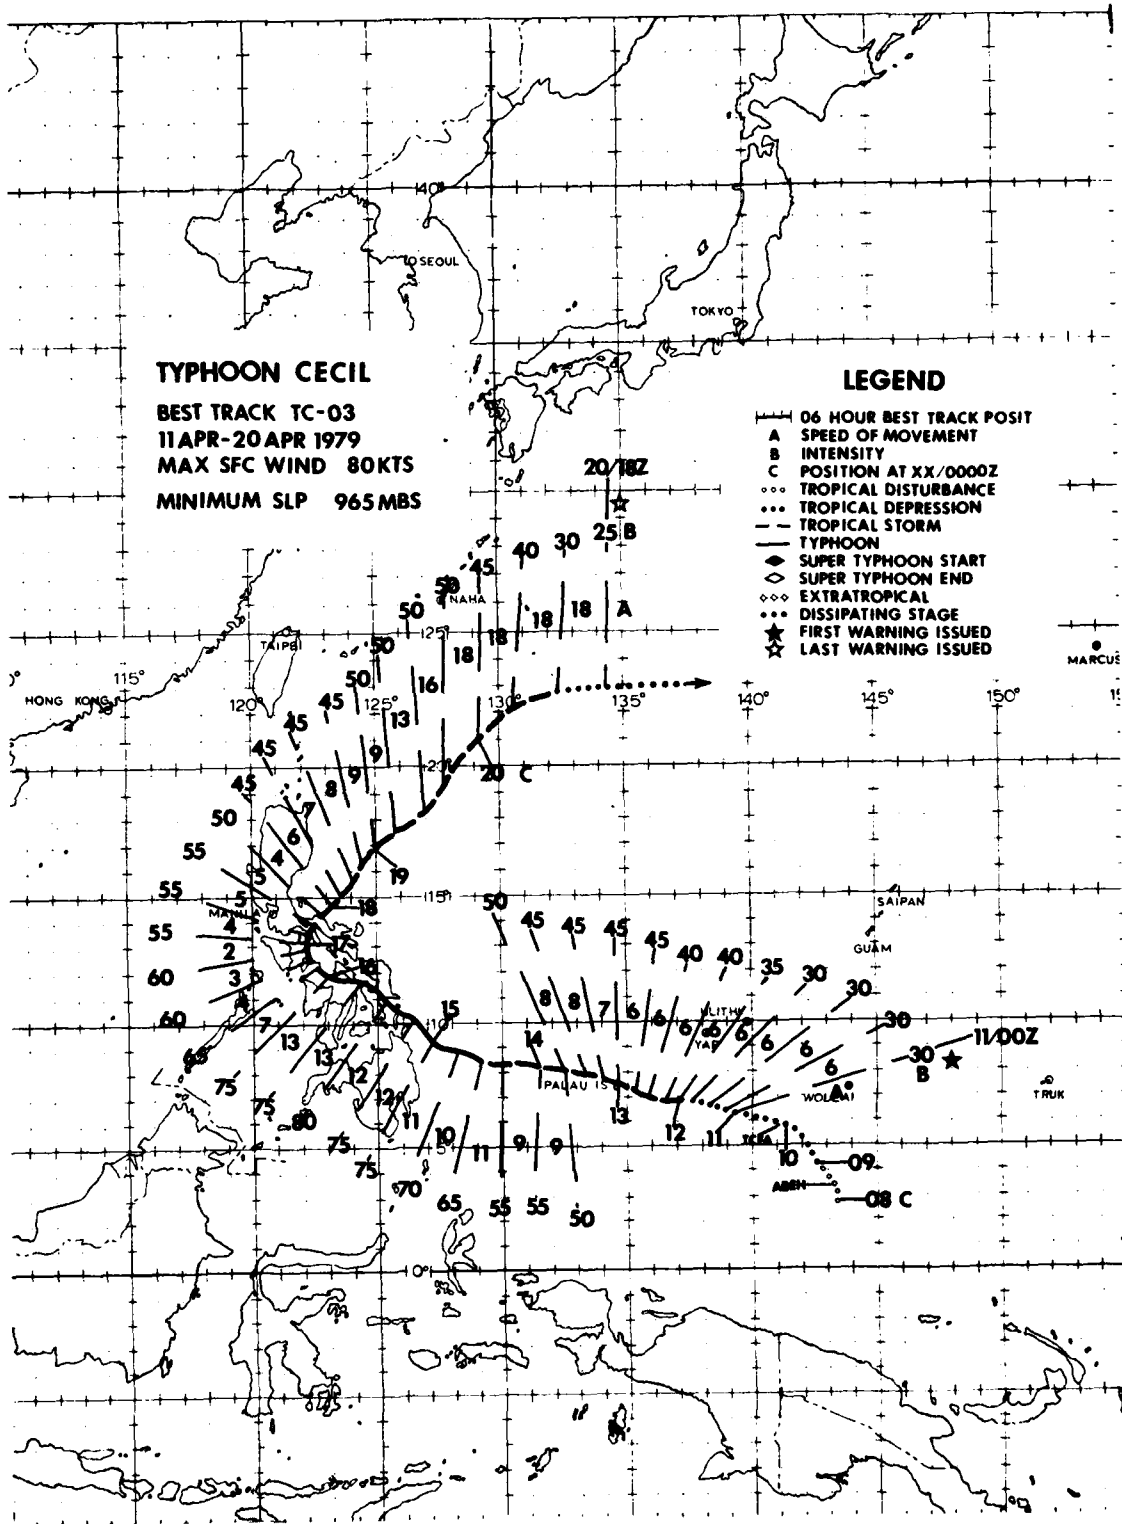

**TYPHOON CECIL**

**BEST TRACK TC-03**  
**11 APR-20 APR 1979**  
**MAX SFC WIND 80KTS**  
**MINIMUM SLP 965 MBS**

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- ... TROPICAL DISTURBANCE
- ... TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◆ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ◇◇◇ EXTRATROPICAL
- ... DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ☆ LAST WARNING ISSUED

TYPHOON CECIL (03)

Typhoon Cecil, the first tropical cyclone of 1979 in the Northwest Pacific given a male name, generated in mid-April from an easterly wave over the Philippine Sea. Cecil was forecast very well while on a climatological west-northwest track toward the central Philippines. Overall, post-analysis statistics showed that mean forecast errors were better than long-term averages. Nevertheless, JTWC warnings failed to forecast the crucial recurvature point in Cecil's track. Was there sufficient evidence to forecast this recurvature 24-48 hours in advance?

Post-analysis showed that recurvature occurred 36 hours after the 151200Z best track position. Satellite imagery (Fig. 3-03-1) located Cecil just south of Samar. At this time, the 500 mb subtropical ridge axis was at 17N with a small high pressure cell located over Northern Luzon. The 500 mb 36-hour PE prog maintained the ridge. Steering techniques based on this synoptic situation indicated westward movement for 72 hours. Analog techniques indicated west-northwestward movement. As a matter of fact, no objective forecast technique indicated recurvature prior to entrance into the South China Sea. The climatological average location of the 500 mb ridge axis is along 15N for April over the Philippines and the climatological recurvature point is 15-17N. Both

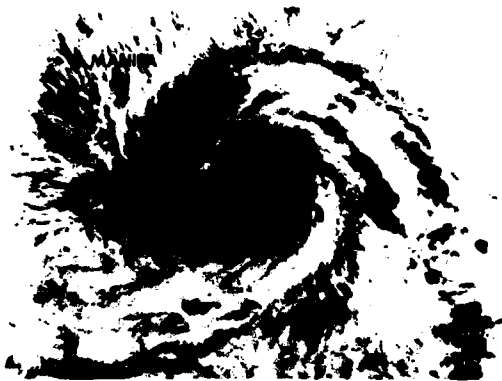



Figure 3-03-1. Infrared imagery of Typhoon Cecil 36 hours prior to recurvature with maximum sustained winds of 80 kt (41 m/sec), 15 April 1979, 1225Z. (DMSP imagery)

synoptic and climatological data indicated a west-northwestward track over the Philippines with recurvature late in the forecast period in the South China Sea as Cecil tracked to the vicinity of 15N. Post-analysis, however, revealed that the ridge axis east of the Philippines abruptly shifted south between 161200Z and 170000Z with westerly winds intruding far to the south over the South China Sea. This pattern shift caused Cecil to recurve much earlier than anticipated. Within 48 hours, Cecil was well east of Luzon (Fig. 3-03-2). The ridge axis shift was the vital piece of information not present in any of the available prognostic tools. Thus, it appears even in post-analysis that forecasting of Cecil's recurvature 36 hours in advance was beyond state-of-the-art capabilities.



FIGURE 3-03-2. Cecil after recurvature with maximum sustained winds of 50 kt (26 m/sec), 19 April 1979, 0014Z. (DMSP imagery)

**TROPICAL  
STORM DOT  
BEST TRACK TC-04  
10 MAY-16 MAY 1979  
MAX SFC WIND 40 KTS  
MINIMUM SLP 984 MBS**

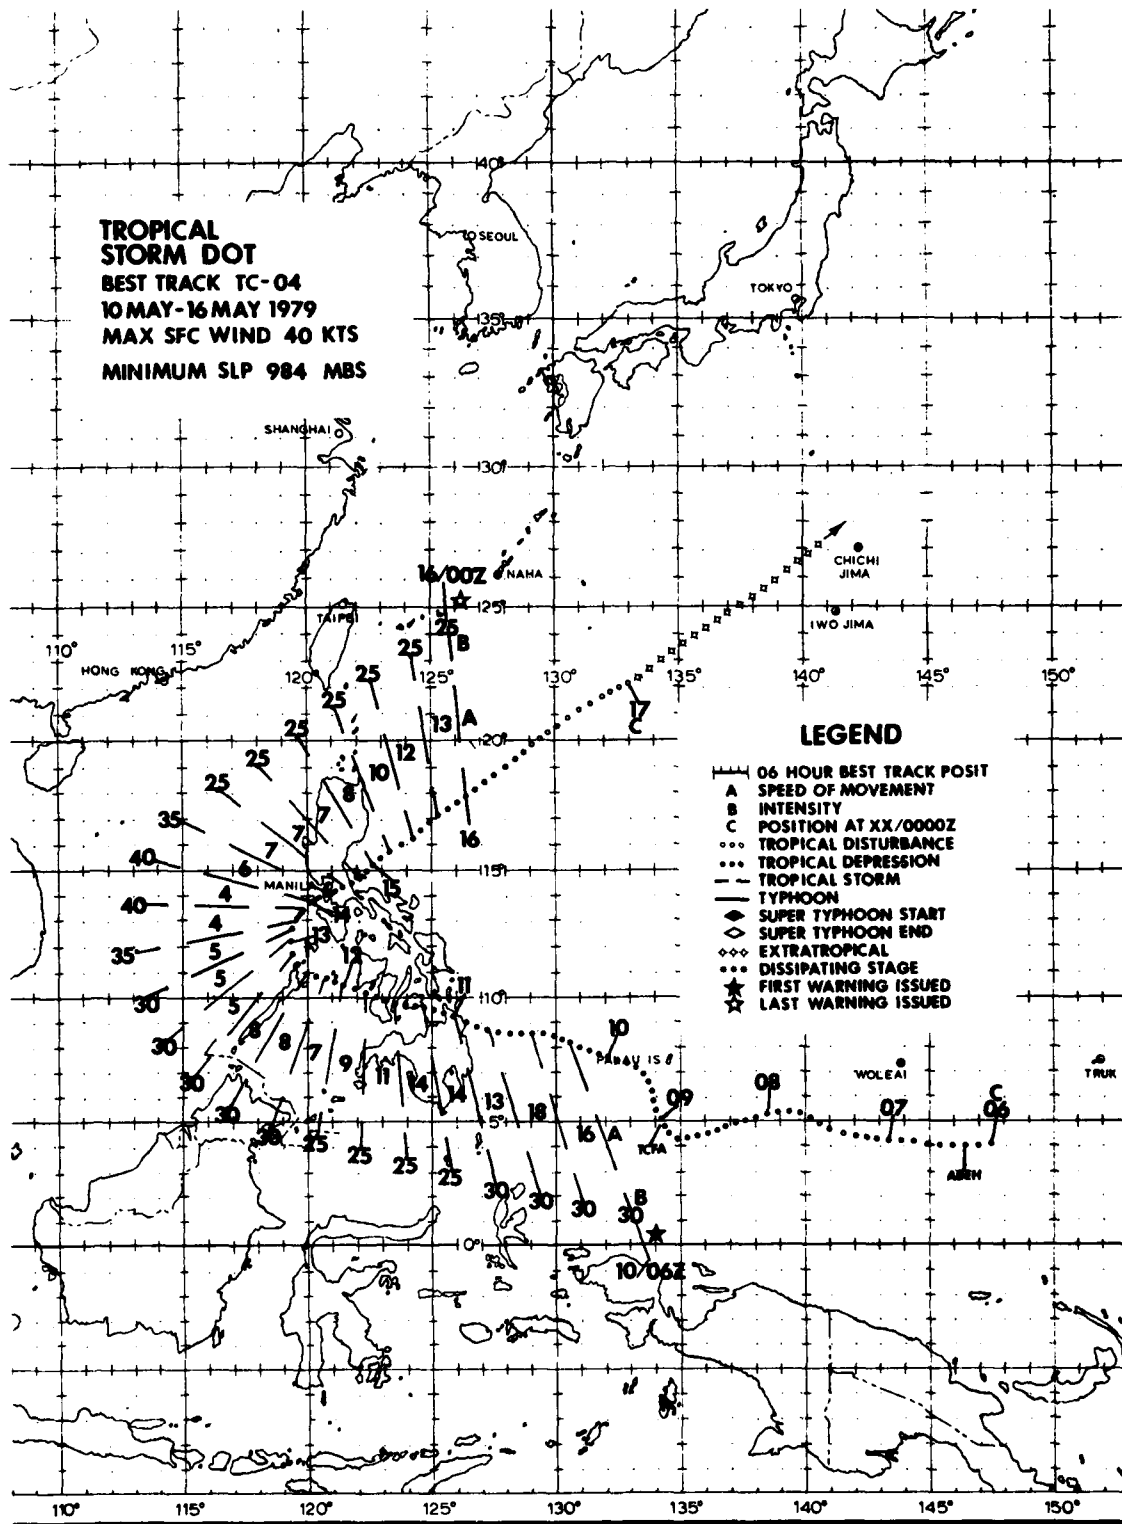

TROPICAL STORM DOT (04)

Tropical Storm Dot did not reach tropical storm strength prior to landfall on the Philippine Islands (Fig. 3-04-1). Once Dot crossed the islands, tropical storm strength was attained lasting, however, less than 24 hours (Fig. 3-04-2). Dot's development was cut short by the eventual frictional effects of Luzon and increasing vertical wind shear aloft.

TS Dot slowly formed in an area of broad, low-level easterlies, high surface pressures, and strong upper-level shear. The conditions for significant tropical cyclone development were poor while the system existed east of the Philippine Islands. After crossing the Philippines, however, Dot reached tropical storm strength while over the South China Sea.


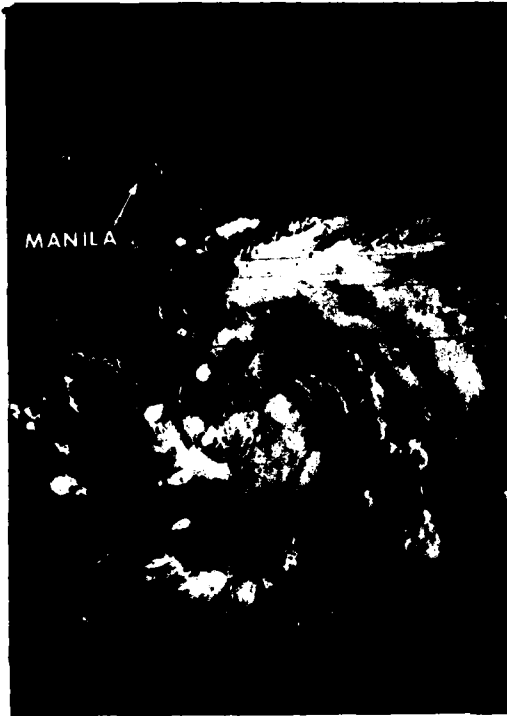


FIGURE 3-04-1. Tropical Storm Dot at 30 kt (15 m/sec) intensity while over northern Mindanao, 11 May 1979, 0029Z. (DMSP imagery)



FIGURE 3-04-2. Tropical Storm Dot while recurving toward Manila, 12 May 1979, 2353Z. (DMSP imagery)



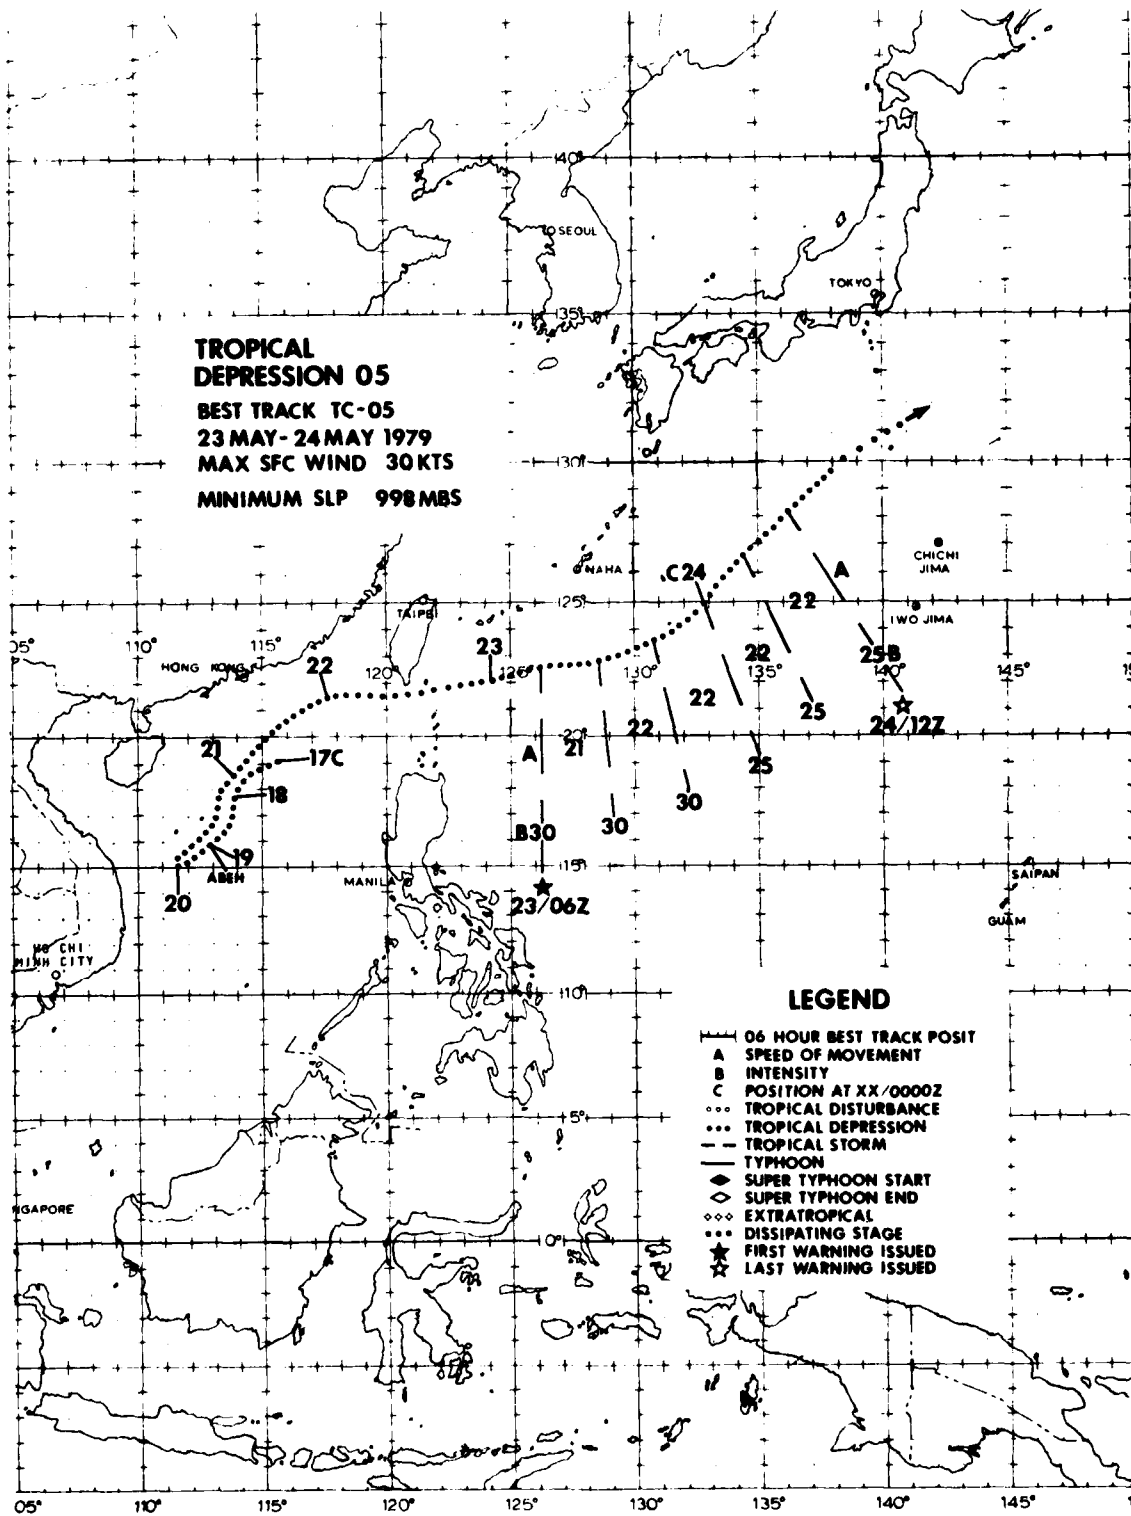

MONSOON/TROPICAL DEPRESSION (05)

Early season disturbances in the South China Sea, as discussed by Ramage (1971), may develop as a result of active monsoon troughs which extend eastward across Southeast Asia into the South China Sea (SCS). During late May, increased convergence in the enhanced southwest monsoon flow produced a significant increase in convection across the SCS, and several weak surface circulations were noted along the monsoon trough between Hainan Island and northern Luzon. Surface/gradient level synoptic analysis at 170000Z confirmed the existence of an elongated pressure trough with several 1005 mb centers. The main circulation, located northeast of the Paracel Islands, was actually north of the main convective area which covered most of the SCS south of the trough. Characteristics of SCS monsoon depressions include: strong enhanced southwesterly flow with light winds near the depression center; large areas of convection associated with convergence in the southwesterly flow with little curvature in towards the center; a relatively flat surface pressure regime of large areal extent; and, a mid-tropospheric cyclonic circulation over the area (Ramage, 1971). These conditions were observed in this area.

Initially, TD 05 drifted southwestward east of the Paracel Islands. By 200000Z a slow, eastward-tracking 500 mb short-wave over central China caused TD 05 to accelerate northeastward. As TD 05 accelerated, increased cyclonic shear at the surface southeast of Taiwan caused the system to transition from a monsoon depression to a tropical depression with a small anticyclonic outflow center evident aloft. (Many SCS monsoon depressions never make this transition, usually dissipating after 3-4 days.) Totally divorced from the monsoon trough, TD 05 tracked eastward through the Bashi Channel and then along the remnants of a weak frontal boundary. TD 05 was not forecast to intensify significantly, but it merged with an extratropical frontal boundary near 22.0N 124.8E and produced an improved satellite signature at 230018Z (Fig. 3-05-1) which included a banding-type eye. (Banding-type eyes are usually characteristic of more intense tropical cyclones.) Synoptic analyses during the life of TD 05 never indicated an intensity above 30 kt (15 m/sec). The lowest pressure recorded was 998 mb measured by a ship close to the circulation center. This pressure equates to approximately 32 kt (17 m/sec) (Atkinson and Holliday, 1975).


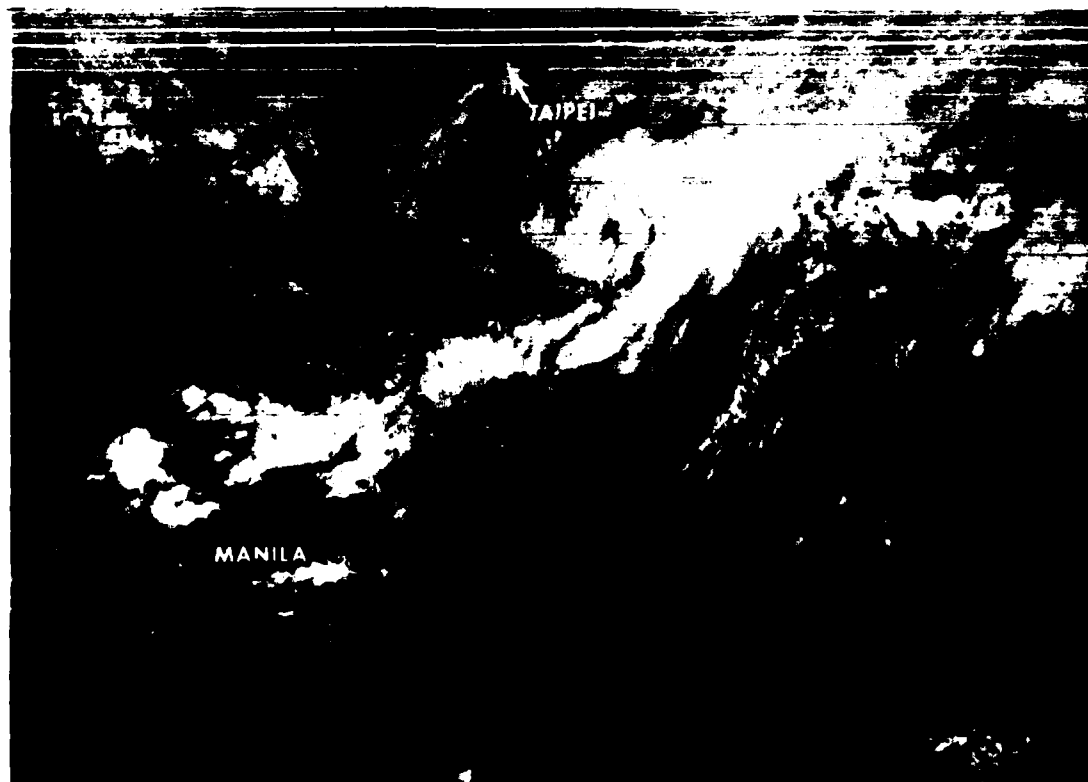


FIGURE 3-05-1. TD 05 at 30 kt (15 m/sec) intensity with banding-type eye moving east-northeastward at 20 kt (37 km/hr), 23 May 1979, 0018Z. (DMSP imagery)

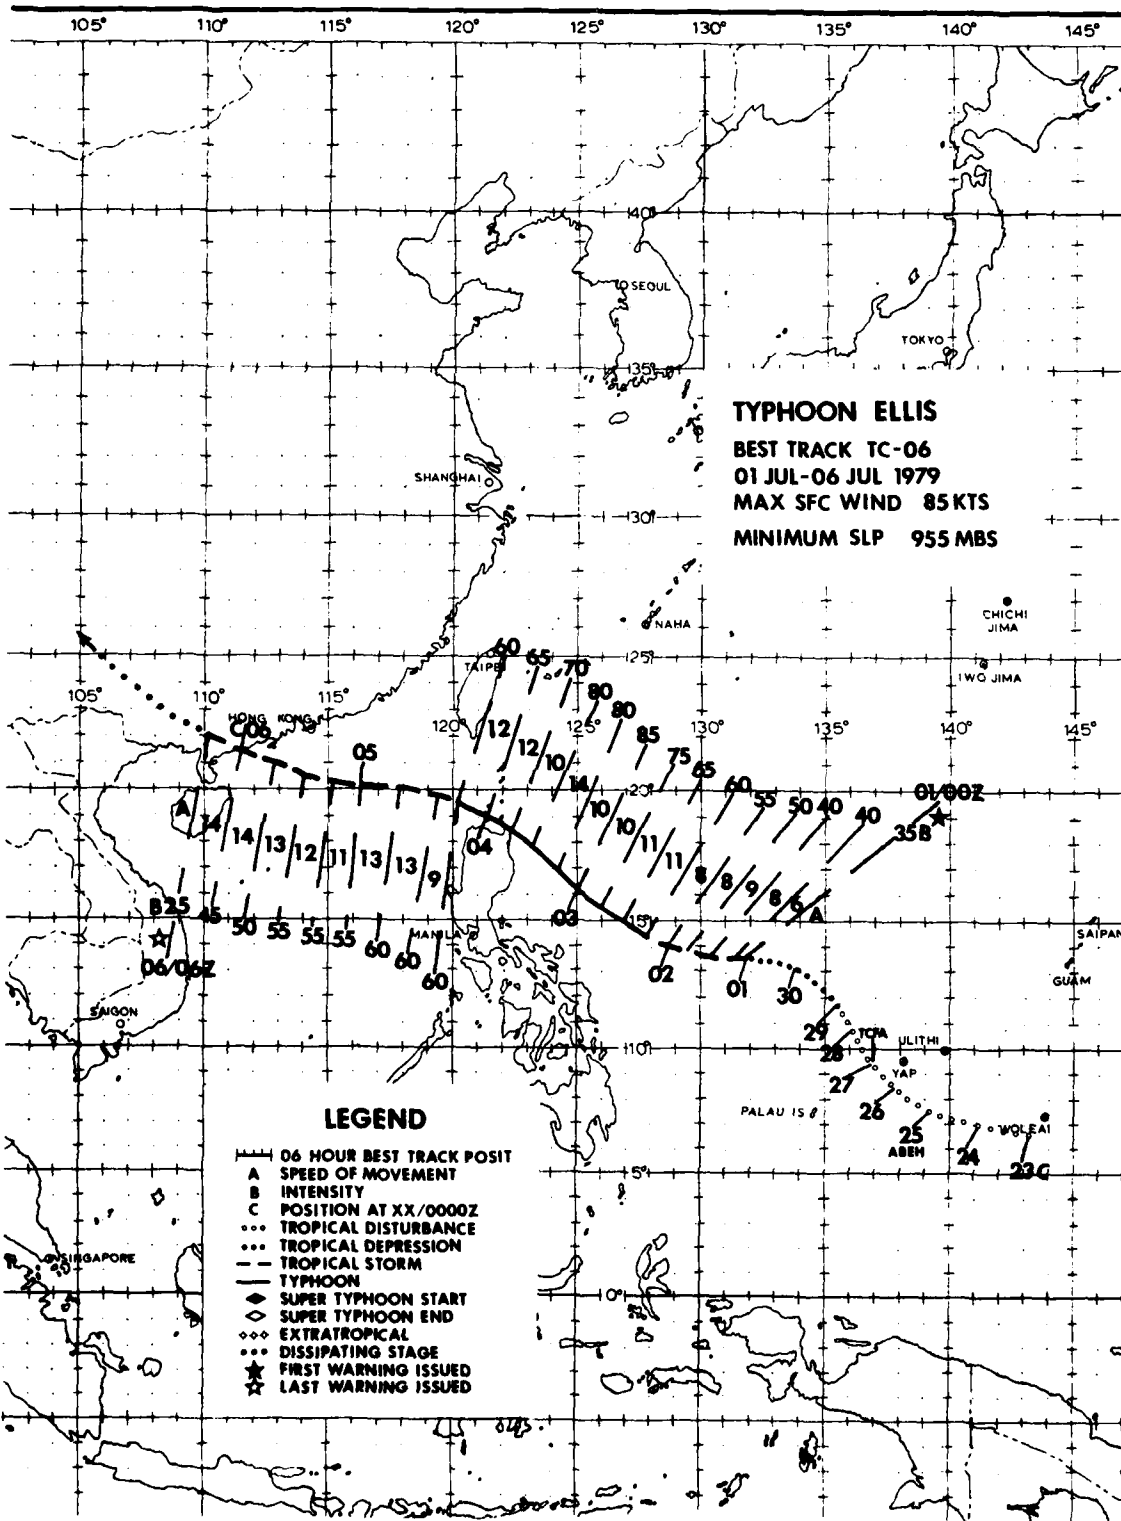

**TYPHOON ELLIS**  
**BEST TRACK TC-06**  
**01 JUL-06 JUL 1977**  
**MAX SFC WIND 85 KTS**  
**MINIMUM SLP 955 MBS**

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- ... TROPICAL DISTURBANCE
- ... TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◇ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ◇◇◇ EXTRATROPICAL
- ◇◇◇ DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ★ LAST WARNING ISSUED

TYPHOON ELLIS (06)

The tropical disturbance, which later became Typhoon Ellis, was first noted on satellite and synoptic data on 25 June 1979. The surface/gradient-level analysis showed that a broad monsoon trough had developed between Guam and the Philippine Islands. At upper-levels, a Tropical Upper Tropospheric Trough (TUTT) was oriented northeast-southwest between the Volcano Islands and the central Philippine Islands. This TUTT allowed excellent upper-level outflow to the northeast and was expected to induce intensification of the tropical disturbance southeast of the TUTT axis. Therefore, a Tropical Cyclone Formation Alert (TCFA) was issued for the area valid at 270000Z. However, significant development did not occur. Reconnaissance aircraft could find only a very broad surface circulation with relatively high surface pressures. The surface circulation drifted under the TUTT and the associated convection was suppressed; development was thereby thwarted. Based on the superposition of the TUTT and the surface circulation and the fact that the overall satellite signature had not improved, the TCFA was cancelled at 282000Z.

The area was closely monitored, and when satellite imagery showed increased convective development and surface data showed decreasing pressures and increasing winds, a second TCFA was issued valid at 300600Z. Subsequent aircraft investigation revealed a minimum sea-level pressure of 1000 mb and surface winds in excess of 35 kt (18 m/sec). Based on this new information, the first warning on TS Ellis was issued at 010000Z July. Ellis was in a favorable position at that time and steady intensification occurred over the next 2 days.

For his entire lifetime, Ellis followed an uncomplicated, classic west-northwest track at near climatological speeds ranging from 9-14 kt (17-26 km/hr). Post-analysis indicates that Ellis was moving under the influence of the east-southeasterly steering flow on the southern edge of the subtropical mid-tropospheric ridge. Ellis' nearly straight track is due primarily to the fact that this ridge did not change in intensity or orientation during the period.

Ellis reached typhoon strength at 021200Z and a maximum intensity of 85 kt (44 m/sec) at 030000Z (Fig. 3-06-1). Continued intensification was anticipated, but a slow weakening trend was actually observed. As with Tropical Storm Faye, this weakening was associated with a drastic change in the upper-level flow pattern.

During Ellis' developing stage, the TUTT was located to the north-northwest and was providing the necessary outflow channel to the northeast. By 020000Z, however, an upper-level anticyclone over central China began to ridge eastward, forcing the TUTT to the northeast. Strong upper-level north-easterly winds associated with this anticyclone began to exert pressure on Ellis, shearing the convective activity to the southwest. Continuing west-northwest in this shearing environment, Ellis weakened steadily. By the time he was in the South China Sea, Ellis had weakened to tropical storm strength and was a completely exposed low-level circulation (Fig. 3-06-2).

With winds of 54 kt (26 m/sec), Ellis made landfall on the Chinese coast at 060000Z, 164 nm (296 km) southwest of Hong Kong and dissipated rapidly over land thereafter.

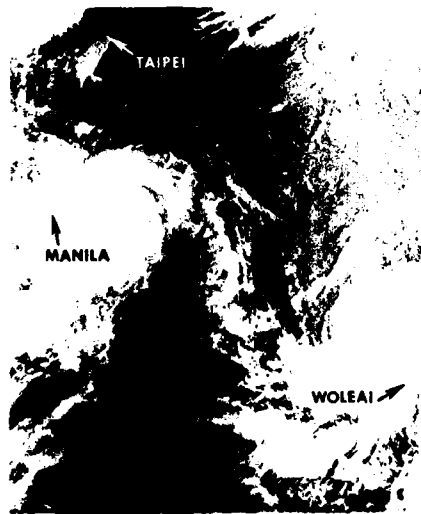


FIGURE 3-06-1. Typhoon Ellis (left) at maximum intensity of 85 kt (44 m/sec), 2 July 1979, 2356Z. TS Faye (right) is developing north of Woleai. (DMSF imagery)


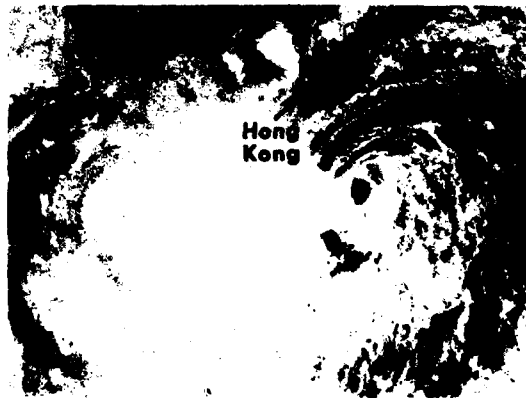


FIGURE 3-06-2. Tropical Storm Ellis as an exposed low-level circulation in the South China Sea, 5 July 1979, 0101Z. (DMSF imagery from Det 5, 14W, Clark AB, RP)

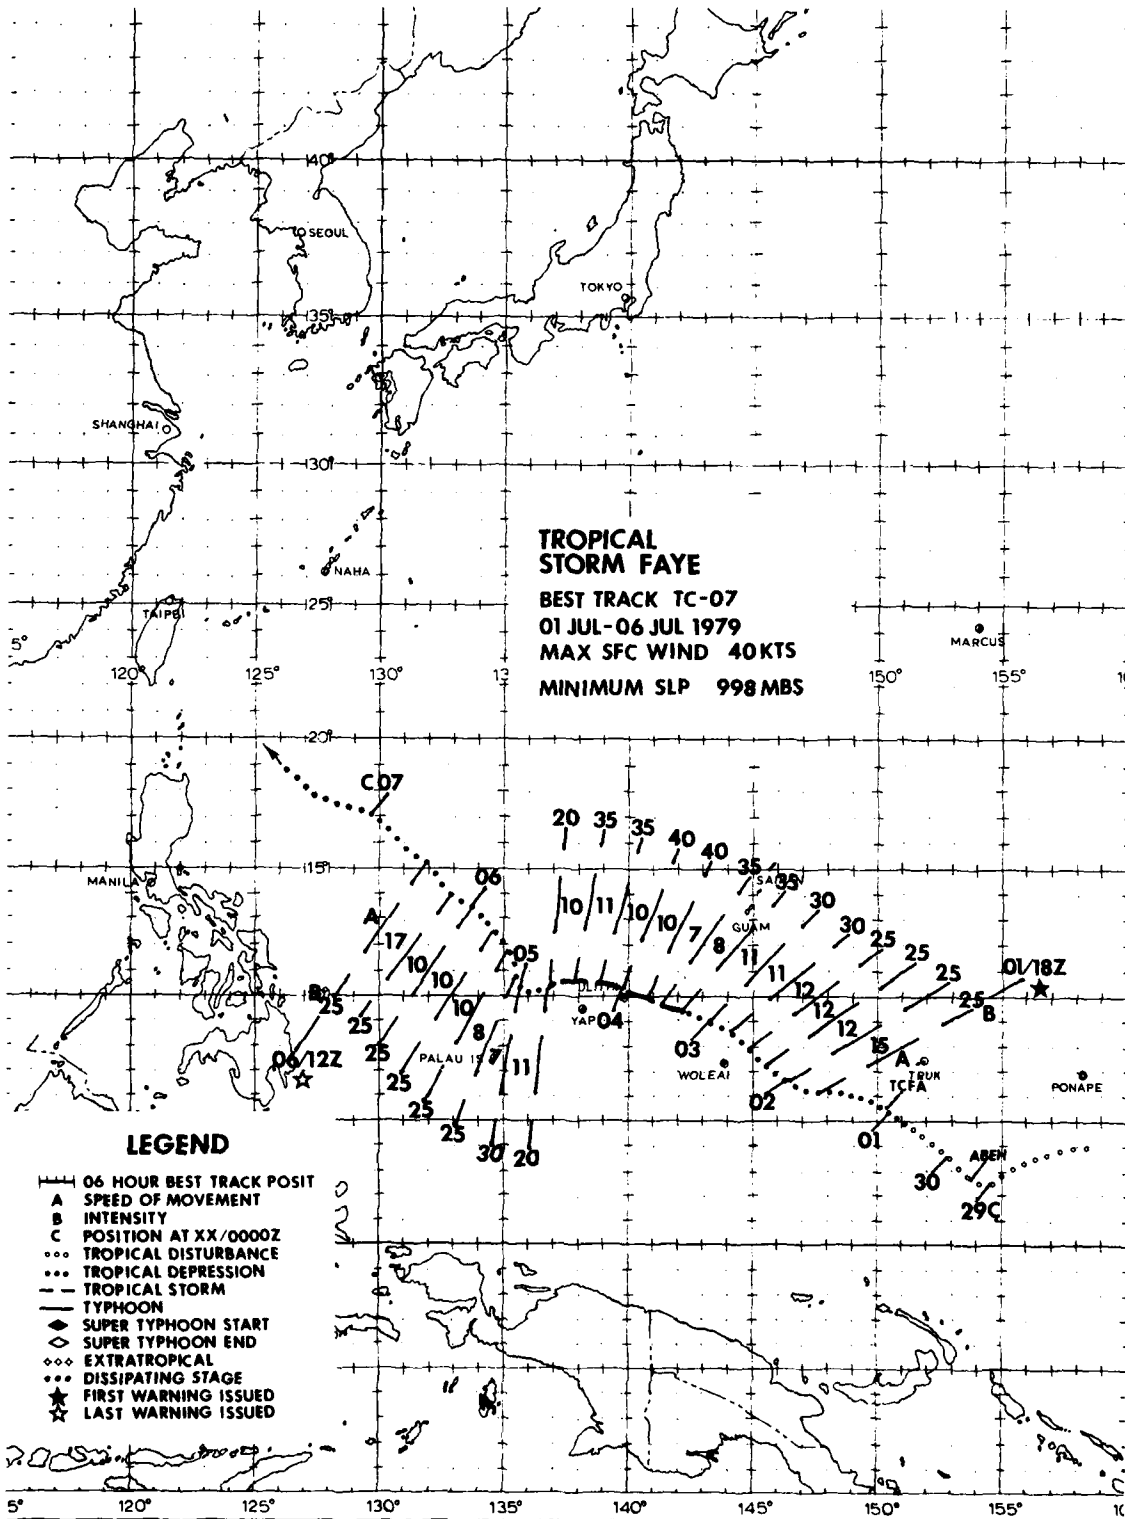

TROPICAL STORM FAYE (07)

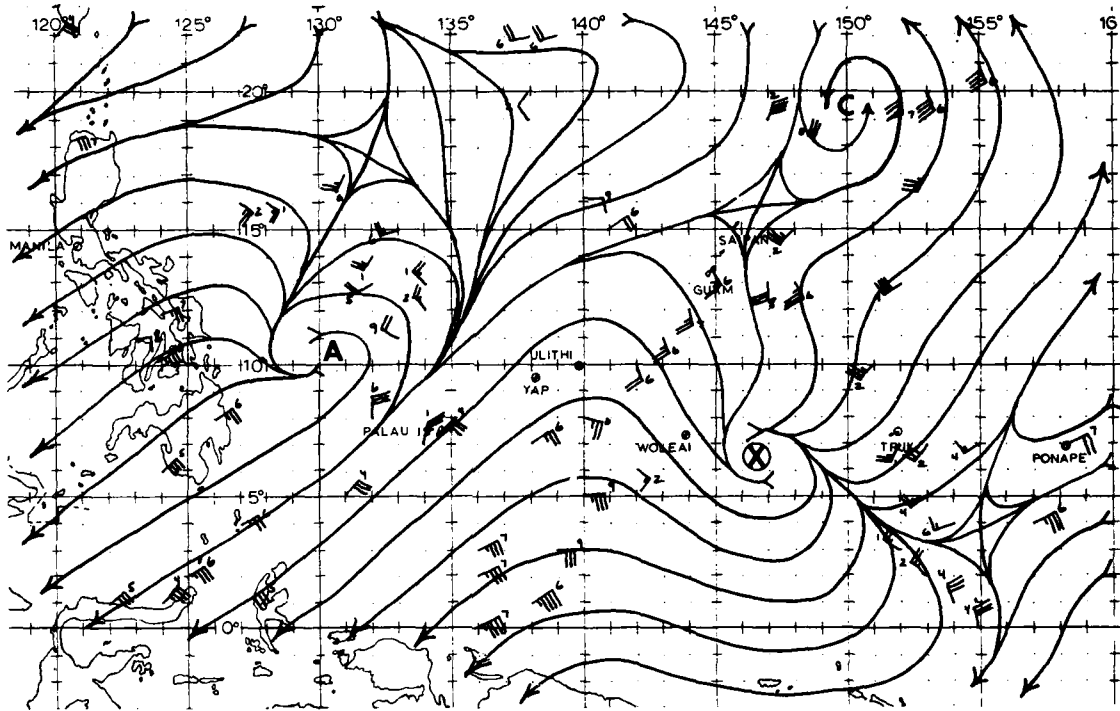


FIGURE 3-07-1. Upper-level streamline analysis at 020000Z July 1979.

Tropical Storm Faye proved a most interesting case study, not because it developed into an intense tropical cyclone, but because typhoon intensity was not attained as forecast.

TD 07 was first analyzed as a closed surface circulation about 800 nm (1482 km) southeast of Guam on the 28th of June. The associated convective activity remained disorganized until 011200Z July. At that time a TUTT cell developed north of the system; thereby providing an excellent upper-level outflow channel to the northeast (Fig. 3-07-1). The wind data plotted in figures 3-07-1, -3 and -5 are a combination of RAOBS, AIREPS and satellite-derived winds for the 250 mb to 150 mb levels.

Diffluence over TD 07 was extensive and well-defined. The satellite signature also showed improved outflow (Fig. 3-07-2), and further intensification was expected.

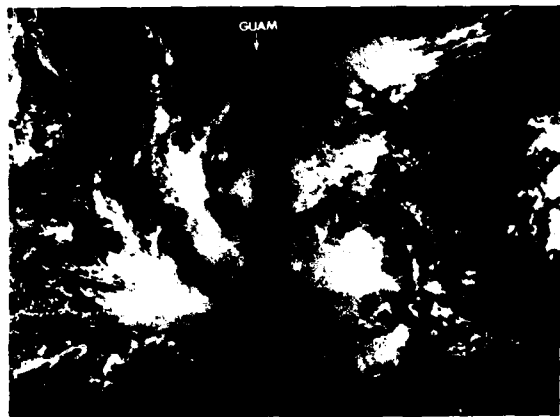


FIGURE 3-07-2. The tropical depression that was to become TS Faye, 02 July 1979, 0022Z. (DMSP imagery)

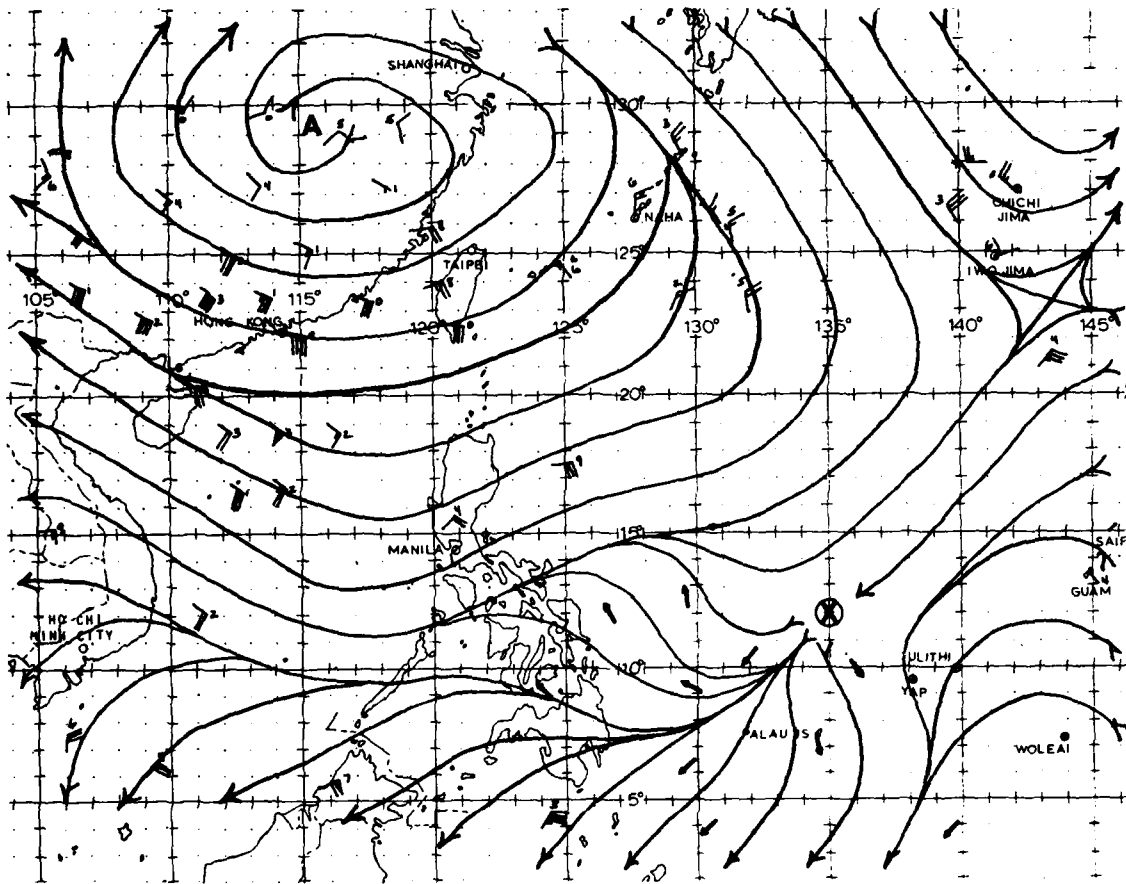


FIGURE 3-07-3. Upper-level streamline analysis at 051200Z July 1979.

The flow pattern over the depression (TD 07) remained favorable for development for the next two days and tropical storm intensity was reached by 031800Z. Continued intensification was still anticipated with typhoon strength forecast within 18 hours.

Instead of intensification, however, Faye weakened. Post-analysis shows that Faye's weakening, and subsequent dissipation, was linked to a radical change in the upper-level flow pattern. Whereas figure 3-07-1 shows a tropical cyclone in excellent position for intensification, figure 3-07-3 shows just the opposite. By 051200Z, a large upper-level anticyclone over China was beginning to build southeastward into the western Pacific toward Faye. Faye's outflow channel to the north became restricted and her low-level circulation center became exposed (Fig. 3-07-4). The mid- to upper-level centers and the associated convection were sheared off to the southwest by increased northeasterly winds at the upper-levels.

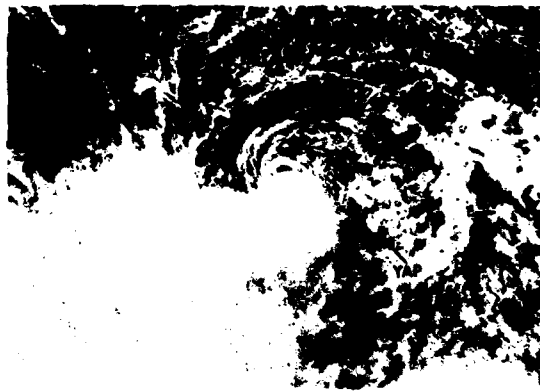


FIGURE 3-07-4. TD 07 (FAVE), 05 July 1979, 1202Z. Strong upper-level northeasterlies have begun to shear off the convection to the southwest. (DMSP imagery, Moonlight Visual)

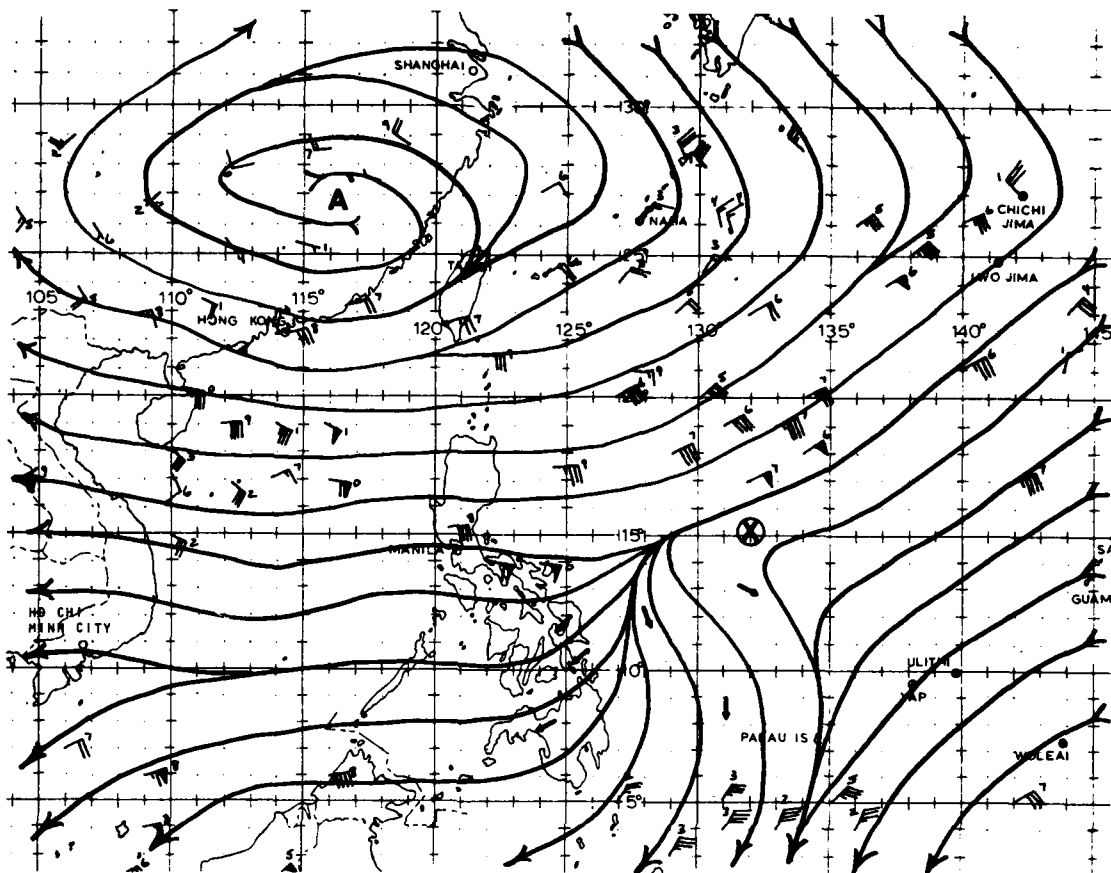


FIGURE 3-07-5. Upper-level streamline analysis at 061200Z July 1979.

Displacement between surface and upper-level centers was observed often during the 1979 season (e.g., see discussions on Hope, Irving, Ellis). Development is usually arrested in this situation, until the system becomes aligned in the vertical. In the case of TS Faye, the upper-level pattern failed to improve. Figure 3-07-5 shows that by 061200Z the upper-level ridge had intruded as far east as Guam and that northeast winds aloft had increased to 50 kt (26 m/sec). At that time, Faye's low-level circulation was fully exposed (Fig. 3-07-6).

This exposed low-level circulation meandered northwestward for two days and eventually dissipated northeast of Luzon.

The short history of Tropical Storm Faye is an excellent example of premature dissipation induced by strong vertical wind shear.


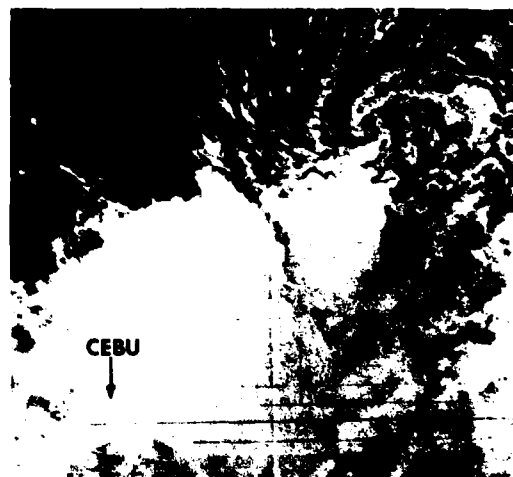


FIGURE 3-07-6. TD 07 (FAVE) is now a fully exposed low-level circulation, 06 July 1979, 1518Z. (DNMSP imagery, Moonlight Visual)



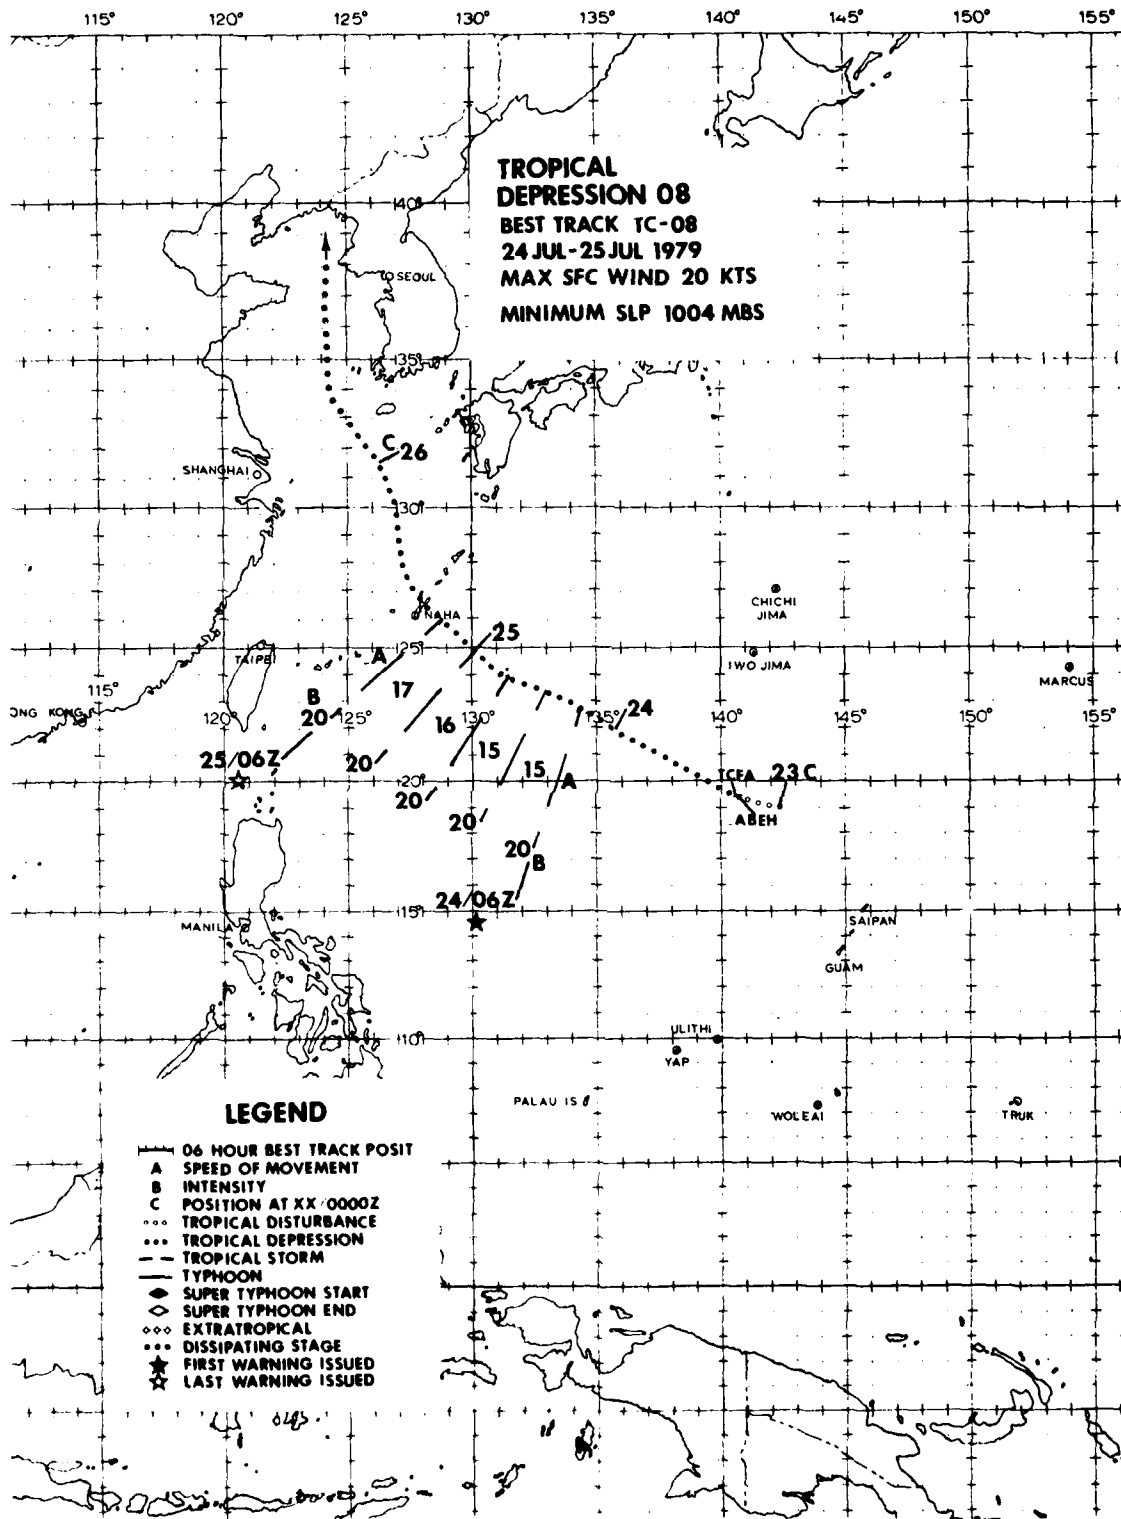

TROPICAL DEPRESSION 08

For the greater part of its life, TD 08 was an exposed low-level circulation with the major convective activity detached to the north of the surface center (Fig. 3-08-1). Aircraft reconnaissance confirmed an exposed surface circulation approximately 100 nm (185 km) south of the convective center at 241016Z.

TD 08 was not expected to intensify to

tropical storm strength as a result of strong vertical shear which began on 231200Z. However, initial warnings were issued based on the forecast track which indicated passage directly over Okinawa.

Post-analysis indicated that the calm-wind center did indeed track over Okinawa with most of the convective activity tracking well north of the island.



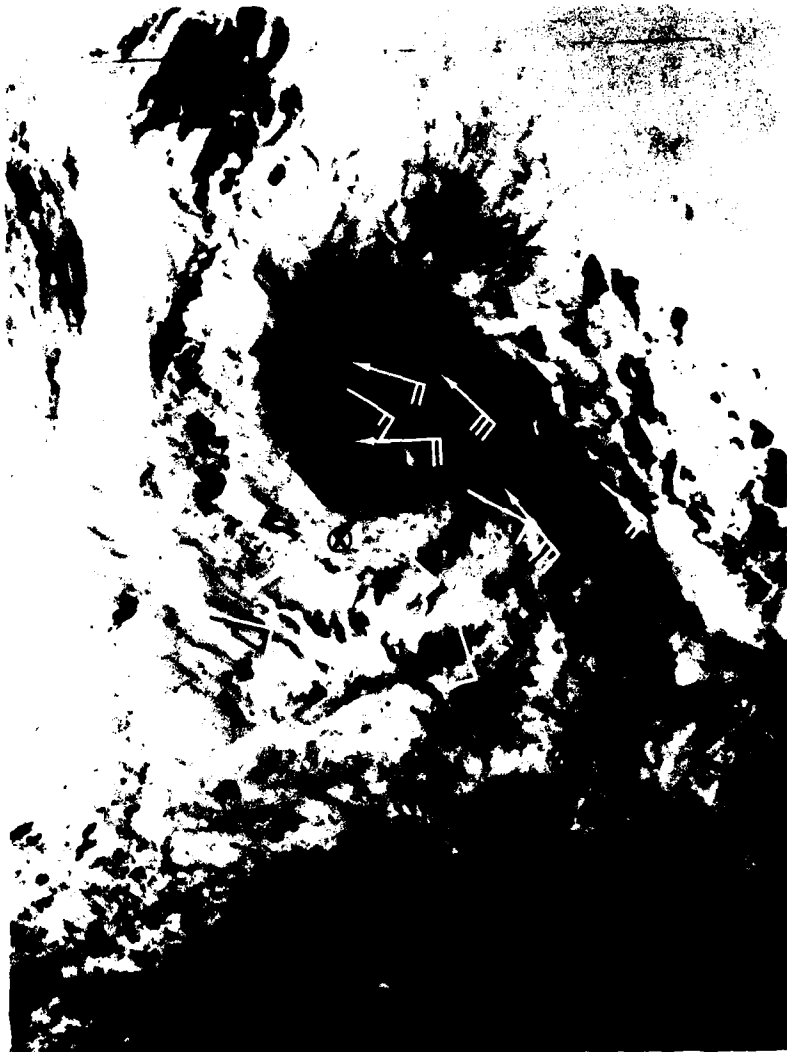


FIGURE 3-08-1. Infrared imagery of TD 08 at maximum intensity of 20 kt (37 m/sec), 24 July 1979, 1244Z. TD 08's 241200Z surface center (●) is depicted relative to surface ship reports (—) and 700 mb aircraft reports (←). (DNMSP imagery)

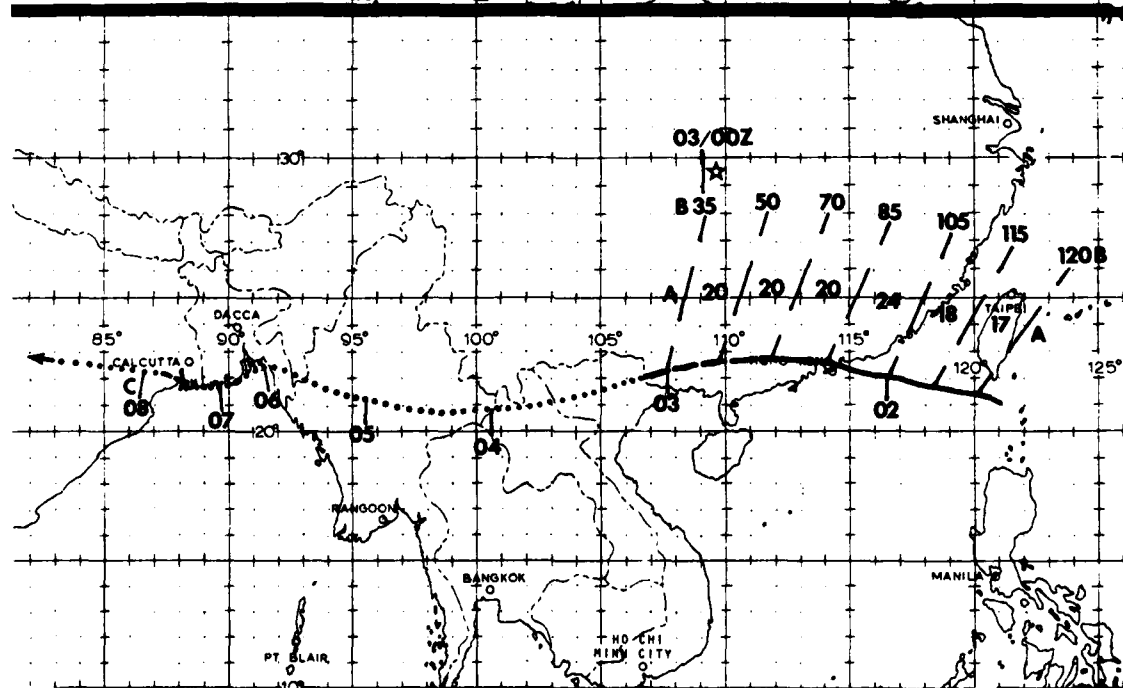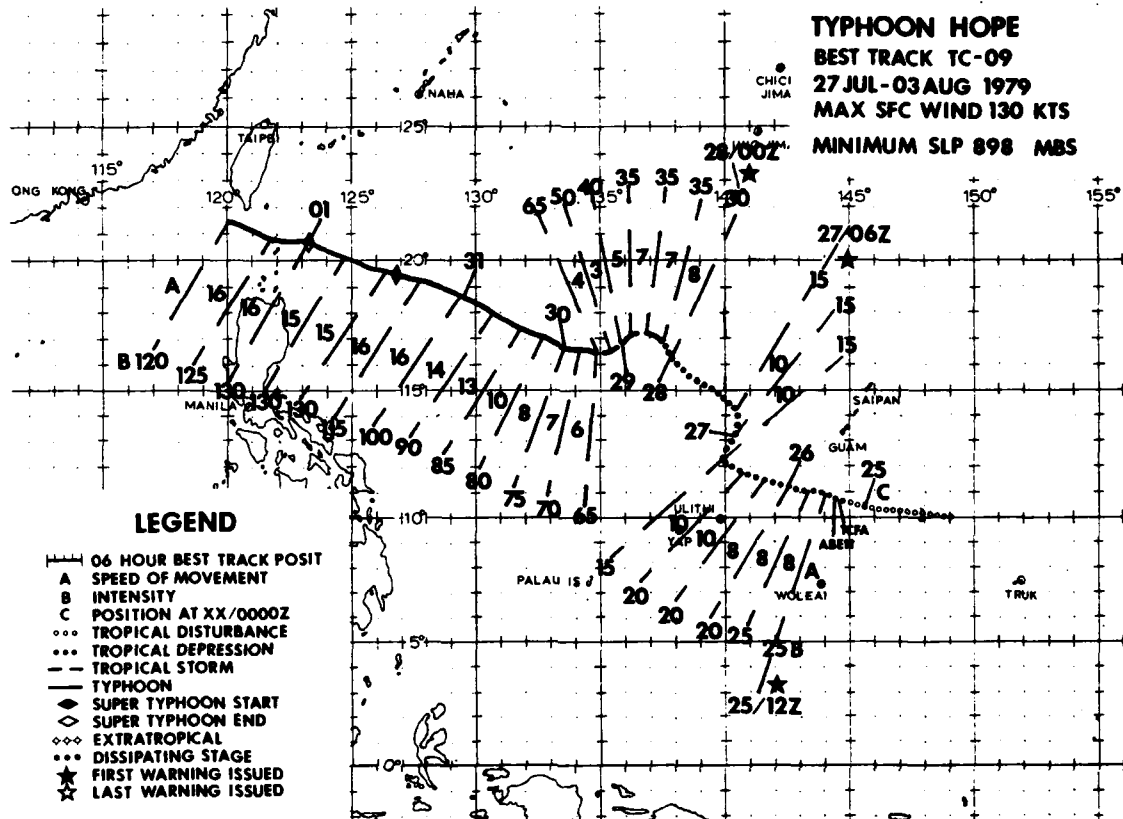

SUPER TYPHOON HOPE (09)

The disturbance which eventually developed into the first super typhoon of 1979 became evident on satellite imagery at 250000Z July as a focal point of cumulus banding. Future intensification was indicated as the disturbance was situated within an area of strong upper-level diffluence associated with the southern periphery of an east-west oriented TUTT. This outflow mechanism aloft, combined with an improved satellite signature, dictated issuance of a Tropical Cyclone Formation Alert at 250751Z; the alert box described an area southwest of Guam. Subsequent aircraft reconnaissance at 250900Z described a cyclonic circulation with wind speeds of 15-25 kt (8-10 m/sec) and a central pressure of 1004 mb centered near 11.1N 144.5E. Based on this aircraft data and the proximity to Guam, the first warning on TD 09 (Hope) was issued at 251200Z.

From the 25th through the 26th of July, while TD 09 (Hope) tracked to the west-northwest, the TUTT axis shifted northward and strong upper-level northeast flow dominated the area. The resultant shear produced by this uni-directional upper-level flow displaced the convective activity to the southwest of the surface circulation, indicating a loss of vertical alignment and subsequent weakening. By 270600Z, the center of the convective activity was displaced 120 nm (222 km) southwest of the low-level circulation center. Surface analyses, at this time, indicated the southwest monsoonal flow was being channeled principally into Tropical Storm Gordon located 750 nm (1389 km) to the northwest of TD 09 (Hope). With further weakening of Hope expected, a final warning was issued at 270451Z advising that the area would be closely monitored for possible

regeneration. Post-analysis showed that from 271200Z through 280000Z, the TUTT weakened with resultant reduced shear over TD 09 (Hope). Conditions for development being improved, reorganization took place and TD 09 began to develop. Unfortunately, the improvement in the surface circulation went unnoticed as it occurred during the night when only infrared satellite imagery, on which low-level clouds are difficult to distinguish, was available. An aircraft investigation on the morning of the 28th reported a surface pressure of 999 mb with 45-50 kt (23-27 m/sec) winds in the heavy convective activity to the southwest of the surface center. A warning was issued at 280221Z indicating the regeneration of TD 09 (Hope).

By 280000Z, Tropical Storm Gordon had moved into the Luzon Straits. Due to the orographic blocking of the Philippine land mass, the majority of the strong southwest monsoonal flow was diverted into Hope. This increased low-level inflow coupled with decreasing upper-level shear resulted in a much improved vertical structure with feederband activity developing in the south; 282052Z aircraft reconnaissance supported this improved organization trend. Post-analysis indicates that TD 09 (Hope) could have been upgraded to tropical storm intensity 12-24 hours prior to the warning upgrade at 290000Z, as 35-45 kt (18-23 m/sec) winds were reported in feederband activity as much as 24 hours earlier (Fig. 3-09-1). By 290920Z, a well-defined eye with a central surface pressure of 972 mb and 65-70 kt (33-36 m/sec) surface winds were reported by aircraft data; the 291200Z warning upgraded Hope to a typhoon.

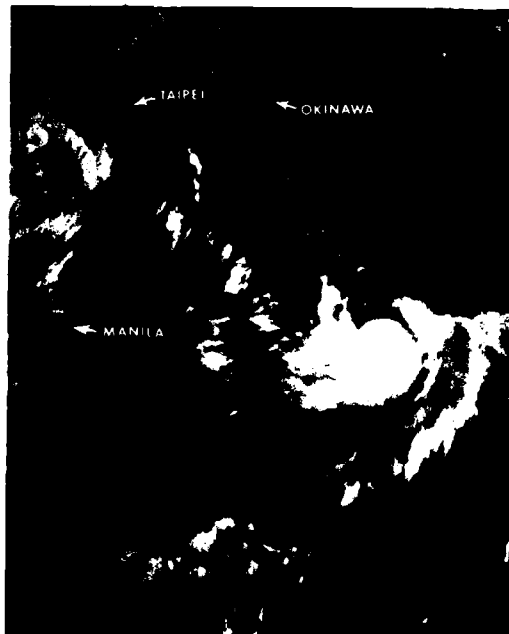


FIGURE 3-09-1. Hope (right) at tropical storm intensity 570 nm (1056 km) northeast of Guam, 29 July 1979, 0219Z. Tropical Storm Gordon (left) is 100 nm (185 km) east of Hong Kong. (DMSP imagery)

The 291200Z 200 mb analysis indicated the TUTT had again established itself north of Hope. Due to the east-west orientation of the TUTT, strong westerly flow along its southern periphery enhanced Hope's upper-level anticyclonic outflow. Aircraft reconnaissance at 292031Z indicated a sharp decrease in surface pressure to 961 mb with the temperature/dewpoint data correlating to an equivalent potential temperature ( $\theta_e$ ) of 359K. An empirically derived forecast aid that relates pressure and  $\theta_e$  indicates that once the traces intersect, rapid intensification can be expected within 18-30 hours (Fig. 3-09-2). The intensification equates to a possible mean pressure decrease of 44 mb and a mean wind speed increase of 50-60 kt (26-30 m/sec). Typhoon Hope verified this study 36 hours after the intersection occurred; reconnaissance aircraft reported a surface pressure of 898 mb and wind speeds of 100-120 kt (51-62 m/sec). By 311200Z, Hope attained super typhoon intensity of 130 kt (67 m/sec) (Fig. 3-09-3).

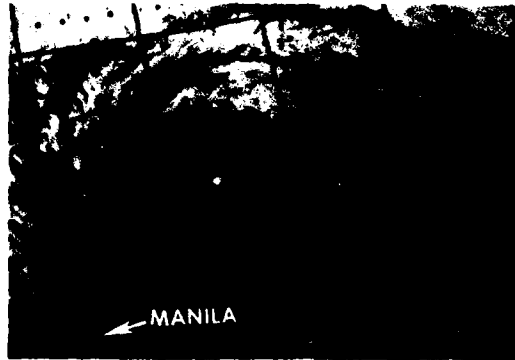


FIGURE 3-09-3. Infrared imagery of Hope just after attaining super typhoon intensity of 130 kt (67 m/sec), 31 July 1979, 1244Z. (DMSP imagery)

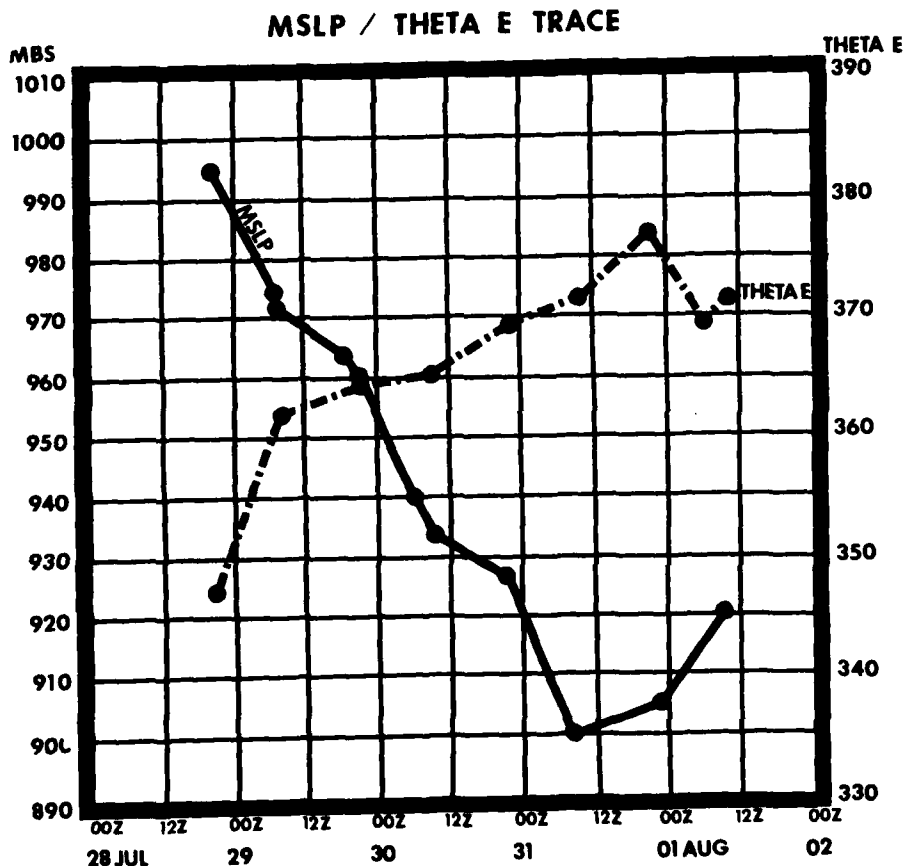


FIGURE 3-09-2. Time cross-section of Hope's minimum sea-level pressure versus equivalent potential temperature (THETA E [ $\theta_e$ ]) derived from aircraft reconnaissance.

Hope entered the Luzon Straits approximately 4 days after Tropical Storm Gordon. Hope's compact wind structure and a slight weakening trend were noted as Heng Chun (WMO 46752) on the southern tip of Taiwan reported sustained winds of 40 kt (21 m/sec) with gusts to 86 kt (44 m/sec) at 011000Z as Hope passed 45 nm (83 km) south of the station. Two persons on the Batanes Islands and one person on Taiwan were killed as a result of the torrential rainfall experienced as Hope tracked through the Luzon Straits.

Typhoon Hope made landfall less than 10 nm (19 km) north of Hong Kong at 020530Z (Fig. 3-09-4) with maximum sustained winds of 70 kt (36 m/sec) and gusts to 110 kt (57 m/sec) reported. Figure 3-09-5 is a time sequence of the surface observations received from the Royal Observatory of Hong Kong during Hope's passage. Extensive wind and rain damage, 3 deaths and over 258 injuries were reported. Damage to shipping within Hong Kong harbor was heavy as 17 ships broke their moorings and 8 ships collided.

Subsequent to passage over Hong Kong, Hope moved into southern China and weakened. The final warning was issued at 030111Z downgrading Hope to tropical storm intensity. Hope's uncomplicated northwest track after development into a typhoon resulted in minimal right-angle track errors with her unexpected acceleration accounting for the majority of the discrepancy.

Although weakening considerably during passage over southeast Asia, Hope did maintain a satellite signature and exited into the northern Bay of Bengal 110 nm (204 km) southeast of Dacca, Pakistan at 060500Z.

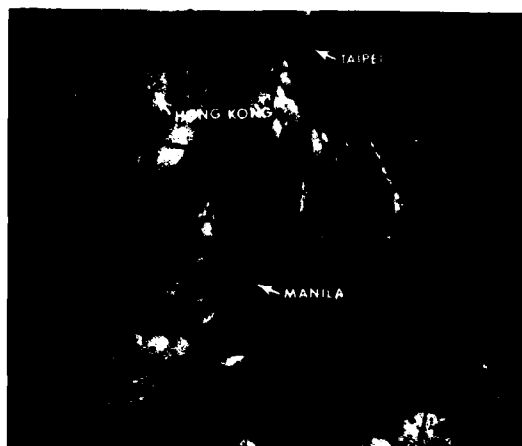


FIGURE 3-09-4. Typhoon Hope at 100 kt (51 m/sec) intensity, 3 hours prior to closest point of approach to Hong Kong, 2 August 1979, 0247Z. (DMSP imagery)


Strengthened once again by pre-existing strong southwest monsoonal flow, Hope reintensified from 070000Z through 071800Z with maximum sustained winds of 35 kt (18 m/sec) reported on 071200Z surface analysis. A tropical cyclone warning was not issued due to Hope's proximity to land and her expected movement into northeastern India within 12 hours. Hope, however, was discussed at length in the Significant Tropical Weather Advisory (ABEH PGTW).

45005 - HONG KONG OBSERVATORY				ST HOPE		DATE: 02 JULY 1979 / TIMES: 01-10Z			
02/01z	02/02z	02/03z	02/04z	02/05z	02/06z	02/07z	02/08z	02/09z	02/10z

FIGURE 3-09-5. Hourly surface synoptic observations from the Royal Observatory of Hong Kong (ROHK) during passage of Typhoon Hope.

10° 105° 110° 115° 120° 125° 130° 135° 140° 145°

**TROPICAL STORM GORDON**  
**BEST TRACK TC-10**  
**26 JUL-29 JUL 1979**  
**MAX SFC WIND 60 KTS**  
**MINIMUM SLP 980 MBS**

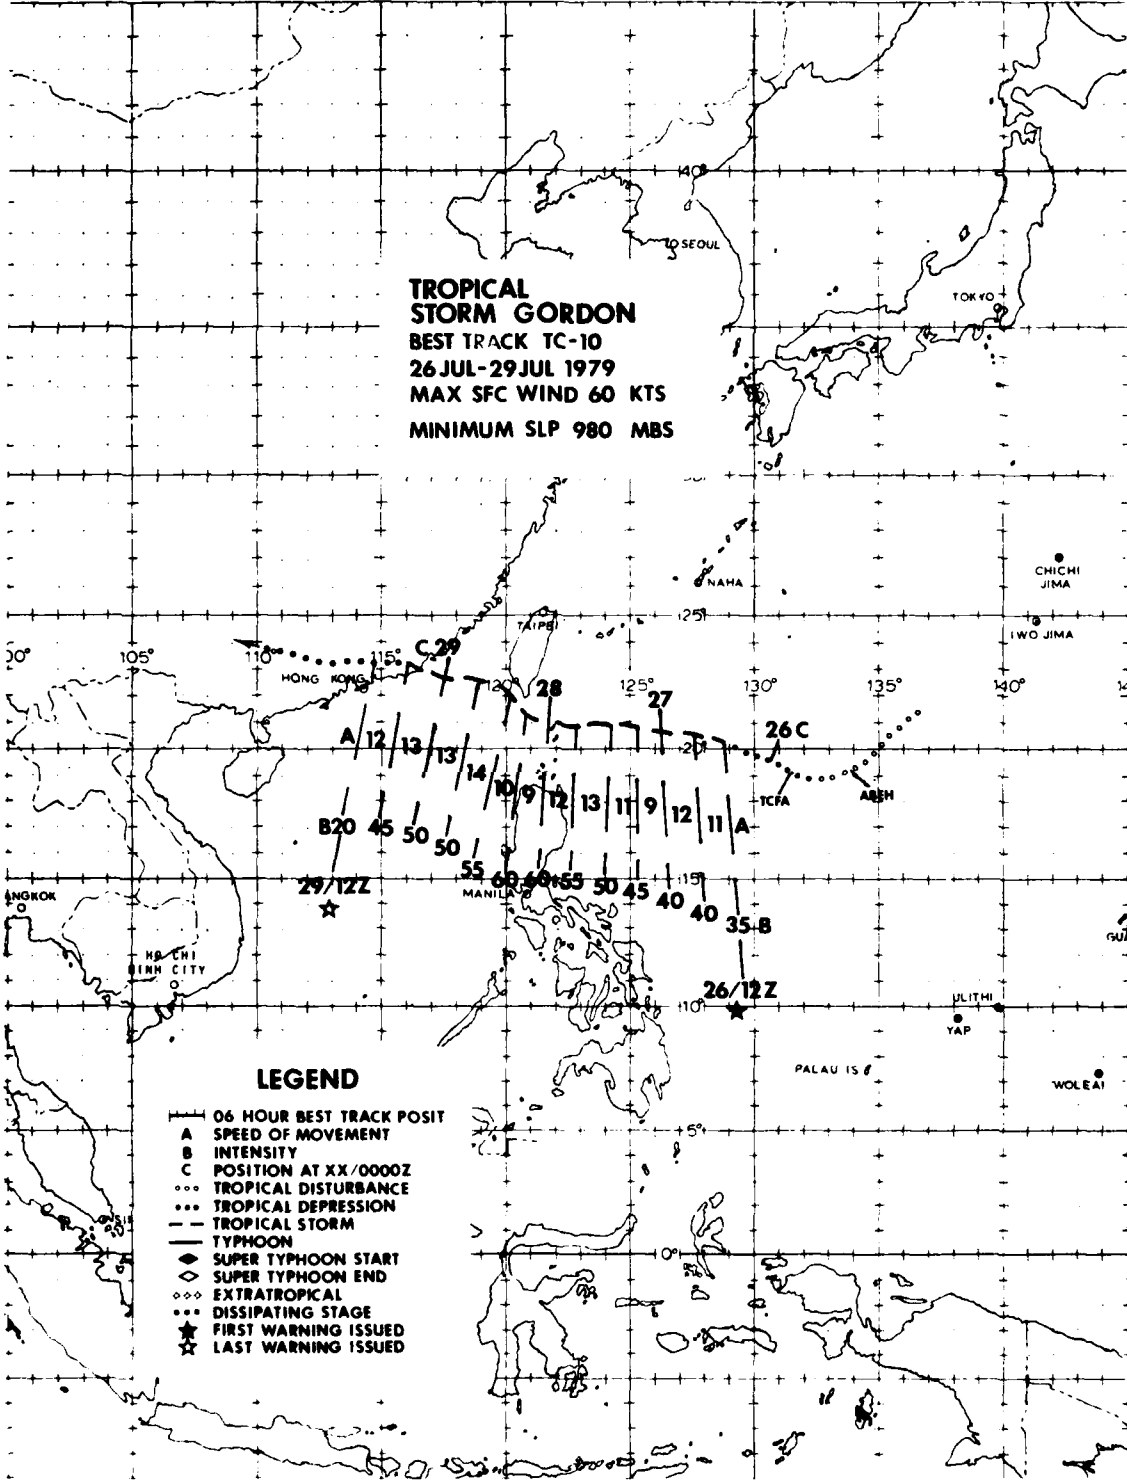

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- ... TROPICAL DISTURBANCE
- ... TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◇ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ... EXTRATROPICAL
- ... DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ★ LAST WARNING ISSUED

TROPICAL STORM GORDON (10)

Gordon, the 10th significant tropical cyclone of 1979, developed in late July in the monsoon trough near 20N-135E and eventually made landfall east-northeast of Hong Kong. A stronger sister, Hope (TD 09), followed Gordon several days later on a similar track into Hong Kong. Note that TD 09 (Hope) and TD 10 (Gordon) are alphabetically out of sequence because TD 10 was upgraded to tropical storm stage before TD 09.

Post-analysis revealed that Gordon reached tropical storm intensity at the time of the first warning. CINCPACINST 3140.1N, section 2.5.1., paragraph b states that warnings will be issued when "maximum sustained wind speeds are forecast to increase to 34 or more knots within 48 hours." In this case, there was no lead time between the first warning and tropical storm stage. Figures 3-10-1 and 3-10-2 illustrate why this occurred. TD 10 developed rapidly within the 22-hour time period between these figures. Synoptic data indicated increasing southwest monsoon flow into the area during this period; yet no definitive surface circulation could be located. The most significant finding of the post-analysis was that Gordon could not be traced back 48 hours prior to the first warning from available synoptic and satellite data, and, therefore, falls into the category of a rapid developing system.

Gordon's track took an unexpected jog northwestward while passing south of Taiwan (Fig. 3-10-3). (Typhoon Hope took a similar, but less pronounced, jog.) This northward adjustment is historically evident from tropical cyclones that pass south of Taiwan. The influence of Taiwan's high mountain range is thought to be responsible. As tropical cyclones pass south of Taiwan, they induce lee-side troughing west of the mountains over the Formosa Strait and track northwestward in response.



FIGURE 3-10-1. Tropical Storm Gordon in its infancy 4 hours prior to being discussed on the Significant Tropical Weather Advisory (ABEH PGTW), 25 July 1979, 0151Z. (DMSP imagery)


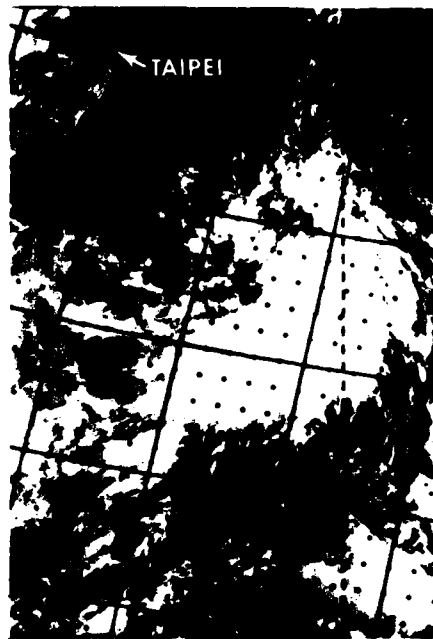


FIGURE 3-10-2. Tropical Storm Gordon 22 hours after Figure 3-10-1 showing increased development, 25 July 1979, 2350Z. A Tropical Cyclone Formation Alert was issued 6 hours prior to this time. (DMSP imagery)



FIGURE 3-10-3. Kaohsiung radar presentation of Gordon at 282103Z after passing south of Taiwan. (Photograph courtesy of the Central Weather Bureau, Taipei, Taiwan.)



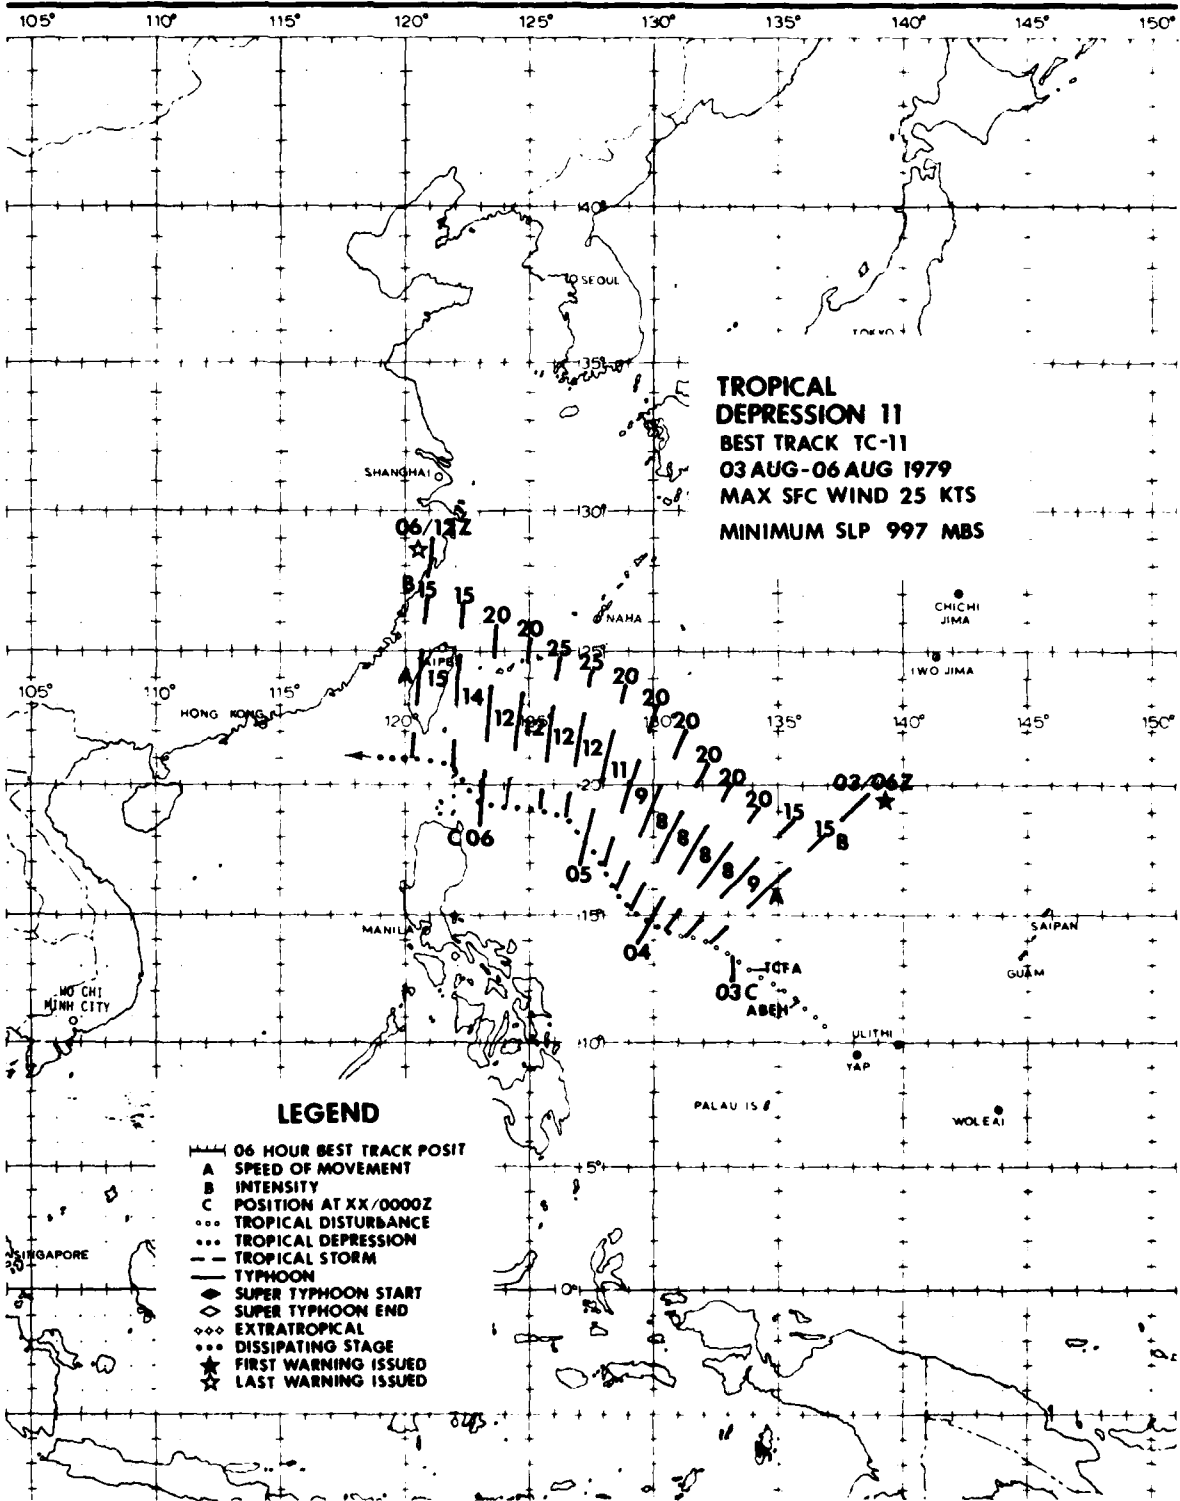

TROPICAL DEPRESSION 11



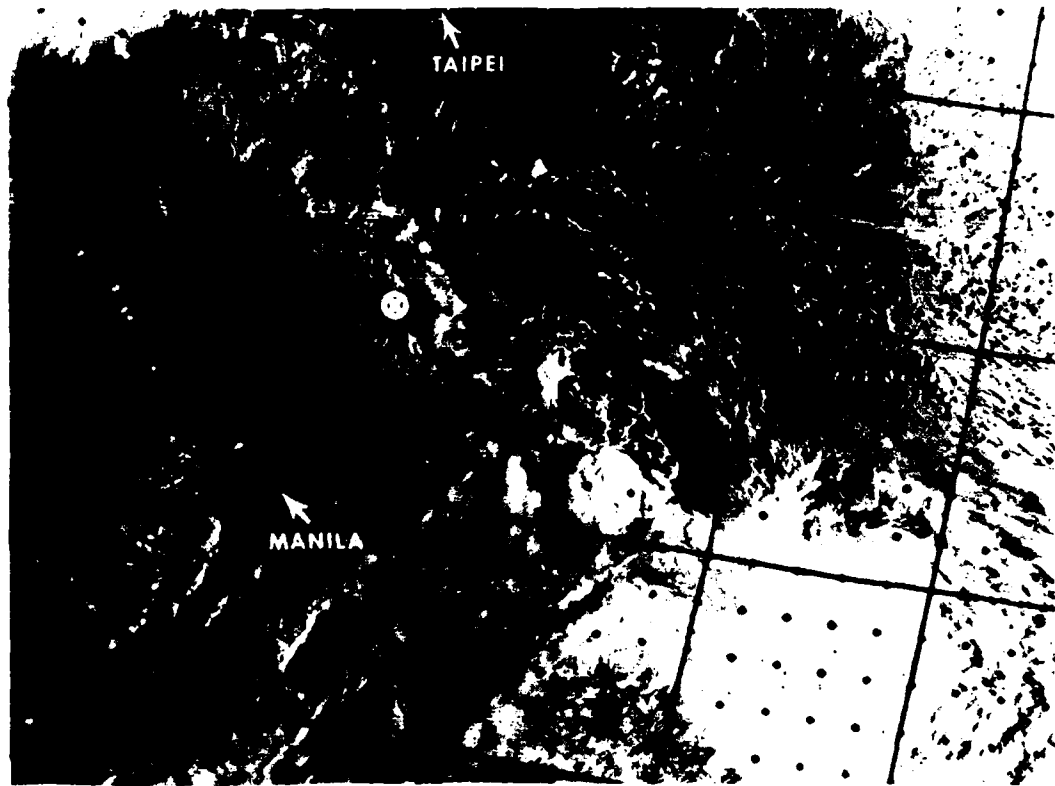


FIGURE 3-11-1. Tropical Depression 11 at 20 kt (10 m/sec) intensity, 5 August 1979, 2153Z. The TD symbol (●) is superimposed at location of surface circulation center as determined by aircraft reconnaissance at 052222Z. Considerable vertical shear existed over the system and was the reason that it did not develop into tropical storm strength. (DMSP imagery)

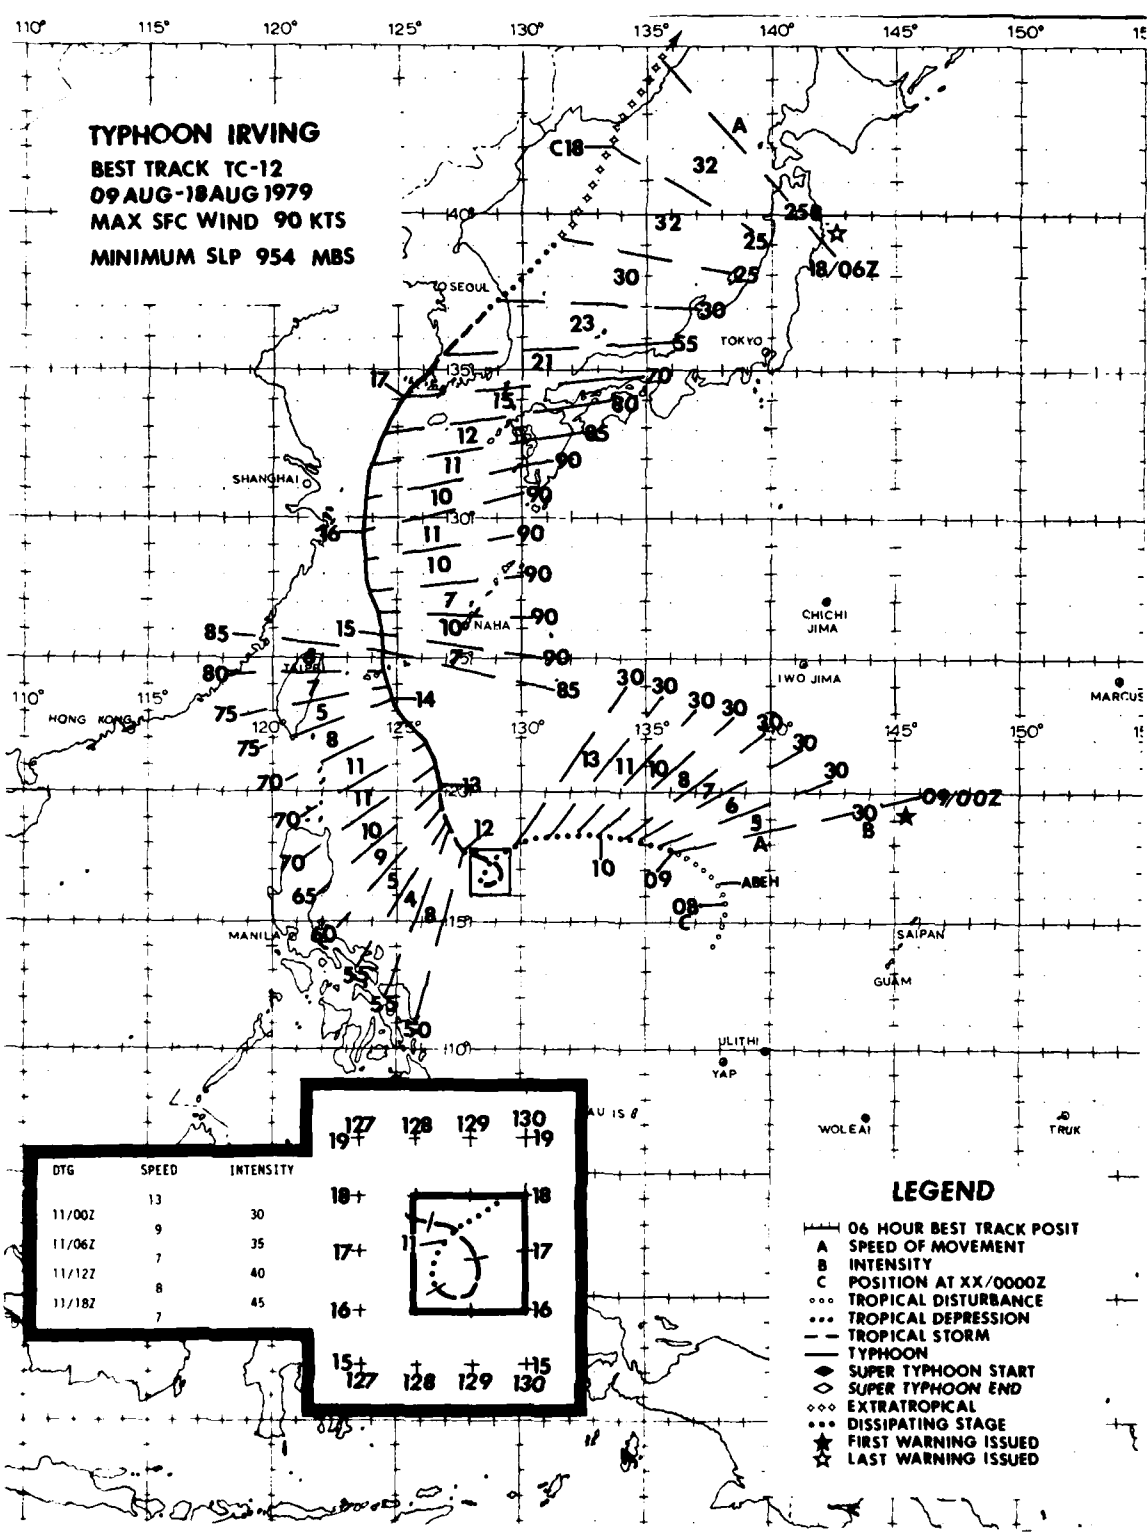

**TYPHOON IRVING**  
**BEST TRACK TC-12**  
**09 AUG-18 AUG 1979**  
**MAX SFC WIND 90 KTS**  
**MINIMUM SLP 954 MBS**

DTG	SPEED	INTENSITY
11/00Z	13	30
11/06Z	9	35
11/12Z	7	40
11/18Z	8	45



**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- ... TROPICAL DISTURBANCE
- ... TROPICAL DEPRESSION
- ... TROPICAL STORM
- TYPHOON
- ◇ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ◇ EXTRATROPICAL
- ... DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ★ LAST WARNING ISSUED

TYPHOON IRVING (12)

Surges in the southwest monsoon frequent the western North Pacific during the early tropical cyclone season and produce widespread convection from the Malay Peninsula to as far east as Guam. During the same period, the 500 mb monsoon trough fluctuates eastward across the South China Sea (SCS) and occasionally into the Philippine Sea. By late July 1979, an eastward extension of the mid-level monsoon trough was the main synoptic feature west of Guam. The 500 mb trough axis extended along 15N from northern Vietnam through the central SCS and then eastward into a quasi-stationary low pressure center over the Philippine Sea.

On 7 August at 1200Z, a developing surface circulation was observed at the eastern end of the monsoon trough near 14.1N 137.7E. This weak circulation tracked cyclonically around the eastern periphery of the broad 500 mb low pressure center in the Philippine Sea. Taking on the characteristics of a monsoon depression (Ramage, 1971), Irving was described in aircraft reconnaissance data received from 9-11 August as a weak depression with poor vertical alignment and maximum surface winds located 150 to 180 nm (278 to 333 km) west of the surface center. At this stage, Irving displayed an

exposed low-level circulation in satellite imagery with maximum convection located to the west of the surface center (Fig. 3-12-1). Ship synoptic data during the same period indicated that 25-35 kt (13-18 m/sec) winds extended outward 120 nm (222 km) south of the surface center.

By the 11th, the monsoon surge had weakened and receded westward, leaving a cut-off 500 mb low over the Philippine Sea in the vicinity of Irving's surface circulation. Irving executed a small, tight cyclonic loop on the 11th. During the loop, vertical alignment between the surface and the 500 mb center improved, and Irving intensified to tropical storm intensity. Simultaneously, a break developed in the 500 mb subtropical ridge to the north, and Irving tracked north-northwestward towards the Ryukyu Islands while intensifying further to typhoon strength. Although originally forecast to recurve south of Japan, strengthening of the 500 mb ridge southeast of Japan caused Typhoon Irving to track over the western East China Sea and accelerate north-northeastward across Korea before merging with an extratropical frontal boundary north of Japan.

Although not a spectacular typhoon, Irving's apparent sinusoidal motion, unusually large wind radii, failure to rapidly deepen and damage to southern Korea are noteworthy. Sinusoidal motion of tropical cyclones has been observed for many years, especially when short-term movements are observed by accurate fix platforms such as land radar (Fig. 3-12-2) and reconnaissance aircraft. Sinusoidal motion was observed from 131600Z to 151800Z as Irving tracked north-northwestward through the East China Sea. Radar reports from the Ryukyu Islands

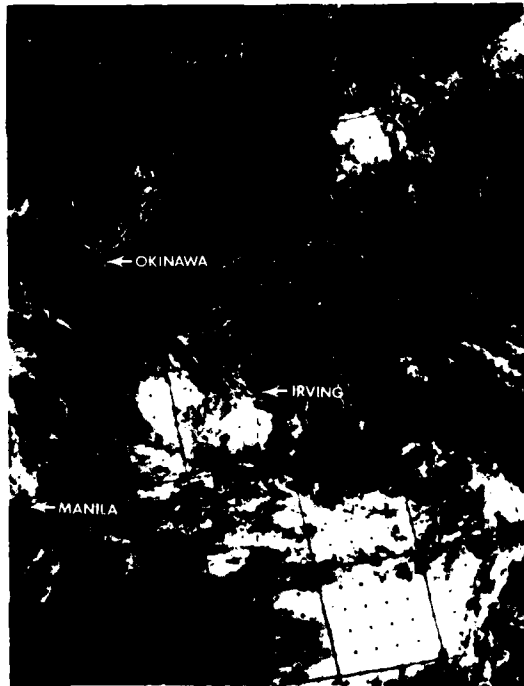


FIGURE 3-12-1. Typhoon Irving as a weak tropical depression with an exposed low-level circulation, 10 August 1979, 0126Z. Prior to intensification, aircraft reconnaissance consistently observed the maximum convection to the west of the surface center. (DMSP imagery)

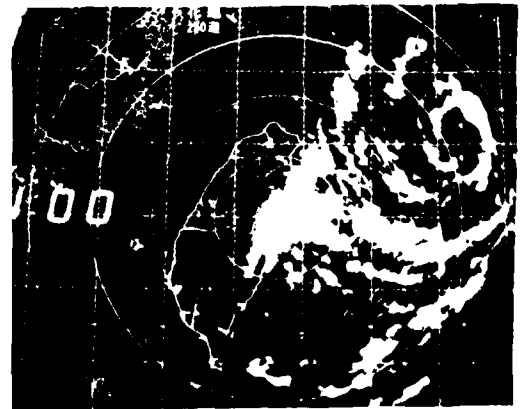


FIGURE 3-12-2. Typhoon Irving as seen by the radar at Haulien, Taiwan. Irving tracked north-northwestward across the southern Ryukyu Islands and was accurately tracked by eight radar sites, 14 August 1979, 1700Z. (Photograph courtesy of the Central Weather Bureau, Taipei, Taiwan)

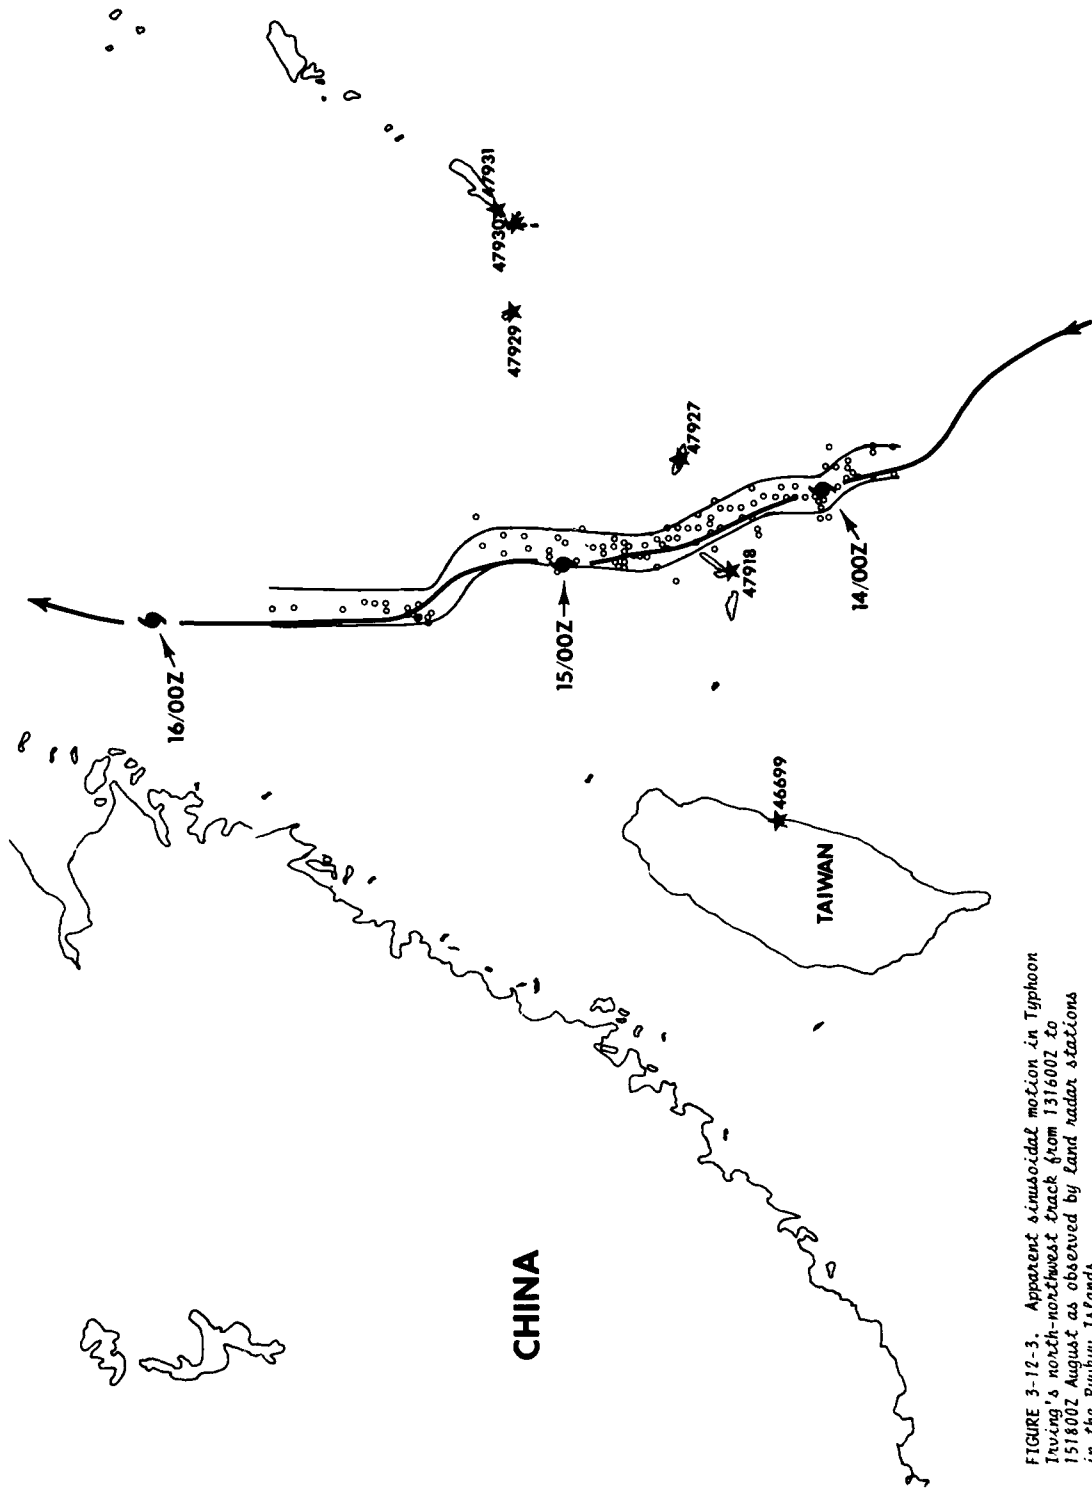


FIGURE 3-12-3. Apparent sinusoidal motion in Typhoon Trving's north-northwest track from 131600Z to 151800Z August as observed by Land radar stations in the Ryukyu Islands.

clearly indicate that Irving oscillated about an overall north-northwest track (Fig. 3-12-3).


The relationship between Irving's surface and 500 mb centers during the earlier stages of development produced unusually large surface wind radii. Synoptic and aircraft data between 092000Z and 120000Z indicate that Irving's maximum wind band actually existed 150-200 nm (278-370 km) west of the large, calm-wind surface center. Although the maximum wind bands did eventually migrate towards the surface center, the wind radii remained large for the duration of Irving. The large wind radii may be related to Irving's developmental interaction with the 500 mb monsoon low and its large areal extent. Irving never became a tight, well developed tropical cyclone. Aircraft reconnaissance during the period of eyewall development indicated that Irving had a large 30 nm (56 km) diameter eye with the radius of over 30 kt (15 m/sec) winds extending outward 400 nm (741 km) in the eastern semi-circle.

Unlike Super Typhoon Hope, Typhoon Irving (Fig. 3-12-4) did not follow the intensification pattern suggested by JTWC's Equivalent Potential Temperature ( $\theta_e$ )/Minimum Sea-level Pressure Study. This study indicates that sea-level pressure should fall about 44 mb and maximum surface winds should intensify an average of 55 kt from the point where the  $\theta_e$  and pressure curves intersect (see Super Typhoon Hope, Figure 3-09-2). The reason why Irving failed to intensify further is not known.

Typhoon Irving was the first tropical cyclone to strike Korea in 1979. Rapidly weakening as he made landfall, Irving spared southern Korea from the destructive typhoon winds he had maintained through most of the East China Sea. Korea did, however, receive torrential rains which produced widespread flooding. The hardest hit area was the island of Cheju Do where 4.3 inches (109.7mm) of rain were reported at Cheju. Official estimates reported 150 dead or missing, 1000-2000 homeless and approximately 10-20 million US dollars damage to food and agriculture.



FIGURE 3-12-4. Although Typhoon Irving did not develop according to intensification studies, Irving did possess good feederband activity and cirrus outflow, 14 August 1979, 0228Z. (DMSP imagery)

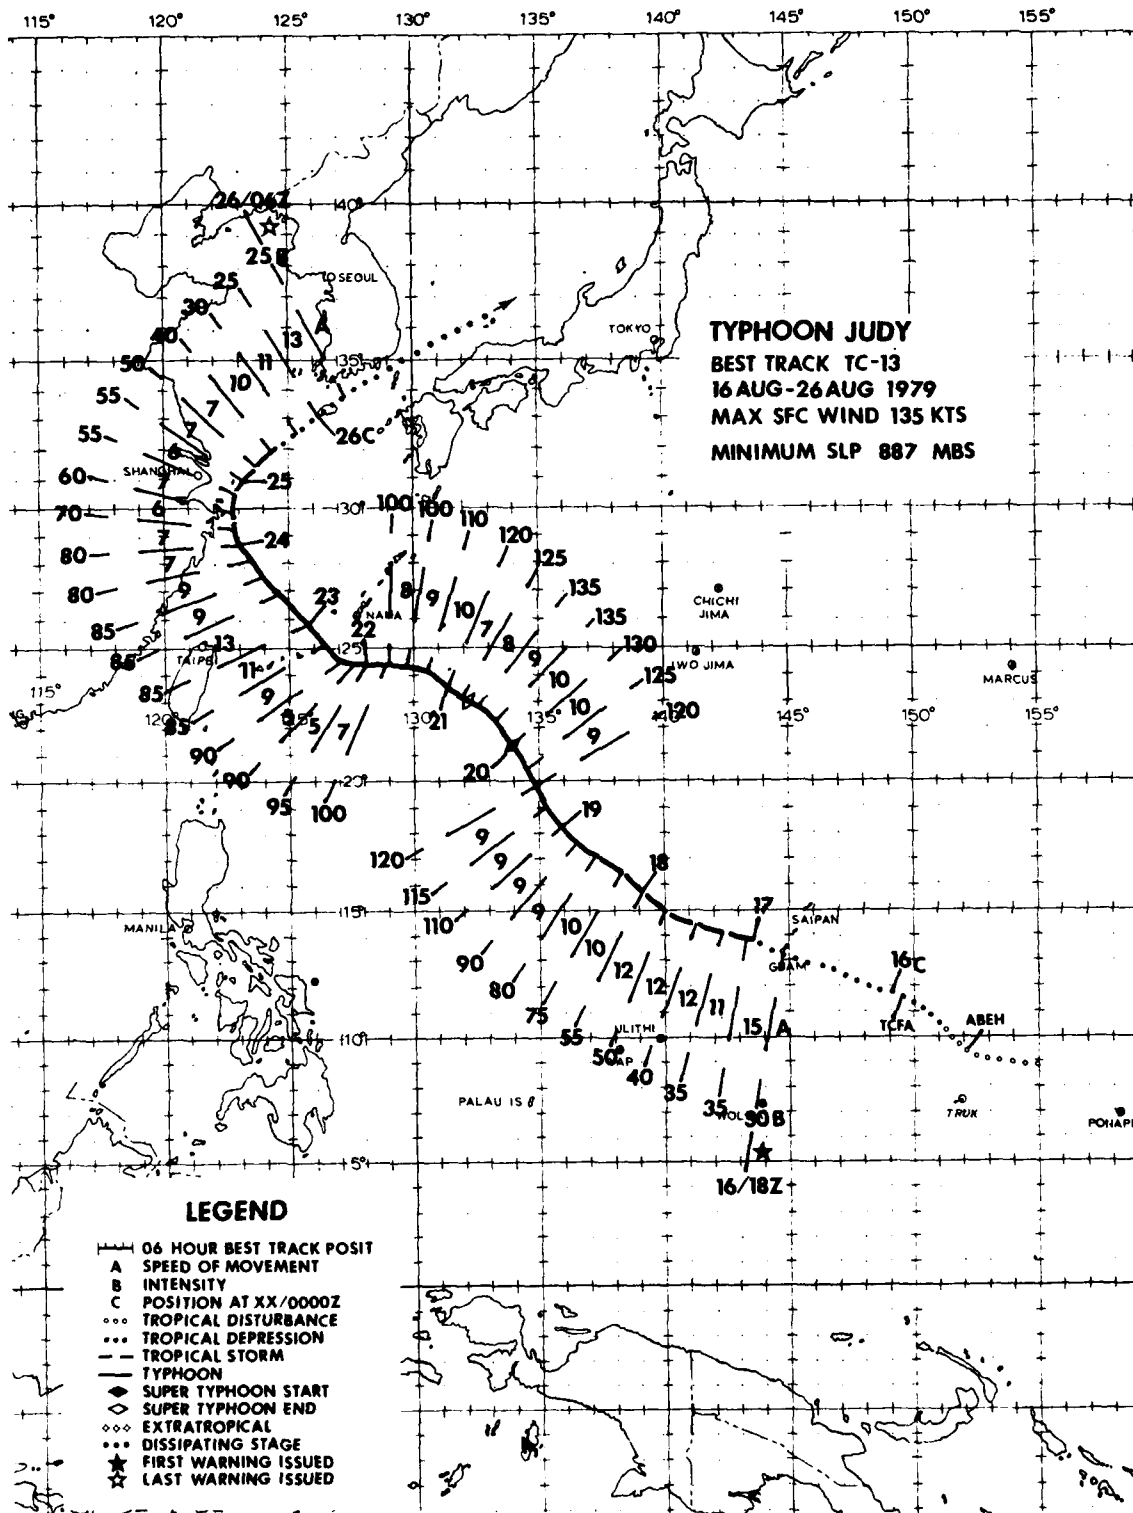

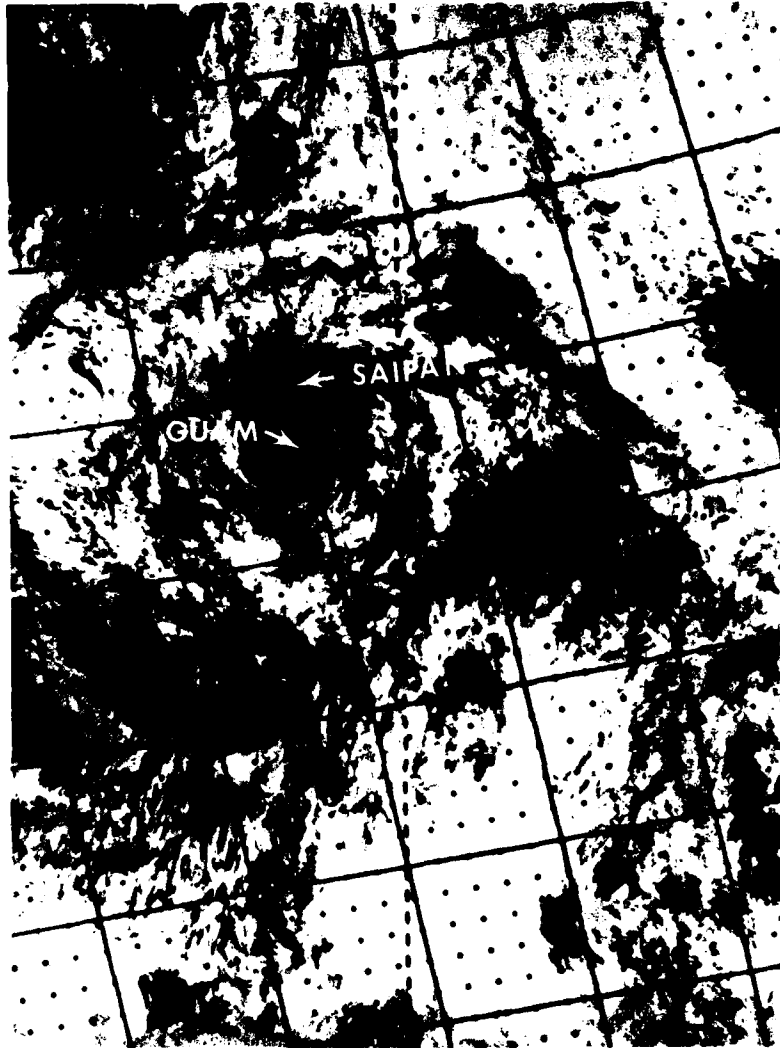


FIGURE 3-13-1. Infrared imagery of tropical disturbance (Judy) while southeast of Guam, 16 August 1979, 1120Z. The star denotes the approximate location of a weak surface center discovered by a reconnaissance aircraft about 4 hours earlier. (DMSP imagery)

Of all the typhoons of 1979, Judy's significance was only surpassed by Super Typhoon Tip. Judy eventually developed into the year's second super typhoon, but more importantly, she served as a reminder of how rapidly a minor tropical disturbance can develop into a dangerous tropical cyclone.

Surface synoptic data from the beginning to the middle of August showed that the area south and east of Guam was fairly inactive. Good cross-equatorial flow was

present, but only a few flare-ups of convective activity were noted. Surface circulations were broad, ill-defined and transient. By 15 August, however, synoptic and satellite data revealed a tropical disturbance, about 120 nm (222 km) east-northeast of Truk, which was to eventually become Typhoon Judy.

This area was closely monitored by JTWC, and when the satellite signature began to improve, a Tropical Cyclone Formation Alert was issued at 152100Z.



No significant pressure falls were observed over the area as the disturbance drifted slowly west-northwestward. A reconnaissance aircraft at 160700Z was able to define only a weak surface circulation with a MSLP of approximately 1006 mb and observed surface winds in the south semi-circle of 10 kt (5 m/sec) or less (Fig. 3-13-1).

Rapid intensification was not expected at that time, but at 161635Z, less than 10 hours after the aircraft investigation, weather radar at Andersen Air Force Base, Guam, located a well-defined circulation center moving west-northwest toward Guam at 15 kt (28 km/hr). Gradient-level wind reports from Guam, Truk, Palau and Ulithi at 161200Z also showed that the low-level inflow pattern associated with the disturbance had increased in areal extent. The disturbance continued tracking toward Guam and at 161800Z the center passed over the Naval Oceanography Command Center (NAVOCEANCOMCEN), Guam building on Nimitz Hill (Fig. 3-13-2). NAVOCEANCOMCEN reported a MSLP of 1001.0 mb and a wind gust to 51 kt (26 m/sec) at that time. Based on this "first-hand" information, JTWC issued the first warning on Tropical Storm Judy at 161900Z. Post-analysis revealed, however, that Judy did not reach tropical storm strength until 170000Z.

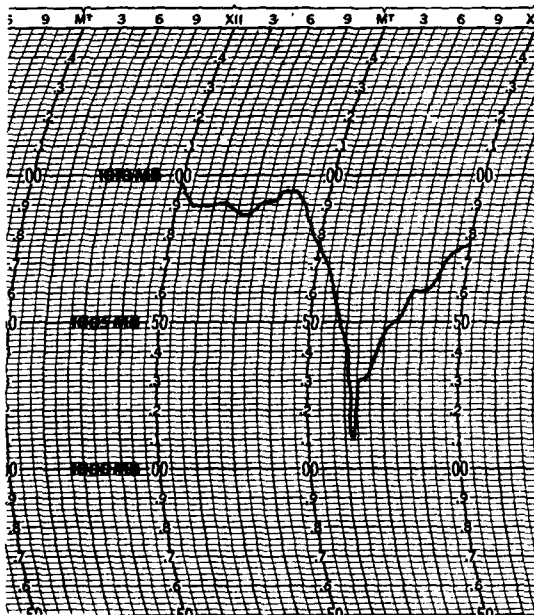


FIGURE 3-13-2. Microbarograph trace recorded at NAVOCEANCOMCEN, Guam during the passage of TD 13 (Judy) at about 161800Z, August 1979.

Judy intensified steadily while following a nearly climatological west-northwest track at 10-12 kt (19-22 km/hr) for the next 24 hours. She reached typhoon strength at approximately 180300Z. After that, a long-wave trough in the mid-level westerlies, moving over Japan toward the Pacific, fractured the subtropical mid-tropospheric ridge north of Judy, allowing her to track more to the northwest.

During the next 36-hour period, after reaching typhoon strength, Judy's central pressure dropped 69 mb and she attained super typhoon strength at 200000Z. Her lowest central pressure, 887 mb, was measured by a reconnaissance aircraft at 192145Z. Three distinct, concentric wall clouds were also noted at that time (Fig. 3-13-3). Super typhoon intensity was maintained until 201500Z, with gradual weakening thereafter.

Forecast aids indicated that Judy would pass to the south of Okinawa, but based on her persistence track and the deep trough that existed over Japan at 500 mb, Judy was forecast to recurve east of Okinawa. The steering aids were reacting to the mid-level PE Forecast series which built the ridge back between Japan and Judy. The numerical forecasts had not been verifying well up to that point, and, thus, the well-entrenched trough was forecast to persist. The numerical forecasts proved to be correct, however, and Judy did pass south of Okinawa before beginning to recurve into the East China Sea.

The rapidly intensifying ridge was expected to drive Judy into the Asian mainland south of Shanghai. The 500 mb analysis at 241200Z provided the first indication that Judy was not going to make landfall. At that time, she was just off the Chinese coast, but north of the mid-level ridge axis. Three-hourly synoptic reports from Sheng-Szu were watched closely and when the winds backed from east at 40 kt (21 m/sec) to north at 35 kt (18 m/sec), there was little doubt that Judy had, in fact, recurved to the northeast.

As Judy recurved, she was downgraded to tropical storm strength based on land synoptic data. Transition to an extratropical system occurred at 261200Z while Judy passed through the Korea Strait.

Due to being still relatively weak while passing over Guam, damage there was insignificant. Damage to Okinawa was also minimal, even though sustained winds of 40 kt (21 m/sec) were experienced for a 28-hour period. Southern Korea did not fare as well, however. One hundred eleven people were killed, over 8,000 houses were inundated, 57 vessels were destroyed and many thousands of acres of crops were ruined by Judy's torrential rains and strong winds.




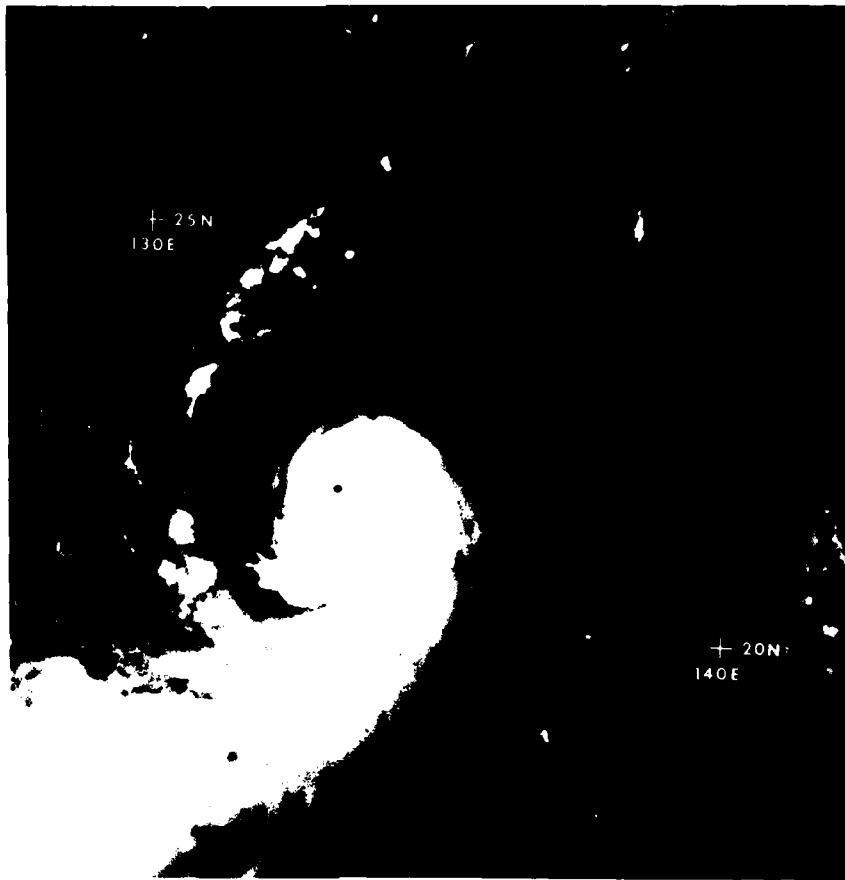


FIGURE 3-13-3. Judy as a super typhoon, 20 August 1979, 0219Z. (DMSP imagery)

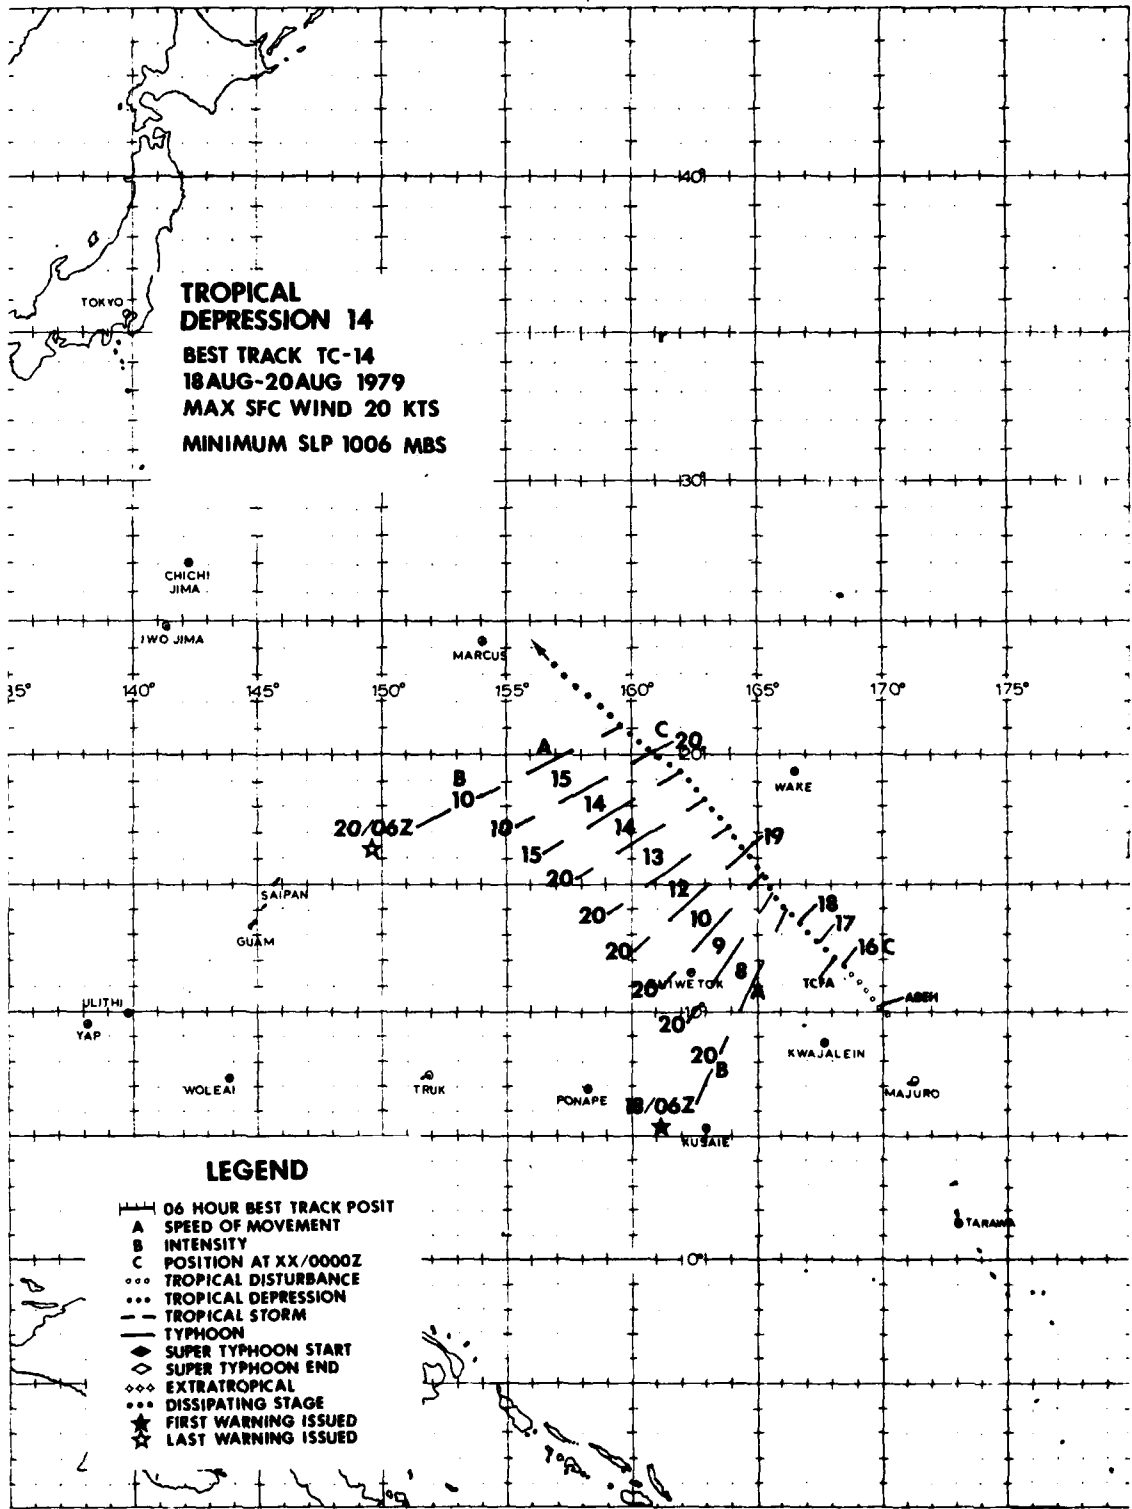

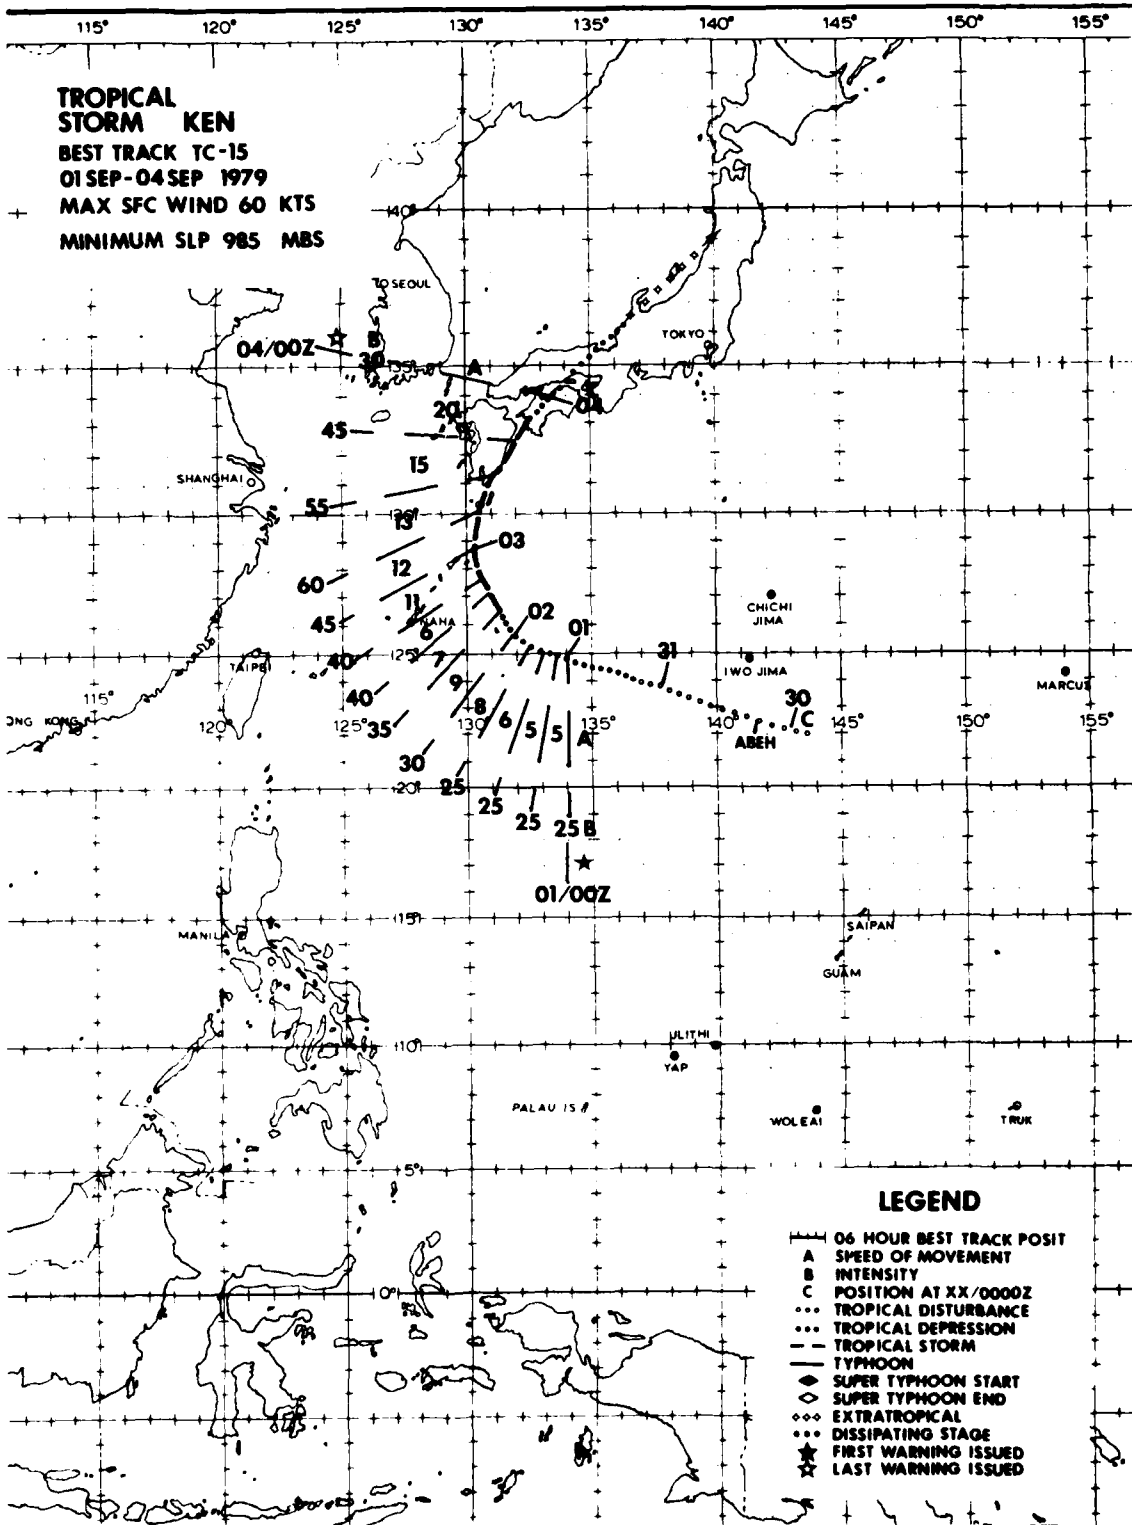

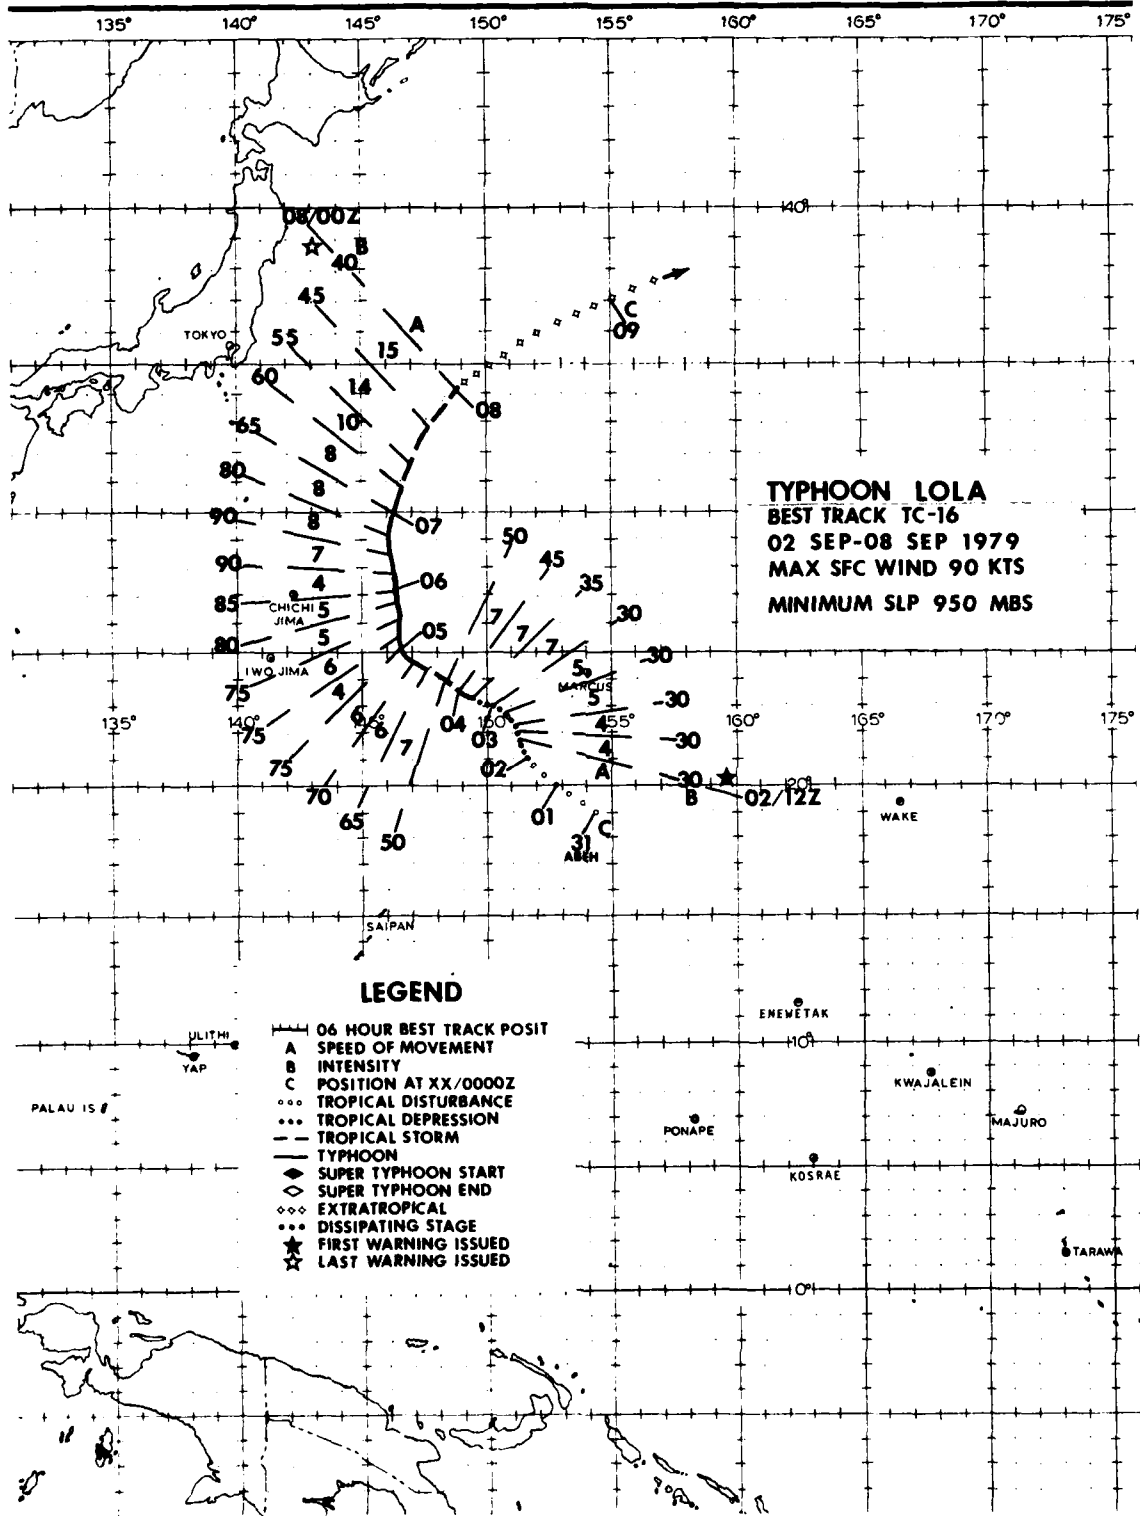

TROPICAL STORM KEN (15)  
AND TYPHOON LOLA (16)

Ken and Lola developed almost concurrently along the periphery of an upper-level TUTT. Satellite imagery on 1 September 1979 (Fig. 3-16-1) shows a number of disturbances organized into a line of convection ringing the TUTT in question from north of Kadena to south of Marcus. Ken developed from the disturbance just east of Kadena. At this same time, the disturbance which developed into Lola is south of Marcus and appears quite weak. The largest and most menacing middle disturbance northwest of Guam (Fig. 3-16-1) did not develop.

deepened southwestward over the middle disturbance and suppressed its convection. At the same time, it divided the convective line into the two distinct systems, Ken and Lola (Fig. 3-16-2).

After forming, Ken and Lola began to move in similar recurvature tracks. Ken tracked northward into the Sea of Japan reaching a maximum intensity of 60 kt (31 m/sec). Lola intensified into a typhoon and eventually transitioned into an extra-tropical system over the cooler waters east of Japan.

During the next 48 hours, the TUTT

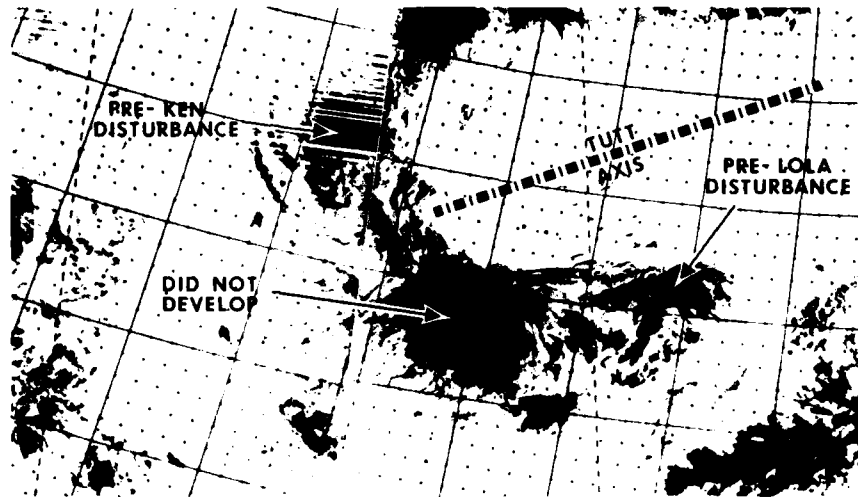


FIGURE 3-16-1. Line of tropical disturbances from which TS Ken and TV Lola eventually developed, 312257Z Aug - 010039Z Sep 1979. (DMSP imagery)


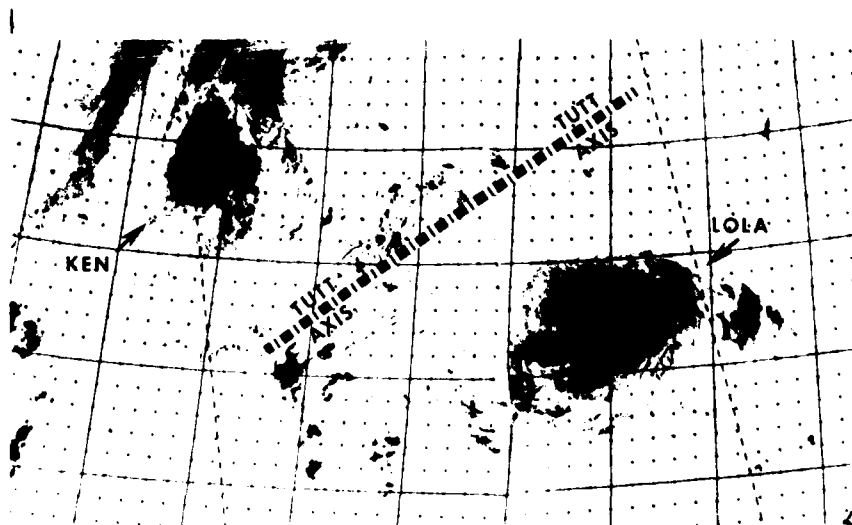


FIGURE 3-16-2. Ken at 45 kt (23 m/sec) intensity and Lola at 36 kt (15 m/sec) intensity, 022221Z - 030003Z Sep 1979. (DMSP imagery)

**TYPHOON MAC**  
**BEST TRACK TC-17**  
**15 SEP-24 SEP 1979**  
**MAX SFC WIND 70 KTS**  
**MINIMUM SLP 984 MBS**

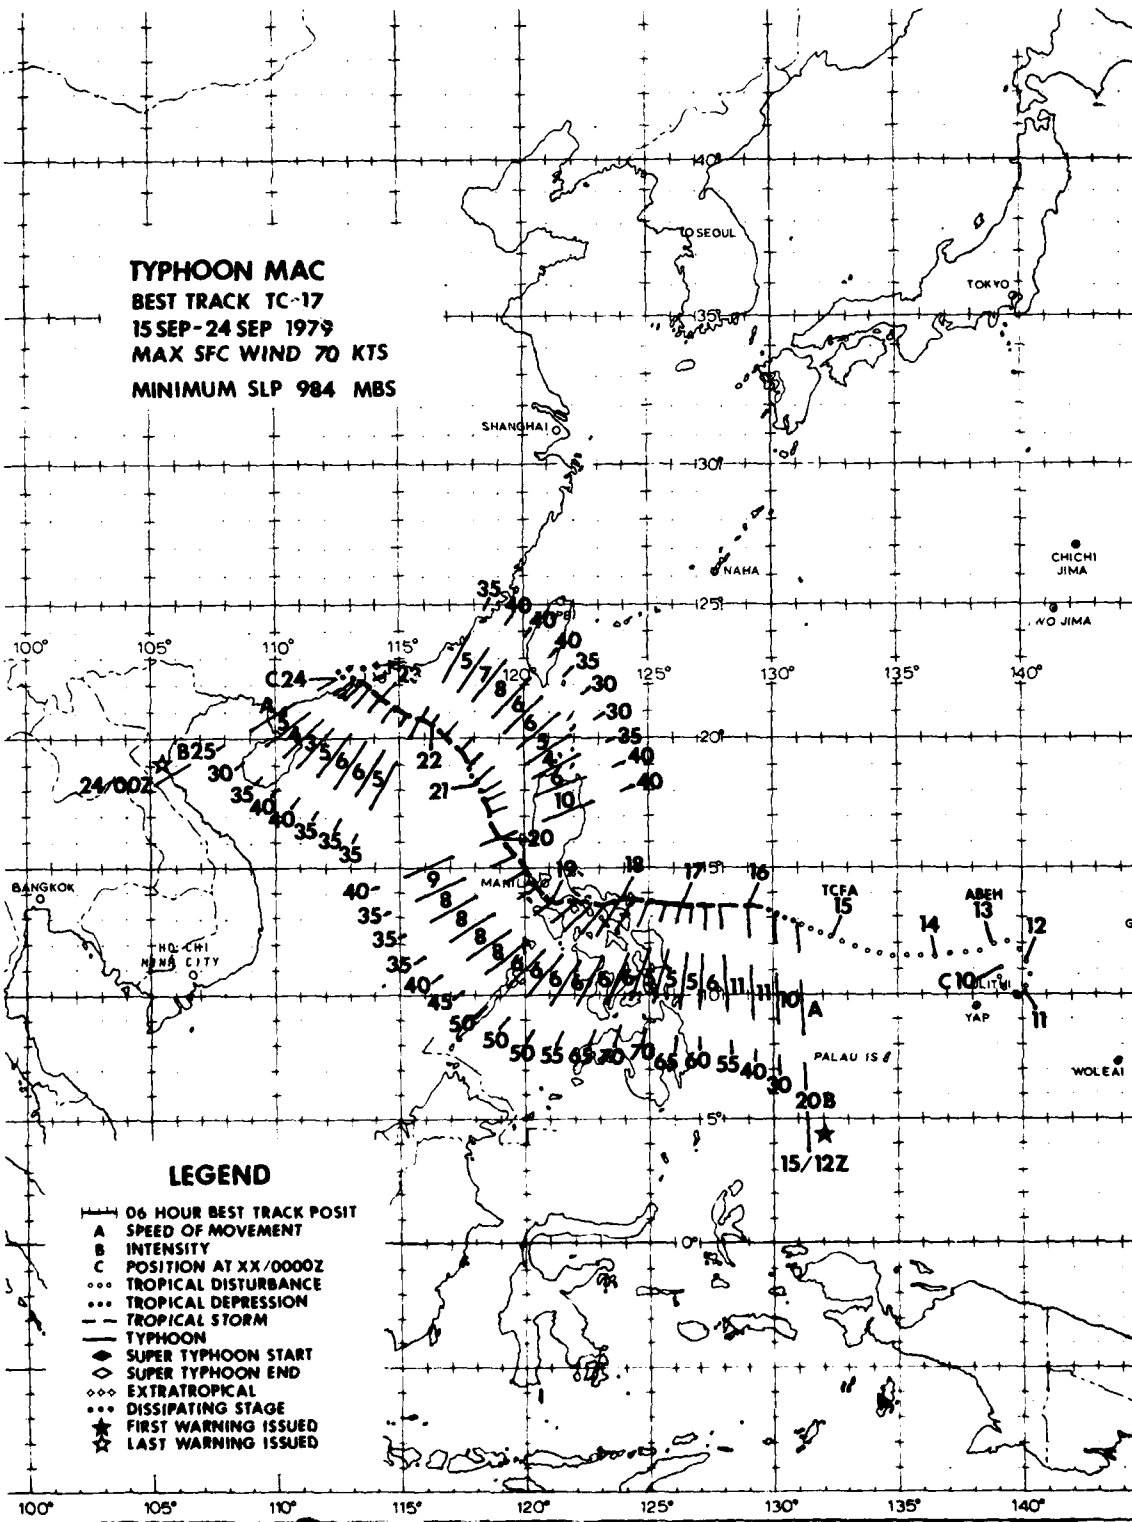

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- ... TROPICAL DISTURBANCE
- ... TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◆ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ◇◇ EXTRATROPICAL
- ... DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ★ LAST WARNING ISSUED

TYPHOON MAC (17) AND  
TROPICAL STORM NANCY (18)

Typhoon Mac developed from a weak surface circulation northeast of Yap in September 1979. This circulation tracked westward, reaching tropical storm intensity by 160000Z. Mac followed the climatological intensification rate for tropical cyclones approaching the Philippines and reached typhoon intensity prior to making landfall. Frictional effects caused Mac to weaken slowly as he tracked across southern Luzon towards the South China Sea. The unexpected development of Tropical Storm Nancy east of Hai-nan Island influenced Mac's track in the South China Sea.

JTWC's real-time forecasts do not always reflect the actual intensity of a tropical cyclone. Rapid intensification or weakening, peripheral data unavailable due to geographical restrictions, and tight maximum wind bands, which are not initially detected, all reduce the accuracy of intensity estimates provided in tropical cyclone warnings. These intensity discrepancies often go unrecognized until discovered during post-analysis, as in the case of Typhoon Mac.

Reanalysis of aircraft reconnaissance data from 16-18 September indicates that Mac most probably intensified to typhoon intensity by 161800Z. During the period 16-18 September, aircraft reconnaissance at 160503Z reported 68 kt (35 m/sec) at 1500 ft (457 m) and 60 kt (31 m/sec) on the surface prior to encountering moderate turbulence which forced the aircraft to climb through the overcast stratocumulus cloud layer above. Subsequent reconnaissance data at 170810Z confirmed typhoon intensity by locating 80-90 kt (41-46 m/sec) surface winds in a 10-nm (19 km) wide band tucked under the strong eastern feederband. Mac made landfall prior to the next scheduled aircraft fix with geographical constraints severely reducing peripheral data collection.

Although real-time data were available which indicated Mac had possibly reached typhoon intensity, the isolated reports of strong winds were dismissed as gusts associated with lower velocity sustained winds. (Aircraft data are occasionally not used verbatim when they fall outside reasonable limits after being analyzed with available surface reports, satellite data intensity estimates and the JTWC Maximum-Wind Minimum-Pressure Relationship (Atkinson and Holliday, 1977).) During post-analysis, the reconnaissance data were re-examined using an intensity study of tropical cyclones crossing the Philippines (Sikora, 1976). For typhoons with maximum sustained winds of less than 80 kt (41 m/sec), the study shows that an average intensification of 30 kt (15 m/sec) can be expected for tropical cyclones which follow a track similar to Mac's. Reanalysis of the period between 151800Z and 180000Z shows, in fact, that Mac intensified to typhoon intensity before weakening from frictional effects over Catanduanes Island on 18 September (Fig. 3-17-1).

The unexpected development of a second tropical cyclone in the South China Sea (SCS) produced a series of track and intensity modifications in Typhoon Mac. Upon exiting the Philippines, Mac, which was originally forecast to track west-northwest into the SCS, began a Fujiwhara interaction (Fig. 3-18-2) with the rapidly developing Tropical Storm Nancy located near Hai-nan Island. Instead of tracking west-northwest, Mac tracked north-northwest, skirting Cubi Point Naval Air Station, Philippines, on his new track toward Hong Kong. Strong anticyclonic outflow from Nancy sheared Mac's convection towards the southwest with aircraft reconnaissance reporting an exposed low-level circulation of 30-35 kt (15-18 m/sec) intensity on the 20th.

Weak steering currents allowed Nancy to take a cyclonic track across southern Hai-nan Island before heading southwestward into Vietnam. Nancy's southwestward track towards landfall forced Mac further north than originally forecast. Mac eventually passed just south of Hong Kong. Ironically, Nancy's development, which caused Mac to track towards Hong Kong, also helped to spare Hong Kong from potential typhoon force winds. Nancy's upper-level outflow, which dominated the SCS from 19-23 September, produced strong vertical shear over Mac and slowed his rate of reintensification. Typhoon Mac only reached minimal tropical storm intensity prior to making landfall west of Hong Kong.


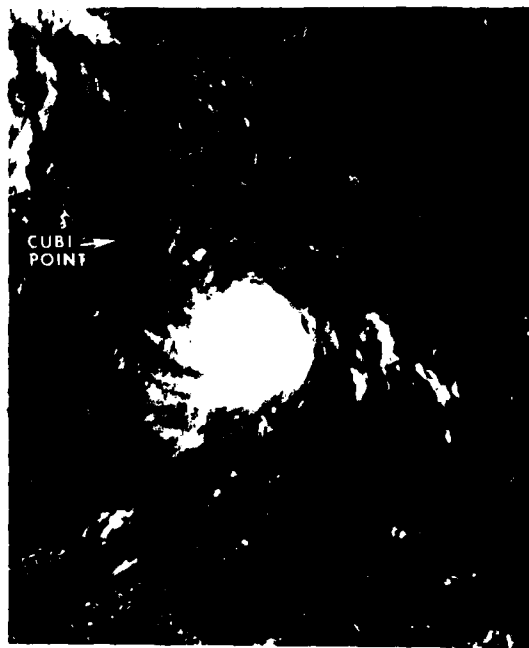


FIGURE 3-17-1. Typhoon Mac after crossing Catanduanes Island, Philippines, 18 September 1979, 0038Z. (DMSP imagery)



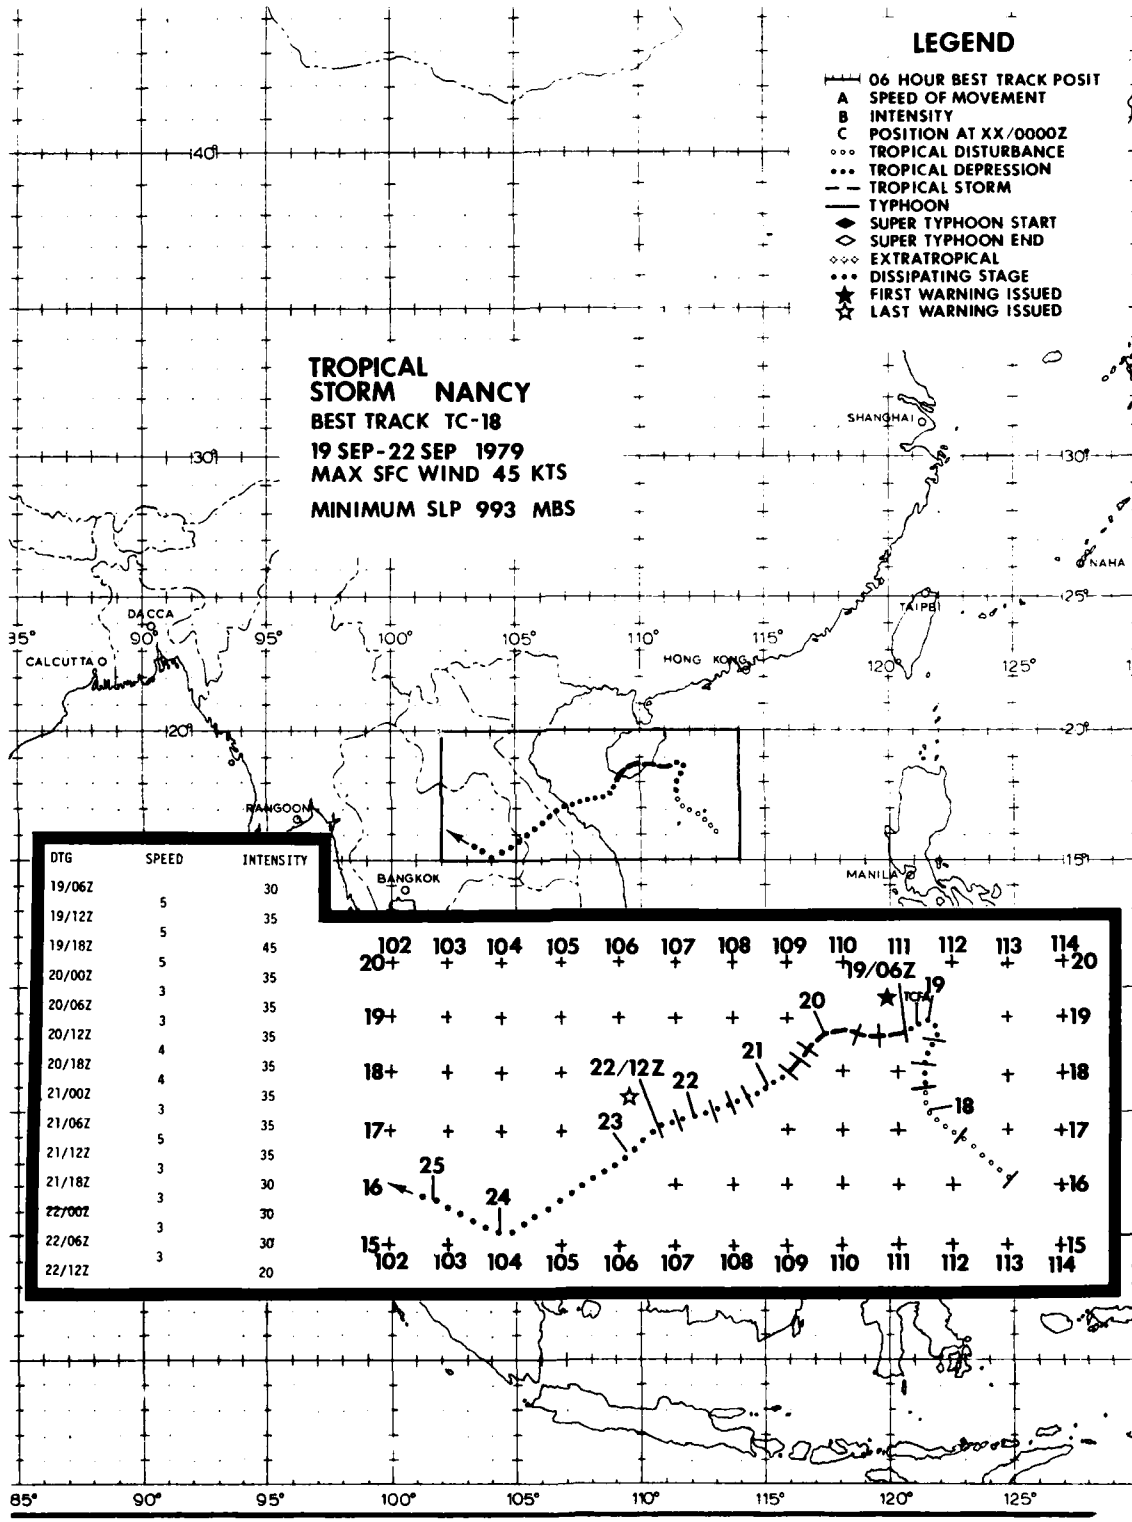

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- TROPICAL DISTURBANCE
- TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◇ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ◇◇◇ EXTRATROPICAL
- DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ☆ LAST WARNING ISSUED

**TROPICAL STORM NANCY**  
**BEST TRACK TC-18**  
**19 SEP-22 SEP 1979**  
**MAX SFC WIND 45 KTS**  
**MINIMUM SLP 993 MBS**

DTG	SPEED	INTENSITY
19/06Z		30
19/12Z	5	35
19/18Z	5	45
20/00Z	5	35
20/06Z	3	35
20/12Z	3	35
20/18Z	4	35
21/00Z	4	35
21/06Z	3	35
21/12Z	5	35
21/18Z	3	30
22/00Z	3	30
22/06Z	3	30
22/12Z	3	20

DTG	102	103	104	105	106	107	108	109	110	111	112	113	114	
19/06Z	20+	+	+	+	+	+	+	+	+	+	+	+	+20	
19/12Z	19+	+	+	+	+	+	+	+	+	★	+	+	+19	
19/18Z	18+	+	+	+	22/12Z	22	21	+	+	+	+	+	+18	
20/00Z	17+	+	+	+	23	+	+	+	+	+	+	+	+17	
20/06Z	16	25	+	+	+	+	+	+	+	+	+	+	+16	
20/12Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
20/18Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
21/00Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
21/06Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
21/12Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
21/18Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
22/00Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
22/06Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114
22/12Z	15+	102	103	104	105	106	107	108	109	110	111	112	113	114

TROPICAL STORM NANCY (18)

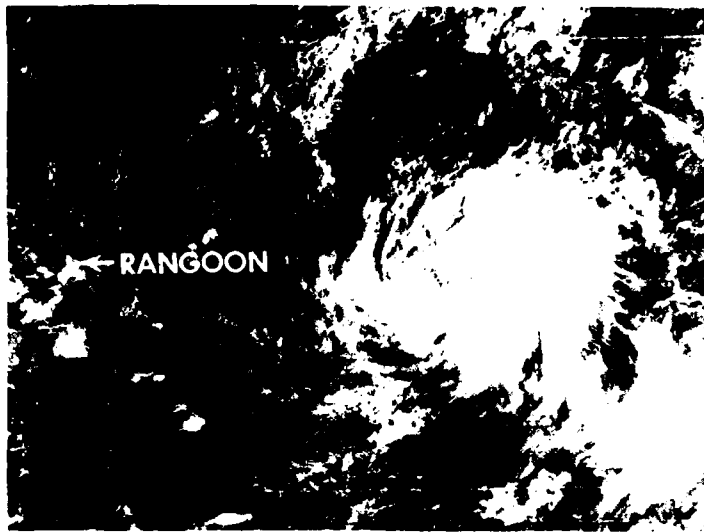


FIGURE 3-18-1. Tropical Storm Nancy at 35 kt (18 m/sec) intensity just after landfall on the southern end of Hai-nan Island, 20 September 1979, 0143Z. (DMSP imagery from Det 8, 1WW, Kadena AB, Okinawa)


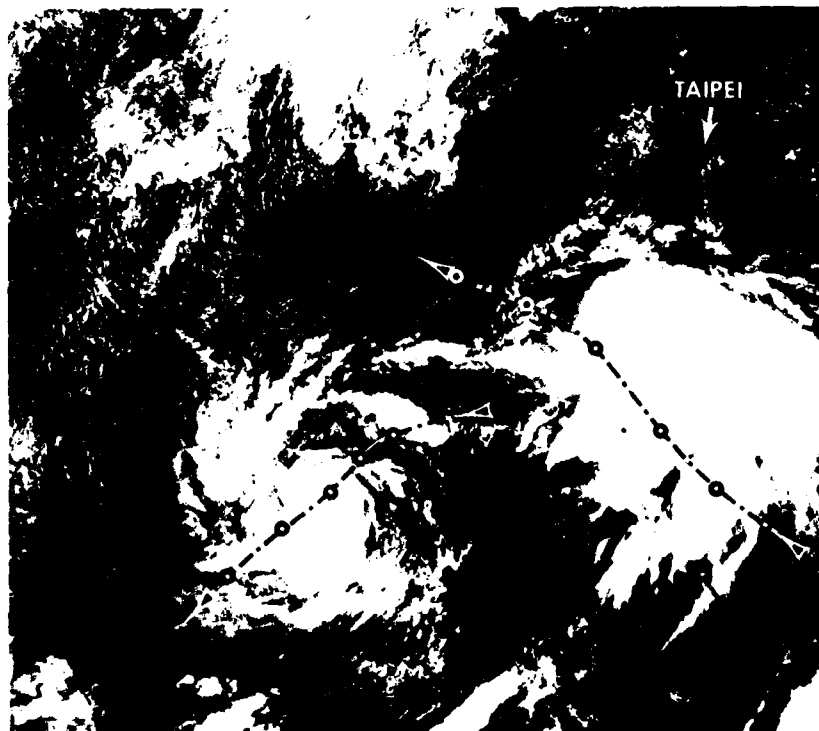


FIGURE 3-18-2. Typhoon Mac and Tropical Storm Nancy undergoing Fujiwhara interaction over the South China Sea, 22 September 1979, 0302Z. The 48-hour tracks before and after picture time are superimposed (Dots bracket 24-hour intervals). (DMSP imagery from Det 5, 1WW, Clark AB, RP)

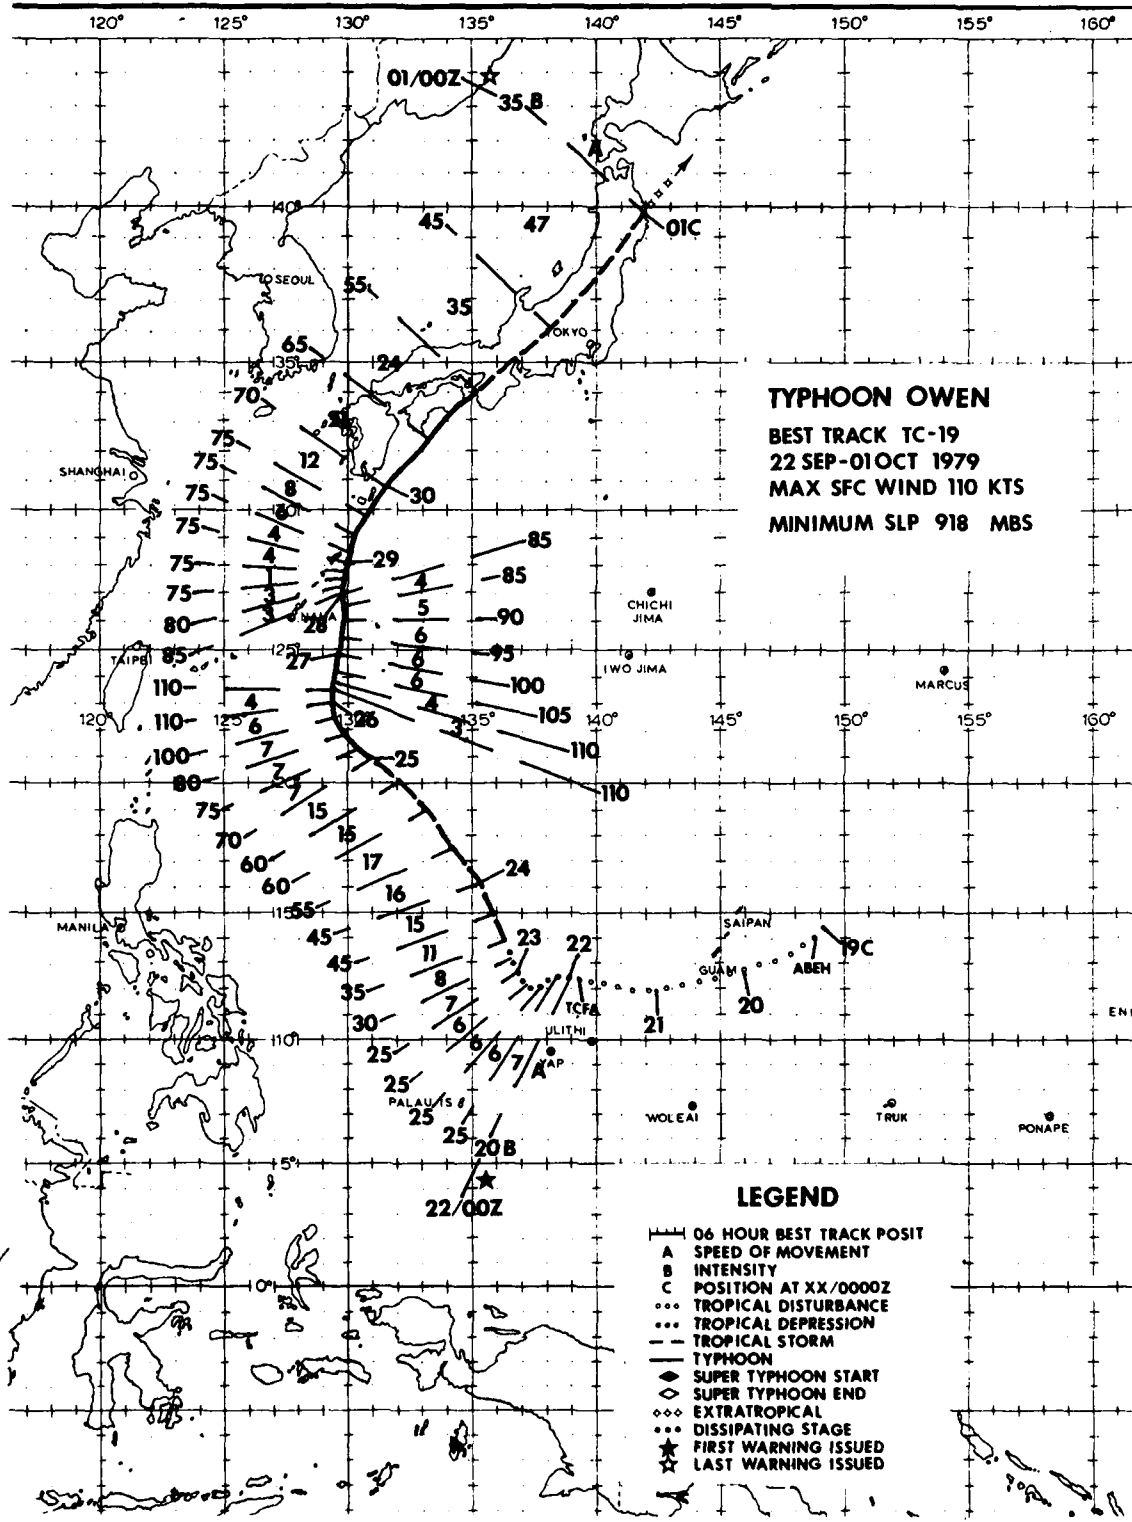

TYPHOON OWEN (19)

Typhoon Owen developed from a disturbance which tracked south of Guam during 20 September 1979. Two days later, satellite imagery (Fig. 3-19-1) showed that the system was organizing at the same time that aircraft reconnaissance data indicated a definite surface circulation with a 1000 mb central pressure. This prompted JTWC to issue a tropical depression warning on the system at 220000Z.

During the 2 days prior to and 1 day after 22 September, the system moved on a generally westward track at 5 to 8 kt (9 to 15 km/hr). This speed and direction was in good agreement with climatological tracks. Also, the 500 mb analysis showed a strong subtropical ridge which indicated westward steering. Based on this information, JTWC forecast westward movement for the first 8 warnings. However, Owen unexpectedly turned sharply to the north and began moving at speeds of 15 kt (28 km/hr).

Post-analysis revealed a possible reason for this movement. Figure 3-19-2 shows

the 221200Z analyses at 500 mb and 200 mb superimposed. An upper-level trough is evident on the 200 mb analysis just west of the cyclone. Southerly winds of 50 kt (26 m/sec) were observed on the eastern periphery of the trough. Considerable vertical shear existed in the layer from 500 mb to 200 mb. It appears that the steering and depth of this upper-level trough rather than 500 mb steering was the dominant feature in Owen's movement. Under its influence, Owen tracked generally northward throughout his lifetime, although undergoing major changes in speed. He slowed to a barely perceptible 1-kt (2 km/hr) movement just northeast of Okinawa (at the latitude of the subtropical ridge axis) and then dramatically accelerated to 24 kt (44 km/hr) 36 hours later under vertically consistent westerly steering. At this time, Owen made landfall near Osaka, Japan and began weakening in intensity while still accelerating to 47 kt (87 km/hr). Eventually, he transitioned into an extratropical system but not before reaching a maximum intensity of 110 kt (57 m/sec) (Fig. 3-19-3) on 26 September.

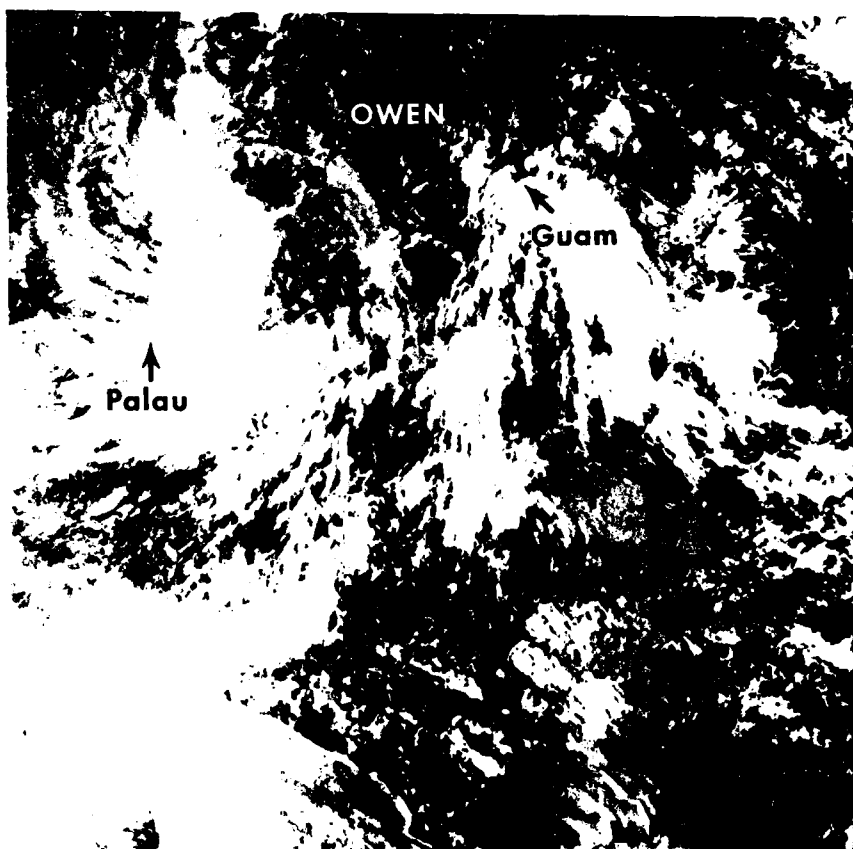


FIGURE 3-19-1. Typhoon Owen as a tropical disturbance, 21 September 1979, 2326Z. [DMSP imagery]


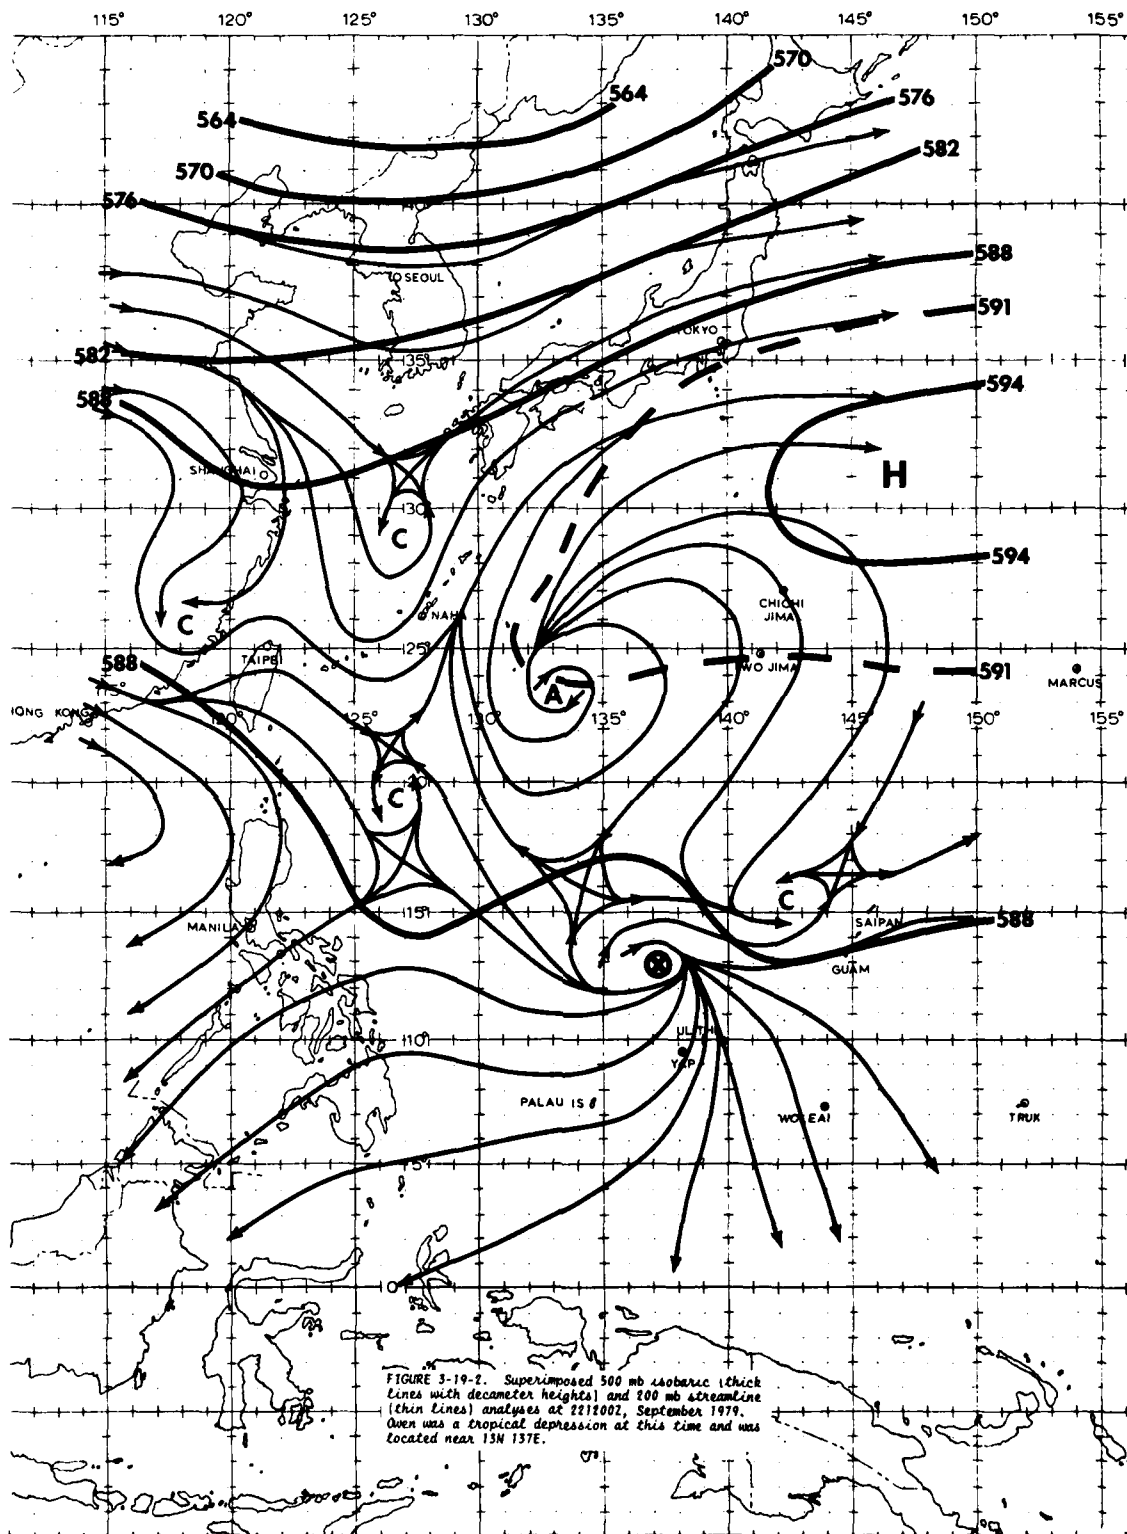


FIGURE 3-19-2. Superimposed 500 mb isobaric (thick lines with decimeter heights) and 200 mb streamline (thin lines) analyses at 221200Z, September 1979. Over was a tropical depression at this time and was located near 134 13.7E.



FIGURE 3-19-3. Typhoon Owen at maximum intensity of 110 kt (57 m/sec), 26 September 1979, 0145Z. (DMSP imagery)

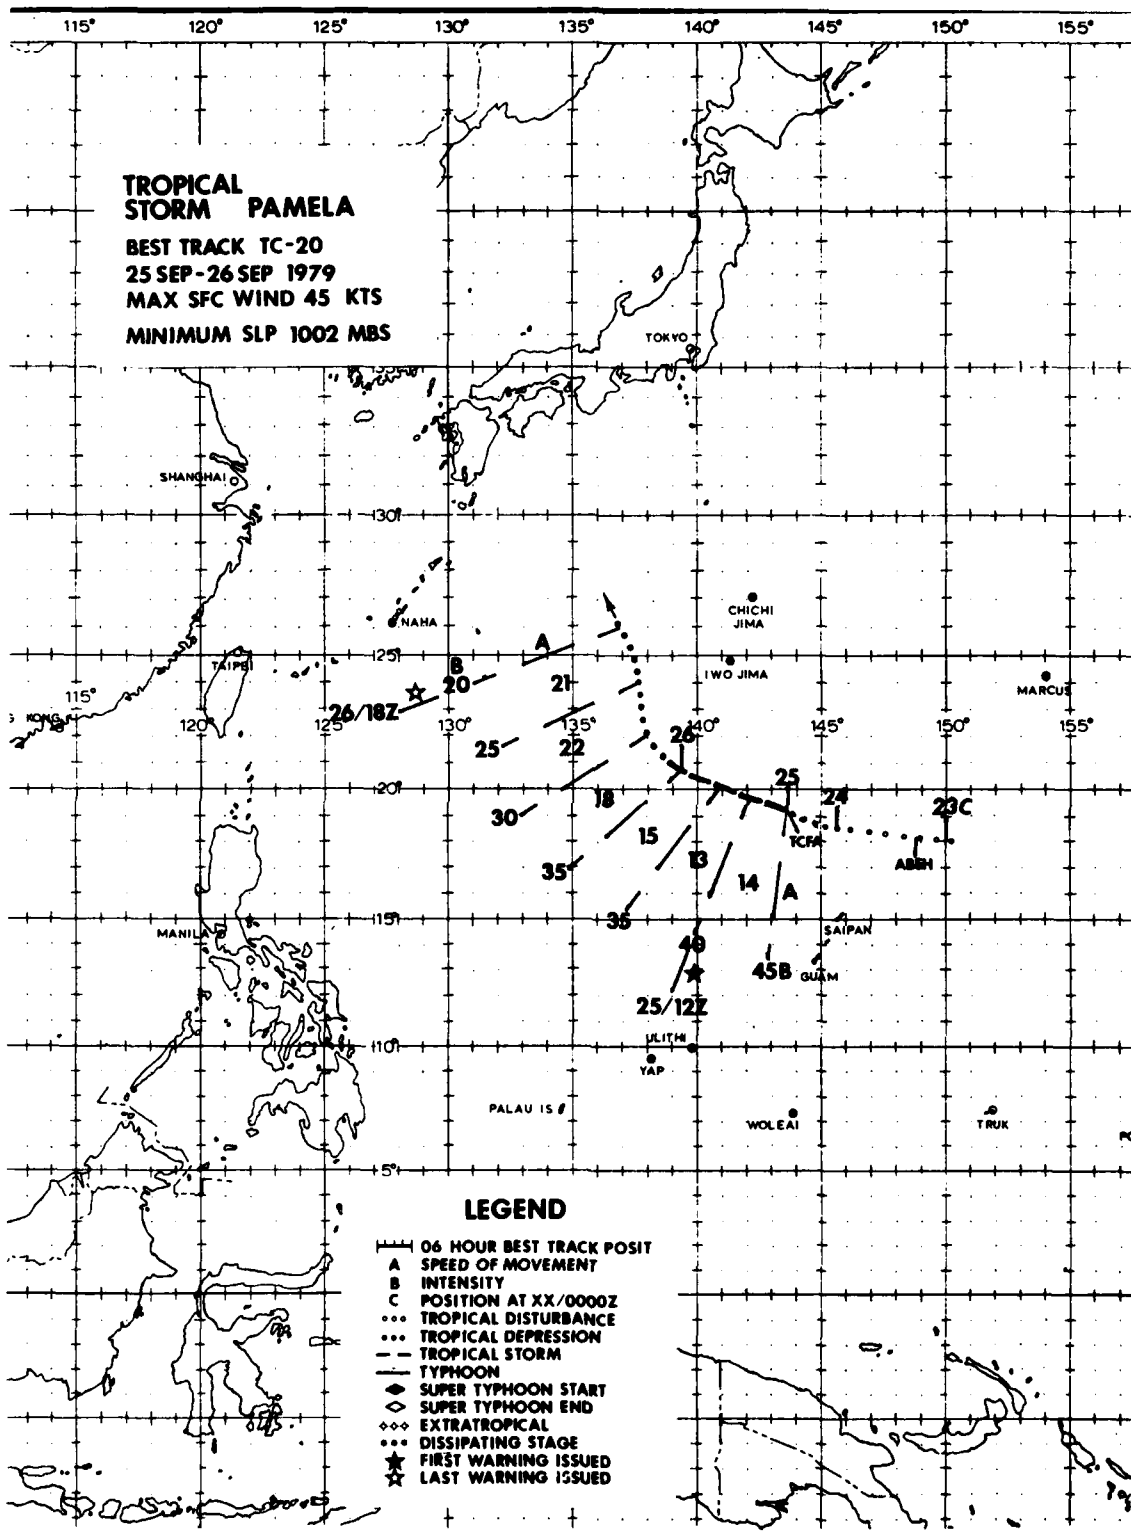

TROPICAL STORM PAMELA (20)

Developing at the apex of a wave in the easterly flow in late September 1979, Tropical Storm Pamela tracked westward, north of the Mariana Islands, and dissipated in Typhoon Owen's eastern feeder band under strong vertical shear (Fig. 3-20-1).

A JTWC pressure-wind relationship study (Atkinson and Holliday, 1977) suggested TS Pamela's maximum intensity should have ranged between 25-30 kt (13-15 m/sec) for the concomitant 1002-1003 mb minimum sea-level pressure reported. Instead, aircraft data at 250827Z reported a very narrow,

transient wind band of 60 kt (31 m/sec) north and east of the surface center. The ARNO on this mission indicated that surface winds may have been even higher than the reported 60 kt (31 m/sec). Subsequent aircraft investigations were not able to locate winds greater than 25 kt (13 m/sec). The occurrence of maximum winds which exceed the range of the JTWC tropical cyclone pressure-wind relationship is encountered several times each season. Although several explanations have been offered for these anomalies, none have been substantiated.


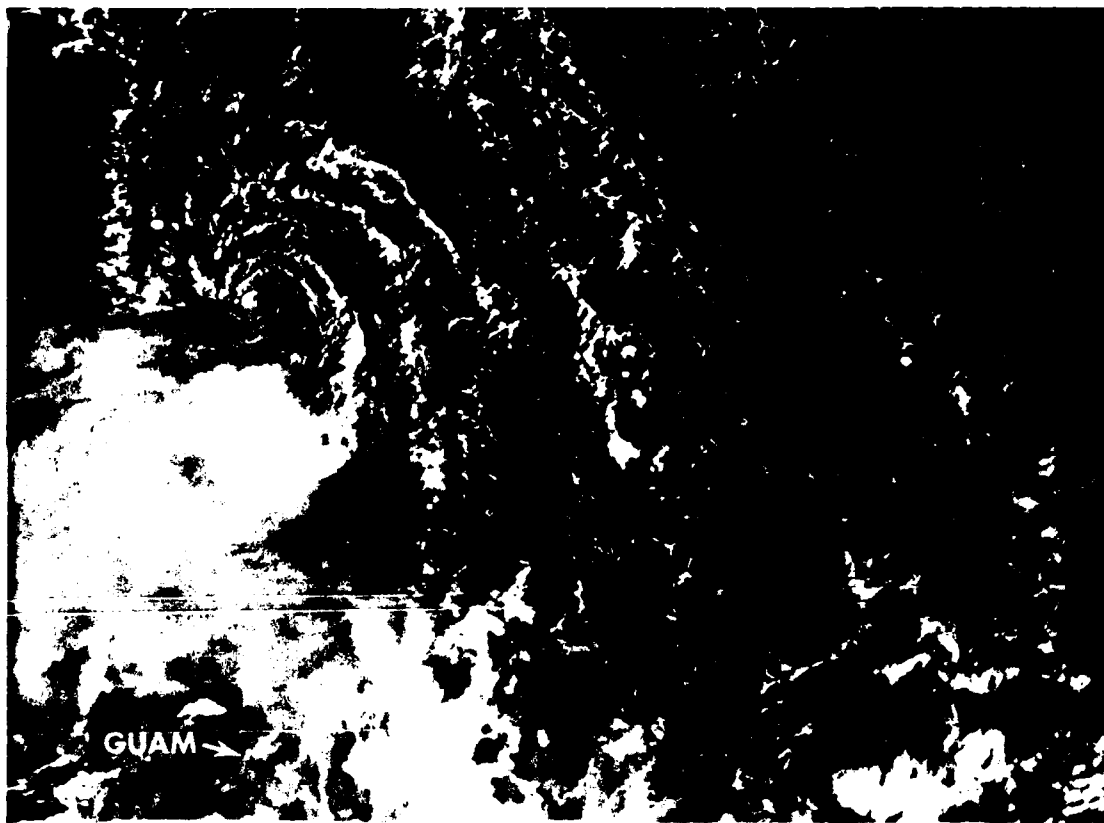


FIGURE 3-20-1. Tropical Storm Pamela with maximum sustained winds of 45 kt (23 m/sec), 24 September 1979, 2232Z. The exposed low-level circulation was a result of strong vertical shear produced by Typhoon Owen. (DMSP imagery)



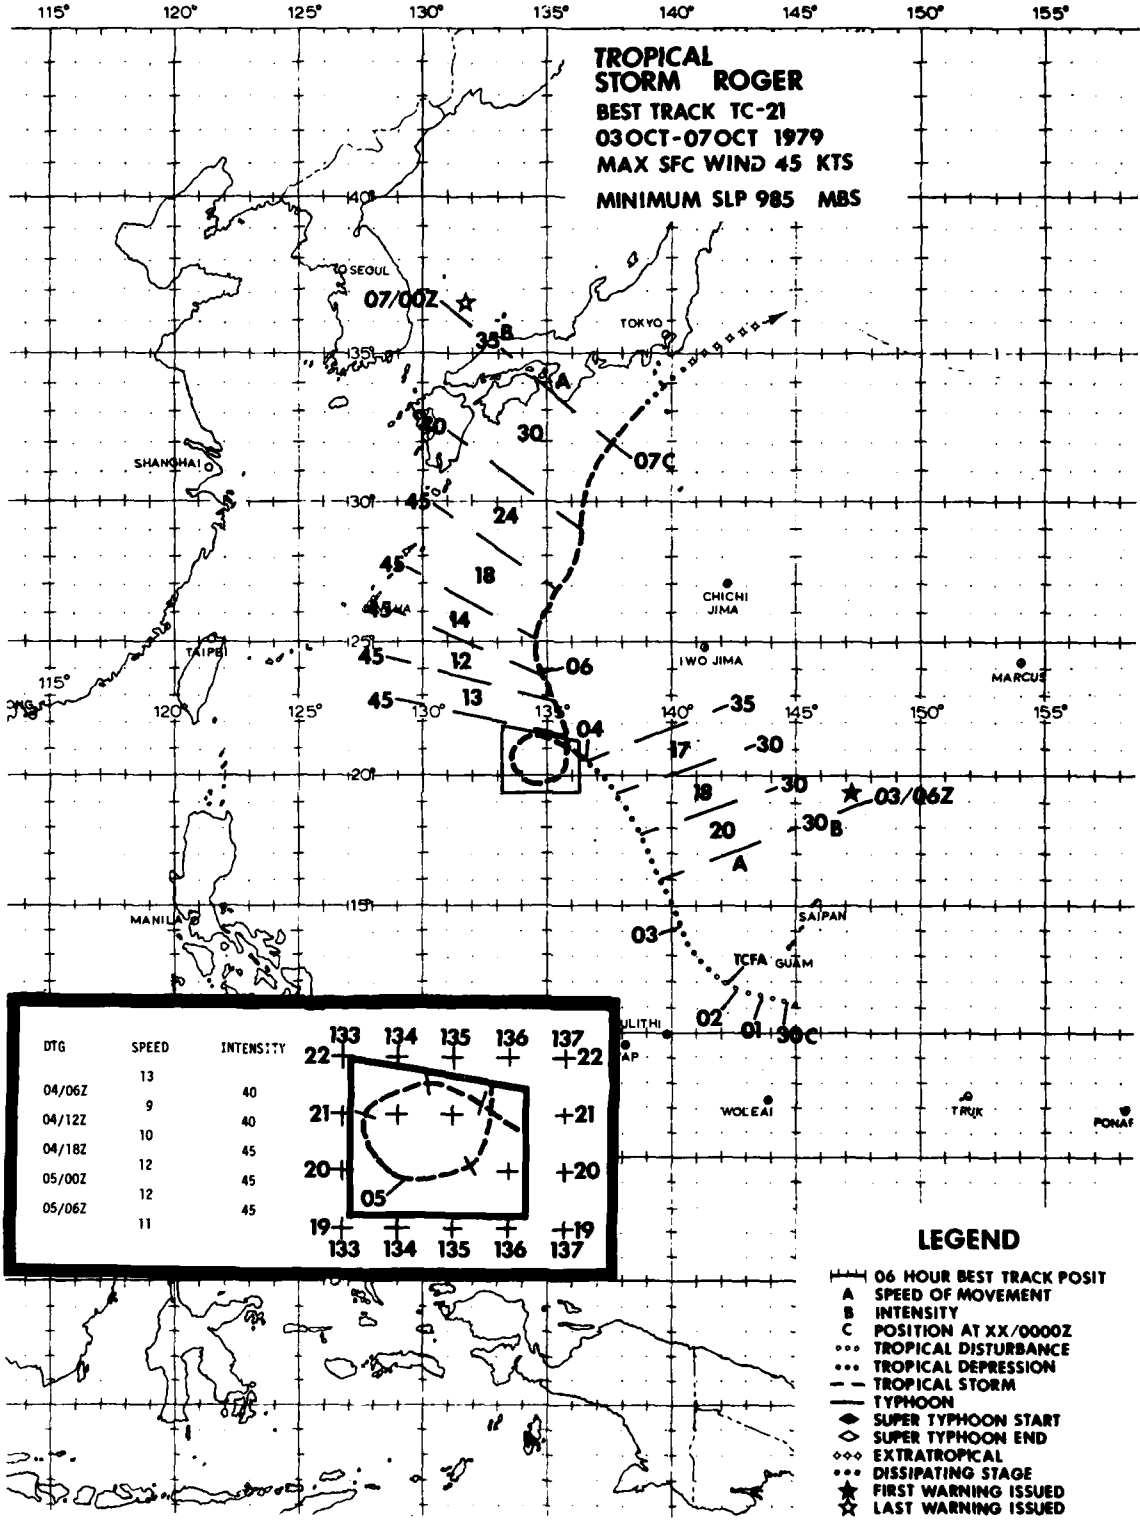

TROPICAL STORM ROGER (21)

As Typhoon Owen began recurving toward Japan, activity increased in the monsoon trough that extended over the Caroline Islands. The increased activity was noted in the Significant Tropical Weather Advisory (ABEH PGTW) on 28 September. For the next 5 days, 2 weak surface circulations and associated cloud clusters within the broad trough, one southwest of Guam and the other southeast of Guam, were closely monitored. As Owen began weakening over Japan, the southwest monsoon flow into the trough oriented NW-SE increased on 30 September, and a line of strong convective activity developed from the southern Philippines to a position south of Guam.

Post-analysis indicated the existence of a weak circulation southwest of Guam which was to become Tropical Storm Roger. During the entire time preceding the issuance of the first warning on Roger, JTWC's attention was focused on another area of major convective activity 5° west of the circulation center which was associated with strong low-level convergence and cyclonic shear. Gradient-level winds at Yap of 56 kt (29 m/sec), Palau 52 kt (27 m/sec) and Guam 28 kt (14 m/sec) are indicative of the strong low-level winds around the periphery of the trough. Thus, the initial and the reissued formation alerts (020600Z Oct and 022200Z Oct) covered the area of heavy convective activity rather than the actual surface circulation center.

Numbered warnings began at 0600Z on 3 October when a reconnaissance aircraft at

030220Z reported a surface pressure of 998 mb and estimated surface winds of 40 kt (21 m/sec) in a band of strong southwesterly flow 60 nm (111 km) south of the surface center. The aircraft also observed a calm wind center at the surface of 30 nm (56 km) in diameter with clear skies over the area.

Synoptic and satellite data at 031200Z indicated that TD 21 was beginning to separate from the broad trough as convective activity was becoming more directly associated with the circulation center (Fig. 3-21-1). TD 21 was upgraded to a tropical storm at 0600Z on 4 October based on 35 kt (18 m/sec) surface winds and a 982 mb sea-level pressure reported by aircraft reconnaissance at 040308Z. Post-analysis indicates tropical storm intensity was attained 6 hours earlier.

A break in the mid-tropospheric subtropical ridge north of Roger existed as Owen recurved over Japan. The strong mid-level southeasterly steering current along the southwestern periphery of the ridge was responsible for Roger's 15 to 20 kt (8 to 10 m/sec) northwestward movement. The ridge retreated eastward between 0000Z and 1200Z on 4 October as a mid-level trough deepened over Korea. The loss of definitive steering flow permitted Roger to execute a cyclonic loop. After emerging from the loop, Roger continued on a northwestward track until north of the ridge axis, after which he accelerated north-northeastward. Extratropical transition was complete by 070600Z as Roger merged with a cold front south of Japan.


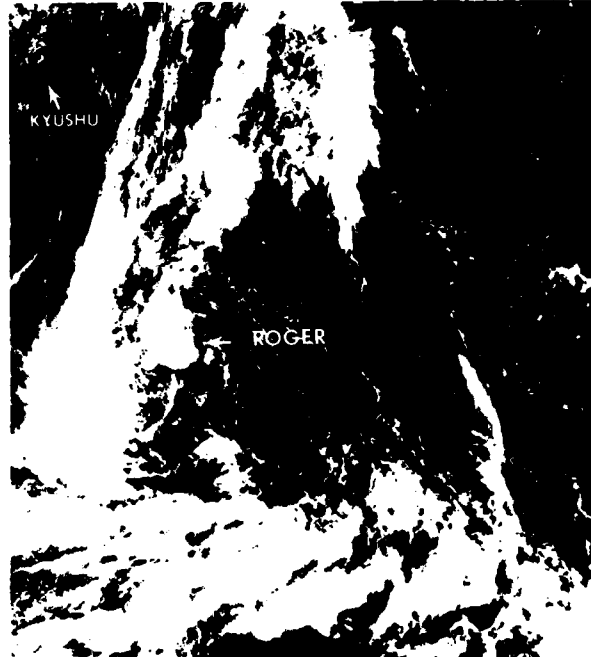


FIGURE 3-21-1. Tropical Storm Roger at 35 kt (18 m/sec) intensity 04 October 1979, 0054Z. (DNMSP imagery)

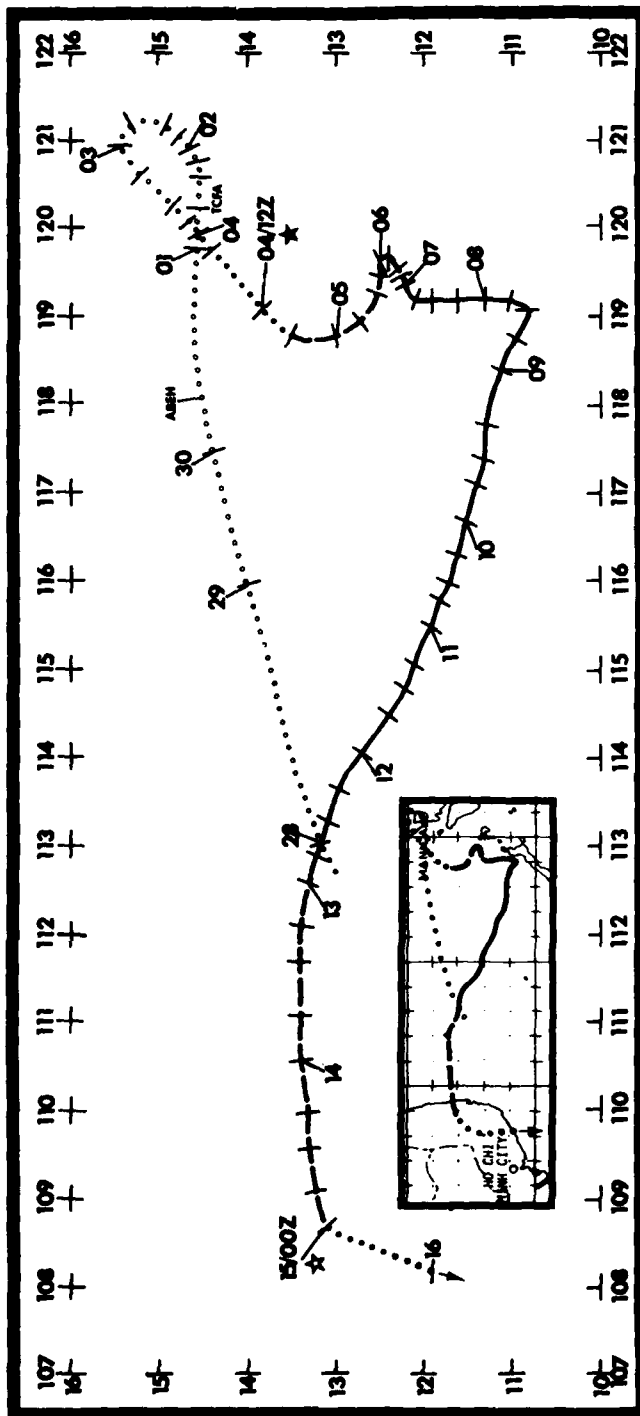

**TYPHOON SARAH**  
**BEST TRACK TC-22**  
**04 OCT - 15 OCT 1979**  
**MAX SFC WIND 110 KTS**  
**MINIMUM SLP 929 MBS**

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- ... TROPICAL DISTURBANCE
- ... TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◆ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ◇◇◇ EXTRATROPICAL
- ... DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ★ LAST WARNING ISSUED

DATE	SPEED	INTENSITY	DATE	SPEED	INTENSITY	DATE	SPEED	INTENSITY	DATE	SPEED	INTENSITY
04/12Z	5	30	07/18Z	3	75	10/18Z	3	100	14/00Z	6	55
04/18Z	5	35	08/00Z	3	75	11/00Z	4	100	14/06Z	5	50
05/00Z	4	40	08/06Z	3	75	11/06Z	3	90	14/12Z	5	50
05/06Z	4	40	08/12Z	2	75	11/12Z	3	85	14/18Z	5	35
05/12Z	3	40	08/18Z	3	75	11/18Z	4	75	15/00Z	5	20
05/18Z	2	40	08/00Z	4	75	12/00Z	5	75			
06/00Z	2	40	09/00Z	6	85	12/06Z	5	70			
06/06Z	1	40	09/06Z	5	90	12/12Z	4	65			
06/12Z	1	45	09/12Z	4	90	12/18Z	4	65			
06/18Z	1	50	09/18Z	4	95	13/00Z	4	60			
07/00Z	1	60	10/00Z	3	110	13/06Z	5	60			
07/06Z	2	75	10/06Z	3	110	13/12Z	6	60			
07/12Z	2	75	10/12Z	3	100	13/18Z	3	60			

## TYPHOON SARAH (22)

Typhoon Sarah spawned in the monsoonal trough during late September 1979. This trough extended from the southwestern portion of the South China Sea toward Luzon. A northeast monsoon surge existed north of the trough, while the southwest monsoon dominated the area south of the trough. The circulation was steered initially by the southwest monsoon and then later by the first northeast surge of the fall from the Asian mainland. During the last few days of September, the circulation meandered slowly toward Luzon under the influence of the southwest monsoon, and then looped over Luzon during the first three days of October as a mid-tropospheric short-wave trough moved eastward north of Luzon. Once the short-wave trough had moved east of the circulation, the northeast surge intensified and became more of an influence as the circulation finished its loop and began its south-southwest track.

On 5 and 6 October, Sarah, now a tropical storm, apparently was again influenced by another mid-tropospheric short-wave trough which moved across Sarah's longitudinal position and induced the brief eastward movement in her track. At this time, the southwest monsoon also increased in intensity and may have been another factor in steering Sarah eastward. For almost the entire period that Sarah was tracking southward, there was a weakness in the mid-tropospheric ridge between the Philippines and the Asian mainland, enabling Sarah's track to be influenced by short-wave troughs. This weakness in the ridge resulted in mid-tropospheric flow that was too weak to significantly affect the steering of Sarah. This weakness allowed the surface winds to dictate Sarah's direction of motion through the first 8 days of October. Figures 3-22-1 and 3-22-2 illustrate the surface and mid-level flow patterns which influenced Sarah during this phase of her track.

During Sarah's depression stage, strong easterlies in the upper-troposphere restricted Sarah's outflow to the northeast, thus inhibiting development into a tropical storm. As Sarah proceeded southward, the easterlies decreased in strength, outflow increased, and Sarah intensified to tropical storm and then typhoon strength. It is very interesting to note that Sarah intensified to typhoon strength while tracking southward which is quite unusual for a tropical cyclone. Several aircraft reconnaissance flights reported that Sarah had attained typhoon strength even though her cloud structure was not well organized.

During the first several days of October when Sarah was slowly developing to typhoon strength and moving south, Palawan Island and the central Philippines were battered by high winds and rain. These areas were inundated by flooding and landslides which caused massive crop damage and death. Many villages were cut off from any

source of food, fresh water, and other necessities for survival. Four deaths were attributed to Sarah. On 8 October, Sarah finally began to track westward and the weather finally cleared over Palawan Island and the central Philippines. Sarah's change in track was due to the strengthening of the mid-tropospheric ridge north of Sarah from Luzon across the South China Sea into Asia. Aircraft reconnaissance early on the 9th reported that Sarah's structure had become better organized. Earlier aircraft reported that Sarah was not vertically aligned; but on the 9th, the mid-level center had become vertically aligned with the surface center. With vertical alignment and improved upper-level outflow, Sarah's intensity increased to 110 kt (57 m/sec) as she became a most impressive storm. This is in contrast to her unusual origin.

After Sarah reached peak intensity early on 10 October, she began to slowly weaken as



FIGURE 3-22-3. Sarah with 60 kt (31 m/sec) intensity one day prior to landfall over Vietnam, 13 October 1979, 0136Z. (DMSP imagery)

she tracked west-northwestward (Fig. 3-22-3). Sarah continued on a west-northwest track until dissipation over Vietnam on 17 October. After 20 days, she dissipated within 300 nm (556 km) of her origin as a monsoon depression on 28 September.

FIGURES 3-22-1 and 3-22-2 are on following pages.

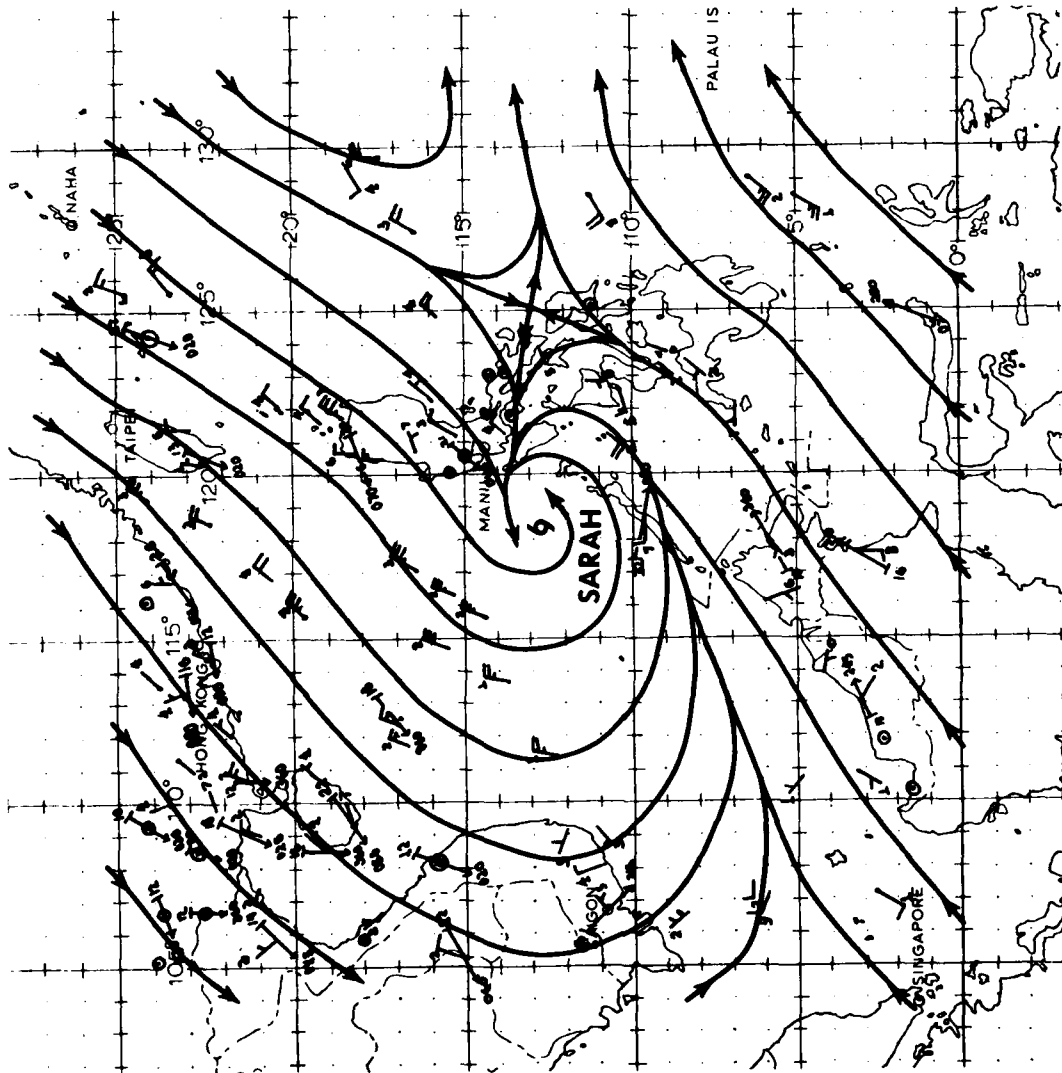


FIGURE 3-22-1. The 050000Z October 1979 surface (---) / gradient-level (ddd) (66) wind data and streamline analysis. Wind speeds are in knots.


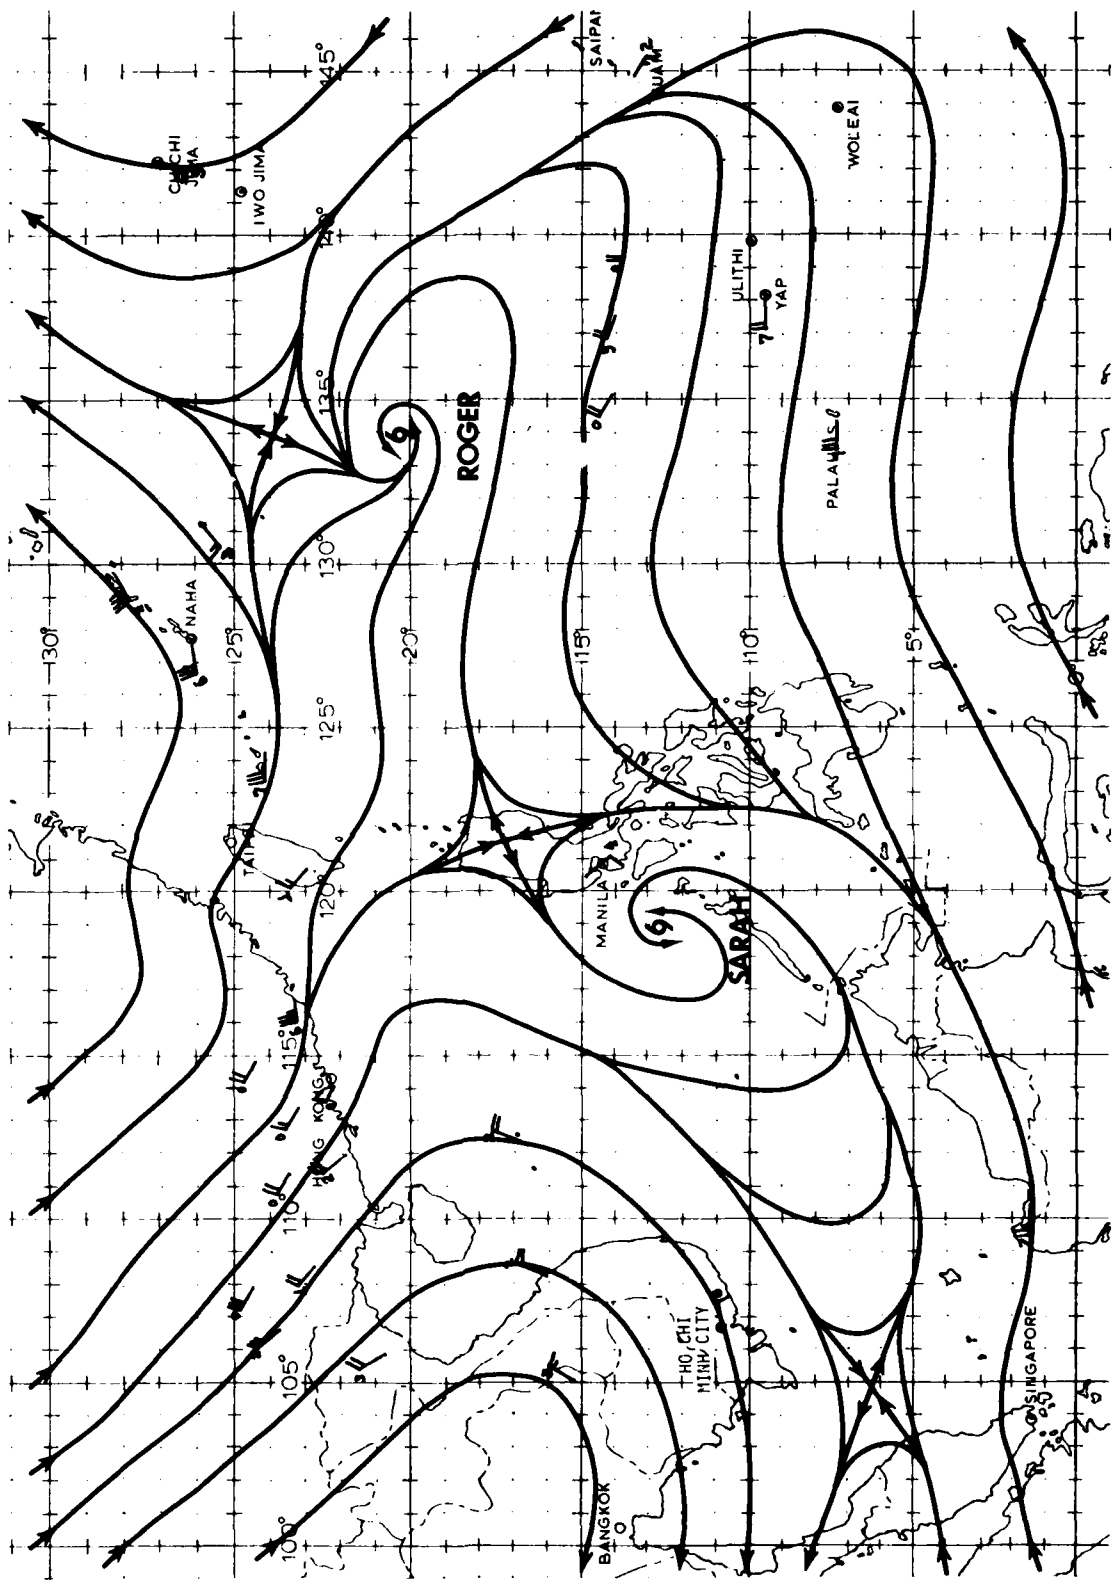


FIGURE 3-22-2. The 050000Z October 1979 500 mb streamline analysis. Wind speeds are in knots.

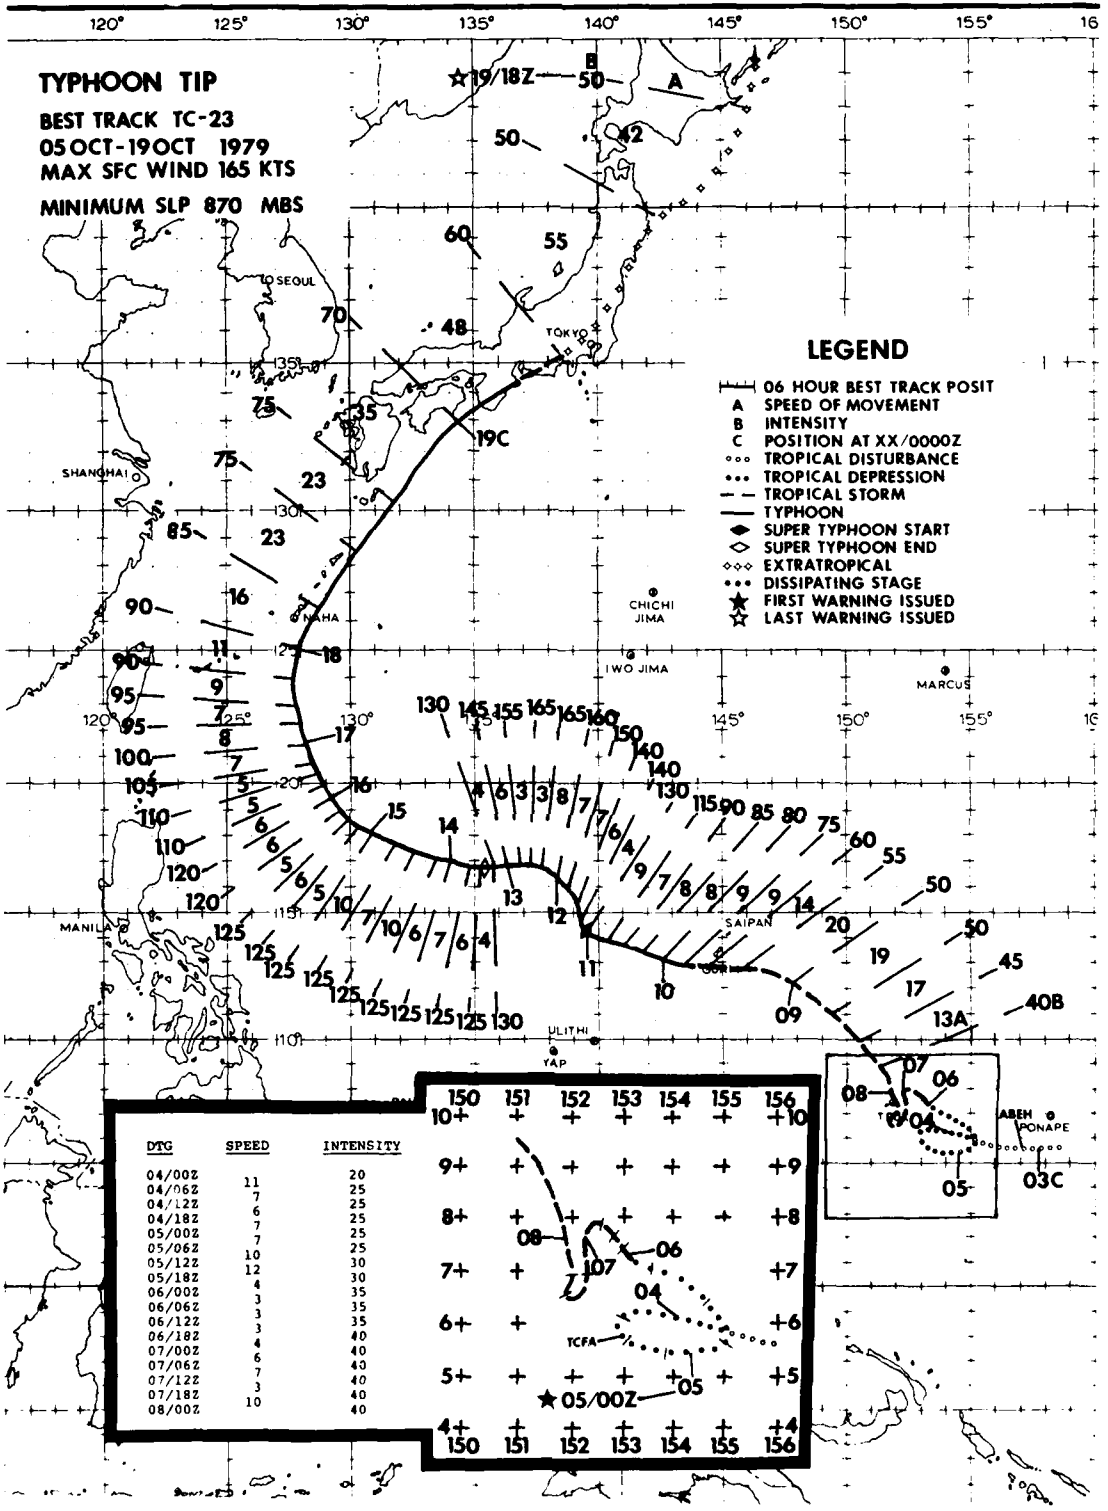


**TYPHOON TIP**  
**BEST TRACK TC-23**  
**05 OCT-19 OCT 1979**  
**MAX SFC WIND 165 KTS**  
**MINIMUM SLP 870 MBS**

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY
- C POSITION AT XX/0000Z
- ○ ○ TROPICAL DISTURBANCE
- ● ● TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◆ SUPER TYPHOON START
- ◇ SUPER TYPHOON END
- ◇ ◇ ◇ EXTRATROPICAL
- ● ● DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ☆ LAST WARNING ISSUED

DTG	SPEED	INTENSITY
04/00Z	11	20
04/06Z	7	25
04/12Z	6	25
04/18Z	7	25
05/00Z	7	25
05/06Z	10	25
05/12Z	12	30
05/18Z	4	35
06/00Z	3	35
06/06Z	3	35
06/12Z	3	35
06/18Z	3	40
07/00Z	6	40
07/06Z	7	40
07/12Z	3	40
07/18Z	3	40
08/00Z	10	40

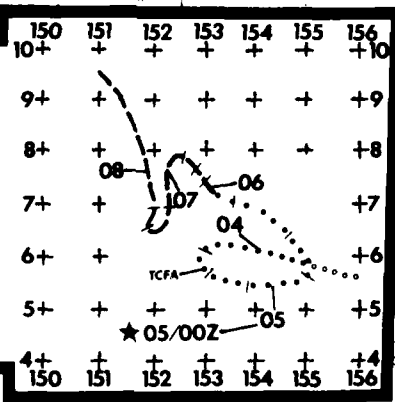

SUPER TYPHOON TIP (23)

Super Typhoon Tip was the most significant typhoon of the 1979 season, and possibly the most significant tropical cyclone this century. Forty aircraft reconnaissance missions were flown on Tip, which produced 60 fixes, and thus made it one of the most closely watched cyclones in recent memory. Aircraft and synoptic data showed that Tip achieved the lowest sea-level pressure ever observed in a tropical cyclone (870 mb) and also had the largest circulation pattern on record (nearly 1200 nm (2222 km) in diameter).

Satellite and synoptic data during the early part of October revealed an active monsoon trough that extended from the Marshall Islands through the Caroline Islands to Luzon. Three distinct circulations developed in this trough: One near Manila, which would become Typhoon Sarah; another southwest of Guam, which would become Tropical Storm Roger; and the last between Truk and Ponape, which was destined to become Super Typhoon Tip.

It is not possible to discuss the development of Tip without, at the same time, examining the development of TS Roger. The surface analysis for 030000Z showed the three circulations in the monsoon trough with strong cross-equatorial flow, most of which was feeding into TS Roger. This situation was enhanced, in part, by an extratropical trough north of Roger over Southern Japan. The split in the surface flow pattern near Guam tended to keep Tip from developing rapidly while southeast of Guam. The upper-level analysis at the same time showed a large anticyclone north of Guam in close association with TS Roger and a developing TUTT cell about 300 nm (556 km) east of Marcus Island. The TUTT cell was moving slowly westward. Only strong upper-level northeasterlies existed over Truk and Ponape.

The satellite signature of the tropical disturbance near Truk continued to show improvement despite the initially unfavorable upper-air pattern. A Tropical Cyclone Formation Alert was issued at 040900Z, when a reconnaissance aircraft found a closed surface circulation about 120 nm (222 km) southeast of Truk with a MSLP of 1003.9 mb and a maximum observed surface wind of 25 kt (13 m/sec).

A reconnaissance aircraft fixed the disturbance the following day about 100 nm (185 km) southeast of the previous position. Based on indications of continual development, the first warning on TD 23 was issued at 050000Z. Although the surface pressure did not drop significantly, the observed surface winds did increase, and as a result, TD 23 was upgraded to Tropical Storm Tip at 060000Z.

During the period from 050000Z to 071800Z, TS Tip gave the JTWC forecasters a striking example of what the term "erratic movement" really means. TS Tip first executed a cyclonic loop southeast of Truk, then accelerated to the northwest, only to stall and meander to a position south of Truk. It was difficult to keep track of

TS Tip's surface position during this period. The best track is based almost entirely on aircraft surface positions, because the satellite fixes were based on upper-level outflow centers, and even the 700 mb center, as observed by aircraft reconnaissance, was considerably displaced from the surface center. Changes in the surface wind direction reported by Truk assisted JTWC in monitoring TS Tip during this period of erratic behavior.

Post-analysis shows that Tip's slow development and early erratic behavior are related to the weak, yet extensive circulation patterns that were associated with TS Roger. While near Truk, TS Tip was still competing with TS Roger for strong southerly surface inflow and, until the 8th, was coming out second best. During the period of erratic movement, JTWC continued to forecast a northwestward track with passage south of Guam. These forecasts were based primarily on the mid-level steering winds observed at Guam and obtained by the reconnaissance aircraft. These fairly strong winds were from the southeast and were expected to steer Tip toward Guam. However, at this stage of development, Tip was evidently too far south of this wind band and the steering in the immediate vicinity of Tip remained weak.

On 8 October, the expected northwest movement began. Roger was far to the north becoming extratropical, and the southerly winds that had been flowing north began to veer toward Tip. The TUTT cell earlier near Marcus Island migrated to a position northwest of Guam, affording Tip an excellent outflow channel to the north. Synoptic and subsequent aircraft data revealed that the southeasterly mid-level winds finally began to influence TS Tip, and the 080208Z aircraft fix confirmed that Tip was heading toward Guam at approximately 13 kt (24 km/hr). The minimum sea level pressure dropped to 995 mb and surface winds were 40 kt (21 m/sec).

Tropical Storm Tip continued to intensify and accelerate, eventually to 20 kt (37 km/hr) as he headed toward Guam. Until 6 hours before reaching Guam, Tip's persistence track and JTWC's forecasts indicated that he would pass directly over the center of the island. Six hours before expected landfall, however, reconnaissance aircraft and radar positions from Andersen AFB showed that TS Tip had turned to the west. Tip actually passed south of Guam, reaching CPA at about 25 nm (46 km) south of the southern end of the island at 091015Z. Maximum winds of 48 kt (25 m/sec) with gusts to 64 kt (33 m/sec) were recorded at the Naval Oceanography Command Center on Nimitz Hill. Andersen AFB recorded 6.5 inches of rain between 081800Z and 091800Z, and an additional 2.61 inches between 091800Z and 091900Z.

Shortly after passing Guam, Tip reached typhoon strength and continued on a basic west-northwest track. The analyses over the next few days showed that Typhoon Tip was moving into an area of strong upper-level divergence which appeared to cover most of



the western Pacific. Rapid intensification was forecast based upon the favorable upper-level pattern and the continued drop in surface pressure as observed by the reconnaissance aircraft. Intensification was much more rapid than expected, however, as the pressure between the 9th and the 11th dropped 98 mb to 898 mb. Tip reached super typhoon strength at that time with maximum winds of 130 kt (67 m/sec) reported by aircraft reconnaissance. The surface analyses revealed that the circulation pattern associated with Typhoon Tip had increased to a diameter of 1200 nm (2222 km) which broke the previous record of 720 nm (1333 km) set by Typhoon Marge in August 1951.

Super Typhoon Tip intensified still further, and at 120353Z, a reconnaissance aircraft recorded the lowest sea-level pressure ever observed in a tropical cyclone: 870 mb. This was 6 mb lower than the previous record set by Super Typhoon June in November 1975. The 700 mb height was 1944 meters and the 700 mb temperature within the eye was an exceptionally high 30° C (Fig. 3-23-1). The Aerial Reconnaissance Weather Officer (ARWO) on that particular mission remarked that "...one unusual feature was the spiral striations on the wall cloud. It looked like a double helix spiraling from the base of the wall cloud to the top, making about two revolutions in

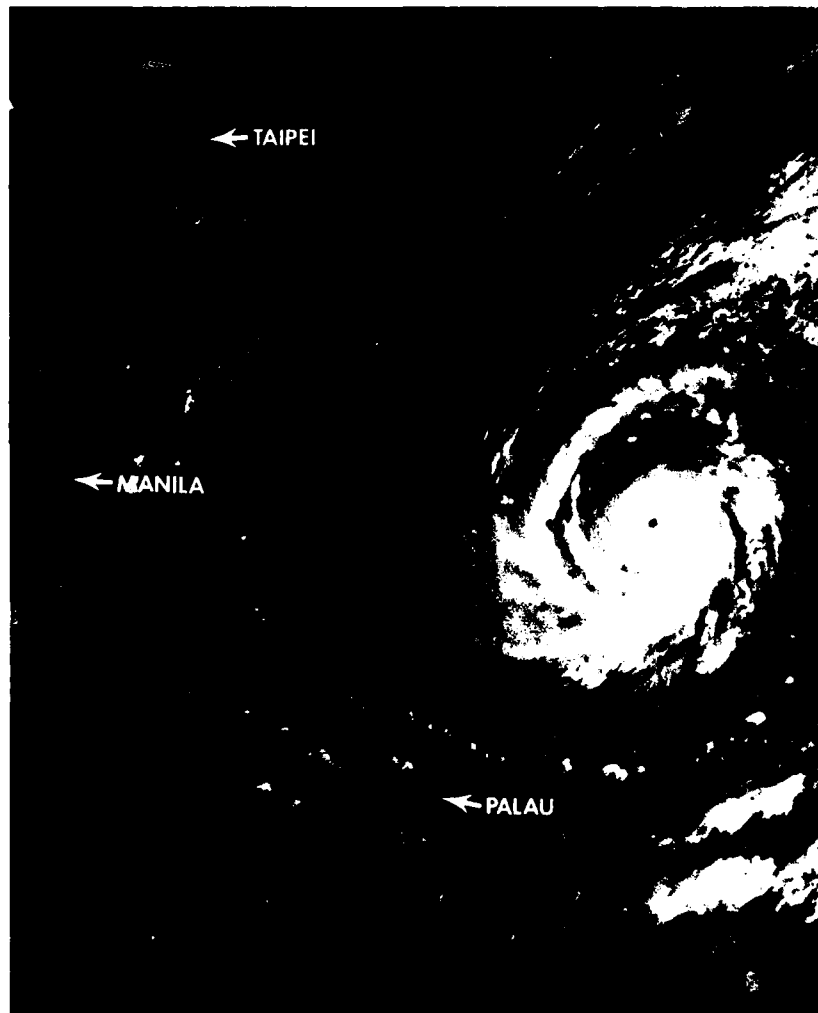


FIGURE 3-23-1. Super Typhoon Tip shortly before the record MSLP of 870 mb was observed by reconnaissance aircraft, 12 October 1979, 0012Z. (DMSP imagery).

climbing.<sup>1</sup> Tip maintained super typhoon strength for the next 54 hours while moving to the northwest at between 3 and 7 kt (6 and 13 km/hr). Estimated maximum wind intensity of 165 kt (85 m/sec) was reached at 120600Z.

The immense circulation pattern associated with Typhoon Tip extended from the surface through 500 mb (and probably higher) and essentially split the subtropical mid-tropospheric ridge south of Japan. This would have allowed an average typhoon to recurve sharply to the north, but Tip was an atypical system and the northwestward movement persisted for the next three days.

Steering forecast aids were useless during this period because they merely steered Tip in his own large storm-induced flow. Persistence and climatology became the primary forecast aids during this stage in Tip's life.

From the 13th to the 17th, the radius of surface and gradient-level 30 kt (15 m/sec) or greater winds extended over 600 nm (1111 km) from Typhoon Tip's center. The radius of over 50 kt (26 m/sec) winds was over 150 nm (278 km) (Fig. 3-23-2). The aircraft reconnaissance data likewise showed that 700 mb winds of 105 kt (54 m/sec) existed more than 120 nm (222 km) from Tip's center during this period (Fig. 3-23-3).

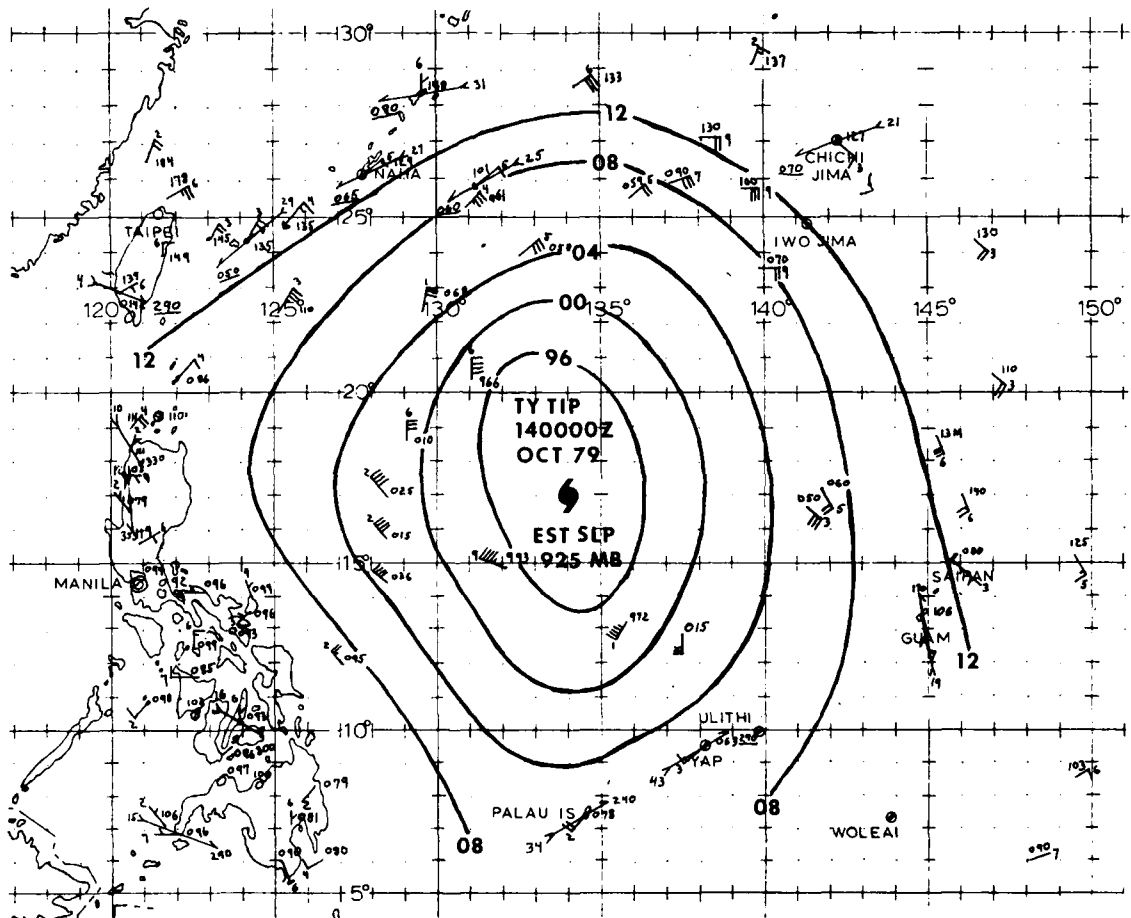


FIGURE 3-23-2. The 140000Z October 1979 surface (—) / gradient-level (ddd—) wind data and pressure analysis in the vicinity of Super Typhoon Tip. Wind speeds are in knots.

<sup>1</sup>PATRICK W. GIESE, Capt, USAF: Mission ARWO.

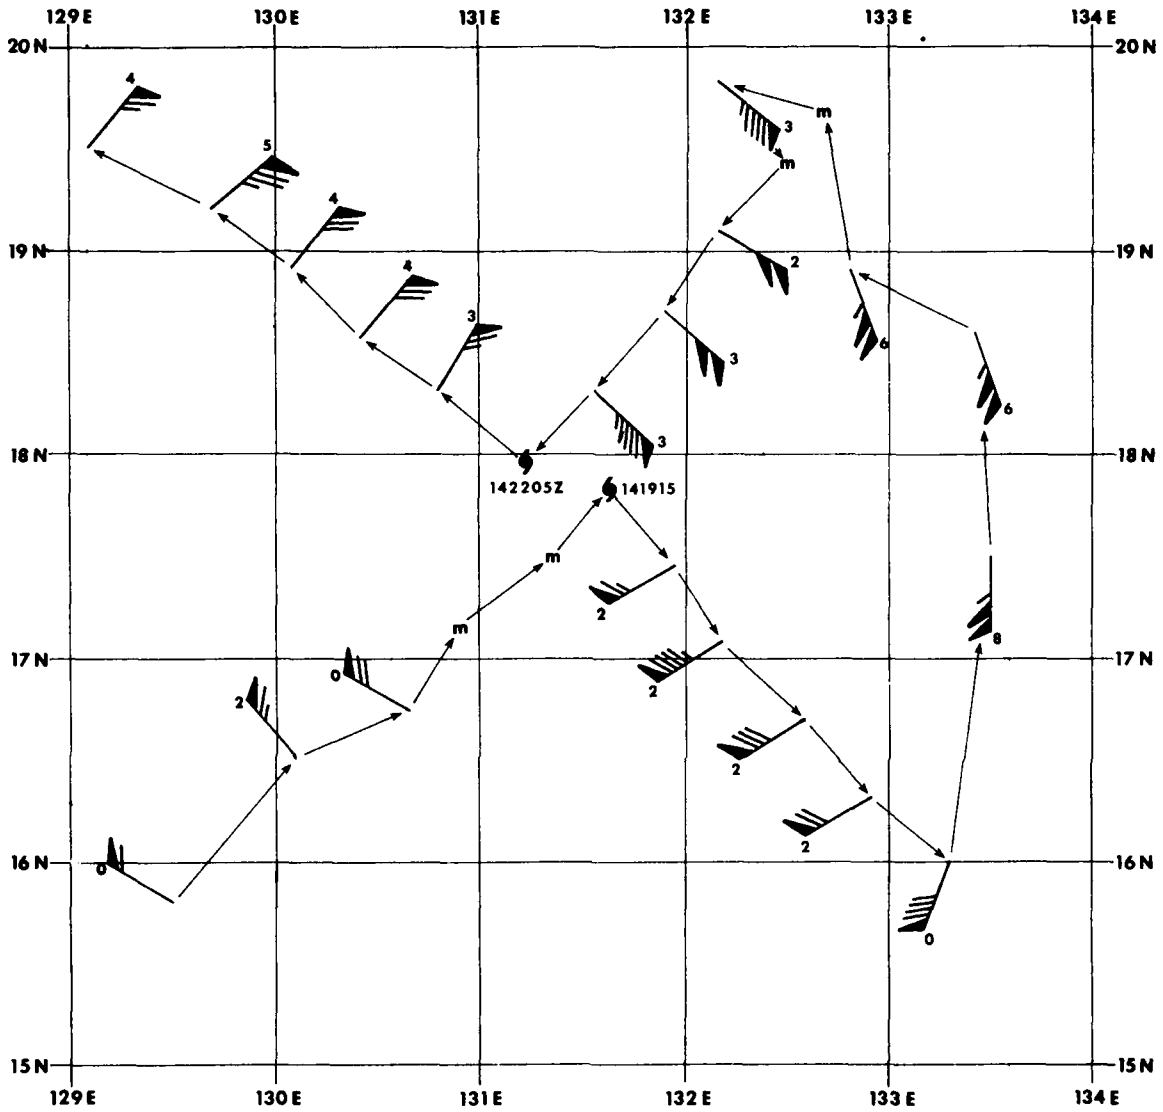


FIGURE 3-23-3. Plot of aircraft reconnaissance data from the 26th mission into Super Typhoon Tip on 15 October 1979. Tip's positions were fixed at 141915Z and 142205Z. Wind barbs are the measured 700 mb winds. The tens digit of the wind direction is also plotted with the wind barbs. An "m" indicates no 700 mb wind data available.

After the 17th, Tip began to weaken as the large circulation pattern began to shrink. This, together with the effects of a mid-level trough moving toward Japan from China, caused Tip to begin tracking northward. By the 18th, he was accelerating to the northeast under the influence of the increased mid-level southwesterlies.

During recurvature, Tip passed within 35 nm (65 km) of Kadena AB on Okinawa, which reported maximum sustained winds of 38 kt (20 m/sec) with gusts to 61 kt (31 m/sec).


At approximately 190100Z, after reaching a forward speed of between 35 and 45 kt (65 and 83 km/hr), Typhoon Tip, with maximum winds of 70 kt (36 m/sec), made landfall on the Japanese island of Honshu, about 60 nm (111 km) south of Osaka. Synoptic and radar data from stations on the island showed that Tip maintained a speed in excess of 45 kt (83 km/hr) as he passed to the north of Tokyo and eastward into the Pacific Ocean. According to satellite imagery, Tip completed extratropical transition over Honshu.

The extratropical low pressure center (the remnants of Tip) maintained winds of storm force, 48 kt (25 m/sec), until the 21st when it moved to a position east of Kamchatka and finally began to fill rapidly.

The majority of the severe damage occurred in Japan where the agricultural and fishing industries sustained losses into the millions of dollars. Flooding from Tip's rains also breached a fuel retaining wall at Camp Fuji, west-northwest of Yokosuka. The fuel caught fire causing 68 casualties, including 11 deaths, among the U.S. Marines stationed there.

Considering the size and strength of Super Typhoon Tip, the Western Pacific fared well. Luckily, the maximum intensity was reached while the system was still far from any inhabited areas. The potential for mass destruction was always there, but from a strictly meteorological standpoint, Tip was also a thing of great beauty. One of the Aerial Reconnaissance Weather Officers stated, shortly after she returned from a mission, that "...the second penetration was beyond description. This is unquestionably the most awe-inspiring storm I have ever observed. In the 2½ hours that transpired between the first and second fixes, the moon had risen sufficiently to shine into the eye through an 8 nm clear area at the top of the eyewall. To say it was spectacular is totally inadequate... 'awesome' is a little closer."<sup>1</sup>

<sup>1</sup>CAROL L. BELT, 1LT, USAF: Mission ARWO.

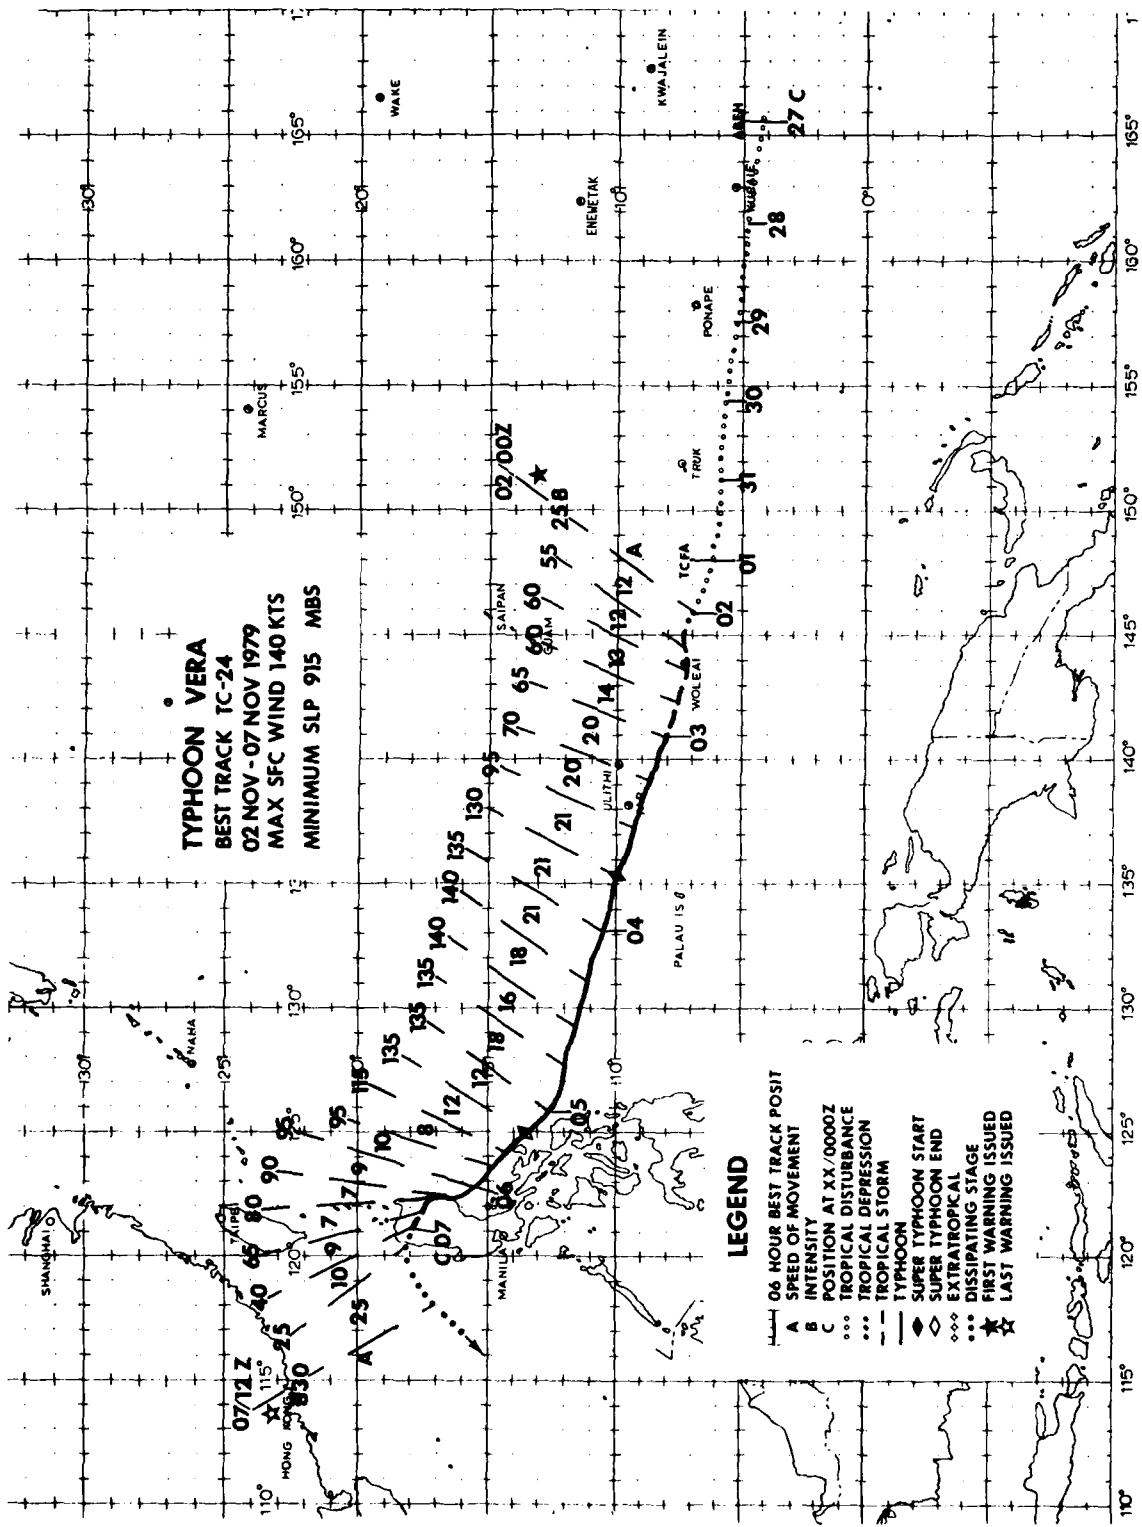

SUPER TYPHOON VERA (24)

Vera, the fourth and final super typhoon of 1979, originated in an active near-equatorial trough (NET) which extended through the Caroline and Marshall Islands. Vera was first analyzed as a weak surface circulation 100 nm (185 km) southeast of Ponape on 27 October and was included on JTWC's Significant Tropical Weather Advisory (ABEH PGTW) for the next 4 days as it remained in the NET. Low-level inflow during this period was split between several weak eddies.

By 300000Z, synoptic data indicated that the low-level inflow was now concentrated into the developing cyclone. Meanwhile, the convective activity increased rapidly over a 24-hour period from 310000Z to 010000Z. A Tropical Cyclone Formation Alert was issued at 010000Z November based on increased upper-level outflow and a continued decrease in surface pressure.

Aircraft reconnaissance at 012100Z found an ill-defined circulation center with a central pressure of 1004 mb and estimated surface winds of 15 kt (8 m/sec). Numbered warnings began at 020000Z based on an improved satellite signature. Rapid intensification occurred, and TD 24 was upgraded to Tropical Storm Vera 6 hours later. Vera continued to intensify, reaching typhoon strength by 0000Z on 3 November while 190 nm (352 km) south-southeast of Yap. At this time, the 200 mb analysis revealed that a large upper-level anticyclone, previously located northwest of Vera at 010000Z, was weakening and was no longer restricting Vera's outflow to the north. By 020000Z, the anticyclone situated over Vera had become the dominant upper-level synoptic feature over the western Pacific.

From the time of the first warning until her approach to the Philippines northeast of Samar, Vera moved on a virtually straight west-northwest track. The major influence on her movement was the unusually strong mid-tropospheric subtropical ridge over the western Pacific. The strength of the easterly current south of the ridge steered Vera at forward speeds of 20 to 22 kt (37 to 41 km/hr)--almost twice the climatological average--as she passed 35 nm (65 km) south of Yap. As a result, although JTWC's forecast tracks were consistent and accurate, forecast forward speeds lagged behind Vera's actual speeds. The underestimates were considerable during the early stages of acceleration.

Vera continued to intensify during her west-northwestward acceleration and reached super typhoon intensity only 18 hours after being upgraded to a typhoon. Reconnaissance aircraft reports indicated Vera maintained super typhoon strength for over 24 hours before weakening as she approached Catanduanes Island. The peak wind reported on Catanduanes Island was 50 kt (26 m/sec) at 051200Z as Vera passed just off the coast.

The island chain began restricting low-level inflow as Vera continued northwestward toward northern Luzon. Vera made landfall north of Tarigdig Point packing winds of 90 kt (46 m/sec).

After landfall, the onset of enhanced low-level northeasterly flow over the Taiwan Straits coupled with strong upper-level southwesterlies over the Philippines resulted in vertical disorganization and rapid weakening of Vera. Radar and aircraft reports indicated the low-level circulation continued to track northwestward over the Cagayan River valley and exit into the South China Sea near Cullili Point south of Laoag. The upper-level circulation sheared off near Tuguegarao and was tracked using satellite imagery northward over Aparri then east-northeastward into the Philippine Sea. Surface synoptic and ship reports at 070000Z indicated that a secondary surface center existed near Baguio. At the same time, the primary center was crossing the Cordillera Central Mountain range 95 nm (176 km) to the north (Fig. 3-24-1).

After exiting into the South China Sea, the strong northeast monsoon flow accelerated Vera southwestward, and the final warning was issued at 1200Z on the 7th downgrading Vera to a tropical depression.


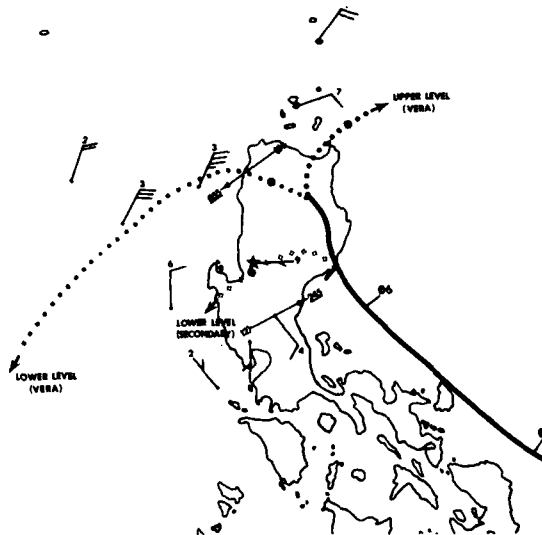


FIGURE 3-24-1. Tracks of low-level and upper-level centers after the upper-level sheared off over northern Luzon. Synoptic and ship reports at 070000Z November indicate secondary low-level center near Baguio (WMO 98328) (indicated by a star). The 070000Z center positions are indicated by solid dots. Wind speeds are in knots.

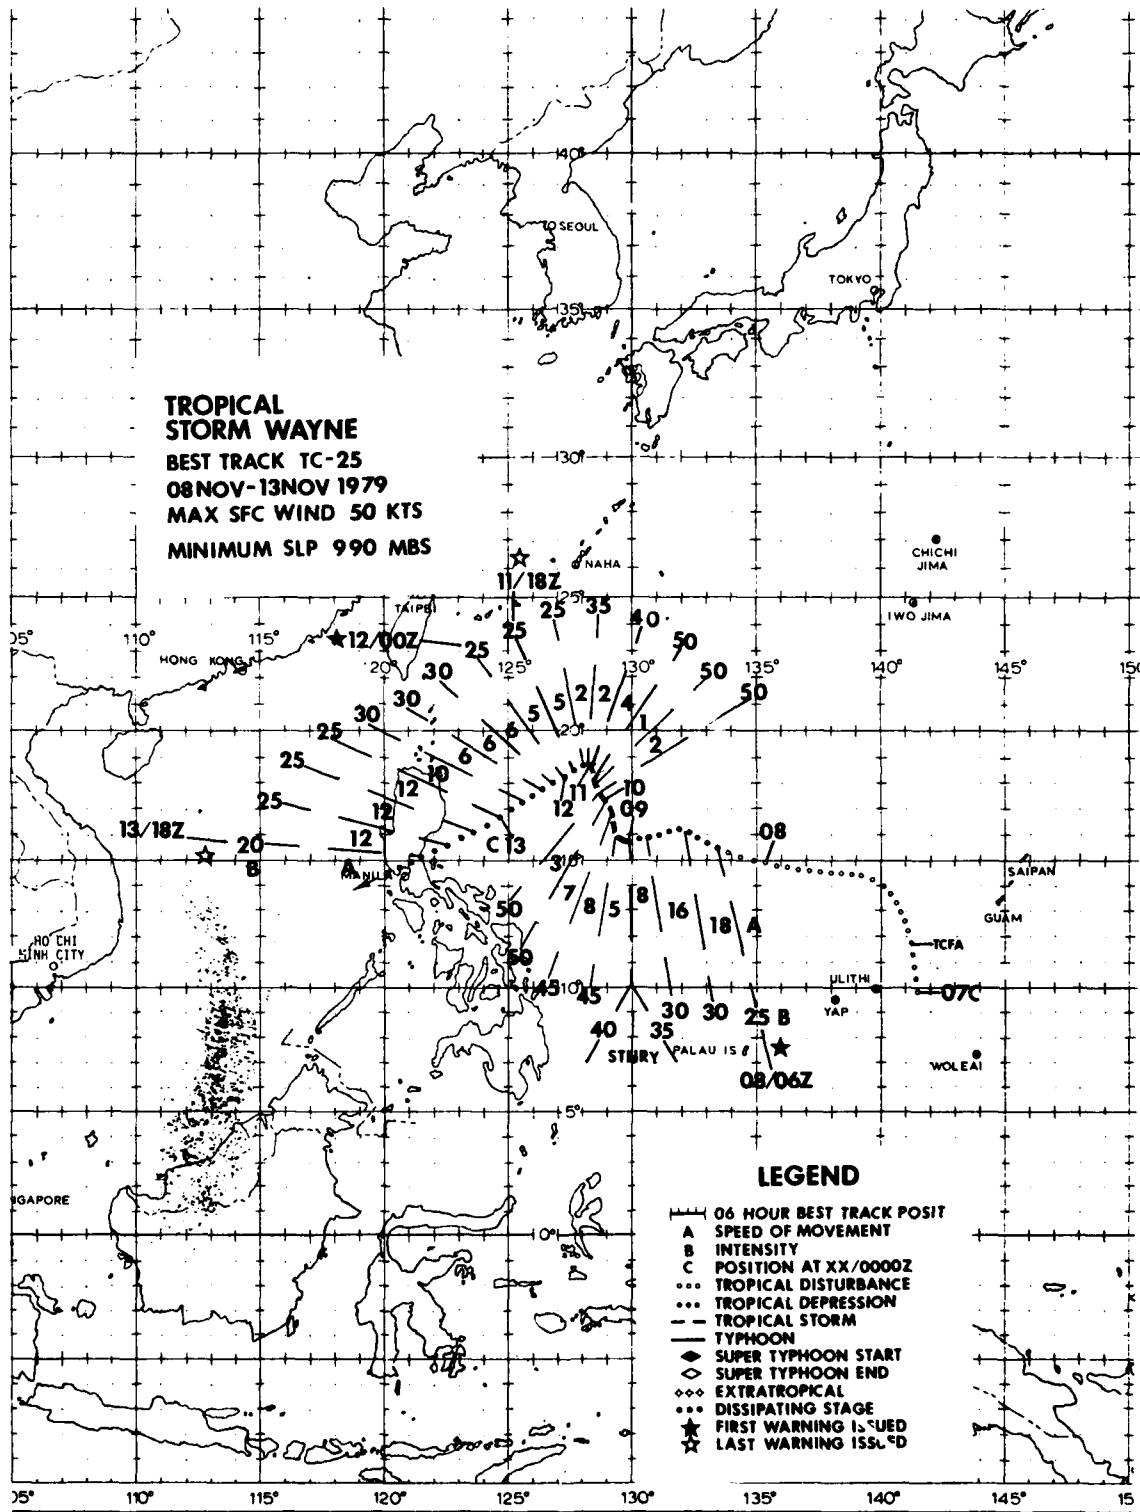

## TROPICAL STORM WAYNE

Tropical Storm Wayne was first detected as a mid-level circulation on satellite imagery in early November. Figure 3-25-1 shows the broad cloud structure associated with the system. Aircraft reconnaissance around this period showed that the disturbance was most developed at mid-levels. Wayne moved northward initially and began developing a more definitive surface circulation which became evident in synoptic data on 7 November. Wayne lasted only a relatively short time, but he still proved to be one of the more difficult storms to forecast for 1979.

JTWC's first forecasts called for recurvature. They were based on the 080000Z November 500 mb synoptic situation which showed a weakness in the subtropical ridge with westerlies extending south to 23°N latitude. Steering flow at all levels, however, was not consistent and strong low-level easterlies prevented Wayne from recurving toward the east. On 9 November, an extratropical system with accompanying surface frontogenesis developed north of Wayne. This caused a break in the otherwise persistent easterly flow and Wayne began to track northward. JTWC forecasts again reflected recurvature and called for early dissipation due to the strong shear from low-level easterlies and upper-level westerlies. The extratropical system moved rapidly eastward bypassing Wayne. By 11 November, strong northeasterlies had once again been established, and Wayne turned back to the west, ultimately, tracking west-southwest toward the central

Philippines. At the same time, strong shear did weaken Wayne as it tracked toward the Philippines (Figure 3-25-2) and dissipation occurred as he made landfall over Luzon.

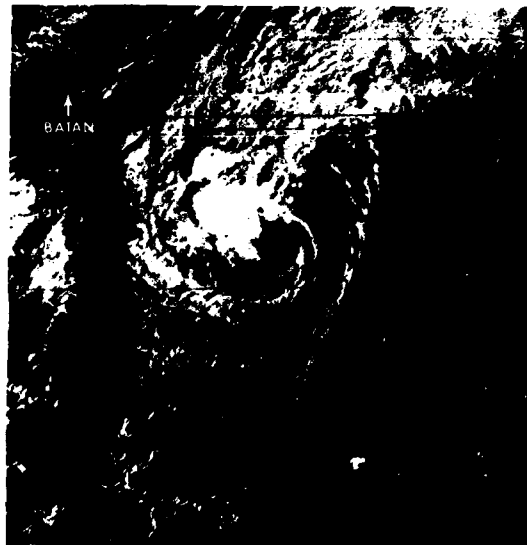


FIGURE 3-25-2. Tropical Storm Wayne weakening due to strong shear as it approached the Philippines, 12 November 1979, 0100Z. (DMSP imagery)


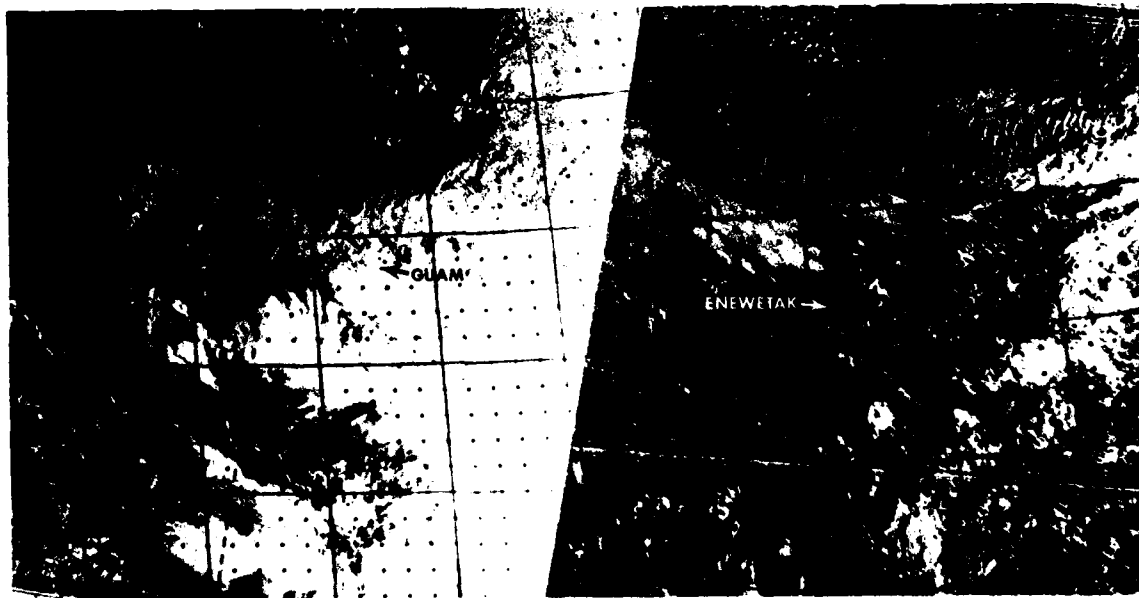


FIGURE 3-25-1. Disturbance stage of Tropical Storm Wayne when the system was mainly a mid-level circulation, 6 November 1979, 1208Z. (DMSP imagery)



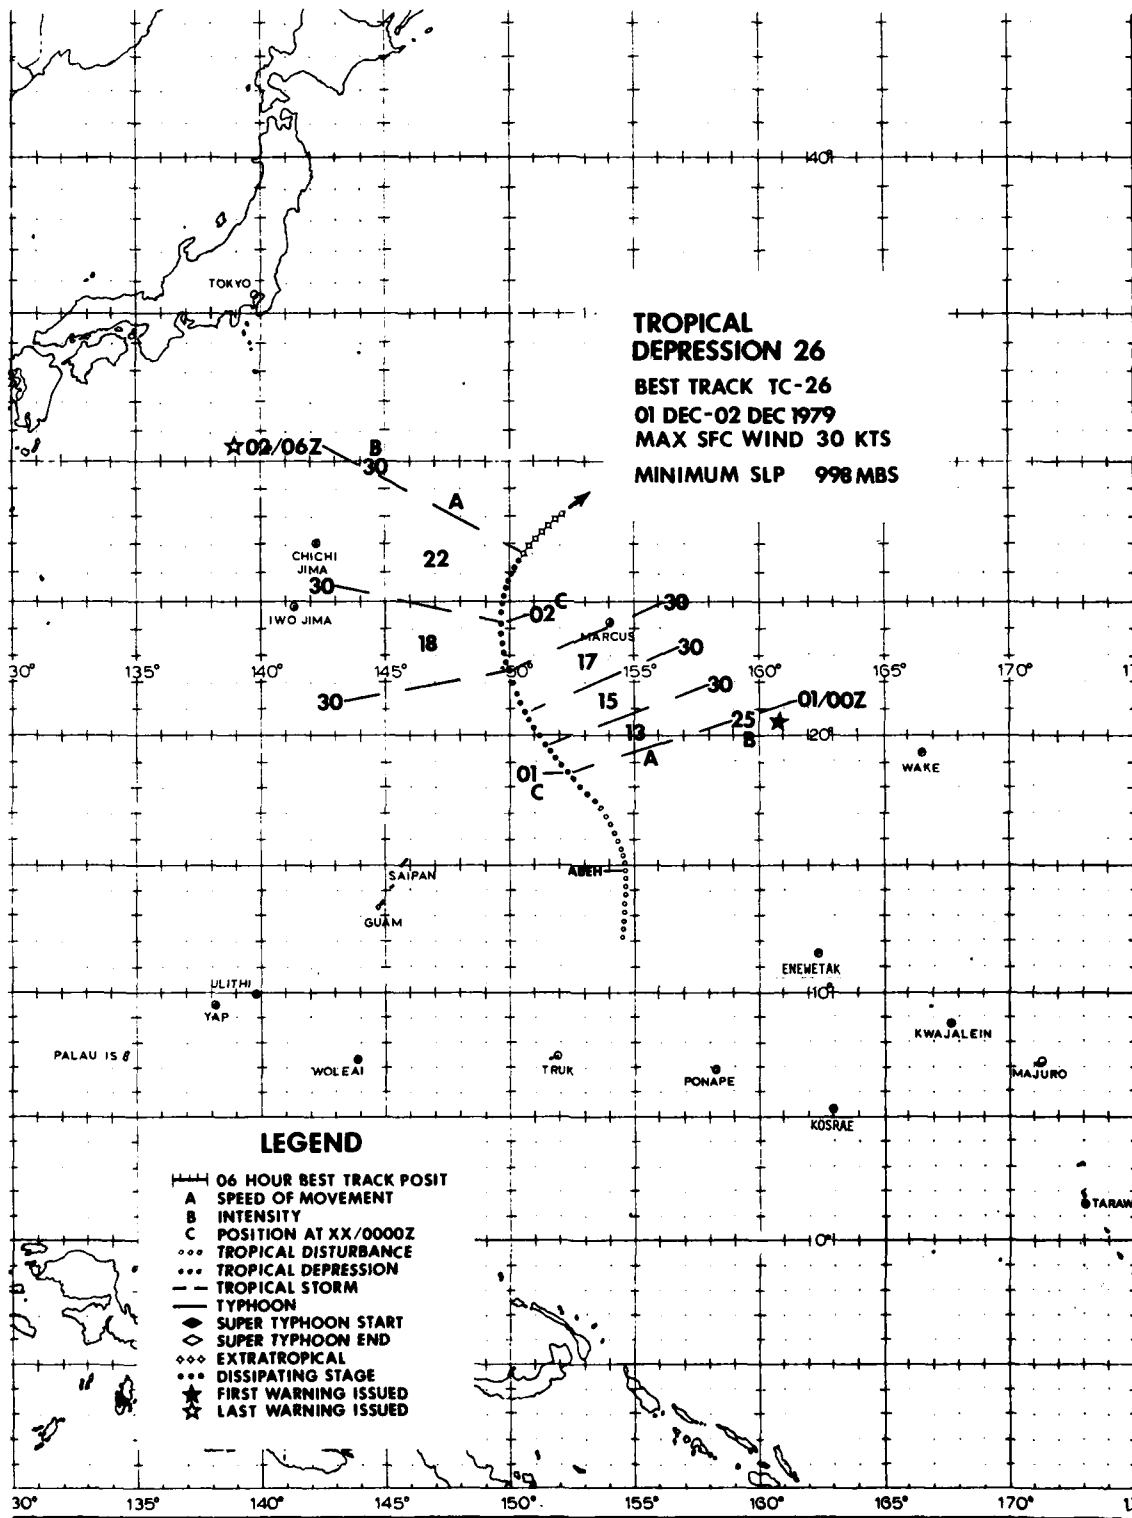

TROPICAL DEPRESSION 26

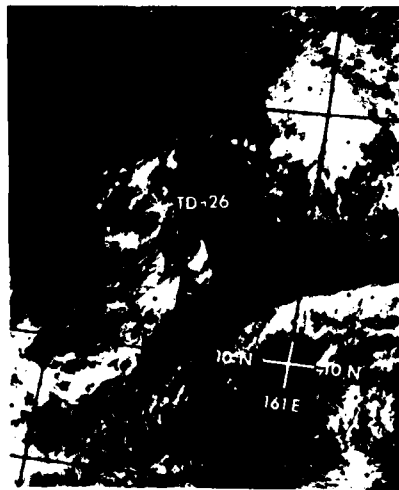


FIGURE 3-26-1. Tropical Depression 26 developed north-northeast of the Truk Islands and appeared to be the surface reflection of a mid-level circulation. Surface data suggest the existence of a weak circulation 400 nm (741 km) northeast of Tropical Depression 26 and a broad circulation (Typhoon Abby) to the southeast, 29 November 1979, 2255Z. (DMSP imagery)



FIGURE 3-26-2. Tropical Depression 26 developed an identifiable surface circulation and intensified as it tracked north-northwestward. A ship, transiting the area, passed through the storm center and reported 35 kt (18 m/sec) winds in heavy showers. Based on synoptic data, the first warning was issued on Tropical Depression 26, but 35 kt-or-greater winds were never reported again. This photo shows Tropical Depression 26 at its maximum convective intensity, 30 November 1979, 2237Z. (DMSP imagery)


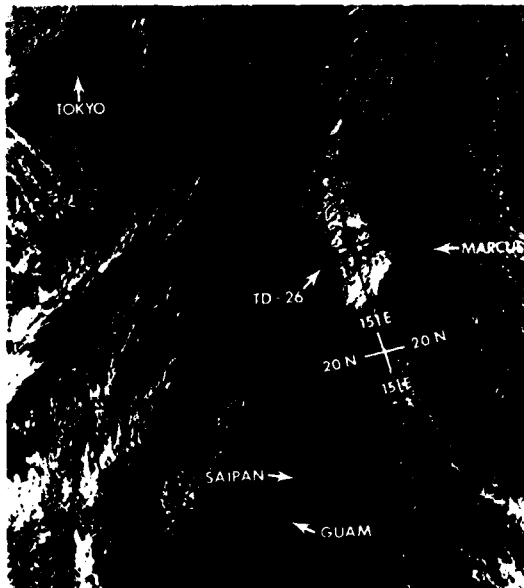


FIGURE 3-26-3. Tropical Depression 26 passed west of Marcus Island and merged with an extratropical frontal boundary. Tropical Depression 26 sheared in the vertical with the low-level exposed surface circulation remaining on the western edge of the convection, 2 December 1979, 0036Z. (DMSP imagery)

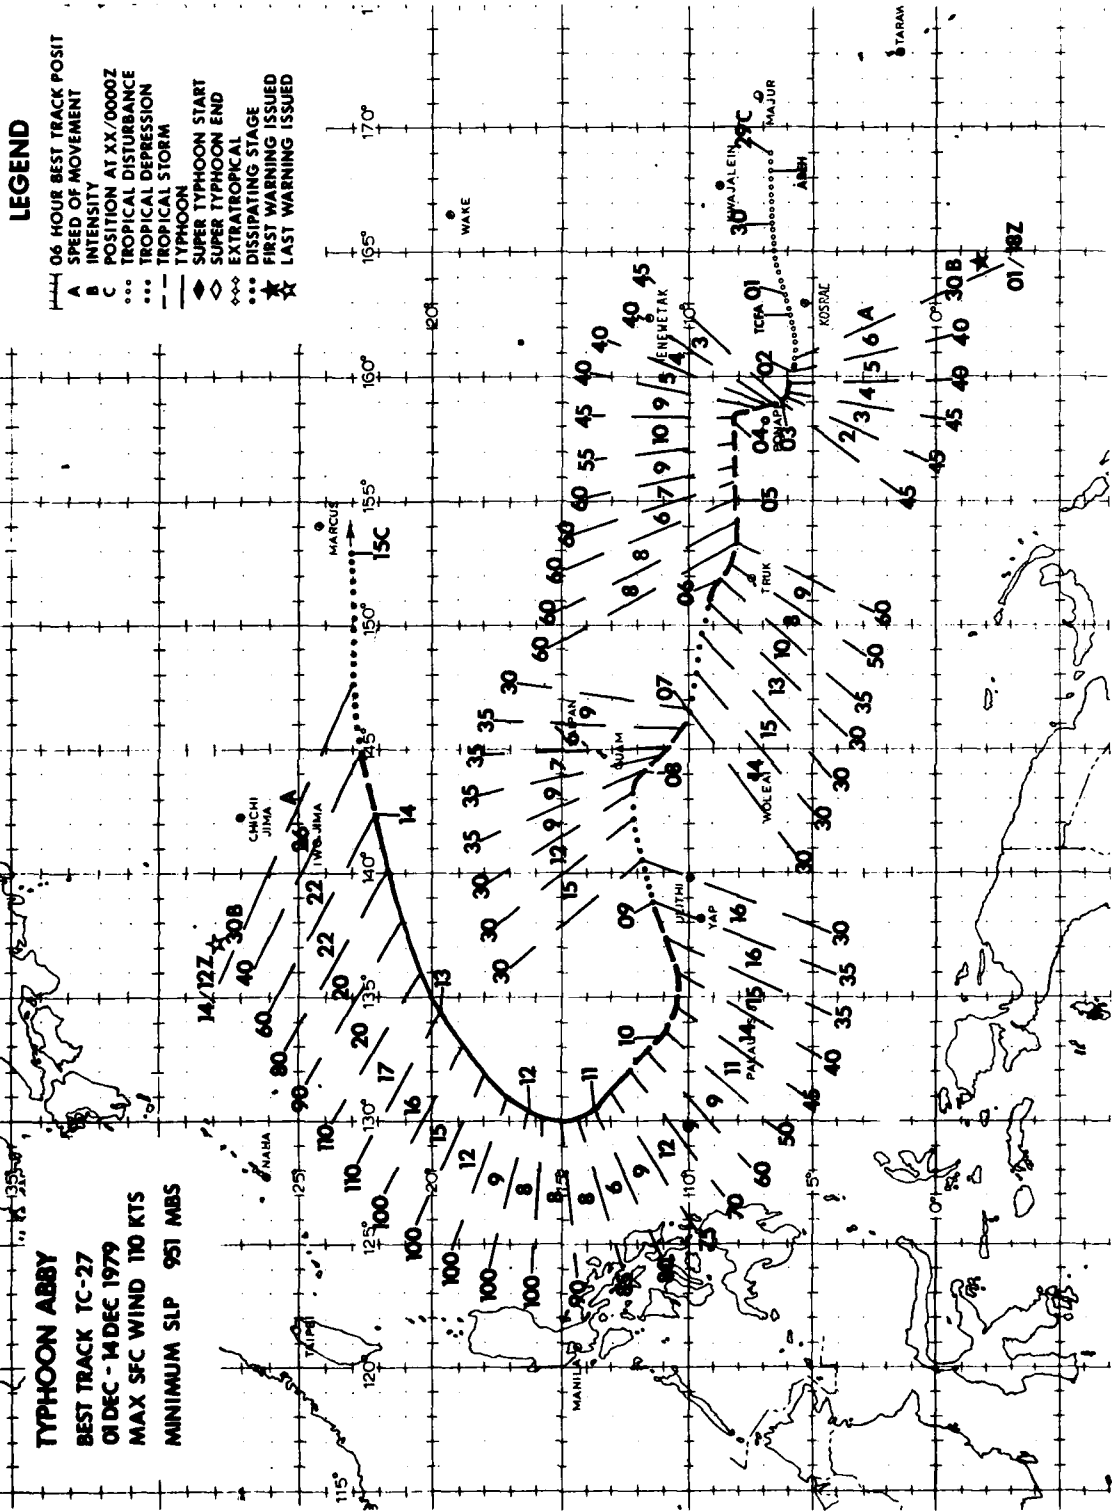

Abby, the last typhoon of the 1979 season, developed over the Marshall Islands during early December. Abby proved to be an unusual cyclone in several ways. Throughout much of Typhoon Abby's existence, Abby was not vertically aligned. Aircraft reconnaissance located the mid-level circulation center displaced as much as 55 nm (102 km) from the surface center. At one point, two centers were identified; a point to be discussed later. In addition, Abby fluctuated between tropical depression and tropical storm strength several times before reaching typhoon strength 10 days after formation.

Within 24 hours of the first warning, aircraft reconnaissance observed surface winds of 45 kt (23 m/sec) and a sea-level pressure of 996 mb. The surface and 700-mb centers were displaced by 12 nm (22 km). Abby continued to intensify to 60 kt (31 m/sec) on 4 October while increasing the displacement between the surface and 700-mb centers.

Abby deviated from a westward track to a north-northwestward track on 3 December with a reduced forward speed of movement. The temporary northward movement was associated with a deepening mid-tropospheric trough which moved rapidly northeastward away from Japan on 1 December. Abby resumed a westward track with increased forward speed after the trough axis passed east of Abby late on the 3rd.

All available information (climatology, analog aids, analyses and numerical forecasts) indicated continued intensification as Abby tracked towards Guam. This expected intensification was reflected in JTWC warnings during this period. However, the opposite occurred. As Abby moved west of Truk, she weakened to less than tropical storm strength. An upper tropospheric anticyclone north of Abby restricted Abby's outflow and resulted in the observed weakening (Fig. 3-27-1). By 7 December, Abby reintensified to minimum tropical storm strength as she moved westward and away from the influence of the restricting anticyclone. Abby then tracked west-northwestward under the influence of a mid-tropospheric long-wave trough oriented along 142E. As the trough moved east of Abby, the subtropical mid-tropospheric ridge again built eastward, providing a mechanism which steered Abby towards the west-southwest. During the 8th, Abby once again weakened to less than tropical storm strength and increased her forward speed of movement.

Abby was not vertically aligned from the issuance of the first warning through the 9th. On the 9th, aircraft reconnaissance making a supplemental fix at 0617Z observed that Abby possessed multiple 700 mb centers. By the time of entry into Abby for a levied 0830Z fix, only one well organized, intensifying center was found. The following is a storm mission summary by the Aerial Reconnaissance Weather Officer (ARWO), who made the double penetration into Abby: "This mission started out as a normal fix but ended

FIGURE 3-27-1 is on following page.

up being unusual. On our way inbound for the supplemental fix, there was no problem reading winds at flight level or on the surface. Winds were 20-25 kt the entire way. An area of thunderstorm activity became visible ahead of us. As we neared it, the doppler indicated that the 700 mb center was in the middle of the thunderstorm. Not eager to go find this out, we went back to find the surface center. Enroute, we saw surface winds in excess of 35 kt which led us to a fairly disorganized surface center just east of the main thunderstorm. This was a fairly small light and variable wind center. Radar showed little curvature in the shower pattern, but the surface winds did indicate a weak circulation existed at this first position. No weather existed to the east of our first fix, and this position was right on the JTWC forecast track. At the second fix, things had changed. As we came in the second time, we encountered considerable precipitation. Doppler and search radar indicated a center with a possible wall cloud forming considerably west of our first fix. Winds were stronger at flight level and we penetrated a wall cloud of about 80% coverage. When we broke through, we encountered our strongest winds at flight level. The surface center was under the eastern wall cloud with a small light and variable wind center at 700 mb centered in the eye. Lightning started in the eastern wall cloud and spread around the

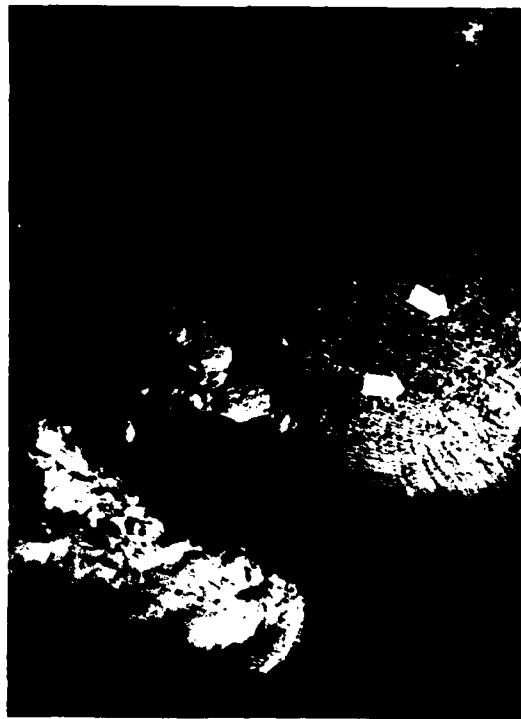


FIGURE 3-27-2. Typhoon Abby's two outflow centers are indicated by arrows, 9 December 1979, 0144Z. (DMSPI imagery) Figure 3-27-1 is on next page.

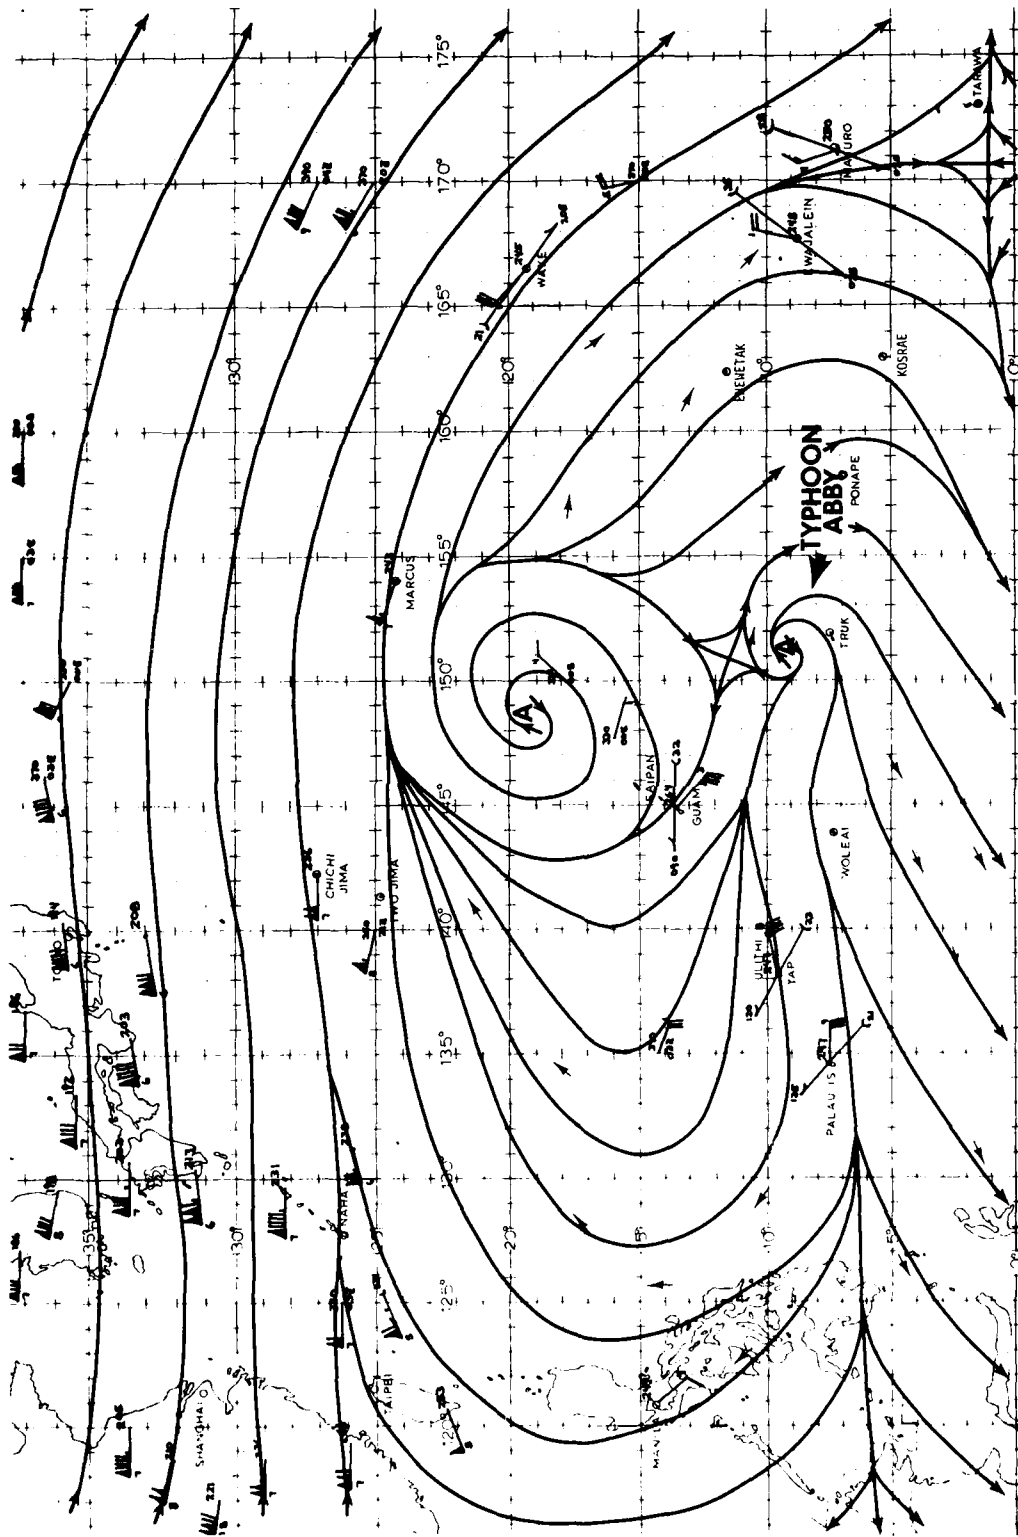


FIGURE 3-27-1. 200 mb streamlines and isobars at 000000Z December 1979 depicting the more dominant outflow zone northeast of Guam which greatly restricted Typhoon Abby's outflow. Wind data are a combination of RA08S, AIRSEPS and adze/100-ft winds for the 150 mb to 150 mb levels. RA08 winds are depicted at 200 mb (---) and 100 mb (---). Wind speeds are in knots.

eye. Our drop was made as close to the surface center as was possible and indicated a good 988 mb sea-level pressure. The 700 mb height was down 72 meters from the first fix. The positions were 85 miles apart causing me to believe that two centers existed for a short time with the latter becoming the predominate one. The pressure profile seems to indicate this theory...."<sup>1</sup> Satellite imagery at 090144Z also indicated the possible existence of multiple outflow centers (Fig. 3-27-2). While Abby was reorganizing into a single center, she began to reintensify to tropical storm strength. By the 10th, Abby had attained typhoon strength which made her the last typhoon of the decade.

A mid-tropospheric short-wave trough moved from mainland China into the Sea of Japan and deepened on the 10th. In response to the short-wave trough, the subtropical mid-tropospheric ridge again receded eastward north of Abby. The interaction of these two synoptic features allowed Abby to again track northwest. On the 11th, Typhoon Abby recurved in response to another mid-tropospheric short-wave trough, which extended further south than the trough on the 10th. This last trough in the series moved into the northern part of the South China Sea and deepened, causing Abby to finally follow a recurvature track.

Typically, recurving typhoons have their maximum intensities either less than 12 hours after recurvature or prior to recurvature (Riehl, 1971). Abby, however, did not reach maximum intensity until 36 hours after recurvature. By 13 December, Typhoon Abby reached maximum intensity of 110 kt (57 m/sec) with a minimum sea-level pressure of 951 mb (Fig. 3-27-3). As Abby continued toward the east-northeast, she approached a regime of very strong westerlies in the middle-and upper-troposphere. The strong westerlies induced Abby's acceleration

and rapid weakening. Abby dissipated on the 14th due to strong vertical shear between the surface and middle levels.



FIGURE 3-27-3. Typhoon Abby just after recurvature, 12 December 1979, 00:12. (DMSP imagery)

<sup>1</sup>CHARLES B. STANFIELD, Capt., USAF: MISSION ARWO.

AD-A082 071


NAVAL OCEANOGRAPHY COMMAND CENTER/JOINT TYPHOON WARNI--ETC F/6 4/2  
ANNUAL TYPHOON REPORT 1979. (U)  
1979 J W DIERCKS, J K LAVIN, J H BELL

UNCLASSIFIED

NL


2-13

A large grid consisting of 10 columns and 10 rows. Most of the cells in the grid are blacked out. There are several white marks or artifacts within the grid: a small white square in the top row, second column; a pair of small white squares in the top row, sixth column; a single white square in the top row, seventh column; and a larger white square in the top row, tenth column. The first column of the grid contains some faint, illegible markings.



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A



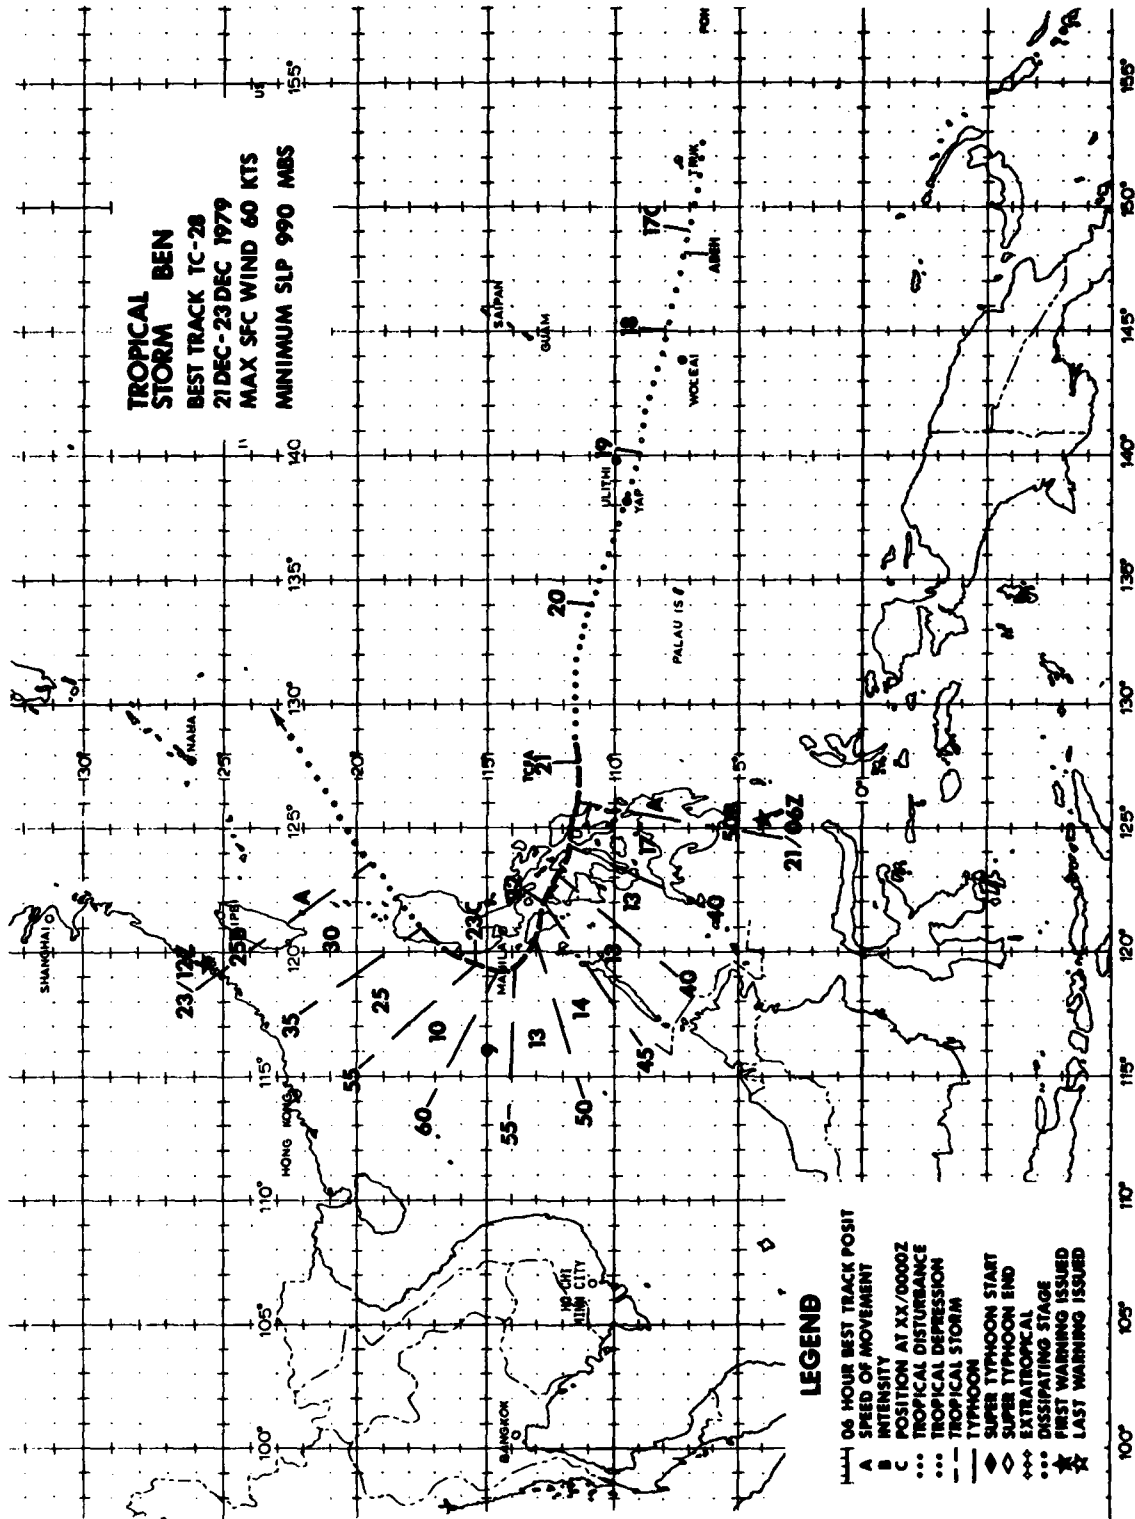

TROPICAL STORM BEN (28)

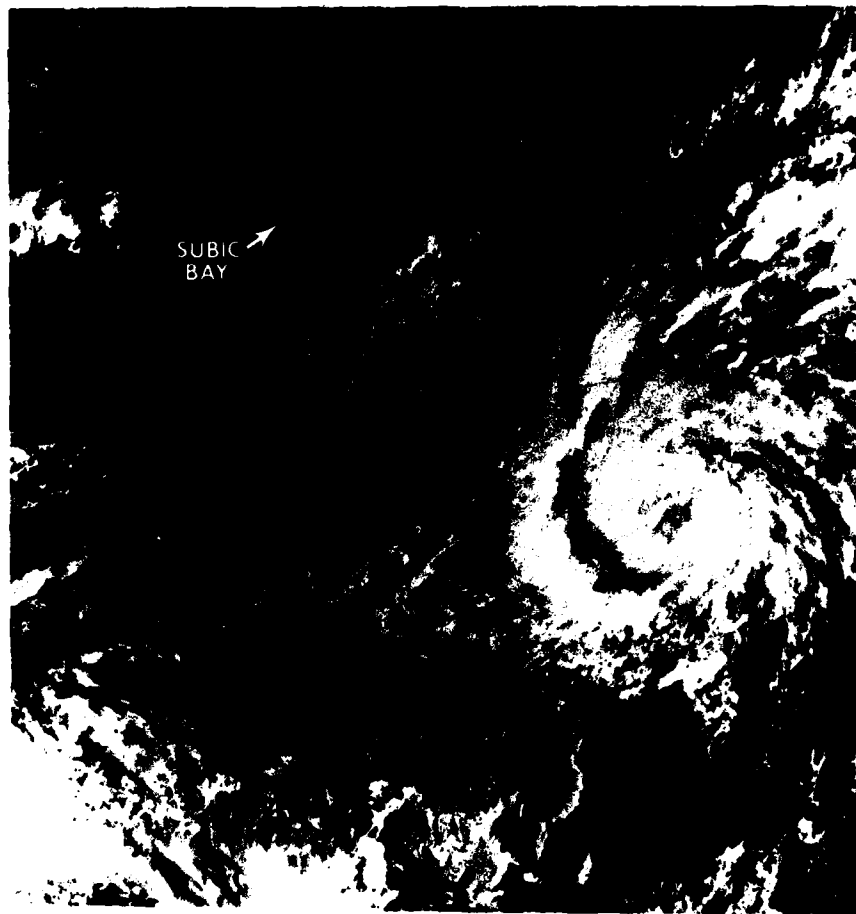


FIGURE 3-28-1. Tropical Storm Ben at 40 kt (21 m/sec) intensity, 21 October 1979, 0059Z. Ben was the last tropical cyclone in the western North Pacific during 1979. (DMSP imagery)

## 2. NORTH INDIAN OCEAN TROPICAL CYCLONES

During 1979, 7 significant tropical cyclones occurred in the North Indian Ocean area (Table 3-3). As usual, the transition

seasons between the northeast and southwest monsoon periods were the favored "cyclone seasons" (Table 3-4). This was an above normal season with most activity occurring during the fall transition period.

TABLE 3-3 NORTH INDIAN OCEAN

### 1979 SIGNIFICANT TROPICAL CYCLONES

<u>CYCLONE</u>	<u>PERIOD OF WARNING</u>	<u>CALENDAR DAYS OF WARNING</u>	<u>MAX SFC WIND</u>	<u>EST MIN SLP</u>	<u>NUMBER OF WARNINGS</u>	<u>DISTANCE TRAVELLED</u>
TC 17-79	06 MAY-12 MAY	7	85	967	26	1267
TC 18-79	18 JUN-20 JUN	3	50	985	12	581
TC 22-79	21 SEP-23 SEP	3	25	1000	10	694
TC 23-79	21 SEP-25 SEP	5	55	980	14	1108
TC 24-79	29 OCT-01 NOV	4	35	995	13	720
TC 25-79	16 NOV-17 NOV	2	40	994	8	547
TC 26-79	23 NOV-25 NOV	3	30	995	10	1071
	1979 TOTALS	24*			93	

\*OVERLAPPING DAYS INCLUDED ONLY ONCE IN SUM.

TABLE 3-4.


### 1979 SIGNIFICANT TROPICAL CYCLONE STATISTICS


<u>NORTH INDIAN OCEAN</u>	<u>JAN</u>	<u>FEB</u>	<u>MAR</u>	<u>APR</u>	<u>MAY</u>	<u>JUN</u>	<u>JUL</u>	<u>AUG</u>	<u>SEP</u>	<u>OCT</u>	<u>NOV</u>	<u>DEC</u>	<u>TOTAL</u>
ALL CYCLONES	0	0	0	0	1	1	0	0	2	1	2	0	7
(1971-78) AVERAGE*	0.1	0	0	0.3	0.5	0.3	0	0	0.4	0.8	1.4	0.3	4

FORMATION ALERTS 7 of the 8 (87%) Formation Alert Events developed into numbered cyclones.

WARNINGS  
 Number of warning days: 25  
 Number of warning days with 2 cyclones: 3  
 Number of warning days with 3 or more cyclones: 0

\*From 1971 through 1974, only Bay of Bengal cyclones were considered; the JTWC area of responsibility was extended in 1975 to include Arabian Sea cyclones.

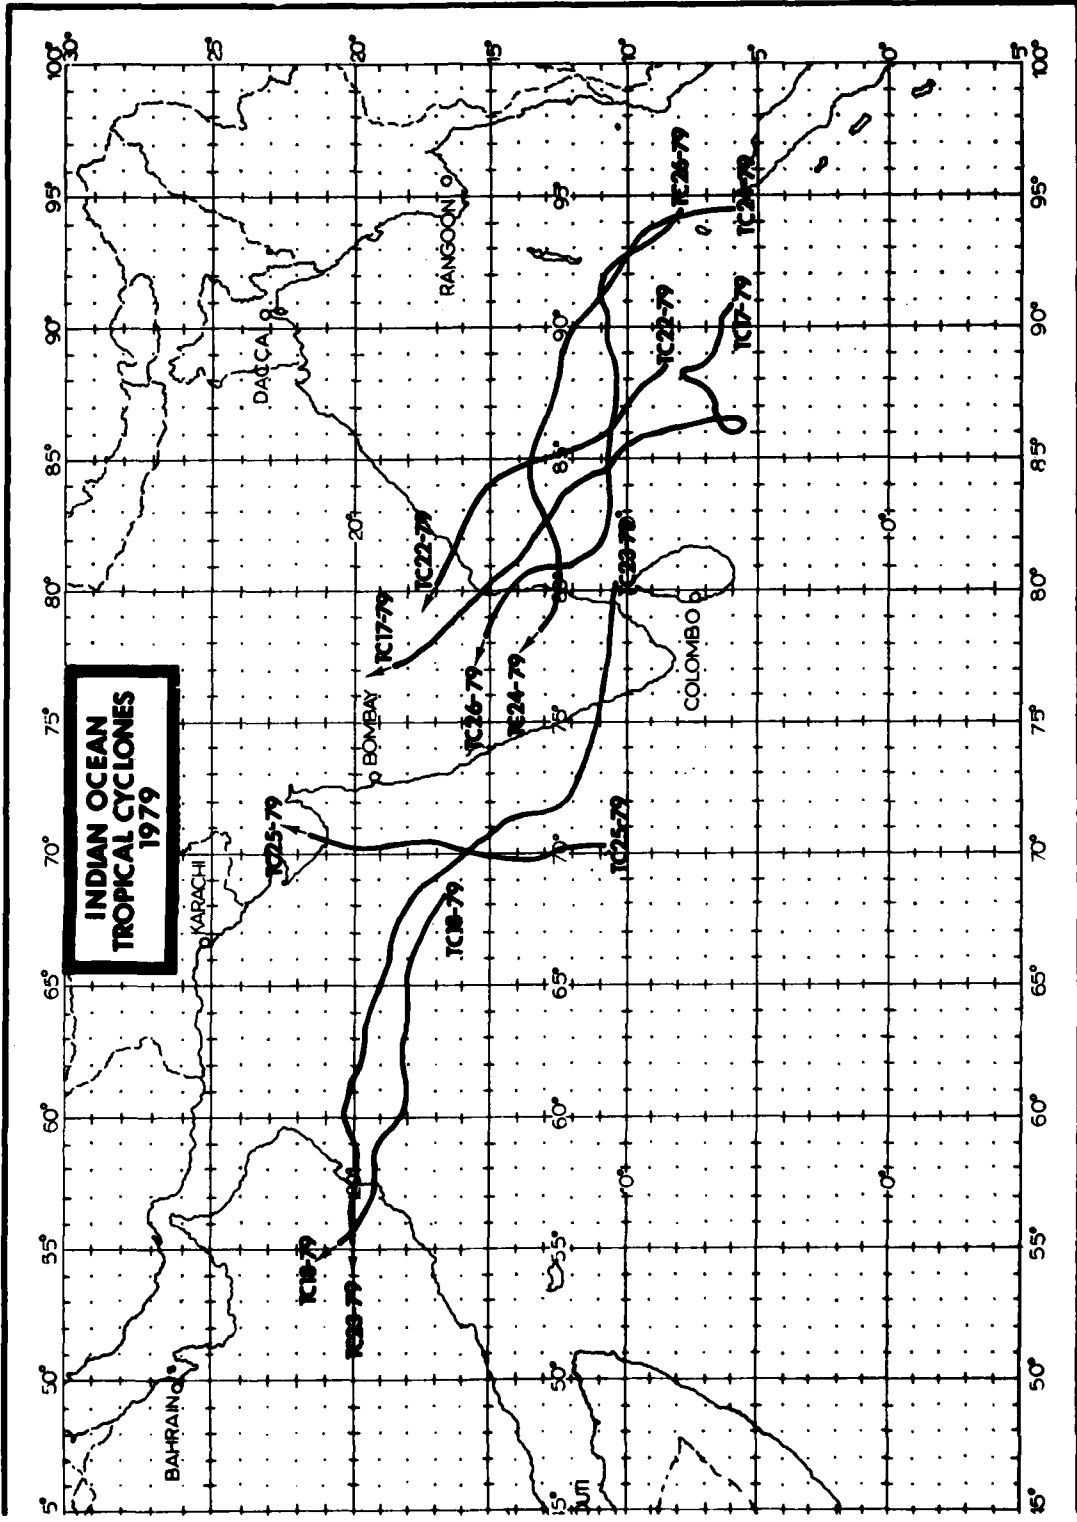

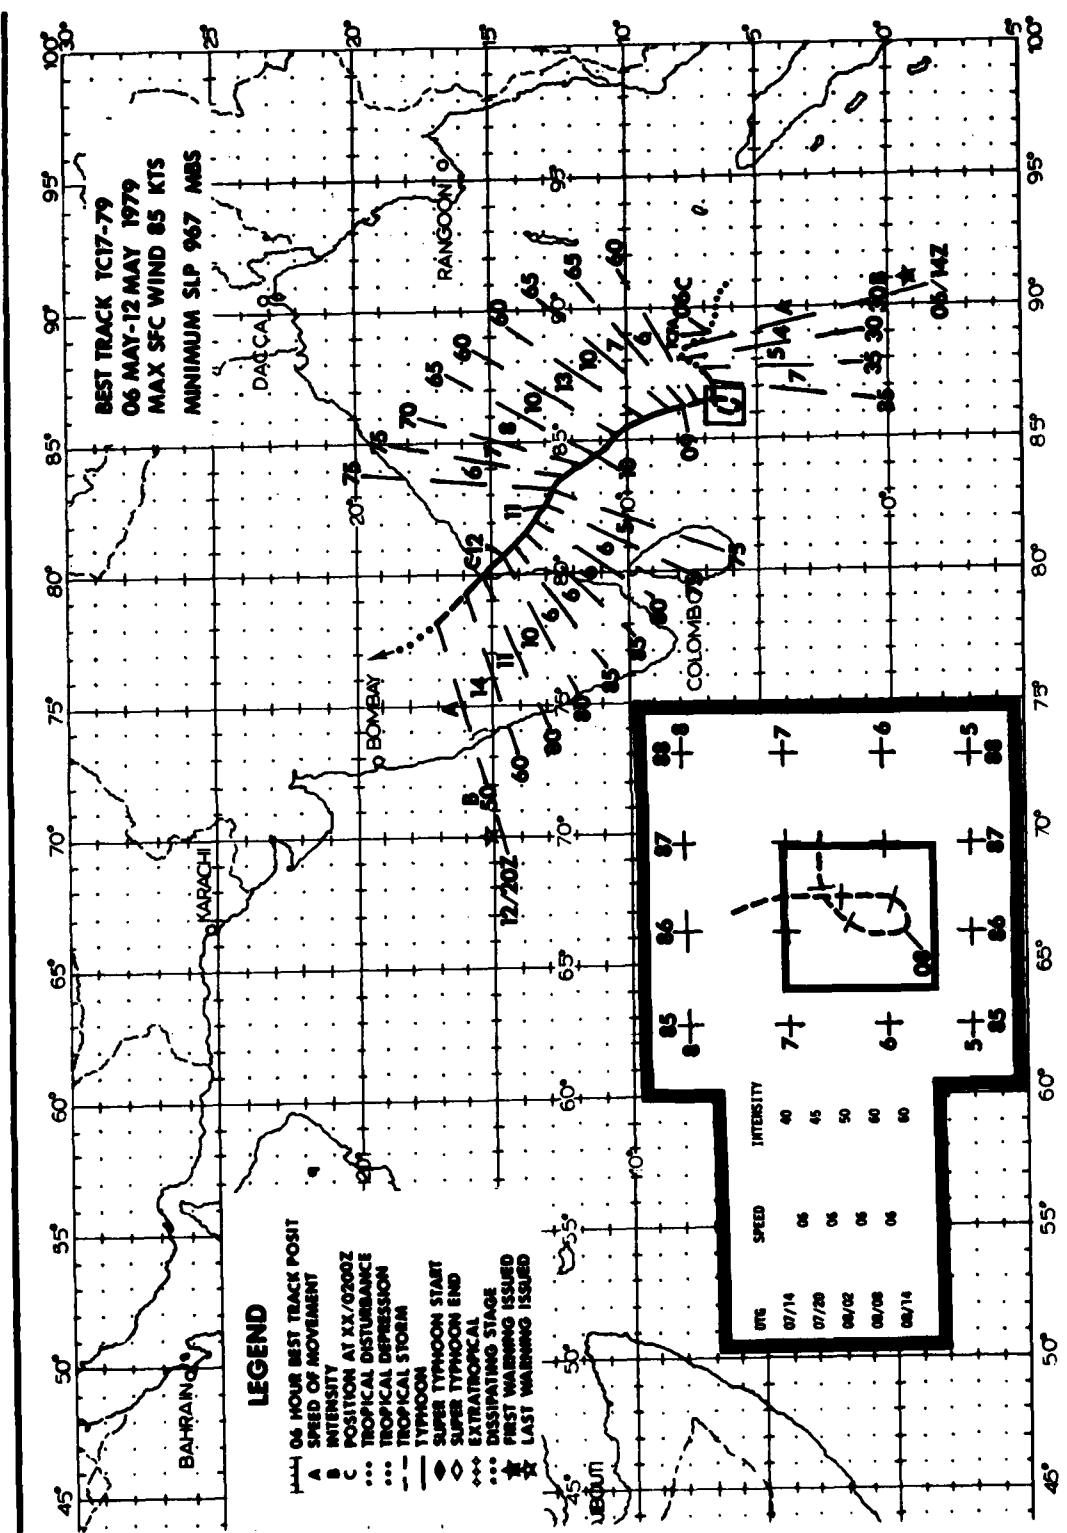

TC 17-79

TC 17-79 was the only significant tropical cyclone in the Bay of Bengal during the 1979 spring transition season. Attaining typhoon intensity, TC 17-79 was the most destructive cyclone in India since TC 22-77 (Nov 1977) which, coincidentally, followed a similar track.

A Tropical Cyclone Formation Alert and the first warning were precipitated by synoptic reports received from ships participating in the First GARP Global Experiment (FGGE). At 1200Z on 6 May, these ships' observations defined a cyclonic circulation near 07N-088E with reported surface pressures near 1003 mb and wind speeds of 20-25 kt (10-12 m/sec). The first warning on TC 17-79 was issued at 061507Z.

From 060000Z through 061200Z, a strong mid-tropospheric ridge extended westward along 15N with southeast steering flow dominating TC 17-79's movement. During the same time period, a short-wave trough, evident at both middle and upper levels, was deepening over India. Interaction between this ridging and troughing resulted in a loss of definitive steering flow in the vicinity of TC 17-79, producing an erratic north and then south track. Also during this time, TC 16-79 located in the southern Indian Ocean about 750-800 nm (1389-1481 km) to the southwest,

began tracking slowly to the southeast possibly initiating a Fujiwhara type interaction.

By 080000Z, a mid-level anticyclone had formed in the northern Bay of Bengal with east-northeasterly steering flow over TC 17-79 resulting in a west-southwest forecast track. From 080000Z through 090000Z, while TC 17-79 intensified (Fig. 3-29), the dominant steering flow shifted to the south then southeast as the mid-level ridge was replaced by a trough and the upper-level trough dug southward over India. As a result of this shift in steering flow, TC 17-79 executed a tight cyclonic loop from 080000Z to 081800Z. From 7 through 9 May, though satellite fix position accuracies improved due to the formation of a well-defined eye, forecast errors increased appreciably due to the erratic movement.

By 091200Z, southeast steering flow became dominant with TC 17-79 oscillating about a northwest track until making landfall over India (Fig. 3-30). TC 17-79 struck the east central coast of India at 120800Z, 45 nm (83 km) north of Nellore with maximum sustained winds of 80 kt (41 m/sec). Twenty-one deaths occurred and over 800,000 persons were left homeless as a result of TC 17-79's passage over the Nellore district.



FIGURE 3-29. TC 17-79 with well-defined satellite signature during the erratic cyclonic loop, 8 May 1979, 0528Z. (DMSP imagery from AFGWC, Offutt AFB, Nebraska)


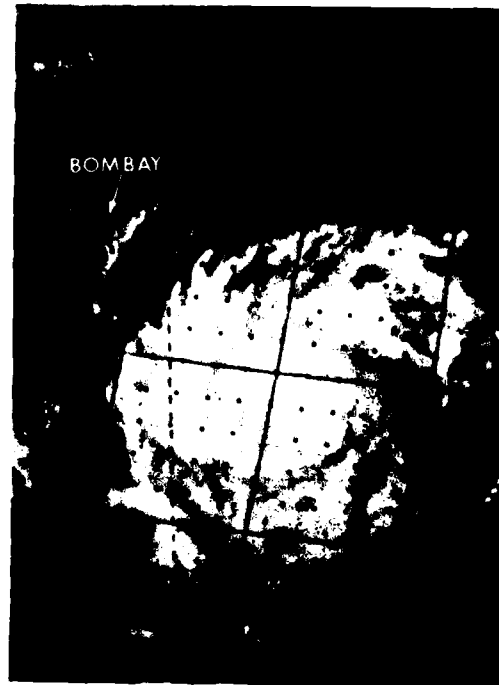


FIGURE 3-30. TC 17-79 just prior to making landfall over east central India with 80 kt (41 m/sec) intensity, 12 May 1979, 0556Z. (DMSP imagery from AFGWC, Offutt AFB, Nebraska)

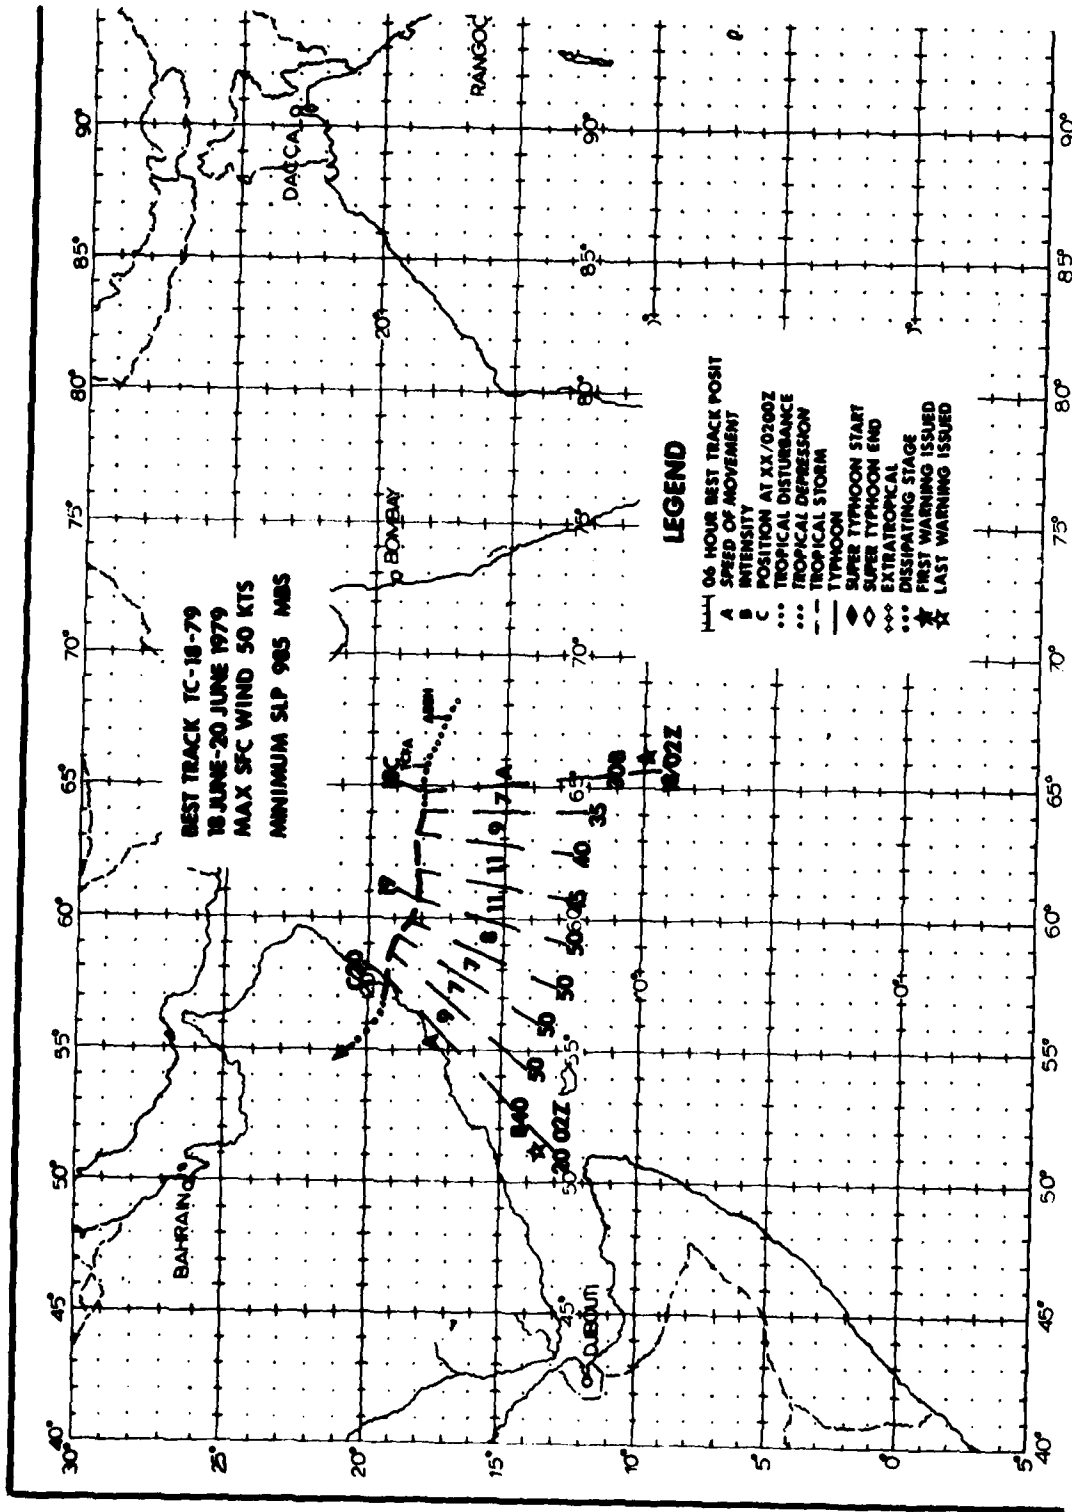

BEST TRACK TC-18-79  
 18 JUNE-20 JUNE 1979  
 MAX SFC WIND 50 KTS  
 MINIMUM SLP 985 MBS

**LEGEND**

- 06 HOUR BEST TRACK POSIT
- A SPEED OF MOVEMENT
- B INTENSITY AT XX/0200Z
- C POSITION AT XX/0200Z
- ... TROPICAL DISTURBANCE
- ... TROPICAL DEPRESSION
- TROPICAL STORM
- TYPHOON
- ◊ SUPER TYPHOON START
- ◊ SUPER TYPHOON END
- ◊ EXTRATROPICAL
- ... DISSIPATING STAGE
- ★ FIRST WARNING ISSUED
- ★ LAST WARNING ISSUED

TC 18-79

TC 18-79 began 171400Z June 1979 as a monsoon depression in the Arabian Sea and tracked virtually westward throughout its life, finally dissipating over the Oman coast (Fig. 3-31). Although TC 18-79's movement was confined to a narrow 2-degree latitudinal band, the extent of the meteorological hazard from gale force winds encompassed roughly half of the Arabian Sea. These gale force winds were produced by the interaction of TC 18-79 with the normal southwest monsoonal flow over the Arabian Sea.

During this season, a climatological low-level wind maximum develops off the coast of Somali. Normal wind speeds can reach 35-40 kt (18-21 m/sec), but the gale area is generally localized near the coast. However, beginning 2 days prior to TC 18-79's forma-

tion, a surge in the monsoonal flow occurred and a low-level jet could be traced from the Somali coast extending eastward across the entire Arabian Sea. The strength and persistence of this feature aided the formation of TC 18-79 in the cyclonic shear side of the wind maximum. As TC 18-79 intensified and moved westward, the southwesterly flow strengthened to a point where 65 kt (33 m/sec) surface winds were observed 600 nm (1111 km) away from TC 18-79's center. Examination of the visual data of Figure 3-31 shows cloud streets indicative of this strong low-level flow from 05N to 12N between 55E to 62E. The gale area persisted during TC 18-79's dissipation over land, weakening gradually with time. Interestingly, post-analysis reveals the maximum winds in the gale area exceeded the maximum sustained winds estimated in TC 18-79's center.




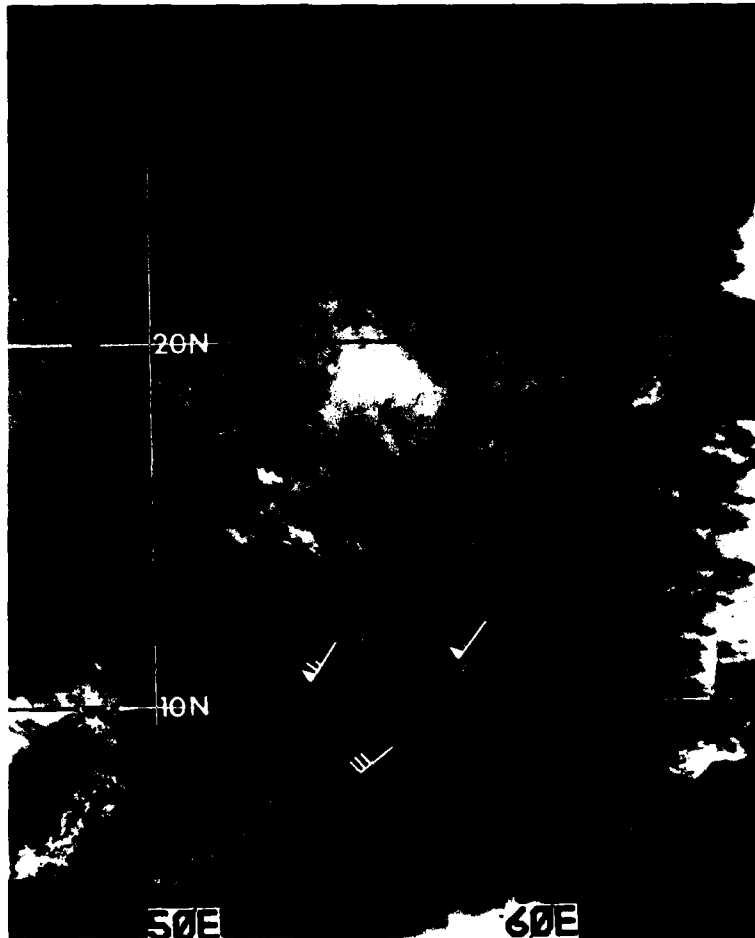


FIGURE 3-31. TC 18-79 located just off the Oman coast with gale force winds to the south, 20 June 1979, 0731Z. Superimposed are ship observations at 200600Z. (DMSP imagery from AFGWC, Offutt AFB, Nebraska)



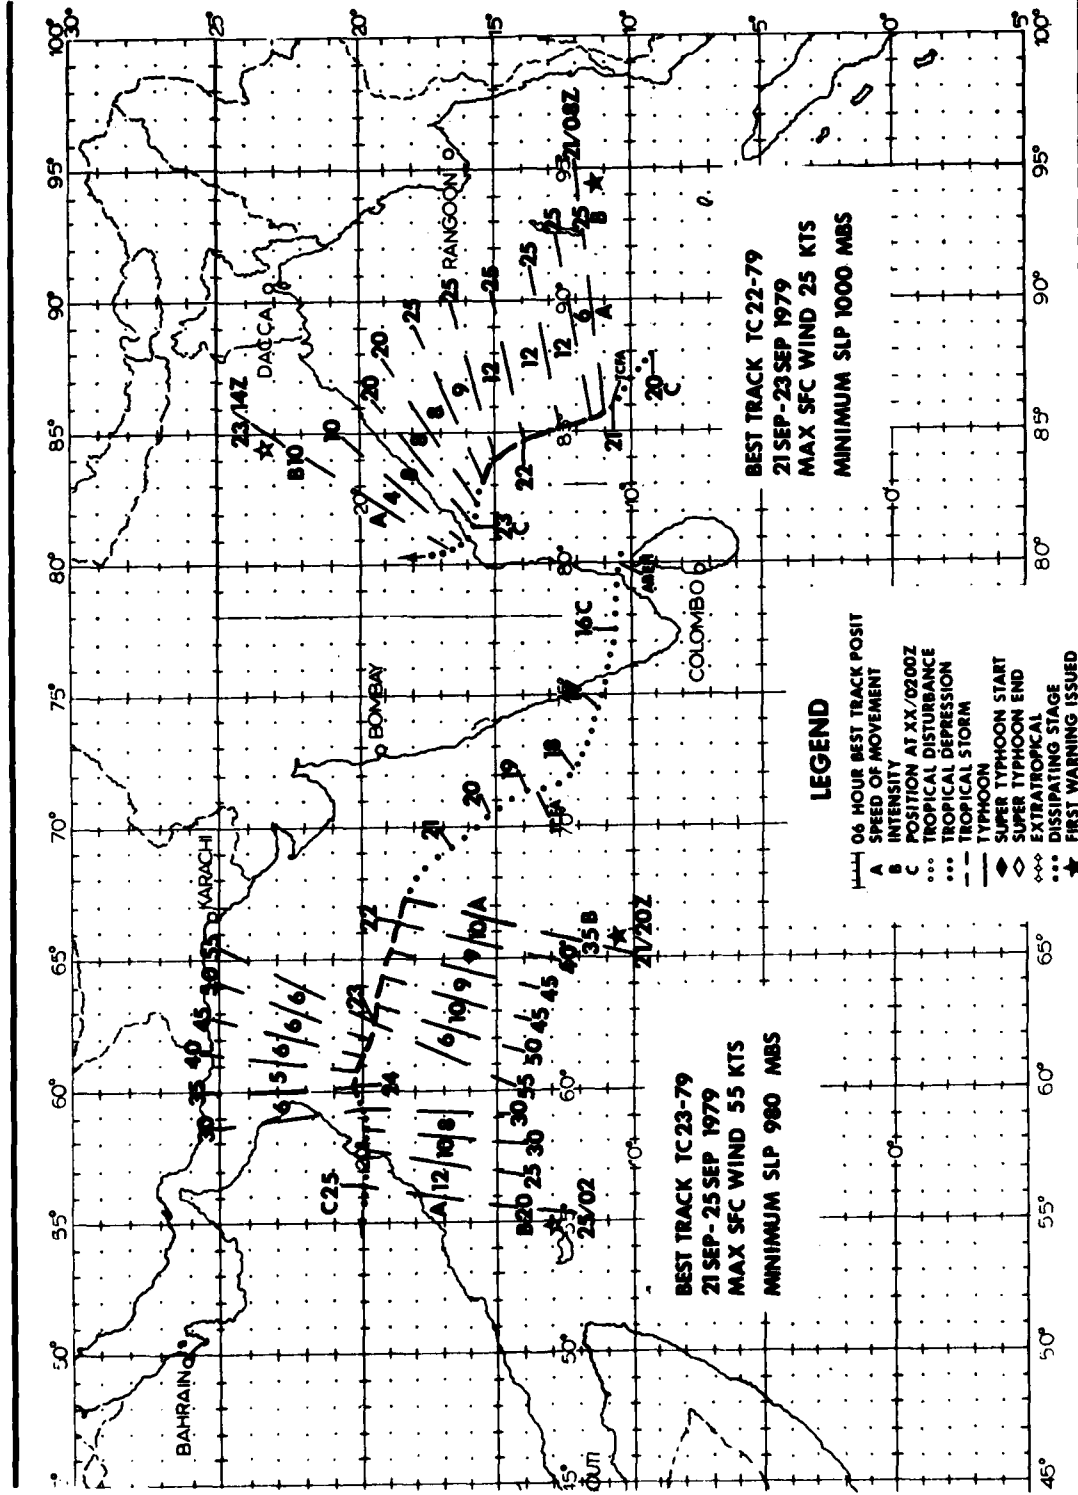

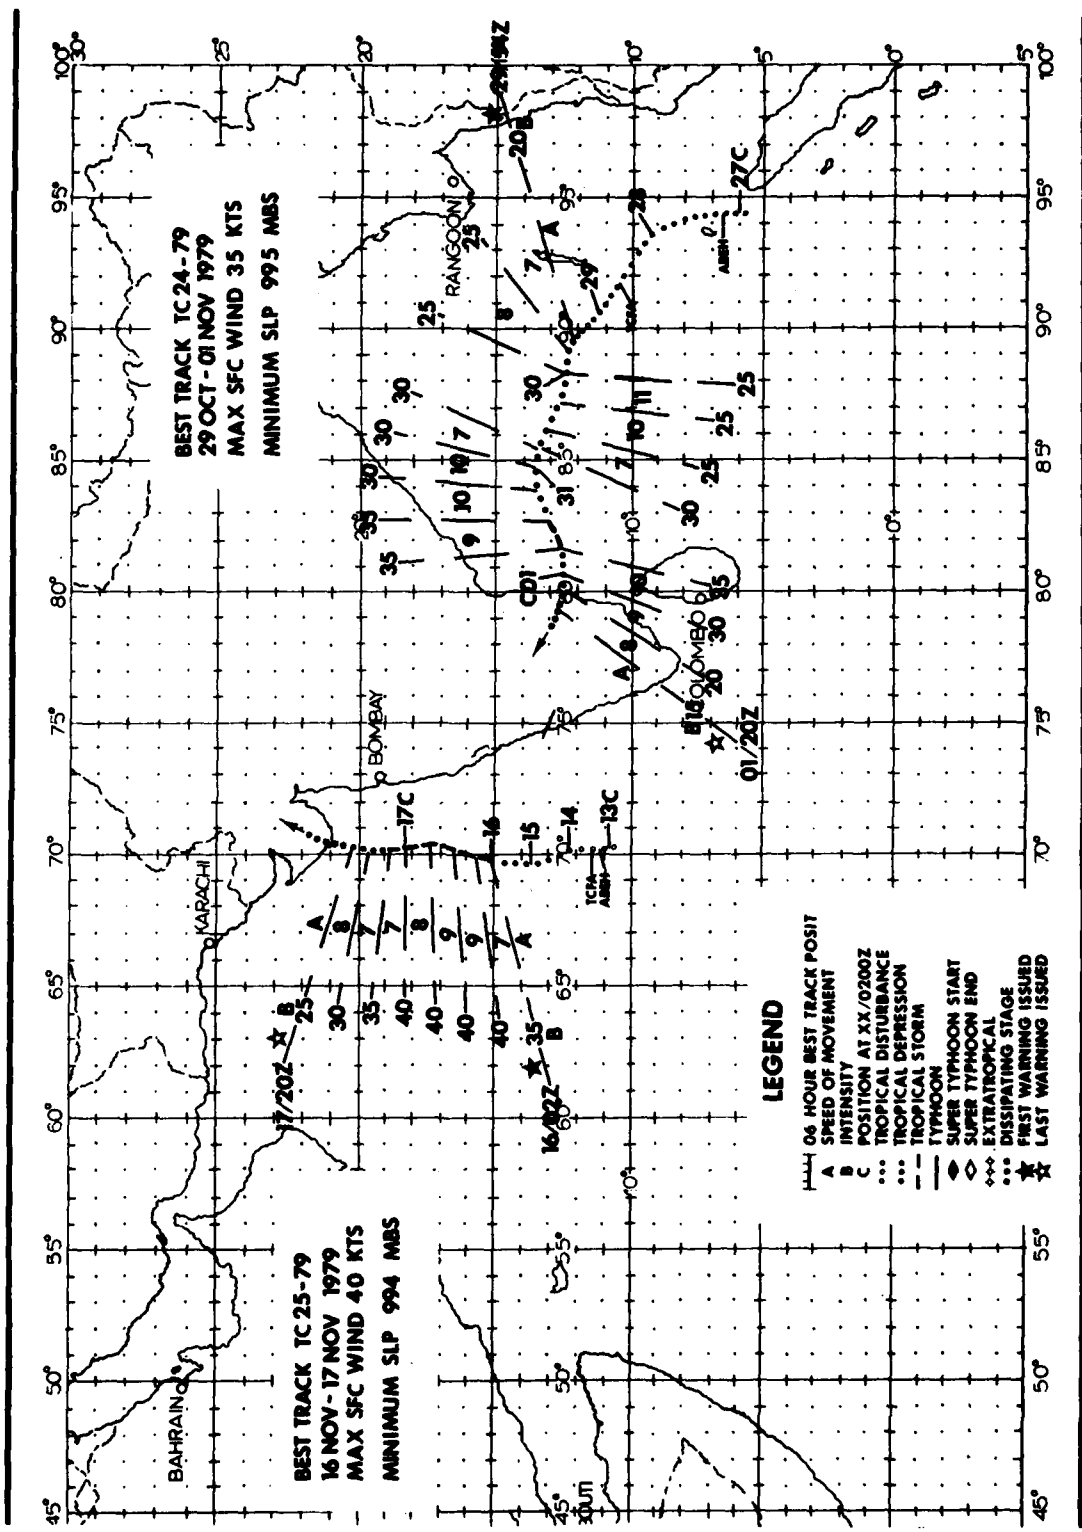

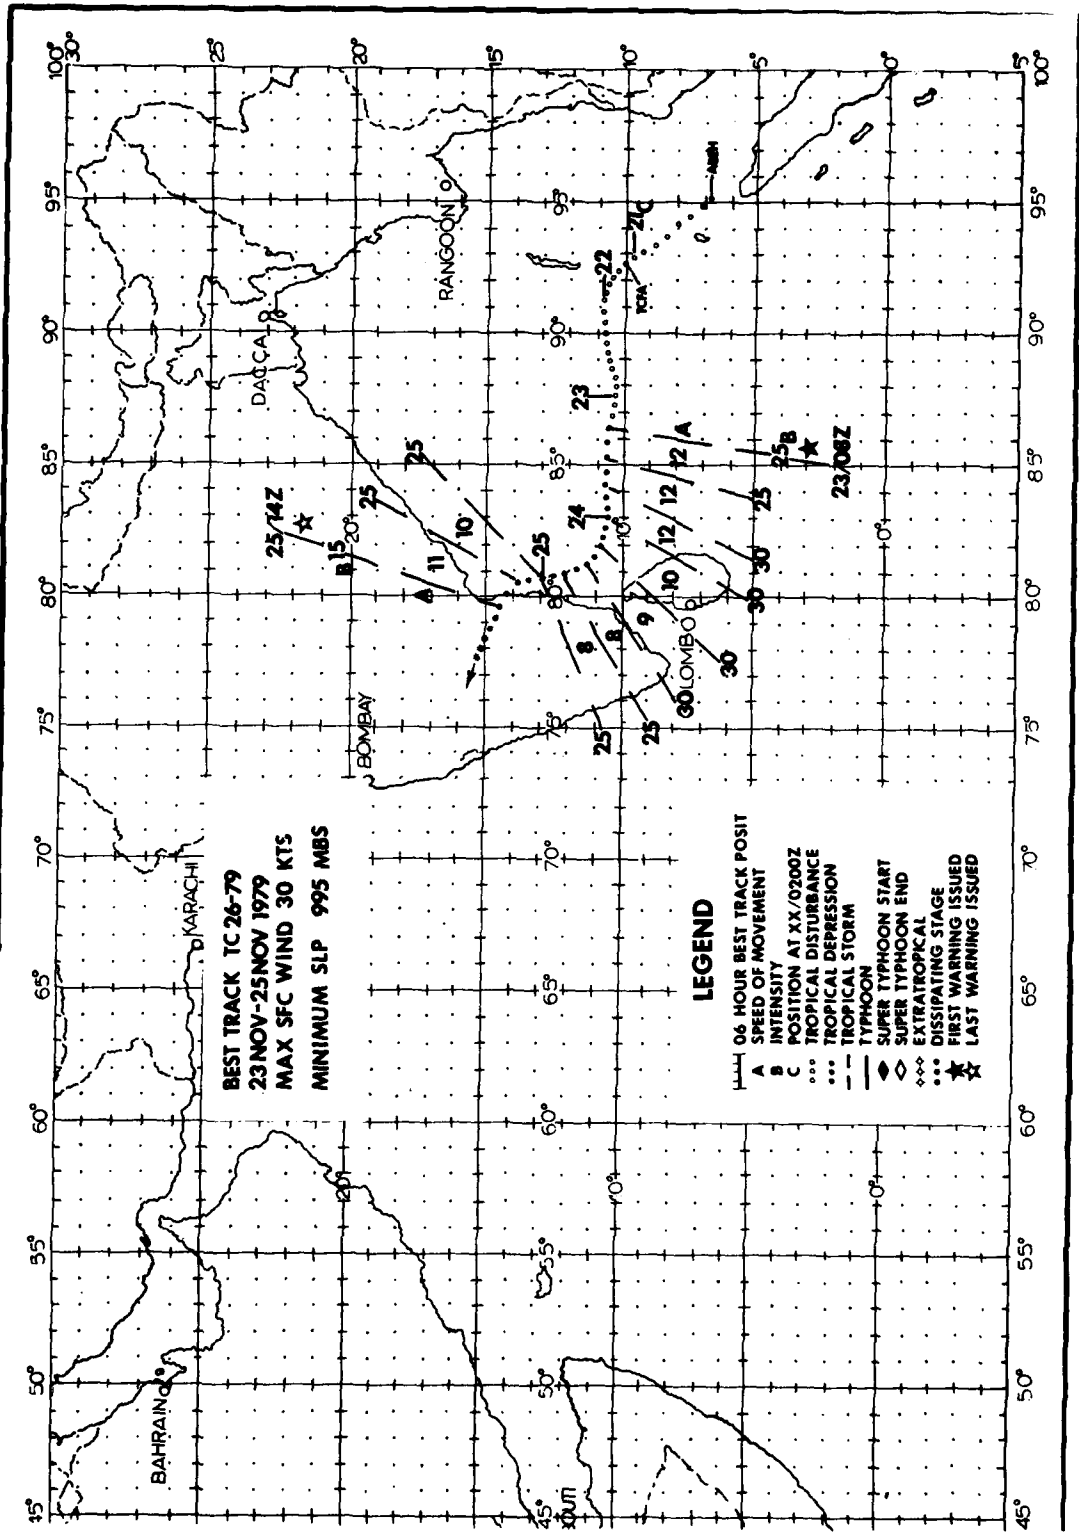

TC 26-79

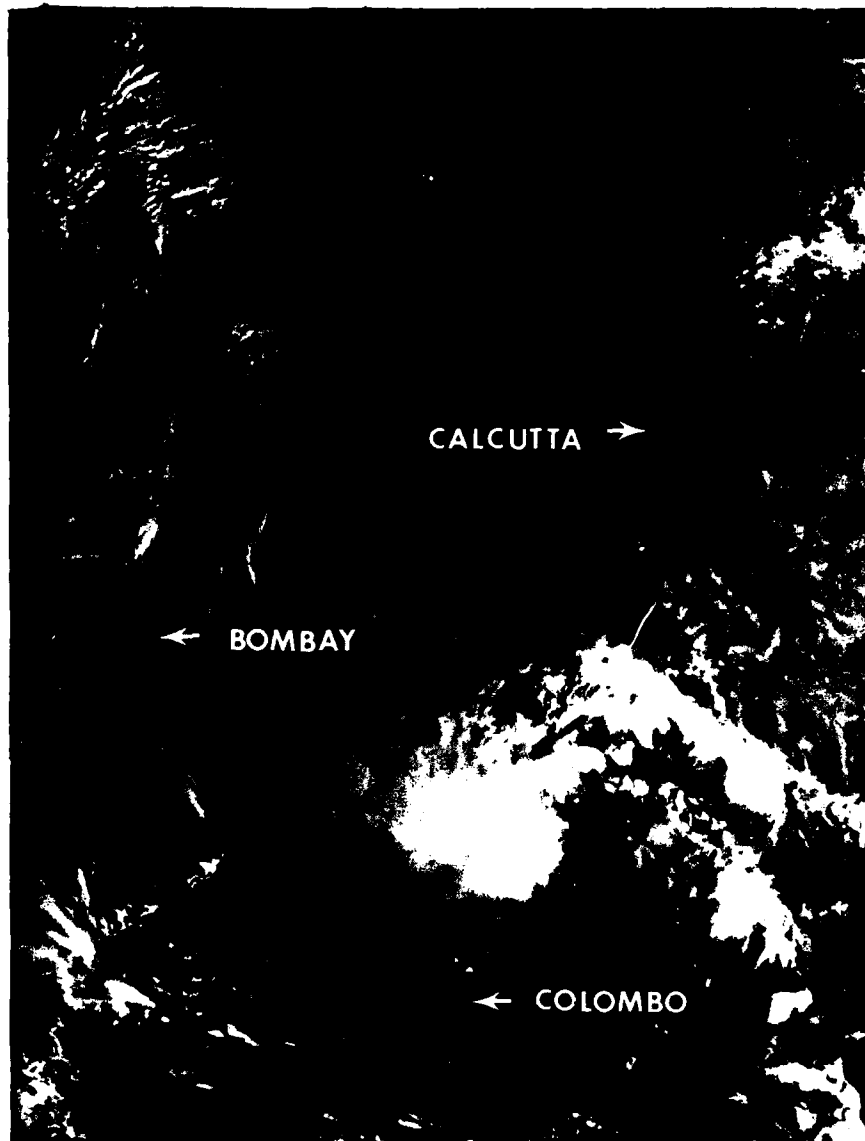


FIGURE 3-32. TC 26-79 as an exposed low-level circulation, 24 November 1979, 0455Z. (DMSP imagery from AFGWC, Offutt AFB, Nebraska)

## CHAPTER IV SUMMARY OF FORECAST VERIFICATION

### I. ANNUAL FORECAST VERIFICATION

#### a. Western North Pacific Area

Forecast positions at warning times and 24-, 48-, and 72-hour valid times were verified against corresponding best tracks. Vector errors and right angle errors for individual tropical cyclones were calculated

and are displayed in Table 4-1. Annual mean errors for all tropical cyclones are listed in Table 4-2 for comparison. Frequency distributions of the vector errors for 24-, 48-, and 72-hour forecasts on all 1979 tropical cyclones are shown in Figure 4-1. Annual mean vector errors are graphed in Figure 4-2.

TABLE 4-1. FORECAST ERROR SUMMARY FOR THE 1979 WESTERN NORTH PACIFIC SIGNIFICANT TROPICAL CYCLONES.

CYCLONE	WARNING			24 HOUR			48 HOUR			72 HR		
	POSIT ERROR	RT ANGLE ERROR	# WRNGS	POSIT ERROR	RT ANGLE ERROR	# WRNGS	POSIT ERROR	RT ANGLE ERROR	# WRNGS	POSIT ERROR	RT ANGLE ERROR	# WRNGS
1. TY ALICE	18	11	51	105	83	47	222	175	43	338	271	39
2. TY BESS	19	15	21	114	73	17	265	164	13	348	240	9
3. TY CECIL	15	11	40	87	62	37	191	131	33	320	215	29
4. TS DOT	23	16	24	130	79	23	244	171	20	315	257	16
5. TD-05	12	12	6	158	150	3						
6. TY ELLIS	25	21	22	71	57	18	145	103	14	185	113	10
7. TS FAYE	35	21	20	138	86	17	167	93	14	180	99	10
8. TD-08	43	20	5	195	70	4	396	396	1			
9. TS GORDON	23	12	13	129	90	9	173	121	5	449	278	1
10. TS HOPE	23	16	33	134	75	29	266	140	23	376	188	21
11. TD-11	47	30	14	144	94	10	138	89	6	171	129	2
12. TY IRVING	26	17	38	163	98	34	286	209	30	441	344	26
13. ST JUDY	18	12	39	105	81	36	173	138	27	277	213	23
14. TD-14	33	19	9	157	43	5	296	118	1			
15. TS KEN	29	13	13	116	60	10	278	111	7	415	195	3
16. TY LOLA	16	10	23	88	64	21	172	148	19	287	236	14
17. TY MAC	23	16	35	93	66	27	196	152	19	279	227	19
18. TS NANCY	28	19	14	116	86	9	216	186	4	227	219	1
19. TY OWEN	25	15	37	146	78	33	250	158	29	327	256	25
20. TS PAMELA	28	22	6	254	15	2						
21. TS ROGER	32	19	16	195	93	13	251	108	9	303	178	4
22. TY SARAH	26	16	43	61	40	39	110	86	34	143	107	27
23. ST TIP	24	15	60	135	69	56	259	142	52	345	214	48
24. ST VERA	43	20	23	148	69	19	249	111	15	385	247	11
25. TS WAYNE	27	14	22	170	115	16	362	295	12	443	413	4
26. TY ABBY	31	17	52	164	108	48	286	198	39	338	215	26
27. TD-26	21	16	6	55	28	3						
28. TS BEN	34	18	10	81	89	6	287	16	2			
ALL FORECASTS	25	16	695	124	77	591	226	151	471	316	223	368

TABLE 4-2. ANNUAL MEAN FORECAST ERRORS FOR THE WESTERN NORTH PACIFIC.

YEAR	24-HR		48-HR		72-HR	
	VECTOR	RIGHT ANGLE	VECTOR	RIGHT ANGLE	VECTOR	RIGHT ANGLE
1971	111	64	212	118	317	177
1972	117	72	245	146	381	210
1973	108	74	197	134	253	162
1974	120	78	226	157	348	245
1975	138	84	288	181	450	290
1976	117	71	230	132	338	202
1977	148	83	283	157	407	228
1978	127	75	271	179	410	297
1979	124	77	226	151	316	223

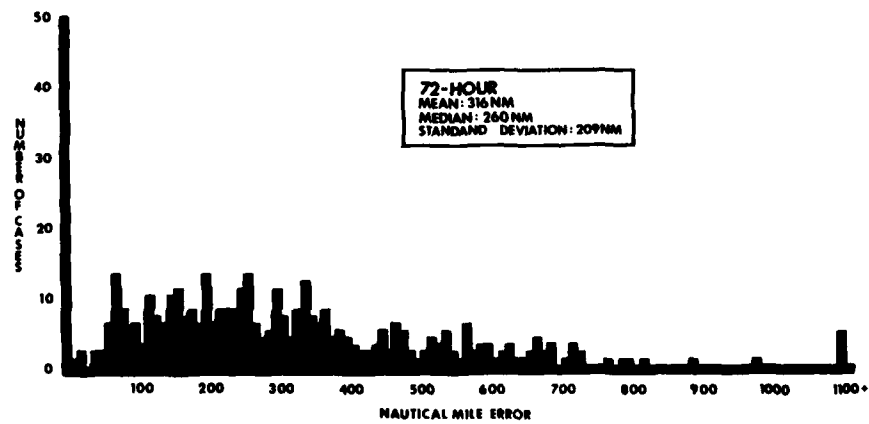
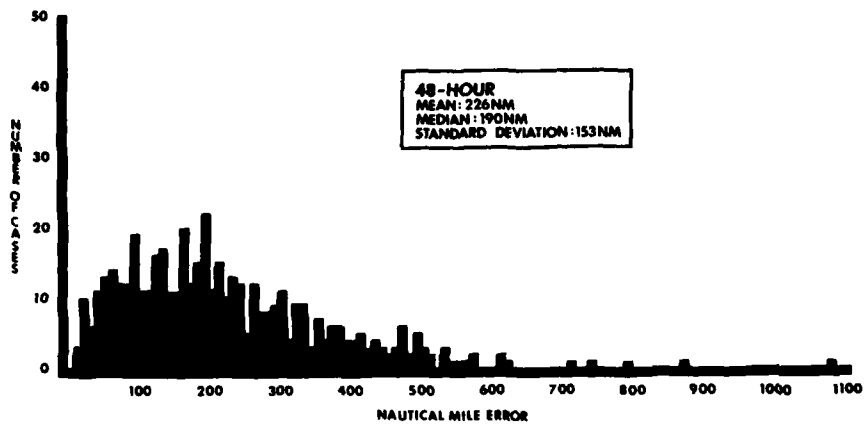
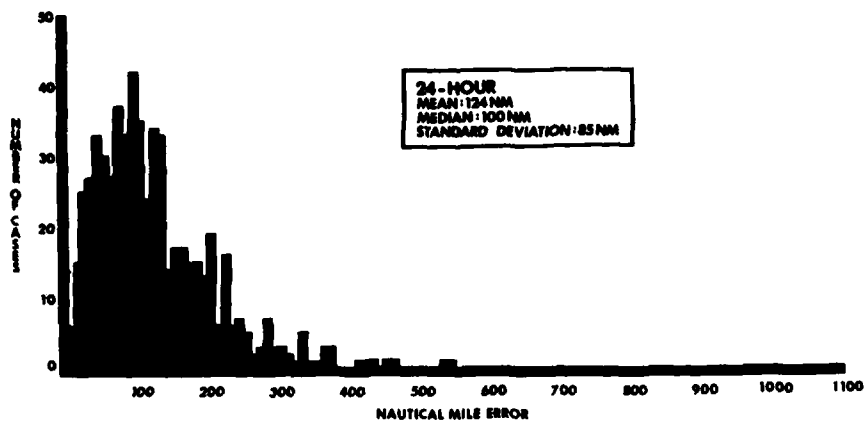


FIGURE 4-1. Frequency distribution of 1979 24-, 48-, and 72-hour forecast vector errors for all significant tropical cyclones in the western North Pacific.

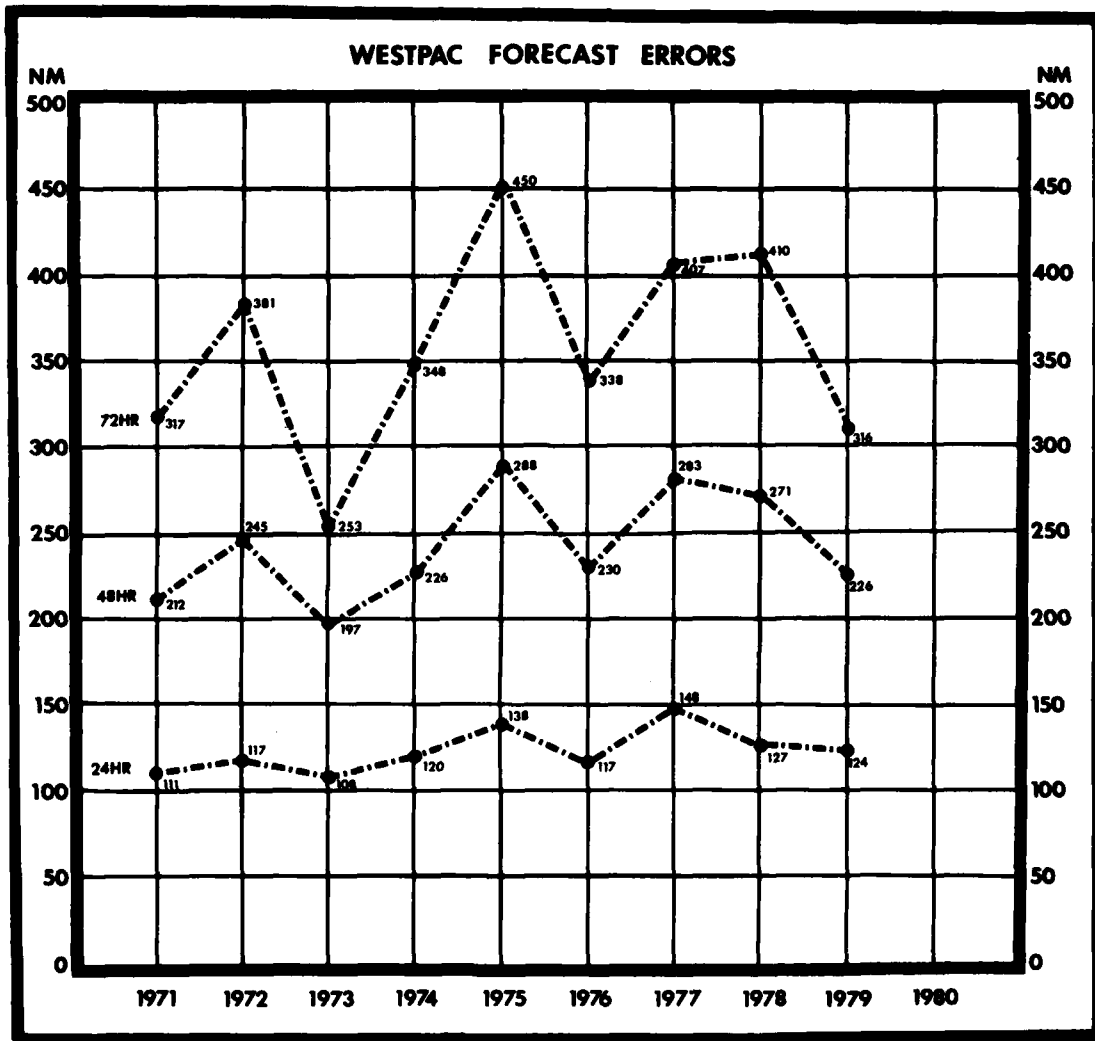


FIGURE 4-2. Annual vector errors (nm) for all cyclones in the western North Pacific.

Intensity verification statistics for all significant tropical cyclones in the western North Pacific area are depicted in Figures 4-3 and 4-4. The average absolute magnitude of the intensity error as well as the intensity bias (algebraic average) are graphically depicted. An analysis of the errors indicates that JTWC intensity forecasts often lag true intensity. In intensi-

fyng situations, JTWC underforecasts, while in weakening situations JTWC overforecasts. This causes a large average magnitude error, but a small average bias. Verification of intensity forecasts by objective aids is also depicted in Figures 4-3 and 4-4. (An explanation of the objective forecasting aids is found in this chapter, Section 2-Comparison of Objective Techniques.)

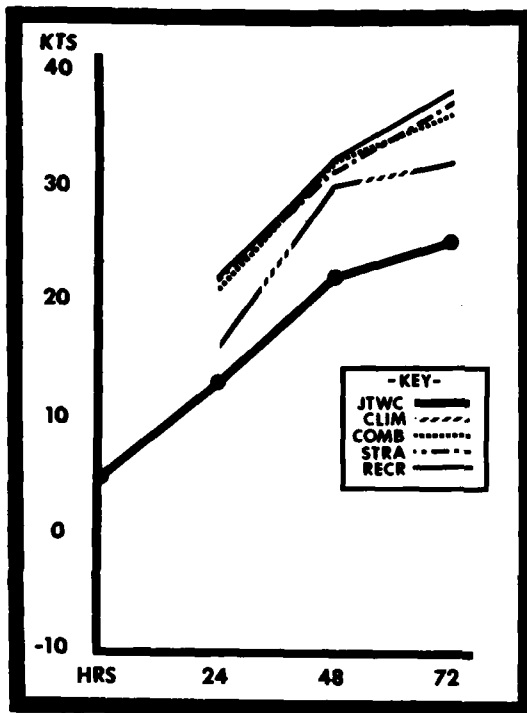


FIGURE 4-3. Comparison of average intensity errors (magnitude) for all cyclones in the western North Pacific.

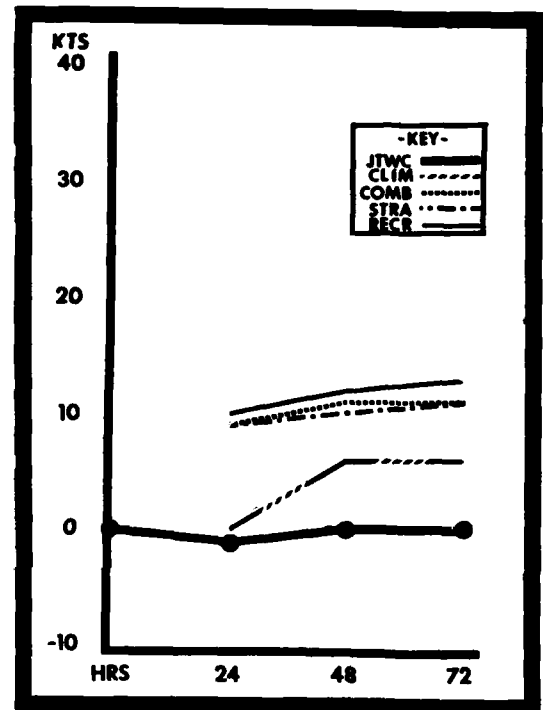


FIGURE 4-4. Comparison of average intensity errors (biases) for all cyclones in the western North Pacific.



b. North Indian Ocean Area

Forecast positions at Warning times and 24-, 48-, and 72-hour valid times were verified by the same methods used for the western North Pacific area. Table 4-3 is the forecast error summary for the significant tropical cyclones in the North Indian

Ocean area. Table 4-4 contains the annual average of forecast errors back through 1971. Vector errors are plotted in Figure 4-5. Seventy-two hour forecast errors were evaluated for the first time in 1979.

Forecast intensities were not verified.

TABLE 4-3. FORECAST ERROR SUMMARY FOR THE 1979 NORTH INDIAN OCEAN SIGNIFICANT TROPICAL CYCLONES.

CYCLONE	WARNING			24 HOUR			48 HOUR			72 HOUR		
	POSIT ERROR	RT ANGLE ERROR	WINGS	POSIT ERROR	RT ANGLE ERROR	WINGS	POSIT ERROR	RT ANGLE ERROR	WINGS	POSIT ERROR	RT ANGLE ERROR	WINGS
TC 17-79	36	17	26	139	95	22	233	192	18	346	296	14
TC 18-79	48	24	12	137	78	7	363	284	4			
TC 21-79	34	34	10	122	90	7	170	122	3			
TC 23-79	48	21	14	160	97	9	253	184	5	773	629	2
TC 24-79	48	26	13	190	142	9	482	332	5	1036	902	1
TC 25-79	50	26	8	189	103	4	121	73	1			
TC 26-79	52	31	10	148	83	5	163	21	2			
ALL FORECASTS	46	24	93	151	99	63	270	202	38	437	371	17

TABLE 4-4. ANNUAL MEAN FORECAST ERRORS FOR THE NORTH INDIAN OCEAN (the Arabian Sea was not included prior to 1975).

YEAR	24-HR		48-HR		72-HR	
	VECTOR	RIGHT ANGLE	VECTOR	RIGHT ANGLE	VECTOR	RIGHT ANGLE
1971	232	-	410	-	-	-
1972	224	101	292	112	-	-
1973	182	99	299	160	-	-
1974	137	81	238	146	-	-
1975	145	99	228	144	-	-
1976	138	108	204	159	-	-
1977	122	94	292	214	-	-
1978	133	86	202	128	-	-
1979	151	99	270	202	437	371

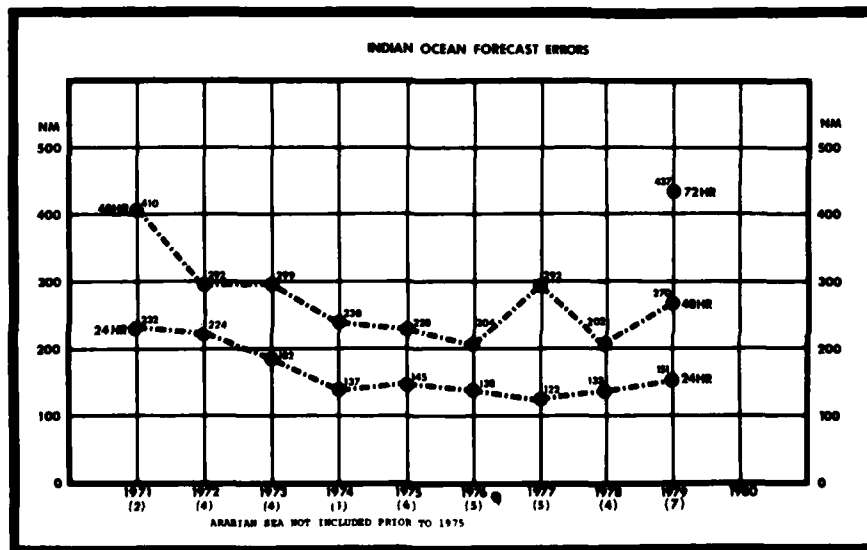


FIGURE 4-5. Annual mean vector errors (nm) for all cyclones in the North Indian Ocean.

## 2. COMPARISON OF OBJECTIVE TECHNIQUES

### a. General

Objective techniques used by JTWC are divided into four main categories: (1) climatological and analog techniques; (2) extrapolation; (3) steering techniques; and (4) a dynamic model. The analog technique provides three movement forecasts: one for straight moving cyclones, one for recurving cyclones and one which combines the tracks of straight, recurving and cyclones that do not meet the criteria of straight or recurving analogs. All techniques were executed using the operational data available at warning time.

### b. Description of Objective Techniques

(1) TYFN75 - Analog program which scans history tapes for cyclones similar (within a specified acceptance envelope) to the current cyclone. Three 24-, 48-, and 72-hour position and intensity forecasts are provided (straight, recurve and combined).

(2) MOHATT 700/500 - Steering program which advects a point vortex on a preselected analysis and smoothed prognostic field at designated levels in 6-hour time steps through 72 hours. Utilizing the previous 12-hour history position, MOHATT computes the 12-hour forecast error and applies a bias correction to the forecast position.

(3) TCM - The Tropical Cyclone Forecast model is a coarse mesh (220 km) PE Model, with the digitized storm warning position bogused in the 850 mb wind and temperature fields of the FLENUMOCEANCEN Global Band Analysis. Hemispheric forecast data are used on the boundaries.

(4) CLIM - A climatological aid in the form of 24-, 48-, and 72-hour tropical

cyclone forecast positions and intensity changes for initial latitude/longitude positions. The data are arranged by months and are based on historical data which includes 1945 to 1973. This detailed climatology replaced the previous JTWC climatology on 1 September 1980.

(5) 12-HR EXTRAPOLATION - A track through the current warning position and the 12-hour old preliminary best track position is linearly extrapolated to 24 and 48 hours.

(6) HPAC - The 24- and 48-hour forecast positions are derived by averaging the 24- and 48-hour positions from the 12-hour EXTRAPOLATION track and the CLIM track.

(7) INJAH74 - Analog program for the North Indian Ocean similar to TYFN75, except tracks are not segregated.

(8) TYAN - An updated analog program which combines TYFN75 and INJAH74.

(9) CYCLOPS - An updated version of the MOHATT program which has the capability to select steering forecasts at the 1000, 850, 700, 500, 400, 300 and 200 mb levels.

### c. Testing and Results

A comparison of selected techniques is included in Table 4-5 for all western North Pacific cyclones and in Table 4-6 for Indian Ocean cyclones. In Tables 4-5 and 4-6, "X-AXIS" refers to techniques listed horizontally across the top, while "Y-AXIS" refers to techniques listed vertically. The example in Table 4-5 compares COMB to MH70. In the 425 cases available for comparison, the average 24-hour vector error was 134 nm for COMB and 160 nm for MH70. The difference of 26 nm is shown in the lower right. (Differences are not always exact due to computational round off.)

TABLE 4-5.

STATISTICS FOR YEAR		24 HR FCSTS																		
	JTWC	STRA	RECR	COMB	NH70	NH50	TCMD	CLIM	XTRP	HPAC										
JTWC	591	124																		
	124	0																		
STRA	525	122	533	153																
	153	31	153	0																
RECR	516	127	489	153	524	139														
	139	12	136	-16	139	0														
COMB	543	124	514	153	509	139	551	135												
	138	10	133	-19	135	-3	135	0												
NH70	435	123	407	150	399	136	425	134	445	158										
	159	36	158	8	163	26	160	26	158	0										
NH50	425	124	396	152	389	136	413	135	430	159	434	157								
	158	35	157	5	160	25	159	24	157	-1	157	0								
TCMD	121	122	111	152	104	128	115	127	96	146	96	138	124	136						
	132	10	134	-16	146	18	141	14	143	-4	142	4	136	0						
CLIM	305	129	282	165	265	152	291	145	245	170	245	162	93	144	315	150				
	150	20	142	-22	150	-1	149	3	149	-20	150	-11	153	9	150	0				
XTRP	572	124	521	152	511	138	538	133	439	159	431	158	124	136	309	150	584	149		
	150	26	146	-5	153	15	150	17	145	-13	145	-12	142	6	168	18	149	0		
HPAC	559	124	514	152	501	137	527	133	434	158	426	158	124	136	309	150	571	150	571	134
	134	10	129	-23	135	-2	134	1	133	-24	132	-25	129	-6	138	-11	134	-15	134	0

NUMBER OF CASES	2-ACEE RESEARCH ERROR
Y-ACEE TECHNICAL ERROR	ERROR DIFFERENCE Y-X

STATISTICS FOR YEAR		48 HR FCSTS																		
	JTWC	STRA	RECR	COMB	NH70	NH50	TCMD	CLIM	XTRP	HPAC										
JTWC	471	226																		
	226	0																		
STRA	437	224	462	306																
	309	85	306	0																
RECR	415	232	422	306	440	252														
	247	15	248	-57	252	0														
COMB	440	225	449	306	430	251	466	244												
	244	20	243	-62	243	-7	244	0												
NH70	330	222	340	307	323	249	347	243	359	308										
	313	91	308	1	318	69	310	67	308	0										
NH50	330	220	339	305	320	247	345	242	345	310	358	295								
	299	79	296	-8	297	50	297	55	292	-17	295	0								
TCMD	98	232	97	314	86	246	96	254	76	357	76	283	102	257						
	249	18	255	-57	273	27	264	10	264	-92	263	-20	257	0						
CLIM	244	235	249	330	222	276	247	265	205	337	206	294	75	272	263	250				
	246	11	243	-86	251	-25	252	-12	242	-94	242	-51	260	-11	250	0				
XTRP	457	224	450	304	430	249	454	241	351	309	353	296	101	255	260	249	485	291		
	291	67	290	-13	298	49	292	51	295	-13	291	-4	311	56	325	76	291	0		
HPAC	445	223	442	305	418	246	442	242	345	308	346	295	101	255	260	249	471	291	471	233
	232	9	231	-74	235	-10	233	-7	231	-75	228	-66	245	-9	235	-13	233	-57	233	0

JTWC - OFFICIAL JTWC FORECAST  
 STRA - RESEARCH (FORM 75)  
 RECR - RESEARCH (FORM 75)  
 COMB - COMBINED (FORM 75)  
 NH70 - HURRY 700-MB PROG  
 NH50 - HURRY 500-MB PROG  
 TCMD - TROPICAL CYCLONE MODEL (OMB-NM)  
 CLIM - CLIMATOLOGY  
 XTRP - 12-HOUR EXTRAPOLATION  
 HPAC - MEAN OF XTRP AND CLIMATOLOGY

STATISTICS FOR YEAR		72 HR FCSTS														
	JTWC	STRA	RECR	COMB	NH70	NH50	TCMD	CLIM								
JTWC	368	316														
	316	0														
STRA	338	315	381	453												
	443	129	453	0												
RECR	319	331	345	456	360	349										
	327	-3	348	-107	349	0										
COMB	343	316	370	452	352	349	385	340								
	328	12	343	-109	336	-12	340	0								
NH70	230	325	260	464	236	362	259	352	267	473						
	471	147	474	10	488	126	475	122	473	0						
NH50	227	329	258	467	234	364	257	355	259	469	265	486				
	482	153	481	14	488	124	482	127	479	10	486	0				
TCMD	73	314	78	445	69	351	78	359	61	543	62	484	84	372		
	347	33	376	-68	393	41	380	22	401	-141	396	-87	372	0		
CLIM	184	308	208	494	179	357	204	366	161	506	164	483	64	389	216	332
	315	7	333	-160	338	-18	334	-31	329	-176	331	-151	363	-34	332	0


STATISTICS FOR YEAR		24 HR FCSTS													
		JTWC		INJA		MH70		MH50		TCMO		XTRP		HPAC	
JTWC	63	151													
	151	0													
INJA	48	134	52	127											
	125	-7	127	0											
MH70	28	159	27	132	30	180									
	173	14	175	44	180	0									
MH50	27	158	26	132	29	175	29	173							
	167	9	164	32	173	-1	29	173							
							173	0							
TCMO	2	43	2	53	2	73	2	64	2	164					
	164	121	164	111	164	91	164	100	164	0					
XTRP	61	147	52	127	30	180	29	173	2	164	65	148			
	146	0	130	3	148	-32	149	-23	14	-150	148	0			
HPAC	40	148	32	134	16	179	15	175	2	164	40	145	40	135	
	135	-12	128	-5	146	-31	148	-26	43	-120	135	-9	135	0	

STATISTICS FOR YEAR		48 HR FCSTS													
		JTWC		INJA		MH70		MH50		TCMO		XTRP		HPAC	
JTWC	38	270													
	270	0													
INJA	26	252	26	227											
	227	-24	227	0											
MH70	14	332	9	273	15	340									
	360	28	365	91	340	0									
MH50	13	338	8	298	14	331	14	388							
	407	69	447	149	388	57	388	0							
TCMO	0	0	0	0	1	61	1	141	1	343					
	0	0	0	0	343	282	343	202	343	0					
XTRP	36	272	25	235	15	340	14	388	1	343	37	255			
	259	-12	243	8	243	-96	252	-135	110	-232	255	0			
HPAC	23	270	18	235	8	310	7	424	1	343	24	269	24	225	
	231	-38	224	-11	233	-76	249	-174	86	-256	225	-43	225	0	

STATISTICS FOR YEAR		72 HR FCSTS							
		JTWC		INJA		MH70		MH50	
JTWC	17	437							
	437	0							
INJA	12	350	12	292					
	262	-57	292	0					
MH70	2	876	1	361	2	460			
	460	-415	263	-97	460	0			
MH50	2	876	1	361	2	460	2	838	
	838	-37	1033	672	838	378	838	0	



JTWC - OFFICIAL JTWC FORECAST  
 INJA - ANALOG (INJAH74)  
 MH70 - MCHATT 700-MB PROG  
 MH50 - MCHATT 500-MB PROG  
 XTRP - 12-HOUR EXTRAPOLATION  
 HPAC - MEAN OF XTRP AND CLIMATOLOGY

TABLE 4-6.

## CHAPTER X APPLIED TROPICAL CYCLONE RESEARCH SUMMARY

### I. JTWC RESEARCH

Part of the mission of the Joint Typhoon Warning Center is to conduct applied tropical cyclone research as time and resources permit. The purpose of this research is to improve the timeliness and accuracy of operational forecasts. During 1979, there was continued effort to convert and update operational programs and to streamline operational procedures for compatibility with the Naval Environmental Display Station. The following abstracts summarize the year's applied research projects which were completed or are still in progress.

#### ESTABLISHMENT OF THE JTWC TROPICAL CYCLONE DATA BASE

(Curry, W. T. and Matsumoto, C. R., NAVOCEANCOMCEN/JTWC)

A data base of 6-hour best track positions (intensities, direction and speed of movement) and 24-, 48-, and 72-hour objective technique and official JTWC forecasts for each tropical cyclone in the western North Pacific, Arabian Sea and Bay of Bengal from 1966 through 1978 has been established on FLENUMOCEANCEN computer mass storage systems. Tropical cyclone fix data (position, intensities, platform, etc.) for each tropical cyclone from 1966 through 1977 remain to be added. This climatological data base will be maintained on disk and tape files at FLENUMOCEANCEN Monterey, California and updated annually.

#### NEDS/COMPUTER APPLICATIONS

(Staff, NAVOCEANCOMCEN/JTWC)

JTWC's objective techniques have been converted by contractors to execute on FLENUMOCEANCEN computers. A NEDS graphic capability is being developed to depict forecast tracks from objective techniques. Evaluation and monitoring of program conversion will continue in 1980.

#### TROPICAL CYCLONE MINIMUM SEA-LEVEL PRESSURE - MAXIMUM SUSTAINED WIND RELATIONSHIP

(Lubeck, O. M. and Shewchuk, J. D., NAVOCEANCOMCEN/JTWC)

The pressure-wind relationship developed by Atkinson and Holliday (1977), Tropical Cyclone Minimum Sea Level Pressure - Maximum Sustained Wind Relationship for Western North Pacific, is a primary tool used to determine tropical cyclone intensities for JTWC operations. This relationship was re-evaluated and tested with an independent data set. The study produced no significant differences or changes. Therefore, the current Atkinson and Holliday relationship will continue to be used at JTWC. Other regression equations using case-dependent latitude and environmental pressure (versus 1010 mb) as predictors were also tested. These predictors did not improve the maximum sustained wind-minimum sea-level pressure relationship.

#### OBJECTIVE TROPICAL CYCLONE INITIAL POSITIONING WITH A WEIGHTED LEAST SQUARES ALGORITHM

(Lubeck, O. M. and Shewchuk, J. D., NAVOCEANCOMCEN/JTWC)

Recent studies indicate tropical cyclone forecast errors through 72 hours can be reduced by more accurate initial warning positions. This study developed an objective and standardized method of determining initial position based on all available fix information. A least squares algorithm was used on available fix data with a weighting scheme which is inversely proportional to the stated fix accuracies. The results of this objective method showed no significant improvement over the current subjective method. Therefore, this method was not incorporated into operational procedures. This method, however, produces an improved tropical cyclone "best track" and was incorporated into JTWC's post-analysis procedures.

#### EQUIVALENT POTENTIAL TEMPERATURE/MINIMUM SEA-LEVEL PRESSURE RELATIONSHIPS FOR FORECASTING TROPICAL CYCLONE INTENSIFICATION

(Dunnavan, G. M., NAVOCEANCOMCEN/JTWC)

The relationship between equivalent potential temperature at 700 mb in the center of developing tropical cyclones and associated intensity changes was explored by Sikora (ATR 1975), Milner (ATR 1976), and Hassebrock (ATR 1977). The Sikora and Milner studies produced conflicting results, but the Hassebrock study showed some skill in forecasting explosive and rapid deepening when 1977 and 1978 tropical cyclones were evaluated. Evaluation of 1979 tropical cyclones again showed that the Hassebrock technique has some skill. Unfortunately, dewpoint data from aircraft reconnaissance missions from earlier years are not readily available at JTWC, so it has been difficult to increase the data base. The Hassebrock study will be applied to 1980 tropical cyclones and any cyclones prior to 1976 for which data are available. The data base may then be large enough to draw some definite conclusions.

A related study of equivalent potential temperature was also started. A comparison was made of past 12- and 24-hour changes in equivalent potential temperature in the eye of a tropical cyclone with the subsequent 12- and 24-hour changes in 700 mb height. These correlations proved inconclusive, again due to the small initial data base. An attempt will be made to obtain more data for this study also.

#### BASIC STREAMLINE ANALYSIS AND TROPICAL CYCLONE FORECASTING TECHNIQUE GUIDE

(Guay, G. A., NAVOCEANCOMCEN/JTWC)

A case study, based on an active tropical cyclone period, is being developed. The study will be worked into a training guide for new forecasters and will include basic streamline analysis procedures as well as tropical cyclone forecasting techniques. The case study will also be integrated into STORMEX training (training scenario for DET 4 HQ AWS, 54 WRS, DET 1 LWW, JTWC, and AJTWC personnel).

#### IMPROVEMENT AND EXTENSION OF THE JTWC CLIMATOLOGY

(Shewchuk, J. D., NAVOCEANCOMCEN/JTWC)

Climatology is an important objective forecast aid for JTWC. A new climatology was developed for the western North Pacific which provides position and intensity forecast information for 24-, 48- and 72-hour intervals. Pertinent statistical information is produced by month for each latitude/longitude of available historical data, which includes 1945 to 1973.

Similar climatological information is being developed for the North and South Indian Oceans and the western South Pacific. The periods of available historical data are 1900-1970, 1900-1969 and 1900-1971, respectively.

## 2. NEPRF RESEARCH

#### TROPICAL CYCLONE RESEARCH AT OR UNDER CONTRACT TO THE NAVAL ENVIRONMENTAL PREDICTION RESEARCH FACILITY (NEPRF), MONTEREY, CALIFORNIA

##### TROPICAL CYCLONE MODELING

(Hodur, R.M., NEPRF and Madala, R., NRL)

A one-way interactive Tropical Cyclone Model (TCM) is being evaluated operationally. This model differs from the original channeled TCM, that has been used for the past three years, in two ways. First, hemispheric forecast data are used on the boundaries as opposed to the channel boundaries used in the original TCM. Second, a new bogus is used to represent the storm based on the observed maximum wind. This latter change has cut the average initial position error by 59% to 15 nm. The one-way interactive TCM average forecast errors at 48, 60 and 72 hr are 8%, 14% and 21% less than the channel model, respectively, for Pacific cyclones through August 1979. Both TCMs have about the same average forecast errors at 12, 24 and 36 hr.

A more sophisticated TCM is being developed jointly by NEPRF and NRL and is expected to become operational in 1981. This TCM includes the effects of surface friction, cumulus clouds and latent and sensible heat transfer from the ocean. Preliminary tests indicate that these improvements may reduce forecast track errors by 15% to 20% when compared to the one-way interactive TCM.

##### TROPICAL CYCLONE WIND DISTRIBUTION

(Tsui, T., Brody, L.R., and Brand, S., NEPRF)

The wind distribution around tropical cyclones for the warnings issued by the JTWC from 1966 through 1977 have been compiled and edited into a unique data set. An analysis of the wind radii shows the asymmetrical nature of the radii of 30 kt and 50 kt winds around tropical cyclones as a function of the characteristics of the storm. A statistical forecast model to predict the asymmetric wind distribution has been developed.

##### TROPICAL CYCLONE STRIKE PROBABILITIES

(Brand, S., NEPRF and Jarrell, J.D., Science Applications Inc.)

Tropical cyclone strike probability is a method for determining probabilities up through 72 hours that a tropical cyclone will come within specified distances around geographic points of interest to the user. This program can be used as an aid for operational decisions associated with tropical cyclone evasion, evacuation and base preparedness. Strike probability output is presently being evaluated by a number of Navy and Air Force meteorologists and operational customers in WESTPAC. Other applications of strike probability that are presently being developed include geographic depictions, wind probabilities and strike probabilities for EASTPAC.

##### A STATISTICALLY DERIVED PREDICTION PROCEDURE FOR TROPICAL CYCLONE GENESIS

(Perrone, T., Lowe, P., Rabe, K., and Brand, S., NEPRF)

A statistical experiment using stepwise discriminant analysis was conducted to determine algorithms to be applied to daily, operationally-available meteorological analyses. Parameters identified as potential predictors of tropical cyclone formation were statistically examined to determine their tropical cyclone genesis prediction capability and were found to possess substantial promise to predict tropical storm formation 24, 48 and 72 hours prior to occurrence.

#### EXTREME SEA STATES WITHIN A TYPHOON

(Rabe, K., and Brand, S., NEPRF)

Extremely high sea states are known to occur to the right of the direction of movement in typhoons. A well-documented case of such extreme sea heights in the western North Pacific was examined and compared with results from a numerical spectral ocean wave model. The wind and sea state field of the numerical model compared favorably with the observed data. An examination was also made to determine how extreme sea states relate to tropical cyclone intensity, forward speed of movement, and circulation size or wind distribution. The results indicated that all three are important with the intensity being the primary factor, speed of movement being of secondary importance and circulation size or wind distribution being the least important factor.

#### TROPICAL CYCLONE ORIGIN, MOVEMENT AND INTENSITY CHARACTERISTICS BASED ON DATA COMPOSITING TECHNIQUES

(Gray, W.M., Colorado State University)

Observational studies using large amounts of composited rawinsonde, satellite and aircraft flight data have been performed to analyze global aspects of tropical cyclone occurrences. The data were used to study the physical processes of tropical cyclone genesis, tropical cyclone intensity changes, environmental factors influencing tropical cyclone turning motion 24-36 hours before the turn takes place, tropical cyclone intensity determination from upper-tropospheric reconnaissance, and the diurnal variations of vertical motion in tropical weather systems.

#### IMPROVED UPPER-LEVEL TROPICAL CYCLONE STEERING TECHNIQUES

(Hamilton, H., Systems and Applied Sciences Corporation)

Current automated objective steering forecast techniques incorporating HATRACK and MOHATT algorithms are operationally termed CYCLOPS and may be run in analysis or prognosis modes at seven different atmospheric levels including 1000 mb, 850 mb, 700 mb, 500 mb, 400 mb, 300 mb and 200 mb. Since tropical cyclones vary greatly in areal and vertical extent and may be representatively steered at varying atmospheric levels dependent on state of development/intensity, continuing research is ongoing which will attempt to identify, given certain tropical cyclone input parameters, a "best" steering level or a "weighted scheme" that takes into account several steering levels.

#### AIRBORNE EXPENDABLE BATHYTHERMOGRAPH OBSERVATIONS IMMEDIATELY BEFORE AND AFTER PASSAGE OF TYPHOON PHYLLIS (AUG 75)

(Schramm, W.G., NEPRF and NAVPGSCOL)

Ocean thermal response to an intense typhoon was analyzed on the basis of data collected during the passage of Typhoon Phyllis (Aug 75) in the Philippine Sea. A unique data set was collected using calibrated Airborne Expendable Bathythermographs dropped from a Navy P-3 aircraft. There were three flights: the first, 14 hours before storm passage, the second 10 hours after passage, and the third two days later. The results indicate a dramatic upward movement of isotherms, relative to the sea surface, in a narrow band under the storm path, with a reversal toward pre-typhoon conditions within three days.

#### MESOSCALE EFFECTS OF TOPOGRAPHY ON TROPICAL CYCLONE ASSOCIATED SURFACE WINDS

(Brand, S. and Chambers, R., NEPRF, Woo, H., Cermak, J., and Lou, I., Colorado State University, and Danard, M., University of Waterloo)

An analysis was made of the influence of topography on tropical cyclone associated strong surface wind conditions for Subic Bay, Republic of the Philippines by means of an environmental wind tunnel. Surface flow patterns were deduced by smoke and surface oil films, while isotach and gust values were obtained by hot wire anemometers. The laboratory results show the significant effects of the mountainous regions surrounding the Subic Bay harbor complex and indicate preferred sheltered locations. The results were compared with synoptic observations and a high resolution (0.19 nm) diagnostic, one-level, primitive equation model. Where direct comparison could be made, all techniques appeared to show qualitative agreement.

#### TYPHOON HAVEN STUDIES

(Stevenson, G.A. and Brand, S., NEPRF)

The Typhoon Havens Research Program, the results of which have been summarized in NEPRF Technical Paper 5-76, has been resumed. COMSEVENTHFLT has identified an additional 12 ports and harbors for evaluation as typhoon havens. Work has commenced on Palau, Saipan and Tinian.

ANNEX A TROPICAL CYCLONE TRACK DATA

1. WESTERN NORTH PACIFIC CYCLONE TRACK DATA

TYPHOON ALICE

MO/DA/TM	BEST TRACK			WINDING ERRORS			24 HOUR FORECAST ERRORS			48 HOUR FORECAST ERRORS			72 HOUR FORECAST ERRORS		
	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR
0101007	2.5	170.7	20	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
0101007	3.1	170.1	25	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
0101122	3.9	149.4	30	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
0101107	4.6	149.2	35	4.4	168.7	25	32	-10	6.0	164.4	30	12	7.7	161.3	25
0102007	5.2	148.7	40	5.1	168.4	45	13	-5	7.1	164.4	35	21	7.4	159.7	40
0102007	5.7	148.2	45	5.4	167.4	50	25	-5	7.1	164.4	35	20	7.4	159.5	40
0102122	6.2	147.8	50	6.5	166.4	50	85	0	7.7	161.9	40	37	8.1	157.2	45
0102107	6.7	147.3	55	6.9	167.7	55	12	0	9.2	164.4	45	16	10.7	161.7	55
0103007	7.2	146.8	55	7.2	167.4	55	30	0	9.3	164.7	45	13	10.4	161.6	70
0103007	8.0	146.3	50	7.9	168.4	55	8	-5	10.4	169.4	45	12	10.1	169.9	65
0103127	8.5	145.7	50	8.9	168.9	55	44	-5	12.2	164.0	45	20	14.7	169.0	65
0103107	8.9	144.1	50	9.4	168.0	55	42	-5	12.0	167.7	45	22	14.3	169.5	65
0104007	9.2	144.0	55	9.3	167.4	50	13	-5	10.0	164.0	45	19	12.7	162.6	60
0104007	9.4	147.4	55	9.4	167.4	50	17	-5	10.0	164.1	45	12	12.3	162.7	60
0104122	9.5	146.4	55	9.7	167.0	50	17	-5	10.0	164.7	45	8	12.3	160.9	60
0104107	9.5	146.0	55	9.5	165.0	50	6	-5	10.2	161.0	45	5	10.4	158.0	60
0105007	9.5	145.1	55	9.4	165.0	50	4	-5	10.2	161.1	45	5	11.5	157.2	60
0105007	9.7	144.4	50	9.7	164.1	55	14	-5	10.4	160.1	40	7	11.7	156.2	60
0105122	10.0	143.4	45	10.1	163.2	55	24	-10	10.7	159.2	40	29	11.0	155.3	60
0105107	10.6	142.7	45	10.4	162.7	55	0	-10	11.1	159.1	45	6	11.4	155.6	70
0106007	11.1	141.7	70	11.2	161.7	55	6	-15	12.7	154.0	45	27	12.4	153.7	70
0106007	11.6	140.4	75	11.8	160.4	70	17	-5	13.4	154.7	45	7	13.0	152.8	95
0106122	12.0	139.4	80	12.0	159.4	75	0	-5	13.5	154.9	40	8	13.4	150.4	100
0106107	12.2	138.4	85	12.3	158.7	80	19	-5	13.4	154.2	40	7	13.7	149.8	100
0107007	12.3	137.4	90	12.3	157.4	85	12	-5	12.0	154.2	45	7	11.6	150.1	105
0107007	12.3	136.4	95	12.3	156.4	90	6	-5	11.8	152.9	45	8	11.5	148.9	110
0107122	12.3	135.4	100	12.2	155.4	95	19	-5	11.8	151.4	40	20	11.5	147.8	115
0107107	12.2	134.4	105	12.5	154.0	105	29	0	12.2	149.3	35	25	12.0	144.0	120
0108007	12.1	133.0	110	12.2	153.1	110	4	0	12.0	144.2	30	19	12.0	143.1	120
0108007	12.0	131.4	100	12.0	151.7	115	12	15	11.9	144.4	25	13	11.9	141.0	115
0108122	12.0	130.2	90	12.0	150.4	115	18	25	11.4	144.3	20	19	11.9	140.0	115
0108107	11.9	129.0	85	11.9	149.1	105	5	20	11.4	143.9	10	21	12.0	138.6	95
0109007	11.9	127.9	80	11.8	147.7	100	13	20	11.7	142.5	9	30	11.4	137.3	85
0109007	12.1	126.4	75	11.8	146.5	95	19	20	11.7	141.4	8	25	11.9	136.4	80
0109122	12.1	125.4	70	12.0	145.2	90	13	20	12.1	139.9	7	41	12.3	134.6	75
0109107	12.0	124.2	65	12.1	144.0	80	13	5	12.2	134.7	7	64	12.2	133.4	60
0110007	11.8	123.0	60	11.9	143.0	80	6	5	11.9	137.9	7	66	12.2	132.7	60
0110007	12.1	121.7	55	12.1	141.5	75	12	-5	12.0	134.7	6	129	12.2	131.0	55
0110122	12.2	120.4	50	12.2	140.1	75	29	-5	12.1	134.6	6	190	12.5	129.4	55
0110107	12.2	119.4	45	12.2	139.0	85	47	0	12.2	133.4	5	233	12.4	128.7	55
0111007	12.4	118.0	40	12.3	139.0	85	4	-5	12.2	134.4	4	94	12.1	132.8	75
0111062	12.7	116.7	35	12.5	137.0	90	26	-5	12.2	134.2	40	198	12.2	129.4	70
0111122	13.1	117.4	30	13.0	137.7	95	9	0	13.4	134.7	40	79	12.4	132.2	80
0111107	13.4	117.4	25	13.3	137.1	95	30	-5	13.1	134.7	40	146	12.4	132.9	70
0112007	13.7	117.3	20	13.9	137.2	90	8	-10	15.4	137.4	40	52	14.2	140.0	70
0112007	14.1	117.0	15	14.2	136.9	90	8	-10	16.2	137.2	70	29	14.5	140.0	60
0112122	14.5	116.4	10	15.2	136.4	85	43	-5	17.4	137.4	65	83	16.0	140.0	0
0112107	15.0	116.4	5	15.2	136.4	80	12	0	17.4	137.9	60	93	16.0	140.0	0
0113007	15.4	116.4	0	15.5	136.4	80	8	10	17.4	134.0	60	124	16.0	140.0	0
0113007	15.8	116.4	-5	15.9	136.7	70	13	15	18.1	134.4	55	194	16.0	140.0	0
0113127	16.1	117.7	45	16.1	137.2	65	6	20	0.0	0.0	0	0	16.0	140.0	0
0113107	16.1	117.0	40	16.4	137.4	55	34	15	0.0	0.0	0	0	16.0	140.0	0
0114007	16.1	116.4	30	16.1	136.4	45	0	15	0.0	0.0	0	0	16.0	140.0	0
0114062	16.0	116.0	20	16.0	136.0	30	0	10	0.0	0.0	0	0	16.0	140.0	0

	ALL FORECASTS			
	24-HR	48-HR	72-HR	96-HR
AVG FORECAST POSIT ERROR	18	105	222	374
AVG HIGH ANGLE ERROR	11	43	173	271
AVG INTENSITY MAGNITUDE ERROR	4	17	23	23
AVG INTENSITY BTAS	2	2	1	-3
NUMBER OF FORECASTS	51	47	43	39

Preceding Page BLANK - NO FILM



TYPHOON BESS

NO/DJ/MJ	RFST TRACK			VARNING			24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST								
	POSIT	WIND	POSIT	WIND	DST	ANG	POSIT	WIND	DST	ANG	POSIT	WIND	DST	ANG	POSIT	WIND	DST	ANG					
031800Z	7.1	150.0	15	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
031806Z	7.8	149.1	15	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
031812Z	8.6	147.9	15	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
031818Z	9.3	146.7	15	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
031900Z	9.8	145.4	20	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
031906Z	10.2	144.4	20	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
031912Z	10.4	143.7	20	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
031918Z	10.6	142.7	25	0.0	0.0	0.0	-0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
032000Z	10.5	141.7	30	10.9	141.9	25	27	-5	11.4	134.4	30	13	0	11.4	135.3	40	115	-15	11.9	141.7	50	105	-25
032006Z	10.6	140.7	30	10.6	140.5	30	12	0	10.4	134.0	35	147	-5	10.4	131.5	45	143	-15	10.9	137.8	55	143	-25
032012Z	10.7	139.9	30	10.5	139.4	30	11	0	10.0	134.4	35	128	0	10.4	131.4	45	107	-25	10.9	137.0	55	144	-30
032018Z	11.0	139.2	30	11.0	139.0	30	17	0	11.7	135.4	30	102	0	12.0	132.4	40	113	-35	11.0	140.4	45	145	-45
032100Z	11.7	138.4	30	11.2	138.7	30	35	0	11.0	134.1	35	109	0	12.0	132.5	40	240	-35	11.1	140.0	45	142	-45
032106Z	12.3	138.0	40	12.3	138.2	35	12	-5	14.7	137.0	45	105	0	14.4	137.4	35	176	-45	11.0	141.1	30	78	-50
032112Z	12.8	136.9	45	12.4	137.5	40	35	-5	15.3	136.4	50	110	0	17.4	138.0	45	114	-40	10.2	140.4	35	41	-25
032118Z	13.3	136.1	50	13.6	136.1	45	18	-5	17.0	134.4	50	102	0	10.3	138.4	45	102	-45	10.9	142.3	35	46	0
032200Z	13.7	135.4	55	14.1	135.1	55	34	0	17.2	133.0	55	117	0	10.0	134.5	50	103	-30	11.4	146.4	45	118	20
032206Z	14.1	135.3	60	14.0	135.4	60	13	0	16.0	134.0	75	91	-5	17.4	133.1	50	175	-10	0.0	0.0	0.0	0.0	0
032212Z	14.7	135.0	70	14.4	134.9	70	9	0	16.5	133.3	85	173	0	14.5	133.3	50	441	30	0.0	0.0	0.0	0.0	0
032218Z	15.3	134.4	75	15.1	134.6	75	17	0	16.0	133.4	90	216	0	10.3	134.1	50	486	45	0.0	0.0	0.0	0.0	0
032300Z	16.1	134.7	75	15.4	134.7	75	14	0	18.0	134.7	85	202	-5	10.5	136.8	75	440	50	0.0	0.0	0.0	0.0	0
032306Z	17.0	135.2	80	17.0	134.4	80	21	0	20.3	134.5	80	151	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0
032312Z	17.8	136.0	85	17.7	136.2	80	13	-5	20.4	140.7	60	36	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0
032318Z	18.7	136.9	90	18.3	137.1	80	25	-10	21.4	142.1	50	32	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0
032400Z	19.5	137.0	90	19.5	137.4	85	6	-5	22.4	142.4	50	35	24	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0
032406Z	20.3	139.2	90	20.3	139.1	75	6	-15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0
032412Z	21.2	140.4	40	21.3	140.4	75	13	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0
032418Z	22.0	142.3	35	22.1	141.9	65	23	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0
032500Z	22.9	144.3	25	23.4	143.4	30	41	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0

	ALL FORECASTS			
	MMMG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	19.	114.	265.	344.
AVG RIGHT ANGLE ERROR	15.	73.	164.	240.
AVG INTENSITY MAGNITUDE ERROR	5.	10.	32.	71.
AVG INTENSITY BIAS	-0.	-6.	-13.	-24.
NUMBER OF FORECASTS	21	17	13	3

TYPHOON CECIL

NO/DA/HR	BEST TRACK			WINDING ERRORS			24 HOUR FORECAST ERRORS			48 HOUR FORECAST ERRORS			72 HOUR FORECAST ERRORS		
	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR
040800Z	3.3	143.4	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
040805Z	3.4	143.4	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
040812Z	3.6	143.4	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
040818Z	3.8	143.1	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
040900Z	4.2	142.4	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
040905Z	4.6	142.5	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
040912Z	5.1	142.2	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
040918Z	5.5	141.9	20	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
041000Z	5.7	141.5	20	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
041005Z	5.9	141.1	20	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
041012Z	6.1	140.4	25	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
041018Z	6.2	140.2	25	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
041100Z	6.4	139.5	30	6.3	139.7	30	13.0	0	7.0	137.7	35	0	8.1	134.2	40
041105Z	6.5	139.0	30	6.5	139.0	30	0	0	7.1	134.4	40	30	8.4	133.5	45
041112Z	6.7	138.4	30	6.5	138.4	30	17.0	0	7.1	134.7	40	20	8.2	133.7	45
041118Z	6.9	137.4	30	6.5	138.0	30	27.0	0	7.1	134.6	40	8	7.4	132.8	50
041200Z	7.0	137.1	35	7.2	137.2	35	13.0	0	8.2	134.5	50	45	8.2	131.5	60
041205Z	6.8	136.7	40	7.2	136.5	40	27.0	0	8.0	134.5	50	45	8.4	130.4	65
041212Z	7.0	136.0	40	7.0	136.2	40	12.0	0	7.4	134.0	50	43	8.5	131.4	70
041218Z	7.2	135.5	45	7.0	135.5	45	12.0	0	7.7	133.7	55	51	8.4	130.6	75
041300Z	7.5	134.8	45	7.2	134.9	45	19.0	0	7.8	132.4	65	60	8.6	129.7	80
041305Z	7.7	134.2	45	7.5	134.4	45	13.0	0	8.3	131.9	65	60	8.7	129.2	85
041312Z	8.0	133.4	45	8.0	133.5	45	5.0	0	8.0	131.0	65	103	8.4	128.5	90
041318Z	8.2	132.4	50	8.3	132.9	45	19.0	-5	9.1	130.0	65	95	8.4	126.8	95
041400Z	8.3	131.4	55	8.3	131.4	55	0	0	9.3	124.1	65	38	10.7	124.4	100
041405Z	8.4	130.4	55	8.3	130.4	55	13.0	0	9.5	124.7	65	38	10.8	123.2	105
041412Z	8.5	129.7	65	8.5	129.7	65	5.0	0	9.8	124.1	75	62	11.1	121.7	110
041418Z	8.9	128.4	70	8.6	128.2	70	21.0	0	9.7	124.2	85	108	11.1	120.8	115
041500Z	9.4	127.5	75	9.1	127.5	75	19.0	0	10.3	124.3	100	120	11.4	120.9	120
041505Z	10.1	126.5	75	10.0	126.4	75	9.0	0	11.0	123.1	100	42	13.0	119.6	125
041512Z	10.8	125.4	80	10.7	125.4	80	6.0	0	12.3	121.8	100	33	13.4	118.1	130
041518Z	11.5	124.4	75	11.5	124.4	75	0	0	12.9	120.5	100	93	13.9	116.6	135
041600Z	12.0	123.2	70	11.9	123.2	70	6.0	0	13.1	119.3	100	163	14.4	115.9	140
041605Z	12.4	122.4	65	12.2	122.4	65	17.0	0	13.5	114.4	100	210	15.1	115.4	145
041612Z	12.7	122.2	60	12.8	122.0	60	13.0	0	14.0	114.4	100	226	15.6	115.8	150
041618Z	12.9	122.1	60	13.0	121.5	60	35.0	0	14.2	114.4	100	250	15.8	115.8	155
041700Z	13.1	122.1	55	12.9	122.0	55	13.0	0	13.7	120.9	100	138	15.4	119.3	160
041705Z	13.5	122.3	55	13.3	122.7	55	13.0	0	13.8	121.5	100	141	15.5	120.0	165
041712Z	13.9	122.4	50	13.9	122.4	50	4.0	0	16.0	122.4	100	74	18.1	124.8	170
041718Z	14.3	122.4	50	14.3	122.4	50	17.0	0	16.4	121.0	100	80	18.5	125.3	175
041800Z	14.6	123.1	45	14.6	123.1	45	0	0	16.2	124.4	100	48	18.2	129.0	180
041805Z	15.0	123.4	45	15.0	123.4	45	12.0	0	16.7	124.3	100	50	18.4	130.4	185
041812Z	15.6	124.0	45	15.6	124.1	45	5.0	0	17.8	127.1	100	20	20.4	131.7	190
041818Z	16.3	124.4	45	15.9	124.4	45	33.0	0	17.9	127.9	100	102	20.1	132.8	195
041900Z	16.9	125.0	50	16.8	125.1	50	4.0	0	19.2	124.9	100	108	21.1	133.8	200
041905Z	17.5	125.8	50	17.6	125.9	50	8.0	0	19.0	130.1	100	132	21.0	0.0	0
041912Z	18.2	127.0	50	17.8	126.7	50	29.0	5	20.0	131.2	100	180	20.0	0.0	0
041918Z	19.6	127.8	50	19.5	127.4	50	11.0	0	23.8	134.7	100	51	20.0	0.0	0
042000Z	21.0	129.1	45	21.1	129.1	50	5	5	24.4	134.4	100	96	20.0	0.0	0
042005Z	22.1	130.4	40	21.4	130.9	50	24.0	10	0.0	0.0	0	0	0.0	0.0	0
042012Z	22.8	132.4	30	22.8	132.0	45	22.0	15	0.0	0.0	0	0	0.0	0.0	0
042018Z	23.0	134.4	25	24.0	134.0	30	64.0	5	0.0	0.0	0	0	0.0	0.0	0
042100Z	23.0	136.4	25	0.0	0.0	0	0.0	0	0.0	0.0	0	0	0.0	0.0	0

ALL FORECASTS

	WIND	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	15.	47.	191.	320.
AVG LIGHT ANGLE ERROR	11.	62.	131.	215.
AVG INTENSITY MAGNITUDE ERROR	1.	7.	11.	14.
AVG INTENSITY RATE	1.	3.	7.	11.
NUMBER OF FORECASTS	40	37	33	23

TROPICAL STORM DOT

4000/HR	BEST TRACK				JANUARY				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST			
	POSIT	WIND	POSIT	WIND	ERRORS	POSIT	WIND	POSIT	WIND	ERRORS	POSIT	WIND	POSIT	WIND	ERRORS	POSIT	WIND	POSIT	WIND	
0500007	4.0 147.5	15	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0500062	4.0 146.5	15	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0500127	4.1 145.4	15	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0500182	4.2 144.4	15	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0507007	4.3 143.3	15	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0507062	4.5 142.3	15	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0507122	4.9 141.4	15	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0507182	5.3 139.4	20	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0508062	5.2 138.4	20	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0508062	4.8 136.4	20	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0508127	4.4 135.4	20	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0508182	4.5 134.4	20	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0509007	5.0 134.2	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0509062	5.8 133.0	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0509122	6.7 132.4	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0509182	7.3 132.2	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0510007	7.7 132.0	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0
0510062	8.2 130.4	30	8.2 130.4	20	19	-10	9.4 127.0	25	130	5	11.4 123.2	20	162	-10	17.5 119.3	25	6	-5		
0510127	8.7 129.0	30	8.4 129.4	25	30	-5	10.5 125.4	30	123	5	11.4 121.6	20	116	-10	13.0 117.7	25	111	-10		
0510182	8.9 127.4	30	9.4 127.0	25	46	-5	11.2 120.4	25	102	5	12.4 119.7	25	43	-5	15.0 116.5	35	219	-5		
0511007	9.3 126.0	30	9.0 125.4	25	30	-5	10.7 120.1	25	80	5	12.1 116.8	30	152	0	14.6 115.9	35	255	-5		
0511062	9.7 124.7	25	9.8 124.0	25	13	0	10.5 119.4	25	47	-5	12.4 116.6	30	163	0	15.2 115.8	35	298	0		
0511122	9.9 123.4	25	9.9 123.4	25	0	0	10.7 118.1	25	30	-5	13.1 115.1	30	262	-5	15.8 113.3	40	474	15		
0511182	10.2 122.2	25	10.2 122.2	25	6	0	11.1 117.2	25	134	-5	13.4 114.4	35	370	-5	16.7 113.0	45	731	20		
0512002	10.4 121.4	25	10.5 121.4	25	9	0	12.1 116.4	30	129	5	14.5 114.4	40	379	0	17.5 114.4	50	441	25		
0512062	10.5 120.4	30	10.5 120.1	25	29	-5	12.4 116.4	35	170	5	15.4 114.5	45	375	10	18.5 116.4	50	440	25		
0512122	10.9 119.0	30	10.7 119.1	25	44	-5	12.0 115.4	35	240	5	16.3 114.3	45	474	20	19.0 116.6	50	459	25		
0512182	11.7 119.6	30	11.4 118.0	30	36	0	15.0 117.0	40	193	5	18.5 118.6	50	299	25	20.6 122.5	50	240	25		
0513007	12.2 119.4	30	12.5 118.7	30	45	0	15.1 117.7	40	167	5	18.3 119.1	50	277	25	21.0 123.2	50	245	25		
0513062	12.5 119.4	30	12.6 118.7	30	41	0	14.3 117.0	40	169	5	17.1 118.1	50	311	25	20.0 121.4	50	251	25		
0513122	13.0 119.4	35	13.1 119.2	35	24	0	15.7 116.4	40	134	15	18.5 120.7	50	238	25	21.1 124.6	40	255	15		
0513182	13.4 119.0	40	13.7 119.1	35	30	-5	16.0 116.7	40	154	15	18.4 121.3	45	241	20	21.5 125.1	35	229	10		
0514002	13.7 120.2	40	13.7 120.2	40	0	0	15.4 121.4	25	80	5	17.2 124.2	40	119	15	19.8 128.0	45	113	20		
0514062	14.0 120.0	34	14.0 120.4	35	12	0	15.5 122.4	30	24	5	17.7 125.7	45	121	20	0.0 0.0	0	-0.0 0.0			
0514127	14.4 121.4	25	14.2 120.0	25	31	0	15.4 122.4	30	80	5	17.4 125.5	40	244	15	0.0 0.0	0	-0.0 0.0			
0514182	14.7 122.0	24	14.5 121.4	25	31	0	16.0 124.0	30	95	5	18.3 126.5	40	307	15	0.0 0.0	0	-0.0 0.0			
0515002	15.1 122.4	25	15.2 122.7	25	4	0	16.4 124.7	30	104	5	18.4 127.5	35	345	10	0.0 0.0	0	-0.0 0.0			
0515062	15.6 123.3	25	15.4 123.2	25	13	0	17.1 124.1	30	170	5	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0			
0515122	16.2 124.1	25	16.2 124.0	25	6	0	18.4 124.7	30	161	5	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0			
0515182	17.0 125.1	25	16.7 124.4	25	25	0	18.0 127.4	30	225	5	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0			
0516002	17.8 126.2	25	17.6 125.0	25	21	0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0			
0516062	18.8 127.5	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0		
0516122	20.0 129.0	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0		
0516182	21.2 131.0	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0		
0517002	22.2 133.0	25	0.0 0.0	0	-0.0 0.0	0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0	0	-0.0 0.0		

AVG FORECAST POSIT ERROR	ALL FORECASTS			
	WMNG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	23	130	244	315
AVG RIGHT ANGLE ERROR	16	79	171	247
AVG INTENSITY MAGNITUDE ERROR	2	4	13	14
AVG INTENSITY RMSE	-2	3	10	13
NUMBER OF FORECASTS	24	23	20	14

TROPICAL DEPRESSION 05

NO/DA/HR	BEST TRACK				24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS			
	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND		
051700Z	19.1	115.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051700Z	18.8	115.0	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051712Z	18.6	114.5	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051718Z	18.2	114.2	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051800Z	17.8	113.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051800Z	17.3	113.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051812Z	16.7	113.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051818Z	16.2	113.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051900Z	15.8	112.9	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051900Z	15.3	112.6	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051912Z	15.3	112.3	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051918Z	15.1	111.9	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052000Z	15.0	111.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052000Z	15.7	112.2	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052012Z	16.5	112.9	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052018Z	17.6	113.2	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052100Z	18.6	113.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052100Z	19.3	114.2	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052112Z	20.1	115.2	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052118Z	20.4	116.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052200Z	21.4	117.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052200Z	21.8	119.0	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052212Z	21.7	120.4	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052218Z	21.8	122.3	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052300Z	22.1	124.1	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
052300Z	22.5	126.3	30	22.5	126.2	30	5	0	25.7	134.4	25	72	0	0		
052312Z	22.8	128.6	30	22.8	128.5	30	13	0	25.4	137.7	25	181	0	0		
052318Z	23.6	130.9	30	23.3	130.7	30	21	0	26.5	139.4	25	221	0	0		
052400Z	24.9	132.4	25	24.4	133.0	30	14	5	0.0	0.0	0	-0.0	0	0		
052400Z	26.6	134.4	25	25.5	134.4	25	4	0	0.0	0.0	0	-0.0	0	0		
052412Z	28.2	136.2	25	28.1	136.1	25	9	0	0.0	0.0	0	-0.0	0	0		
052418Z	29.8	138.0	25	0.0	0.0	0	-0.0	0	0.0	0.0	0	-0.0	0	0		

ALL FORECASTS

	WMNG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERRON	12.	15R.	0.	0.
AVG RIGHT ANGLE ERRON	12.	150.	0.	0.
AVG INTENSITY MAGNITUDE ERROR	1.	0.	0.	0.
AVG INTENSITY BIAS	1.	0.	0.	0.
NUMBER OF FORECASTS	4	3	0	0

TYPHOON ELLIS

NO/DA/HR	BEST TRACK				24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS			
	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND		
062900Z	11.7	135.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
062906Z	12.2	135.0	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
062912Z	12.6	134.5	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
062918Z	12.9	134.2	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
063000Z	13.2	133.9	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
063006Z	13.4	133.5	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
063012Z	13.5	133.0	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
063018Z	13.6	132.4	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
070100Z	13.7	131.9	35	13.4	132.0	35	19	0	14.4	124.8	45	68	10	14.2		
070106Z	13.7	131.3	40	13.4	131.4	40	19	0	14.4	124.8	45	69	10	14.2		
070112Z	13.8	130.4	40	13.4	130.9	40	23	0	15.0	124.7	50	104	15	14.7		
070118Z	13.9	129.5	50	13.4	129.7	50	13	0	14.4	124.4	60	72	15	14.4		
070200Z	14.1	128.7	55	14.1	128.4	55	5	0	14.4	124.7	65	91	20	14.4		
070206Z	14.4	127.6	60	14.2	127.4	55	17	-5	14.0	123.8	65	110	15	14.3		
070212Z	15.0	126.9	65	14.9	126.9	55	4	-10	16.2	122.2	65	111	15	17.0		
070218Z	15.5	125.9	75	15.4	125.8	65	4	-10	16.4	121.4	50	127	20	17.3		
070300Z	16.1	125.0	85	16.0	124.9	85	9	0	17.4	120.4	75	77	10	19.4		
070306Z	16.8	124.2	80	16.4	124.0	90	17	10	18.4	120.1	80	60	20	20.4		
070312Z	17.8	123.2	80	17.6	123.4	85	16	5	20.1	120.2	75	40	15	21.9		
070318Z	18.4	122.4	70	18.4	122.7	70	13	0	22.2	118.4	80	127	20	24.1		
070400Z	19.0	121.7	65	19.0	121.7	80	0	-5	20.4	114.4	60	21	5	21.7		
070406Z	19.5	120.2	60	19.4	120.0	80	13	0	20.4	114.4	55	25	0	22.1		
070412Z	19.8	119.4	60	19.7	119.0	80	23	0	21.0	114.4	45	49	10	21.4		
070418Z	20.1	117.9	60	20.1	117.0	80	0	0	21.4	113.7	40	31	10	21.0		
070500Z	20.2	116.7	55	20.3	116.2	80	4	5	21.4	111.4	50	18	5	20.0		
070506Z	20.3	115.2	55	20.2	114.4	60	23	5	21.4	109.7	40	37	15	20.0		
070512Z	20.5	114.1	55	20.5	114.2	60	6	5	0.0	0.0	0	-0.0	0	0.0		
070518Z	21.0	112.9	70	20.8	113.1	50	16	0	0.0	0.0	0	-0.0	0	0.0		
070600Z	21.6	111.4	45	26.1	111.4	35	269	-10	0.0	0.0	0	-0.0	0	0.0		
070606Z	22.0	110.1	25	21.7	110.2	25	19	0	0.0	0.0	0	-0.0	0	0.0		

ALL FORECASTS

	WMNG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERRON	25.	71.	145.	145.
AVG RIGHT ANGLE ERRON	21.	57.	103.	113.
AVG INTENSITY MAGNITUDE ERROR	3.	13.	19.	12.
AVG INTENSITY BIAS	-0.	-3.	-0.	0.
NUMBER OF FORECASTS	22	19	14	11

TROPICAL STORM FAYE

NO/DJ/MH	BEST TRACK				JANUING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST						
	POSIT	WIND	PRNSIT	WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND				
062818Z	2.8	155.0	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
062900Z	2.5	154.5	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
062906Z	2.6	153.0	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
062912Z	2.9	153.5	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
062918Z	3.2	153.7	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
063000Z	3.5	152.0	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
063006Z	3.9	152.5	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
063012Z	4.4	151.8	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
063018Z	4.9	151.2	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070100Z	5.3	150.4	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070106Z	5.7	150.0	25	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070112Z	6.0	149.2	25	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070118Z	6.2	147.0	25	6.8	149.2	25	85.	5.	8.8	148.4	35	148.	5.	10.7	142.9	25	130.	15.	12.2	149.2	65	177.	35.
070200Z	6.5	146.4	25	6.5	145.8	30	36.	5.	7.7	141.4	40	139.	10.	8.2	137.5	20	145.	10.	4.1	143.3	60	156.	30.
070206Z	7.3	145.5	25	7.0	145.1	30	30.	5.	7.8	141.2	40	132.	5.	8.4	136.8	20	140.	15.	9.4	142.5	60	203.	35.
070212Z	8.0	144.0	25	7.6	144.8	30	25.	5.	9.4	141.0	40	30.	5.	10.4	136.8	20	140.	15.	12.3	142.5	60	144.	35.
070218Z	8.6	144.1	30	8.2	143.8	30	30.	0.	10.8	139.8	40	59.	0.	11.2	135.5	20	140.	20.	13.0	141.5	60	142.	35.
070300Z	9.0	143.2	30	9.1	143.2	35	5.	5.	11.1	139.7	50	48.	10.	12.7	135.5	20	137.	30.	14.1	141.5	70	147.	45.
070306Z	9.4	142.2	35	9.4	142.2	40	25.	5.	12.2	138.8	60	10.	20.	14.8	134.2	20	211.	50.	14.0	140.0	80	217.	55.
070312Z	9.7	141.4	35	9.4	141.2	45	13.	10.	12.7	137.4	65	100.	30.	15.1	133.5	20	213.	50.	17.4	142.1	80	207.	55.
070318Z	10.0	140.8	40	10.2	139.4	50	72.	10.	12.1	134.7	70	160.	40.	15.4	130.7	20	245.	50.	17.7	142.3	80	240.	60.
070400Z	10.3	139.4	40	10.2	140.1	50	13.	10.	11.4	137.5	70	132.	40.	13.4	134.1	20	25.	50.	14.1	140.3	80	47.	60.
070406Z	10.5	139.0	35	10.8	138.8	45	21.	10.	13.2	134.8	65	132.	40.	15.7	131.0	20	142.	50.	0.0	0.0	0.	-0.	0.
070412Z	10.6	137.8	35	11.0	137.8	50	24.	15.	12.7	131.7	65	95.	40.	14.8	129.8	20	125.	50.	0.0	0.0	0.	-0.	0.
070418Z	10.4	136.8	30	10.9	136.7	55	30.	25.	12.3	132.2	65	141.	40.	14.1	127.7	20	210.	55.	0.0	0.0	0.	-0.	0.
070500Z	10.4	135.8	30	10.0	135.7	55	30.	25.	10.4	130.8	65	238.	40.	12.5	126.6	20	120.	55.	0.0	0.0	0.	-0.	0.
070506Z	11.1	135.5	25	10.2	134.4	50	75.	25.	10.0	130.5	65	228.	30.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070512Z	11.9	135.1	25	11.1	135.7	55	49.	10.	11.4	132.4	25	235.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070518Z	12.6	134.4	25	11.5	135.0	55	70.	10.	12.8	132.9	25	235.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070600Z	13.3	133.8	25	13.2	133.8	25	5.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070606Z	13.8	133.0	25	13.0	132.7	25	19.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070612Z	15.2	131.0	25	14.5	131.1	25	42.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070618Z	16.1	130.7	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
070700Z	17.0	129.8	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.

ALL FORECASTS

	24-HR	48-HR	72-HR	
AVG FORECAST POSIT ERROR	35.	138.	167.	140.
AVG RIGHT ANGLE ERROR	21.	46.	93.	64.
AVG INTENSITY MAGNITUDE ERROR	9.	21.	37.	45.
AVG INTENSITY BIAS	9.	21.	37.	45.
NUMBER OF FORECASTS	20	17	14	17

TROPICAL DEPRESSION 08

NO/DJ/MH	BEST TRACK				JANUING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST						
	POSIT	WIND	PRNSIT	WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND	PRNSIT	WIND	DST WIND				
072306Z	19.5	140.8	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072312Z	20.3	139.0	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072318Z	21.2	137.5	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072400Z	22.0	135.8	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072406Z	22.7	134.4	20	24.3	133.8	20	105.	0.	28.0	124.2	20	183.	0.	20.0	119.0	15	196.	-5.	0.0	0.0	0.	-0.	0.
072412Z	23.4	133.0	20	23.3	133.0	20	5.	0.	25.0	127.2	20	96.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072418Z	24.0	131.5	20	23.9	131.8	20	17.	0.	26.0	127.0	20	203.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072500Z	25.0	130.2	20	24.4	130.4	20	42.	0.	26.8	124.4	15	239.	-5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072506Z	26.0	128.8	20	25.4	129.5	20	45.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072512Z	27.4	127.4	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072518Z	29.4	127.0	15	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072600Z	31.5	126.3	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
072606Z	33.3	124.9	20	0.0	0.0	0	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.

ALL FORECASTS

	24-HR	48-HR	72-HR	
AVG FORECAST POSIT ERROR	43.	195.	395.	0.
AVG RIGHT ANGLE ERROR	20.	70.	195.	0.
AVG INTENSITY MAGNITUDE ERROR	0.	4.	5.	0.
AVG INTENSITY BIAS	0.	1.	-5.	0.
NUMBER OF FORECASTS	5	4	1	7



TROPICAL STORM GORDON

NO/JA/MO	BEST TRACK			WAKING			24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS			
	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR
072512Z	18.8	142.7	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
072518Z	19.0	131.5	20	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
072600Z	19.3	110.4	25	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
072606Z	19.7	129.7	30	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0
072612Z	20.2	128.7	35	20.2	129.5	30	45	-5	21.8	127.7	45	20.8	-4	24.0	125.2	50	355	-5
072618Z	20.6	127.5	40	20.5	124.0	30	85	-10	22.5	126.8	45	24.8	11.8	24.7	124.3	50	328	0
072700Z	20.5	126.2	40	20.6	126.2	35	6	-5	21.8	121.4	45	43	11.8	24.0	118.5	50	43	0
072706Z	20.6	125.3	45	20.7	125.4	40	8	-5	21.7	121.4	50	50	11.8	24.4	117.8	50	100	5
072712Z	20.8	124.2	40	20.7	124.2	40	6	-10	21.2	119.2	50	64	-4	22.4	115.8	50	48	30
072718Z	20.8	122.8	55	20.9	123.1	45	17	-10	21.4	118.1	45	76	5	0.0	0.0	0	-0	0
072800Z	20.9	121.7	40	20.4	121.5	50	13	-10	20.0	116.2	65	126	14	0.0	0.0	0	-0	0
072806Z	21.3	120.4	40	20.9	120.5	55	23	-5	20.9	115.4	70	130	24	0.0	0.0	0	-0	0
072812Z	22.0	120.1	45	22.0	120.2	55	6	0	24.8	114.2	25	211	5	0.0	0.0	0	-0	0
072818Z	22.5	118.8	50	22.9	119.3	55	33	5	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
072900Z	22.7	117.4	50	22.8	117.3	50	8	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
072906Z	23.1	116.0	45	23.1	116.2	45	11	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
072912Z	23.1	114.7	20	23.3	115.2	30	30	10	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0

	ALL FORECASTS			
	WMNG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	23.	120.	173.	449.
AVG RIGHT ANGLE ERROR	12.	90.	121.	274.
AVG INTENSITY MAGNITUDE ERROR	6.	11.	3.	40.
AVG INTENSITY BIAS	-3.	1.	4.	40.
NUMBER OF FORECASTS	17	3	5	1

TROPICAL DEPRESSION 11

NO/JA/MD	BEST TRACK			WARNING			24 HOUR FORECAST ERRORS			48 HOUR FORECAST ERRORS			72 HOUR FORECAST ERRORS		
	POSIT	WIND	DST	POSIT	WIND	DST	POSIT	WIND	DST	POSIT	WIND	DST	POSIT	WIND	DST
000206	11.7	134.3	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000212	12.3	138.0	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000218	12.8	140.0	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000307	13.8	133.1	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000308	13.9	132.1	15	0.0	131.7	15	24	0	15.4	124.0	25	66	5	17.9	123.7
000312	14.2	131.3	15	14.4	130.7	20	37	2	16.2	127.0	38	87	10	14.4	122.7
000318	14.5	130.4	20	14.3	129.8	20	47	0	16.7	126.2	35	103	14	14.5	122.5
000407	14.9	129.4	20	14.9	129.7	20	6	0	16.8	126.0	30	90	10	14.7	122.0
000408	15.3	129.1	20	15.7	128.5	20	42	0	16.5	125.4	30	221	5	20.1	118.4
000412	16.0	128.4	20	16.0	128.4	20	121	0	18.0	122.2	25	193	0	20.2	118.0
000418	16.7	128.0	20	16.7	125.4	20	143	0	19.0	121.1	25	198	5	0.0	0.0
000507	17.7	127.6	20	17.4	127.4	25	5	5	20.4	124.2	30	90	10	0.0	0.0
000508	14.6	126.5	24	18.5	128.2	25	96	0	22.0	124.4	30	285	15	0.0	0.0
000512	19.1	125.4	24	19.5	125.4	25	70	0	23.0	121.1	30	132	15	0.0	0.0
000518	19.2	124.1	24	19.5	124.4	25	29	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000602	19.5	123.0	24	19.7	123.1	25	13	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000606	20.6	121.9	15	20.0	122.2	20	40	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000612	21.0	120.3	15	20.9	120.5	20	13	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0

ALL FORECASTS

	WIND	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	47	144	134	171
AVG RIGHT ANGLE ERROR	70	96	83	104
AVG INTENSITY MAGNITUDE ERROR	2	9	14	16
AVG INTENSITY BIAS	2	9	14	16
NUMBER OF FORECASTS	14	10	6	

TYPHOON IRVING

NO/JA/MD	BEST TRACK			WARNING			24 HOUR FORECAST ERRORS			48 HOUR FORECAST ERRORS			72 HOUR FORECAST ERRORS		
	POSIT	WIND	DST	POSIT	WIND	DST	POSIT	WIND	DST	POSIT	WIND	DST	POSIT	WIND	DST
000712	14.0	137.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000718	15.0	138.0	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000802	15.6	138.1	24	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000808	16.9	138.0	24	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000812	16.8	137.5	24	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000818	17.4	136.4	24	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000902	17.7	136.0	30	17.4	136.0	30	5	0	19.9	132.4	35	104	5	21.0	129.2
000908	18.0	135.4	30	18.3	135.1	30	29	0	21.0	130.3	40	188	10	21.7	128.5
000912	18.2	134.8	30	18.3	135.2	30	23	0	19.7	131.3	40	150	10	21.4	129.5
000918	18.3	134.2	30	18.0	135.0	30	49	0	19.4	134.4	40	287	10	21.7	130.8
001002	18.4	133.3	30	18.5	133.5	25	13	-5	19.4	130.4	35	183	5	20.4	128.8
001008	18.4	132.2	30	18.4	132.7	25	37	-5	20.1	129.4	35	224	0	21.2	128.0
001012	18.3	131.1	30	18.7	131.4	30	29	0	19.4	127.3	40	198	0	21.1	123.4
001018	18.0	129.7	30	18.7	130.3	30	44	0	19.4	124.7	40	198	-5	21.0	121.4
001102	17.2	128.4	30	17.3	128.7	30	8	0	17.1	124.4	45	187	0	18.8	120.4
001108	16.5	128.5	35	17.0	127.8	30	50	-5	17.2	124.7	45	208	0	19.0	119.4
001112	16.9	129.0	40	17.2	129.2	35	21	-5	18.1	125.4	45	80	0	18.5	121.2
001118	17.5	128.4	45	17.9	128.4	40	31	-5	19.4	124.0	50	108	0	18.0	120.8
001202	17.8	127.4	50	17.5	128.2	55	39	5	18.7	125.4	65	104	0	19.1	121.7
001208	18.4	127.1	54	17.0	127.4	55	38	0	19.0	124.4	65	168	-5	19.1	120.9
001212	18.7	126.0	54	18.5	126.4	55	26	0	19.4	123.4	65	213	-5	19.4	119.6
001218	19.2	126.4	60	18.8	125.4	55	61	-5	19.8	122.4	65	226	-5	20.0	118.0
001302	20.0	126.7	64	20.1	126.4	65	8	0	23.4	124.0	75	58	0	27.4	127.5
001308	21.1	126.4	70	21.1	126.4	70	11	0	25.0	124.4	75	436	0	28.4	128.5
001312	22.0	126.0	70	22.0	126.4	70	33	0	25.0	127.0	75	156	-5	20.4	129.0
001318	22.7	125.2	70	23.2	125.7	70	41	0	27.4	127.1	80	203	-5	31.0	131.2
001402	23.5	125.0	74	23.7	125.1	70	13	-5	27.8	124.4	80	128	0	31.4	127.2
001408	24.0	124.8	74	24.1	124.0	75	4	0	27.4	124.2	85	66	-5	31.7	126.8
001412	24.6	124.4	80	24.6	124.4	80	16	0	30.8	124.7	100	252	0	30.8	126.7
001418	25.2	124.4	85	25.3	124.4	85	4	0	28.2	124.4	105	51	14	31.5	126.2
001502	25.9	124.3	90	25.7	124.4	90	13	0	28.4	124.0	100	60	10	31.4	124.7
001508	26.9	124.1	90	26.5	124.0	90	29	0	29.3	124.2	95	82	5	32.4	125.1
001512	27.5	123.7	90	27.5	123.0	90	11	0	30.4	123.4	95	72	10	34.8	125.1
001518	28.5	123.7	90	28.3	123.0	90	13	0	31.4	123.4	95	78	14	34.7	126.0
001602	29.6	123.7	90	29.5	123.7	95	6	5	33.4	124.4	85	39	14	37.3	127.7
001608	30.6	123.7	90	31.1	123.4	90	30	0	36.2	124.4	80	60	24	40.4	131.5
001612	31.7	123.7	84	31.6	123.7	90	6	5	36.1	124.4	80	219	50	0.0	0.0
001618	32.8	124.0	80	32.4	124.0	80	10	0	37.1	124.4	75	285	50	0.0	0.0
001702	34.0	125.0	70	34.1	124.0	70	8	0	38.7	124.0	50	291	24	0.0	0.0
001708	35.6	126.7	54	35.2	126.2	60	34	5	39.1	130.0	35	362	10	0.0	0.0
001712	37.1	128.0	30	36.6	128.4	30	33	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
001718	39.5	131.4	24	38.9	131.4	30	36	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
001802	42.0	133.4	24	42.1	134.3	25	36	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
001808	44.2	135.3	24	44.8	137.4	25	81	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

ALL FORECASTS

	WIND	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	26	163	285	441
AVG RIGHT ANGLE ERROR	17	98	209	340
AVG INTENSITY MAGNITUDE ERROR	2	11	15	20
AVG INTENSITY BIAS	-0	6	3	-1
NUMBER OF FORECASTS	34	34	30	25



SUPER TYPHOON JUDY

40/DA/HO	BEST TRACK				JANUING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST			
	POSIT	WIND	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS			
	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)			
081512Z	10.5	151.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	0	0.0	0.0	0	-0	0			
081518Z	11.3	150.1	15	0.0	0.0	0	-0	0	0.0	0.0	0	0	0.0	0.0	0	-0	0			
081600Z	11.8	149.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	0	0.0	0.0	0	-0	0			
081606Z	12.3	147.4	15	0.0	0.0	0	-0	0	0.0	0.0	0	0	0.0	0.0	0	-0	0			
081612Z	12.8	146.1	25	0.0	0.0	0	-0	0	0.0	0.0	0	0	0.0	0.0	0	-0	0			
081618Z	13.3	144.7	30	13.6	144.5	35	21	5	16.4	144.3	40	10.4	143.8	70	10.2	-20	26.1			
081700Z	13.8	143.4	35	13.9	143.2	40	13	45	16.4	139.3	40	62	5	10.4	134.5	70	93			
081706Z	14.2	142.2	35	14.2	142.0	40	12	5	16.3	137.4	40	52	15	10.4	133.0	70	121			
081712Z	14.5	141.1	40	14.6	140.6	45	30	5	16.7	135.4	45	111	25	10.4	130.9	70	221			
081718Z	15.0	140.0	50	15.0	139.4	50	35	0	17.1	134.5	45	114	25	10.3	130.0	70	247			
081800Z	15.7	139.0	45	15.4	138.9	55	19	0	17.3	134.3	70	101	25	10.3	130.1	80	239			
081806Z	16.4	138.2	75	16.0	137.4	60	42	-15	18.1	133.1	70	120	25	20.0	129.0	80	245			
081812Z	17.1	137.3	40	16.8	137.3	70	18	-10	18.7	133.4	85	93	35	20.2	129.1	90	245			
081818Z	17.0	136.4	40	17.4	136.4	75	12	-15	19.4	132.4	85	121	25	21.1	128.2	90	237			
081900Z	18.2	135.4	110	18.2	135.7	110	6	0	20.4	131.3	130	94	0	22.4	129.5	135	106			
081906Z	19.0	135.1	114	18.9	135.0	115	8	0	21.3	131.5	130	104	-5	23.4	129.0	130	97			
081912Z	19.7	134.7	120	19.7	134.5	125	11	5	22.3	131.2	135	81	0	24.0	129.5	135	82			
081918Z	20.5	134.4	125	20.2	134.2	130	21	5	22.3	132.1	135	54	10	24.4	130.5	135	49			
082000Z	21.3	133.4	130	21.3	133.4	135	0	5	24.4	132.7	135	89	15	27.3	133.2	135	329			
082006Z	22.2	133.2	135	22.2	133.2	135	0	0	25.4	131.5	135	97	25	20.3	133.0	135	175			
082012Z	22.7	132.4	135	23.1	132.4	135	26	0	26.4	130.7	120	130	20	20.2	130.6	110	340			
082018Z	23.1	131.0	125	23.3	131.2	130	40	5	25.1	128.8	115	121	15	27.4	125.3	105	170			
082100Z	23.4	131.1	120	23.4	131.0	120	5	0	24.4	128.0	110	6	15	24.2	125.7	100	24			
082106Z	24.2	130.4	110	24.0	130.4	115	16	5	24.0	128.0	105	160	15	24.2	127.7	90	176			
082112Z	24.3	129.4	100	24.5	129.4	115	12	15	24.4	127.8	100	125	10	24.7	125.7	90	127			
082118Z	24.4	128.9	100	24.7	128.7	115	21	-15	27.0	126.7	100	118	15	20.2	124.5	90	91			
082200Z	24.4	128.0	45	24.4	127.8	90	11	-5	25.0	124.4	85	63	20	27.7	122.1	80	71			
082206Z	24.4	127.5	90	24.4	127.2	85	16	-5	25.4	124.4	60	70	20	27.7	121.8	50	104			
082212Z	24.5	127.0	90	24.3	126.8	85	16	-5	25.0	124.1	60	151	20	27.0	121.5	50	177			
082218Z	25.1	126.3	85	24.4	126.1	80	21	-5	26.4	123.3	75	84	20	20.2	121.0	50	114			
082300Z	25.0	125.4	85	25.0	125.7	85	5	0	27.0	123.1	70	44	10	20.2	120.8	40	135			
082306Z	26.9	124.5	85	26.7	124.4	80	20	-5	29.2	121.5	50	58	20	31.7	119.4	25	215			
082312Z	27.5	123.7	85	27.5	123.7	80	0	-5	30.1	120.7	45	100	15	0	0	0	0			
082318Z	28.2	123.2	80	28.0	123.0	80	16	0	30.4	120.1	40	134	15	0	0	0	0			
082400Z	28.7	122.9	80	28.4	122.7	70	12	-10	31.2	120.3	30	144	20	0	0	0	0			
082406Z	29.3	122.4	70	29.5	122.2	65	24	-5	32.3	120.2	30	181	20	0	0	0	0			
082412Z	29.8	122.4	60	29.9	122.1	55	17	-5	32.4	120.4	30	187	10	0	0	0	0			
082418Z	30.4	122.7	55	30.6	122.7	55	24	0	32.4	120.2	25	247	-5	0	0	0	0			
082500Z	30.9	123.1	55	30.9	122.7	50	21	-5	32.4	124.3	25	147	0	0	0	0	0			
082506Z	31.4	123.4	50	31.4	123.4	45	5	-5	34.1	123.2	25	41	0	0	0	0	0			
082512Z	31.8	124.2	40	32.0	124.1	40	13	0	34.7	122.2	25	66	5	0	0	0	0			
082518Z	32.5	125.1	30	32.3	125.1	35	15	5	0.0	0.0	0	0	0	0	0	0	0			
082600Z	33.2	126.1	25	33.6	126.7	30	39	5	0.0	0.0	0	0	0	0	0	0	0			
082606Z	33.9	127.1	25	34.4	127.4	25	39	0	0.0	0.0	0	0	0	0	0	0	0			
082612Z	34.4	128.5	20	0.0	0.0	0	-0	0	0.0	0.0	0	0	0	0	0	0	0			

AIR FORECASTS

WIND	72-4R	48-4R	24-4R
19.	105.	173.	277.
12.	41.	139.	217.
6.	16.	23.	24.
1.	-7.	-3.	-1.
NUMBER OF FORECASTS	39	36	27

AVG FORECAST POSIT ERROR  
AVG RIGHT ANGLE ERROR  
AVG INTENSITY MAGNITUDE ERROR  
AVG INTENSITY RMS  
NUMBER OF FORECASTS

TROPICAL DEPRESSION 14

40/DA/HO	BEST TRACK				JANUING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST			
	POSIT	WIND	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS	POSIT	WIND	ERRORS			
	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)	(1N)			
081800Z	13.5	146.4	15	0.0	0.0	0	-0	0	0.0	0.0	0	0	0.0	0.0	0	-0	0			
081806Z	13.9	146.2	20	13.8	146.2	20	4	0	15.1	146.8	30	130	10	14.4	141.8	40	205			
081812Z	14.5	145.4	20	14.6	146.2	20	35	0	18.0	144.8	30	152	10	0	0	0	0			
081818Z	15.3	145.2	20	14.4	145.4	20	38	0	16.1	143.7	30	204	15	0	0	0	0			
081900Z	16.1	144.4	20	15.7	144.7	20	25	0	17.4	141.9	30	165	20	0	0	0	0			
081906Z	17.1	143.0	20	17.0	143.4	20	3	0	19.1	140.3	15	120	5	0	0	0	0			
081912Z	18.1	143.0	20	17.9	143.1	20	13	0	0.0	0.0	0	0	0	0	0	0	0			
081918Z	19.2	142.0	15	18.4	142.2	20	43	5	0.0	0.0	0	0	0	0	0	0	0			
082000Z	20.0	140.0	10	19.5	140.4	20	41	10	0.0	0.0	0	0	0	0	0	0	0			
082006Z	21.0	139.4	10	19.8	140.1	20	77	10	0.0	0.0	0	0	0	0	0	0	0			

AIR FORECASTS

WIND	72-4R	48-4R	24-4R
13.	157.	294.	0.
10.	43.	119.	0.
3.	12.	30.	0.
3.	12.	30.	0.
NUMBER OF FORECASTS	0	4	1

AVG FORECAST POSIT ERROR  
AVG RIGHT ANGLE ERROR  
AVG INTENSITY MAGNITUDE ERROR  
AVG INTENSITY RMS  
NUMBER OF FORECASTS

TROPICAL STORM KEN

BEST TRACK				ARRIVING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST					
NO/DA/HR	POSIT	WIND	PRMS	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND		
000000	22.3 142.0	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	22.5 141.5	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	22.9 140.1	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	23.3 138.9	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	23.7 137.8	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	24.0 136.8	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	24.6 135.8	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	24.6 134.0	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	24.8 134.1	25	25.4	132.4	25	105	0	27.4	129.4	35	200	5	28.4	126.2	35	217	-10	34.6	129.5	30	280
000000	24.9 133.4	25	25.2	132.0	25	37	0	25.8	130.1	35	80	5	27.4	128.3	35	100	-25	30.0	127.4	30	485
000000	25.1 132.6	25	25.3	132.4	25	25	0	25.0	130.1	35	80	5	27.4	129.3	35	265	-20	30.7	127.6	30	542
000000	25.3 132.4	25	25.3	131.4	25	43	0	26.5	129.0	35	111	5	29.7	128.2	35	274	-10	0.0	0.0	0.0	0.0
000000	25.8 131.4	30	25.5	131.7	30	13	0	26.4	129.1	40	151	5	28.4	127.6	40	450	10	0.0	0.0	0.0	0.0
000000	26.5 131.2	35	26.2	131.0	30	42	-5	28.4	130.4	40	98	20	30.4	130.4	35	343	10	0.0	0.0	0.0	0.0
000000	27.2 130.4	40	27.2	130.4	40	0	5	30.0	130.0	40	61	5	30.1	133.5	35	205	10	0.0	0.0	0.0	0.0
000000	27.8 130.4	40	28.1	130.1	45	21	5	31.0	130.4	50	79	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	28.0 130.2	45	28.4	130.1	40	13	-5	32.0	131.0	55	173	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	30.0 130.4	60	29.4	130.2	40	16	-20	33.0	132.4	30	137	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	31.3 131.1	55	31.5	131.2	40	13	-15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	32.5 131.0	45	32.7	132.0	35	13	-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	34.0 133.4	30	34.0	133.0	30	25	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	35.2 134.8	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	36.5 136.4	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

ALL FORECASTS

	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	29	116	273
AVG RIGHT ANGLE ERROR	13	40	111
AVG INTENSITY MAGNITUDE ERROR	5	6	14
AVG INTENSITY BIAS	-3	-2	-5
NUMBER OF FORECASTS	13	10	7

TYPHOON LOLA

BEST TRACK				ARRIVING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST					
NO/DA/HR	POSIT	WIND	PRMS	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND		
000000	21.3 141.7	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	21.5 141.4	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
000000	21.8 141.4	30	21.4	151.2	30	11	0	24.5	150.5	45	80	15	26.5	150.5	45	200	-20	29.1	152.7	45	268
000000	22.1 141.1	30	22.6	150.7	30	45	0	25.2	149.8	45	100	10	27.8	151.0	45	273	-25	30.0	150.2	45	447
000000	22.4 141.1	30	22.6	150.0	30	62	0	23.0	147.9	40	61	-	25.4	145.4	50	70	-25	26.5	142.0	55	246
000000	22.8 140.7	30	22.5	150.4	30	21	0	23.2	149.4	45	81	-	24.4	147.3	50	81	-25	24.6	144.6	55	143
000000	23.1 140.7	30	22.5	150.4	30	37	0	23.2	149.4	30	131	35	24.4	147.3	40	171	-35	24.6	144.6	45	105
000000	23.4 140.7	30	23.1	150.2	30	33	-5	24.4	148.4	35	98	35	25.4	146.8	40	42	-40	24.0	143.9	45	285
000000	23.7 140.4	45	23.6	149.1	45	9	0	25.2	148.8	60	85	15	26.7	144.0	70	139	-15	28.4	141.7	75	245
000000	24.0 140.4	50	24.0	148.4	50	0	0	25.4	148.0	65	32	10	27.2	143.6	70	143	-20	29.0	141.4	75	211
000000	24.4 140.4	45	24.7	147.7	45	0	0	26.0	146.2	75	72	0	27.0	143.0	80	177	-10	30.3	141.5	85	204
000000	24.7 140.1	70	24.7	146.0	70	11	0	26.8	144.2	75	123	5	28.4	142.1	80	220	0	31.6	141.5	90	194
000000	25.3 146.7	75	25.2	146.4	75	12	0	27.2	144.0	85	133	0	28.0	141.8	85	248	20	33.1	142.0	85	146
000000	25.6 146.4	75	25.4	146.0	75	34	0	27.0	143.8	85	137	-	28.2	141.9	85	245	25	34.6	142.7	85	145
000000	26.3 146.4	75	26.4	146.1	75	12	0	29.2	144.5	80	49	10	30.2	150.0	85	156	10	33.0	148.4	50	255
000000	26.8 146.4	40	27.0	146.4	80	13	0	29.0	147.2	75	59	-	30.2	151.0	80	147	15	33.0	147.5	45	257
000000	27.4 146.4	45	27.3	146.4	80	6	-5	29.8	147.4	75	50	10	30.2	150.9	80	143	20	0.0	0.0	0.0	0.0
000000	27.8 146.4	40	27.9	146.4	90	9	0	30.1	147.8	80	69	20	30.5	151.7	80	170	25	0.0	0.0	0.0	0.0
000000	28.5 146.7	90	28.5	146.4	90	5	0	31.1	148.0	75	82	20	30.9	152.2	55	140	25	0.0	0.0	0.0	0.0
000000	29.3 146.7	80	29.3	146.7	85	0	5	31.4	148.1	65	78	20	31.0	152.9	50	216	20	0.0	0.0	0.0	0.0
000000	30.1 146.4	65	30.2	146.1	85	0	0	32.4	148.8	45	119	5	32.5	154.1	40	220	10	0.0	0.0	0.0	0.0
000000	30.8 146.4	60	30.8	146.4	80	10	0	33.4	149.8	45	130	10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	31.7 147.0	45	31.7	147.2	55	10	0	33.4	152.4	40	154	10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	33.0 147.7	45	33.0	147.7	45	0	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	34.4 148.8	40	34.2	148.4	40	21	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	35.1 149.1	35	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	35.9 151.4	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	36.6 153.4	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
000000	37.1 155.1	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

ALL FORECASTS

	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	16	88	172
AVG RIGHT ANGLE ERROR	10	64	144
AVG INTENSITY MAGNITUDE ERROR	1	12	20
AVG INTENSITY BIAS	-0	-0	-2
NUMBER OF FORECASTS	23	21	19



TYPHOON OWEN

NO/JA/MO	BEST TRACK			WINDING			24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST								
	POSIT	WIND		POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR					
0922007	12.6	138.3	20	13.0	138.0	20	58	0	13.6	138.0	40	125	15	14.1	131.8	00	229	15	14.9	129.5	70	241	0
0922007	12.5	138.1	25	12.9	138.0	25	25	0	13.4	138.9	45	99	15	14.6	131.7	00	229	5	14.9	129.5	70	247	5
0922122	12.1	137.7	25	12.5	137.7	25	33	0	12.0	138.0	35	161	0	13.8	130.9	05	137	-15	14.5	128.2	55	249	-25
0922182	12.1	137.2	25	12.3	136.7	25	56	0	12.7	137.7	35	226	-10	13.6	129.1	50	426	-10	14.3	126.0	60	479	-40
0923002	12.6	146.0	25	12.3	136.7	25	21	0	12.4	136.5	30	226	-10	12.7	131.2	35	447	-35	14.2	128.0	65	456	-55
0923082	13.3	136.4	30	12.3	136.1	30	66	0	12.8	137.6	45	313	-10	12.8	130.3	35	405	-20	14.3	127.1	60	421	-50
0923122	13.9	136.7	35	13.3	136.1	45	34	10	13.0	136.1	50	309	-10	14.7	131.4	00	465	-20	14.8	128.2	70	418	-40
0923182	15.0	135.8	45	13.7	135.6	45	79	0	14.4	135.1	55	334	-5	15.8	129.9	05	411	-35	14.3	129.2	75	418	-10
0924002	19.1	135.7	45	16.4	135.2	45	19	0	21.0	137.4	00	92	-10	24.8	131.1	05	142	-45	24.4	142.3	70	264	-30
0924062	17.7	136.7	55	17.4	136.5	55	13	0	22.1	131.4	05	90	-10	24.0	131.3	70	148	-40	24.4	143.2	75	248	-20
0924122	19.0	133.2	60	19.2	133.4	60	16	0	24.0	130.4	75	179	-5	27.4	130.2	85	240	-25	30.4	142.0	70	247	-20
0924182	20.1	132.1	60	20.7	132.7	60	38	0	25.6	130.7	75	189	-25	28.7	130.5	85	243	-20	31.0	142.4	70	244	-15
0925002	21.0	130.7	70	20.9	130.8	70	8	0	23.6	127.0	85	122	-25	28.2	125.4	75	239	-5	28.6	125.6	80	242	-5
0925062	21.3	130.1	75	21.7	130.0	75	29	0	24.1	127.1	85	120	-25	28.2	125.8	75	214	0	29.3	127.0	75	190	-5
0925122	22.0	129.8	80	21.9	129.4	80	23	0	24.7	127.0	85	130	-15	27.1	126.5	75	189	5	30.7	129.4	75	132	0
0925182	22.6	129.4	100	22.5	129.0	90	28	-10	24.8	127.4	100	113	0	27.5	127.0	75	181	10	30.3	140.0	70	150	-5
0926002	23.1	129.7	110	23.2	129.2	95	13	-15	25.6	127.7	110	60	10	27.8	130.0	90	49	5	30.3	144.0	70	241	-5
0926062	23.5	129.2	110	23.7	129.0	100	16	-10	26.0	128.5	110	71	15	28.7	131.1	85	108	5	31.2	145.3	65	249	-10
0926122	23.8	129.7	110	24.0	129.1	100	15	-10	26.8	128.0	110	63	20	28.4	130.6	95	84	10	30.9	145.5	65	240	-10
0926182	24.8	129.4	105	24.4	129.4	105	5	0	29.0	130.8	75	158	-10	28.8	132.1	75	135	0	31.1	147.0	55	219	-20
0927002	24.9	129.4	100	24.8	129.4	100	12	0	28.4	129.4	95	30	10	28.4	131.7	70	99	-5	31.6	147.1	50	200	-30
0927062	25.5	129.7	95	25.3	129.7	95	12	0	27.7	130.4	90	32	10	28.2	132.7	65	142	-10	30.3	144.0	45	247	-20
0927122	26.0	129.8	90	25.9	129.0	90	9	0	28.3	131.1	85	80	10	28.4	131.9	65	212	-10	31.3	148.2	45	176	-10
0927182	26.5	129.8	85	26.4	129.7	85	4	0	29.0	130.8	75	89	0	31.5	133.7	60	149	-15	34.0	149.5	45	133	0
0928002	27.0	129.8	85	27.1	129.0	85	8	0	29.6	130.7	75	34	0	30.2	133.8	60	144	-10	34.0	140.3	40	207	5
0928062	27.3	129.8	80	27.5	129.8	80	12	0	30.7	131.7	75	124	0	30.8	135.1	55	103	-10	34.0	0.0	0	0	0
0928122	27.6	129.8	75	27.7	129.8	75	6	0	29.5	130.0	70	29	-5	30.3	132.0	60	149	5	34.0	0.0	0	0	0
0928182	27.8	129.8	75	27.7	129.8	75	6	0	29.6	129.4	70	80	-5	31.2	131.2	60	454	15	34.0	0.0	0	0	0
0929002	28.1	129.0	75	28.0	129.8	75	8	0	29.0	130.4	70	82	0	30.4	132.5	60	411	25	34.0	0.0	0	0	0
0929062	28.5	128.7	75	28.7	129.8	75	20	0	32.0	131.5	60	84	-25	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0929122	29.1	130.7	75	29.1	130.7	75	5	0	32.7	131.8	55	197	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0929182	29.8	130.4	75	29.7	130.4	75	8	0	32.8	132.4	50	331	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0930002	30.8	131.5	70	31.0	131.5	70	12	0	35.0	132.7	40	477	-5	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0930062	32.4	133.1	45	32.0	132.4	70	39	5	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0930122	34.1	135.1	45	33.4	134.4	70	35	15	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0930182	36.2	138.1	45	35.4	137.0	50	72	5	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
1001002	39.8	141.0	35	39.0	141.7	35	55	0	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0

A.L. FORECASTS

	RMSE	26-48	48-72	72-96
AVG FORECAST POSIT ERROR	25	146	250	327
AVG HIGH ANGLE FROM	15	78	154	244
AVG INTENSITY MAGNITUDE ERROR	2	10	15	18
AVG INTENSITY BIAS	-0	-3	-4	-14
NUMBER OF FORECASTS	37	33	29	23

TROPICAL STORM PAMELA

NO/JA/MO	BEST TRACK			WINDING			24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST								
	POSIT	WIND		POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR					
0923007	18.0	150.0	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0923067	18.2	148.8	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0923127	18.3	147.4	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0923182	18.5	146.5	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0924007	18.6	145.4	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0924062	18.7	145.4	15	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0924122	18.8	144.4	20	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0924182	19.0	144.1	25	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0925007	19.2	143.4	25	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0925067	19.4	143.0	45	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0	0.0	0
0925122	19.7	142.1	60	13.5	142.0	35	13	-5	21.0	139.0	0	204	-25	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0925182	20.3	140.9	75	13.7	141.1	35	34	0	21.0	138.1	45	306	-25	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0926007	20.8	139.4	75	20.4	139.8	35	25	0	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0926067	22.0	137.9	70	21.4	137.0	30	25	0	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0926127	24.1	137.4	25	23.4	136.4	30	67	5	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0
0926187	26.0	136.4	20	25.0	136.8	25	0	5	0.0	0.0	0	0	0	34.0	0.0	0	0	0	34.0	0.0	0	0	0

A.L. FORECASTS

	RMSE	26-48	48-72	72-96
AVG FORECAST POSIT ERROR	28	144	24	0
AVG HIGH ANGLE FROM	22	15	7	0
AVG INTENSITY MAGNITUDE ERROR	1	25	7	0
AVG INTENSITY BIAS	1	0	0	0
NUMBER OF FORECASTS	4	2	0	1

TROPICAL STORM ROGER

NO/DATMO	PAST TRACK				DARNING				24 HOUR FOMELAST				48 HOUR FOMELAST				72 HOUR FOMELAST			
	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND		
100200Z	11.7	142.7	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100206Z	12.0	142.1	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100212Z	12.4	141.4	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100218Z	13.2	140.4	24	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100300Z	14.2	140.2	30	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100306Z	14.1	139.4	30	15.7	134.4	25.	27.	-2.	18.4	137.7	35.	201.	-4.	20.4	136.0	45.	45.	0.		
100312Z	14.0	138.0	30	15.4	134.1	25.	85.	-2.	20.2	137.1	35.	170.	-4.	24.4	136.4	45.	19.	0.		
100318Z	14.4	137.4	30	19.5	134.1	30.	29.	0.	24.4	136.0	35.	265.	10.	20.0	137.4	45.	347.	0.		
100400Z	20.0	136.7	36	21.0	134.7	30.	24.	-5.	26.0	134.5	35.	365.	10.	31.4	134.3	25.	515.	-20.		
100406Z	21.2	135.7	40	21.7	135.2	35.	30.	-5.	26.4	134.4	30.	379.	4.	31.4	134.5	30.	442.	-15.		
100412Z	21.5	134.4	40	21.5	134.7	40.	17.	0.	23.7	132.4	30.	194.	4.	27.0	133.0	35.	123.	10.		
100418Z	21.0	133.5	45	22.5	131.4	45.	90.	0.	25.4	131.4	35.	254.	10.	20.1	134.5	45.	44.	5.		
100500Z	19.9	134.2	45	20.2	133.4	40.	25.	-5.	23.4	134.7	30.	24.	4.	20.0	137.8	40.	180.	5.		
100506Z	20.3	135.2	45	20.2	134.7	40.	22.	-5.	23.4	134.7	30.	113.	4.	20.4	137.9	40.	374.	10.		
100512Z	21.5	135.5	45	21.4	135.1	40.	23.	-5.	27.2	134.1	45.	44.	4.	0.0	0.0	0.	-0.	0.		
100518Z	22.8	135.7	45	22.4	135.4	40.	35.	-5.	26.7	134.0	40.	172.	4.	0.0	0.0	0.	-0.	0.		
100600Z	23.0	134.7	45	23.0	134.7	40.	4.	-5.	29.0	134.4	35.	135.	4.	0.0	0.0	0.	-0.	0.		
100606Z	25.2	134.4	45	25.1	134.7	40.	17.	-5.	31.5	137.9	35.	205.	4.	0.0	0.0	0.	-0.	0.		
100612Z	26.0	135.7	45	26.4	135.7	40.	24.	-5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100618Z	29.1	136.2	40	24.4	134.2	40.	47.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100700Z	32.0	137.4	35	31.4	137.4	35.	14.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
100706Z	34.4	140.1	30	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		

ALL FORECASTS

	MMMG	24-4R	48-4R	72-4R
AVG FOMELAST POSIT ERROR	12.	105.	251.	303.
AVG RIGHT ANGLE ERROR	19.	93.	104.	174.
AVG INTENSITY MAGNITUDE ERROR	7.	5.	7.	11.
AVG INTENSITY bias	-3.	0.	-1.	-1.
NUMBCH OF FORECASTS	14	13	9	4

TYPHOON SARAH

40/00/00	BEST TRACK			WARNING			24 HOUR FORECAST			48 HOUR FORECAST			72 HOUR FORECAST											
	POSIT	WIND	PRBL	POSIT	WIND	PRBL	POSIT	WIND	PRBL	POSIT	WIND	PRBL	POSIT	WIND	PRBL									
0930127	14.6	119.4	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
0930187	14.6	119.4	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1001007	14.5	119.8	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1001067	14.5	120.2	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1001127	14.5	120.4	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1001187	14.5	120.4	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1002007	14.7	121.0	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1002067	14.8	121.1	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1002127	14.9	121.2	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1002187	15.2	121.2	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1003007	15.2	120.4	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1003067	15.0	120.4	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1003127	14.8	120.3	14	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1003187	14.6	120.0	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1004007	14.4	119.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1004067	14.2	119.5	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0									
1004127	13.8	119.1	30	14.0	119.7	30	37.0	0.0	13.4	118.7	35	89.0	-4.0	13.0	110.1	45	55.0	0.0	17.5	113.3	40	74.0	-35.0	
1004187	13.5	118.8	35	13.9	119.7	35	34.0	0.0	13.4	117.7	50	121.0	10.0	12.4	115.8	30	270.0	0.0	12.4	112.0	40	74.0	-35.0	
1005007	13.0	118.4	40	13.7	118.0	40	42.0	0.0	13.2	117.0	50	160.0	10.0	12.7	114.6	30	242.0	-10.0	12.2	111.8	40	43.0	-35.0	
1005067	12.7	119.0	40	12.5	118.5	40	31.0	0.0	12.5	118.5	40	70.0	0.0	11.5	118.0	40	79.0	-35.0	10.7	117.0	40	130.0	-35.0	
1005127	12.5	119.3	40	12.5	119.7	40	0.0	0.0	12.0	114.0	40	45.0	-5.0	11.1	117.9	40	44.0	-35.0	10.6	116.4	35	159.0	-40.0	
1005187	12.5	119.4	40	12.1	119.0	40	34.0	0.0	11.0	114.4	40	90.0	10.0	10.3	117.3	35	136.0	-40.0	9.9	116.3	30	141.0	-40.0	
1006007	12.5	119.7	40	12.3	119.0	40	43.0	0.0	12.1	118.7	40	41.0	-20.0	11.5	118.0	35	71.0	-40.0	10.8	117.0	30	44.0	-55.0	
1006067	12.4	119.7	40	12.4	119.0	40	12.0	0.0	12.4	120.8	35	95.0	40.0	12.3	121.0	30	140.0	-45.0	12.4	122.4	25	277.0	-45.0	
1006127	12.3	119.4	45	12.4	120.1	35	30.0	-10.0	12.4	120.8	35	100.0	40.0	12.4	121.0	30	179.0	-45.0	12.4	121.0	30	0.0	0.0	
1006187	12.2	119.4	40	12.4	119.8	35	21.0	-15.0	12.4	120.3	30	80.0	40.0	12.4	121.2	20	147.0	-55.0	12.4	121.0	30	0.0	0.0	
1007007	12.2	119.4	40	12.2	119.4	45	0.0	0.0	12.2	119.4	45	50.0	40.0	12.2	119.4	40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1007067	12.1	119.2	75	12.2	119.2	65	4.0	-10.0	11.9	118.4	60	71.0	15.0	11.5	116.4	50	43.0	-40.0	11.3	116.3	40	119.0	-70.0	
1007127	11.9	119.2	75	12.1	119.2	65	12.0	-10.0	11.8	118.1	60	84.0	15.0	11.6	116.5	50	56.0	-40.0	11.2	116.5	40	93.0	-60.0	
1007187	11.6	119.2	75	12.0	119.1	65	25.0	-10.0	11.8	118.4	55	53.0	-20.0	11.7	116.9	50	17.0	-45.0	10.7	116.9	40	44.0	-60.0	
1008007	11.3	119.2	75	11.7	119.1	65	5.0	-10.0	11.7	118.2	55	13.0	-30.0	11.1	117.3	50	62.0	-60.0	11.1	116.5	40	76.0	-60.0	
1008067	11.0	119.2	75	11.1	119.2	65	6.0	-10.0	10.8	118.0	60	63.0	-30.0	10.7	116.6	50	67.0	-55.0	10.8	115.2	50	78.0	-60.0	
1008127	10.8	119.1	75	10.4	119.1	65	0.0	-10.0	10.1	118.0	60	80.0	-30.0	10.1	116.4	50	93.0	-45.0	10.2	116.4	50	119.0	-35.0	
1008187	11.0	118.4	75	10.4	119.1	65	30.0	-10.0	10.7	118.2	65	90.0	-30.0	10.0	116.6	50	117.0	-45.0	10.3	115.0	50	129.0	-25.0	
1009007	11.1	118.4	45	10.4	118.2	65	32.0	-20.0	10.4	118.2	70	72.0	-40.0	10.4	114.3	65	49.0	-35.0	11.6	112.3	65	127.0	-10.0	
1009067	11.3	117.8	40	11.3	117.8	40	0.0	0.0	11.4	116.8	45	21.0	-25.0	11.4	115.4	40	35.0	-10.0	11.8	114.2	40	70.0	10.0	
1009127	11.4	117.4	40	11.5	117.4	40	12.0	0.0	11.4	116.8	45	13.0	-15.0	11.4	114.3	40	29.0	-5.0	12.8	112.7	40	79.0	15.0	
1009187	11.4	117.1	45	11.7	116.9	40	21.0	-5.0	12.3	114.0	45	50.0	-15.0	12.4	113.0	40	42.0	-5.0	13.0	111.0	40	111.0	15.0	
1010007	11.5	116.7	110	11.4	116.3	90	24.0	-20.0	11.4	114.4	85	104.0	-15.0	11.5	111.4	80	176.0	-5.0	11.5	109.9	80	241.0	20.0	
1010067	11.6	116.3	110	11.5	116.4	100	6.0	-10.0	11.0	114.4	100	37.0	10.0	12.0	112.5	90	93.0	20.0	12.1	110.4	90	126.0	30.0	
1010127	11.7	116.0	100	11.5	115.0	100	8.0	0.0	11.4	114.0	100	52.0	15.0	12.0	112.0	90	100.0	25.0	12.1	110.0	80	126.0	20.0	
1010187	11.8	115.4	100	11.9	115.3	100	30.0	0.0	12.2	113.7	100	48.0	25.0	12.5	111.7	90	41.0	25.0	12.6	109.6	75	109.0	15.0	
1011007	11.9	115.4	100	12.0	115.4	90	4.0	-10.0	12.5	114.4	75	25.0	0.0	13.0	112.9	70	23.0	10.0	13.3	111.3	60	41.0	5.0	
1011067	12.1	115.1	40	12.0	114.9	40	13.0	0.0	12.4	113.0	75	55.0	5.0	12.6	110.9	70	45.0	10.0	12.6	108.9	60	76.0	10.0	
1011127	12.2	114.8	45	12.1	114.7	40	30.0	5.0	12.3	111.4	75	90.0	10.0	12.4	109.8	60	126.0	0.0	12.4	107.7	20	122.0	-20.0	
1011187	12.4	114.5	75	12.5	113.0	65	36.0	10.0	13.0	111.3	65	44.0	0.0	13.2	109.3	45	105.0	70.0	13.2	109.3	40	0.0	0.0	
1012007	12.8	114.1	75	12.4	114.2	80	25.0	5.0	12.4	112.4	65	40.0	5.0	12.9	111.0	50	39.0	-5.0	13.2	109.3	40	35.0	20.0	
1012067	12.9	113.8	70	13.0	113.4	80	13.0	10.0	13.4	112.1	65	6.0	5.0	13.4	110.5	50	42.0	0.0	13.4	109.5	40	0.0	0.0	
1012127	13.1	113.3	45	13.3	113.2	40	13.0	15.0	14.0	111.5	65	38.0	5.0	14.4	109.9	40	15.0	0.0	14.4	109.5	40	0.0	0.0	
1012187	13.2	112.0	45	13.5	112.5	75	29.0	10.0	14.4	110.3	65	70.0	5.0	14.7	108.3	30	101.0	-5.0	14.8	107.8	30	0.0	0.0	
1013007	13.3	112.4	40	13.3	112.1	75	23.0	15.0	13.2	110.2	55	26.0	0.0	13.1	108.2	30	29.0	10.0	13.2	107.8	30	0.0	0.0	
1013067	13.4	112.1	40	13.2	112.0	75	13.0	15.0	13.1	110.1	55	13.0	5.0	13.0	108.0	30	0.0	0.0	13.2	107.8	30	0.0	0.0	
1013127	13.4	111.7	40	13.5	111.4	70	13.0	10.0	13.4	109.4	55	30.0	5.0	13.4	108.0	30	0.0	0.0	13.4	107.8	30	0.0	0.0	
1013187	13.4	111.1	40	13.5	111.0	60	105.0	0.0	13.4	108.3	35	47.0	0.0	13.4	107.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	
1014007	13.4	110.4	55	13.5	110.9	55	19.0	0.0	13.4	108.4	30	21.0	10.0	13.4	107.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	
1014067	13.3	110.0	50	13.4	110.4	50	24.0	0.0	13.4	108.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	
1014127	13.3	109.4	50	13.3	109.4	50	0.0	0.0	13.4	108.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	
1014187	13.2	109.1	35	13.1	109.0	35	4.0	0.0	13.4	108.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	
1015007	13.1	108.7	20	13.1	108.5	20	12.0	0.0	13.4	108.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	13.4	107.0	30	0.0	0.0	

AFL FORECASTS

	24-HR	48-HR	72-HR	
AVG FORECAST POSIT ERRORS	26.	41.	110.	143.
AVG RIGHT ANGLE ERRORS	16.	40.	85.	107.
AVG INTENSITY MAGNITUDE ERROR	4.	16.	47.	37.
AVG INTENSITY BIAS	-2.	-9.	5.	-21.
NUMBER OF FORECASTS	43	33	34	27



SUPER TYPHOON VERA

MO/JA/HA	BEST TRACK				ANNVING ERRORS				24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS			
	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND		
110200Z	7.0 145.4	25	6.5 145.4	20	32	-5	7.0 147.4	30	112	35	7.6 139.4	40	415	-95	8.3 147.0	50	470	-85		
110206Z	7.4 144.7	55	7.3 145.4	20	54	-5	8.7 147.7	70	240	0	9.7 140.1	80	541	-60	10.9 147.0	85	722	-50		
110212Z	7.2 143.6	50	7.6 144.4	55	81	-5	8.7 141.4	75	279	420	9.4 139.9	85	573	-55	11.2 145.9	95	712	-20		
110218Z	7.6 142.2	50	7.3 143.8	55	94	-5	7.8 140.7	75	350	455	8.5 137.6	85	613	-50	9.1 144.4	95	722	0		
110300Z	8.0 140.0	55	7.3 141.8	55	64	-10	8.4 134.1	75	222	460	10.2 130.3	85	298	-50	12.6 144.4	95	212	0		
110306Z	8.6 139.0	70	8.3 139.0	55	14	-5	11.2 131.7	75	41	465	13.2 125.9	75	57	-60	17.6 122.3	75	78	-15		
110312Z	9.2 147.1	45	9.2 137.0	70	4	-25	11.7 129.4	85	30	454	14.7 124.5	80	33	-35	14.7 122.6	75	104	-5		
110318Z	10.0 145.1	130	9.4 134.2	85	13	-45	12.5 128.4	110	55	425	15.7 121.9	100	51	5	19.8 122.4	80	137	75		
110400Z	10.5 143.0	134	10.5 134.5	125	23	-10	12.4 127.4	130	35	-5	15.3 123.9	120	70	25	19.0 122.2	110	01	70		
110406Z	11.1 141.0	140	10.9 131.4	125	24	-15	13.0 124.0	130	24	-6	15.3 122.7	120	64	30	17.8 122.1	110	112	75		
110412Z	11.6 129.2	140	11.4 129.1	130	13	-10	14.4 121.5	100	151	415	19.1 121.1	80	140	-20	21.0 148.0	50	470	20		
110418Z	12.0 127.7	145	12.4 127.1	130	42	-5	15.7 120.7	100	170	5	19.6 121.8	80	120	15	0.0 0.0	0	-0	0		
110500Z	12.7 125.0	135	12.7 125.4	125	5	-10	16.0 120.1	85	141	410	19.3 121.3	80	90	20	0.0 0.0	0	-0	0		
110506Z	13.4 124.0	135	13.6 124.7	120	17	-15	16.3 120.4	80	109	410	19.6 122.3	80	142	25	0.0 0.0	0	-0	0		
110512Z	14.3 124.1	115	14.2 124.1	120	6	5	17.5 124.6	100	34	20	20.7 126.0	70	503	40	0.0 0.0	0	-0	0		
110518Z	14.8 123.5	95	15.0 123.1	120	25	25	18.4 124.4	100	114	54	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110600Z	15.5 122.7	95	15.3 122.4	95	13	0	18.7 122.2	80	78	20	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110606Z	16.3 122.7	90	16.4 122.5	90	13	0	19.4 124.4	70	205	35	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110612Z	17.0 122.2	80	17.1 122.2	90	5	10	20.3 127.4	70	340	60	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110618Z	17.8 121.7	45	17.9 121.0	85	15	40	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110700Z	17.8 121.2	40	18.3 121.7	80	41	20	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110706Z	18.3 120.2	35	19.2 121.4	35	105	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110712Z	17.0 117.0	30	19.2 121.4	25	257	-5	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		

ALL FORECASTS

	MMMG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERRORS	43	148	249	305
AVG LIGHT ANGLE ERRORS	20	69	111	247
AVG INTENSITY MAGNITUDE ERROR	17	28	33	74
AVG INTENSITY BIAS	-3	-10	-14	7
NUMBER OF FORECASTS	23	19	15	11

TROPICAL STORM WAYNE

MO/JA/HA	BEST TRACK				ANNVING ERRORS				24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS			
	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND		
110700Z	9.9 141.4	14	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110706Z	12.4 141.0	14	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110712Z	14.4 139.0	15	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110718Z	14.8 137.7	20	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110800Z	15.0 135.7	20	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110806Z	15.4 134.4	25	15.3 134.4	25	52	0	18.1 130.1	50	139	10	21.5 130.3	55	235	5	24.8 144.9	45	404	10		
110812Z	16.4 132.1	30	16.3 132.7	30	13	0	19.4 127.4	65	232	20	21.0 126.4	65	221	15	24.5 128.4	40	335	15		
110818Z	16.0 130.4	30	17.1 130.6	30	64	0	19.5 124.4	45	252	0	21.5 124.1	55	321	5	24.8 125.4	35	341	10		
110900Z	15.8 129.9	35	15.0 129.0	35	53	0	18.0 124.1	45	290	-5	22.4 123.5	30	375	-10	0.0 0.0	0	-0	0		
110906Z	15.8 129.3	40	15.8 128.0	35	57	-5	16.3 124.4	25	272	-25	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
110912Z	16.2 129.7	45	15.4 129.7	45	24	0	16.7 127.4	55	30	5	17.4 123.6	45	272	20	0.0 0.0	0	-0	0		
110918Z	16.9 129.7	45	16.5 129.7	50	33	5	17.4 126.2	60	49	10	19.5 129.5	50	107	25	23.0 133.3	30	450	0		
111000Z	17.5 129.0	50	17.7 129.1	50	21	0	21.2 129.4	80	174	20	24.7 134.9	45	459	20	0.0 0.0	0	-0	0		
111006Z	17.8 128.0	50	18.3 129.2	50	34	0	21.4 129.4	55	183	20	25.3 135.1	45	430	15	0.0 0.0	0	-0	0		
111012Z	18.0 128.7	50	19.6 128.3	50	42	0	20.5 124.4	55	139	30	23.4 127.2	40	351	10	0.0 0.0	0	-0	0		
111018Z	18.2 128.4	50	19.2 128.7	50	4	0	19.5 127.1	55	62	30	22.3 126.2	40	295	10	0.0 0.0	0	-0	0		
111100Z	18.6 128.4	40	19.7 128.4	40	6	0	20.8 124.4	35	162	10	23.4 128.9	30	477	5	0.0 0.0	0	-0	0		
111106Z	18.8 128.4	35	19.0 128.4	35	13	0	20.7 124.7	30	177	0	23.0 128.6	30	491	5	0.0 0.0	0	-0	0		
111112Z	18.9 128.2	25	19.4 128.4	25	14	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111118Z	18.7 127.4	25	19.8 128.5	25	40	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111200Z	18.3 127.3	25	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111206Z	18.1 126.8	30	18.1 126.8	30	0	0	17.5 124.2	35	110	10	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111212Z	17.8 126.2	30	19.0 126.4	30	21	0	17.3 124.4	35	163	10	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111218Z	17.4 125.4	30	17.3 126.7	30	50	0	17.5 124.4	30	225	10	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111300Z	16.9 124.4	24	17.2 125.4	25	21	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111306Z	16.7 123.7	24	16.6 123.8	25	25	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111312Z	15.7 122.4	24	15.7 122.4	25	0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		
111318Z	15.2 121.4	20	15.2 121.4	20	6	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0	0.0 0.0	0	-0	0		

ALL FORECASTS

	MMMG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERRORS	27	170	302	447
AVG LIGHT ANGLE ERRORS	14	115	295	413
AVG INTENSITY MAGNITUDE ERROR	0	13	12	0
AVG INTENSITY BIAS	0	10	10	0
NUMBER OF FORECASTS	23	16	12	4



TROPICAL DEPRESSION 26

MO/JA/HR	BEST TRACK			ANNVING			24 HOUR FORECAST			48 HOUR FORECAST			72 HOUR FORECAST		
	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR
1129187	12.2	154.5	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130007	13.6	154.6	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130057	14.9	154.6	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130122	16.2	154.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130187	17.4	153.3	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1201007	18.5	152.3	25	13.7	152.7	25	13.7	152.7	25	13.7	152.7	25	13.7	152.7	25
1201057	19.7	151.6	30	13.6	151.6	30	13.6	151.6	30	13.6	151.6	30	13.6	151.6	30
1201122	20.9	150.7	30	20.2	151.7	30	33.0	151.7	30	80.0	151.7	30	80.0	151.7	30
1201187	22.5	150.0	30	22.5	150.0	30	33.0	150.0	30	80.0	150.0	30	80.0	150.0	30
1202007	24.2	149.8	30	24.5	150.0	30	21.0	150.0	30	80.0	150.0	30	80.0	150.0	30
1202057	25.7	150.6	30	25.8	150.4	30	17.0	150.4	30	80.0	150.4	30	80.0	150.4	30
1202122	28.2	152.1	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

ALL FORECASTS

AVG FORECAST POSIT ERROR	24-HR	48-HR	72-HR	
AVG HEIGHT ANGLE ERROR	21.	55.	0.	0.
AVG INTENSITY MAGNITUDE ERROR	16.	28.	0.	0.
AVG INTENSITY HTAS	0.	5.	0.	0.
NUMBER OF FORECASTS	6	3	0	1

TYPHOON ABBY

MO/JA/HR	BEST TRACK			ANNVING			24 HOUR FORECAST			48 HOUR FORECAST			72 HOUR FORECAST		
	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR	POSIT	WIND	DIR
1129002	6.3	149.0	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1129057	6.0	148.3	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1129122	6.8	147.7	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1129187	6.7	146.9	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130002	6.7	146.3	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130057	6.6	145.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130122	6.5	144.9	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1130187	6.3	144.2	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1201002	6.2	143.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1201057	5.9	142.4	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1201122	5.8	141.0	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1201187	5.7	140.0	30	5.7	151.1	25	22.0	151.1	25	77.0	151.1	25	77.0	151.1	25
1202007	5.8	140.1	30	5.7	150.1	35	13.0	150.1	35	189.0	150.1	35	189.0	150.1	35
1202057	5.9	159.4	30	5.9	159.1	35	42.0	159.1	35	74.5	159.1	35	74.5	159.1	35
1202122	6.0	159.6	30	5.3	159.1	35	30.0	159.1	35	10.0	159.6	30	10.0	159.6	30
1202187	6.1	159.3	45	5.9	158.9	35	24.0	158.9	35	10.0	159.3	45	10.0	159.3	45
1203007	6.3	159.1	45	5.3	159.0	35	10.0	159.0	35	7.0	159.6	35	7.0	159.6	35
1203057	6.5	159.0	40	5.3	159.0	30	12.0	159.0	30	6.7	159.1	35	6.7	159.1	35
1203122	6.8	158.0	40	5.4	159.0	45	25.0	159.0	45	7.5	157.4	35	7.5	157.4	35
1203187	7.3	158.4	40	5.7	158.4	45	34.0	158.4	45	8.0	157.1	30	8.0	157.1	30
1204002	8.1	158.1	45	5.1	158.5	35	12.0	158.5	35	10.0	158.1	45	10.0	158.1	45
1204057	8.2	157.4	45	5.0	157.7	35	4.0	157.7	35	10.0	157.3	45	10.0	157.3	45
1204122	8.2	156.4	40	5.2	156.1	35	14.0	156.1	35	9.0	151.5	35	9.0	151.5	35
1204187	8.2	155.4	40	5.1	156.0	30	5.0	156.0	30	9.0	150.4	30	9.0	150.4	30
1205007	8.2	155.1	40	5.3	153.8	30	7.0	153.8	30	10.0	149.2	30	10.0	149.2	30
1205057	8.1	154.2	40	5.3	154.4	30	17.0	154.4	30	9.4	150.7	30	9.4	150.7	30
1205122	8.0	153.3	40	7.4	153.2	30	13.0	153.2	30	9.7	149.4	30	9.7	149.4	30
1205187	8.3	152.4	40	7.4	152.0	35	42.0	152.0	35	9.2	147.4	30	9.2	147.4	30
1206007	9.4	151.3	35	4.3	151.4	35	42.0	151.4	35	9.2	147.8	30	9.2	147.8	30
1206057	9.2	151.0	30	5.3	150.9	35	19.0	150.9	35	10.0	147.2	30	10.0	147.2	30
1206122	9.5	149.8	30	4.4	150.3	35	30.0	150.3	35	11.0	147.0	30	11.0	147.0	30
1206187	9.8	148.1	30	4.3	149.1	30	59.0	149.1	30	11.3	146.4	30	11.3	146.4	30
1207007	10.0	146.2	30	10.1	145.5	30	71.0	145.5	30	11.0	139.1	30	11.0	139.1	30
1207057	10.2	145.9	35	10.2	143.2	30	159.0	143.2	30	12.0	138.5	30	12.0	138.5	30
1207122	10.6	145.3	35	10.4	143.0	30	134.0	143.0	30	12.0	137.4	30	12.0	137.4	30
1207187	11.0	144.4	35	11.0	142.0	35	12.0	142.0	35	13.5	140.4	30	13.5	140.4	30
1208007	11.7	144.1	35	11.4	144.4	30	29.0	144.4	30	14.5	140.3	30	14.5	140.3	30
1208057	12.1	143.1	30	11.5	143.0	35	37.0	143.0	35	14.3	141.4	30	14.3	141.4	30
1208122	12.2	142.1	30	12.2	142.1	35	9.0	142.1	35	15.2	129.1	30	15.2	129.1	30
1208187	11.4	140.4	30	12.5	140.0	35	45.0	140.0	35	0.0	0.0	0.0	0.0	0.0	0.0
1209007	11.4	138.9	35	11.4	139.7	30	23.0	139.7	30	11.0	134.4	25	11.0	134.4	25
1209057	11.0	137.4	40	11.3	137.8	30	30.0	137.8	30	10.0	131.7	35	10.0	131.7	35
1209122	10.3	136.0	40	10.4	135.1	45	53.0	135.1	45	10.0	129.1	40	10.0	129.1	40
1209187	10.5	134.7	45	10.0	133.7	45	64.0	133.7	45	9.0	127.7	40	9.0	127.7	40
1210007	11.3	133.3	35	11.1	133.8	40	24.0	133.8	40	12.4	129.7	35	12.4	129.7	35
1210057	11.7	132.3	35	11.7	132.4	40	23.0	132.4	40	13.2	127.5	35	13.2	127.5	35
1211122	12.3	132.1	30	12.1	132.2	40	13.0	132.2	40	13.7	124.4	35	13.7	124.4	35
1211187	13.1	131.7	35	12.4	131.6	40	21.0	131.6	40	14.4	124.1	35	14.4	124.1	35
1211007	14.7	130.4	40	13.7	130.7	40	8.0	130.7	40	15.0	127.3	40	15.0	127.3	40
1211057	14.7	130.1	45	14.7	130.0	40	8.0	130.0	40	16.4	124.4	40	16.4	124.4	40
1211122	15.0	130.1	50	14.7	129.7	40	23.0	129.7	40	16.7	122.3	40	16.7	122.3	40
1211187	15.2	130.2	50	15.4	129.2	40	25.0	129.2	40	24.0	123.0	40	24.0	123.0	40
1212007	16.4	130.3	50	16.3	130.2	40	4.0	130.2	40	20.0	132.4	40	20.0	132.4	40

1212007	17.1	131.0	100	17.4	130.9	100	13	0	21.0	134.1	80	135	450	26.0	147.0	35	276	-5	0.0	0.0	0	-0	0
1212122	18.0	132.0	100	17.9	131.8	95	13	-5	21.8	138.1	80	135	430	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1212182	18.9	133.1	100	18.9	133.2	85	4	-15	23.0	140.1	45	72	435	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1213007	19.8	134.5	110	20.0	134.9	85	25	-25	24.0	143.4	45	135	415	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1213067	20.5	136.2	110	21.1	136.9	80	53	-30	25.0	144.4	35	261	-5	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1213122	21.2	138.1	90	21.4	138.2	100	13	10	24.7	147.2	55	123	24	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1214182	21.8	140.1	80	22.0	140.2	85	13	5	25.4	150.4	45	168	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1214002	22.2	142.4	60	22.3	142.4	70	13	10	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1214062	22.6	144.9	60	22.5	145.0	60	4	20	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1214122	22.7	147.2	30	22.8	147.4	40	8	10	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1214182	22.8	150.3	30	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1215002	23.0	153.0	25	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0

A'L FORECASTS				
	WNG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	31	164	285	378
AVG RIGHT ANGLE ERROR	17	108	193	215
AVG INTENSITY MAGNITUDE ERROR	10	20	30	47
AVG INTENSITY BIAS	2	-2	-1	22
NUMBER OF FORECASTS	52	48	39	25

TROPICAL STORM BEN

HFST TRACK		WARNING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST									
MO/DAY/HR	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND	POSIT	WIND									
1217002	7.0	149.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1217062	7.3	148.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1217122	7.5	147.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1217182	7.7	146.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1218002	8.0	145.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1218062	8.2	143.9	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1218122	8.5	142.7	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1218182	8.7	141.6	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1219002	9.0	140.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1219062	9.4	138.4	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1219122	9.9	137.0	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1219182	10.4	135.5	15	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1220002	10.9	134.0	20	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1220062	11.3	132.5	20	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1220122	11.6	130.0	25	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1220182	11.6	129.2	30	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1221007	11.5	127.4	40	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1221062	11.4	126.0	50	11.5	125.0	50	8	0	12.0	122.1	35	93	415	14.7	119.3	35	109	8	0.0	0.0	0	-0	0
1221122	11.8	124.3	40	11.8	124.4	45	21	5	13.0	121.2	35	115	420	14.1	118.8	35	115	10	0.0	0.0	0	-0	0
1221182	12.2	123.0	40	11.8	122.7	40	30	0	13.7	118.0	35	80	425	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1222002	12.7	121.4	45	12.7	121.0	50	6	5	14.3	117.7	40	130	415	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1222062	13.0	120.4	50	13.0	120.4	40	6	-10	15.4	114.4	35	281	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1222122	13.8	119.4	55	13.7	119.0	50	24	-5	17.7	117.0	35	380	10	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1222182	14.6	119.2	60	14.3	118.2	50	61	-10	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1223002	15.6	119.5	55	15.6	119.4	55	6	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1223062	17.6	121.0	35	16.9	119.0	45	75	10	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0
1223122	19.6	123.4	25	18.4	122.1	25	103	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0	0.0	0.0	0	-0	0

A'L FORECASTS				
	WNG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	34	181	287	0
AVG RIGHT ANGLE ERROR	18	89	15	0
AVG INTENSITY MAGNITUDE ERROR	5	14	5	0
AVG INTENSITY BIAS	-1	-11	5	0
NUMBER OF FORECASTS	10	6	2	0

2. NORTH INDIAN OCEAN CYCLONE TRACK DATA

TC 17-79

NO/DAT/HR	BEST TRACK				WARNING ERRORS				24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				92 HOUR FORECAST			
	POSIT	WIND	POSIT	WIND	POSIT	DST WIND	POSIT	WIND	DST WIND	POSIT	WIND	DST WIND	POSIT	WIND	DST WIND	POSIT	WIND	DST WIND		
050508Z	6.3	00.0	18	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
050514Z	6.4	00.4	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
050520Z	6.5	09.7	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
050602Z	6.6	09.1	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
050608Z	7.0	08.4	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
050614Z	7.5	08.4	30	7.2	07.7	30	45	0.0	8.7	08.4	35	129	-5	10.1	04.5	45	243	-15		
050620Z	7.6	08.0	30	7.4	07.5	30	32	0.0	8.8	08.4	35	148	-10	10.8	04.1	45	252	-15		
050702Z	7.1	07.8	35	7.9	08.0	35	49	0.0	9.4	08.7	45	262	-5	11.2	00.7	55	257	-10		
050708Z	6.7	07.2	35	7.2	07.7	35	42	0.0	9.7	07.4	45	179	-15	10.5	00.2	55	185	-10		
050714Z	6.7	06.4	40	7.6	07.1	40	61	0.0	9.9	07.0	50	222	-10	12.0	09.0	65	247	5		
050720Z	6.4	06.1	45	7.5	06.4	45	72	0.0	9.4	08.4	60	148	0.0	11.6	06.7	70	113	10		
050802Z	5.8	06.0	50	6.2	06.0	50	66	0.0	7.4	08.7	60	189	-5	8.5	00.0	55	315	-10		
050808Z	5.9	06.4	60	5.8	06.0	60	30	0.0	4.9	08.4	65	255	0.0	4.4	00.2	70	470	0		
050814Z	6.5	06.4	60	5.2	05.4	60	98	0.0	4.0	07.4	65	330	5	5.0	79.2	70	511	-5		
050820Z	7.1	06.4	60	5.9	06.7	60	73	0.0	5.7	05.3	65	275	5	6.4	04.0	70	439	-5		
050902Z	7.6	06.3	65	7.3	06.2	65	19	0.0	8.2	04.2	70	181	5	9.0	01.5	65	249	-10		
050908Z	8.2	06.1	65	7.8	05.8	65	30	0.0	9.0	04.1	70	161	0.0	10.3	01.5	65	191	-15		
050914Z	9.2	05.0	60	8.8	05.6	60	30	0.0	10.4	03.5	55	116	-20	11.9	01.2	50	111	-35		
050920Z	10.3	05.3	60	10.4	05.2	60	8	0.0	12.2	02.7	60	42	-15	13.0	00.8	55	70	-30		
051002Z	11.2	04.6	65	10.9	04.3	65	25	0.0	12.3	01.8	60	67	-15	13.0	00.0	101	-20	0.0		
051008Z	11.7	04.2	70	11.6	03.9	75	19	5	12.5	01.4	65	75	5	13.1	79.4	55	132	-25		
051014Z	12.3	03.7	75	12.1	03.4	75	21	0.0	13.2	01.2	65	42	0.0	14.0	79.4	50	120	-10		
051020Z	12.7	03.2	75	12.7	03.4	75	12	0.0	13.7	01.4	65	33	0.0	14.5	79.8	50	178	0.0		
051102Z	13.0	02.7	75	13.1	02.4	80	9	0.0	14.1	00.0	65	25	5	0.0	0.0	0.0	-0.0	0.0		
051108Z	13.4	02.3	80	13.2	02.3	90	12	10	14.2	00.5	105	68	25	0.0	0.0	0.0	-0.0	0.0		
051114Z	13.7	01.7	85	14.2	00.9	95	55	10	16.5	78.2	30	70	-30	0.0	0.0	0.0	-0.0	0.0		
051120Z	14.1	01.2	85	14.1	00.8	95	23	10	16.0	74.5	30	68	-20	0.0	0.0	0.0	-0.0	0.0		
051202Z	14.5	00.8	90	14.4	00.5	90	18	10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051208Z	15.2	00.1	90	14.8	00.5	85	33	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051214Z	16.0	79.3	60	15.2	79.0	60	59	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
051220Z	17.0	78.1	50	17.0	78.1	50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

A1 L FORECASTS

WMNG	24-HR	48-HR	72-HR	
AVG FORECAST POSIT ERROR	76.	139.	233.	348.
AVG HIGH ANGLE ERROR	17.	95.	192.	208.
AVG INTENSITY MAGNITUDE ERROR	2.	9.	13.	12.
AVG INTENSITY BIAS	2.	-5.	-11.	-12.
NUMBER OF FORECASTS	26	22	18	14

TC 18-79

NO/DAT/HR	BEST TRACK				WARNING ERRORS				24 HOUR FORECAST ERRORS				48 HOUR FORECAST				92 HOUR FORECAST			
	POSIT	WIND	POSIT	WIND	POSIT	DST WIND	POSIT	WIND	DST WIND	POSIT	WIND	DST WIND	POSIT	WIND	DST WIND	POSIT	WIND	DST WIND		
061714Z	17.7	66.4	25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
061720Z	17.9	65.5	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
061802Z	18.0	64.4	30	18.3	65.3	40	34	10	19.5	64.4	50	238	0.0	21.5	65.0	60	426	20		
061808Z	18.0	64.0	35	18.4	64.0	40	56	5	19.4	64.1	55	248	5	22.0	64.8	60	482	35		
061814Z	18.2	63.1	40	18.2	63.8	45	40	5	19.4	62.7	55	170	0.0	22.4	63.5	60	445	40		
061820Z	18.2	61.8	45	18.5	62.4	45	38	0.0	19.7	58.3	55	400	5	21.8	58.5	60	100	25		
061902Z	18.0	60.7	50	18.7	61.7	50	70	0.0	20.8	58.4	50	600	10	0.0	0.0	0.0	-0.0	0.0		
061908Z	18.4	59.0	50	18.7	59.0	50	14	0.0	20.7	57.1	40	77	5	0.0	0.0	0.0	-0.0	0.0		
061914Z	18.8	58.4	50	18.5	58.4	50	59	0.0	20.2	54.1	25	115	5	0.0	0.0	0.0	-0.0	0.0		
061920Z	19.1	58.4	50	19.0	58.7	50	29	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
062002Z	19.2	57.4	40	19.4	59.0	50	63	10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
062008Z	19.5	56.4	25	19.8	58.7	45	92	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
062014Z	19.8	56.1	20	20.0	56.8	35	41	15	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
062020Z	20.1	55.7	15	20.5	55.4	25	25	10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

A1 L FORECASTS

WMNG	24-HR	48-HR	72-HR	
AVG FORECAST POSIT ERROR	48.	137.	163.	0.
AVG HIGH ANGLE ERROR	24.	78.	284.	0.
AVG INTENSITY MAGNITUDE ERROR	6.	5.	30.	0.
AVG INTENSITY BIAS	6.	5.	30.	0.
NUMBER OF FORECASTS	12	7	4	0

TC 22-79

BEST TRACK				WARNING ERRORS				24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS			
MO/DA/HR	POSIT	WIND		POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND
0920022	9.1	47.0	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0920082	9.7	47.4	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0920142	10.1	46.4	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0920202	10.4	46.4	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0921022	10.7	46.0	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0921082	11.1	45.4	24	11.0	85.4	25	9.0	0.	12.4	87.4	35	140.	10.	14.2	80.9	40	137.	30	0.0
0921142	11.6	45.2	24	11.0	84.0	25	79.0	0.	12.2	87.4	35	191.	10.	17.1	80.5	40	209.	30	0.0
0921202	12.0	45.0	24	12.1	84.0	25	42.0	0.	13.4	87.0	35	130.	14.	14.6	80.9	40	145.	30	0.0
0922022	14.0	44.7	24	12.5	84.4	30	91.5	5	13.7	87.4	35	140.	14.	0.0	0.0	0.	-0.0	0.	0.0
0922082	14.4	43.0	24	13.5	82.4	30	105.0	10	14.4	81.1	40	121.	30.	0.0	0.0	0.	-0.0	0.	0.0
0922142	15.3	43.1	24	15.0	84.0	30	55.5	5	16.7	81.4	40	64.	30.	0.0	0.0	0.	-0.0	0.	0.0
0922202	15.5	42.2	20	15.6	83.0	30	46.0	10.	18.0	80.2	10	50.	0.	0.0	0.0	0.	-0.0	0.	0.0
0923022	15.9	41.4	20	16.0	82.2	30	46.0	10.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0
0923082	16.5	40.4	10	16.5	81.4	25	34.0	15.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0
0923142	16.6	40.4	10	17.0	80.4	15	29.0	5.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0
0923202	17.1	40.3	10	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0

A/L FORECASTS

	WIND	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	54.	122.	170.	0.
AVG RIGHT ANGLE ERROR	34.	90.	122.	0.
AVG INTENSITY MAGNITUDE ERROR	6.	16.	30.	0.
AVG INTENSITY BIAS	6.	16.	30.	0.
NUMBER OF FORECASTS	10	7	3	0

TC 23-79

BEST TRACK				WARNING ERRORS				24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS			
MO/DA/HR	POSIT	WIND		POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND
0918022	12.2	72.0	15	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0918082	12.5	71.4	15	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0918142	13.0	71.5	15	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0918202	13.4	71.4	15	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0919022	13.8	71.4	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0919082	14.3	71.3	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0919142	14.6	71.0	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0919202	15.0	70.4	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0920022	15.3	70.4	20	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0920082	15.6	70.2	24	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0920142	16.0	49.0	24	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0920202	16.4	49.4	24	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0921022	16.8	49.2	24	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0921082	17.4	48.8	24	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0921142	18.0	48.1	30	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.0	0.0	0.	-0.0
0921202	18.4	47.2	34	19.2	68.0	30	97.	-5	20.1	64.4	40	294.	10.	22.0	68.6	45	449.	5.	24.0
0922022	18.6	46.2	40	18.7	68.7	30	142.	-10	20.2	64.4	40	331.	15.	22.7	68.9	45	510.	10	24.5
0922082	19.0	45.3	44	19.2	65.7	40	26.	-5	20.2	63.4	45	80.	-4.	20.4	61.6	45	119.	15	0.0
0922142	19.3	44.3	44	19.4	64.4	40	25.	-5	19.4	61.3	50	13.	5.	20.5	58.0	0	57.	-30	0.0
0922202	19.6	43.3	50	19.4	63.7	60	25.	10.	20.1	59.7	70	53.	30.	20.9	55.9	20	119.	-5	0.0
0923022	19.7	42.7	54	19.6	62.7	65.	6.	10.	20.4	58.4	60.	73.	25.	0.0	0.0	0.	-0.0	0.	0.0
0923082	19.9	42.0	50	19.4	61.7	65.	14.	15.	20.7	57.4	65.	107.	35.	0.0	0.0	0.	-0.0	0.	0.0
0923142	20.0	41.4	45	20.0	63.4	35.	118.	-10	21.3	64.1	20.	362.	10.	0.0	0.0	0.	-0.0	0.	0.0
0923202	20.2	40.4	40	20.3	60.3	35.	18.	-5	22.1	57.7	20.	120.	-4.	0.0	0.0	0.	-0.0	0.	0.0
0924022	20.3	40.1	34	20.5	59.4	35.	33.	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0
0924082	20.1	49.4	30	20.4	58.4	30.	61.	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0
0924142	19.4	58.4	30	20.3	58.4	25.	37.	-5	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0
0924202	20.0	57.4	24	19.8	58.0	25.	18.	0.	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0
0925022	20.0	46.4	20	20.0	57.4	15.	45.	-5	0.0	0.0	0.	-0.0	0.	0.0	0.0	0.	-0.0	0.	0.0

A/L FORECASTS

	WIND	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	48.	160.	253.	773.
AVG RIGHT ANGLE ERROR	21.	97.	180.	620.
AVG INTENSITY MAGNITUDE ERROR	4.	16.	13.	1.
AVG INTENSITY BIAS	-1.	6.	-1.	-1.
NUMBER OF FORECASTS	14	9	5	2

TC 24-79

BEST TRACK				WARNING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST			
NO/DAY/HR	POSIT	WIND		POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND
102902Z	11.1	90.0	20	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
102908Z	11.7	90.1	20	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
102914Z	12.2	89.6	20	12.5	89.4	20.	21.	0.	16.7	89.0	40.	250.	10.	10.0	91.0	30.	173.	-5.	14.0
102920Z	12.4	89.0	24	13.5	89.0	25.	66.	0.	16.0	88.7	40.	237.	10.	10.0	90.2	30.	179.	-5.	14.0
103002Z	12.4	88.7	24	13.6	88.7	25.	77.	0.	15.4	87.4	35.	192.	5.	17.4	87.5	40.	199.	10.	0.0
103008Z	12.0	87.1	24	12.6	88.2	25.	65.	0.	13.2	86.7	30.	163.	0.	14.1	84.0	35.	205.	15.	0.0
103014Z	13.1	86.2	24	12.5	87.0	25.	105.	0.	12.0	84.4	30.	215.	-4.	14.6	85.1	35.	355.	20.	0.0
103020Z	13.4	85.4	30	13.0	86.4	25.	58.	-5.	14.0	87.4	35.	121.	0.	0.0	0.0	0.	-0.	0.	0.0
103102Z	13.5	84.0	30	13.4	84.4	25.	30.	-5.	15.7	80.4	35.	167.	5.	0.0	0.0	0.	-0.	0.	0.0
103108Z	13.4	83.0	30	13.8	83.4	30.	33.	0.	15.8	80.1	25.	197.	5.	0.0	0.0	0.	-0.	0.	0.0
103114Z	13.0	82.0	35	13.0	82.0	30.	54.	-5.	15.1	79.7	20.	143.	5.	0.0	0.0	0.	-0.	0.	0.0
103120Z	12.7	81.0	35	13.8	82.4	30.	72.	-5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0
110102Z	12.5	80.0	30	12.7	81.0	30.	13.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0
110108Z	12.5	80.1	20	12.7	79.0	20.	17.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0
110114Z	12.7	79.7	15	12.7	79.6	15.	17.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0

AIR FORECASTS

WIND	24-HR	48-HR	72-HR
48.	190.	482.	1074.
26.	142.	332.	907.
2.	6.	11.	0.
-2.	4.	7.	0.
NUMBER OF FORECASTS	13	3	5

AVG FORECAST POSIT ERROR  
 AVG RIGHT ANGLE ERROR  
 AVG INTENSITY MAGNITUDE ERROR  
 AVG INTENSITY BIAS  
 NUMBER OF FORECASTS

TC 25-79

BEST TRACK				WARNING				24 HOUR FORECAST				48 HOUR FORECAST				72 HOUR FORECAST			
NO/DAY/HR	POSIT	WIND		POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND
111402Z	12.3	70.1	20	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111408Z	12.8	70.0	20	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111414Z	13.0	69.0	20	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111420Z	13.3	69.0	20	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111502Z	13.6	69.0	20	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111508Z	13.9	69.0	25	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111514Z	14.2	69.0	30	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111520Z	14.6	69.0	30	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.	0.0	0.0	0.	-0.
111602Z	15.0	69.0	35	15.0	70.0	40.	6.	5.	17.0	70.7	45.	72.	5.	10.5	71.4	60.	121.	45.	0.0
111608Z	15.6	70.0	40	14.6	69.7	40.	62.	0.	15.4	69.0	45.	191.	10.	0.0	0.0	0.	-0.	0.	0.0
111614Z	16.4	70.7	40	14.6	69.7	40.	111.	0.	15.4	69.0	45.	239.	15.	0.0	0.0	0.	-0.	0.	0.0
111620Z	17.3	70.6	40	17.3	70.6	40.	23.	0.	20.2	74.7	0.	252.	25.	0.0	0.0	0.	-0.	0.	0.0
111702Z	18.2	70.7	40	18.1	71.4	40.	74.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0
111708Z	18.8	70.1	35	17.9	71.0	35.	115.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0
111714Z	19.6	70.1	30	19.7	70.1	30.	0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0
111720Z	20.3	70.7	25	20.3	70.7	25.	0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0
111802Z	21.3	70.6	15	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0

AIR FORECASTS

WIND	24-HR	48-HR	72-HR
50.	189.	121.	0.
26.	103.	73.	0.
1.	14.	45.	0.
1.	1.	45.	0.
NUMBER OF FORECASTS	9	4	1

AVG FORECAST POSIT ERROR  
 AVG RIGHT ANGLE ERROR  
 AVG INTENSITY MAGNITUDE ERROR  
 AVG INTENSITY BIAS  
 NUMBER OF FORECASTS

NO/DA/HA	BEST TRACK			WARNING ERRORS			24 HOUR FORECAST ERRORS				48 HOUR FORECAST ERRORS				72 HOUR FORECAST ERRORS								
	POSIT	WIND		POSIT	WIND	DST WIND	POSIT	WIND	USI	WIND	POSIT	WIND	DST	WIND	POSIT	WIND	DST	WIND					
112014Z	8.0	94.2	14	0.0	0.0	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.		
112027	8.0	93.4	14	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112102Z	9.7	92.4	14	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112108Z	10.4	92.4	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112114Z	10.7	91.9	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112120Z	10.8	91.7	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112202Z	10.9	91.4	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112208Z	10.8	90.9	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112214Z	10.7	90.0	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112220Z	10.5	89.7	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112302Z	10.4	87.4	20	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112308Z	10.6	86.5	25	10.0	88.0	25.	95.	0.	10.7	84.4	30.	170.	0.	11.4	81.8	35.	162.	10.	0.0	0.0	0.	-0.	0.
112314Z	10.7	85.4	25	10.3	87.1	30.	103.	5.	11.7	84.0	35.	159.	5.	12.0	80.9	35.	145.	20.	0.0	0.0	0.	-0.	0.
112320Z	10.7	84.3	30	10.6	84.0	35.	19.	5.	11.8	80.4	45.	30.	20.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112402Z	10.6	83.0	30	11.0	82.5	35.	38.	5.	12.2	74.4	25.	124.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112408Z	10.8	82.0	30	10.6	81.4	35.	17.	5.	11.7	77.0	20.	256.	-5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112414Z	11.4	81.3	30	11.0	80.4	35.	47.	5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112420Z	12.2	80.9	25	11.9	79.4	30.	74.	5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112502Z	12.9	80.4	25	11.9	79.4	30.	92.	5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112508Z	13.8	80.5	25	13.8	80.0	25.	29.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.
112514Z	14.5	79.7	14	14.5	79.4	20.	4.	5.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.	0.0	0.0	0.	-0.	0.

	ALL FORECASTS			
	MMG	24-HR	48-HR	72-HR
AVG FORECAST POSIT ERROR	42.	14.8	103.	0.
AVG RIGHT ANGLE ERROR	21.	13.	21.	0.
AVG INTENSITY MAGNITUDE ERROR	4.	6.	15.	0.
AVG INTENSITY bias	4.	4.	15.	0.
NUMBER OF FORECASTS	10	5	2	0

ANNEX B TROPICAL CYCLONE FIX DATA

I. WESTERN NORTH PACIFIC CYCLONE FIX DATA

NOTICE - THE ASTERISKS (\*) INDICATE FIXES UNREPRESENTATIVE AND NOT USED FOR BEST TRACK PURPOSES.

TYPHOON ALICE

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCR	UNPAK CODE	SATELLITE	COMMENTS	SITE
*	1	310900	1.3N 172.7E	PCN 6			PGTW
	2	011236	1.9N 170.5E	PCN 6			PGTW
	3	011419	1.8N 167.3E	PCN 6			KGWC
	4	012151	4.9N 166.0E	PCN 6	T2.5/2.5	INIT JMS	PGTW
	5	012336	4.6N 165.5E	PCN 6	T2.0/2.0	INIT JMS	KGWC
	6	020351	4.5N 167.5E			GNFS3	PHIK
	7	020901	4.0N 167.0E	PCN 6			PGTW
	8	021218	5.3N 167.0E	PCN 6			PGTW
	9	021400	4.9N 167.4E	PCN 6			KGWC
	10	022133	7.0N 167.7E	PCN 6	T2.0/2.0 /50.0/24HRC		PGTW
	11	022318	6.5N 167.3E	PCN 2			KGWC
	12	020741	4.5N 168.0E	PCN 6			PGTW
	13	031200	4.9N 168.3E	PCN 6	T3.5/3.5 /01.0/20HRC		KGWC
	14	031440	4.4N 169.1E	PCN 6			PHIK
	15	032116	9.2N 168.0E	PCN 6	T3.0/3.0 /01.0/24HRC		PGTW
	16	032150	9.5N 168.0E			GNFS3	PHIK
	17	040042	9.3N 167.0E	PCN 5			PGTW
	18	040350	9.9N 167.1E			GNFS3	PHIK
	19	040957	9.6N 167.4E	PCN 6			PGTW
	20	042002	9.6N 165.6E	PCN 4			PGTW
	21	042058	9.5N 165.5E	PCN 4	T3.5/3.5 /00.5/24HRC		PGTW
	22	040024	9.5N 165.0E	PCN 3			PGTW
	23	050350	9.3N 164.5E			GNFS3	PHIK
	24	050939	10.1N 163.7E	PCN 6			PGTW
	25	051305	10.4N 163.6E	PCN 4			PGTW
	26	051443	11.7N 162.4E	PCN 4	T4.0/4.0 /00.5/23HRC		PGTW
	27	060006	11.1N 161.7E	PCN 1			PGTW
	28	060923	11.8N 160.0E	PCN 2			PGTW
	29	060922	11.3N 159.7E	PCN 2			PGTW
	30	061247	12.2N 159.2E	PCN 2			PGTW
	31	061923	12.4N 158.1E	PCN 1			PGTW
	32	062205	12.5N 157.9E	PCN 1	T5.0/5.0 /01.0/24HRC		PGTW
	33	062348	12.4N 157.4E	PCN 2			PGTW
	34	070350	12.6N 157.0E			GNFS3	PHIK
	35	070804	12.3N 156.3E	PCN 2		CI UP	PGTW
	36	071013	12.5N 156.8E			GNFS3	PHIK
	37	071047	12.4N 156.7E	PCN 2			PGTW
	38	071230	12.4N 156.3E	PCN 2			PGTW
	39	072147	12.2N 157.2E	PCN 1	T6.0/6.0 /01.0/24HRC		PGTW
	40	080112	12.2N 152.5E	PCN 1			PGTW
	41	080926	12.0N 151.2E	PCN 5			PGTW
	42	080926	12.0N 152.1E	PCN 6		INIT JMS	RDDN
	43	081029	12.0N 151.0E	PCN 5			PGTW
	44	081353	11.9N 150.1E	PCN 2			PGTW
	45	082025	11.3N 148.6E	PCN 5			PGTW
	46	080854	11.3N 147.5E	PCN 4	T4.5/5.5 /01.5/27HRC		PGTW
	47	080906	12.3N 145.7E	PCN 6			PGTW
	48	091011	12.3N 145.7E	PCN 6			PGTW
	49	091325	12.0N 145.2E	PCN 6			PGTW
	50	092254	11.3N 147.3E	PCN 1	T3.5/4.5 /01.0/23HRC		PGTW
	51	100217	12.0N 142.6E	PCN 1			PGTW
	52	100946	12.4N 140.7E	PCN 6			RDDN
	53	100946	12.2N 140.9E	PCN 6			PGTW
	54	101136	12.2N 140.4E	PCN 1			PGTW
	55	101317	12.2N 140.1E	PCN 2			PGTW
	56	102127	12.3N 139.3E	PCN 1	T4.0/4.5 /00.5/19HRC		RPNK
	57	102127	12.3N 139.3E	PCN 2	T3.5/3.5 /50.0/23HRC		PGTW
	58	102236	12.3N 139.1E	PCN 2			PGTW
	59	110159	12.7N 138.7E	PCN 1			PGTW
	60	111008	12.7N 138.0E	PCN 1			RDDN
	61	111008	13.0N 138.0E	PCN 1		CI UP	PGTW
	62	111118	13.0N 137.8E	PCN 2			PGTW
	63	111441	13.3N 137.7E	PCN 1			PGTW
	64	112107	13.4N 137.5E	PCN 2			PGTW
	65	112108	13.7N 137.4E	PCN 2			RDDN
	66	112218	13.4N 137.1E	PCN 2	T3.5/3.5 /50.0/25HRC		PGTW
	67	120141	14.0N 137.1E	PCN 1	T4.0/4.0 /50.0/24HRC		RPNK
	68	120141	13.3N 137.1E	PCN 1			PGTW
	69	120948	15.2N 136.6E	PCN 6			RPNK
	70	120949	14.9N 136.3E	PCN 6			PGTW
	71	121100	15.0N 136.2E	PCN 6			PGTW
	72	121423	15.1N 136.4E	PCN 4			PGTW
	73	122048	15.4N 136.6E	PCN 5			PGTW
	74	122343	15.4N 136.7E	PCN 3	T3.5/3.5 /50.0/24HRC		PGTW
	*	75	130928	16.7N 137.5E	PCN 4		PGTW
	*	76	130929	16.7N 137.6E	PCN 2		RDDN
	*	77	131042	16.4N 137.7E	PCN 6		PGTW
	*	78	131405	14.3N 137.4E	PCN 6		PGTW

79	142028	14.24	140.1E	PCN 6	DWSPRT	RODN
80	142028	14.14	134.1E	PCN 6	DWSPRT	PGTW
81	142325	14.14	134.4E	PCN 5	72.0/3.0 /W1.5/24HRC	PGTW
82	140185	14.04	134.4E	PCN 3	DWSPRT	PGTW
83	140909	14.44	140.7E	PCN 6	DWSPRT	RODN
84	140909	14.24	134.4E	PCN 6	DWSPRT	PGTW
85	142307	17.14	137.1E	PCN 3	71.0/2.0 /W1.0/24HRC	PGTW

AIRORAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	70043 HGT	085 MSLP	MAX-RFC-WND VEL/RRG/RWD	MAX-FLT-LVL-WND DIR/VEL/DRG/WND	ACFTY NAV/MET	EYE SHAPE	EYE ORIEN- DIAW/TATION	EYE TEMP (F) DIR/ IN/ DP/CLT	WSR NO.	
1	020115	5.74	16A.5E	1500FT	986	65 180 35	220 72 140 35	5 2			+25 +25 +25	1	
2	021520	4.54	167.6E	700MM	994A	984	060 60 290 30	12 5			+12 +15 +11	2	
3	020853	7.24	16A.0E	700MM	297A		55 120 15 210	60 120 24			+15 + 8	3	
4	020310	7.74	16A.3E	700MM	293A	982	45 060 40 140	52 060 35	2 2		+13 +15 +10	3	
5	040210	4.34	167.4E	700MM	2942	983	55 310 45 040	53 310 45	2 4		+13 +17 + 8	6	
6	041523	4.54	16A.2E	700MM	2931	983	110 54 200 40	4 5			+11 +11 +11	7	
7	041302	10.34	167.3E	700MM	2807	972	130 74 040 30				+16 +14	10	
8	041423	10.44	167.1E	700MM	2825	969	100 79 100 20	10 3	CIRCULAR	35	+13 +15 +13	11	
9	040259	11.54	161.0E	700MM	2807	968	95 340 14 100	70 340 20	4 4	ELLIPTICAL	30 20 010	+10 +16 +10	11
10	041213	12.14	154.2E	700MM	2763	963	120 87 030 27				+17 +11	12	
11	041427	12.24	154.0E	700MM	2762	961	060 88 300 10	4 5	ELLIPTICAL	25 15 030	+12 +16 +13	12	
12	070008	12.34	157.6E	700MM	2674			4 4				13	
13	070256	12.44	157.0E	700MM	2645	949	80 010 20 170	102 040 20	4 4	CIRCULAR	27	+14 +18 +13	13
14	071407	12.54	154.7E	700MM	2541	937	170 96 090 24	15 4	CIRCULAR	17	+13 +18 +11	14	
15	071820	12.24	154.2E	700MM	2470	930	070 126 010 14				+21 +10	14	
16	072040	12.24	157.9E	700MM	2477	928	100 330 5 040	105 360 15	14 2	CIRCULAR	15	+15 +24 +10	14
17	080010	12.24	157.0E	700MM	2544	938	100 170 170	115 140 10			+22 +12	15	
18	080247	12.14	152.4E	700MM	2537	935	130 060 20 140	115 060 10	4 4	CIRCULAR	15	+13 +20 +12	15
19	081302	12.24	144.0E	700MM	2690	954	120 60 090 30				+24 + 8	16	
20	041508	11.94	144.6E	700MM	2743	957	060 80 360 21	7 4	ELLIPTICAL	25 15 020	+ 9 +23 + 8	16	
21	042219	11.94	144.1E	700MM	2773	944	110 250 10 320	30 270 60	4 4	CIRCULAR	30	+12 +23 +13	17
22	040202	11.94	147.4E	700MM	2771	964	30 180 10 030	75 300 10	4 4	CIRCULAR	30	+11 +23 +10	17
23	040801	12.14	144.6E	700MM	2845		95 210 130	107 050 14			+23 + 9	18	
24	040840	12.14	144.1E	700MM	2857	974	000 94 230 20		4 4		+18 +22 +10	18	
25	041434	12.14	144.4E	700MM	2840	973	140 90 040 18	2 4	CIRCULAR	35	+12 +18 +11	19	
26	042054	11.74	147.6E	700MM	2842	970	60 030 50 110	87 030 30	4 4	ELLIPTICAL	25 16 040	+12 +15 +10	20
27	100445	12.24	141.4E	700MM	2804	965	65 090 20 150	99 090 10	4 2	CIRCULAR	10	+13 +18	21
28	101742	12.34	139.2E	700MM	2684	953	350 86 280 14	4 4	CIRCULAR	17	+12 +13 +14	23	
29	102105	12.34	139.2E	700MM	2644	949	060 90 330 30				+20 +13	23	
30	102110	12.54	134.5E	700MM	2604	943	45 360 15 100	105 010 30	4 4	CIRCULAR	13	+12 +21 +12	23
31	111245	11.34	137.6E	700MM	2597		100 80 100 15				+15 + 5	24	
32	111530	13.34	137.3E	700MM	2563	938	000 85 340 14	10 5	CIRCULAR	10	+12 +21 + 6	24	
33	120104	13.94	137.1E	700MM	2673		120 150 8 220	110 150 14			+21 +10	24	
34	120254	14.04	137.0E	700MM	2625	946	120 150 8 220	110 150 14	4 3	CIRCULAR	12	+11 +22 +11	25
35	121459	14.44	134.5E	700MM	2789	965	130 84 050 4	4 5	CIRCULAR	10	+10 +16 +11	26	
36	121504	15.14	134.5E	700MM	2784	963	120 90 090 2					26	
37	120213	15.24	134.7E	700MM	2781	961	100 83 360 7	10 3	CIRCULAR	13	+11 +17 +11	26	
38	120028	15.44	134.4E	700MM	2859		40 030 35 110	65 030 10			+23	27	
39	130253	15.74	134.7E	700MM	2425	977	55 090 15 090	40 340 60	4 2	CIRCULAR	10	+12 +18	27
40	131226	16.14	137.2E	700MM	2459	985	170 67 100 20				+10 +10	28	
41	141517	16.34	137.2E	700MM	2017	989	040 57 260 30	4 4			+13 +20 +10	28	
42	140004	14.54	134.7E	700MM	2124	1005	50 330 20 140	45 040 60			+18 + 7	29	
43	140308	14.14	134.2E	700MM	2145		30 150 30 140	35 340 90	4 5		+14 +15 + 4	29	

RAJAR FIXES

FIX NO.	TIME (Z)	FIX POSITION	RAJAR	ACFTY	EYE SHAPE	EYE DIAW	RAJAR-CODE	COMMENTS	RAJAR POSITION	CLT WIND NO.
1	020330	7.74	16A.2E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
2	020620	4.44	16A.0E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
3	020730	4.24	16A.2E	LAND	FAIR			PERL FVF	8.74 167.7E	01346
4	020830	4.34	16A.2E	LAND	FAIR			PERL CNTN	8.74 167.7E	01346
5	020930	4.54	16A.2E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
6	021130	4.64	16A.2E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
7	022230	4.14	167.7E	LAND	FAIR			PERL CNTN	8.74 167.7E	01346
8	040130	4.34	167.4E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
9	040630	4.44	167.6E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
10	040730	4.44	167.4E	LAND	GOOD			PERL FVF	8.74 167.7E	01346
11	040900	4.44	167.5E	LAND	GOOD			PERL FVF	8.74 167.7E	01346
12	040830	4.54	167.9E	LAND	GOOD			PERL FVF	8.74 167.7E	01346
13	040900	4.44	167.2E	LAND	GOOD			PERL FVF	8.74 167.7E	01346
14	040930	4.54	167.1E	LAND	FAIR			PERL FVF	8.74 167.7E	01346
15	041000	4.54	167.1E	LAND	FAIR			PERL FVF	8.74 167.7E	01346
16	041100	4.54	16A.4E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
17	041130	4.54	16A.4E	LAND	PAOR			PERL CNTN	8.74 167.7E	01346
18	040635	12.34	14A.4E	LAND	PAJR			PERL CNTN	13.04 144.9E	01218
19	040510	12.34	14A.7E	LAND	PAUR			PERL CNTN	13.04 144.9E	01218
20	040535	12.34	14A.7E	LAND	PAUR			PERL CNTN	13.04 144.9E	01218
21	040610	12.34	14A.5E	LAND	PAUR			PERL CNTN	13.04 144.9E	01218



22	000535	12.74	144.4E	LAND	POOR
23	000705	12.74	144.3E	LAND	POOR
24	000735	12.74	144.2E	LAND	POOR
25	000805	12.64	144.2E	LAND	POOR
26	000935	12.74	144.8E	LAND	FAIR
27	000910	12.74	144.8E	LAND	POOR
28	000935	12.64	144.7E	LAND	FAIR
29	001010	12.64	144.7E	LAND	POOR
30	001035	12.74	144.7E	LAND	FAIR
31	001105	12.64	144.5E	LAND	FAIR
32	001135	12.74	144.3E	LAND	FAIR
33	001205	12.74	144.3E	LAND	GOOD
34	001235	12.74	144.2E	LAND	FAIR
35	001310	12.74	144.0E	LAND	GOOD
36	001335	12.74	144.9E	LAND	GOOD
37	001410	12.74	144.8E	LAND	FAIR
38	001435	12.64	144.7E	LAND	FAIR
39	001510	12.64	144.7E	LAND	FAIR
40	001535	12.64	144.6E	LAND	FAIR
41	001510	12.64	144.5E	LAND	FAIR
42	001635	12.74	144.4E	LAND	FAIR

28  
28

WALL CLN VSBL SW-N	13.0M	144.9E	Q1210
WALL CLN VSBL SW-NNE	13.0M	144.9E	Q1210
WALL CLN VSBL SW-W	13.0M	144.9E	Q1210
WALL CLN VSBL SW-WNW	13.0M	144.9E	Q1210
WALL CLN SW-NNE	13.0M	144.9E	Q1210
WALL CLN SW-N	13.0M	144.9E	Q1210
WALL CLN SW-N-NNE	13.0M	144.9E	Q1210
WALL CLN S-NNE-NE	13.0M	144.9E	Q1210
WALL CLN S-N	13.0M	144.9E	Q1210
WALL S-NNE	13.0M	144.9E	Q1210
WALL S-NW	13.0M	144.9E	Q1210
GOOD CLR WALL CLN OPEN E-SW	13.0M	144.9E	Q1210
GOOD CLR WALL CLN OPEN ENE-S-SW	13.0M	144.9E	Q1210
HVY ATTENUATION	13.0M	144.9E	Q1210
HVY ATTENUATION	13.0M	144.9E	Q1210
HVY ATTENUATION	13.0M	144.9E	Q1210
HVY ATTENUATION	13.0M	144.9E	Q1210
HVY ATTENUATION	13.0M	144.9E	Q1210

TYPHOON AREA

SATELLITE FIXES

FIA NO.	TIME (Z)	FIX POSITION	ACRY	ORBITAL CODE	SATELLITE	COMMENTS	SITE
1	141103	20.0N 144.5E	PCN 5		DMS03A		PGTW
2	140043	20.0N 144.0E	PCN 6	T0.0/0.0	DMS03A	INII JDS	PGTW
3	142315	10.0N 144.0E	PCN 6	T1.5/1.5 /01.5/23HRC	DMS03A		PGTW
4	141157	10.5N 142.5E	PCN 6		DMS03A		PGTW
5	141306	10.5N 143.0E	PCN 6		DMS03A		PGTW
6	142103	10.5N 142.0E	PCN 6	T2.5/2.5 /01.0/23HRC	DMS037		PGTW
7	142258	10.5N 142.1E	PCN 5		DMS03A		PGTW
8	200108	10.5N 141.2E	PCN 5		DMS03A		PGTW
9	200148	11.2N 142.2E	PCN 5	T1.5/1.5	DMS03A	INII JDS	RPMK
10	200943	10.5N 140.1E	PCN 6		DMS037		PGTW
11	201140	10.5N 139.0E	PCN 5		DMS03A		PGTW
12	201430	11.2N 139.0E	PCN 5		DMS03A		PGTW
13	202043	11.0N 139.0E	PCN 6		DMS03A		PGTW
14	202240	11.0N 139.0E	PCN 5	T3.5/3.5 /01.0/24HRC	DMS03A		PGTW
15	210130	11.3N 139.0E	PCN 4		DMS03A		PGTW
16	210130	11.3N 139.0E	PCN 5	T4.5/2.5 /01.0/24HRC	DMS03A		RPMK
17	210923	12.5N 137.0E	PCN 4		DMS037		PGTW
18	210924	12.5N 137.3E	PCN 4		DMS037		RDMN
19	211122	12.7N 137.3E	PCN 4		DMS03A		PGTW
20	211411	13.3N 136.7E	PCN 3		DMS03A		PGTW
21	212043	11.3N 138.7E	PCN 6		DMS037		WDMN
22	220004	13.4N 134.0E	PCN 4	T4.0/4.0 /00.5/25HRC	DMS03A		PGTW
23	220172	11.3N 134.0E	PCN 4		DMS03A		PGTW
24	220112	13.3N 134.3E	PCN 5	T3.5/3.5	DMS03A	INII JDS	RDMN
25	221104	14.4N 136.0E	PCN 1		DMS03A		PGTW
26	221353	15.0N 135.1E	PCN 5		DMS03A		PGTW
27	221353	15.0N 135.2E	PCN 5		DMS03A		PGTW
28	222144	15.4N 134.9E	PCN 2	T4.0/4.0 /50.0/22HRC	DMS037		PGTW
29	222346	16.0N 134.0E	PCN 1		DMS03A		PGTW
30	230235	16.5N 134.0E	PCN 1		DMS03A		PGTW
31	230235	16.3N 134.1E	PCN 1	T4.0/4.0	DMS03A	INII JDS	PGTW
32	231025	17.5N 134.7E	PCN 1		DMS037		PGTW
33	231228	17.3N 134.0E	PCN 1		DMS03A		PGTW
34	231228	18.1N 134.3E	PCN 1		DMS03A		RKSD
35	231517	17.3N 134.4E	PCN 1		DMS03A		RPMK
36	231517	18.1N 144.0E	PCN 2		DMS03A		PGTW
37	232125	18.1N 137.7E	PCN 1	T3.5/4.0 /40.5/24HRC	DMS037		PGTW
38	232328	18.3N 137.4E	PCN 4		DMS03A		PGTW
39	240216	19.0N 138.5E	PCN 5		DMS03A		PGTW
40	240217	19.7N 139.0E	PCN 5	T3.0/4.0 /42.0/24HRC	DMS03A		RPMK
41	240217	19.0N 138.5E	PCN 5	T3.0/3.0	DMS03A	INII JDS	RKSD
42	241005	20.2N 140.1E	PCN 5		DMS037	CI JDS	PGTW
43	241005	20.3N 140.0E	PCN 5		DMS037		RKSD
44	241210	21.3N 140.0E	PCN 5		DMS03A		PGTW
45	241317	21.5N 141.3E	PCN 6		DMS03A		PGTW
46	242104	23.7N 141.0E	PCN 5	T1.5/2.5 /42.0/24HRC	DMS037		PGTW
47	242105	23.2N 141.1E	PCN 5	T1.5/2.5 /41.5/14HRC	DMS037		RKSD

ATCRAFT FIXES

FIA NO.	TIME (Z)	FIX POSITION	FLT LVL	70044 HGT	705 NSLP	MAX-SFC-WND VEL/4RG/4WG	MAX-FLT-LVL-WND DIR/VEL/DRG/4MC	ACRY NAV/MT	EYE SHAPE	EYE ORIEN- DION/TATION	TYF TEMP (C) DIR/ INV DP/ST	45M 40.
1	200204	10.5N 141.1E	1500F1		1005	35 700	40 040	50 300 40	2 4		074 025 023 05	1
2	200330	10.7N 140.0E	700MM									1
3	200855	10.4N 140.3E	700MM	3084	1001	30 050	50 130	30 050 124	4 10		017 012	2
4	201200	10.4N 140.0E	700MM	3101	1002	30	240	23 160 64	4 10			2
5	201433	10.3N 140.0E	700MM	3099	1004	30	240	32 310 30	4 11		014 011 011	4
6	201813	11.3N 138.5E	700MM	3133	994	35 140	40 070	46 340 54	4 4		011 011 011	5
7	211300	13.1N 134.1E	700MM	2970	987		170	61 080 30	2 4	CIRCULAR	014 013 012	4
8	211744	11.3N 134.0E	700MM	2945	984							5
9	212006	11.3N 134.0E	700MM	2922	981		220	63 150 40	10 4	CIRCULAR	014 014 011	5
10	220920	16.4N 134.0E	700MM	2819	969	75 090	70 140	40 130 60	2 2	ELLIPTICAL	010 30 360	7
11	230025	14.2N 134.0E	700MM	2764	963	55 130	45 200	49 140 30	2 2	CIRCULAR	011 020 0 0	8
12	230607	17.1N 134.2E	700MM	2731	959	80 120	15 070	78 340 24	4 2	CIRCULAR	014 019 0 4	4
13	230835	17.6N 134.4E	700MM	2747	961	70 140	10 200	128 140 15	4 2	CIRCULAR	014 021	4
14	231942	14.4N 134.9E	700MM	2641	977		140	63 130 20				10
15	232122	14.1N 137.3E	700MM	2867	974	120 270	15 230	110 230	4 7	CIRCULAR	014 024 0 4	10
16	240816	20.4N 134.2E	700MM	2994	989	110 110	15 200	120 100	14 2 4			11
17	240954	20.4N 134.0E	700MM	2990	990	100 110	10 200	86 170	10 2 10		0 4 015 010	11

RAJAW FIXES

FIA NO.	TIME (Z)	FIX POSITION	MADAR	ACRY	EYE SHAPE	EYE DIR	RAJAW-COUE ARJAW TDUFF	COMMENTS	MADAR POSITION	STP AND NO.
1	211200	12.7N 134.9E	SHIP	0700				MVGS NW AT 6 ANOTS	13.1N 137.3E	4444

TYPHOON CECIL

RADEII (1) FIAES

FIA NO.	TIME (Z)	FIX POSITION	ACRY	DRIFR CODE	SATELLITE	COMMENTS	STL
1	092225	7.0N 147.0E	PCV 5	T0.0/0.0	DMR01A	INIT J05	PGTW
2	092340	7.0N 147.0E	PCV 6	T0.0/0.0 /50.0/24HRC	DMR01A		PGTW
3	092331	7.0N 147.0E	PCV 6	T1.0/1.0 /01.0/24HRC	DMR01A		PGTW
4	101212	7.0N 146.0E	PCV 6		DMR01A		PGTW
5	102316	7.0N 139.0E	PCV 5	T1.5/1.5 /00.5/24HRC	DMR01A		PGTW
6	110910	7.0N 136.0E	PCV 6		DMR01A		PGTW
7	110911	7.0N 136.0E	PCV 6		DMR01A		PGTW
8	111155	7.0N 136.0E	PCV 6		DMR01A	INIT J05 STORM ON EDGE OF DATA	ROUN
9	111636	7.0N 136.0E	PCV 6		DMR01A		PGTW
10	111636	7.0N 136.0E	PCV 6		DMR01A		PGTW
11	112151	7.0N 137.0E	PCV 5	T3.0/3.0 /01.5/24HRC	DMR01A	INIT J05	PGTW
12	112256	7.0N 137.0E	PCV 5		DMR01A		PGTW
13	120136	7.0N 136.0E	PCV 5	T3.0/3.0	DMR01A	INIT J05	ROUN
14	120136	7.0N 136.0E	PCV 5		DMR01A		PGTW
15	120136	7.0N 136.0E	PCV 5	T3.0/3.0	DMR01A	INIT J05	PGTW
16	121616	7.0N 136.0E	PCV 5		DMR01A		PGTW
17	121616	7.0N 136.0E	PCV 5		DMR01A		ROUN
18	122131	7.0N 136.0E	PCV 5	T3.0/3.0 /50.0/24HRC	DMR01A		PGTW
19	130020	7.0N 136.0E	PCV 5		DMR01A		PGTW
20	130250	7.0N 136.0E	PCV 5		DMR01A		PGTW
21	131011	7.0N 136.0E	PCV 6		DMR01A		PGTW
22	131114	7.0N 136.0E	PCV 6		DMR01A		PGTW
23	131307	7.0N 136.0E	PCV 6		DMR01A		PGTW
24	131359	7.0N 136.0E	PCV 6		DMR01A		ROUN
25	131358	7.0N 136.0E	PCV 6		DMR01A		PGTW
26	132111	7.0N 136.0E	PCV 5		DMR01A		PGTW
27	140002	7.0N 131.0E	PCV 5	T3.5/3.5 /00.5/24HRC	DMR01A		PGTW
28	140239	7.0N 131.0E	PCV 5	T4.0/4.0	DMR01A	INIT J05	ROUN
29	140239	7.0N 131.0E	PCV 5		DMR01A		PGTW
30	140239	7.0N 131.0E	PCV 5	T3.5/3.5	DMR01A	INIT J05	PGTW
31	140952	7.0N 129.0E	PCV 6		DMR01A		PGTW
32	141243	7.0N 129.0E	PCV 6		DMR01A		PGTW
33	141520	7.0N 129.0E	PCV 6		DMR01A		PGTW
34	141521	7.0N 129.0E	PCV 6		DMR01A		ROUN
35	141521	7.0N 129.0E	PCV 6		DMR01A		PGTW
36	142233	7.0N 129.0E	PCV 5	T4.5/4.5 /01.0/24HRC	DMR01A		PGTW
37	142344	7.0N 127.0E	PCV 5		DMR01A		PGTW
38	140221	7.0N 127.0E	PCV 5		DMR01A		PGTW
39	140221	7.0N 127.0E	PCV 5	T4.5/4.5 /01.0/24HRC	DMR01A		PGTW
40	140932	7.0N 126.0E	PCV 5		DMR01A	SPLIT PASS	PGTW
41	141225	7.0N 126.0E	PCV 5		DMR01A		PGTW
42	141502	7.0N 126.0E	PCV 5		DMR01A		PGTW
43	141502	7.0N 126.0E	PCV 5		DMR01A		ROUN
44	142213	7.0N 126.0E	PCV 5	T4.0/4.0 /40.5/24HRC	DMR01A		PGTW
45	142213	7.0N 126.0E	PCV 5	T3.0/3.0 /41.5/24HRC	DMR01A		PGTW
46	140203	7.0N 123.0E	PCV 5	T4.0/4.0	DMR01A	INIT J05	ROUN
47	140203	7.0N 123.0E	PCV 5		DMR01A		PGTW
48	140203	7.0N 123.0E	PCV 5		DMR01A		PGTW
49	141053	7.0N 122.0E	PCV 6		DMR01A		PGTW
50	141053	7.0N 122.0E	PCV 6		DMR01A		ROUN
51	141053	7.0N 122.0E	PCV 6		DMR01A		PGTW
52	141208	7.0N 122.0E	PCV 6		DMR01A		PGTW
53	141644	7.0N 122.0E	PCV 6		DMR01A		ROUN
54	141644	7.0N 122.0E	PCV 6		DMR01A		PGTW
55	142153	7.0N 121.0E	PCV 5	T4.0/4.0 /50.0/24HRC	DMR01A		PGTW
56	142153	7.0N 121.0E	PCV 5	T4.5/4.5 /01.5/24HRC	DMR01A		PGTW
57	170050	7.0N 122.0E	PCV 5	T4.5/4.5 /00.5/24HRC	DMR01A		ROUN
58	170326	7.0N 122.0E	PCV 5		DMR01A		PGTW
59	171033	7.0N 122.0E	PCV 5		DMR01A		PGTW
60	171033	7.0N 122.0E	PCV 5		DMR01A		PGTW
61	171332	7.0N 122.0E	PCV 5		DMR01A		ROUN
62	171426	7.0N 122.0E	PCV 5		DMR01A		PGTW
63	171608	7.0N 122.0E	PCV 5		DMR01A		PGTW
64	171608	7.0N 122.0E	PCV 5		DMR01A		ROUN
65	172133	7.0N 122.0E	PCV 5		DMR01A	N/A UJA TO TERMINATOR	PGTW
66	180032	7.0N 121.0E	PCV 5	T2.5/2.5 /41.5/24HRC	DMR01A		PGTW
67	180308	7.0N 121.0E	PCV 5	T3.0/3.0 /41.5/24HRC	DMR01A		PGTW
68	180308	7.0N 121.0E	PCV 5	T3.0/3.0 /41.5/24HRC	DMR01A		PGTW
69	181013	7.0N 121.0E	PCV 5		DMR01A		PGTW
70	181314	7.0N 121.0E	PCV 5		DMR01A		ROUN
71	181549	7.0N 121.0E	PCV 5		DMR01A		PGTW
72	181549	7.0N 121.0E	PCV 5		DMR01A		PGTW
73	180014	7.0N 126.0E	PCV 5	T3.5/3.5 /01.0/24HRC	DMR01A		PGTW
74	190249	7.0N 126.0E	PCV 5	T3.0/3.0 /50.0/24HRC	DMR01A		PGTW
75	190249	7.0N 126.0E	PCV 5		DMR01A		PGTW
76	190753	7.0N 126.0E	PCV 6		DMR01A	CI 5496	PGTW
77	191531	7.0N 127.0E	PCV 6		DMR01A		ROUN
78	191531	7.0N 127.0E	PCV 6		DMR01A		PGTW
79	192357	7.0N 129.0E	PCV 5	T2.5/2.5	DMR01A	INIT J05	ROUN
80	192357	7.0N 129.0E	PCV 5	T3.0/3.5 /40.5/24HRC	DMR01A		PGTW
81	201933	7.0N 129.0E	PCV 6		DMR01A	CI 004V	PGTW
82	201230	7.0N 134.0E	PCV 6		DMR01A		PGTW
83	201230	7.0N 134.0E	PCV 6		DMR01A		PGTW
84	201513	7.0N 134.0E	PCV 6		DMR01A		PGTW
85	201513	7.0N 134.0E	PCV 6		DMR01A		ROUN
86	201513	7.0N 134.0E	PCV 6		DMR01A		PGTW
87	202330	7.0N 136.0E	PCV 5		DMR01A	EXPUSE ILC SYSTEM DISSTPFR	PGTW

AIRCRAFT FIXES

FIA NO.	TIME (Z)	FIX POSITION	FLT LVL	TOT HGT	DRS MSLP	MAX-SFC-WND VEL/DIR/VRG	MAX-FLT-LVL-WND DIR/VEL/DRG/VRG	ACFTY NAV/RFI	EYE SHAPE	EYE DIEN- JTAG/TATION	BYF TEMP (F) DIR/IN/DP/SET	WSN NO.
1	142353	14.4N 121.7E	700MM		1000	30 290 5	240 30 120 30	4 4			+11 +16 +11	26 3
2	142414	14.4N 121.7E	700MM	3054	995	45 060 10	150 46 090 30	4 1	CIRCULAR	17	+13 +13 + 8	4
3	142428	14.4N 121.7E	700MM	3020	993	45 220 40	110 37 060 20	4 4			+13 +11	5
4	142440	14.4N 121.7E	700MM	3030	995	40 180 30	210 40 180 30	4 4			+13 +16 +12	5
5	142401	14.3N 121.5E	700MM	3034	997	30 130 50	000 64 330 90	4 4	CIRCULAR	40	+14 +17 +10	6
6	142510	14.4N 121.7E	700MM			50 090 5	170 35 060 30	4 2			+15 +12	7
7	142904	14.4N 121.7E	700MM	3084	994	25 140 30	020 61 300 30	2 4			+11 +16 +14	7
8	142213	14.4N 121.7E	700MM	2994	994	40 130 20	100 78 020 24	4 1	CIRCULAR	20	+17 +17 +12	8
9	142520	14.4N 121.7E	700MM	2934	995	38 070 8	000 88 070 8				+18 +11	9
10	142532	14.4N 121.7E	700MM			40 160 10	010 88 330 14	10 10	CIRCULAR	20	+14 +18 +12	9
11	142932	14.4N 121.7E	700MM			130 100 060 24					+15 +12	10
12	142147	14.4N 121.7E	700MM	2965	965	100 230 4	000 96 020 14	4 2	CIRCULAR	17	+11 +15 +11	10
13	142927	14.4N 121.7E	700MM	2960	966	40 150 8	000 90 320 14	2 3	CIRCULAR	20	+13 +21 +10	11
14	142930	14.4N 121.7E	700MM			30 0						12
15	142154	14.4N 121.7E	700MM				020 52 300 10	4 4	CIRCULAR	15	+ 3 + 3	14
16	142344	14.2N 121.5E	700MM	2937	982	40 090 10	070 52 360 20	2 3	CIRCULAR	20	+13 +12	14
17	142547	14.3N 121.6E	700MM			50 090 8	040 50 320 24	2 2	CIRCULAR	20	+11 +11	14
18	142340	14.4N 121.7E	700MM	2974			340 50 090 10	2 2	CIRCULAR	20	+ 4 +10 +10	15
19	142005	14.4N 121.7E	700MM				240 68 160 30	2 3			+11 +10	15
20	142210	14.4N 121.7E	700MM	2977		45 160 4	240 55 240 4	1 1	CIRCULAR	10	+ 7 +13 + 8	15
21	142747	14.4N 121.7E	700MM	3004		55 150 10	240 55 130 15	4 2			+18 +11	16
22	142022	14.4N 121.7E	700MM	2994	990	55 110 10	100 46 110 20	4 5	CIRCULAR	30	+14 +18 +11	16
23	141910	14.4N 121.7E	700MM				200 73 120 30	4 5			+15 + 9	17
24	142129	14.4N 121.7E	700MM	3002	989	35 240 50	300 64 240 30	4 4	CIRCULAR	25	+14 +15 + 9	17
25	142000	14.4N 121.7E	700MM	2994		40 040 15	240 80 180 14	4 4	CIRCULAR	40	+13 + 7	18
26	142921	14.4N 121.7E	700MM	2984	986	35 120 25	240 70 120 24	4 4	CIRCULAR	40	+13 +15 + 5	18
27	141458	14.4N 121.7E	700MM				240 36 350 10				+11 +11	19
28	142030	14.4N 121.7E	700MM				240 80 160 8	10 10	CIRCULAR	30	+14 +11 +11	19
29	200492	14.4N 121.7E	700MM	3000	1004	50 230 25	240 50 140 50	4 4			+12 +11 +11	20

RAJAH FIXES

FIA NO.	TIME (Z)	FIX POSITION	RAJAH	ACFTY	EYE SHAPE	EYE DIAM	RAJAH-CODE ASWAN YDUFF	COMMENTS	NADAR POSITION	DIFF WND NO.
1	142200	14.4N 121.7E	LAND	PH0H	CIRCULAR	19		EYE	15.2N 120.6E	08327
2	142230	14.4N 121.7E	LAND	PH0H	CIRCULAR	19		SPIRAL RAND	15.2N 120.6E	08327
3	142305	14.4N 121.7E	LAND	PH0H	CIRCULAR	19		SPIRAL RAND	15.2N 120.6E	08327
4	142335	14.4N 121.7E	LAND	PH0H	CIRCULAR	19		SPIRAL RAND	15.2N 120.6E	08327
5	170033	14.4N 121.7E	LAND	PH0H	CIRCULAR	17		SPIRAL RAND	15.2N 120.6E	08327
6	170030	14.4N 121.7E	LAND	GR00	CIRCULAR	22		SPIRAL RAND	15.2N 120.6E	08327
7	170055	14.4N 121.7E	LAND	GR00	CIRCULAR	13			15.2N 120.6E	08327
8	170030	14.4N 121.7E	LAND	GR00	CIRCULAR	13		SPIRAL RAND	15.2N 120.6E	08327
9	170503	14.4N 121.7E	LAND	GR00	CIRCULAR	14			15.2N 120.6E	08327
10	170530	14.4N 121.7E	LAND	GR00	CIRCULAR	14		SPIRAL RAND	15.2N 120.6E	08327
11	170700	14.4N 121.7E	LAND	GR00	CIRCULAR	14			15.2N 120.6E	08327
12	170730	14.4N 121.7E	LAND	GR00	ELLIPTICAL	14		EYE ANTK 20/15	15.2N 120.6E	08327
13	170905	14.4N 121.7E	LAND	GR00	CIRCULAR	14			15.2N 120.6E	08327
14	170930	14.4N 121.7E	LAND	FA1H	CIRCULAR	14			15.2N 120.6E	08327
15	171005	14.4N 121.7E	LAND	GR00	CIRCULAR	12			15.2N 120.6E	08327
16	171030	14.4N 121.7E	LAND	GR00	CIRCULAR	12			15.2N 120.6E	08327
17	171100	14.4N 121.7E	LAND				10413 73010		14.1N 123.0E	08440
18	171105	14.4N 121.7E	LAND	GR00	CIRCULAR	14			15.2N 120.6E	08327
19	171130	14.4N 121.7E	LAND	FA1H	CIRCULAR	14		SPIRAL OVERLAY	15.2N 120.6E	08327
20	171200	14.4N 121.7E	LAND				10407 // // //		16.3N 120.6E	08321
21	171205	14.4N 121.7E	LAND	FA1H	CIRCULAR	14		SPIRAL OVERLAY	15.2N 120.6E	08327
22	171230	14.4N 121.7E	LAND	FA1H	CIRCULAR	14		SPIRAL OVERLAY	15.2N 120.6E	08327
23	171305	14.4N 121.7E	LAND	FA1H	CIRCULAR	14		SPIRAL OVERLAY	15.2N 120.6E	08327
24	171330	14.4N 121.7E	LAND	FA1H	CIRCULAR	14		SPIRAL OVERLAY	15.2N 120.6E	08327
25	171405	14.4N 121.7E	LAND	PH0H	CIRCULAR	14		SPIRAL OVERLAY	15.2N 120.6E	08327
26	171430	14.4N 121.7E	LAND	PH0H	CIRCULAR	14		SPIRAL OVERLAY	15.2N 120.6E	08327
27	171500	14.4N 121.7E	LAND	FA1H	CIRCULAR	14			15.2N 120.6E	08327
28	171535	14.4N 121.7E	LAND	FA1H	CIRCULAR	14			15.2N 120.6E	08327
29	171500	14.4N 121.7E	LAND				10417 60104	EYE JAN MEMENT CIRCULAR	16.3N 120.6E	08321
30	171500	14.4N 121.7E	LAND				10413 63010		16.1N 123.0E	08440
31	171505	14.4N 121.7E	LAND	PH0H	CIRCULAR			SPIRAL OVERLAY	15.2N 120.6E	08327
32	171535	14.4N 121.7E	LAND	PH0H	CIRCULAR			SPIRAL OVERLAY	15.2N 120.6E	08327
33	171700	14.4N 121.7E	LAND				10417 50304	EYE TA MEMENT CIRCULAR	16.3N 120.6E	08321
34	171705	14.4N 121.7E	LAND	PH0H	CIRCULAR			SPIRAL OVERLAY	15.2N 120.6E	08327
35	171735	14.4N 121.7E	LAND	PH0H	CIRCULAR			SPIRAL OVERLAY	15.2N 120.6E	08327
36	171900	14.4N 121.7E	LAND				11447 50302	EYE ELLIPTICAL	16.3N 120.6E	08321
37	171900	14.4N 121.7E	LAND				11443 50412	EYE ELLIPTICAL	14.1N 123.0E	08440
38	172000	14.4N 121.7E	LAND				11717 30404	EYE TA PCT ELLIPTICAL	16.3N 120.6E	08321
39	172000	14.4N 121.7E	LAND				//// 60410		16.1N 123.0E	08440
40	172200	14.4N 121.7E	LAND				10422 50308	EYE SA PCT CIRCULAR OPEN SW	16.3N 120.6E	08321
41	172200	14.4N 121.7E	LAND				10423 60213	EYE 2N-20MM DIAM 100 PCT ACCRY	16.1N 123.0E	08440
42	140000	14.4N 121.7E	LAND				10422 60308	EYE SA PCT CIRCULAR OPEN SW	16.3N 120.6E	08321
43	140000	14.4N 121.7E	LAND				20413 63308	EYE BECOMING LARGER	16.1N 123.0E	08440
44	140100	14.4N 121.7E	LAND				20413 63018		16.1N 123.0E	08440
45	140200	14.4N 121.7E	LAND				21417 60000	EYE SA PCT ELLIPTICAL OPEN SW	16.3N 120.6E	08321
46	140200	14.4N 121.7E	LAND				20403 60313	EYE CIRCULAR OPEN	16.1N 123.0E	08440
47	140300	14.4N 121.7E	LAND				20406 50213		16.1N 123.0E	08440
48	140300	14.4N 121.7E	LAND				21417 50004		16.3N 120.6E	08321
49	141000	14.4N 121.7E	LAND				20417 // // //		16.3N 120.6E	08321
50	141200	14.4N 121.7E	LAND				20414 73010	EYE SA PCT CIRCULAR OPEN E	16.1N 123.0E	08440
51	141400	14.4N 121.7E	LAND				20417 // // //	EYE OPEN ELLIPTICAL	16.3N 120.6E	08321

TROPICAL STORM DOT

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCR	ORBITAL CODE	SATELLITE	COMMENTS	SITE
1	042235	4.0N 147.7E	PCN 5	T0.0/0.0	DWSP3A	INIT JDS	PGTW
2	041116	4.0N 147.3E	PCN 5		DWSP3A		PGTW
3	042217	4.0N 147.6E	PCN 5	T0.0/0.0 /50.0/24HRS	DWSP3A		PGTW
4	042138	4.0N 136.0E	PCN 5	T0.0/0.0 /50.0/24HRS	DWSP3A		PGTW
5	041222	4.0N 136.0E	PCN 5		DWSP3A		PGTW
6	042323	4.0N 134.1E	PCN 5	T1.0/1.0 /01.0/24HRS	DWSP3A		PGTW
7	040147	4.1N 134.0E	PCN 5		DWSP3A		PGTW
8	040958	4.2N 134.4E	PCN 5		DWSP3A		PGTW
9	041204	7.2N 134.2E	PCN 5		DWSP3A		PGTW
10	041428	7.4N 134.7E	PCN 5		DWSP3A		PGTW
11	042059	7.3N 134.0E	PCN 5		DWSP3A	NOT AVAIL; EDGE OF DATA	PGTW
12	042305	7.9N 131.7E	PCN 5		DWSP3A	NOT AVAIL; EDGE OF DATA	PGTW
13	140129	7.4N 131.0E	PCN 5		DWSP3A	NOT AVAIL; EDGE OF DATA	PGTW
14	140310	4.1N 134.0E	PCN 5	T1.5/1.5	DWSP3A	INIT JDS	RPMK
15	140938	4.0N 129.0E	PCN 5		DWSP3A		PGTW
16	141146	4.0N 129.1E	PCN 5		DWSP3A		PGTW
17	141410	4.0N 128.7E	PCN 5		DWSP3A		PGTW
18	141411	4.0N 127.0E	PCN 5		DWSP3A		RODN
19	142219	4.0N 124.1E	PCN 5		DWSP3A	N/A OVER LAND	PGTW
20	142219	4.0N 124.0E	PCN 5	T2.5/2.5 /01.0/19HRS	DWSP3A		RPMK
21	140029	4.1N 124.7E	PCN 5		DWSP3A	N/A OVER LAND	PGTW
22	140252	4.0N 124.9E	PCN 5		DWSP3A	N/A OVER LAND	PGTW
23	140252	4.0N 124.9E	PCN 5		DWSP3A		RPMK
24	141059	4.0N 124.0E	PCN 5		DWSP3A		RPMK
25	141100	10.0N 122.0E	PCN 5		DWSP3A		RODN
26	141310	4.0N 122.0E	PCN 5		DWSP3A		RPMK
27	141533	10.1N 122.0E	PCN 5		DWSP3A		RPMK
28	141534	4.0N 122.1E	PCN 5		DWSP3A		RODN
29	142159	11.2N 122.0E	PCN 5		DWSP3A	N/A UJC TO TERMINATOR	PGTW
30	142159	10.6N 122.4E	PCN 5	T1.5/2.5 /01.0/24HRS	DWSP3A		RPMK
31	140011	10.7N 121.5E	PCN 5	T1.5/1.5	DWSP3A		PGTW
32	140234	10.9N 121.2E	PCN 5		DWSP3A		PGTW
33	140339	10.5N 119.2E	PCN 5		DWSP3A		PGTW
34	140440	10.5N 120.4E	PCN 5		DWSP3A		RODN
35	141252	10.7N 120.1E	PCN 5		DWSP3A		PGTW
36	141315	11.7N 119.0E	PCN 5		DWSP3A		PGTW
37	141315	11.3N 119.4E	PCN 5		DWSP3A		RODN
38	142139	12.1N 119.4E	PCN 5		DWSP3A	N/A UJC TO TERMINATOR	PGTW
39	142139	12.1N 119.4E	PCN 5		DWSP3A		RPMK
40	142353	12.0N 119.0E	PCN 5	T3.0/3.0	DWSP3A		RODN
41	142353	12.1N 119.0E	PCN 5	T2.0/2.0 /00.5/24HRS	DWSP3A		PGTW
42	140215	12.2N 119.9E	PCN 5		DWSP3A		RODN
43	140215	12.3N 119.0E	PCN 5		DWSP3A		PGTW
44	141020	13.1N 119.5E	PCN 5		DWSP3A	CI UM RANGING EYE	PGTW
45	141020	13.1N 119.5E	PCN 5		DWSP3A		RPMK
46	141235	13.1N 119.0E	PCN 5		DWSP3A	CI UM RANGING EYE	PGTW
47	141457	13.5N 119.5E	PCN 5		DWSP3A	EYE RANGING	PGTW
48	141457	13.3N 119.3E	PCN 5		DWSP3A		RPMK
49	142300	13.7N 120.1E	PCN 5		DWSP3A		RPMK
50	142301	13.9N 120.1E	PCN 5	T2.5/3.0 /00.5/24HRS	DWSP3A		RODN
51	140117	14.2N 120.1E	PCN 5		DWSP3A		RODN
52	140117	14.0N 120.3E	PCN 5	T1.5/1.5	DWSP3A	INIT JDS	RPMK
53	140339	13.9N 120.1E	PCN 5		DWSP3A		RODN
54	140339	13.9N 120.3E	PCN 5		DWSP3A		RPMK
55	141000	14.1N 120.0E	PCN 5		DWSP3A		PGTW
56	141000	14.0N 120.0E	PCN 5		DWSP3A		RPMK
57	141217	14.0N 121.1E	PCN 5		DWSP3A		RODN
58	141217	14.2N 121.0E	PCN 5		DWSP3A	PSDL SECONDARY 14.0N 119.7E	PGTW
59	141439	14.3N 121.4E	PCN 5		DWSP3A	SECONDARY AT 14.5N 121.0E	PGTW
60	141439	13.9N 121.0E	PCN 5		DWSP3A		RPMK
61	142240	15.2N 122.5E	PCN 5	T0.0/1.0 /01.5/24HRS	DWSP3A		RPMK
62	142241	15.1N 122.3E	PCN 5	T1.0/2.0 /01.5/24HRS	DWSP3A		RODN
63	140059	15.3N 122.0E	PCN 5		DWSP3A		RODN
64	140320	15.2N 122.7E	PCN 5		DWSP3A		RODN
65	140320	14.9N 124.2E	PCN 5	T1.0/1.5 /00.5/24HRS	DWSP3A		RPMK
66	141121	14.2N 123.9E	PCN 5		DWSP3A		RPMK
67	141159	14.2N 123.9E	PCN 5		DWSP3A		PGTW
68	141159	14.6N 123.0E	PCN 5		DWSP3A		RODN
69	141420	14.6N 124.4E	PCN 5		DWSP3A		PGTW
70	142220	14.9N 124.1E	PCN 5	T1.7/1.0	DWSP3A	INIT JDS	PGTW
71	140041	14.9N 124.4E	PCN 5	T1.0/1.0 /50.0/24HRS	DWSP3A		RODN

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	TUOHR HGT	DRS MSLP	MAX-SFC-WND VEL/DRG/RNG	MAX-FLT-LVL-WND DIR/VEL/DRG/RNG	ACFTY NAV/HFT	EYE SHAPE	EYE ORIENT/ATION	EYE TEMP (C) DIR/IN/DP/SGT	WSN NO.
1	120313	17.2N 120.5E	700MM	2090	1002	25 160 55	210 34 100 70	2 40			+ 9 +10 +10	4
2	120209	17.2N 120.4E	700MM	2011		30 180 50	240 30 100 50	1 2			+14 +12 +10	5
3	122117	17.4N 120.0E	700MM	2974	986		020 35 100 15	2 2	ELLIPTICAL	30 20 360	+14 +15 +10	6
4	140100	17.7N 120.2E	700MM	2952		15 340 30	110 32 300 15	1 2				6
5	140314	17.4N 120.5E	700MM	2035		15 100 30	340 39 270 47	1 2	ELLIPTICAL	30 20 360	+ 9 +13 +12	6
6	142120	17.2N 120.5E	1500FT			25 310 120	210 32 310 90	10 4			+24 +24	8
7	142232	17.4N 120.5E	700MM	3127	1004	25 140 40	140 28 290 30	10 4			+11 +11 + 9	8

RAJAH FIXES

FIX NO.	TIME (Z)	FIX POSITION	HADAR	ACFTY	EYE SHAPE	EYE DIAM	RAIN-H-CODE ASWAV TDUFT	COMMENTS	HADAR POSITION	SITF WND NO.
1	132233	17.7N 120.1E	LAND	RJUH	CIRCULAR	20		PSHL CENTER	15.2N 120.6E	08327
2	132303	17.4N 120.1E	LAND	RJUH	CIRCULAR	20			15.2N 120.6E	08327
3	132330	17.4N 120.1E	LAND	RJUH	CIRCULAR	20			15.2N 120.6E	08327
4	140033	17.4N 120.2E	LAND	FAIR	CIRCULAR	25			15.2N 120.6E	08327
5	140105	17.3N 120.2E	LAND	FAIR	CIRCULAR	25		CNTR STNRY SINCE LAST REPORT	15.2N 120.6E	08327
6	140135	17.4N 120.3E	LAND	FAIR	CIRCULAR	25			15.2N 120.6E	08327
7	140205	17.3N 120.2E	LAND	FAIR	CIRCULAR	25			15.2N 120.6E	08327
8	140235	17.3N 120.3E	LAND	FAIR	CIRCULAR	25			15.2N 120.6E	08327
9	140305	17.3N 120.3E	LAND	FAIR	CIRCULAR	25			15.2N 120.6E	08327
10	140410	17.3N 120.6E	LAND	GRUD	CIRCULAR	25			15.2N 120.6E	08327
11	140432	14.0N 120.7E	LAND	GRUD	CIRCULAR	25			15.2N 120.6E	08327
12	142346	14.4N 121.4E	LAND	RJUH	CIRCULAR			EYE DIAM UNK	15.2N 120.6E	08327

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	VFAREST DATA (MM)	COMMENTS
1	141200	26.0N 120.0E	25	120	
2	170000	27.3N 131.0E	25	60	
3	171200	27.0N 140.5E	25	60	

TROPICAL DEPRESSION 05

SATellite FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACFT	DVORAK CODE	SATellite	COMMENTS	SITE
1	210311	19.3N 114.2E	PCN 5	T1.5/1.5	DMS014	INIT OBS	RPMK
2	220035	21.4N 118.0E	PCN 3	T1.0/1.0	DMS014	INIT OBS	PGTW
3	220253	21.4N 118.3E	PCN 3	T1.5/1.5 /50.0/24HRS	DMS014		RPMK
4	220253	22.1N 118.5E	PCN 3	T1.5/1.5	DMS014	INIT OBS	RODN
5	230018	22.0N 124.8E	PCN 3	T2.5/2.5 /01.5/24HRS	DMS014		PGTW
6	230235	22.2N 125.3E	PCN 4		DMS014		PGTW
7	230235	22.0N 125.5E	PCN 3	T2.5/2.5 /01.0/24HRS	DMS014		RODN
8	231022	22.5N 128.0E	PCN 3		DMS017		PGTW
9	231022	22.7N 128.0E	PCN 3		DMS017		RKSO
10	231254	22.4N 129.0E	PCN 3		DMS014	PSN BASED ON CR BANDS	PGTW
11	231516	22.9N 129.7E	PCN 5		DMS014		RODN
12	231516	23.2N 129.8E	PCN 5		DMS017		PGTW
13	232121	24.1N 132.0E	PCN 5	T1.5/2.5 /#1.0/21HRS	DMS017		PGTW
14	232121	24.4N 131.5E	PCN 5	T2.0/2.0	DMS017	INIT OBS/UPR 1VL	RPMK
15	240000	24.4N 132.7E	PCN 5		DMS014		PGTW
16	240216	25.4N 131.1E	PCN 3		DMS014	INIT OBS	PGTW
17	240216	25.1N 131.8E	PCN 3	T1.0/1.0	DMS014		RKSO
18	241000	27.7N 136.0E	PCN 5		DMS017		PGTW
19	241002	29.0N 135.7E	PCN 5		DMS017		RODN
20	241002	27.1N 136.0E	PCN 5		DMS017		RKSO

RAJAR FIXES

FIX NO.	TIME (Z)	FIX POSITION	HADAR	ACFT	EYE SHAPE	EYE DIAM	RAJIB-CODE ASWAR TDUFF	COMMENTS	HADAR POSITION	SITF VMO NO.
1	230200	22.2N 126.1E	LAND				21822 50511		24.8N 125.3E	47927
2	230200	22.2N 126.1E	LAND				10823 50710		24.3N 124.2E	47410
3	230400	22.3N 126.7E	LAND				21812 50914		24.8N 125.3E	47927
4	230400	22.3N 126.7E	LAND				20842 50812		24.3N 124.2E	47918
5	230500	22.4N 126.0E	LAND				10872 50810		24.8N 125.3E	47927
6	230500	22.4N 126.0E	LAND				15/41 50819		24.3N 124.2E	47918
7	230500	22.4N 126.2E	LAND				22012 50814		24.8N 125.3E	47927
8	230500	22.4N 126.2E	LAND				20771 50911		24.3N 124.2E	47418
9	230700	22.5N 126.0E	LAND				24842 50822		24.8N 125.3E	47927
10	230900	22.5N 126.0E	LAND				24811 50816		24.8N 125.3E	47927
11	231500	23.4N 129.5E	LAND				1/111 40522		26.1N 127.7E	47927

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (NM)	COMMENTS
1	210000	19.0N 114.0E	15	60	
2	211200	20.0N 114.0E	15	60	

TYPHOON ELLIE

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACQRY	ORBITAL CODE	SATELLITE	COMMENTS	SITE
1	260019	8.3N 130.3E	PCN 5	T0.0/0.0	DMS034	INIT JDS	PGTW
2	261119	8.0N 141.7E	PCN 5		DMS034		PGTW
3	261441	8.9N 139.0E	PCN 6		DMS035		PGTW
4	270001	9.0N 140.4E	PCN 6	T0.0/0.0 /50.0/24HRC	DMS034	POSSIBLE SECONDARY 10.8N 139.4E	PGTW
5	270200	8.7N 140.3E	PCN 6		DMS035		PGTW
6	270847	8.6N 139.5E	PCN 5		DMS034		PGTW
7	271102	8.7N 139.4E	PCN 6		DMS037		PGTW
8	272128	11.3N 138.9E	PCN 6		DMS034		PGTW
9	272343	11.4N 138.7E	PCN 5		DMS034		PGTW
10	280141	11.4N 138.6E	PCN 5		DMS034		PGTW
11	281008	12.1N 138.4E	PCN 6		DMS037		PGTW
12	281225	12.9N 138.6E	PCN 6		DMS034		PGTW
13	281423	13.2N 138.7E	PCN 6		DMS034		PGTW
14	282325	12.5N 138.0E	PCN 5	T0.0/0.0 /50.0/24HRC	DMS034		PGTW
15	281208	12.9N 137.6E	PCN 6		DMS034		PGTW
16	282307	13.7N 138.2E	PCN 5	T0.0/0.0 /50.0/24HRC	DMS034		PGTW
17	301150	13.7N 139.6E			DMS034		PGTW
18	301366	13.9N 139.3E	PCN 6		DMS034		PGTW
19	302208	13.7N 139.7E	PCN 5	T1.0/1.0 /01.0/21HRC	DMS037		PGTW
20	010031	13.5N 137.4E	PCN 6		DMS034		PGTW
21	010227	13.2N 131.5E	PCN 5		DMS035		PGTW
22	010227	12.9N 131.3E	PCN 5	T2.0/2.0	DMS034	INIT JDS	RPMK
23	011050	13.7N 131.0E	PCN 5		DMS037	CI UP	PGTW
24	011050	13.9N 130.9E	PCN 6		DMS037	UPR LVL MITFLOW	RODN
25	011313	13.4N 130.7E	PCN 6		DMS034		PGTW
26	011313	13.7N 130.7E	PCN 6		DMS034		RODN
27	011509	13.9N 130.2E	PCN 6		DMS034		PGTW
28	011509	13.6N 130.1E	PCN 5		DMS034	UPR LVL ANTI/RAMMING	RPMK
29	012148	14.7N 129.1E	PCN 5		DMS037		RPMK
30	050013	14.5N 128.4E	PCN 5	T3.0/3.0 /02.0/24HRC	DMS034		PGTW
31	050137	14.6N 128.0E	PCN 1	T4.5/4.5 /00.5/24HRC	DMS034		RODN
32	050155	14.1N 128.3E	PCN 5		DMS034		RPMK
33	050209	14.5N 128.1E	PCN 3		DMS034		PGTW
34	050309	14.5N 128.5E	PCN 5		DMS034		RPMK
35	050209	14.6N 128.1E	PCN 3	T4.0/4.0	DMS034	INIT JDS	RODN
36	051029	15.0N 127.1E	PCN 4		DMS037	CI UP	PGTW
37	051255	15.1N 126.6E	PCN 6		DMS034		PGTW
38	051450	15.1N 126.6E	PCN 5		DMS034		RPMK
39	051451	15.3N 126.4E	PCN 5		DMS034		PGTW
40	052128	15.4N 126.0E	PCN 5		DMS037		RPMK
41	052129	15.3N 126.3E	PCN 5	T4.0/4.0 /01.0/21HRC	DMS037		PGTW
42	052356	14.0N 126.0E	PCN 5		DMS034		PGTW
43	050137	14.2N 124.8E	PCN 1	T5.0/5.0 /02.0/24HRC	DMS037		RPMK
44	051009	17.4N 123.4E	PCN 6		DMS034		PGTW
45	051237	17.9N 122.8E	PCN 6		DMS034		PGTW
46	051432	18.1N 122.6E	PCN 6		DMS034		PGTW
47	051432	18.1N 123.1E	PCN 6		DMS034		RPMK
48	052249	19.5N 110.5E	PCN 3	T4.5/3.5 /01.0/21HRC	DMS037		RODN
49	052249	18.7N 121.5E	PCN 5	T3.0/4.0 /02.0/21HRC	DMS037		RPMK
50	040300	18.9N 120.4E	PCN 5		DMS034		RPMK
51	040314	19.5N 120.4E	PCN 3		DMS034	EXPUSEU ILCC	RODN
52	041131	19.9N 110.4E	PCN 4		DMS037		RODN
53	041555	20.1N 118.0E	PCN 3		DMS034		RPMK
54	041555	20.2N 118.1E	PCN 3		DMS034	EXPUSEU ILCC NF OF DENSE CONV	RODN
55	042230	20.1N 114.3E	PCN 5	T3.5/3.5 /00.5/24HRC	DMS037		RPMK
56	040101	20.0N 114.0E	PCN 3		DMS034		RPMK
57	050255	20.1N 115.8E	PCN 3		DMS034		RODN
58	050256	20.2N 115.9E	PCN 3	T4.5/4.5 /01.0/21HRC	DMS034		RODN
59	041110	20.5N 114.3E	PCN 3		DMS037		RODN
60	041110	20.4N 114.5E	PCN 4		DMS037	EXPUSEU ILCC	RPMK
61	041343	20.5N 113.7E	PCN 3		DMS034	WELL JAFFMED ILCC	RODN
62	041537	20.7N 113.7E	PCN 3		DMS034		RPMK
63	042210	21.7N 111.8E	PCN 5		DMS037	N/A UJE TO TERMINATOR	PGTW
64	042210	21.5N 111.7E	PCN 5		DMS037		RPMK
65	040043	21.5N 111.4E	PCN 5	T2.5/2.5 /02.4/22HRC	DMS034		RODN
66	040237	21.5N 110.0E	PCN 5		DMS034		RKSO



AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	T0044 HGT	DBS MSLP	MAX-SFC-WND U/L/ARG/WNG	MAX-FLT-LVL-WND DTM/VEL/DRG/4NR	ACFRY NAV/MPT	EYE SHAPE	EYE ORIENT- DTM/TATION	EYE TEMP (C) DUT/ LV/ DP/5CT	MSM NO.
1	062003	11.3N 117.4E	700MM	7084	1000		150 19 040 30	R 12				3
2	062202	11.3N 117.3E	700MM	7085	1000	40 270 15	160 32 080 60	R 3			+12 +10 +10	3
3	011139	11.3N 120.1E	700MM	2444	984		160 55 070 60	S 5			+13 +13	4
4	012158	14.1N 124.1E	700MM	2451	981	35 180 15	240 60 160 15	S 5	CIRCULAR	40	+18 +13 + 9	4
5	020539	14.3N 127.7E	700MM	2857		55 020 40	100 85 020 35	S 5			+17 +12	5
6	020915	14.7N 127.4E	700MM	2858	974	50 120 20	040 62 310 45	S 5	ELLIPTICAL	35 25 180	+11 +17 +12	5
7	021933	14.7N 126.6E	700MM	2739	971		210 74 130 60	S 5			+15 +10	6
8	022157	14.7N 126.3E	700MM	2724	955	100 130 20	230 32 130 20	S 5	ELLIPTICAL	30 20 090	+14 +17 +10	6
9	030544	14.3N 124.1E	700MM	2750	961	40 030 40	110 98 030 40	S 6			+18 +14	7
10	030946	17.3N 127.9E	700MM	2731	956	50 150 50	040 88 360 30	S 6	ELLIPTICAL	30 20 070	+15 +17 +14	7
11	040952	19.5N 119.4E	700MM	2979	984	70 100 5	200 50 160 20	2 1			+18 +17 + 9	9
12	042158	20.2N 114.7E	700MM	3011	982	75 150 10	160 62 240 10	1 2				10

RAJAO FIXES

FIX NO.	TIME (Z)	FIX POSITION	MADAR	ACFRY	EYE SHAPE	EYE DIAM	WIND-CODE ASWAK IDUFF	COMMENTS	MADAR POSITION	SITE WIND NO.
1	030500	14.3N 127.4E	LAND					PROBABLY EYE	14.1N 123.0E	08440
2	030700	17.0N 124.0E	LAND					SPIRAL OVERLAY	16.3N 120.6E	08321
3	031400	17.9N 123.5E	LAND				41001 57111		16.3N 120.6E	08321
4	031500	17.9N 123.1E	LAND				11011 52922		16.3N 120.6E	08321
5	031600	14.4N 127.5E	LAND				34421 62922		16.3N 120.6E	08321
6	040000	14.0N 121.3E	LAND				34411 52920		16.3N 120.6E	08321
7	040100	14.0N 121.2E	LAND				34351 52712		16.3N 120.6E	08321
8	040200	14.3N 126.5E	LAND				10001 79997	EYE 75 PERCENT CIRCULAR	16.3N 120.6E	08321
9	040500	14.4N 126.2E	LAND				10011 79997	EYE FIXED CIRCULAR OPEN W4	16.3N 120.6E	08321
10	040500	19.5N 119.7E	LAND				50111 72810		16.3N 120.6E	08321
11	040510	20.7N 114.3E	LAND				45075 72810		22.3N 114.2E	45005
12	041700	21.0N 117.2E	LAND				45075 72810		22.3N 114.2E	45005
13	041930	21.2N 117.5E	LAND				45075 72810		22.3N 114.2E	45005
14	042100	21.5N 117.3E	LAND				45075 72810		22.3N 114.2E	45005

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (MM)	COMMENTS
1	260000	7.0N 141.0E	15	150	
2	261200	7.0N 140.0E	15	120	
3	270500	4.4N 134.3E	20	100	
4	280000	12.0N 134.0E	15	60	BRNA) F-W THROUGH
5	291200	14.0N 134.5E	20	100	BRNA) F-W THROUGH
6	300000	11.5N 131.5E	25	140	BRNA) F-W THROUGH
7	300500	14.0N 132.0E	25	150	BRNA) F-W THROUGH

TROPICAL STORM FAYE

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCR	DWDRK CODE	SATELLITE	COMMENTS	SITE
1	202307	2.0N 152.3E	PCN 5	T0.0/0.0	DWSP34	INIT JDS	PGTW
2	301346	3.6N 151.7E	PCN 6		DWSP35		PGTW
3	302247	4.6N 151.1E	PCN 5	T1.0/1.0 /01.0/24HRS	DWSP34		PGTW
4	010908	4.7N 150.2E	PCN 6		DWSP37	CI SAME	PGTW
5	011132	4.1N 150.0E	PCN 6		DWSP34		PGTW
6	011328	6.6N 149.7E	PCN 6		DWSP35		PGTW
7	012007	4.3N 147.3E	PCN 6		DWSP37		PGTW
8	020209	7.6N 146.2E	PCN 5	T2.0/2.0 /01.0/27HRS	DWSP34		PGTW
9	020948	7.9N 145.0E	PCN 6		DWSP37	CI SAME	PGTW
10	021114	7.8N 144.4E	PCN 5		DWSP37		PGTW
11	021309	9.0N 144.5E	PCN 6		DWSP34		PGTW
12	022128	9.0N 143.4E	PCN 5	T3.0/3.0	DWSP37	INIT JDS	RPMK
13	022129	9.2N 142.9E	PCN 6		DWSP37		PGTW
14	022356	9.6N 142.5E	PCN 5		DWSP34		PGTW
15	021002	9.7N 140.7E	PCN 6		DWSP37	EDGE OF DATA	PGTW
16	021055	9.7N 140.3E	PCN 6		DWSP34	EDGE OF DATA	PGTW
17	021432	10.0N 139.6E	PCN 6		DWSP35		PGTW
18	021432	10.0N 140.1E	PCN 6		DWSP34		RPMK
19	022109	10.6N 139.3E	PCN 5	T3.0/3.0 /50.0/24HRS	DWSP37		PGTW
20	022338	10.3N 139.3E	PCN 5		DWSP34		PGTW
21	040118	10.9N 139.4E		T4.0/4.0 /01.0/24HRS	DWSP34		RPMK
22	040132	10.5N 139.5E	PCN 3		DWSP34	EXPUSED ILCC	PGTW
23	040132	10.6N 140.2E	PCN 4	T3.0/3.0	DWSP37	INIT JDS	RODN
24	040949	10.6N 139.7E	PCN 6		DWSP37		PGTW
25	041219	10.4N 139.1E	PCN 4		DWSP34		PGTW
26	041413	10.7N 137.1E	PCN 6		DWSP35		PGTW
27	041414	10.5N 134.7E	PCN 5		DWSP34		RODN
28	042048	10.9N 136.4E	PCN 6		DWSP37	UPR LVL CNTR 10.5N 135.6E	PGTW
29	042320	10.5N 136.5E	PCN 5		DWSP34		PGTW
30	050114	10.3N 136.9E	PCN 3	T3.0/3.0 /50.0/24HRS	DWSP35		PGTW
31	050114	10.1N 136.1E	PCN 3	T3.0/3.0 /50.0/24HRS	DWSP35		RODN
32	050928	11.6N 136.6E	PCN 4		DWSP37	EXPUSED ILCC	PGTW
33	051201	11.9N 136.4E	PCN 4		DWSP34	EXPUSED ILCC	PGTW
34	051355	11.9N 136.2E	PCN 4		DWSP35		RPMK
35	051355	12.0N 134.9E	PCN 3		DWSP35	EXPUSED ILCC	PGTW
36	051355	12.3N 134.0E	PCN 4		DWSP35		RODN
37	052210	12.3N 133.4E	PCN 3	T2.0/3.0 /41.0/21HRS	DWSP37		PGTW
38	052302	13.1N 133.7E	PCN 3		DWSP34		PGTW
39	060237	13.7N 133.4E	PCN 3		DWSP34		PGTW
40	060237	13.4N 133.3E	PCN 3	T2.0/3.0 /41.0/25HRS	DWSP35		RODN
41	060309	15.0N 132.4E	PCN 6		DWSP37		PGTW
42	061144	15.2N 132.0E	PCN 4		DWSP34		PGTW
43	061518	15.6N 131.5E	PCN 4		DWSP35		PGTW
44	061519	15.6N 131.3E	PCN 3		DWSP34		RODN
45	070026	17.3N 129.6E	PCN 3	T0.0/1.0 /42.0/24HRS	DWSP34		PGTW
46	071308	17.7N 127.2E	PCN 6		DWSP34	CI UP	PGTW
47	080008	18.6N 124.4E	PCN 5	T0.0/0.0 /50.0/24HRS	DWSP34		PGTW
48	081250	20.2N 124.3E	PCN 5		DWSP34		PGTW

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	70043 MGT	OR5 MSLP	MAX-SFC-WND VEL/RRG/RNG	MAX-FLY-LVL-4ND DTG/VEL/DNG/RNG	ACCR	EYE SHAPE	EYE ORIEN-DIAM/TATION	EYE TEMP. (C) DIR/ IN/ DP/ SST	45M NO.
1	012300	6.1N 146.5E	1500FT		1008							1
2	020852	7.6N 145.5E	1500FT		1004	20 120 45 280	20 160 30 2	5				2
3	020845	7.6N 145.3E	1500FT		1004	25 200 50 280	25 200 100 4	5				2
4	021309	4.3N 147.6E	700MM	7094		40 270 15 240	35 100 60 4	8				3
5	020550	4.9N 147.4E	1500FT		1001	40 270 15 240	37 270 15 4	2				3
6	040910	9.5N 141.6E	700MM	7084	998	45 270 40 140	55 270 40 4	7				4
7	032014	10.1N 140.6E	700MM	7085	998	50 170 30 160	46 040 70 4	3				5
8	040804	10.5N 138.5E	700MM	7097	1001	50 180 45 110	55 050 50 4	5				6
9	042122	10.2N 136.0E	700MM	7033	991	45 170 15 060	40 320 120 3	3	ELLIPTICAL	5 13 090		7
10	050804	11.3N 134.4E	1500FT		994	30 240 10 230	30 140 7 4	4				8
11	051925	11.6N 133.6E	700MM	7100		220	33 150 60 4	5				8
12	052200	12.6N 132.3E	1500FT		1004	10 180 160 230	40 180 140 4	10			26	9
13	040717	13.9N 132.7E	1500FT		1001			4				9
14	070534	16.0N 127.5E	700MM	7117		10 090 70 170	20 090 70 4	5			34 + 6	12

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	WFAREEST DATA (MM)	COMMENTS
1	241200	3.0N 154.0E	15	150	EQUATORIAL DOUBLE-VORTICE INTFRACTION
2	240000	2.5N 154.0E	15	80	EQUATORIAL DOUBLE-VORTICE INTFRACTION
3	241200	3.0N 151.5E	15	130	EST 45IP 1008MB
4	300800	3.5N 151.0E	15	90	EST 45IP 1008MB
5	301200	4.0N 152.0E	15	150	SFC TRF W-SE

TROPICAL DEPRESSION 08

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACRY	UVZAK CODE	SATELLITE	COMMENTS	SITE
1	202339	5.9N 134.4E	PCN 5	T0.0/0.0	DMSD1A	INIT OBS	PSTM
2	211220	7.3N 134.5E	PCN 5		DMSD1A	CI SAMS/11PR 1VI	PSTM
3	221202	11.5N 130.8E	PCN 6		DMSD1A		PSTM
4	222302	14.4N 130.6E	PCN 5	T1.0/1.0	DMSD17	INIT OBS/LLC 235N 140E	PSTM
5	231012	20.2N 130.4E	PCN 6		DMSD17		PSTM
6	231144	20.3N 130.9E	PCN 6		DMSD17		PSTM
7	231303	20.5N 130.7E	PCN 6		DMSD19		PSTM
8	231328	20.5N 130.6E	PCN 5		DMSD15		PSTM
9	232111	22.0N 137.0E	PCN 5	T1.0/1.0 /50.0/2PHR	DMSD17		PSTM
10	232245	22.4N 134.6E	PCN 5		DMSD17		PSTM
11	240145	23.2N 135.1E	PCN 5		DMSD19		PSTM
12	240209	23.4N 134.5E	PCN 5	T1.0/1.0	DMSD19	INIT OBS	RPMK
13	240210	23.7N 134.8E	PCN 5		DMSD19		PSTM
14	240951	24.4N 134.0E	PCN 5		DMSD17		PSTM
15	241244	24.9N 131.0E	PCN 6		DMSD19		PSTM
16	241307	24.3N 131.5E	PCN 6		DMSD17		PSTM
17	241451	25.2N 132.9E	PCN 5		DMSD15		PSTM
18	241451	25.0N 131.0E	PCN 5		DMSD15	INIT NIGHTTIME OBS	ROOM
19	240008	26.4N 130.9E	PCN 5	T0.0/1.0 /W1.0/27HR	DMSD17	POSSIBLE SECONDARY 27.0N 130.3E	PSTM
20	240126	26.2N 130.4E	PCN 5		DMSD17		PSTM
21	240151	26.4N 130.1E	PCN 5		DMSD15		PSTM
22	240151	26.4N 129.0E	PCN 5	T1.0/1.0	DMSD15	INIT OBS	ROOM
23	241226	30.7N 127.0E	PCN 5		DMSD19		PSTM
24	241250	30.7N 127.5E	PCN 5		DMSD17		PSTM
25	241433	30.4N 127.4E	PCN 5		DMSD15		PSTM
26	242350	31.5N 124.7E	PCN 5	T4.0/4.0	DMSD17	INIT OBS	RKSO
27	242350	31.9N 124.5E	PCN 5	T2.0/2.0-/02.0/24HR	DMSD17		PSTM
28	240133	32.4N 124.4E	PCN 5		DMSD15		PSTM
29	240314	32.4N 124.3E	PCN 3		DMSD15		RKSO

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	Y0043 OBS MGT	DBS MSLP	MAX-SFC-WND VEL/ARG/WND	MAX-FLT-LVL-WND DIR/VEL/DIR/4MR	ACRY NAV/WFT	EYE SHAPE	EYE ORIEN- DION/TATION	EYE TEMP (C) DIR/ 14/ DR/CT	WSR NO.
1	241016	21.1N 133.5E	700MB	1127	1004	15 110 120	150 15 060	10 2 10			+10 + 3 + 8	1

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (NM)	COMMENTS
1	240000	21.5N 134.0E	15	60	
2	241200	23.5N 133.0E	20	60	
3	240000	24.5N 130.9E	20	60	
4	241200	24.0N 127.5E	20	60	
5	240000	31.0N 124.5E	15	60	
6	241200	33.0N 124.0E	15	60	
7	270000	34.0N 124.0E	14	60	

SUPER TYPHOON HOPE

CATELITE FIXES

FLA NO.	TIME (Z)	FIX POSITION	ACFRY	UVZAK CODE	SATLITE	COMMENTS	SITE
1	240151	10.5W 144.2E	PCN 5	T1.0/1.0	DMS074	INIT OBS	
2	240152	10.5W 144.4E	PCN 6		DMS077		PGTW
3	241108	10.3W 142.7E	PCN 5		DMS074		PGTW
4	241226	10.6W 142.6E	PCN 5		DMS070		PGTW
5	241433	11.2W 147.1E	PCN 6		DMS074		PGTW
6	242350	11.6W 146.8E	PCN 6	T1.0/1.0 /50.0/2PHRC	DMS074		PGTW
7	240107	11.6W 146.5E	PCN 5		DMS070		PGTW
8	240133	11.5W 146.5E	PCN 5		DMS074		PGTW
9	240133	11.5W 146.5E	PCN 5		DMS074		PGTW
10	240912	11.7W 146.1E	PCN 6	T1.0/1.0-	DMS074	INIT OBS	RODM
11	241207	12.0W 146.0E	PCN 5		DMS077		PGTW
12	241232	12.0W 139.9E	PCN 6		DMS074		PGTW
13	241414	11.3W 130.5E	PCN 5		DMS074		PGTW
14	241414	11.3W 140.4E	PCN 5		DMS074		PGTW
15	270008	13.6W 146.7E	PCN 3		DMS074	INIT NIGHTIME OBS	RPNK
16	270114	13.6W 146.5E	PCN 3	T0.0/1.0 /W1.0/24HRC	DMS074		PGTW
17	270114	13.6W 146.5E	PCN 3	T1.0/1.0 /W1.0/24HRC	DMS074		RODM
18	270501	14.7W 146.3E	PCN 4		DMS077		PGTW
19	272314	14.7W 134.0E	PCN 3	T1.0/1.0 /O1.0/24HRC	DMS074	EAPUSEU ILCC	PGTW
20	240231	17.2W 137.7E	PCN 6		DMS074		PGTW
21	241012	18.2W 134.9E	PCN 6		DMS077		PGTW
22	241013	17.7W 137.4E	PCN 5		DMS077	BASED ON UPR IWL	RPNK
23	241156	14.0W 137.4E	PCN 6		DMS077		PGTW
24	241310	14.3W 136.3E	PCN 4		DMS074		PGTW
25	241337	14.6W 136.4E	PCN 6		DMS074		RPNK
26	242112	17.1W 134.2E	PCN 7	T2.0/2.0 /O1.0/2PHRC	DMS077		PGTW
27	242257	14.6W 136.7E	PCN 5		DMS074		PGTW
28	240151	14.6W 136.9E	PCN 5	T3.0/3.0	DMS070	INIT OBS	PGTW
29	290219	14.1W 136.7E	PCN 5		DMS074		RPNK
30	290219	14.2W 136.6E	PCN 5	T3.0/3.0	DMS074		PGTW
31	290139	14.5W 134.1E	PCN 6		DMS074	INIT OBS	RODM
32	291252	14.7W 134.9E	PCN 5		DMS070	CI UP	PGTW
33	291500	14.9W 134.7E	PCN 6		DMS074		PGTW
34	291500	14.7W 134.7E	PCN 6		DMS074		PGTW
35	300014	14.6W 137.3E	PCN 3		DMS074		RODM
36	300020	14.7W 137.4E	PCN 5	T4.0/4.0 /O2.0/21HRC	DMS074		RODM
37	300132	14.6W 137.4E	PCN 3	T4.0/4.0 /O1.0/24HRC	DMS070		PGTW
38	300133	14.7W 137.3E	PCN 3		DMS070		RPNK
39	300201	14.6W 137.3E	PCN 1	T4.5/4.5 /O1.5/24HRC	DMS074		PGTW
40	300201	14.9W 137.2E	PCN 2		DMS074		RODM
41	300932	17.0W 137.1E	PCN 3		DMS077		PGTW
42	301233	17.7W 131.6E	PCN 3		DMS070		PGTW
43	301233	17.4W 137.0E	PCN 3		DMS070		RODM
44	301301	17.2W 131.7E	PCN 4		DMS070		PGTW
45	301441	17.7W 131.3E	PCN 1		DMS074		PGTW
46	301442	17.7W 131.4E	PCN 1		DMS074		PGTW
47	302213	14.5W 120.7E	PCN 1	T5.5/5.5 /O1.5/21HRC	DMS077		RKSO
48	302213	14.5W 120.5E	PCN 3	T5.0/5.0 /O1.0/2PHRC	DMS077		RPNK
49	310002	14.4W 120.3E	PCN 1		DMS074		PGTW
50	310114	14.4W 120.9E	PCN 1		DMS070		PGTW
51	311053	14.3W 124.6E	PCN 2		DMS077		PGTW
52	311244	14.7W 124.9E	PCN 1		DMS074		PGTW
53	311355	14.7W 124.9E	PCN 2		DMS070		PGTW
54	311355	14.7W 124.6E	PCN 1		DMS070		RPNK
55	311423	14.4W 124.5E	PCN 1		DMS070		RODM
56	311424	14.4W 124.7E	PCN 1		DMS074		PGTW
57	312153	20.5W 127.7E	PCN 1	T6.5/6.5 /O1.5/24HRC	DMS074		RODM
58	312153	20.5W 127.7E	PCN 1	T6.5/6.5 /O1.0/24HRC	DMS077		PGTW
59	312153	20.5W 127.7E	PCN 1	T6.5/6.5	DMS077	INIT OBS	RPNK
60	312344	20.6W 127.3E	PCN 1		DMS074		RODM
61	010236	20.7W 127.6E	PCN 1		DMS070		PGTW
62	010236	20.4W 127.4E	PCN 1		DMS070		RPNK
63	011033	21.3W 120.6E	PCN 2		DMS077		RODM
64	011033	21.4W 119.5E	PCN 1		DMS074		PGTW
65	011336	21.4W 119.6E	PCN 1		DMS070		PGTW
66	011336	21.5W 119.5E	PCN 1		DMS070		RPNK
67	011408	21.4W 119.5E	PCN 1		DMS070		RODM
68	011547	21.7W 118.6E	PCN 1		DMS074		RPNK
69	012314	22.0W 117.1E	PCN 1	T5.5/6.5 /W1.0/24HRC	DMS074		RODM
70	020217	22.4W 115.7E	PCN 1	T5.0/5.5 /W1.5/24HRC	DMS070		RPNK
71	020247	22.1W 115.3E	PCN 1		DMS074		PGTW
72	020247	22.7W 115.3E	PCN 1	T5.0/6.0 /W1.5/24HRC	DMS074		PGTW
73	021155	22.4W 117.4E	PCN 4		DMS077		RODM
74	021155	22.7W 117.1E	PCN 3		DMS077		RPNK
75	021528	22.7W 118.0E	PCN 4		DMS077		RODM
76	021528	22.7W 117.9E	PCN 6		DMS074		PGTW
77	022254	21.4W 109.4E	PCN 4	T3.5/4.5 /W1.5/24HRC	DMS077		RPNK
78	022254	22.4W 108.8E	PCN 5	T2.0/2.0	DMS077	INIT OBS	RODM
							RKSO

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	TU043 HGT	DBS MSLP	MAX-SFC-WVD VEL/ARG/RWD	MAX-FLT-LVL-WVD DIR/VEL/DRG/ANG	ACCRV NAV/MET	EYE SHAPE	EYE ORIEN- DIAM/TATION	EYE TEMP (C) DIR/VEL/DRG/ANG	USN NO.
1	240328	14.4N 144.5E	1500F1		1005	25 110 120	070 38 310 120	4 10				1
2	242113	11.2N 147.4E	1500F1	1003	1000	25 050 50	140 28 070 40	4 10			+25 +23 23	2
3	240509	11.4N 141.7E	700MM	1001	1000	15 050 30	140 31 050 90	3 25			+11 +9	3
4	240313	11.4N 141.3E	700MM	1001	1002	15 130 100	140 17 130 120	4 25			+12 +13 +9	3
5	241430	12.3N 139.8E	700MM	1004							+10 +7	4
6	242025	12.5N 140.0E	1500F1			10 080 50	130 30 210 30	10 10			+25 +23	4
7	272307	14.1N 137.9E	700MM	1004	999	50 120 15	140 30 120 15	4 4			+12 +11 +9	5
8	241933	14.3N 134.7E	700MM	1002			110 41 070 120	4 5			+17 +9	6
9	242052	14.7N 134.7E	700MM	1007	905	40 100 30	140 49 270 20	4 2			+11 +13 +10	6
10	240715	14.6N 134.5E	700MM	1005		75 140 20	040 50 310 30	4 3			+15 +10	7
11	240328	14.6N 134.2E	700MM	1004	972	70 130 20	130 72 040 30	2 3	CIRCULAR	8	+10 +17 +10	7
12	241808	14.7N 134.1E	700MM	1004	965		220 68 110 14	4 3			+15 +15	8
13	242031	14.9N 134.8E	700MM	1004	961	40 360 30	040 75 360 20	4 3	ELLIPTICAL	5 3 340	+13 +15 +15	8
14	300515	17.1N 132.7E	700MM	1005		85 090 15	170 85 090 14	4 5			+19 +13	9
15	300925	17.1N 132.4E	700MM	1009	934	95 170 12	230 80 170 12	3 3	ELLIPTICAL	8 6 160	+17 +15 +15	9
16	301339	14.2N 130.2E	700MM			40 220 50	010 75 300 24	2 5	ELLIPTICAL	10 8 140	+15 +16	10
17	302225	14.4N 129.7E	700MM	1007	926	45 140 5	170 110 030 14	4 2	ELLIPTICAL	10 8 140	+11 +15 +16	10
18	310648	14.3N 127.4E	700MM	1021	912	95 360 20	040 130 360 14	5 7	CIRCULAR	15	+15 +16	11
19	310410	14.4N 124.9E	700MM	1005	498	100 360 10	120 147 020 10	4 5	CIRCULAR	14	+12 +27 +12	11
20	312148	20.5N 127.7E	700MM	1023	902	140 110 20	140 134 110 20	4 4	CIRCULAR	20	+10 +20 +17	12
21	010745	21.0N 121.1E	700MM	1005	917	95 060 30	140 120 200 20	4 3	CIRCULAR	14	+10 +15 +16	13
22	010906	21.2N 120.8E	700MM	1006	920	100 060 20	140 86 240 50	4 3	CIRCULAR	16	+10 +17 +17	13

RAJAH FIXES

FIX NO.	TIME (Z)	FIX POSITION	MADR	ACCRV	EYE SHAPE	EYE DIAM	RANON-CODE ASWAG TUUFF	COMMENTS	MADR POSITION	SITF WMO NO.
1	010000	20.5N 121.0E	LAND				31511 ////		14.2N 122.7E	08731
2	010100	20.7N 122.9E	LAND				5		25.1N 121.0E	46406
3	010150	20.7N 122.5E	LAND				31511 53023		14.2N 122.7E	08731
4	010300	20.5N 122.2E	LAND				30711 52716		14.2N 122.7E	08731
5	010350	20.7N 122.0E	LAND				30711 52914		14.2N 122.7E	08731
6	010500	20.5N 121.0E	LAND				5		22.0N 120.3E	46744
7	010500	20.7N 122.0E	LAND				3561 52519		14.2N 122.7E	08731
8	010500	20.5N 121.5E	LAND				5		24.0N 121.6E	46600
9	010500	20.4N 121.5E	LAND				5		14.2N 122.7E	08731
10	010500	20.4N 121.8E	LAND				5		24.0N 121.6E	46600
11	010500	20.7N 121.8E	LAND				5		22.0N 120.3E	46744
12	010600	21.0N 121.8E	LAND				5		25.1N 121.0E	46406
13	010650	20.7N 121.3E	LAND				35511 52912		14.2N 122.7E	08731
14	010700	20.4N 121.5E	LAND				5		22.0N 120.3E	46744
15	010700	21.1N 121.5E	LAND				5		24.0N 121.6E	46600
16	010700	20.5N 121.6E	LAND				5		25.1N 121.0E	46406
17	010900	21.2N 121.3E	LAND				5		24.0N 121.6E	46600
18	010930	20.4N 120.4E	LAND				7 ////	SPTRAI OVERLAY 15 DEGREES	14.2N 122.7E	08731
19	010900	21.2N 121.0E	LAND				5		16.3N 120.6E	45905
20	010900	21.1N 120.2E	LAND				5		24.0N 121.6E	46600
21	010900	21.3N 120.4E	LAND				5		22.0N 120.3E	46744
22	010930	20.4N 120.2E	LAND				4 ////	SPTRAI OVERLAY 15 DEGREES	25.1N 121.0E	46406
23	011000	21.2N 120.4E	LAND				5		16.3N 120.6E	45905
24	011000	21.3N 120.7E	LAND				5		24.0N 121.6E	46600
25	011200	21.5N 120.1E	LAND				5		22.0N 120.3E	46744
26	011300	21.4N 119.7E	LAND				5		22.0N 120.3E	46744
27	011400	21.4N 119.4E	LAND				5		22.0N 120.3E	46744
28	011500	21.4N 119.0E	LAND				5		22.0N 120.3E	46744
29	011600	21.7N 118.7E	LAND				5		22.0N 120.3E	46744
30	011700	21.7N 118.4E	LAND				5		22.0N 120.3E	46744
31	011900	21.7N 118.1E	LAND				5		22.0N 120.3E	46744
32	011440	21.1N 119.1E	LAND				5		22.0N 120.3E	46744
33	011900	21.7N 117.9E	LAND				5		24.0N 121.6E	46600
34	012000	21.7N 117.7E	LAND				5		22.0N 120.3E	46744
35	012100	21.4N 117.4E	LAND				5		22.0N 120.3E	46744
36	012100	21.4N 117.5E	LAND				5		22.0N 120.3E	46744
37	020100	22.3N 114.2E	LAND				10303 ////		22.3N 114.2E	45905
38	020100	22.3N 114.2E	LAND				////		22.3N 114.2E	45905
39	020200	22.4N 114.7E	LAND				24 /// 53032		22.0N 120.3E	46744
40	020300	22.4N 114.2E	LAND				////		22.3N 114.2E	45905
41	020300	22.4N 114.2E	LAND				////		22.3N 114.2E	45905
42	020400	22.5N 114.8E	LAND				////		22.3N 114.2E	45905
43	020400	22.4N 114.8E	LAND				////		22.3N 114.2E	45905
44	020500	22.4N 114.3E	LAND				////		22.3N 114.2E	45905

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST WETA (NM)	COMMENTS
1	241200	10.5N 147.0E	15	100	

TROPICAL STORM GORDON

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACQRY	UNUSAK CODE	SATELLITE	COMMENTS	SITE
1	240932	14.2N 134.1E	RCV 6		DMSP47	INIT NIGHTIME OBS	PGTW
2	241225	14.0N 133.7E	RCV 5		DMSP46		PGTW
3	241250	14.1N 133.9E	RCV 5		DMSP46		PGTW
4	241433	14.1N 134.3E	RCV 5		DMSP46		PGTW
5	242212	14.0N 134.3E	RCV 5	11.0/1.0	DMSP47		PGTW
6	242320	14.2N 134.3E	RCV 5		DMSP46		PGTW
7	240107	14.3N 134.4E	RCV 5		DMSP40		PGTW
8	240133	14.3N 134.1E	RCV 5		DMSP46		PGTW
9	240133	14.0N 134.0E	RCV 5	12.0/2.0	DMSP46	INIT OBS	ROOM
10	241232	14.1N 134.4E	RCV 5		DMSP46	CI UP	PGTW
11	241346	14.3N 134.2E	RCV 5		DMSP46		PGTW
12	241616	14.6N 134.0E	RCV 5		DMSP46		PGTW
13	242332	14.5N 134.3E	RCV 3	12.0/2.0 /01.0/25HRS	DMSP46		PGTW
14	270230	14.6N 134.2E	RCV 3	12.0/2.0	DMSP46	INIT OBS	ROOM
15	270255	14.7N 134.0E	RCV 5		DMSP46	PARTIALLY EXPOSED LLCC	PGTW
16	270255	14.3N 134.2E	RCV 1	12.0/2.0	DMSP46	INIT OBS	ROOM
17	270256	14.7N 134.7E	RCV 5		DMSP46		ROOM
18	271033	14.7N 134.7E	RCV 5	13.0/3.0 /01.0/25HRS	DMSP46		ROOM
19	271329	14.0N 134.6E	RCV 3		DMSP47	CI UP	PGTW
20	271537	14.7N 134.4E	RCV 5		DMSP46		ROOM
21	271537	14.3N 134.1E	RCV 5		DMSP46		ROOM
22	280056	14.4N 134.7E	RCV 3	14.0/4.0 /01.0/25HRS	DMSP46		ROOM
23	240211	14.0N 134.4E	RCV 1		DMSP47		PGTW
24	240237	14.2N 134.2E	RCV 1	14.0/4.0 /02.0/24HRS	DMSP46	BANJING TYPE FVE	PGTW
25	240237	14.3N 134.4E	RCV 1	13.5/3.5 /01.5/24HRS	DMSP46		RKSO
26	241013	14.3N 134.7E	RCV 5		DMSP47	CI SAME	PGTW
27	241310	14.3N 134.4E	RCV 5		DMSP46		PGTW
28	241310	14.3N 134.4E	RCV 5		DMSP46		PGTW
29	241338	14.4N 134.4E	RCV 5		DMSP46		ROOM
30	241319	14.4N 134.4E	RCV 5		DMSP46		PGTW
31	242253	14.0N 134.4E	RCV 5	12.5/3.5 /01.5/25HRS	DMSP47		ROOM
32	242253	14.5N 134.6E	RCV 5	13.0/3.0-	DMSP47	INIT OBS	ROOM
33	240038	14.5N 134.7E	RCV 1	14.0/4.0-/01.0/25HRS	DMSP46		PGTW
34	240151	14.5N 134.7E	RCV 1		DMSP46		ROOM
35	240219	14.4N 134.4E	RCV 1	13.0/3.5-/01.5/24HRS	DMSP46		RKSO
36	240219	14.7N 134.7E	RCV 1		DMSP46		PGTW
37	241136	14.4N 134.4E	RCV 5		DMSP47		ROOM
38	241136	14.3N 134.4E	RCV 5		DMSP47		ROOM
39	241319	14.3N 134.1E	RCV 3		DMSP46		RKSO
40	241320	14.1N 134.1E	RCV 5		DMSP46	CI DOWN	PGTW

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	TU004 HGT	OBS MSLP	MAX-WFC-WND VEL/HRG/WND	MAX-FLT-LVL-WND HGT/VEL/HRG/WND	ACQRY NAV/WFT	EYE SHAPE	EYE ORIEN-DIAM/TATION	KYF TEMP (C) SURF/ 1W DP/CSFT	WIND NO.
1	240927	14.3N 134.7E	1500FT	3005	997	30 050 20	120 65 050 20	4 4			+25 +25 +25 29	2
2	242036	14.0N 134.7E	700MM	3003			120 39 050 170	4 4			+13	3
3	242152	14.5N 134.9E	1500FT		994	50 120 30	080 35 320 60	4 3			+25	4
4	270910	14.5N 134.0E	700MM		994	50 130 40	070 40 330 35	4 2			+12 +11 +10	4
5	270948	14.7N 134.0E	700MM		993	40 020 50	110 54 020 120	4 4			+12 +11 +11	4
6	271336	14.1N 134.4E	700MM		993		110 51 400 20	4 2			+14 +12	5
7	272152	14.7N 134.4E	700MM		991	50 040 30	140 53 040 30	0 2	CIRCULAR	5	+11 +17 +14	5
8	241050	14.4N 134.4E	700MM		975	45 150 30	200 45 140 120	2 4	ELLIPTICAL	40 25 010	+11 +15 +11	6

RAVAN FIXES

FIX NO.	TIME (Z)	FIX POSITION	MADAR ACQRY	EYE SHAPE	EYE DIAM	MADAR-CODE ASWAN TDUFF	COMMENTS	MADAR POSITION	SITE WIND NO.
1	272250	14.3N 134.4E	LA00					25.1N 121.6E	46406
2	240200	14.3N 134.7E	LA00					25.1N 121.6E	46406
3	240300	14.3N 134.1E	LA00					25.1N 121.6E	46406
4	240400	14.0N 134.1E	LA00					22.0N 120.3E	46744
5	240500	14.0N 134.1E	LA00					22.0N 120.3E	46744
6	240700	14.2N 134.0E	LA00					22.0N 120.3E	46744
7	240900	14.6N 134.7E	LA00					22.0N 120.3E	46744
8	240900	14.5N 134.6E	LA00					22.0N 120.3E	46744
9	241000	14.6N 134.4E	LA00					22.0N 120.3E	46744
10	241100	14.7N 134.4E	LA00					22.0N 120.3E	46744
11	241200	14.7N 134.3E	LA00					22.0N 120.3E	46744
12	241300	14.2N 134.0E	LA00					22.0N 120.3E	46744
13	241400	14.3N 134.7E	LA00					22.0N 120.3E	46744
14	241500	14.4N 134.4E	LA00					22.0N 120.3E	46744
15	241500	14.5N 134.0E	LA00					22.0N 120.3E	46744
16	241700	14.4N 134.0E	LA00					22.0N 120.3E	46744
17	241800	14.5N 134.0E	LA00					22.0N 120.3E	46744
18	241900	14.5N 134.4E	LA00					22.0N 120.3E	46744
19	242000	14.4N 134.1E	LA00					22.0N 120.3E	46744
20	242100	14.7N 134.4E	LA00					22.0N 120.3E	46744
21	240000	14.5N 134.7E	LA00			14413 6270V		22.3N 114.2E	45005
22	240300	14.4N 134.4E	LA00			14012 73111		22.3N 114.2E	45005
23	240500	14.1N 134.4E	LA00			14743 73010		22.3N 114.2E	45005
24	240600	14.1N 134.0E	LA00			14143 72913		22.3N 114.2E	45005
25	241600	14.1N 134.4E	LA00			24000 /1111		22.3N 114.2E	45005

TROPICAL DEPRESSION 11

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACRY	VOYAGER CODE	SATELLITE	COMMENTS	SITE
1	021317	17.1W 134.3E	PCN 6		DMSD30	INIT NIGHTTIME OBS	PGTW
2	030228	17.6W 131.2E	PCN 5	T0.0/0.0	DMSD34	INIT OBS	PGTW
3	030953	13.9W 130.4E	PCN 6		DMSD37		PGTW
4	030953	14.5W 131.0E	PCN 6		DMSD37		RPMK
5	031150	14.2W 130.2E	PCN 6		DMSD34		PGTW
6	031258	14.4W 130.3E	PCN 5		DMSD30		PGTW
7	031510	13.3W 128.9E	PCN 5		DMSD35		RODN
8	031510	14.9W 130.3E	PCN 6		DMSD34		PGTW
9	040032	15.0W 127.7E	PCN 5	T0.0/0.0 /50.0/22HRC	DMSD34		PGTW
10	040139	15.7W 128.1E	PCN 5		DMSD30		PGTW
11	040210	15.2W 128.1E	PCN 5	T0.0/0.0	DMSD34	INIT OBS	RODN
12	040210	15.4W 128.1E	PCN 5		DMSD35		PGTW
13	040333	15.9W 127.0E	PCN 6		DMSD37		PGTW
14	041239	14.4W 126.3E	PCN 5		DMSD34		PGTW
15	041314	14.5W 126.3E	PCN 5		DMSD34		PGTW
16	041451	16.5W 126.0E	PCN 5		DMSD34		PGTW
17	041451	16.2W 125.9E	PCN 5		DMSD35		RPMK
18	042214	17.9W 126.2E	PCN 5		DMSD37		PGTW
19	050014	17.7W 127.8E	PCN 5	T2.0/2.0 /02.0/24HRC	DMSD34		PGTW
20	050120	17.7W 128.0E	PCN 3		DMSD34		PGTW
21	050151	17.3W 128.0E	PCN 3		DMSD35		PGTW
22	050151	18.0W 126.9E	PCN 5	T1.0/1.0 /01.0/24HRC	DMSD34		RODN
23	051256	18.9W 126.2E	PCN 3		DMSD34	EXPUSED ILCC	PGTW
24	051402	19.2W 125.2E	PCN 6		DMSD34		RODN
25	051433	14.0W 125.8E	PCN 3		DMSD35		PGTW
26	052153	14.9W 122.8E	PCN 5	T2.0/2.0 /50.0/22HRC	DMSD37	INIT OBS	PGTW
27	052153	19.3W 123.6E	PCN 5	T1.0/1.0	DMSD37		RPMK
28	052356	18.5W 122.9E	PCN 5		DMSD34		PGTW
29	060243	19.3W 123.5E	PCN 5	T1.0/1.0 /50.0/25HRC	DMSD30		RODN
30	060314	19.3W 123.4E	PCN 5		DMSD35		RODN
31	060314	19.3W 123.5E	PCN 5		DMSD35		RPMK
32	061034	21.1W 122.0E	PCN 5	T0.0/0.0	DMSD37	INIT OBS	RKSO
33	061317	21.0W 119.6E	PCN 5		DMSD30		RODN

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLI LVL	TU043 OBS HGT MSLP	MAX-QFC-WIND VEL/ARG/RNG	MAX-FLT-LVL-WIND DIR/VEL/SHG/4MC	ACRY NAV/MET	EYE SHAPE	EYE ORIENTATION	WV TEMP (C) DIR/ IW DP/5KT	WSW NO.
1	030615	14.0W 127.1E	700MH	1090 1003	10 230 48	220 15 060 48	5 5			+11 + 9 28	2
2	032200	14.7W 129.9E	700MH	1070 1004	15 150 50	040 12 330 10	5 5			+15 +13 + 8 28	2
3	042126	17.3W 127.6E	1500FT	1001	30 180 40	220 30 180 35	4 15			+25 +23 28	4
4	050815	14.0W 125.9E	1500FT	997	25 060 50	110 25 060 60	5 5			+25 +25	5
5	052130	14.9W 122.8E	700MH	1091 1001	20 360 4	040 25 150 10	7 10			+25 +25 27	6
6	052222	14.3W 123.4E	1500FT	1007	20 360 4	040 15 330 5	4 2				6

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	CFAREST DATA (MM)	COMMENTS
1	020600	17.0W 136.0E	15	120	
2	040600	20.7W 121.9E	15	30	

TYPHOON IRVING  
 CATELITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACQRY	UNIQUE CODE	SATELLITE	COMMENTS	SITE
1	071220	14.1N 137.9E	PCN 6		DMC07A		PGTW
2	090023	14.1N 137.1E	PCN 4	T0.0/0.0	DMC07A	INIT JDS	PGTW
3	091202	14.4N 137.9E	PCN 3		DMC07A		PGTW
4	092303	17.7N 136.6E	PCN 5	T1.0/1.0 /01.0/23HRC	DMC07A		PGTW
5	092219	17.9N 136.9E	PCN 5		DMC07A		PGTW
6	090933	14.3N 135.5E	PCN 4		DMC07A		PGTW
7	091144	14.3N 134.3E	PCN 3		DMC07A		PGTW
8	091500	17.4N 134.6E	PCN 3		DMC07A		PGTW
9	091500	17.7N 134.6E	PCN 3		DMC07A		RPMK
10	091500	17.7N 134.6E	PCN 3		DMC07A		RODN
11	092214	14.4N 137.3E	PCN 4		DMC07A		PGTW
12	100026	14.4N 137.2E	PCN 3	T1.0/1.0 /50.0/25HRC	DMC07A		PGTW
13	100127	14.4N 137.1E	PCN 3		DMC07A		PGTW
14	100127	14.4N 137.1E	PCN 3	T1.0/1.0	DMC07A	INIT JDS	RODN
15	100913	14.3N 137.0E	PCN 6		DMC07A		PGTW
16	100913	14.4N 137.2E	PCN 6		DMC07A		RODN
17	101226	14.3N 131.4E	PCN 3		DMC07A		PGTW
18	101307	17.5N 131.4E	PCN 6		DMC07A		PGTW
19	101642	14.1N 129.8E	PCN 5		DMC07A		RPMK
20	101642	14.3N 130.2E	PCN 5		DMC07A		PGTW
21	101642	17.3N 130.1E	PCN 3		DMC07A		RODN
22	102154	17.4N 129.6E	PCN 5		DMC07A		PGTW
23	102154	17.4N 129.6E	PCN 5	T1.0/1.0	DMC07A	INIT JDS	RPMK
24	110004	14.7N 129.7E	PCN 5	T2.0/2.0 /01.0/24HRC	DMC07A		PGTW
25	110108	14.7N 129.6E	PCN 5		DMC07A		PGTW
26	110142	14.4N 129.4E	PCN 5		DMC07A		PGTW
27	110142	14.7N 129.5E	PCN 6		DMC07A		RPMK
28	111034	14.4N 129.5E	PCN 6		DMC07A		PGTW
29	111250	17.1N 129.2E	PCN 5		DMC07A		PGTW
30	111349	17.2N 129.2E	PCN 6		DMC07A		PGTW
31	111423	17.3N 129.3E	PCN 5		DMC07A		PGTW
32	111423	17.1N 130.6E	PCN 5		DMC07A		RKSO
33	112134	17.5N 129.1E	PCN 5	T2.5/2.5 /01.5/24HRC	DMC07A		RPMK
34	112134	17.3N 129.7E	PCN 5		DMC07A		PGTW
35	112351	17.4N 129.6E	PCN 3	T3.0/3.0 /01.0/24HRC	DMC07A		PGTW
36	120230	17.4N 127.7E	PCN 5	T3.0/3.0	DMC07A	INIT JDS	RODN
37	120230	17.7N 127.0E	PCN 5		DMC07A		RODN
38	120305	17.4N 127.6E	PCN 5		DMC07A		RPMK
39	121015	14.7N 127.0E	PCN 5		DMC07A		RODN
40	121232	14.7N 126.7E	PCN 5		DMC07A	CI UP	PGTW
41	121340	14.4N 126.3E	PCN 6		DMC07A		PGTW
42	121330	17.4N 126.6E	PCN 5		DMC07A		RPMK
43	121537	14.4N 126.3E	PCN 5		DMC07A		PGTW
44	122114	14.3N 126.7E	PCN 5		DMC07A		RODN
45	122333	20.0N 127.1E	PCN 5	T4.5/4.5 /01.5/24HRC	DMC07A		PGTW
46	130211	20.0N 126.9E	PCN 3	T4.0/4.0 /01.0/24HRC	DMC07A		RODN
47	130211	20.4N 127.0E	PCN 3	T4.0/4.0 /01.5/24HRC	DMC07A		RPMK
48	130247	20.3N 126.4E	PCN 3		DMC07A		RODN
49	130247	20.7N 127.0E	PCN 3		DMC07A		PGTW
50	130354	21.4N 126.4E	PCN 4		DMC07A		RODN
51	130354	21.4N 126.7E	PCN 6		DMC07A		PGTW
52	141214	22.1N 125.9E	PCN 5		DMC07A		PGTW
53	141311	22.3N 125.4E	PCN 5		DMC07A		PGTW
54	141528	22.4N 125.4E	PCN 3		DMC07A		RODN
55	141528	22.7N 125.4E	PCN 5		DMC07A		RPMK
56	142234	23.4N 125.1E	PCN 5	T5.0/5.0 /01.0/21HRC	DMC07A		RPMK
57	142235	23.0N 125.1E	PCN 5		DMC07A		RODN
58	140556	23.3N 124.0E	PCN 5		DMC07A		RPMK
59	140152	23.3N 125.1E	PCN 1	T4.5/4.5 /00.5/24HRC	DMC07A		RODN
60	140152	23.4N 124.9E	PCN 3	T5.0/5.0 /00.5/24HRC	DMC07A		PGTW
61	140152	23.7N 125.1E	PCN 3	T4.5/4.5	DMC07A	INIT JDS	RKSO
62	140228	23.4N 124.9E	PCN 1		DMC07A		PGTW
63	140228	23.4N 125.0E	PCN 1		DMC07A		RKSO
64	141115	24.7N 125.0E	PCN 2		DMC07A		RPMK
65	141116	24.5N 124.7E	PCN 2		DMC07A		RODN
66	141252	24.7N 124.4E	PCN 1		DMC07A		RPMK
67	141252	24.5N 124.6E	PCN 3		DMC07A		PGTW
68	141348	24.5N 124.5E	PCN 2		DMC07A		RKSO
69	141310	24.4N 124.5E	PCN 3		DMC07A		PGTW
70	142214	24.4N 124.9E	PCN 1	T5.5/5.5 /00.5/24HRC	DMC07A		RPMK
71	142215	25.4N 124.7E	PCN 1		DMC07A		RODN
72	140048	25.4N 124.4E	PCN 3	T4.0/4.0 /00.5/23HRC	DMC07A		RKSO
73	140049	25.4N 124.4E	PCN 3	T5.0/5.0 /00.5/23HRC	DMC07A		RODN
74	140133	24.4N 124.6E	PCN 3	T5.0/5.0 /50.0/24HRC	DMC07A		PGTW
75	140209	24.7N 124.7E	PCN 3		DMC07A		PGTW
76	140210	24.6N 124.4E	PCN 3		DMC07A		RODN
77	140210	24.7N 124.3E	PCN 3		DMC07A		RKSO
78	141055	27.2N 123.8E	PCN 1		DMC07A		RPMK
79	141055	27.2N 123.8E	PCN 2		DMC07A	PSN BASED ON PVF	RODN
80	141233	27.5N 123.7E	PCN 1		DMC07A		PGTW
81	141233	27.4N 123.6E	PCN 1		DMC07A		RKSO
82	141314	27.5N 123.7E	PCN 1		DMC07A		RPMK
83	141320	27.5N 123.8E	PCN 1		DMC07A		PGTW
84	141451	24.1N 124.0E	PCN 3		DMC07A		PGTW
85	141451	27.3N 123.8E	PCN 3		DMC07A		RKSO



85	140134	30.1N	127.4E	PCN 1	T5.0/5.0-/50.0/20HRC	DMCR47	
87	140155	30.2N	127.7E	PCN 1	T5.0/5.5 /40.5/24HRC	DMCR47	PGTW
88	140200	30.7N	127.9E	PCN 1		DMCR47	RPMK
89	140139	31.4N	127.7E	PCN 2		DMCR47	PGTW
90	140151	30.1N	127.7E	PCN 1		DMCR47	PGTW
91	140151	30.1N	127.5E	PCN 1	T5.0/5.0 /01.0/25HRC	DMCR47	RPK50
92	140256	30.2N	127.7E	PCN 1	T5.0/5.0 /50.0/24HRC	DMCR40	RODM
93	140256	30.1N	127.6E	PCN 1		DMCR40	RPK50
94	141035	31.3N	127.7E	PCN 1		DMCR47	RPMK
95	141035	31.6N	127.7E	PCN 1		DMCR47	RPK50
96	141302	31.7N	127.8E	PCN 3		DMCR47	PGTW
97	141302	31.7N	127.8E	PCN 3		DMCR47	RPK50
98	141356	32.5N	127.4E	PCN 3		DMCR47	RODM
99	141431	32.2N	127.9E	PCN 3		DMCR47	PGTW
100	141432	32.2N	127.7E	PCN 3		DMCR47	RPMK
101	141433	32.2N	127.8E	PCN 3		DMCR47	RPK50
102	142134	33.5N	124.9E	PCN 3	T3.0/4.0-/42.0/20HRC	DMCR47	RPK50
103	142135	33.5N	124.6E	PCN 3		DMCR47	RODM
104	170002	33.9N	125.4E	PCN 3	T4.5/5.5 /40.5/21HRC	DMCR47	RPK50
105	170002	34.1N	125.2E	PCN 3		DMCR47	RODM
106	170132	33.2N	125.7E	PCN 3	T3.0/4.0-/42.0/27HRC	DMCR47	RPK50
107	170132	34.3N	124.7E	PCN 3		DMCR47	PGTW
108	170220	34.5N	124.9E	PCN 3		DMCR47	RPK50
109	170237	34.8N	124.9E	PCN 3		DMCR47	RPK50
110	171015	34.4N	124.3E	PCN 3		DMCR47	RPMK
111	171015	34.5N	124.2E	PCN 3		DMCR47	RPK50
112	171015	34.4N	124.3E	PCN 3		DMCR47	PGTW
113	171244	37.3N	120.1E	PCN 3		DMCR47	RPMK
114	171244	37.6N	120.0E	PCN 3		DMCR47	RPK50
115	171347	37.9N	120.8E	PCN 3		DMCR47	PGTW
116	171337	37.7N	130.0E	PCN 3		DMCR47	RPMK
117	171555	34.5N	130.9E	PCN 5		DMCR47	RPK50
118	171556	30.5N	131.1E	PCN 5		DMCR47	RPK50
119	172114	41.5N	137.1E	PCN 5	T2.5/3.5 /42.0/20HRC	DMCR47	RPMK
120	172114	41.5N	137.1E	PCN 5	T1.5/2.5 /41.5/24HRC	DMCR47	RPK50
121	172345	41.9N	137.5E	PCN 5		DMCR47	RPK50
122	180114	47.5N	134.5E	PCN 5		DMCR47	RPK50
123	180218	47.9N	134.6E	PCN 5		DMCR47	RPK50
124	180218	44.0N	135.1E	PCN 5		DMCR47	RPK50

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT I/VL	70043 HGT	OBS MSLP	MAX-SFC-WVD VEL/ARG/RWG	MAX-FL1-LVL-#ND DTW/VEL/DNU/4NC	ACCRV NAV/MFT	EYE SHAPE	EYE ORIEN- DIAM/TATION	EYE TEMP (C) DIR/ IN/ DP/SC/T	WSR NO.
1	090008	17.9N 134.0E	1500FT	7077	996	45 220 35	700 15 220 20	1 1				1
2	090928	14.1N 134.9E	1500FT	7037	994	20 100 35	100 30 100 35	4 4			+13 -14 +25 29	2
3	091926	17.4N 134.6E	7000H	7074	998		140 33 090 120	4 10			+20 +25 +24	3
4	092122	14.3N 134.9E	1500FT		998	20 270 70	140 20 270 70	4 12			+12 + 8	3
5	100716	14.1N 131.6E	7000H	7067		30 030 10	120 15 030 10	2 4			+25 +25 29	3
6	100914	14.4N 131.8E	7000H	7064	994	30 330 20	110 17 330 15	2 4				4
7	102207	17.4N 129.2E	1500FT	7065	996	30 210 50	110 30 050 120	4 4			+15 + 5	4
8	110631	16.4N 128.6E	7000H	7014	992	45 290 150	140 31 290 400	4 4			+20 +28	5
9	110631	16.4N 128.6E	7000H	7014	994	45 290 150	140 31 290 400	4 4			+13 + 7	6
10	111316	17.7N 129.4E	7000H	7092	988	25 290 30	020 28 290 120	2 4			+15 +12 + 8	7
11	112145	17.5N 129.3E	7000H	7085	985	50 190 150	140 45 090 60	4 10			+14 +12	7
12	120716	14.5N 127.2E	7000H	7007	979	55 280 55	140 48 280 65	2 4			+15 +13 + 9	7
13	120918	14.5N 127.0E	7000H	7005	980	55 110 35	020 60 310 90	2 4			+13 + 8	8
14	121944	14.3N 127.2E	7000H	7070	975		140 45 050 120	2 4			+11 +10 +11	8
15	122222	14.7N 124.9E	7000H	7080	975	65 130 120	210 65 130 135	4 4			+16 +10	9
16	130644	21.2N 124.7E	7000H	7041	972	70 020 190	140 61 020 110	4 1			+14 +15 +10	9
17	130908	21.5N 124.7E	7000H	7033	969	75 130 30	070 52 330 400	4 2			+15 +15 +15	10
18	131912	21.0N 124.1E	7000H	7074	964		220 53 130 60	4 4			+10 +11	11
19	132149	21.2N 124.3E	7000H	7070	960	70 230 30	200 56 230 90	4 4			+10 +17 +12	11
20	140500	24.0N 124.4E	7000H	7032	959	65 260 30	120 68 030 60	1 1			+20 +13	12
21	140950	24.2N 124.4E	7000H	7017	954	75 130 150	210 63 140 40	1 4	CIRCULAR	30	+14 +19 +16	12
22	142143	24.5N 124.4E	7000H	7005	956		140 75 100 30	1 2	CIRCULAR	30	+10 +15 +12	13
23	140520	27.0N 124.7E	7000H	7011	957		220 65 120 140	10 4			+15 +16	14
24	140905	27.1N 124.7E	7000H	7008	956	60 020 120	110 65 020 60	10 5	CIRCULAR	20	+14 +15 +16	14
25	142151	24.2N 124.9E	7000H	7008	956	60 150 20	220 61 150 30				+14 +15 +16	14

DATA FIXES

FIX NO.	TIME (Z)	FIX POSITION	HAZAR	ACCRV	EYE SHAPE	EYE DIAM	WIND-COUE ARCAN	COUE TOUFF	COMMENTS	HAZAR POSITION	QTF WIND NO.
1	131500	22.9N 124.4E	LAND				4112	1111		24.3N 124.2E	47918
2	131700	23.0N 124.4E	LAND				4112	43611		24.3N 124.2E	47918
3	131730	25.7N 124.3E	LAND	PTUM		40			EYE HWR 3315	24.3N 124.3E	47918
4	131900	23.0N 124.1E	LAND				4112	52016		24.3N 124.2E	47918
5	131900	23.0N 124.1E	LAND				4112	51111		24.3N 124.3E	47918
6	131900	21.2N 124.7E	LAND				4112	51111		24.3N 124.3E	47918
7	131900	22.9N 124.1E	LAND				4112	51916		24.3N 124.2E	47918
8	132000	21.2N 124.7E	LAND				4112	73105		24.3N 124.2E	47918
9	132000	21.2N 124.7E	LAND				4112	52008		24.3N 124.3E	47918
10	132030	21.2N 124.7E	LAND				4112	52008		24.3N 124.3E	47918
11	132100	21.2N 124.1E	LAND	PTUM		40				24.3N 124.3E	47918
12	132100	21.2N 124.3E	LAND				4112	52805		24.3N 124.3E	47918
13	132100	21.2N 124.3E	LAND				4112	51111		24.3N 124.2E	47918
14	132200	21.1N 124.1E	LAND				4112	53308		24.3N 124.2E	47918
15	132200	21.2N 124.3E	LAND				4112	51805		24.3N 124.3E	47918
16	132300	21.1N 124.0E	LAND	PTUM		40			EYE HWR 0614	24.3N 124.3E	47918
17	132300	21.4N 124.7E	LAND				4112	53314		24.3N 124.3E	47918
18	132300	21.4N 124.7E	LAND	PTUM		40			EYE HWR 3115	24.3N 124.2E	47918
							4112	73404		24.3N 124.3E	47918

19	140000	21.50	124.0E	LAND	P70H	60		EVE MORA 3115	24.0M	125.3E	47997
20	140000	21.50	124.0E	LAND			6/112 52911		24.3M	124.2E	47918
21	140000	21.50	124.0E	LAND			6/114 50000		24.0M	125.3E	47997
22	140000	21.50	124.4E	LAND	P70H	60		EVE MORA 3220	24.0M	125.3E	47997
23	140100	21.50	124.4E	LAND	P70H	60		EVE MORA 2815	24.0M	125.3E	47997
24	140100	21.50	124.4E	LAND			6/114 53210		24.0M	125.3E	47997
25	140100	21.50	124.4E	LAND			6/112 53100		24.3M	124.2E	47918
26	140100	21.50	124.5E	LAND			6/113 05010		24.0M	121.6E	46600
27	140200	21.50	124.4E	LAND	P70H	60		EVE STNR	24.0M	125.3E	47997
28	140200	21.50	124.7E	LAND			6/112 52511		24.3M	124.2E	47918
29	140200	21.50	124.7E	LAND			6/114 52705		24.0M	125.3E	47997
30	140200	21.50	124.0E	LAND			24003 52421		24.0M	121.6E	46600
31	140300	21.50	124.9E	LAND			6/114 50410		24.0M	125.3E	47997
32	140300	21.50	124.7E	LAND			6/112 72905		24.3M	124.2E	47918
33	140300	21.70	124.0E	LAND			21004 50120		24.0M	121.6E	46600
34	140400	21.90	124.1E	LAND			22078 50105		24.0M	121.6E	46600
35	140400	21.70	124.9E	LAND			6/112 50310		24.0M	125.3E	47997
36	140400	21.90	124.4E	LAND			6/114 50200		24.3M	124.2E	47918
37	140500	24.20	124.4E	LAND			10004 53420		24.0M	125.3E	47997
38	140500	24.00	124.9E	LAND			6/113 53514		24.0M	125.3E	47997
39	140500	21.30	124.9E	LAND			6/112 53611		24.3M	124.2E	47918
40	140500	24.30	124.4E	LAND			24444 53407		24.0M	121.6E	46600
41	140500	24.10	124.0E	LAND			6/113 50300		24.0M	125.3E	47997
42	140500	24.10	124.4E	LAND	G70D	60		EVE MORA 3335	24.0M	125.3E	47997
43	140500	24.10	124.7E	LAND			6/112 73610		24.3M	124.2E	47918
44	140700	24.10	124.7E	LAND			20773 52714		24.0M	125.3E	47997
45	140700	24.20	124.4E	LAND	G70D	60		EVE MORA 3205	24.0M	125.3E	47997
46	140700	24.20	124.4E	LAND			10004 52407		24.0M	121.6E	46600
47	140700	24.10	124.7E	LAND			6/112 73315		24.3M	124.2E	47918
48	140900	24.10	124.7E	LAND			11714 52105		24.0M	121.6E	46600
49	140900	24.10	124.6E	LAND	G70D	10		EVE STNR	24.0M	125.3E	47997
50	140900	24.10	124.7E	LAND			6/112 73305		24.3M	124.2E	47918
51	140900	24.10	124.7E	LAND			6/114 50000		24.0M	125.3E	47997
52	140900	24.30	124.9E	LAND			24723 50310		24.0M	125.3E	47997
53	140900	24.20	124.4E	LAND			6/113 70004		24.3M	124.2E	47918
54	141000	24.60	124.7E	LAND			20713 53114		24.0M	125.3E	47997
55	141100	24.50	124.7E	LAND			6/113 73507		24.3M	124.2E	47918
56	141100	24.50	124.6E	LAND			65743 63000		24.0M	125.3E	47997
57	141100	24.50	124.5E	LAND	FAIR	60		EVE MORA 3220	24.0M	125.3E	47997
58	141200	24.50	124.4E	LAND			20043 63000		24.0M	121.6E	46600
59	141200	24.60	124.0E	LAND			6/113 50100		24.0M	125.3E	47997
60	141200	24.60	124.5E	LAND	FAIR	60		EVE MORA 3220	24.0M	125.3E	47997
61	141200	24.50	124.8E	LAND			6/113 73407		24.0M	125.3E	47997
62	141235	24.10	124.0E	LAND	P70H	60		EVE MORA 3220	24.0M	125.3E	47997
63	141235	24.60	124.2E	LAND	P70H	60		EVE MORA 3220	24.0M	125.3E	47997
64	141300	24.90	124.5E	LAND	FAIR	70		EVE MORA 3220	24.0M	125.3E	47997
65	141300	24.90	124.6E	LAND			22043 53600		24.0M	121.6E	46600
66	141300	24.70	124.6E	LAND			65743 53007		24.0M	125.3E	47997
67	141300	24.50	124.7E	LAND			6/113 73005		24.3M	124.2E	47918
68	141310	24.50	124.4E	LAND	P70H	60		EVE MORA 3220	24.0M	125.3E	47997
69	141400	24.90	124.5E	LAND	FAIR	70		EVE MORA 3220	24.0M	125.3E	47997
70	141400	21.90	124.6E	LAND			6/113 53605		24.0M	125.3E	47997
71	141400	24.70	124.6E	LAND			6/113 73404		24.3M	124.2E	47918
72	141445	24.90	124.8E	LAND	P70H	60		EVE MORA 3220	24.0M	125.3E	47997
73	141500	24.90	124.5E	LAND			6/113 73200		24.3M	124.2E	47918
74	141500	24.90	124.5E	LAND			6/113 53211		24.0M	125.3E	47997
75	141500	25.10	124.3E	LAND	FAIR	70		EVE MORA 3220	24.0M	125.3E	47997
76	141500	24.90	124.4E	LAND			6/113 52705		24.0M	125.3E	47997
77	141600	25.00	124.2E	LAND			21944 52720		24.0M	121.6E	46600
78	141600	24.90	124.6E	LAND			6/113 73300		24.3M	124.2E	47918
79	141500	25.20	124.4E	LAND	FAIR	70		EVE MORA 3610	24.0M	125.3E	47997
80	141700	25.10	124.3E	LAND			21003 53311		24.0M	125.3E	47997
81	141700	25.00	124.5E	LAND			6/112 73407		24.3M	124.2E	47918
82	141700	24.30	124.3E	LAND	FAIR	70		EVE MORA 3510	24.0M	125.3E	47997
83	141700	25.10	124.4E	LAND				24.0M	121.6E	46600	
84	141800	25.70	124.3E	LAND			65743 53410		24.0M	125.3E	47997
85	141900	25.20	124.5E	LAND			6/112 73600		24.3M	124.2E	47918
86	141900	25.70	124.4E	LAND	FAIR	70		EVE MORA 3610	24.0M	125.3E	47997
87	141910	25.10	124.4E	LAND	FAIR	70		EVE MORA 3610	24.0M	125.3E	47997
88	141935	24.50	124.5E	LAND	P70H	60		EVE MORA 3220	24.0M	125.3E	47997
89	141900	25.60	124.3E	LAND			10015 50310		24.0M	121.6E	46600
90	141900	25.30	124.2E	LAND	FAIR	70		EVE MORA 3220	24.0M	125.3E	47997
91	142000	25.70	124.2E	LAND	FAIR	70		EVE STNR	24.0M	125.3E	47997
92	142000	25.30	124.2E	LAND			25713 50000		24.0M	125.3E	47997
93	142000	25.60	124.4E	LAND			6/112 73507		24.3M	124.2E	47918
94	142010	25.10	124.3E	LAND	P70H	60		PRBL CNTR	24.0M	127.8E	47911
95	142100	25.50	124.3E	LAND			21044 50509		24.0M	121.6E	46600
96	142100	25.60	124.4E	LAND			6/112 73207		24.3M	124.2E	47918
97	142100	25.60	124.2E	LAND	FAIR	70		EVE MORA 3610	24.0M	125.3E	47997
98	142100	25.60	124.3E	LAND			25743 50500		24.0M	125.3E	47997
99	142135	25.50	124.2E	LAND	P70H	60		PRBL CNTR	24.0M	127.8E	47911
100	142200	25.50	124.4E	LAND			67743 50607		24.0M	125.3E	47997
101	142200	25.60	124.4E	LAND			6/113 73303		24.3M	124.2E	47918
102	142200	25.60	124.3E	LAND			25745		24.0M	121.6E	46600
103	142200	25.50	124.3E	LAND	P70H	60		EVE MORA 3605	24.0M	125.3E	47997
104	142210	25.70	124.2E	LAND	P70H	60		PRBL CNTR	24.0M	127.8E	47911
105	142235	25.70	124.4E	LAND	P70H	60		PRBL CNTR	24.0M	127.8E	47911
106	142300	25.50	124.4E	LAND			6/112 73403		24.3M	124.2E	47918
107	142300	25.70	124.4E	LAND			6/113 50311		24.0M	125.3E	47997
108	142300	21.90	124.3E	LAND	P70H	60		EVE MORA 3210	24.0M	125.3E	47997
109	142310	25.60	124.2E	LAND	P70H	60		PRBL CNTR	24.0M	127.8E	47911
110	140000	25.30	124.5E	LAND	P70H	60		EVE MORA 0220	24.0M	125.3E	47997
111	140000	25.90	124.5E	LAND			6/113 51415		24.0M	127.8E	47911
112	140000	25.40	124.4E	LAND			6/112 70104		24.3M	124.2E	47918
113	140010	25.50	124.3E	LAND	P70H	60		PRBL CNTR	24.0M	127.8E	47911

114	150035	24.0N	124.3E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991
115	150100	24.0N	124.3E	LAND	RQUR		EVE MNRV 3220	26.3N	125.8E	47999
116	150135	24.2N	124.5E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991
117	150200	24.6N	124.5E	LAND		47773 53611		24.4N	125.3E	47997
118	150200	24.2N	124.3E	LAND	RQUR		EVE MNRV 3620	26.3N	125.8E	47999
119	150235	24.6N	124.5E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991
120	150300	24.5N	124.4E	LAND		47774 53414		24.4N	125.3E	47997
121	150300	24.6N	124.3E	LAND	RQUR		EVE MNRV 3620	26.3N	125.8E	47999
122	150310	24.7N	124.7E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991
123	150500	27.9N	125.0E	LAND	GNDU	50	EVE MNRV 3120	24.4N	125.3E	47997
124	150600	27.2N	124.9E	LAND		47774 53224		24.4N	125.3E	47997
*125	150635	27.7N	124.2E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991
126	150700	27.2N	124.8E	LAND	FALM	40	EVE MNRV 2920	26.3N	125.8E	47999
*127	150710	27.9N	124.2E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991
*128	150735	27.2N	124.0E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991
129	150800	27.1N	123.7E	LAND		47773 7290Y		24.4N	125.3E	47997
130	150900	27.2N	123.8E	LAND	FALM	50	EVE STNR	26.3N	125.8E	47999
131	150900	27.1N	123.8E	LAND		20973 50000		24.4N	125.3E	47997
132	150900	27.2N	123.9E	LAND	FALM	50	EVE STNR	26.3N	125.8E	47999
133	151000	27.1N	123.8E	LAND		57743 50000		24.4N	125.3E	47997
134	151100	27.3N	123.8E	LAND		57743 53609		24.4N	125.3E	47997
135	151100	27.2N	123.8E	LAND	FALM	55	EVE MNRV 3210	26.3N	125.8E	47999
136	151100	27.9N	123.8E	LAND	FALM	55	EVE MNRV 3210	26.2N	127.7E	47990
137	151200	27.5N	123.9E	LAND		47774 50211		24.4N	125.3E	47997
138	151200	27.5N	123.7E	LAND	FALM	55	EVE MNRV 3210	26.3N	125.8E	47999
139	151300	27.5N	123.9E	LAND		47774 50000		24.4N	125.3E	47997
140	151300	27.5N	123.8E	LAND	FALM	70	EVE MNRV 3610	26.3N	125.8E	47999
141	151400	27.5N	123.9E	LAND		47774 53606		24.4N	125.3E	47997
142	151400	27.3N	124.0E	LAND	GNDU	55	EVE MNRV 0215	26.3N	125.8E	47999
143	151500	27.3N	124.0E	LAND	GNDU	40	EVE MNRV 0120	26.3N	125.8E	47999
144	151700	24.3N	124.8E	LAND	GNDU	40	EVE MNRV 3620	26.3N	125.8E	47999
145	151900	24.5N	123.8E	LAND	RQUR		EVE MNRV 3620	26.3N	125.8E	47999
146	151930	24.3N	124.0E	ACFT			NAV ACCURACY 0MM			54824
147	152151	29.2N	123.8E	ACFT						54824
148	152335	25.6N	124.2E	LAND	RQUR		PCSL CNTM	26.4N	127.8E	47991

SUPER TYPHOON JUDY

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACFR.	JVTRAK CODE	SATELLITE	COMMENTS	SITE
1	151310	13.7N 150.1E	PCN 4		DMS034		PGTW
2	152239	13.2N 146.4E	PCN 5	T0.0/0.0	DMS034	INIT JDS	PGTW
J	151120	13.5N 145.4E	PCN 5		DMS034		PGTW
4	152134	13.1N 144.1E	PCN 5		DMS037	EDGE OF DATA	PGTW
5	170055	13.3N 143.2E	PCN 5	T3.0/3.0 /03.0/27HRS	DMS034		PGTW
6	170132	13.3N 142.9E	PCN 6		DMS034		PGTW
7	170133	14.1N 142.9E	PCN 5	T3.0/3.0	DMS034	INIT JDS	RPMK
8	171015	13.3N 140.8E	PCN 5		DMS037		PGTW
9	171155	14.4N 140.3E	PCN 5		DMS034		PGTW
10	171414	14.8N 140.5E	PCN 5		DMS034		PGTW
11	171414	14.3N 140.4E	PCN 6		DMS034		RODN
12	172114	15.4N 139.7E	PCN 6		DMS037		PGTW
13	172345	15.4N 139.6E	PCN 5	T4.0/4.0 /01.0/27HRS	DMS034		PGTW
14	172345	15.4N 139.7E	PCN 3	T4.0/4.0	DMS034	INIT JDS	RODN
15	180036	15.4N 139.5E	PCN 5		DMS034		PGTW
16	180036	15.5N 139.5E	PCN 5	T4.0/4.0+01.0/27HRS	DMS034		RPMK
17	180114	15.4N 139.4E	PCN 5		DMS034		PGTW
18	180954	16.4N 137.6E	PCN 6		DMS037		PGTW
19	181226	16.7N 137.1E	PCN 5		DMS034		PGTW
20	181355	17.1N 137.0E	PCN 5		DMS034		PGTW
21	181355	16.5N 137.2E	PCN 5		DMS034		RODN
22	181455	16.7N 137.0E	PCN 5		DMS034		RPMK
23	182054	17.8N 134.1E	PCN 1		DMS037		PGTW
24	182327	14.2N 135.8E	PCN 1	T6.0/6.0 /02.0/24HRS	DMS034		PGTW
25	180159	14.5N 135.6E	PCN 1		DMS034		PGTW
26	180237	14.4N 135.5E	PCN 1	T6.0/6.0 /01.5/24HRS	DMS034		RPMK
27	180237	14.5N 135.5E	PCN 1		DMS034		PGTW
28	180334	13.6N 134.9E	PCN 2		DMS037		PGTW
29	181209	14.7N 134.0E	PCN 1		DMS034		PGTW
30	181256	13.8N 134.7E	PCN 1		DMS034		PGTW
31	181337	20.0N 134.8E	PCN 2		DMS034		PGTW
32	181519	13.3N 134.7E	PCN 1		DMS034		RPMK
33	181519	14.7N 134.4E	PCN 1		DMS034		RODN
34	182034	20.5N 134.4E	PCN 5		DMS037		PGTW
35	182309	21.5N 133.8E	PCN 1	T5.0/6.0 /41.0/24HRS	DMS034		PGTW
36	200140	21.6N 133.8E	PCN 1	T7.0/7.0 /01.0/27HRS	DMS034		RPMK
37	200140	21.5N 133.6E	PCN 1	T6.0/6.0	DMS034	INIT JDS	RODN

38	200214	21.74	131.4E	PCN 1	DWCD14	ROUN	
39	200219	21.74	131.5E	PCN 1	DWCD14	PGTW	
40	200314	22.74	132.4E	PCN 2	DWCD17	PGTW	
41	201055	22.94	132.4E	PCN 4	DWCD14	RPBK	
42	201150	23.14	132.5E	PCN 5	DWCD14	PGTW	
43	201239	23.04	132.1E	PCN 5	DWCD14	PGTW	
44	201500	22.94	131.4E	PCN 2	DWCD14	RPBK	
45	201500	22.94	131.4E	PCN 1	DWCD14	ROUN	
46	201500	21.14	131.7E	PCN 1	DWCD14	PGTW	
47	202155	21.24	131.6E	PCN 3	T3.0/6.0 /W2.0/20HRC	RPBK	
48	202155	21.24	131.1E	PCN 3	DWCD17	PGTW	
49	210033	21.44	131.1E	PCN 3	T3.0/5.0 /W1.0/20HRC	ROUN	
50	210033	21.34	131.1E	PCN 3	T3.0/5.0 /50.0/25HRC	PGTW	
51	210121	21.44	130.4E	PCN 3	DWCD14	ROUN	
52	210121	21.44	130.4E	PCN 3	DWCD14	RPBK	
53	210121	21.54	130.4E	PCN 3	DWCD14	PGTW	
54	210200	21.54	130.4E	PCN 3	DWCD14	PGTW	
55	211036	24.34	129.4E	PCN 5	DWCD17	ROUN	
56	211036	24.74	129.7E	PCN 4	DWCD17	PGTW	
57	211220	24.64	129.6E	PCN 5	DWCD14	PGTW	
58	211316	24.54	129.3E	PCN 5	DWCD14	PGTW	
59	211441	24.34	129.2E	PCN 2	DWCD14	RPBK	
60	211442	24.34	129.2E	PCN 1	DWCD14	ROUN	
61	211442	24.74	129.0E	PCN 5	DWCD14	PGTW	
62	212135	24.54	128.2E	PCN 1	DWCD17	ROUN	
63	212135	24.44	128.1E	PCN 1	T3.0/5.0 /50.0/24HRC	RPBK	
64	212135	24.44	128.1E	PCN 2	DWCD17	PGTW	
65	220015	26.34	127.7E	PCN 3	T4.5/5.0 /W0.5/24HRC	DWCD14	ROUN
66	220015	26.44	127.7E	PCN 3	T4.5/4.5 /W0.5/24HRC	DWCD14	PGTW
67	220102	26.14	127.4E	PCN 3	DWCD14	ROUN	
68	220142	26.14	127.4E	PCN 3	DWCD14	PGTW	
69	220243	26.04	127.5E	PCN 3	DWCD14	RPBK	
70	220243	26.04	127.4E	PCN 3	DWCD14	ROUN	
71	221016	26.54	128.4E	PCN 6	DWCD17	ROUN	
72	221016	26.54	127.0E	PCN 6	DWCD17	PGTW	
73	221256	24.74	128.7E	PCN 3	DWCD14	PGTW	
74	221256	24.74	128.4E	PCN 5	DWCD14	ROUN	
75	221343	24.44	128.4E	PCN 4	DWCD14	RPBK	
76	221343	24.74	128.4E	PCN 5	DWCD14	RPBK	
77	221343	25.04	128.4E	PCN 5	DWCD14	ROUN	
78	221423	25.04	128.6E	PCN 5	DWCD14	PGTW	
79	222115	25.44	125.4E	PCN 3	DWCD17	PGTW	
80	222115	25.54	128.1E	PCN 3	DWCD17	ROUN	
81	222115	25.44	125.4E	PCN 2	DWCD17	RPBK	
82	222357	25.24	125.8E	PCN 5	T5.0/5.0	RPBK	
83	222357	24.44	125.5E	PCN 5	T3.0/5.0 /W0.5/24HRC	PGTW	
84	230224	24.54	125.2E	PCN 1	T3.0/5.0 /50.0/24HRC	RPBK	
85	230224	24.44	125.1E	PCN 1	T3.0/5.0 /W0.5/24HRC	DWCD14	ROUN
86	230224	24.44	125.3E	PCN 1	DWCD14	RPBK	
87	230305	24.54	125.1E	PCN 1	DWCD14	ROUN	
88	230955	27.24	121.4E	PCN 2	DWCD17	RPBK	
89	230955	27.54	121.4E	PCN 2	DWCD17	ROUN	
90	230955	27.54	124.0E	PCN 1	DWCD17	PGTW	
91	231136	27.34	121.7E	PCN 2	DWCD17	RPBK	
92	231238	27.64	121.7E	PCN 1	DWCD14	PGTW	
93	231238	27.74	121.7E	PCN 1	DWCD14	ROUN	
94	231324	27.44	121.6E	PCN 1	DWCD14	RPBK	
95	231324	27.44	121.7E	PCN 1	DWCD14	PGTW	
96	231547	27.44	121.3E	PCN 3	DWCD14	RPBK	
97	231547	27.54	121.3E	PCN 1	DWCD14	ROUN	
98	232236	29.44	121.2E	PCN 2	DWCD17	RPBK	
99	232236	29.74	121.0E	PCN 1	DWCD17	ROUN	
100	232338	24.54	122.7E	PCN 1	T4.0/5.0 /W1.0/24HRC	PGTW	
101	240120	24.94	122.1E	PCN 3	DWCD14	RPBK	
102	240205	29.04	122.7E	PCN 1	DWCD14	PGTW	
103	240205	29.04	122.5E	PCN 1	T4.0/5.0 /W1.0/24HRC	RPBK	
104	240205	29.04	122.6E	PCN 1	T3.0/6.0 /W0.5/24HRC	DWCD14	RPBK
105	240246	29.14	122.6E	PCN 1	DWCD14	RPBK	
106	240247	29.14	122.7E	PCN 1	T6.0/6.0 /W0.5/24HRC	ROUN	
107	241117	29.94	122.6E	PCN 3	DWCD17	RPBK	
108	241117	29.74	122.4E	PCN 4	DWCD14	PGTW	
109	241305	30.14	122.6E	PCN 3	DWCD14	ROUN	
110	241401	30.34	122.4E	PCN 3	DWCD14	RPBK	
111	241525	30.24	122.5E	PCN 3	DWCD14	RPBK	
112	241528	30.14	122.5E	PCN 3	DWCD14	ROUN	
113	242216	30.54	122.9E	PCN 3	T3.0/6.0 /W1.0/20HRC	RPBK	
114	242216	30.54	122.4E	PCN 3	DWCD17	ROUN	
115	240102	30.24	121.0E	PCN 3	T4.0/5.0 /W2.0/21HRC	RPBK	
116	240146	31.04	121.2E	PCN 3	T3.0/6.0 /W1.0/24HRC	PGTW	
117	240228	31.04	121.3E	PCN 3	DWCD14	RPBK	
118	240228	31.04	121.4E	PCN 3	T4.0/5.0 /W2.0/24HRC	ROUN	
119	241056	31.44	124.3E	PCN 3	DWCD17	RPBK	
120	241056	31.34	124.0E	PCN 3	DWCD17	ROUN	
121	241246	32.04	124.4E	PCN 5	DWCD14	RPBK	
122	241246	31.74	124.4E	PCN 5	DWCD14	PGTW	
123	241344	31.64	124.4E	PCN 3	DWCD14	RPBK	
124	241310	31.34	124.4E	PCN 5	DWCD14	PGTW	
125	241310	31.44	124.5E	PCN 3	DWCD14	ROUN	
126	241310	32.14	124.7E	PCN 5	DWCD14	RPBK	
127	242155	32.74	124.4E	PCN 3	T2.0/7.0 /W1.0/24HRC	DWCD14	RPBK
128	242155	32.54	124.1E	PCN 3	DWCD17	ROUN	
129	240045	32.44	121.5E	PCN 3	DWCD14	RPBK	
130	240127	33.64	124.2E	PCN 5	T2.0/7.0 /W1.0/24HRC	PGTW	
131	240210	32.84	124.4E	PCN 3	T2.0/7.0 /W2.0/24HRC	ROUN	
132	240210	31.74	124.5E	PCN 5	DWCD14	PGTW	
133	240210	32.34	124.7E	PCN 5	T2.0/7.0 /W2.0/25HRC	RPBK	
134	241036	34.44	124.4E	PCN 4	DWCD17	ROUN	
135	241036	31.24	124.1E	PCN 3	DWCD17	RPBK	

CI 0044

INII JDS

136	241227	34.4N	129.5E	PCN J	DM6034	RKSO
137	241227	34.4N	129.7E	PCN J	DM6034	PGTW
138	241325	34.3N	129.7E	PCN B	DM6034	RPBK
139	241451	34.3N	129.0E	PCN B	DM6034	RKSO
140	241451	34.2N	129.0E	PCN B	DM6034	RODM

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	TYPES	MSLP	MAX-SFC-WIND VEL/DIR/VRG	MAX-FLT-LVL-WIND DIR/VEL/DIR/VRG	ACFTY NAV/MET	EYE SHAPE	EYE ORIEN- DIAM/TATION	EYE TEMP (C) DIR/ IAW DP/SECT	WSW NO.
1	142341	14.4N 147.5E	700MM	7064	998	35 110 70	090 54 030	14 3 4			+14 +12 +12	2
2	170303	14.0N 147.7E	700MM	7043	995	35 360 15	060 46 300	90 3 10			+11 +11	2
3	170505	14.2N 147.2E	700MM	7024	994	40 090 16	180 46 090	14 4 10			+10 +11 +10	2
4	172048	14.3N 146.5E	700MM	7092	987	70 090 15	170 61 090	10 4 2	CIRCULAR	10	+11 +12 +10	26
5	140554	14.3N 136.2E	700MM	7107	956	55 270 10	070 84 260	4 1 3	CIRCULAR	6	+15 +11	4
6	140945	14.5N 137.4E	700MM	7117	956	65 320 5	340 90 330	4 2 2	CIRCULAR	5	+13 +18 +10	4
7	141932	17.7N 146.3E	700MM	7211	922	360	93 280	4 3 2			+18 +17	5
8	142143	17.9N 136.2E	700MM	7336	914	55 260 12	320 90 260	7 1 1	CIRCULAR	5	+14 +23 +18	5
9	141036	19.5N 136.4E	700MM	7295	909	280	92 170	14 4 3	CIRCULAR	7	+14 +15	6
10	141921	20.7N 136.3E	700MM	7121	889	70 060 15	270 108 180	4 4 2			+14 +18	7
11	142145	21.0N 136.0E	700MM	7091	887	70 060 15	340 110 270	4 4 2	CIRCULAR	5	+14 +16 +15	7
12	200500	22.1N 137.1E	700MM	7291	908	130 030 3	120 138 030	3 2 2			+18 +18	8
13	240943	27.5N 137.0E	700MM	7380	919	50 280 40	340 110 270	10 2 2	CIRCULAR	7	+18 +19 +15	8
14	242259	27.3N 131.2E	700MM	7279	940	100 020 30	020 84 120	14 4 4	CIRCULAR	10	+19 +18 +12	9
15	210300	23.5N 136.4E	700MM	7011	945	90 010 10	070 98 010	30 4 10	CIRCULAR	25	+18 +18 +14	9
16	210503	24.2N 136.5E	700MM	7013	945	100 360 10	260 75 170	40 10 5			+20 +15	10
17	210942	24.2N 136.2E	700MM	7014	944	100 360 10	340 76 270	30 4 2	CIRCULAR	30	+14 +18 +15	10
18	212206	24.2N 129.2E	700MM	7079	952	45 140 20	110 71 360	154 4 2			+14 +16 +16	11
19	250117	24.3N 127.4E	700MM	7079	951	45 150 15	140 81 260	30 4 2			+19 +16	11
20	250247	24.3N 127.6E	700MM	7084	951	35 030 35	120 78 030	120 4 2			+18 +17 +17	11
21	250550	24.2N 127.3E	700MM	7079	953	120	78 020	143 4 3			+16 +15	12
22	250959	24.3N 127.2E	700MM	7084	949	35 300 15	240 74 220	62 4 4	CIRCULAR	35	+14 +15 +15	12
23	251932	24.2N 126.2E	700MM	7034	948	140	91 050	90 2 8			+18 +15	13
24	252200	24.5N 125.9E	700MM	7067	946	55 120 150	180 75 120	90 3 10	CIRCULAR	20	+19 +18 +15	13
25	230500	24.8N 124.3E	700MM	7069	952	55 080 130	120 65 080	14 4 2			+15 +15	14
26	230918	27.1N 124.2E	700MM	7069	950	40 140 140	210 65 140	30 4 4	CIRCULAR	15	+16 +16 +15	14

RAJAW FIXES

FIX NO.	TIME (Z)	FIX POSITION	RADAR	ACFTY	EYE SHAPE	EYE DIAM	RADAR-CODE AS/NW TDOFF	COMMENTS	RADAR POSITION	STP WIND NO.
1	141535	17.1N 144.1E	LAND	FAIR				MFG WALL CLD	13.6N 144.9E	01218
2	141710	17.2N 144.9E	LAND	FAIR	ELLIPTICAL			AXIS 10/4	13.6N 144.9E	01218
3	141935	17.5N 144.5E	LAND	FAIR					13.6N 144.9E	01218
4	142010	17.5N 144.2E	LAND	FAIR	CIRCULAR	25		CNTR OPEN SW-N	13.6N 144.9E	01218
5	142135	17.8N 147.4E	LAND	FAIR	CIRCULAR	20		MFG WALL CLD OPEN SW AND NE	13.6N 144.9E	01218
6	210500	27.6N 136.3E	LAND				708/4 6////		26.1N 127.7E	47997
7	210700	26.0N 136.4E	LAND				708/2 53022		26.1N 127.7E	47997
8	210900	24.0N 136.2E	LAND				75/// 52709		26.1N 127.7E	47997
9	210900	24.2N 136.2E	LAND	GOOD		40			26.1N 127.7E	47997
10	210900	24.1N 136.1E	LAND	GOOD		40	75/// 53010		26.1N 127.7E	47997
11	210900	24.1N 136.1E	LAND	GOOD		40			26.1N 127.7E	47997
12	211000	24.1N 129.4E	LAND	GOOD		26			26.1N 127.7E	47997
13	211100	24.0N 129.4E	LAND			40	75/// 52412		26.1N 127.7E	47997
14	211100	24.1N 129.7E	LAND	FAIR		40			26.1N 127.7E	47997
15	211200	24.0N 129.4E	LAND			40	5///2 72611		26.1N 127.7E	47997
16	211200	24.1N 129.5E	LAND	FAIR		40			26.1N 127.7E	47997
17	211300	24.0N 129.3E	LAND			40	5///1 72710		26.1N 127.7E	47997
18	211300	24.1N 129.4E	LAND	GOOD		40			26.1N 127.7E	47997
19	211400	24.1N 129.2E	LAND			40	5///2 72707		26.1N 127.7E	47997
20	211400	24.1N 129.2E	LAND	GOOD		40			26.1N 127.7E	47997
21	211500	24.1N 129.1E	LAND			40	5///2 72806		26.1N 127.7E	47997
22	211500	24.1N 129.1E	LAND	POOR		40			26.1N 127.7E	47997
23	211500	24.2N 129.2E	LAND			40	5///2 70408		26.1N 127.7E	47997
24	211500	24.1N 129.4E	LAND	POOR		40			26.1N 127.7E	47997
25	211700	24.3N 129.4E	LAND			40	5///3 73107		26.1N 127.7E	47997
26	211700	24.2N 129.7E	LAND	POOR		40			26.1N 127.7E	47997
27	211800	24.1N 129.4E	LAND			40	75///3 73301		26.1N 127.7E	47997
28	211900	24.2N 129.5E	LAND	POOR		40			26.1N 127.7E	47997
29	211900	24.3N 129.7E	LAND			40	25///3 72904		26.1N 127.7E	47997
30	211910	24.2N 129.5E	LAND	POOR		40			26.1N 127.7E	47997
31	212000	24.3N 129.6E	LAND			40	4///1 72706		26.1N 127.7E	47997
32	212000	24.4N 129.5E	LAND	GOOD		40			26.1N 127.7E	47997
33	212100	24.3N 129.3E	LAND			40	4///1 72611		26.1N 127.7E	47997
34	212100	24.4N 129.3E	LAND	POOR		40			26.1N 127.7E	47997
35	212200	24.2N 129.2E	LAND			40	5///1 72609		26.1N 127.7E	47997
36	212200	24.3N 129.3E	LAND	POOR		40			26.1N 127.7E	47997
37	212300	24.3N 129.0E	LAND	POOR		40			26.1N 127.7E	47997
38	220000	24.3N 127.9E	LAND			40	5///3 72808		26.1N 127.7E	47997
39	220000	24.3N 127.9E	LAND	POOR		40			26.1N 127.7E	47997
40	220100	24.3N 127.7E	LAND	POOR		40			26.1N 127.7E	47997
41	220200	27.0N 127.5E	LAND			40	7///2 72710		26.1N 127.7E	47997
42	220300	24.2N 127.5E	LAND			40	7///2 72507		26.1N 127.7E	47997
43	250300	24.3N 127.2E	LAND	POOR		40			26.1N 127.7E	47997
44	220400	24.1N 127.2E	LAND			40	22704 5////		24.0N 123.3E	47997
45	220400	24.1N 127.4E	LAND			40	7///1 72511		26.1N 127.7E	47997
46	220500	24.1N 127.1E	LAND			40	4//// 50000		24.3N 124.2E	47918
47	220500	24.2N 127.2E	LAND			40	22814 53306		24.0N 125.3E	47997
48	220500	24.1N 127.3E	LAND			40	5///1 72405		26.1N 127.7E	47997





TROPICAL STORM KEN

CATELITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCR	UNSPAK CODE	SATELLITE	COMMENTS	SITE
1	012136	26.7N 133.0E	PCN 5		DMSP17	INIT JCS	PGTW
2	010115	26.4N 133.4E	PCN 5	11.0/1.0	DMSP14		PGTW
3	010200	26.2N 133.3E	PCN 5		DMSP14		PGTW
4	010200	26.2N 133.4E	PCN 4	11.7/1.0	DMSP14	INIT JCS	ROUN
5	011016	26.3N 133.4E	PCN 6		DMSP17		PGTW
6	011016	26.3N 133.2E	PCN 6		DMSP17		ROUN
7	011214	26.1N 133.5E	PCN 5		DMSP14		PGTW
8	011320	26.3N 132.7E	PCN 5		DMSP14		PGTW
9	011342	26.2N 132.1E	PCN 5		DMSP14		PGTW
10	012115	26.2N 132.2E	PCN 3	11.0/1.0 /50.0/20HRC	DMSP17		PGTW
11	020020	26.7N 131.7E	PCN 3		DMSP14		PGTW
12	020055	26.4N 131.4E	PCN 4		DMSP14		PGTW
13	020101	26.5N 132.1E	PCN 3		DMSP14		PGTW
14	020142	26.2N 132.2E	PCN 3	11.0/1.0 /50.0/20HRC	DMSP17		ROUN
15	020355	27.2N 131.3E	PCN 5		DMSP17		PGTW
16	021302	27.7N 131.1E	PCN 5		DMSP14		PGTW
17	021423	26.4N 131.2E	PCN 5		DMSP14		PGTW
18	022055	26.4N 131.4E	PCN 5	11.5/1.5	DMSP17	INIT JCS	RPHK
19	022055	26.5N 130.2E	PCN 5		DMSP17		PGTW
20	030002	26.1N 129.4E	PCN 5	12.5/2.5-011.5/27HRC	DMSP14		PGTW
21	030123	26.2N 129.4E	PCN 3		DMSP14		PGTW
22	030123	26.2N 129.4E	PCN 5		DMSP14		RPHK
23	030217	26.1N 129.4E	PCN 5	13.0/3.0-012.0/20HRC	DMSP14		ROUN
24	030217	26.2N 130.1E	PCN 5	13.0/3.0	DMSP14	INIT JCS	RKS1
25	030335	30.7N 130.4E	PCN 6		DMSP17		ROUN
26	030336	31.1N 130.4E	PCN 5		DMSP17		PGTW
27	031117	30.7N 130.4E	PCN 5		DMSP17		ROUN
28	031206	31.4N 131.0E	PCN 5		DMSP14		PGTW
29	031317	31.7N 131.4E	PCN 3		DMSP14		RPHK
30	031318	31.7N 131.0E	PCN 5		DMSP14		PGTW
31	031406	32.0N 131.4E	PCN 3		DMSP14		RKS0
32	031405	31.7N 131.2E	PCN 5		DMSP14		PGTW
33	031405	31.4N 131.3E	PCN 6		DMSP14		ROUN
34	031506	32.1N 131.3E	PCN 6		DMSP14		ROUN
35	031506	32.4N 131.7E	PCN 5		DMSP14		RKS0
36	032035	32.2N 132.4E	PCN 3		DMSP17		ROUN
37	032035	32.0N 132.2E	PCN 6		DMSP17		PGTW
38	032035	32.1N 132.1E	PCN 3		DMSP17		RKS0
39	032346	33.4N 132.4E	PCN 3	12.5/2.5-011.0/27HRC	DMSP14		RPHK
40	032346	33.4N 132.1E	PCN 3	11.0/2.0 /11.5/20HRC	DMSP14		PGTW
41	040128	34.3N 134.4E	PCN 6		DMSP14	FINALED BY	PGTW

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	TUUM4 HGT	DOS MSLP	MAX-SFC-WIND VFL/4RG/RNG	MAX-FLT-LVL-WIND DTW/FLT/0RD/0RC	ACCR	EYE SHAPE	EYE ORIENT-014W/014N	EYE TEMP (C) 014W/014N/014E	WSW NO.
1	012105	26.4N 132.1E	1500F1			60 830	40 170 33 080	65 2 5			+25 +25	1
2	020720	27.0N 131.0E	700MD		998	50 830	50 220 55 200	60 4 20	CIRCULAR	20	+10 +10 +10	2
3	022132	26.3N 131.4E	700MD		1008	988	15 830	38 080 120 2 4			+11 +12 + 8	4
4	030725	30.3N 130.4E	700MD		988	488	50 890	5 210 65 110	60 2 10		+14 +12 + 2	5
5	030713	30.7N 130.7E	700MD		974	988	50 180	10 210 65 130	60 2 14		+13 +12 + 2	5

RAJAN FIXES

FIX NO.	TIME (Z)	FIX POSITION	RADAR	ACCR	EYE SHAPE	EYE DIA	RADAR-CODE ARWAM TDDFF	COMMENTS	RADAR POSITION	SITE WIND NO.
1	012000	26.0N 130.4E	LAND				45/// 50113		28.4N 129.5E	47900
2	020700	26.7N 131.2E	LAND				45/// 51111		28.4N 129.5E	47900
3	020800	26.2N 131.2E	LAND				45/// 53512		28.4N 129.5E	47900
4	020900	27.1N 131.1E	LAND				45/// 53413		28.4N 129.5E	47900
5	021000	27.3N 130.4E	LAND				45/// 53113		28.4N 129.5E	47900
6	021100	27.3N 130.7E	LAND				45/// 52811		28.4N 129.5E	47900
7	021200	27.2N 130.6E	LAND				45/// 52300		28.4N 129.5E	47900
8	021300	26.4N 130.4E	LAND				45/// 51808		28.4N 129.5E	47900
9	021400	27.1N 130.8E	LAND				45/// 53512		28.4N 129.5E	47900
10	021500	27.2N 130.5E	LAND				45/// 53211		28.4N 129.5E	47900
11	021600	27.4N 130.4E	LAND				45/// 53511		28.4N 129.5E	47900
12	021700	27.4N 130.5E	LAND				45/// 50211		28.4N 129.5E	47900
13	021800	27.7N 130.5E	LAND				45/// 50106		28.4N 129.5E	47900
14	021900	27.4N 130.5E	LAND				45/// 53008		28.4N 129.5E	47900
15	022100	29.2N 130.4E	LAND				45/// 50211		28.4N 129.5E	47900
16	022200	28.4N 130.7E	LAND				45/// 50113		28.4N 129.5E	47900
17	022300	26.4N 130.4E	LAND				45/// 53308		28.4N 129.5E	47900
18	030000	26.4N 130.4E	LAND				45/// 53310		28.4N 129.5E	47900
19	030100	26.0N 130.2E	LAND				45/// 53212		28.4N 129.5E	47900
20	030200	26.2N 130.2E	LAND				45/// 53513		28.4N 129.5E	47900
21	030300	26.4N 130.3E	LAND				45/// 50210		28.4N 129.5E	47900
22	030400	26.4N 130.4E	LAND				45/// 51111		28.4N 129.5E	47900
23	030500	26.0N 130.4E	LAND				45/// 50122		30.4N 131.0E	47900
24	030500	26.0N 130.5E	LAND				45/// 50216		28.4N 129.5E	47900
25	031300	31.4N 131.1E	LAND				45/// 50208		33.4N 130.3E	47906



26	031400	31.4N	131.4E	LAND	PNOH			32.1M	131.5E	47444
27	031400	31.4N	131.3E	LAND		55741	50310	33.4M	130.3E	47446
28	031455	32.0N	131.0E	LAND	PNOH			32.1M	131.5E	47444
29	031500	32.0N	131.0E	LAND		65771	50319	36.3M	132.6E	47792
30	031500	31.2N	131.4E	LAND		65771	50319	33.6M	130.3E	47446
31	031500	32.1N	131.4E	LAND		65771	50211	34.3M	132.6E	47792
32	031500	32.1N	131.7E	LAND		65741	50319	33.6M	130.3E	47446
33	031602	32.1N	131.4E	LAND	PNOH			32.1M	131.5E	47444
34	031700	32.3N	131.7E	LAND		55771	50319	33.2M	132.6E	47446
35	031700	32.3N	131.7E	LAND		21601	50310	34.3M	132.6E	47792
36	031700	32.4N	131.9E	LAND		20601	50222	33.4M	130.3E	47446
37	031701	32.4N	131.7E	LAND	PNOH			32.1M	131.5E	47444
38	031755	32.7N	132.0E	LAND	FAIR			34.3M	132.6E	47792
39	031800	32.4N	131.9E	LAND		45771	50410	36.3M	132.6E	47792
40	031900	32.4N	132.0E	LAND		55771	50422	33.2M	132.6E	47446
41	031900	32.4N	131.9E	LAND		20641	50111	33.4M	130.3E	47446
42	031955	32.4N	132.2E	LAND	FAIR			33.7M	131.0E	47446
43	031900	32.2N	132.1E	LAND		71371	50222	34.3M	132.6E	47792
44	031900	32.2N	132.1E	LAND		55771	50319	33.2M	132.6E	47446
45	031955	32.2N	132.3E	LAND	PNOH			33.7M	131.0E	47446
46	032000	32.1N	132.4E	LAND		55771	50510	34.3M	132.6E	47792
47	032000	32.1N	132.2E	LAND		55771	50310	33.2M	132.6E	47446
48	032100	32.3N	132.4E	LAND		24411	50310	34.3M	132.6E	47792
49	032100	32.2N	132.4E	LAND		55771	50411	33.2M	132.6E	47446
50	032200	32.4N	132.4E	LAND		22441	50510	34.3M	132.6E	47792
51	032200	32.3N	132.7E	LAND		55771	50619	33.2M	132.6E	47446
52	032300	32.7N	133.2E	LAND		55752	50521	34.3M	132.6E	47792
53	032300	32.4N	133.1E	LAND		65771	50521	33.2M	132.6E	47446
54	032300	32.7N	133.1E	LAND		44701	50521	34.3M	132.6E	47792
55	040000	32.4N	133.4E	LAND		55750	50522	34.6M	133.6E	47773
56	040000	32.4N	133.5E	LAND		55772	50610	34.3M	132.6E	47792
57	040000	32.4N	133.6E	LAND		65771	50532	33.2M	132.6E	47446
58	040200	34.7N	133.4E	LAND		67772	50722	34.3M	132.6E	47792
59	040900	34.5N	134.2E	LAND		22442	50722	35.3M	133.7E	47446
60	040900	34.2N	134.1E	LAND		22442	50410	36.2M	135.1E	47705
61	040900	34.2N	134.0E	LAND		22441	70422	35.3M	133.7E	47446
62	041000	34.1N	134.7E	LAND		22442	70519	35.3M	133.7E	47446
63	041000	34.1N	134.6E	LAND		11772	50510	36.2M	135.1E	47705
64	041000	34.1N	134.6E	LAND		45441	50420	35.2M	137.0E	47446
65	041100	34.4N	134.2E	LAND		45442	50520	35.2M	137.0E	47446
66	041100	34.2N	134.0E	LAND		34707		37.7M	138.8E	47446
67	041100	34.2N	134.1E	LAND		11712	50720	36.2M	135.1E	47705
68	041200	34.4N	134.6E	LAND		45442	50527	35.2M	137.0E	47446
69	041200	34.5N	134.6E	LAND		21442	50630	36.2M	135.1E	47705
70	041200	34.4N	134.7E	LAND		40831	50637	37.7M	138.8E	47446
71	041300	34.4N	137.2E	LAND		34817	50620	37.7M	138.8E	47446
72	041300	34.4N	137.2E	LAND		41742	50638	36.2M	135.1E	47705
73	041500	34.5N	134.6E	LAND		12777	50330	35.3M	133.7E	47446

TYPHOON LOLA

CATELITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCR	UNIQUE CODE	SATELLITE	COMMENTS	SITE
1	021120	21.4N 151.3E	PCN 5		DMSD36		PGTW
2	021242	22.1N 151.0E	PCN 5		DMSD35		PGTW
3	022055	22.4N 150.9E	PCN 5	T1.0/1.0	DMSD37	INIT JDS	RPMK
4	022056	22.4N 151.1E	PCN 5		DMSD37		PGTW
5	022221	22.5N 151.3E	PCN 5		DMSD36		PGTW
6	020036	22.3N 151.1E	PCN 5	T2.0/2.0	DMSD30	INIT JDS	PGTW
7	020123	22.0N 151.3E	PCN 5	T1.0/1.0	DMSD36	INIT JDS	RODN
8	020123	21.0N 150.7E	PCN 5	T2.0/2.0	DMSD36	INIT JDS	RKSO
9	020123	22.5N 151.1E	PCN 5		DMSD36		PGTW
10	020336	22.7N 150.7E	PCN 5		DMSD37		PGTW
11	021103	22.0N 150.7E	PCN 5		DMSD36		PGTW
12	021136	22.1N 150.6E	PCN 5		DMSD30		PGTW
13	021405	22.5N 150.7E	PCN 5		DMSD36		RKSO
14	021405	22.5N 150.4E	PCN 5		DMSD36		PGTW
15	022035	22.5N 150.0E	PCN 5		DMSD37		RODN
16	022035	22.2N 150.5E	PCN 5	T3.0/3.0 /01.0/20HRS	DMSD37		PGTW
17	022203	22.3N 149.1E	PCN 5		DMSD37		PGTW
18	040017	22.4N 146.9E	PCN 3		DMSD30	BEGINNING OF FYF	PGTW
19	040104	22.4N 140.0E	PCN 5	T3.0/3.0 /02.0/26HRS	DMSD36		RODN
20	040105	21.7N 140.4E	PCN 3	T3.5/3.5 /01.5/26HRS	DMSD36		RKSO
21	040105	22.5N 140.4E	PCN 5		DMSD36		PGTW
22	040116	24.1N 147.4E	PCN 3		DMSD37		PGTW
23	041117	24.1N 147.7E	PCN 5		DMSD30		PGTW
24	041226	24.4N 147.5E	PCN 3		DMSD36		PGTW
25	041346	24.5N 147.4E	PCN 3		DMSD36		PGTW
26	041346	24.7N 147.5E	PCN 5		DMSD36		RKSO
27	041346	24.7N 147.6E	PCN 3		DMSD36		RODN
28	042015	24.4N 144.7E	PCN 1		DMSD37		RODN
29	042015	24.2N 144.7E	PCN 1	T5.0/5.0 /02.0/26HRS	DMSD37		PGTW
30	042327	24.1N 144.7E	PCN 1		DMSD30		PGTW
31	042354	24.5N 144.4E	PCN 2	T5.0/5.0 /02.0/23HRS	DMSD30		RODN
32	042358	24.2N 144.5E	PCN 1		DMSD30		PGTW
33	050046	24.1N 144.4E	PCN 1		DMSD36		RODN
34	050046	24.2N 144.4E	PCN 1	T4.5/4.5 /01.0/26HRS	DMSD36		RKSO
35	050046	24.1N 144.5E	PCN 1		DMSD36		PGTW
36	050956	24.0N 144.4E	PCN 1		DMSD37		PGTW

37	051208	26.7N	166.5E	PCN 1		DWSP74		PSTW
38	051240	26.7N	166.6E	PCN 1		DWSP70		PSTW
39	051320	26.5N	166.4E	PCN 1		DWSP75		PSTW
40	051320	26.2N	166.3E	PCN 2		DWSP75		RODM
41	051355	27.0N	166.3E	PCN 2		DWSP77		PSTW
42	052309	27.3N	166.6E	PCN 1	T5.0/5.0-/50.0/21HRC	DWSP76		PSTW
43	060020	27.4N	166.6E	PCN 1		DWSP75		PSTW
44	060121	27.5N	166.6E	PCN 1		DWSP70		PSTW
45	060121	27.5N	166.5E	PCN 1	T6.5/6.5	DWSP70	INIT OBS	RPHK
46	060835	27.7N	166.2E	PCN 4		DWSP77		PSTW
47	061150	24.7N	166.0E	PCN 1		DWSP76		PSTW
48	061221	24.9N	166.2E	PCN 1		DWSP70		RODM
49	061221	24.7N	166.2E	PCN 1		DWSP70		PSTW
50	061309	24.9N	166.0E	PCN 1		DWSP74		PSTW
51	061335	24.5N	166.0E	PCN 2		DWSP77		PSTW
52	070009	29.7N	166.2E	PCN 2		DWSP75		PSTW
53	070101	30.1N	166.4E	PCN 1	T6.5/6.5-	DWSP70		RODM
54	070102	30.0N	166.4E	PCN 3	T3.5/6.5 /W1.5/24HRC	DWSP70		PSTW
55	070357	30.7N	166.5E	PCN 1		DWSP77		PSTW
56	071137	30.4N	166.4E	PCN 1		DWSP76		PSTW
57	071202	31.7N	166.2E	PCN 5		DWSP70		RODM
58	071202	31.7N	167.0E	PCN 5		DWSP70		PSTW
59	071432	32.0N	167.1E	PCN 3		DWSP75		PSTW
60	072056	33.7N	166.2E	PCN 3	T2.0/3.0 /W1.5/20HRC	DWSP77		PSTW
61	072233	34.0N	166.0E	PCN 3		DWSP76		PSTW
62	080043	34.2N	166.9E	PCN 3	T2.5/3.5 /W2.0/24HRC	DWSP70		RODM
63	080043	34.7N	166.9E			DWSP70		PSTW

ATCRAFT FIXES

FLX NO.	TIME (Z)	FIX POSITION	FLT LVL	70043 HGT	DBS MSLP	MAX-SFC-WIND VEL/3RG/4NG	MAX-FLY-LVL-WIND WIND/VEL/DRG/4NG	ACFT NAV/HFT	EYE SHAPE	EYE ORIEN- DIRM/TATION	EYE TEMP (C) OUT/ IN/ DP/5GT	WSN NO.
1	031932	23.4N	169.7E	700MM	3044		040 45 270 15	H 1			+14 +13	4
2	032046	23.5N	169.9E	700MM	3001	900	45 090 20 170 49 080 40	A 2	ELLIPTICAL	25 20 170	+11 +15 +13	4
3	040809	24.0N	169.1E	700MM	2911	978	45 120 15 360 71 320 30	2 4	CIRCULAR	15	+09 +16 +12	5
4	041913	24.4N	167.0E	700MM	2911		35 270 30 240 50 240	5 4			+17 + 6	5
5	042118	25.1N	166.9E	700MM	2751	965	75 350 15 020 68 330	4 10	CIRCULAR	30	+11 +15 + 8	6
6	050506	25.7N	166.9E	700MM	2743		40 300 10 310 87 230 10	3 5	CIRCULAR		+19 +10	7
7	050808	25.9N	166.9E	700MM	2750	959	40 210 50 250 86 180 10	2 3	CIRCULAR	20	+12 +19 +12	7
8	051343	27.0N	166.4E	700MM	2665		45 250 50 360 82 300 20	4 1	ELLIPTICAL	15 12	+23	8
9	052120	27.1N	166.5E	700MM	2656		45 070 40 070 45 360 30	4 1	ELLIPTICAL	17 12 030	+14 +17	8
10	060610	27.3N	166.5E	700MM	2683	953	70 280 20 040 71 290 50	2 5			+19 +13	9
11	060850	28.1N	166.4E	700MM	2744	960	50 080 50 180 72 090 95	2 5	CIRCULAR	20	+19 +17 +15	9
12	061343	28.7N	166.3E	700MM	2864		75 080 5 040 60 330 30	4 0	CIRCULAR		+16 +12	10
13	062137	29.7N	166.2E	700MM	2890	984	75 080 5 210 60 170 30	4 0	CIRCULAR	30	+11 +15 +14	10
14	070539	30.7N	166.4E	700MM	2907		50 260 50 020 57 310 30	3 0			+15 +12	11
15	070929	31.2N	166.4E	700MM	2924	974	70 040 10 200 77 170 65	2 3			+ 4 +15 +12	11
16	071806	31.2N	167.9E	700MM	2942		45 120 40 240 57 120 30	4 2			+19 +12	12
17	072105	33.4N	169.1E	700MM	3004		40 060 160 170 49 060 125	4 5			+16 +17 +12	12

TYPHOON MAC

SATELLITE FIXES

FIX NO.	TIME (Z)	FTA POSITION	ACCR	UVSSAK CODE	SATELLITE	COMMENTS	SITE
1	140008	11.9N 134.5E	PCN 5	T0.0/0.0	DMS03A	INIT 045	PGTW
2	140030	11.9N 134.5E	PCN 5		DMS03A		PGTW
3	140917	11.5N 134.9E	PCN 5		DMS03A		PGTW
4	141250	11.9N 134.7E	PCN 5		DMS03A		PGTW
5	141404	12.0N 134.2E	PCN 5		DMS03A		PGTW
6	142157	12.2N 133.6E	PCN 5	T0.0/0.0	DMS03A	INIT 045	RPNK
7	142350	12.2N 133.0E	PCN 5	T1.0/1.0 /01.0/24HRC	DMS03A		PGTW
8	141037	12.4N 131.6E	PCN 6		DMS03A		RPNK
9	141232	12.9N 130.8E	PCN 5		DMS03A		PGTW
10	141252	12.5N 130.0E	PCN 5		DMS03A		PGTW
11	141346	12.2N 131.9E	PCN 6		DMS03A		RODN
12	141327	12.2N 131.0E	PCN 5		DMS03A		RPNK
13	142136	12.8N 129.1E	PCN 5	T0.5/0.5 /00.5/24HRC	DMS03A		PGTW
14	142137	13.0N 129.6E	PCN 5		DMS03A		PGTW
15	142332	13.3N 129.0E	PCN 5	T1.0/1.0 /00.0/24HRC	DMS03A		PGTW
16	140133	13.5N 128.8E	PCN 5		DMS03A		PGTW
17	140227	13.4N 128.7E	PCN 5		DMS03A		PGTW
18	141017	13.4N 127.3E	PCN 5		DMS03A		RPNK
19	141017	13.2N 127.0E	PCN 5		DMS03A		PGTW
20	141214	13.2N 126.3E	PCN 5		DMS03A		PGTW
21	142117	13.1N 125.2E	PCN 6		DMS03A		PGTW
22	170114	13.6N 125.4E	PCN 5	T2.5/2.5 /01.5/24HRC	DMS03A		RPNK
23	170114	13.6N 125.4E	PCN 5	T2.0/2.0 /01.5/24HRC	DMS03A		PGTW
24	170357	13.9N 125.3E	PCN 5		DMS03A		RPNK
25	171355	13.9N 125.0E	PCN 5		DMS03A		RODN
26	171356	13.4N 125.2E	PCN 5		DMS03A		RPNK
27	172238	13.9N 124.4E	PCN 6		DMS03A		PGTW
28	180038	13.4N 123.8E	PCN 5	T3.5/3.5 /01.0/24HRC	DMS03A		RPNK
29	180237	13.7N 123.4E	PCN 3	T3.5/3.5 /01.5/24HRC	DMS03A	INIT 045	RODN
30	180237	13.4N 123.4E	PCN 3	T3.5/3.5	DMS03A		RPNK
31	181118	13.2N 122.3E	PCN 4		DMS03A		RODN
32	181118	13.1N 122.7E	PCN 6		DMS03A		PGTW
33	181320	13.2N 122.2E	PCN 5		DMS03A		RPNK
34	181336	13.2N 122.3E	PCN 5		DMS03A		PGTW
35	181327	13.3N 122.2E	PCN 5		DMS03A		RPNK
36	182218	13.7N 121.5E	PCN 6		DMS03A		PGTW
37	182218	13.5N 121.4E	PCN 6		DMS03A		PGTW
38	180020	13.4N 121.1E	PCN 5	T2.5/3.5 /01.0/24HRC	DMS03A		RODN
39	180218	13.9N 120.7E	PCN 5	T2.5/3.0 /01.0/24HRC	DMS03A		RPNK
40	180218	13.2N 120.8E	PCN 5	T2.5/3.5 /01.0/24HRC	DMS03A		RODN
41	181058	13.7N 120.6E	PCN 6		DMS03A	PSOL 2ND CNTN AT 153N 1206E	RPNK
42	181058	13.7N 119.7E	PCN 5		DMS03A		RODN
43	181302	13.5N 118.8E	PCN 5		DMS03A		PGTW
44	181313	13.2N 118.6E	PCN 5		DMS03A		RODN
45	181317	13.7N 119.3E	PCN 5		DMS03A		RPNK
46	181318	13.5N 118.8E	PCN 5		DMS03A		PGTW
47	182157	14.5N 118.4E	PCN 5		DMS03A		RODN
48	182157	14.7N 117.8E	PCN 5		DMS03A		RPNK
49	182157	13.9N 116.2E	PCN 6		DMS03A		RODN
50	200144	16.5N 118.8E	PCN 5	T1.0/2.0 /01.5/24HRC	DMS03A		PGTW
51	200159	16.4N 118.9E	PCN 3	T2.0/2.0 /00.5/24HRC	DMS03A		RPNK
52	200159	16.4N 118.8E	PCN 3	T1.5/2.5 /01.0/24HRC	DMS03A		PGTW
53	201038	17.5N 118.5E	PCN 5		DMS03A		PGTW
54	201244	17.5N 117.7E	PCN 5		DMS03A		RPNK
55	201439	17.7N 117.5E	PCN 6		DMS03A		RODN
56	201440	17.4N 118.3E	PCN 5		DMS03A		PGTW
57	202137	18.4N 117.3E	PCN 5		DMS03A		RODN
58	202319	18.4N 117.7E	PCN 5		DMS03A		RPNK
59	210114	18.9N 117.3E	PCN 5	T1.0/1.0 /50.0/24HRC	DMS03A		RODN
60	210126	18.7N 117.7E	PCN 5	T1.0/2.0 /01.0/24HRC	DMS03A		RPNK
61	200140	18.9N 117.2E	PCN 5	T1.0/1.5 /50.0/24HRC	DMS03A		PGTW
62	210321	19.7N 116.8E	PCN 5		DMS03A		RODN
63	211018	19.4N 117.4E	PCN 5		DMS03A		PGTW
64	211421	19.4N 117.1E	PCN 5		DMS03A		RPNK
65	211421	19.4N 116.9E	PCN 5		DMS03A		RODN
66	212258	19.4N 116.6E	PCN 5	T2.0/2.0 /01.0/24HRC	DMS03A		RPNK
67	212258	20.4N 116.4E	PCN 5		DMS03A		RODN
68	200108	20.4N 116.6E	PCN 5		DMS03A		RPNK
69	200302	20.4N 116.4E	PCN 5	T3.0/3.0 /02.0/24HRC	DMS03A		RODN
70	200302	20.4N 116.1E	PCN 5		DMS03A		RPNK
71	201139	20.3N 116.8E	PCN 5		DMS03A		RODN
72	201402	20.4N 116.9E	PCN 5		DMS03A		RODN
73	201402	21.3N 116.2E	PCN 5		DMS03A		RPNK
74	202238	21.4N 116.7E	PCN 5	T2.0/2.0 /50.0/24HRC	DMS03A		RPNK
75	210050	21.4N 116.5E	PCN 5	T2.5/3.0 /00.5/24HRC	DMS03A		RODN
76	210050	21.5N 116.5E	PCN 5	T2.5/2.5	DMS03A	INIT 045	PGTW
77	210243	21.5N 116.1E	PCN 3		DMS03A		RODN
78	210243	21.0N 117.9E	PCN 5		DMS03A		RPNK
79	211118	22.2N 117.4E	PCN 6		DMS03A		RPNK
80	211119	22.1N 117.9E	PCN 6		DMS03A		RODN
81	211342	22.1N 117.6E	PCN 5		DMS03A		RPNK
82	211343	22.4N 117.3E	PCN 6		DMS03A		RODN
83	211343	22.1N 117.8E	PCN 5		DMS03A		PGTW
84	212218	22.5N 117.8E	PCN 5		DMS03A		RPNK
85	240031	22.4N 117.9E	PCN 5		DMS03A		RPNK
86	240224	22.4N 117.8E	PCN 3	T1.5/2.5 /01.0/24HRC	DMS03A		RODN

ATCRAFT FIXES

FIA NO.	TIME (Z)	FIX POSITION	FLY IVE	Y0042 HRT	OBS MSLP	MAX-SFC-MWD VZL/RRG/MWG	MAX-FLI-LVL-4ND ITH/VEL/GND/4ND	ACRY NAV/MFT	EYE SHAPE	EYE ORIEN-314/TATION	BYE TEMP (C) DRY/W DPT/ACT	WSN WIND
1	140503	13.7N 124.0E	700MM	3054	995	40 050 10	170 68 050 10	3 4			+10 +15 +11	2
2	170507	13.5N 124.0E	700MM	3043	994	30 110 30	160 58 050 40	4 4		+13 +11	4	
3	170518	13.3N 124.5E	700MM	3056	994	30 160 30	160 52 300 30	4 20		+10 +16 + 8	4	
4	180511	13.5N 122.5E	700MM	3061		40 160 75	090 65 300 50	2 4		+11 +15 + 9	7	
5	181436	13.4N 121.9E	700MM	3032			300 65 230 25	1 4		+11 +11	6	
6	182042	13.5N 121.7E	700MM	3094			300 27 250 50	1 5		+10 +11 +11	7	
7	190929	14.7N 120.3E	700MM	3101		20 310 30	090 28 050 24	1 2		+11 + 4	10	
8	200309	14.2N 119.1E	700MM	3104	1005	40 350 25						
9	200300	17.4N 110.0E	700MM	3087	1000	40 070 15	130 31 050 15	2 4		+11 +13 + 8	12	
10	201433	17.3N 114.1E	700MM	3081			110 60 300 120	6 5		+12 +10	14	
11	202151	14.1N 114.1E	700MM	3087	997	20 090 30	150 24 050 60	4 4		+10 +15 + 9	14	
12	210619	14.1N 114.0E	700MM	3093	998	40 350 10	050 20 300 45	10 10				15
13	210904	14.2N 117.5E	1500FT		999	40 070 60	110 37 070 40	20 1		+25 +26 28	15	
14	212100	21.0N 114.1E	1500FT									16

RAJAH FIXES

FIA NO.	TIME (Z)	FIX POSITION	HADAR	ACRY	EYE SHAPE	EYE DIAM	RAJAH-CODE 4SWAN TDDFF	COMMENTS	HADAR POSITION	CTF WIND NO.
1	171959	13.7N 124.3E	ACFT							54000
2	172300	13.8N 123.9E	LAND				10910	////	14.1N 123.0E	08040
3	172300	14.5N 123.5E	LAND				6077	////	16.3N 120.6E	08371
4	180300	13.3N 122.0E	LAND				2077	52110	14.1N 123.0E	08040
5	181030	13.7N 122.0E	LAND				2577	////	22.3N 114.2E	45004
6	181100	13.6N 122.0E	LAND				1067	////	16.3N 120.6E	08371
7	181100	13.7N 122.0E	LAND				2577	////	16.3N 120.6E	08371
8	181200	13.5N 122.7E	LAND				1167	////	16.3N 120.6E	08371
9	181300	13.6N 122.7E	LAND				1047	////	16.3N 120.6E	08371
10	181500	13.6N 122.0E	LAND				1057	////	16.3N 120.6E	08371
11	181530	13.5N 122.3E	LAND				7077	7277	14.1N 123.0E	08040
12	181540	13.6N 122.5E	LAND				1177	52705	16.3N 120.6E	08371
13	182145	13.4N 121.0E	LAND	FAIR	CIRCULAR	15			15.2N 120.6E	08377
14	182230	13.8N 121.5E	LAND	FAIR	CIRCULAR	15			15.2N 120.6E	08377
15	182255	13.8N 121.4E	LAND	FAIR	CIRCULAR	15			15.2N 120.6E	08377
16	181205	15.1N 120.5E	LAND	POUR	CIRCULAR	5			15.2N 120.6E	08377
17	181300	15.2N 120.2E	LAND	POUR	CIRCULAR	5			16.3N 120.6E	08371
18	181300	14.7N 120.2E	LAND						15.2N 120.6E	08377
19	181335	15.1N 120.0E	LAND	POUR		5			16.3N 120.6E	08371
20	181400	15.0N 120.0E	LAND						15.2N 120.6E	08377
21	182200	14.0N 110.0E	LAND				1067	1067	16.3N 120.6E	08371
22	200000	14.3N 110.0E	LAND				1067	////	16.3N 120.6E	08371
23	200040	14.4N 110.5E	LAND				1266	52914	16.3N 120.6E	08371
24	200100	14.6N 114.0E	LAND				1057	53218	16.3N 120.6E	08371
25	200100	17.5N 114.5E	LAND				1067	5777	16.3N 120.6E	08371
26	200130	14.7N 114.7E	LAND				1047	42916	16.3N 120.6E	08371
27	200300	14.2N 114.9E	LAND				1057	6307	16.3N 120.6E	08371
28	200500	17.0N 114.0E	LAND				1080	6777	16.3N 120.6E	08371
29	200700	17.2N 114.4E	LAND				1092	5777	16.3N 120.6E	08371
30	200900	17.3N 114.7E	LAND				1067	5777	16.3N 120.6E	08371
31	200900	17.3N 114.7E	LAND				1067	5777	16.3N 120.6E	08371
32	201200	17.4N 114.0E	LAND				4567	6777	16.3N 120.6E	08371
33	202000	20.5N 114.0E	LAND				6777	////	22.3N 114.2E	45004
34	202000	20.5N 114.0E	LAND				6777	////	22.3N 114.2E	45004
35	202000	20.5N 114.0E	LAND				6777	////	22.3N 114.2E	45004
36	202000	20.5N 114.0E	LAND				6777	////	22.3N 114.2E	45004
37	202100	20.9N 114.5E	LAND				6777	////	22.3N 114.2E	45004
38	202100	20.9N 114.5E	LAND				40013	57700	22.3N 114.2E	45004
39	202100	20.9N 114.5E	LAND				40013	54000	22.3N 114.2E	45004
40	202100	21.2N 114.7E	LAND				40523	53100	22.3N 114.2E	45004
41	202300	21.4N 114.0E	LAND				40523	53087	22.3N 114.2E	45004
42	200000	21.4N 114.5E	LAND				40523	53081	22.3N 114.2E	45004
43	202000	21.4N 114.3E	LAND				40542	32900	22.3N 114.2E	45004
44	203000	21.5N 114.1E	LAND				6777	52900	22.3N 114.2E	45004
45	205000	21.7N 117.0E	LAND				6777	52900	22.3N 114.2E	45004
46	206000	21.7N 117.7E	LAND				6777	52903	22.3N 114.2E	45004
47	201200	21.3N 117.0E	LAND				6777	////	22.3N 114.2E	45004
48	201500	22.3N 117.0E	LAND				6777	////	22.3N 114.2E	45004
49	201900	22.3N 117.3E	LAND				6777	////	22.3N 114.2E	45004
50	202000	22.3N 117.0E	LAND				40012	////	22.3N 114.2E	45004
51	202100	22.3N 117.0E	LAND				6777	////	22.3N 114.2E	45004
52	202200	22.3N 117.0E	LAND				6777	////	22.3N 114.2E	45004
53	200000	22.3N 117.7E	LAND				6777	////	22.3N 114.2E	45004
54	200100	22.3N 117.0E	LAND				6777	////	22.3N 114.2E	45004
55	200300	22.3N 117.0E	LAND				6777	////	22.3N 114.2E	45004

TROPICAL STORM NANCY

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACFT	UVIRAK CODE	SATELLITE	COMMENTS	SITE
1	182218	18.3N 111.9E	PCN 6		DMS037		PBTW
2	182218	18.1N 111.5E	PCN 6		DMS037		RPNK
3	180218	18.4N 111.2E	PCN 5	T1.0/1.0	DMS034	INIT JMS	RPNK
4	180218	18.0N 112.0E	PCN 5	T3.0/3.0	DMS039	INIT JMS	ROON
5	181058	18.4N 110.8E	PCN 4		DMS037		RPNK
6	181058	18.2N 110.7E	PCN 3		DMS037		ROON
7	181459	18.1N 110.4E	PCN 3		DMS030	EYE WANDING POSSIBLE	RPNK
8	181459	18.5N 110.5E	PCN 4		DMS030		KGWC
9	182338	18.6N 109.5E	PCN 4		DMS037		KGWC
10	182339	19.0N 110.0E	PCN 4	T3.0/3.0 /02.0/21HRC	DMS030		RPNK
11	200144	18.0N 109.4E		T3.0/3.0 /50.0/24HRC	DMS034		ROON
12	200340	18.6N 109.8E	PCN 3		DMS034		RPNK
13	201219	18.7N 109.2E	PCN 4		DMS037		RPNK
14	201219	18.3N 108.6E	PCN 4		DMS037		KGWC
15	201439	18.6N 108.7E	PCN 4		DMS030		RPNK
16	201640	18.6N 108.4E	PCN 3		DMS039		ROON
17	202319	17.5N 108.3E	PCN 5		DMS037		ROON
18	202319	18.2N 108.6E	PCN 5	T2.5/3.0 /40.5/24HRC	DMS037		RPNK
19	210108	17.6N 107.9E	PCN 5		DMS034		RPNK
20	210126	18.2N 108.2E	PCN 5		DMS034		RPNK
21	210321	17.7N 107.9E	PCN 3	T4.0/4.0-701.0/24HRC	DMS034		ROON
22	210321	18.1N 108.1E	PCN 5		DMS030		RPNK
23	211159	18.1N 108.1E	PCN 4		DMS037		RPNK
24	211421	17.3N 107.4E	PCN 3		DMS034		ROON
25	211421	17.3N 107.9E	PCN 3		DMS030		RPNK
26	212258	17.3N 107.3E	PCN 5		DMS037		ROON
27	212258	17.6N 107.9E	PCN 5	T1.5/2.5 /41.0/24HRC	DMS037		RPNK
28	220302	17.3N 107.2E	PCN 3	T4.0/4.0-750.0/24HRC	DMS030		ROON
29	220302	17.5N 108.4E	PCN 3		DMS034		RPNK
30	221139	18.4N 108.6E	PCN 3		DMS037		ROON
31	221139	18.4N 108.6E	PCN 6		DMS037		RPNK
32	221402	18.4N 108.5E	PCN 5		DMS030		ROON
33	221402	18.4N 108.1E	PCN 5		DMS034		RPNK

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	WFAREEST DATA (NM)	COMMENTS
1	171200	18.0N 111.0E	15	120	
2	180000	17.5N 111.5E	15	90	
3	181200	18.0N 111.5E	15	60	
4	180000	18.0N 111.2E	20	120	
5	181200	18.3N 110.7E	25	120	
6	200000	18.5N 109.5E	25	50	
7	201200	18.1N 108.5E	10	20	
8	210000	17.2N 108.4E	20	70	
9	211200	17.0N 108.0E	5	20	
10	220000	17.0N 107.0E	5	70	
11	220500	18.3N 108.0E	25	120	
12	221200	17.0N 107.0E	5	120	
13	240000	18.3N 108.0E	16	120	
14	240000	18.3N 108.0E	17	120	
15	240000	18.7N 109.5E	10	60	

TYPHOON OWEN

SATELLITE FIXES

FIA NO.	TIME (Z)	FIX POSITION	ACCRY	DVTRAK CODE	SATELLITE	COMMENTS	SITE
1	210140	17.7N 130.4E	PCN 5	T1.0/1.0	DMSP34	INIT JCS	PGTW
2	211225	11.4N 130.4E	PCN 5		DMSP34		PGTW
3	212117	10.4N 130.4E	PCN 5		DMSP37		PGTW
4	212326	11.3N 130.0E	PCN 5	T2.0/2.0 /01.0/23HRS	DMSP34		PGTW
5	220120	11.0N 130.7E	PCN 5		DMSP34		PGTW
6	220357	11.5N 137.2E	PCN 5		DMSP47		PGTW
7	221209	11.5N 130.4E	PCN 5		DMSP34		PGTW
8	221220	11.5N 130.5E	PCN 5		DMSP34		PGTW
9	221220	11.5N 130.7E	PCN 5		DMSP34		RODN
10	222057	11.0N 130.9E	PCN 5		DMSP37		PGTW
11	222308	11.0N 130.7E	PCN 5		DMSP34		PGTW
12	230102	11.0N 130.4E	PCN 5	T0.0/0.0	DMSP34	INIT JCS	RPMK
13	230102	12.4N 130.5E	PCN 5	T2.0/2.0 /50.0/24HRS	DMSP34		PGTW
14	230437	12.4N 130.6E	PCN 5		DMSP37		PGTW
15	231201	13.7N 130.2E	PCN 5		DMSP34		PGTW
16	232036	14.5N 130.5E	PCN 5		DMSP37		PGTW
17	240031	15.5N 130.7E	PCN 5	T2.0/2.0 /02.0/23HRS	DMSP34		RPMK
18	240032	16.7N 130.0E	PCN 5		DMSP34		PGTW
19	240042	16.3N 130.0E	PCN 3	T3.0/3.0 /01.7/24HRS	DMSP34		PGTW
20	240043	16.9N 130.7E	PCN 3	T3.0/3.0	DMSP34	INIT JCS	RODN
21	240417	14.2N 131.7E	PCN 5		DMSP37		PGTW
22	240917	10.7N 131.3E	PCN 5		DMSP37		RODN
23	241311	13.4N 131.3E	PCN 3		DMSP34		RPMK
24	241314	13.3N 131.7E	PCN 5		DMSP34		PGTW
25	241324	13.2N 132.7E	PCN 5		DMSP34		PGTW
26	241324	13.1N 133.1E	PCN 5		DMSP34		RODN
27	242127	20.3N 131.2E	PCN 3	T4.0/4.0 /02.0/23HRS	DMSP37		RPMK
28	242128	20.7N 130.4E	PCN 3		DMSP37		PGTW
29	242156	20.4N 130.4E	PCN 3		DMSP47		RODN
30	250014	21.0N 130.8E	PCN 3	T4.5/4.5 /01.5/24HRS	DMSP34		PGTW
31	250205	21.3N 130.6E	PCN 3		DMSP34		PGTW
32	250205	21.2N 130.5E	PCN 1	T4.5/4.5 /01.5/25HRS	DMSP34		RODN
33	251038	21.3N 129.7E	PCN 1		DMSP37		PGTW
34	251039	21.3N 129.7E	PCN 1		DMSP37		RODN
35	251256	22.0N 129.8E	PCN 1		DMSP34		PGTW
36	251304	22.4N 129.4E	PCN 2		DMSP34		RPMK
37	251305	22.0N 129.7E	PCN 1		DMSP34		RODN
38	252137	23.1N 129.2E	PCN 1		DMSP37		PGTW
39	252147	22.3N 129.2E	PCN 1	T5.5/5.5 /01.5/24HRS	DMSP37		RPMK
40	260145	23.3N 129.4E	PCN 1		DMSP34		RPMK
41	260146	23.3N 129.1E	PCN 1	T6.0/6.0 /01.5/24HRS	DMSP34		RODN
42	260146	23.3N 129.0E	PCN 1	T6.0/6.0 /01.5/25HRS	DMSP34		PGTW
43	261318	23.3N 129.2E	PCN 1		DMSP37		PGTW
44	261318	23.3N 129.2E	PCN 1		DMSP37		RODN
45	261328	23.4N 129.3E	PCN 1		DMSP34		PGTW
46	261328	23.7N 129.3E	PCN 1		DMSP34		RODN
47	261246	23.8N 129.1E	PCN 1		DMSP34		RPMK
48	261246	23.3N 129.3E	PCN 3		DMSP34	EYE NOT VISIBLE	PGTW
49	261246	24.0N 129.2E	PCN 3		DMSP34		RPMS
50	262117	24.5N 129.5E	PCN 1		DMSP37		PGTW
51	262117	24.3N 129.5E	PCN 1		DMSP47		RODN
52	262339	24.7N 129.5E	PCN 1	T5.0/5.0 /01.0/23HRS	DMSP34		PGTW
53	262339	24.4N 129.4E	PCN 1	T5.0/5.0 /01.0/23HRS	DMSP34		RODN
54	270127	24.8N 129.5E	PCN 1	T6.0/6.0 /00.5/24HRS	DMSP34		RPMK
55	270127	24.0N 129.5E	PCN 1		DMSP34		PGTW
56	270127	24.3N 129.3E	PCN 1		DMSP34		RODN
57	270358	25.7N 129.6E	PCN 1		DMSP37		RODN
58	270358	25.3N 129.4E	PCN 1		DMSP47		PGTW
59	271220	26.1N 129.8E	PCN 1		DMSP34		PGTW
60	271226	26.0N 129.4E	PCN 1		DMSP34		RPMK
61	271227	26.1N 129.6E	PCN 1		DMSP34		PGTW
62	271227	25.9N 129.5E	PCN 1		DMSP34		RODN
63	272057	26.7N 129.4E	PCN 1		DMSP37		PGTW
64	272057	26.5N 130.0E	PCN 1		DMSP37		RODN
65	272320	27.0N 129.8E	PCN 1	T4.0/4.0 /01.7/24HRS	DMSP34		PGTW
66	280104	27.2N 129.4E	PCN 1		DMSP34		PGTW
67	280104	27.1N 129.5E	PCN 1	T4.5/4.5 /00.5/24HRS	DMSP34		RODN
68	280437	27.7N 129.7E	PCN 1		DMSP37		RODN
69	281114	27.3N 129.4E	PCN 1		DMSP47		RODN
70	281202	27.6N 129.8E	PCN 1		DMSP34		PGTW
71	281207	27.5N 129.6E	PCN 1		DMSP34		RPMS
72	281207	27.5N 129.4E	PCN 1		DMSP37		PGTW
73	282037	27.4N 129.6E	PCN 2		DMSP37		PGTW
74	280025	30.7N 131.8E	PCN 3	T4.0/4.5 /00.5/23HRS	DMSP34		RPMS
75	280043	28.0N 129.4E	PCN 1	T4.5/4.5 /00.0/24HRS	DMSP34		RODN
76	281230	24.2N 129.7E	PCN 1	T4.5/4.5	DMSP34	INIT JCS	RPMS
77	281054	24.4N 130.2E	PCN 1		DMSP37		PGTW
78	281325	24.2N 130.4E	PCN 1		DMSP34		RODN
79	281325	24.3N 130.0E	PCN 1		DMSP34		RPMS
80	281330	24.2N 130.4E	PCN 1		DMSP34		RPMS
81	282155	19.6N 131.3E	PCN 3	T4.0/4.0	DMSP37	INIT JCS	PGTW
82	282154	19.3N 131.3E	PCN 3		DMSP37		RODN
83	300211	11.5N 131.0E	PCN 3	T4.5/4.5	DMSP34	INIT JCS	RPMK
84	300211	11.6N 130.7E	PCN 3		DMSP34		PGTW
85	301124	14.0N 130.5E	PCN 6		DMSP34		PGTW
86	301311	14.5N 130.2E	PCN 5		DMSP34		RPMK
87	301311	14.5N 130.4E	PCN 5		DMSP34		RODN

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLY HGT	MODE	MAX-SFC-WVD	MAX-FLI-LVL-4NN	ANCRV	EYE SHAPE	EYE ORIEN-TION	EYE TEMP (C)	WIND
1	220315	12.4N 134.4E	1500FT	999	15 250	65 140	16 100	65 5 10		+20 +25 +22	29
2	220333	12.4N 134.4E	1500FT	1002	15 290	30 040	20 350	30 5 10		+20 +26 +25	27
3	220344	11.2N 134.2E	700MM	1077			28 310	35 5 5			
4	220213	12.2N 134.0E	1500FT		1002	15 080	30 170	18 000	25 5 10	+20 +26 +23	3
5	220530	12.3N 134.7E	1500FT	999	70 150	25 140	60 180	15 5 15		+25 +23	4
6	230901	11.4N 134.4E	700MM	1002	15 0	240	33 210	75 5 30		+ 9 + 8	4
7	231223	14.4N 134.4E	700MM	3015			45 120	150 5 10		+11 +10	5
8	230218	12.2N 134.4E	700MM	990	40 090	8 170	46 110	90 5 7	CIRCULAR	+14 +13 +10	6
9	240509	17.4N 134.2E	700MM	1022	55 100	45 120	50 080	100 1 1		+11 +10 +10	6
10	240558	14.4N 134.4E	700MM	1001	45 090	30 140	65 050	50 1 2	CIRCULAR	+11 +10 +10	6
11	240310	20.4N 131.4E	700MM	2027			70 100	30 5 1		+19 + 4	7
12	240155	20.4N 131.2E	700MM	2033	967	40 040	5 130	63 040	90 5 5	+14 +19 + 6	7
13	240733	21.4N 120.4E	700MM	2701	90 360	8 120	75 080	12 5 5			8
14	240904	21.4N 120.4E	700MM	2055	949	40 110	8 020	79 340	5 5 5	+19 +15 +14	8
15	240131	22.4N 120.4E	700MM	2375	914	70 050	3 110	12 5 2 1	CIRCULAR	+13 +20 +13	9
16	240033	23.4N 120.0E	700MM	2403	100 250	3 310	95 250	4 2 1			9
17	240222	23.4N 120.0E	700MM	2414	922	30 330	3 020	90 330	10 2 1	+10 +10 +15	9
18	240330	23.4N 120.2E	700MM	2382	919	40 250	15 300	95 250	5 5 7	+10 +17 + 7	10
19	242140	24.5N 120.4E	700MM	2094	942	40 170	18 300	44 230	15 5 10	+10 +16 +16	11
20	270240	24.5N 120.4E	700MM	2032	40 270	72 440	60 270	30 5 10	CIRCULAR	+14 +17	11
21	270348	25.4N 120.7E	700MM	2092	70 100	35 240	70 190	35 2 1	CIRCULAR	+14 +17	12
22	280112	27.4N 120.4E	700MM	2094	953	50 230	30 310	61 230	00 5 5	+14 +15 +15	13
23	280315	27.4N 120.7E	700MM	2097	50 090	120 340	65 270	30 5 5	ELLIPTICAL	+14 +16 +16	13
24	280414	24.4N 120.4E	700MM	2094	50 040	50 170	78 040	50 5 5	ELLIPTICAL	+16 +16	13
25	280935	27.4N 120.4E	700MM	2701	954	70 090	30 140	81 040	60 5 7	+10 +17 +13	14
26	282147	27.4N 120.4E	700MM	2082	952	65 040	30 120	75 020	60 2 1	+10 +17	15
27	290048	24.4N 120.7E	700MM	2083	70 250	30 340	70 260	60 2 1			15
28	290219	24.4N 120.7E	700MM	2085	45 050	120 140	75 040	70 2 1	CIRCULAR	+14 +16	15
29	290642	24.4N 120.4E	700MM	2088	40 090	120 140	64 110	70 10 5	CIRCULAR	+17 +15	15
30	290448	24.4N 130.4E	700MM	2084	957	65 270	60 340	64 270	20 4 5	+14 +18 +15	16
31	292142	30.4N 131.4E	700MM	2702	956	50 040	30 340	74 040	60 5 5	+15 +12	17
32	300005	30.4N 131.4E	700MM	2707	90 160	15 270	100 160	15 5 5	CIRCULAR	+15 +12	17
33	300206	31.4N 131.4E	700MM	2702	100 250	20 140	78 070	40 5 5	CIRCULAR	+17 +18 +10	17
34	300521	32.4N 134.4E	700MM	2094	957	40 310	5 270	60 360	12 4 5	+16 +17 + 6	18

RAJAN FIXES

FIX NO.	TIME (Z)	FIX POSITION	RADAR	ANCRV	EYE SHAPE	EYE DIAm	RAIN-B-COUE	COMMENTS	HADR POSITION	QZTF WIND NO.
1	240100	22.4N 129.3E	LAND			75/76	43316		26.2N 127.8E	47997
2	240200	23.4N 129.3E	LAND			76/72	53411		26.2N 127.8E	47997
3	240300	23.4N 129.2E	LAND			76/72	53411		26.2N 127.8E	47997
4	240300	23.4N 129.2E	LAND	P40H					26.3N 126.8E	47999
5	240300	23.4N 129.2E	LAND			65/73	53308		26.2N 127.8E	47997
6	240100	23.4N 129.1E	LAND			65/73	52005		26.2N 127.8E	47997
7	240100	23.4N 129.0E	LAND	G400					26.3N 126.8E	47999
8	240200	23.4N 129.0E	LAND			65/73	53416		26.2N 127.8E	47997
9	240200	23.4N 129.0E	LAND	P40H				EYE MOVN 3225	26.1N 127.7E	47997
10	240300	23.4N 129.0E	LAND			65/72	50177		26.2N 127.8E	47997
11	240300	23.4N 129.0E	LAND	G400					26.3N 126.8E	47999
12	240400	24.4N 129.0E	LAND	P40H				EYE MOVN 3610	26.1N 127.7E	47997
13	240500	24.4N 129.0E	LAND			76/71	70204		26.2N 127.8E	47997
14	240500	24.4N 129.1E	LAND	G400				EYE MOVN 3210	26.1N 127.7E	47997
15	240500	24.4N 129.1E	LAND	G400					26.1N 127.7E	47997
16	240500	24.4N 129.1E	LAND			65/71	70204		26.2N 127.8E	47997
17	240700	23.4N 129.2E	LAND			76/41	70204		26.2N 127.8E	47997
18	240700	23.4N 129.1E	LAND	G400					26.1N 127.7E	47997
19	240900	23.4N 129.1E	LAND	G400					26.1N 127.7E	47997
20	240900	23.4N 129.2E	LAND			70/11	70603		26.2N 127.8E	47997
21	240900	23.4N 129.2E	LAND	G400				EYE MOVN 0205	26.1N 127.7E	47997
22	241000	23.4N 129.2E	LAND	P40H				EYE MOVN 0205	26.1N 127.7E	47997
23	241000	23.4N 129.1E	LAND			70/71	53308		26.2N 127.8E	47997
24	241100	23.4N 129.3E	LAND			65/41	70504		26.2N 127.8E	47997
25	241100	23.4N 129.2E	LAND	P40H				EYE STND	26.1N 127.7E	47997
26	241200	23.4N 129.2E	LAND	P40H				EYE STND	26.1N 127.7E	47997
27	241200	23.4N 129.2E	LAND			25/11	73605		26.2N 127.8E	47997
28	241300	24.4N 129.2E	LAND	G400				EYE MOVN 0205	26.1N 127.7E	47997
29	241300	24.4N 129.2E	LAND			65/71	70105		26.2N 127.8E	47997
30	241400	24.4N 129.3E	LAND			65/71	73605		26.2N 127.8E	47997
31	241400	24.4N 129.3E	LAND	G400				EYE MOVN 0205	26.1N 127.7E	47997
32	241500	24.4N 129.3E	LAND	G400				EYE MOVN 3610	26.1N 127.7E	47997
33	241500	24.4N 129.2E	LAND			65/71	70105		26.2N 127.8E	47997
34	241500	24.4N 129.2E	LAND			65/71	70105		26.2N 127.8E	47997
35	241700	24.4N 129.3E	LAND			71/71	73603		26.2N 127.8E	47997
36	241700	24.4N 129.1E	LAND	G400				EYE MOVN 3610	26.1N 127.7E	47997
37	241900	24.4N 129.3E	LAND	G400				EYE MOVN 3610	26.1N 127.7E	47997
38	241900	24.4N 129.3E	LAND			71/71	70204		26.2N 127.8E	47997
39	241900	24.4N 129.4E	LAND			71/71	70306		26.2N 127.8E	47997

40	241300	24.4N	129.3E	LAND	GROU	20		EVE MNRG 0510	26.1M	127.7E	47337
41	242000	24.5N	129.4E	LAND	GROU	20		EVE MNRG 0510	26.1M	127.7E	47337
42	242100	24.5N	129.4E	LAND			47711 70200		26.1M	127.7E	47337
43	242100	24.5N	129.5E	LAND			47711 70400		26.1M	127.8E	47337
44	242100	24.4N	129.5E	LAND	FAIR	45		EVE MNRG 0515	26.1M	127.8E	47337
45	242200	24.7N	129.5E	LAND	FAIR	45		EVE MNRG 0515	26.1M	127.7E	47337
46	242200	24.7N	129.5E	LAND			47741 70200		26.1M	127.7E	47337
47	242300	24.9N	129.5E	LAND	FAIR	45		EVE MNRG 0515	26.1M	127.8E	47337
48	270000	24.9N	129.6E	LAND	GROU	45		EVE MNRG 0515	26.1M	127.7E	47337
49	270000	24.9N	129.5E	LAND			47741 73600		26.1M	127.7E	47337
50	270000	24.5N	129.5E	LAND			77777 79977		26.1M	127.7E	47337
51	270100	25.0N	129.5E	LAND			47711 73000		26.1M	129.5E	47337
52	270100	24.4N	129.6E	LAND			77777 50211		26.1M	127.7E	47337
53	270100	25.1N	129.6E	LAND	GROU	45		EVE MNRG 3620	26.1M	127.7E	47337
54	270200	25.1N	129.6E	LAND			45777 53610		26.1M	129.5E	47337
55	270200	25.1N	129.6E	LAND	GROU	45		EVE MNRG 3610	26.1M	127.7E	47337
56	270200	25.1N	129.5E	LAND			47711 73600		26.1M	127.7E	47337
57	270300	25.2N	129.6E	LAND	GROU	45		EVE MNRG 3610	26.1M	127.7E	47337
58	270300	25.2N	129.5E	LAND			47711 53600		26.1M	127.7E	47337
59	270300	25.2N	129.6E	LAND			45777 53600		26.1M	127.7E	47337
60	270400	25.4N	129.4E	LAND			47741 73500		26.1M	129.5E	47337
61	270400	25.3N	129.6E	LAND			45777 53600		26.1M	127.7E	47337
62	270400	25.2N	129.6E	LAND	GROU	45		EVE MNRG 3610	26.1M	129.5E	47337
63	270500	25.4N	129.3E	LAND			47741 73600		26.1M	127.7E	47337
64	270500	25.4N	129.6E	LAND			45777 53600		26.1M	127.7E	47337
65	270510	25.5N	129.6E	LAND	GROU				26.1M	127.7E	47337
66	270535	25.4N	129.6E	LAND	GROU				26.1M	127.7E	47337
67	270600	25.4N	129.6E	LAND			45777 70200		26.1M	127.8E	47337
68	270500	25.4N	129.6E	LAND			45777 50000		26.1M	127.7E	47337
69	270610	25.7N	129.5E	LAND	GROU				26.1M	127.7E	47337
70	270630	25.7N	129.5E	LAND	GROU				26.1M	127.8E	47337
71	270700	25.5N	129.6E	LAND			45777 50100		26.1M	127.8E	47337
72	270700	25.5N	129.7E	LAND	GROU	45		EVE MNRG 3610	26.1M	129.5E	47337
73	270700	25.5N	129.7E	LAND			45711 70600		26.1M	127.7E	47337
74	270710	25.7N	129.4E	LAND	GROU				26.1M	127.7E	47337
75	270900	25.5N	129.7E	LAND	GROU	40		EVE MNRG 3610	26.1M	127.7E	47337
76	270900	25.7N	129.7E	LAND			47711 70200		26.1M	127.7E	47337
77	270900	25.4N	129.6E	LAND			45777 53500		26.1M	127.7E	47337
78	270910	25.7N	129.3E	LAND	GROU				26.1M	127.7E	47337
79	270940	25.7N	129.3E	LAND	GROU				26.1M	127.7E	47337
80	270900	25.7N	129.7E	LAND			47741 70200		26.1M	127.8E	47337
81	270900	25.9N	129.7E	LAND			45777 50200		26.1M	127.7E	47337
82	270900	25.7N	129.6E	LAND	GROU	40		EVE MNRG 3615	26.1M	129.5E	47337
83	270910	25.9N	129.4E	LAND	GROU				26.1M	127.7E	47337
84	270940	25.9N	129.4E	LAND	GROU				26.1M	127.8E	47337
85	271000	25.9N	129.7E	LAND			45777 50000		26.1M	127.8E	47337
86	271000	25.9N	129.6E	LAND	GROU	40		EVE MNRG 3610	26.1M	129.5E	47337
87	271000	25.7N	129.7E	LAND			47741 73600		26.1M	127.7E	47337
88	271035	25.9N	129.6E	LAND	PGRU				26.1M	127.7E	47337
89	271100	25.9N	129.8E	LAND	GROU	40		EVE MNRG 3610	26.1M	127.8E	47337
90	271100	25.9N	129.8E	LAND			47741 70500		26.1M	127.7E	47337
91	271100	25.9N	129.8E	LAND			45777 50600		26.1M	127.7E	47337
92	271200	24.0N	129.7E	LAND	GROU	40		EVE MNRG 3620	26.1M	129.5E	47337
93	271200	25.3N	129.8E	LAND			47711 70100		26.1M	127.7E	47337
94	271300	24.1N	129.7E	LAND			45711 73500		26.1M	127.7E	47337
95	271300	24.0N	129.7E	LAND	GROU	40		EVE MNRG 3615	26.1M	127.7E	47337
96	271400	24.2N	129.7E	LAND	GROU	40		EVE MNRG 3515	26.1M	127.7E	47337
97	271400	24.2N	129.6E	LAND			47711 73300		26.1M	127.7E	47337
98	271400	24.1N	129.6E	LAND			45777 53011		26.1M	129.5E	47337
99	271500	24.2N	129.7E	LAND			47711 73500		26.1M	127.7E	47337
100	271500	24.3N	129.6E	LAND			45777 53600		26.1M	129.5E	47337
101	271600	24.3N	129.7E	LAND			47711 73600		26.1M	127.7E	47337
102	271600	24.3N	129.6E	LAND			45777 53611		26.1M	129.5E	47337
103	271500	24.3N	129.7E	LAND			45777 53611		26.1M	127.7E	47337
104	271700	24.6N	129.7E	LAND	PGRU			EVE MNRG 3615	26.1M	129.5E	47337
105	271700	24.5N	129.8E	LAND	PGRU		45777 51100		26.1M	127.7E	47337
106	271700	24.6N	129.8E	LAND			47711 70200		26.1M	127.7E	47337
107	271900	24.6N	129.8E	LAND	PGRU			EVE MNRG 0510	26.1M	127.7E	47337
108	271900	24.6N	129.7E	LAND			47711 70100		26.1M	127.7E	47337
109	271900	24.5N	129.7E	LAND			45777 53600		26.1M	127.7E	47337
110	271900	24.4N	129.7E	LAND			45777 53200		26.1M	129.5E	47337
111	271900	24.4N	129.6E	LAND			47711 73500		26.1M	127.7E	47337
112	271900	24.4N	129.8E	LAND	PGRU			EVE STMP	26.1M	129.5E	47337
113	272000	24.7N	129.7E	LAND			47711 73500		26.1M	127.7E	47337
114	272000	24.4N	129.7E	LAND	PGRU			EVE MNRG 0305	27.4M	129.7E	47942
115	272100	24.7N	129.8E	LAND	PGRU			EVE MNRG 0310	27.4M	129.7E	47942
116	272100	24.4N	129.7E	LAND			47711 73600		26.1M	127.7E	47337
117	272200	24.4N	129.8E	LAND			45777 50200		26.1M	127.7E	47337
118	272200	24.9N	129.8E	LAND	FAIR	40		EVE MNRG 3610	26.1M	129.5E	47337
119	272300	27.0N	129.8E	LAND	GROU	20		EVE MNRG 3615	27.4M	128.7E	47942
120	272300	27.0N	129.8E	LAND			45777 53611		27.4M	128.7E	47942
121	280000	27.0N	129.8E	LAND			45777 50000		26.1M	129.5E	47337
122	280000	27.1N	129.8E	LAND	GROU			EVE MNRG 3610	26.1M	129.5E	47337
123	280035	27.0N	129.3E	LAND	GROU	45			26.1M	129.7E	47337
124	280110	27.3N	129.4E	LAND	FAIR				26.1M	127.8E	47337
125	280135	27.4N	129.8E	LAND	FAIR				26.1M	127.8E	47337
126	280200	27.1N	129.8E	LAND			45777 53100		26.1M	127.8E	47337
									26.1M	129.5E	47337





229	201900	29.44	130.5E	LAND		21771	50100			30.6M	131.0E	47949
230	201900	29.39	130.7E	LAND		21771	50511			30.6M	131.0E	47949
231	201900	29.34	130.7E	LAND		21661	50300			28.4M	129.5E	47909
232	201900	29.29	130.7E	LAND	GRUD							
233	202000	30.14	130.4E	LAND	GRUD							
234	202000	30.14	130.4E	LAND		65771	50210			28.4M	129.5E	47909
235	202000	30.24	130.9E	LAND		21571	50314			30.6M	131.0E	47949
236	202100	30.34	130.9E	LAND		21571	50100			30.6M	131.0E	47949
237	202100	30.34	131.0E	LAND		65771	50511			28.4M	129.5E	47909
238	202100	30.34	130.9E	LAND	GRUD							
239	202200	30.34	131.1E	LAND		65771	50500			28.4M	129.5E	47909
240	202200	30.44	131.1E	LAND		21571	50514			30.6M	131.0E	47949
241	202300	30.54	131.2E	LAND		65771	50313			28.4M	129.5E	47909
242	202300	30.54	131.4E	LAND		10401	50419			30.6M	131.0E	47949
243	202300	30.54	131.4E	LAND	GRUD							
244	300000	30.84	131.5E	LAND	GRUD							
245	300000	30.84	131.6E	LAND								
246	300100	31.04	131.7E	LAND	GRUD							
247	300200	31.34	131.4E	LAND								
248	300200	31.44	131.4E	LAND		20771	50316			30.6M	131.0E	47949
249	300200	31.34	131.9E	LAND	GRUD					33.4M	130.3E	47906
250	300300	31.44	132.0E	LAND								
251	300300	31.54	131.9E	LAND		65771	50411			33.3M	134.2E	47909
252	300300	31.54	132.2E	LAND		65771	50411			33.4M	130.3E	47906
253	300300	31.54	132.2E	LAND	GRUD					32.1M	131.5E	47854
254	300300	31.54	132.2E	LAND								
255	300400	31.74	132.3E	LAND		57771	50419			30.6M	131.0E	47949
256	300400	31.84	132.4E	LAND		57771	50419			30.6M	131.0E	47949
257	300400	31.84	132.5E	LAND	GRUD							
258	300400	31.94	132.2E	LAND								
259	300400	31.74	132.3E	LAND		57771	50424			33.4M	130.3E	47906
260	300500	32.04	132.4E	LAND		57771	50522			30.6M	131.0E	47949
261	300500	32.14	132.7E	LAND	GRUD							
262	300500	32.04	132.7E	LAND		10501	50524			33.3M	134.2E	47909
263	300500	32.04	132.7E	LAND								
264	300500	32.24	132.8E	LAND		65771	50430			33.4M	130.3E	47906
265	300520	32.24	132.8E	LAND	GRUD					32.1M	131.5E	47854
266	300500	32.34	132.9E	LAND		10611	50522			33.3M	134.2E	47909
267	300500	32.24	133.1E	LAND		57771	50519			30.6M	131.0E	47949
268	300500	32.24	132.9E	LAND	GRUD					32.1M	131.5E	47854
269	300500	32.24	133.0E	LAND		20673	50322			34.3M	132.6E	47902
270	300500	32.34	133.0E	LAND	GRUD							
271	300500	32.24	132.7E	LAND								
272	300700	32.64	134.3E	LAND	GRUD							
273	300700	32.64	134.2E	LAND								
274	300700	32.54	132.6E	LAND		10511	50522			33.3M	134.2E	47909
275	300700	32.54	132.2E	LAND		20673	50419			34.3M	132.6E	47902
276	300800	32.84	132.7E	LAND		20673	50527			34.3M	132.6E	47902
277	300800	32.84	132.6E	LAND		20741	50524			33.4M	134.2E	47909
278	300900	33.04	132.7E	LAND	GRUD							
279	300900	33.14	134.0E	LAND								
280	300900	33.14	132.9E	LAND								
281	300900	33.14	132.9E	LAND	GRUD							
282	300900	33.14	134.0E	LAND								
283	301000	33.44	134.3E	LAND		65771	50524			34.3M	132.6E	47902
284	301000	33.34	132.2E	LAND		20641	50522			33.3M	134.2E	47909
285	301000	33.44	134.4E	LAND								
286	301000	33.24	132.9E	LAND		65771	50527			34.3M	132.6E	47902
287	301100	33.54	134.5E	LAND		65771	50710			35.3M	138.7E	47909
288	301100	33.54	134.5E	LAND								
289	301100	33.54	134.6E	LAND		65771	50427			34.3M	132.6E	47902
290	301100	33.64	134.5E	LAND		20641	50524			33.3M	134.2E	47909
291	301100	33.64	134.7E	LAND								
292	301200	33.74	134.7E	LAND		10577	50522			34.6M	135.7E	47773
293	301200	33.64	135.1E	LAND								
294	301200	34.04	134.9E	LAND		20641	50424			33.4M	134.2E	47909
295	301200	34.14	135.0E	LAND		20641	50522			34.6M	135.7E	47773
296	301300	33.84	135.0E	LAND		65771	50522			35.3M	138.7E	47909
297	301300	34.24	135.2E	LAND		10641				26.2M	127.0E	47902
298	301300	34.14	135.0E	LAND								
299	301300	34.24	135.0E	LAND								
300	301400	34.34	135.7E	LAND		32771	50522			34.6M	135.7E	47773
301	301400	34.44	135.6E	LAND		31847	50522			34.6M	135.7E	47773
302	301400	34.54	135.5E	LAND		35771	50424			35.3M	138.7E	47909
303	301500	35.04	136.2E	LAND								
304	301500	35.04	136.1E	LAND		30640	57771			34.6M	135.7E	47773
305	301500	34.94	136.0E	LAND								
306	301600	35.04	136.6E	LAND		35771	50330			35.3M	138.7E	47909
307	301700	35.44	136.7E	LAND								
308	301700	35.44	137.2E	LAND		34041	50532			34.6M	135.7E	47773
309	301700	35.54	137.3E	LAND		34041	50530			34.6M	135.7E	47773
310	301700	35.44	137.2E	LAND								
311	302300	35.14	141.3E	LAND	GRUD							
312	010020	40.54	141.4E	LAND	GRUD							

## SYNOPTIC TABLE

FILE NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	WEAREST DATA (NM)	COMMENTS
1	190000	15.04 142.0E	10	200	
2	191200	11.54 142.5E	10	200	
3	200000	13.04 144.0E	10	150	
4	201200	12.04 142.0E	10	200	
5	210000	11.54 140.5E	15	200	
6	211200	11.04 134.0E	15	150	
7	211900	12.34 130.4E	15	150	
8	220000	11.04 138.0E	20	150	

TROPICAL STORM PAMELA

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACFRY	UVZAK CODE	SATELLITE	COMMENTS	SITE
1	232230	14.50 144.3E	PCN 5	T0.0/0.0	DMSD34	INIT JCS	PGTW
2	242232	14.30 143.9E	PCN 3	T2.0/2.0 /02.0/24HRC	DMSD34	EXPOSED ILCC	PGTW
3	240957	14.00 141.4E	PCN 6		DMSD37		PGTW
4	241114	14.00 143.3E	PCN 5		DMSD34		PGTW
5	242137	20.50 130.2E	PCN 6		DMSD37		PGTW
6	240146	21.20 136.9E	PCN 3	T1.5/2.0 /00.5/27HRC	DMSD34	EXPOSED ILCC	PGTW
7	240146	21.20 136.9E	PCN 5	T1.0/1.0	DMSD34	INIT JCS	RPMK
8	241015	21.20 137.9E	PCN 3		DMSD37		PGTW
9	241246	24.30 137.6E	PCN 3		DMSD34		PGTW

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLY LVL	700HZ DBT	DRS MSLP	MAX-RFC-WIND VEL/HRG/MS	MAX-FLT-LVL-4ND DTM/VEL/HRG/MS	ACFRY NAV/MET	EYE SHAPE	EYE ORIEN-TION	EYE TEMP (C) DIR/ IN/ DP/SET
1	250927	14.40 142.1E	700MM	1151	1004	50 100 35 140	50 100 35 140	3 3			+10 + 7
2	242222	20.50 140.1E	1500FT	1004	1004	25 050 30 130	16 050 30 5 5				+20 +22 +21
3	242258	20.50 140.1E	700MM	1129		20 160 50 120	20 360 60				+11 + 7
4	240307	21.20 136.5E	1500FT		1003	25 060 50 150	17 100 60 5 10				+20 +25 + 8 10
5	240504	21.40 137.9E	1500FT		1003	15 150 20 220	21 110 40 10 5				

TROPICAL STORM ROGER

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACFRY	UVZAK CODE	SATELLITE	COMMENTS	SITE
1	021233	14.50 135.7E	PCN 5		DMSD30		PGTW
2	031213	14.10 136.6E	PCN 5		DMSD34		PGTW
3	032036	20.40 134.9E	PCN 5		DMSD37		PGTW
4	032313	20.50 134.4E	PCN 5	T1.0/1.0 /50.0/24HRC	DMSD34		PGTW
5	040055	20.40 135.7E	PCN 5		DMSD30		PGTW
6	040055	20.30 135.6E	PCN 5	T1.5/1.5	DMSD34	INIT JCS	RPMK
7	040917	21.40 135.2E	PCN 5		DMSD37		PGTW
8	041154	21.70 134.4E	PCN 5		DMSD30		RODN
9	041155	21.40 133.5E	PCN 5		DMSD34		PGTW
10	042157	20.40 133.1E	PCN 6	T2.0/2.0 /01.0/22HRC	DMSD37		PGTW
11	042158	20.30 133.6E	PCN 5	T1.5/2.5	DMSD37	INIT JCS	RODN
12	040036	20.40 133.8E	PCN 6		DMSD34		PGTW
13	040217	20.20 131.3E	PCN 6		DMSD30	EDGE OF DATA	PGTW
14	040217	20.00 131.5E	PCN 5		DMSD34		RPMK
15	040317	20.30 131.3E	PCN 5		DMSD34		RODN
16	041317	21.70 134.6E	PCN 3		DMSD30		PGTW
17	041317	21.70 135.6E	PCN 3		DMSD30	EXPOSED ILCC	RODN
18	041317	21.40 135.7E	PCN 5		DMSD30		RKSD
19	041319	21.30 135.4E	PCN 5		DMSD34		RPMK
20	041319	21.40 135.7E	PCN 3		DMSD34		PGTW
21	042137	23.40 134.9E	PCN 5	T1.0/2.0 /01.0/24HRC	DMSD37		PGTW
22	040119	23.30 135.0E	PCN 5		DMSD34		PGTW
23	040158	24.40 135.0E	PCN 5	T3.0/3.0	DMSD30	INIT JCS	RPMK
24	040158	24.10 135.1E	PCN 5		DMSD30		PGTW
25	040158	24.20 135.0E	PCN 5	T3.0/3.0	DMSD30	INIT JCS	RKSD
26	041017	24.50 134.6E	PCN 5		DMSD37		RKSD
27	041018	24.40 134.2E	PCN 5		DMSD37		RPMK
28	041918	24.00 134.6E	PCN 5		DMSD37		PGTW
29	041257	27.30 134.4E	PCN 5		DMSD30		RKSD
30	041301	27.10 135.1E	PCN 5		DMSD34		PGTW
31	041301	26.30 135.4E	PCN 5		DMSD34		RPMK
32	042117	29.00 136.3E	PCN 6		DMSD37		PGTW

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	TUOM3 HGT	OBS MSLP	MAX-SFC-WND VEL/ARG/ANG	MAX-FLT-LVL-WND DIR/VEL/DIR/ANG	ACFT	EYE SHAPE	EYE ORIENT-CLAM/TATION	EYE TEMP (C)	WIND DIR/SP/SLT	WIND NO.
1	030220	14.1N 144.2E	1500F1		998	40 180 40	240 30 180	60	5				2
2	040308	21.1N 134.7E	1500F1		982	35 080 10	140 35 080	10	3		+24 +24 +24	28	3
3	040305	21.2N 134.1E	1500F1		987	40 030 25	180 40 030	25	2		+25 +25 +26	28	4
4	041920	20.3N 134.5E	700MM	3003			130 32 210	60	5		+15 +11		5
5	042125	20.4N 134.7E	700MM	3015	992	35 180 10	040 36 320	45	5		+11 +11 + 6		5
6	040124	24.1N 144.5E	700MM	3001		60 220 10	140 48 120	85	5		+14 +12 +10		6

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (MM)	COMMENTS
1	010000	13.0N 141.1E	20	120	
2	011900	13.1N 134.0E	20	240	
3	020000	12.7N 142.0E	20	210	
4	040000	24.0N 134.5E	40	10	
5	041200	27.0N 134.5E	45	70	
6	070000	17.5N 137.0E	35	190	

TYPHOON SARAH

SATELLITE FIXES

FLA NO.	TIME (Z)	FIX POSITION	ACQRY	UNUSAK CODE	SATELLITE	COMMENTS	SITE
1	012259	14.20 121.0E	PCN 5	T1.0/1.0	DWSP47	INIT JMS	RODN
2	020131	14.50 122.0E	PCN 5	T0.0/0.0	DWSP3A	INIT JMS	RPNK
3	051139	14.60 120.0E	PCN 5		DWSP30		RPNK
4	051412	14.20 120.0E	PCN 5		DWSP3A		RPNK
5	051414	14.00 120.1E	PCN 5		DWSP34		RODN
6	052234	14.50 121.7E	PCN 5	T0.0/0.0 /50.0/21HRS	DWSP37		RPNK
7	010113	14.50 119.0E	PCN 5	T1.0/1.0 /50.0/24HRS	DWSP3A		RODN
8	030255	14.60 118.0E	PCN 5		DWSP34		RPNK
9	031355	14.20 120.0E	PCN 5		DWSP34		RODN
10	031355	14.40 119.2E	PCN 5		DWSP3A		RPNK
11	042218	14.20 119.0E	PCN 5	T0.0/0.0 /50.0/24HRS	DWSP37		RPNK
12	040055	14.20 119.1E	PCN 5	T2.0/2.0 /01.0/24HRS	DWSP3A		RODN
13	040235	14.10 118.0E	PCN 5		DWSP30		RPNK
14	041058	14.20 119.0E	PCN 5		DWSP37		RODN
15	041336	14.60 118.0E	PCN 5		DWSP34		RPNK
16	041337	14.00 119.0E	PCN 5		DWSP3A		RPNK
17	042157	14.50 118.3E	PCN 5		DWSP34		PGTW
18	050036	12.40 119.1E	PCN 5		DWSP3A		PGTW
19	050036	12.40 119.1E	PCN 5		DWSP47		PGTW
20	050217	12.50 118.0E	PCN 5	T2.0/2.0	DWSP34	INIT JMS	PGTW
21	050217	12.10 118.2E	PCN 5	T1.5/1.5 /01.5/24HRS	DWSP34		RPNK
22	050217	12.50 119.1E	PCN 5	T2.5/2.5 /00.5/25HRS	DWSP30		RODN
23	051034	12.10 119.2E	PCN 6		DWSP37		PGTW
24	051317	12.30 119.0E	PCN 6		DWSP30		PGTW
25	051317	12.10 118.7E	PCN 5		DWSP30		RODN
26	051319	12.30 119.2E	PCN 5		DWSP3A		PGTW
27	051319	12.30 119.2E	PCN 5		DWSP34		RPNK
28	052319	12.30 119.0E	PCN 5		DWSP37		RODN
29	052319	12.30 118.7E	PCN 5		DWSP37		RPNK
30	060014	12.30 119.9E	PCN 5		DWSP3A		PGTW
31	060158	12.40 119.7E	PCN 5	T2.0/2.0 /50.0/24HRS	DWSP30		PGTW
32	060158	12.30 119.5E	PCN 5	T1.0/1.5 /00.5/24HRS	DWSP34		RPNK
33	061018	12.20 119.3E	PCN 5		DWSP37		RPNK
34	061018	12.50 119.9E	PCN 5		DWSP37		PGTW
35	061301	12.20 119.1E	PCN 5		DWSP3A		RPNK
36	061301	12.60 119.0E	PCN 5		DWSP3A		PGTW
37	061639	12.10 119.0E	PCN 5		DWSP30		RODN
38	061639	12.20 119.2E	PCN 5		DWSP30		RPNK
39	062259	12.20 119.2E	PCN 3	T2.0/2.0 /01.0/21HRS	DWSP3A		RPNK
40	062259	12.00 120.0E	PCN 5	T2.5/2.5	DWSP37	INIT JMS	RPNK
41	070138	12.20 119.3E	PCN 3	T2.5/2.5 /00.5/24HRS	DWSP30		RODN
42	070139	12.20 119.3E	PCN 3		DWSP30		PGTW
43	070143	12.20 119.3E	PCN 5		DWSP3A		RPNK
44	070240	11.40 118.1E	PCN 5		DWSP30		RPNK
45	071139	12.10 119.3E	PCN 5		DWSP37		RPNK
46	071139	11.70 119.2E	PCN 5		DWSP37		RODN
47	071242	11.50 118.4E	PCN 5		DWSP3A		RPNK
48	071243	11.90 119.3E	PCN 5		DWSP3A		PGTW
49	071420	12.00 119.3E	PCN 5		DWSP30		RODN
50	072238	11.20 119.3E	PCN 5	T3.0/3.5 /00.5/24HRS	DWSP37		RPNK
51	072238	11.10 119.2E	PCN 5		DWSP37		RODN
52	080124	11.20 119.3E	PCN 5		DWSP3A		RPNK
53	080301	11.20 119.5E	PCN 3	T3.0/3.0 /00.5/24HRS	DWSP30		RODN
54	081118	11.30 119.0E	PCN 5		DWSP37	PSN CNTR OF CON	RPNK
55	081118	10.30 119.3E	PCN 5		DWSP37	NU LYE/PSN BASED ON 2 CR BANDS	RODN
56	081406	10.20 119.2E	PCN 5		DWSP3A	CI UP/JUTFLOW INCREASED	RPNK
57	081406	10.40 119.3E	PCN 5		DWSP3A		RODN
58	082218	10.50 119.2E	PCN 5	T4.0/4.0 /01.5/21HRS	DWSP37		PGTW
59	082218	11.00 118.1E	PCN 5	T4.0/4.0 /01.0/24HRS	DWSP37		RPNK
60	090107	11.20 118.0E	PCN 1	T4.5/4.5 /01.5/24HRS	DWSP3A		RODN
61	090242	11.10 118.0E	PCN 3		DWSP34		RPNK
62	091058	11.50 117.5E	PCN 1		DWSP37		RPNK
63	091059	11.50 117.4E	PCN 1		DWSP37		RODN
64	091342	11.50 117.1E	PCN 1		DWSP30		PGTW
65	091342	11.50 117.4E	PCN 1		DWSP30		RODN
66	091348	11.90 117.3E	PCN 1		DWSP3A		RPNK
67	092158	11.60 116.5E	PCN 1		DWSP37		RPNK
68	100049	11.60 116.2E	PCN 1	T5.0/5.0 /01.0/24HRS	DWSP3A		RPNK
69	100049	11.30 116.4E	PCN 1	T5.0/5.0 /01.0/24HRS	DWSP3A		PGTW
70	100223	11.60 116.4E	PCN 1	T5.5/5.5 /01.0/25HRS	DWSP30		RODN
71	101038	11.70 116.1E	PCN 1		DWSP37		RPNK
72	101038	11.50 116.0E	PCN 1		DWSP30		RODN
73	101038	11.90 116.1E	PCN 1		DWSP37		PGTW
74	101331	11.90 116.0E	PCN 1		DWSP3A		RPNK
75	101331	11.50 116.9E	PCN 2		DWSP3A		RODN
76	101504	11.20 116.0E	PCN 6		DWSP30	ESTIMATE CNTR OFF EDGE OF DATA	RPNK
77	102319	12.10 116.7E	PCN 3	T5.0/5.0 /50.0/24HRS	DWSP37		RPNK
78	102319	11.30 116.0E	PCN 3	T4.5/5.5 /01.0/21HRS	DWSP37		RODN
79	110031	12.00 116.5E	PCN 3		DWSP3A		RPNK
80	110204	12.00 116.2E	PCN 3	T4.5/5.0 /00.5/25HRS	DWSP34		PGTW
81	111018	12.30 116.0E	PCN 5		DWSP37		PGTW
82	111159	12.20 116.2E	PCN 6		DWSP37		RPNK
83	111312	12.60 116.7E	PCN 3		DWSP3A		PGTW
84	111445	12.60 116.3E	PCN 3		DWSP30		RPNK
85	111445	12.50 116.3E	PCN 5		DWSP30		RODN
86	112258	12.20 116.4E	PCN 3		DWSP37		RODN
87	120154	12.00 116.0E	PCN 5	T4.5/5.0 /00.5/24HRS	DWSP3A		RPNK
88	120154	12.20 116.3E	PCN 5	T3.5/4.5 /01.0/24HRS	DWSP3A		RODN
89	120326	13.00 117.0E	PCN 5		DWSP30		RPNK

90	121139	13.3W	117.0E	PCN 3		DMSD77		RPMK
91	121426	13.4W	117.4E	PCN 3		DMSD70		RPMK
92	121426	13.4W	117.8E	PCN 5		DMSD70		ROUN
93	122238	13.0W	117.3E	PCN 5		DMSD77		RPMK
94	122238	13.2W	117.5E	PCN 3		DMSD77		ROUN
95	120136	13.1W	117.4E	PCN 5	T3.5/4.5 /W1.0/24HRC	DMSD76		RPMK
96	120307	13.2W	117.3E	PCN 1		DMSD70		RPMK
97	120307	13.3W	117.4E	PCN 1	T5.0/5.0 /D1.5/24HRC	DMSD70		ROUN
98	121119	13.4W	111.7E	PCN 3		DMSD77		RPMK
99	121119	13.4W	111.7E	PCN 3		DMSD77		ROUN
100	121401	13.4W	111.6E	PCN 3		DM 877		ROUN
101	121407	13.7W	111.1E	PCN 3		DMSD74		RPMK
102	140118	13.5W	110.7E	PCN 5	T2.5/3.5 /W1.0/24HRC	DMSD76		RPMK
103	140248	13.4W	110.7E	PCN 3		DMSD70		RPMK
104	140248	13.3W	110.7E	PCN 3	T4.0/5.0-W1.0/24HRC	DMSD76		ROUN
105	141058	12.3W	100.0E	PCN 5		DMSD77		ROUN
106	141058	12.3W	100.0E	PCN 3		DMSD77		RPMK
107	141348	13.2W	100.2E	PCN 5		DMSD70		PGTW
108	141348	13.0W	100.6E	PCN 5		DMSD70		ROUN
109	141359	13.1W	100.2E	PCN 3		DMSD76		RPMK
110	142339	13.2W	100.7E	PCN 5	T1.5/2.5 /W1.0/24HRC	DMSD77		RPMK
111	140229	13.3W	107.9E	PCN 5		DMSD70		RPMK
112	140229	12.3W	107.5E	PCN 5	T2.0/3.0-W2.0/24HRC	DMSD70		ROUN

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	70004 HGT	OBS MSLP	MAX-SFC-WND VEL/RRG/RNG	MAX-FLT-LVL-WND DTN/VEL/DIR/MAG	ACFRY NAV/MET	EYE SHAPE	EYE ORIEN- DIAM/TATION	EYE TEMP (C) DIR/ [W] DP/SSY	WSN NO.
1	041001	12.6W 110.3E	700MB	7017	991	45 360	50 340	35 270 30	3 4		+10 +17 + 9	1
2	040342	12.6W 110.7E	700MB	7054	996	40 010	50 130	32 010 30	3 4	CIRCULAR	+13 +13 + 5	3
3	070203	12.2W 110.4E	700MB	2994		50 030	11 040	50 360 15	3 5	CIRCULAR	+15 + 3	4
4	070431	12.2W 110.3E	700MB	2970	985	75 330	10 340	73 270 10	3 4	CIRCULAR	+11 +15 + 6	4
5	080210	11.3W 110.2E	700MB	2920	982	75 300	20 120	78 360 20	4 4	CIRCULAR	+11 +12 + 8	5
6	080512	11.1W 110.2E	700MB	2927	980	45 080	5 320	40 220 30	3 4	CIRCULAR	+11 +15 + 9	5
7	090405	11.3W 117.9E	700MB	2761	960	30 140	10 100	101 040 20	4 4	CIRCULAR	+11 +13 + 8	6
8	100142	11.5W 116.5E	700MB	2496		100 060	5 150	93 060 10	4 2	CIRCULAR	+25 +10	7
9	100422	11.7W 116.4E	700MB	2489	929	100 180	7 070	115 020 5	4 1	CIRCULAR	+11 +25 + 4	7
10	110131	12.0W 115.4E	700MB	2737		50 070	50 120	73 060 12	4 2			8
11	110343	12.0W 115.2E	700MB	2733	959	65 130	25 040	74 320 14	4 2	CIRCULAR	+10 +15 +11	8
12	120700	12.0W 117.6E	700MB	2785		65 080	20 240	70 140 50	4 4	CIRCULAR		9
13	120923	13.1W 113.4E	700MB	2784	962	45 180	30 110	63 040 20	4 4		+14 +15 + 6	9

RAJAH FIXES

FIX NO.	TIME (Z)	FIX POSITION	RAJAH	ACFRY	EYE SHAPE	EYE DIAM	RAJAH-CODE ASWAM TDOFF	COMMENTS	RAJAH POSITION	SITE WMO NO.
1	041208	14.1W 110.7E	LAND						16.3M 120.6E	08321
2	041300	13.4W 110.8E	LAND		CIRCULAR				16.3M 120.6E	08321
3	041308	14.0W 110.5E	LAND						16.3M 120.6E	08321
4	041800	13.4W 110.2E	LAND						16.3M 120.6E	08321
5	040000	13.5W 110.0E	LAND						13.7W 100.6E	48455

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (NM)	COMMENTS
1	011200	14.5W 120.5E	10	60	
2	020000	15.0W 121.0R	10	90	
3	030000	15.0W 121.0R	10	60	
4	041200	14.0W 110.8R	15	90	

SUPER TYPHOON TIP

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACQRY	UVZAK CODE	SATELLITE	COMMENTS	SITE
1	041154	7,6N 152,4E	PCN 5		DMS034		PGTW
2	042016	7,6N 152,7E	PCN 6	T1.0/1.0	DMS037	INIT DGS	PGTW
3	042255	7,6N 152,7E	PCN 6		DMS034		PGTW
4	043557	7,6N 152,4E	PCN 6		DMS037		PGTW
5	041137	7,6N 152,4E	PCN 5		DMS037		PGTW
6	041955	7,6N 152,4E	PCN 6		DMS037		PGTW
7	042237	7,6N 152,4E	PCN 5	T2.0/2.0 /01.0/24HRC	DMS034		PGTW
8	040018	7,6N 152,4E	PCN 4		DMS034		PGTW
9	040436	7,6N 152,4E	PCN 6		DMS037		PGTW
10	041116	7,6N 152,4E	PCN 6		DMS034		PGTW
11	041117	7,6N 152,4E	PCN 6	T2.5/2.5 /00.5/25HRC	DMS034		PGTW
12	042214	7,6N 152,7E	PCN 6		DMS034	LOW CONFIDENCE	PGTW
13	070416	7,6N 152,1E	PCN 6		DMS037		PGTW
14	071101	7,6N 152,4E	PCN 5		DMS034		PGTW
15	072338	7,6N 151,4E	PCN 5	T3.0/3.0 /01.0/24HRC	DMS034		PGTW
16	072343	7,6N 152,1E	PCN 5		DMS034		PGTW
17	080755	7,6N 151,2E	PCN 6		DMS037		PGTW
18	081043	7,6N 151,0E	PCN 4		DMS034		PGTW
19	082937	11,7N 148,4E	PCN 5		DMS037		PGTW
20	082325	11,7N 148,7E	PCN 5	T3.5/3.5 /00.5/24HRC	DMS034		PGTW
21	080101	11,7N 148,1E	PCN 5		DMS034		PGTW
22	082016	12,4N 142,7E	PCN 4		DMS037		PGTW
23	100042	14,2N 142,7E	PCN 5	T5.0/5.0	DMS034	INIT DGS	RODN
24	100042	13,0N 142,4E	PCN 5	T4.5/4.5	DMS034	INIT DGS	RPMK
25	100042	13,0N 142,4E	PCN 5	T4.5/4.5 /01.0/25HRC	DMS034		PGTW
26	100957	13,7N 141,4E	PCN 6		DMS037		PGTW
27	100957	14,2N 141,0E	PCN 6		DMS037		RODN
28	101149	13,0N 141,1E	PCN 2		DMS034		PGTW
29	101149	13,2N 141,3E	PCN 2		DMS034		RPMK
30	101149	14,1N 141,0E	PCN 2		DMS034		RODN
31	110031	14,1N 130,7E	PCN 1	T6.0/6.0 /01.5/24HRC	DMS034		RPMK
32	111014	14,2N 130,4E	PCN 1		DMS034		PGTW
33	111014	14,4N 130,3E	PCN 1		DMS037		RODN
34	111131	15,0N 130,1E	PCN 4		DMS034		PGTW
35	111304	14,4N 130,2E	PCN 1		DMS034		RPMK
36	112117	14,1N 130,6E	PCN 1	T7.5/7.5	DMS037	INIT DGS	RODN
37	112117	14,1N 130,5E	PCN 1	T7.0/7.0	DMS037	INIT DGS	PGTW
38	120012	14,2N 130,2E	PCN 1		DMS034		PGTW
39	120144	14,4N 130,3E	PCN 1	T7.0/7.0 /01.0/25HRC	DMS034		RPMK
40	120145	14,5N 130,0E	PCN 1		DMS034		PGTW
41	120957	14,9N 137,3E	PCN 1		DMS037		PGTW
42	121254	17,0N 137,2E	PCN 1		DMS034		PGTW
43	121254	16,8N 137,2E	PCN 1		DMS034		RODN
44	122057	14,2N 136,3E	PCN 1		DMS037		PGTW
45	122354	14,5N 136,1E	PCN 1	T8.5/7.0 /40.5/27HRC	DMS034		PGTW
46	130126	14,5N 136,0E	PCN 1		DMS034		PGTW
47	130126	16,5N 136,1E	PCN 1	T7.0/7.5 /40.5/24HRC	DMS034		RODN
48	130337	14,5N 136,4E	PCN 1		DMS037		PGTW
49	131220	14,7N 136,4E	PCN 1		DMS034		RODN
50	131236	14,7N 136,4E	PCN 3		DMS034		PGTW
51	132036	16,8N 136,0E	PCN 5		DMS037		PGTW
52	132336	16,3N 137,4E	PCN 1	T3.0/6.0 /41.5/24HRC	DMS034		PGTW
53	140106	17,1N 137,7E	PCN 1		DMS034		PGTW
54	140107	17,0N 137,4E	PCN 1	T6.0/7.0 /41.0/24HRC	DMS034		RODN
55	140317	17,1N 137,5E	PCN 1		DMS037		PGTW
56	141206	17,3N 137,2E	PCN 1		DMS034		PGTW
57	141206	17,1N 137,2E	PCN 1		DMS034		RODN
58	141348	17,4N 137,1E	PCN 1		DMS034		PGTW
59	142157	17,3N 137,2E	PCN 1	T3.0/5.0 /50.0/27HRC	DMS037		PGTW
60	140047	14,1N 130,6E	PCN 1		DMS034		PGTW
61	140048	14,1N 130,7E	PCN 1	T5.5/6.0 /40.5/24HRC	DMS034		RODN
62	140059	14,0N 130,7E	PCN 2		DMS034		PGTW
63	140229	14,2N 130,6E	PCN 1		DMS034		RODN
64	141038	14,2N 120,5E	PCN 5		DMS037		PGTW
65	141200	14,4N 120,3E	PCN 5		DMS034		PGTW
66	141329	14,5N 120,2E	PCN 5		DMS034		PGTW
67	141329	14,5N 120,2E	PCN 5		DMS034		PGTW
68	142137	19,7N 120,2E	PCN 1	T5.0/5.0 /50.0/24HRC	DMS037		RODN
69	140041	19,4N 120,1E	PCN 5		DMS034		PGTW
70	140204	19,3N 120,2E	PCN 5		DMS034		PGTW
71	140210	19,4N 120,1E	PCN 3	T5.0/5.5 /40.5/25HRC	DMS034		RODN
72	141018	20,2N 120,7E	PCN 5		DMS037		PGTW
73	141324	20,3N 120,6E	PCN 5		DMS034		PGTW
74	142117	20,3N 120,7E	PCN 5		DMS037		PGTW
75	170024	21,2N 120,1E	PCN 3	T5.0/5.0- /50.0/27HRC	DMS034		PGTW
76	170151	21,4N 120,0E	PCN 3		DMS034		PGTW
77	170151	21,6N 120,0E	PCN 5	T5.0/5.0	DMS034	INIT DGS	RPMK
78	170151	21,6N 127,4E	PCN 1	T5.0/5.0 /50.0/24HRC	DMS034		RODN
79	170357	22,7N 127,4E	PCN 5		DMS037		PGTW
80	171251	21,0N 127,4E	PCN 5		DMS034		PGTW
81	171306	22,3N 127,4E	PCN 5		DMS034		RODN
82	172056	24,1N 120,0E	PCN 5		DMS037		PGTW
83	172057	24,4N 127,7E	PCN 6		DMS037		RODN
84	180006	25,2N 124,3E	PCN 5	T4.5/5.0 /40.5/24HRC	DMS034		PGTW
85	180131	25,2N 124,2E	PCN 5	T4.5/5.0 /40.5/24HRC	DMS034		RPMK
86	180132	25,2N 124,0E	PCN 5		DMS034		PGTW
87	180132	24,4N 124,0E	PCN 5	T3.5/4.5 /41.5/24HRC	DMS034		RODN
88	180337	27,2N 120,4E	PCN 5		DMS037		PGTW
89	180337	27,5N 120,4E	PCN 4		DMS037		RODN
90	181118	29,2N 120,6E	PCN 5		DMS037		RODN

91	141231	24.6N	130.5E	PCN 5		DMSD39		RPMK
92	141248	24.7N	130.5E	PCN 3		DMSD34		PGTW
93	142036	30.6N	131.0E	PCN 3		DMSD37		PGTW
94	142348	32.7N	134.0E	PCN 3	T3.0/4.0 / W1.5/24HRC	DMSD34		PGTW
95	140112	33.6N	134.6E	PCN 5	T4.0/4.0	DMSD30	INIT JDS	RKSO
96	140112	33.3N	135.2E	PCN 3		DMSD39		PGTW
97	141212	41.1N	145.0E	PCN 5		DMSD39	PSBL LLCP	RODN
98	141212	41.1N	145.5E	PCN 5		DMSD39		RKSO
99	142016	43.7N	144.4E	PCN 5		DMSD37	EXPSU LLCP	RKSO

413CRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	70043 HGT	OBS MSLP	MAX-SFC-WND VEL/ARG/RNG	MAX-FLT-LVL-WND NTM/VEL/DNG/RNG	ACFTY NAV/HEI	EYE SHAPE	EYE ORIEN- DIAM/TATION	HYF TEMP (C) OUT/ IN/ DP/SET	45N NO.	
1	040414	4.2N 153.0E	15N0F1		1004	25 276 10	270 29 180 30	4 5				1	
2	050030	5.4N 154.6E	700MH	1095	1004	25 270 18	140 33 360 120	5 10			+14 +11 +07	2	
3	060510	5.9N 155.3E	15N0F1		1003	25 050 30	170 27 360 15	2 5				3	
4	060800	5.7N 154.1E	700MH	1113	1003	35 230 40	270 37 210 60	2 4			+24 +23	4	
5	061943	7.1N 153.4E	700MH	1112		40 110 12	060 34 300 20	4 4			+13 + 7	5	
6	062222	7.2N 153.4E	700MH	1124		35 010 30	100 26 010 60	4 2			+14 +14 + 7	6	
7	040713	7.4N 153.0E	700MH	1110	1000	10 040 20	040 31 270 60	4 5			+12 +15 + 8	7	
8	042111	7.9N 152.5E	700MH	1100	998	40 360 15	040 30 290 90	2 2			+14	8	
9	070305	7.4N 152.3E	700MH	1101		35 320 30	100 33 320 30	4 4			+11 +14 +10	9	
10	070617	6.9N 152.4E	700MH	1095		30 110 50	100 32 310 60	4 10			+13 + 8	10	
11	070801	6.4N 152.0E	700MH	1106		30 700 55	070 56 010 15	4 5			+11 +10 +10	11	
12	071428	6.3N 151.7E	700MH	1091	1005		070 51 310 65	5 5			+11 +10 +10	12	
13	071956	6.6N 152.2E	700MH	1072			070 45 060 30	10 5				13	
14	072030	6.9N 152.2E	700MH	1054	997	40 180 35	270 40 180 30	5 5			+14 +10	14	
15	040248	8.2N 151.5E	700MH	1047	995	35 230 105	220 44 130 120	5 5			+14 +12 +12	15	
16	040550	9.0N 151.3E	700MH	1034		35 050 30	140 35 050 30	4 4			+14 +11	16	
17	040825	9.4N 150.9E	700MH	1043	995		090 38 350 30	8 10			+14 +13	17	
18	141457	10.3N 150.1E	700MH	1027	991		110 50 360 100	5 10			+13 +14 +10	18	
19	041900	10.4N 149.0E	700MH				070 37 340 75	5 10			+11 +11	19	
20	042140	11.9N 148.5E	700MH	>994	989	50 320 20	140 50 120 60	5 10	CIRCULAR	25	+14 +15 +12	20	
21	040005	12.1N 147.7E	700MH	>994		50 150 10	070 48 310 80	3 2			+14 +13	21	
22	040241	12.6N 146.8E	700MH	>960	985	50 130 10	100 43 130 115	2 3	CIRCULAR	25	+11 +14 +14	22	
23	040521	12.7N 145.6E	700MH	>936		60 160 45	040 69 360 50	2 2				23	
24	040735	12.7N 145.2E	700MH	>931	981	55 080 48	100 57 020 70	2 2			+14 +17 +13	24	
25	041201	12.9N 144.3E	700MH	>889	974		200 43 210 10	2 2			+13 +19 +15	25	
26	042006	12.9N 143.2E	700MH	>779		70 070 10	140 57 070 10	1 2			+13 +19 +15	26	
27	042110	12.9N 142.9E	700MH	>777		70 070 10	140 57 070 10	1 2	CIRCULAR	8	+12 +17 +15	27	
28	140951	13.7N 141.3E	700MH	>654	949	90 360 10	130 78 360 15	1 10	CIRCULAR	20	+11 +15 +14	28	
29	142340	14.7N 141.3E	700MH	>237	900	130 050 10	140 125 050 10	2 2	CIRCULAR	15	+13 +24 + 8	29	
30	111308	15.3N 130.4E	700MH	>201			240 120 140 14	4 5	CUNCFNTRIC			30	
31	111529	15.6N 130.1E	700MH	>201	900		140 125 130 70	4 5	CUNCFNTRIC	20	130	+13 +20 +15	31
32	120353	16.7N 137.0E	700MH	>194	870	130 090 5	200 110 090 15	4 4	CIRCULAR	12		+14 +30 +13	32
33	120655	16.9N 137.5E	700MH	>1995		130 310 07	010 110 310 10	4 4	CIRCULAR			+25 +16	33
34	120837	16.9N 137.3E	700MH	>058	884	130 130 6	210 110 130 15	4 4	CIRCULAR	12		+14 +19 +18	34
35	121901	16.9N 136.8E	700MH	>201			340 125 270 35	4 2	CIRCULAR	10		+13 +15	35
36	122122	16.7N 136.5E	700MH	>224	903	130 360 25	040 114 360 18	4 2	CIRCULAR	12		+14 +19 +18	36
37	130503	16.7N 135.4E	700MH	>244		90 140 55	210 105 130 30	5 2	CIRCULAR			+14 +19 +18	37
38	130810	16.7N 135.6E	700MH	>269	905		070 105 310 30	2 2	ELLIPTICAL	40	25 100	+14 +19 +18	38
39	140009	17.0N 134.0E	700MH	>417	922	50 230 135	040 88 340 90	2 5	ELLIPTICAL	10	7 150	+14 +17 +13	39
40	140516	17.2N 133.4E	700MH	>391		130 100 7	100 110 100 10	4 2					40
41	140900	17.2N 132.8E	700MH	>385	919		090 95 040 50	4 2	CIRCULAR	14		+17 +18 +16	41
42	140600	18.4N 130.4E	700MH	>383		50 240 130	230 82 140 90	2 3	CIRCULAR			+18 + 8	42
43	140824	18.5N 130.1E	700MH	>387	919	95 030 15	140 98 050 60	2 5	CIRCULAR	13		+14 +19 + 9	43
44	141900	19.0N 129.4E	700MH	>433			220 101 140 95	4 3				+13 +16	44
45	142135	19.3N 129.4E	700MH	>435	924		110 87 360 20	5 4				+17 +18 +16	45
46	140808	20.2N 128.9E	700MH	>498	431	80 240 14	320 74 240 50	5 5	CIRCULAR	25		+14 +19 + 4	46
47	141203	20.4N 128.6E	700MH	>520			67 18 90	4 5				+13 + 4	47
48	141407	20.7N 128.6E	700MH	>513	931		220 76 150 50	5 5	CIRCULAR	25		+14 + 3 + 5	48
49	141904	21.0N 128.3E	700MH	>521			230 85 130 50	4 4				+19	49
50	142150	21.2N 128.3E	700MH	>356	935		140 80 040 150	5 5				+14 +19	50
51	170735	22.5N 128.0E	700MH	>566		70 160 30	100 87 120 15	4 3				+17 +17 +15	51
52	170908	22.7N 127.8E	700MH	>569	939		130 77 020 60	4 3				+17 +17 +16	52
53	170908	22.7N 127.8E	700MH	>562			130 80 360 90	4 3				+17 +16	53
54	151407	23.6N 127.3E	700MH	>582			300 99 200 30	4 3	CIRCULAR	35		+14 +18 +14	54
55	171901	24.2N 127.7E	700MH	>570			200 72 210 12	5 3				+18 +16	55
56	172114	24.6N 127.7E	700MH	>590			230 95 140 100	4 4				+14 +17 +15	56
57	141132	24.3N 130.0E	700MH	>694			100 49 090 120	4 3				+14 +15	57
58	141401	24.0N 130.7E	700MH	>719			140 60 010 120	4 4				+17 +19	58
59	142221	32.2N 133.4E	700MH	>831	971	80 120 10	230 85 110 110	2 2				+14 +17 +11	59

RAJAR FIXES

FIX NO.	TIME (Z)	FIX POSITION	RAJAR	ACFTY	EYE SHAPE	EYE DIAM	RAJAH-CODE ASMAN TDUFT	COMMENTS.	RAJAR POSITION	45N NO.
1	040335	12.4N 144.5E	LAND	FAIR					13.0N 144.9E	01218
2	040410	12.4N 144.3E	LAND	FAIR					13.0N 144.9E	01219
3	040435	12.4N 144.1E	LAND	FAIR					13.0N 144.9E	01220
4	040500	12.4N 143.9E	LAND	FAIR	CIRCULAR	20			13.0N 144.9E	01221
5	040510	12.4N 143.7E	LAND	FAIR	CIRCULAR	20			13.0N 144.9E	01222
6	040510	12.4N 143.5E	LAND	FAIR	CIRCULAR	20			13.0N 144.9E	01223
7	040535	12.4N 143.3E	LAND	FAIR	CIRCULAR	15			13.0N 144.9E	01224
8	040710	12.4N 143.1E	LAND	FAIR	CIRCULAR	15			13.0N 144.9E	01225
9	040735	12.4N 142.9E	LAND	FAIR	CIRCULAR	15			13.0N 144.9E	01226
10	040810	12.4N 142.7E	LAND	FAIR	CIRCULAR	20			13.0N 144.9E	01227
11	040935	12.4N 142.5E	LAND	FAIR	CIRCULAR	20		WALL OPEN SE-SW-NW-N	13.0N 144.9E	01228
12	040910	12.4N 142.3E	LAND	FAIR	CIRCULAR	20			13.0N 144.9E	01229
13	040935	12.4N 142.1E	LAND	FAIR	CIRCULAR	20			13.0N 144.9E	01230
14	041010	12.4N 141.9E	LAND	FAIR	CIRCULAR	15			13.0N 144.9E	01231
15	041035	12.4N 141.7E	LAND	FAIR	CIRCULAR	15			13.0N 144.9E	01232



16	001110	12.70	144.7E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
17	001130	12.80	144.5E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
18	001210	12.80	144.5E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
19	001230	12.80	144.4E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
20	001310	12.80	144.3E	LAND	FAIR	CIRCULAR	15					13.0M	144.9E	01218
21	001330	12.80	144.2E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
22	001410	12.80	144.1E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
23	001430	12.80	144.0E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
24	001510	12.80	143.9E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
25	001530	12.70	143.8E	LAND	GRUD	CIRCULAR	15					13.0M	144.9E	01218
26	001600	12.70	143.8E	LAND	GRUD	CIRCULAR	10					13.0M	144.9E	01218
27	001630	12.60	143.8E	LAND	GRUD	CIRCULAR	10					13.0M	144.9E	01218
28	001710	12.70	143.8E	LAND	GRUD	CIRCULAR	10					13.0M	144.9E	01218
29	001730	12.80	143.5E	LAND	GRUD	CIRCULAR	10					13.0M	144.9E	01218
30	001810	12.80	143.5E	LAND	GRUD	CIRCULAR	10					13.0M	144.9E	01218
31	001930	12.80	143.3E	LAND	GRUD	CIRCULAR	7					13.0M	144.9E	01218
32	001910	12.80	143.3E	LAND	GRUD	CIRCULAR	10					13.0M	144.9E	01218
33	001930	12.80	143.3E	LAND	GRUD	CIRCULAR	10					13.0M	144.9E	01218
34	002010	12.80	143.1E	LAND	FAIR	CIRCULAR	10					13.0M	144.9E	01218
35	171230	23.20	127.7E	LAND	GRUD		45					24.0M	125.3E	47997
36	171400	23.30	127.7E	LAND	GRUD		45					24.0M	125.3E	47997
37	171500	23.50	127.7E	LAND	GRUD		45					24.0M	125.3E	47997
38	171500	23.70	127.0E	LAND	GRUD		45					24.0M	125.3E	47997
39	171700	23.30	127.0E	LAND	GRUD		45					24.0M	125.3E	47997
40	171708	24.00	127.5E	LAND				3///3	53/10			26.2M	127.0E	47997
41	171900	24.00	127.0E	LAND	PNOR							24.0M	125.3E	47997
42	171900	24.10	127.5E	LAND	PNOR							26.3M	126.0E	47999
43	171900	24.30	127.0E	LAND				6///2	70311			26.2M	127.0E	47997
44	172000	24.20	127.0E	LAND	PNOR							26.3M	126.0E	47999
45	172000	24.50	127.7E	LAND				6///3	70211			26.2M	127.0E	47997
46	172035	24.80	127.5E	LAND	FAIR							26.4M	127.0E	47991
47	172100	24.80	127.5E	LAND	PNOR							26.3M	126.0E	47999
48	172100	24.60	127.7E	LAND				6///3	70110			26.2M	127.0E	47997
49	172200	24.50	127.4E	LAND	GRUD							26.3M	126.0E	47999
50	172200	24.70	127.0E	LAND				6///3	73608			26.2M	127.0E	47997
51	172235	25.00	127.5E	LAND	PNOR							26.4M	127.0E	47991
52	172300	24.30	127.0E	LAND				5///1	70209			26.2M	127.0E	47997
53	172310	24.80	127.7E	LAND	PNOR							26.4M	127.0E	47991
54	172320	24.90	127.7E	LAND	PNOR							24.0M	125.3E	47997
55	172330	24.90	127.0E	LAND	PNOR							26.4M	127.0E	47991
56	180000	25.00	129.0E	LAND	GRUD							26.3M	126.0E	47999
57	180000	25.10	127.0E	LAND			60		3///19	70111		26.2M	127.0E	47997
58	180010	25.10	127.0E	LAND	PNOR							26.4M	127.0E	47991
59	180035	25.20	127.0E	LAND	PNOR							26.4M	127.0E	47991
60	180100	25.20	129.0E	LAND				3///12	70308			26.4M	127.0E	47997
61	180120	25.20	129.1E	LAND	GRUD		60					26.3M	126.0E	47999
62	180135	25.50	127.9E	LAND	PNOR							26.4M	127.0E	47991
63	180200	24.50	124.0E	LAND				3///12	70111			26.2M	127.0E	47997
64	180210	25.50	129.1E	LAND	GRUD		65					26.3M	126.0E	47999
65	180210	25.90	129.0E	LAND	PNOR							26.4M	127.0E	47991
66	180235	25.70	129.1E	LAND	PNOR							26.4M	127.0E	47991
67	180300	25.70	129.5E	LAND				3///2	70514			26.2M	127.0E	47997
68	180300	25.70	129.3E	LAND	GRUD		65					26.3M	126.0E	47999
69	180310	25.90	127.3E	LAND	PNOR							26.4M	127.0E	47991
70	180335	26.10	129.5E	LAND	PNOR							26.4M	127.0E	47991
71	180400	26.10	129.0E	LAND				6///2	70218			26.2M	127.0E	47997
72	180400	26.90	129.1E	LAND				65///	51///			26.2M	127.0E	47997
73	180400	26.90	129.4E	LAND								26.4M	127.0E	47991
74	180410	26.20	129.4E	LAND	GRUD		65					26.3M	126.0E	47999
75	180435	26.40	129.7E	LAND	PNOR							26.4M	127.0E	47991
76	180445	26.40	129.4E	LAND	GRUD							26.4M	127.0E	47991
77	180445	26.40	129.4E	LAND	GRUD							26.2M	127.0E	47997
78	180500	26.40	129.4E	LAND				65///	50327			28.4M	129.5E	47999
79	180500	26.50	129.5E	LAND				65///	70222			26.2M	127.0E	47997
80	180500	26.30	129.5E	LAND								26.3M	126.0E	47999
81	180510	26.70	129.4E	LAND	GRUD		60					26.4M	127.0E	47991
82	180535	26.90	129.7E	LAND	PNOR							26.4M	127.0E	47991
83	180545	26.60	129.0E	LAND	PNOR							26.2M	127.0E	47997
84	180545	26.50	129.0E	LAND	PNOR							26.2M	127.0E	47997
85	180500	26.60	129.7E	LAND	FAIR							26.3M	126.0E	47999
86	180500	26.60	129.7E	LAND				65///	70219			26.2M	127.0E	47997
87	180500	26.40	129.5E	LAND				65///	50509			28.4M	129.5E	47999
88	180610	26.30	129.7E	LAND	PNOR							26.4M	127.0E	47991
89	180700	27.00	129.0E	LAND				65///	70320			26.2M	127.0E	47997
90	180700	26.90	129.7E	LAND	PNOR							26.3M	126.0E	47999
91	180700	26.90	129.9E	LAND				65///	50430			28.4M	129.5E	47999
92	180800	27.10	129.9E	LAND	PNOR							26.3M	126.0E	47999
93	180900	27.10	129.2E	LAND				65///	70610			26.2M	127.0E	47997
94	180900	27.20	129.0E	LAND				65///	50327			28.4M	129.5E	47999
95	180900	27.50	129.3E	LAND	PNOR							27.4M	129.5E	47999
96	180900	27.20	129.5E	LAND				///3	70516			26.2M	127.0E	47997
97	180900	27.50	129.3E	LAND				65///	50519			28.4M	129.5E	47999
98	181000	27.70	129.5E	LAND				65///	50316			28.4M	129.5E	47999
99	181000	27.70	129.4E	LAND	PNOR							27.4M	128.7E	47992
100	181100	27.90	129.0E	LAND	PNOR							27.4M	128.7E	47992
101	181100	28.00	129.7E	LAND				65///	50324			28.4M	129.5E	47999
102	181200	28.30	129.0E	LAND				65///	50316			28.4M	129.5E	47999
103	181300	28.90	130.0E	LAND				65///	50423			28.4M	129.5E	47999
104	181400	28.90	130.4E	LAND				65///	50527			28.4M	129.5E	47999
105	181500	29.20	130.0E	LAND				65///	51///			30.6M	131.0E	47869
106	181500	29.10	130.9E	LAND				65///	50829			28.4M	129.5E	47999
107	181600	29.40	131.3E	LAND				65///	50627			30.6M	131.0E	47869
108	181700	29.60	131.6E	LAND				65///	50522			30.6M	131.0E	47869
109	182330	30.20	134.2E	LAND	PNOR									

MUY ATTENUATION

KUSHIMOTO

SUPER TYPHOON VERA

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCR	UVORAK CODE	SATELLITE	COMMENTS	SITE
1	012316	6.2N 149.0E	PCN 5	T1.0/1.0	DMS036	INIT JDS	PGTW
2	010026	6.2N 149.9E	PCN 5		DMS039		PGTW
3	010814	6.2N 149.3E	PCN 5		DMS037	CI UP	PGTW
4	011126	6.3N 147.0E	PCN 5		DMS039		PGTW
5	011158	6.3N 147.2E	PCN 5		DMS036		PGTW
6	012055	6.9N 146.7E	PCN 5		DMS037		PGTW
7	012258	6.9N 146.0E	PCN 5	T2.0/2.0 /01.0/24HRS	DMS036		PGTW
8	020007	6.6N 145.7E	PCN 5		DMS034		PGTW
9	020335	7.2N 143.9E	PCN 5		DMS037		PGTW
10	021140	7.2N 143.6E	PCN 5		DMS036		PGTW
11	021248	7.1N 143.4E	PCN 5		DMS039		PGTW
12	021248	6.9N 143.2E	PCN 5		DMS034		RPMK
13	022034	7.5N 141.5E	PCN 3		DMS037		PGTW
14	020021	9.3N 141.0E	PCN 3	T3.5/3.5	DMS036	INIT JDS	RODN
15	020021	7.9N 141.1E	PCN 3	T3.0/3.0 /01.0/25HRS	DMS036		PGTW
16	030129	8.2N 140.7E	PCN 3		DMS034		PGTW
17	030314	9.0N 137.8E	PCN 6		DMS037		PGTW
18	031228	9.2N 137.1E	PCN 6		DMS039		PGTW
19	031229	9.4N 137.2E	PCN 5		DMS039		RODN
20	031302	9.2N 136.9E	PCN 6		DMS036		PGTW
21	032155	10.5N 137.8E	PCN 1		DMS037		PGTW
22	040003	10.5N 137.0E	PCN 1	T5.0/5.0+/02.0/24HRS	DMS036		PGTW
23	040110	10.5N 137.7E	PCN 1		DMS039		PGTW
24	040110	10.5N 137.6E	PCN 1	T5.0/5.0	DMS034	INIT JDS	RPMK
25	041035	11.6N 129.7E	PCN 2		DMS037		PGTW
26	041244	11.9N 129.0E	PCN 1		DMS036		PGTW
27	041245	11.7N 128.8E	PCN 2		DMS036		RODN
28	041351	11.9N 128.7E	PCN 2		DMS039		PGTW
29	042135	12.4N 124.6E	PCN 1	T5.5/6.5 /00.5/24HRS	DMS037		PGTW
30	042135	12.5N 124.5E	PCN 1		DMS037		RPMK
31	050126	12.9N 124.9E	PCN 1	T6.0/6.0+/01.0/24HRS	DMS036		RPMK
32	050232	13.1N 125.9E	PCN 1	T6.5/6.5	DMS039	INIT JDS	RODN
33	050232	13.1N 125.8E	PCN 1		DMS034		RPMK
34	051015	14.1N 124.4E	PCN 2		DMS037		PGTW
35	05 226	14.4N 123.9E	PCN 1		DMS036		PGTW
36	051332	14.6N 123.6E	PCN 1		DMS039		RODN
37	051332	14.5N 123.7E	PCN 1		DMS039		PGTW
38	051408	14.5N 124.1E	PCN 1		DMS036		RPMK
39	052256	14.6N 122.9E	PCN 3	T4.5/5.5 /W1.0/27HRS	DMS036		RODN
40	060108	15.6N 123.1E	PCN 3	T5.5/6.5-/W1.0/27HRS	DMS036		PGTW
41	060109	15.5N 122.9E	PCN 3		DMS036		RODN
42	060213	15.7N 122.3E	PCN 1		DMS039		RODN
43	060213	15.9N 122.5E	PCN 1	T6.0/6.0+/50.0/24HRS	DMS039		RPMK
44	060354	16.7N 122.2E	PCN 3		DMS037		PGTW
45	061312	17.1N 122.2E	PCN 5		DMS039		PGTW
46	061350	17.2N 122.3E	PCN 5		DMS036		RPMK
47	061351	17.2N 122.3E	PCN 3		DMS036		RODN
48	062236	18.3N 121.5E	PCN 3		DMS037		RODN
49	070050	18.5N 121.7E	PCN 5		DMS036		PGTW
50	070153	17.9N 121.7E	PCN 5	T4.0/5.0 /W2.0/24HRS	DMS036		RPMK
51	070154	18.6N 121.7E	PCN 5	T3.0/4.0 /W1.5/25HRS	DMS034		PGTW
52	071116	18.7N 122.1E	PCN 1		DMS037		RPMK
53	071332	18.9N 117.8E	PCN 5		DMS036		PGTW
54	080032	16.1N 114.5E	PCN 5		DMS036	APRNT LLCC	PGTW

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	70043 HGT	OBS MSLP	MAX-RFC-WND VEL/ARG/RWG	MAX-FLT-LVL-WND HTG/VEL/BWG/HNR	ACCR	EYE SHAPE	EYE ORIEN-DIAW/TATION	WIND TEMP (C) DIR/1W/DP/SSGT	WIND NO.	
1	020625	7.4N 144.5E	1500FT		994	50 130	7 160 65 060 20	5 2			+21 +24 +22	2	
2	030500	8.5N 139.3E	700MM	2471		70 090	5 150 46 240 30	5 2			+14 +10	4	
3	030753	8.9N 134.4E	700MM	2946	982		150 73 020 8	5 2	CIRCULAR	17	+11 +15 + 8	4	
4	031833	10.1N 134.7E	700MM	2728			120 120 080 17	5 5	CIRCULAR	20	+14 +11	5	
5	032049	10.2N 134.3E	700MM	2643	945	130 270	3 370 125 270 10	5 1	CIRCULAR	8	+18 +19 + 8	5	
6	040507	11.0N 131.5E	700MM	2390		130 110	5 180 170 110 5	6 1	CIRCULAR	8	+17 +23 +13	6	
7	041900	12.2N 127.4E	700MM	2343	915		120 100 060 10	4 2	CIRCULAR		+19 +14	7	
8	042125	12.5N 126.5E	700MM	2372	919	120 330	3 260 111 180 15	4 2	CUNCENTRIC	25	70 +14 +15 +14	7	
9	040418	13.2N 124.1E	700MM	2413		130 050	7 120 116 050 12	8 5			+15 +12	8	
10	040702	13.6N 124.8E	700MM	2418		130 340	4 360 100 270 10	4 2	CIRCULAR	7	+18 +15 +12	8	
11	052017	14.1N 122.3E	700MM	2557			4 160 103 110 30	4 2	CIRCULAR	10	+15 +15	9	
12	052232	14.1N 122.7E	700MM	2587									
13	060520	14.9N 122.3E	700MM	2647	941	65 060	40 180 85 070 25	5 1	CIRCULAR	30	+15 +15 +15	9	
14	062001	17.4N 121.6E	700MM			100 050	35 130 52 020 60	5	CIRCULAR		+15 + 4	10	

RAJAN FIXES

FIX NO.	TIME (Z)	FIX POSITION	MADR	ACQY	EYE SHAPE	EYE DIAM	MINIM-CODE ACQY	COMMENTS	MADR POSITION	REF NO. NO.
1	040716	11.2N 126.7E	ACFT							
2	040500	11.2N 126.6E	LAND				20011	////		
3	040505	11.5N 126.5E	LAND				11245	301//	10.3M	126.0E 08046
4	040500	11.7N 126.3E	LAND				10111	53400	14.1M	123.0E 08040
5	040500	11.5N 126.0E	LAND				20001	////	10.1M	123.0E 08040
6	040500	11.4N 126.7E	LAND				10543	53515	10.0M	126.3E 08047
7	040530	11.7N 126.7E	LAND				20001	53020	10.1M	123.0E 08040
8	040700	11.4N 126.5E	LAND				20770	54535	10.0M	126.3E 08047
9	040700	11.4N 126.3E	LAND				20211	53315	10.3M	126.0E 08046
10	040900	11.4N 126.4E	LAND				20511	53300	10.1M	123.0E 08040
11	040900	11.4N 126.6E	LAND				20051	53325	14.1M	123.0E 08040
12	040900	11.4N 126.4E	LAND				20011	53125	14.0M	124.3E 08047
13	040900	11.3N 126.6E	LAND				20211	52921	10.1M	123.0E 08040
14	040900	11.3N 126.6E	LAND				20211	52921	10.0M	126.3E 08047
15	041000	11.1N 126.5E	LAND				20211	53314	14.0M	126.3E 08047
16	041100	11.4N 126.5E	LAND				20111	////	14.1M	123.0E 08040
17	041300	11.4N 126.0E	LAND				20211	54716	10.1M	123.0E 08040
18	041400	11.5N 127.0E	LAND				20211	53212	10.1M	123.0E 08040
19	041500	11.7N 127.3E	LAND				10112	53414	14.1M	123.0E 08040
20	041800	11.4N 127.3E	LAND				10112	53414	10.1M	123.0E 08040
21	041800	11.4N 127.6E	LAND	PJUN					15.2M	120.6E 08377
22	041900	11.4N 127.6E	LAND	PJUN					15.2M	120.6E 08377
23	041945	11.4N 127.5E	LAND	PJUN					15.2M	120.6E 08377
24	042005	11.4N 127.2E	LAND	PJUN					15.2M	120.6E 08377
25	042035	11.4N 127.1E	LAND	PJUN					15.2M	120.6E 08377
26	042110	11.2N 127.1E	LAND	PJUN					15.2M	120.6E 08377
27	042135	11.2N 127.0E	LAND	PJUN					15.2M	120.6E 08377
28	042215	11.3N 127.0E	LAND	PJUN					15.2M	120.6E 08377
29	042235	11.3N 127.0E	LAND	PJUN					15.2M	120.6E 08377
30	042300	11.4N 127.4E	LAND				10543	53500	16.3M	120.6E 08371
31	042300	11.4N 127.4E	LAND				10543	53500	14.1M	123.0E 08040
32	042300	11.4N 127.7E	LAND	PJUN					15.2M	120.6E 08377
33	040000	11.4N 127.0E	LAND				10221	51111	10.3M	120.6E 08371
34	040100	11.4N 127.6E	LAND				10543	53200	14.1M	123.0E 08040
35	040100	11.7N 127.9E	LAND				20211	51111	16.3M	120.6E 08371
36	040200	11.4N 127.8E	LAND				10543	53520	10.1M	123.0E 08040
37	040200	11.4N 127.9E	LAND				10211	51111	16.3M	120.6E 08371
38	040300	11.4N 127.4E	LAND				10543	53410	14.1M	123.0E 08040
39	040300	11.4N 127.9E	LAND				10211	51111	16.3M	120.6E 08371
40	040400	11.4N 127.3E	LAND				10543	53411	16.3M	120.6E 08371
41	040400	11.4N 127.3E	LAND				10543	53411	14.1M	123.0E 08040
42	040430	11.4N 127.4E	LAND				10011	43000	16.3M	120.6E 08371
43	040500	11.4N 127.2E	LAND				10543	53400	14.1M	123.0E 08040
44	040500	11.4N 126.6E	LAND				10741	43000	16.3M	120.6E 08371
45	040500	11.4N 126.4E	LAND				10543	53513	10.1M	123.0E 08040
46	040700	11.4N 127.5E	LAND				10011	53210	16.3M	120.6E 08371
47	040930	11.4N 127.3E	LAND				21243	52111	16.3M	120.6E 08371
48	041200	11.7N 127.1E	LAND				14000	52705	16.3M	120.6E 08371
49	041500	11.7N 127.1E	LAND				45111	72011	16.3M	120.6E 08371
50	041500	11.4N 127.0E	LAND				45111	72011	16.3M	120.6E 08371
51	041900	11.4N 127.4E	LAND				45111	72011	16.3M	120.6E 08371
52	041900	11.7N 127.4E	LAND				10211	53400	16.3M	120.6E 08371
53	070100	11.4N 127.1E	LAND				20311	52713	16.3M	120.6E 08371
54	070200	11.4N 126.7E	LAND				20311	52915	16.3M	120.6E 08371
55	070300	11.4N 126.6E	LAND				20311	52915	16.3M	120.6E 08371
56	070300	11.4N 126.4E	LAND				45111	72011	16.3M	120.6E 08371
57	070500	11.4N 126.4E	LAND				45111	72011	16.3M	120.6E 08371
58	070500	11.4N 126.1E	LAND				45111	72011	16.3M	120.6E 08371
59	070700	11.4N 126.2E	LAND				35242	24211	16.3M	120.6E 08371
60	070900	11.4N 119.4E	LAND				45111	72011	16.3M	120.6E 08371

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (NM)	COMMENTS
1	200000	11.4N 126.5E	05	60	
2	201200	11.4N 126.5E	05	120	
3	300000	11.4N 126.0E	10	225	
4	301200	11.4N 127.0E	05	320	
5	310000	11.4N 127.0E	10	90	
6	311200	11.4N 126.0E	15	75	
7	071200	11.4N 126.0E	30	30	
8	080000	11.4N 127.5E	20	90	
9	081200	11.4N 127.0E	15	120	

TROPICAL STORM WAYNE  
 SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACQRY	ORBITAL CODE	SATellite	COMMENTS	SITE
1	070012	17.7N 140.7E	PCN 5	TU.0/0.0	DMSP12	INIT JDS/2ND CNTR AT 113N 1470E	PGTW
2	070935	17.0N 137.5E	PCN 6		DMSP17	PSN 050 ON W FLOW	PGTW
3	071254	16.5N 130.4E	PCN 5		DMSP19	PSN HELICO ESTWHD	PGTW
4	072034	16.7N 125.4E	PCN 6		DMSP17		PGTW
5	080032	15.6N 125.6E	PCN 5	T1.5/1.5 /01.5/24HRC	DMSP19		PGTW
6	080914	14.2N 120.5E	PCN 5		DMSP17		PGTW
7	080914	14.2N 120.5E	PCN 5		DMSP17		RODM
8	081234	16.4N 131.4E	PCN 5		DMSP19		PGTW
9	081234	16.4N 131.4E	PCN 5		DMSP19		RODM
10	081314	16.4N 131.7E	PCN 5		DMSP19		PGTW
11	082155	16.0N 130.1E	PCN 5		DMSP17	ULC 103N 1294E	PGTW
12	080014	16.0N 120.7E	PCN 5	T2.5/2.5 /01.0/24HRC	DMSP19		PGTW
13	080115	15.7N 120.6E	PCN 5		DMSP19		PGTW
14	080115	15.7N 120.7E	PCN 5	T2.0/2.0	DMSP19	INIT JDS	RPMK
15	081035	16.0N 120.7E	PCN 5		DMSP17		PGTW
16	081256	16.6N 120.4E	PCN 5		DMSP19		PGTW
17	081255	16.2N 120.9E	PCN 5		DMSP19		RPMK
18	081350	16.6N 120.3E	PCN 6		DMSP19		RPMK
19	082134	17.0N 120.2E	PCN 6	T2.0/2.5 /00.5/21HRC	DMSP17		PGTW
20	082355	17.7N 120.3E	PCN 5		DMSP19		PGTW
21	100056	17.4N 120.7E	PCN 5		DMSP19	EDGE OF DATA	RODM
22	100056	17.5N 120.3E	PCN 5		DMSP19		PGTW
23	101015	18.7N 120.3E	PCN 5		DMSP17		PGTW
24	101238	18.6N 127.5E	PCN 5		DMSP19		PGTW
* 25	101337	17.5N 127.6E	PCN 5		DMSP19		PGTW
* 26	101337	17.5N 127.6E	PCN 5		DMSP19		PGTW
27	102113	18.6N 128.6E	PCN 4		DMSP17	EXP5D ULC	PGTW
28	102337	18.6N 128.5E	PCN 5		DMSP19		PGTW
29	110210	18.7N 128.4E	PCN 5	T1.0/1.0	DMSP19	INIT JDS	PGTW
30	110218	18.4N 128.4E	PCN 5	T1.0/1.5 /01.0/27HRC	DMSP19		PGTW
31	110954	18.4N 128.2E	PCN 5		DMSP17		PGTW
32	111219	18.4N 128.2E	PCN 5		DMSP19		PGTW
33	111318	18.7N 128.1E	PCN 5		DMSP19		PGTW
34	111318	18.3N 128.5E	PCN 5		DMSP19		RK50
35	112234	18.4N 127.2E	PCN 5	T1.0/1.0 /50.0/20HRC	DMSP17		RODM
36	120100	18.3N 127.2E	PCN 5		DMSP19		PGTW
37	120214	17.1N 125.2E	PCN 5		DMSP17		PGTW
38	130043	16.9N 126.6E	PCN 5	T3.0/3.0	DMSP19	INIT JDS	RPMK
39	130043	17.0N 126.6E	PCN 5		DMSP19		PGTW
40	130140	16.3N 126.5E	PCN 5		DMSP19		RPMK
41	130140	16.4N 126.4E	PCN 5	T1.0/1.0	DMSP19	INIT JDS	PGTW
42	130515	15.7N 122.0E	PCN 4		DMSP17		PGTW
43	131324	15.4N 122.4E	PCN 5		DMSP19		PGTW
44	131325	15.6N 122.3E	PCN 5		DMSP19		RODM

ATCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLY LVL	T0043 OBS HGT MSLP	MAX-SFC-WND VEL/DRG/40G	MAX-FLY-LVL-WND DTM/VEL/DRG/40G	APPROX NAV/MET	EYE SHAPE	EYE ORIEN-DIAG/TATIO	EYE TEMP (C) 000/ 10/ 20/50	WSN NO.
1	082027	15.4N 130.1E	700MM	7047		110 32 080 14 10 3				+13 +12	5
2	082153	15.4N 130.1E	700MM	7044	993	60 130 15 100 37 300 14 4 3			+14 +14 +11	5	
3	080928	15.4N 120.4E	700MM	7024	990	45 270 10 100 51 070 12 4 4			+13 +15 +11	6	
4	081947	17.3N 120.2E	700MM	7004		170 35 090 30 4 5			+10 +14 +11	7	
5	082140	17.6N 120.2E	700MM	7010		50 060 20 100 38 060 30 4 4			+10 +14 +11	7	
6	102906	17.3N 128.6E	700MM	7035		210 27 230 14 4 2			+13 +10	4	
7	102213	18.5N 128.6E	700MM	7071		35 140 75 230 30 140 90 4 4			+14 +13 +8	4	
8	110540	18.4N 128.4E	700MM	7065		35 210 30 000 30 320 90 4 10			+15 +11	10	
9	110925	18.4N 128.5E	700MM	7079	995	20 180 30 150 17 010 30 4 4			+14 +15 +10	10	
10	120515	18.1N 126.4E	1500FT	1003		40 220 30 000 48 010 180 4 10			+23 +25 +24	11	
11	120558	18.2N 126.5E	700MM	7124	1001						11

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (MM)	COMMENTS
1	070000	0.0N 141.5E	17	190	

TROPICAL DEPRESSION 26

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCRY	UNIQUE CODE	SATELLITE	COMMENTS	SITE
1	202255	14.24 154.4E	PCN 3		DMSP1A	LL EXP	PGTW
2	201137	14.14 154.5E	PCN 5		DMSP1A	ULCC	PGTW
3	202238	14.74 152.5E	PCN 3	T2.0/P.0	DMSP1A	INIT OBS	PGTW
4	010056	14.74 152.0E	PCN 3		DMSP1A		PGTW
5	010907	20.34 149.2E	PCN 6		DMSP17		PGTW
6	011119	20.44 151.1E	PCN 6		DMSP1A		PGTW
7	011156	20.44 151.0E	PCN 5		DMSP17		PGTW
8	012048	22.44 150.6E	PCN 5		DMSP17		PGTW
9	012219	22.44 151.0E	PCN 5	T1.0/P.0-W1.0/24HRS	DMSP1A		PGTW
10	012219	23.24 149.8E	PCN 5		DMSP1A	RELOCATED	PGTW
11	020037	24.34 149.7E	PCN 3		DMSP1A	LLCC	PGTW

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT IVL	70043 HGT	OBS HSLP	MAX-SFC-WND VEL/4RG/RWG	MAX-FLI-LVL-WIND ITH/VEL/8HG/4NG	ACCRY NAV/MET	EYE SHAPE	EYE ORIEN-DIAG/TATION	EYE TEMP (C) DUT/ IW/ DP/SGT	WSN NO.
1	011913	21.04 149.8E	700MB	7091			270 27 200 40	4 4			+15	3
2	012144	23.44 149.8E	700MB	7102	1001	40 090	5 240 35 200 20	4 1			+11 +14 + 6	3

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (MM)	COMMENTS
1	021200	24.24 152.1E	15	120	

TYPHOON ABBY

SATELLITE FIXES

FLX NO.	TIME (Z)	LAT POSITIVE	ACQRY	ORBITAL CODE	SATELLITE	COMMENTS	SITE
1	012238	4,250 152.0E	PCV 5	T1-5/7.5	DMS03A	INIT JDS	POTW
2	010307	4,250 152.2E	PCV 6		DMS037		POTW
3	011119	4,270 152.0E	PCV 5		DMS03A		POTW
4	011154	4,250 152.2E	PCV 5		DMS03A		POTW
5	012219	4,270 152.2E	PCV 5	T3-0/7.0 /10.5/24HRS	DMS03A		POTW
6	021740	4,250 152.2E	PCV 6		DMS037		POTW
7	021101	4,250 152.4E	PCV 6		DMS03A		POTW
8	021135	4,270 152.2E	PCV 6		DMS03A		POTW
9	022201	4,250 152.0E	PCV 5		DMS03A		POTW
10	030015	4,270 152.2E	PCV 5	T3-5/7.5 /10.5/24HRS	DMS03A		POTW
11	031042	4,270 152.2E	PCV 6		DMS03A		POTW
12	041117	4,270 152.4E	PCV 6		DMS03A		POTW
13	031519	4,250 152.4E	PCV 6		TIW05N		KGWC
14	032326	4,250 152.4E	PCV 3		DMS03A		POTW
15	032350	4,250 152.2E	PCV 3	T4-0/7.0 /10.5/24HRS	DMS03A		POTW
16	041024	4,250 152.1E	PCV 6		DMS03A		POTW
17	041050	4,250 152.0E	PCV 6		DMS030		POTW
18	042305	4,250 152.2E	PCV 5		DMS03A		POTW
19	042134	4,250 152.4E	PCV 5	T4-0/7.0 /50.0/24HRS	DMS03A		POTW
20	041147	4,270 152.4E	PCV 5		DMS03A		POTW
21	041220	4,250 152.2E	PCV 6		DMS03A		POTW
22	041734	4,270 152.2E	PCV 6		TIW05N	APRNT WLF INDICATED TO N	KGWC
23	042248	4,240 152.1E	PCV 5		DMS03A	2ND CIRC AT 0845 1504E	POTW
24	042319	4,240 152.2E	PCV 5	T4-0/7.0 /50.0/24HRS	DMS03A		POTW
25	041124	4,250 152.4E	PCV 5		DMS03A	UL UNIK AT 105N 147E	POTW
26	041201	4,250 152.2E	PCV 5		DMS03A		POTW
27	041724	4,250 152.0E	PCV 6		TIW05N		KGWC
28	070011	4,250 152.7E	PCV 5	T3-5/7.0 /10.5/24HRS	DMS03A		POTW
29	071042	4,250 152.0E	PCV 5		DMS03A		POTW
30	071111	4,250 152.2E	PCV 5		DMS03A		POTW
31	071141	4,270 152.2E	PCV 5		DMS03A		POTW
32	072352	4,250 152.5E	PCV 5	T2-5/7.5 /11.0/24HRS	DMS03A		POTW
33	040022	4,250 152.7E	PCV 5	T2-5/7.5	DMS03A	INIT JDS	ROUN
34	040022	4,250 152.3E	PCV 5		DMS03A		POTW
35	041234	4,250 152.1E	PCV 5		DMS03A		POTW
36	041303	4,250 152.0E	PCV 5		DMS03A	UPN WLF	ROUN
37	041303	4,250 152.1E	PCV 5		DMS03A		POTW
38	042334	4,250 152.4E	PCV 5	T3-0/7.0 /10.5/24HRS	DMS03A		POTW
39	050144	4,250 152.0E	PCV 5		DMS03A		POTW
40	031215	4,250 152.4E	PCV 5		DMS03A		POTW
41	031244	4,250 152.4E	PCV 5		DMS03A		POTW
42	031244	4,250 152.2E	PCV 5		DMS03A		ROUN
43	031437	4,250 152.2E	PCV 5		DMS03A		POTW
44	100059	4,250 152.5E	PCV 5		TIW05N		KGWC
45	100125	4,250 152.4E	PCV 5	T4-0/7.0 /11.0/24HRS	DMS03A		POTW
46	101157	4,250 152.0E	PCV 5		DMS03A		POTW
47	101157	4,250 152.5E	PCV 5		DMS03A		ROUN
48	101224	4,250 152.3E	PCV 5		DMS03A		POTW
49	111426	4,250 152.3E	PCV 5		TIW05N		KGWC
50	110039	4,250 152.0E	PCV 5		DMS03A		POTW
51	110105	4,250 152.4E	PCV 5	T4-5/7.5	DMS03A	INIT JDS	RPMK
52	110105	4,250 152.4E	PCV 3	T3-0/7.0 /11.0/24HRS	DMS03A		POTW
53	111329	4,250 152.4E	PCV 1		DMS03A		POTW
54	111345	4,250 152.4E	PCV 2		DMS03A		POTW
55	111345	4,250 152.3E	PCV 1	T3-0/7.0	DMS03A	INIT JDS	ROUN
56	120021	4,250 152.7E	PCV 1		DMS03A		POTW
57	120046	4,250 152.0E	PCV 1	T3-0/7.0 /50.0/24HRS	DMS03A		POTW
58	120046	4,250 152.4E	PCV 1	T3-0/7.0 /10.5/24HRS	DMS03A		RPMK
59	120227	4,250 152.4E	PCV 1		DMS03A		RPMK
60	120700	4,250 152.2E	PCV 2		TIW05N		KGWC
61	121302	4,250 152.4E	PCV 3		DMS03A		POTW
62	121327	4,250 152.1E	PCV 3		DMS03A		RPMK
63	121327	4,250 152.4E	PCV 3		DMS03A		POTW
64	130003	4,250 152.7E	PCV 3	T4-5/7.0 /10.5/24HRS	DMS03A		POTW
65	130205	4,250 152.3E	PCV 1		DMS03A		POTW
66	130205	4,250 152.2E	PCV 1	T4-0/7.0 /11.0/24HRS	DMS03A		ROUN
67	141244	4,250 152.5E	PCV 5		DMS03A		POTW
68	141305	4,250 152.4E	PCV 5		DMS03A		POTW
69	141305	4,250 152.2E	PCV 5		DMS03A		POTW
70	141753	4,250 152.4E	PCV 6		TIW05N		KGWC
71	142345	4,250 152.5E	PCV 1	T4-0/7.0 /50.0/24HRS	DMS03A		ROUN
72	142345	4,250 152.1E	PCV 5		DMS03A		POTW
73	140007	4,250 152.5E	PCV 5	T4-0/7.0 /10.5/24HRS	DMS03A		POTW

AIRCRAFT FIXES

FLX NO.	TIME (Z)	LAT POSITIVE	FLY LVL	T0004 HGT	JDS MSLP	WAT-SFC-WND VEL/DRG/DRG	WAT-FLY-LVL-WIND DIR/VEL/DRG/DRG	ACQRY NAV/WFT	EYE SHAPE	EYE ORIEN- JIRK/TATION	BYF TEMP (1) DIR/ 1W/ DP/ CFT	WSN NO.
1	012215	4,250 152.4E	700MM	7074	996	45 050 15	040 36 020 50	3 4			+20 +26 +23	1
2	022010	4,250 152.1E	700MM	7074	996	40 050 25	040 49 360 12	2 5			+4 +11	2
3	030920	4,250 152.2E	700MM	7064	998		110 39 360 24	3 5			+4 +10 + 9	3
4	031302	4,250 152.0E	700MM	7049	995		140 38 110 20	2 2			+10 +14	4
5	042139	4,250 152.4E	700MM	7050	992	55 030 15	150 40 070 60	4 5			+4 +14 +10	5
6	040104	4,250 152.2E	700MM	7050	994	50 010 25	020 41 360 90	4 4			+11 +14 +10	6
7	040718	4,250 152.4E	700MM	7013	987	40 140 10	140 50 270 54	4 4			+4 +14 +10	7
8	050154	4,250 152.4E	700MM	7013	986	40 270 10	040 53 330 20	2 4			+4 +14 +10	8
9	050340	4,250 152.4E	700MM	7101			120 53 330 60	3 9			+14 +18 +10	9
10	041300	4,250 152.0E	700MM	7083			140 59 020 15	4 1			+14 +13 +12	10
11	041421	4,250 152.4E	700MM	7070	1001		120 50 350 60	7 4			+14 +13 + 9	11
12	042150	4,250 152.4E	700MM	7134	1000	50 090 10	070 45 310 50	2 4			+14 +12 +12	12



TROPICAL STORM BEN

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCR	ORBITAL CODE	SATELLITE	COMMENTS	SITE
1	201134	11.74 124.0E	PCN 5		DMS030		PGTW
2	201217	11.74 124.0E	PCN 5		DMS030		PGTW
3	210059	11.54 127.0E	PCN 3	T2.0/2.0-	DMS030	INIT JDS	PGTW
4	210114	11.54 124.0E	PCN 3		DMS030		PGTW
5	210114	11.54 124.7E	PCN 5	T2.0/2.0	DMS030	INIT JDS	RPMK
6	211340	11.74 124.0E	PCN 5		DMS030		RODN
7	211355	11.54 124.0E	PCN 5		DMS030		PGTW
8	211355	11.54 124.7E	PCN 5		DMS030		RPMK
9	211355	11.54 124.0E	PCN 5		DMS030		RODN
10	220041	12.44 121.4E	PCN 5	T3.5/3.5- /01.5/24HRC	DMS030		PGTW
11	220236	12.14 121.0E	PCN 5	T3.5/3.5	DMS030	INIT JDS	RODN
12	220237	12.54 120.9E	PCN 5	T3.0/3.0 /01.0/25HRC	DMS030		RPMK
13	220652	13.54 119.4E	PCN 5		TIW02N		KGWC
14	221322	13.94 119.1E	PCN 5		DMS030		PGTW
15	221336	13.94 119.2E	PCN 5		DMS030		PGTW
16	230023	14.34 119.3E	PCN 5	T2.5/3.5 /01.0/24HRC	DMS030		PGTW
17	230204	15.74 119.0E	PCN 5		DMS030		RODN
18	230217	14.34 119.7E	PCN 5		DMS030		PGTW
19	230217	15.54 119.3E	PCN 5	T2.5/3.0 /00.5/24HRC	DMS030		RPMK
20	230640	14.04 121.3E	PCN 5		TIW02N		KGWC
21	231304	20.04 124.0E	PCN 5		DMS030		PGTW
22	231317	20.04 124.1E	PCN 5		DMS030		PGTW

AIRCRAFT FIXES

FIX NO.	TIME (Z)	FIX POSITION	FLT LVL	T0043 HGT	DRS MSLP	MAX-SFC-WIND VEL/HR/KN	MAX-FLT-LVL-WIND 014/VEL/DMU/KN	ACCR	EYE SHAPE	EYE ORIENT- DIAM/TATION	REF TEMP (C) DUT/ IN/ DP/ST	WSR NO.	
1	210620	11.54 125.0E	700MH	3047	992	50 030	20 100 46 330	60	4 5		+11 +11	1	
2	212225	12.54 124.3E	700MH			50 350	10 210 38 120	60	3 4			2	
3	220313	13.44 119.0E	700MH	3013	996	70 320	10 120 72 000	15	1 3		+13 + 8	4	
4	222239	15.54 119.4E	700MH	3052	995	70 020	12 170 56 090	15	2 2	CIRCULAR	25	+14 + 9	6

RAJAH FIXES

FIX NO.	TIME (Z)	FIX POSITION	RAJAH	ACCR	EYE SHAPE	EYE DIAM	RAJAH-CODE ASWAN TDUFF	COMMENTS	RAJAH POSITION	SITE WMO NO.
1	210710	12.04 125.2E	LAND				10477 / / / / /		10.34 124.0E	08446
2	210940	12.04 124.2E	LAND				10510 5 / / / /		10.34 124.0E	08446
3	211108	12.04 124.2E	LAND				12013 52714		10.34 124.0E	08446
4	211200	11.94 124.4E	LAND				10330 52618		10.34 124.0E	08446
5	211300	11.94 124.4E	LAND				25240 52620		10.34 124.0E	08446
6	220700	13.54 119.0E	LAND	PAIR	CIRCULAR	28			15.24 120.6E	08327
7	221900	15.54 119.4E	LAND		CIRCULAR				15.24 120.6E	08327



AD-A082 071

NAVAL OCEANOGRAPHY COMMAND CENTER/JOINT TYPHOON WARNI--ETC F/6 4/2  
ANNUAL TYPHOON REPORT 1979.(U)  
1979 J W DIERCKS, J K LAVIN, J H BELL

UNCLASSIFIED

NL

3 3

4

1




END

DATE

FILED

4 80

DTIC

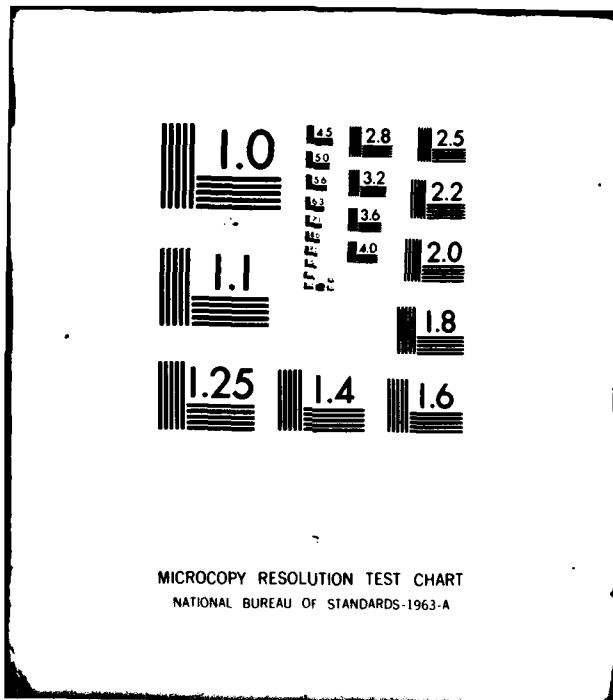

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

2. NORTH INDIAN OCEAN CYCLONE FIX DATA

TC 17-79

RATEL I I T F FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACRY	DVORAK CODE	SATellite	COMMENTS	SITE
1	042354	6.4N 80.7E	PCN 4	T1.0/1.0	DWSP47	CNTN BASED ON IPR LVL OUTFLOW	KMBC
2	041240	7.7N 87.0E	PCN 0	T1.0/1.0	DWSP47	POSIT BASED IPR LVL ANTICYCLONE	KMBC
3	041705	9.4N 88.5E	PCN 0	T1.0/1.0	DWSP44	INIT OBS	KMBC
4	070121	7.4N 84.0E	PCN 0	T1.0/1.0	DWSP47		KMBC
5	070509	6.0N 87.0E	PCN 0	T2.5/2.5 /D1.5/24HR	DWSP47		KMBC
6	071220	6.0N 86.0E	PCN 0		DWSP47	EDGE OF DATA POSIT BASED CURV	KMBC
7	071647	7.0N 84.7E	PCN 0		DWSP44		KMBC
8	080100	5.0N 86.1E	PCN 4	T3.0/3.0 /D0.5/24HR	DWSP47	APPXMT LOW LVL CIRC	KMBC
9	080520	5.7N 86.3E	PCN 1	T0.0/4.0 /D1.5/24HR	DWSP45		KMBC
10	081341	6.1N 86.4E	PCN 1		DWSP47	STORM ON EAST EDGE OF PICTURE	KMBC
11	081910	7.2N 86.7E	PCN 2		DWSP47		KMBC
12	080840	7.2N 86.3E	PCN 2		DWSP47	EYE COVERED BY THIN CI CANOPY	KMBC
13	080840	7.0N 87.5E			TIMON4	EYE UNSTARTED	FJDB
14	081321	6.7N 86.0E	PCN 4	T3.5/4.0-/M0.5/24HR	DWSP47	CTR BANDS ON CH BANDS	KMBC
15	081751	10.2N 85.5E	PCN 1		DWSP47	EYE RANGFD	KMBC
16	100921	10.7N 86.0E	PCN 1		DWSP47		KMBC
17	100651	11.0N 86.5E	PCN 1	T5.0/5.0 /D1.0/24HR	DWSP45	EYE EMBEDDED	KMBC
18	101302	12.1N 85.0E	PCN 2		DWSP47	GOOD EYE GOOD CI OUTFLOW	KMBC
19	101115	13.0N 87.0E	PCN 1		DWSP47	EYE WELL DEFINED	KMBC
20	102124	13.0N 87.2E			TIMON4	EYE WELL DEFINED EST. DTS	FJDB
21	102124	9.4N 86.3E			TIMON4	EYE NOT USBL	FJDB
22	110001	12.0N 87.5E	PCN 2	T5.0/5.0 /D1.5/24HR	DWSP47	EYE ON EDGE OF DATA	KMBC
23	110142	12.7N 87.3E	PCN 2		DWSP47	EYE WELL DEFINED	KMBC
24	110615	13.0N 87.7E	PCN 2	T6.0/6.0 /D1.0/24HR	DWSP44	EYE WELL DEFINED AND EMBEDDED	KMBC
25	111001	14.3N 88.5E			TIMON4	EYE WELL DEFINED	FJDB
26	111241	14.1N 87.0E	PCN 2	T6.0/6.0 /D1.0/24HR	DWSP47	EYE NOT USBL RNE TO CI CANOPY	KMBC
27	111715	13.0N 81.2E	PCN 1		DWSP47	W EDGE OF DATA CI CAP OVER EYE	KMBC
28	120122	14.3N 81.0E	PCN 4		DWSP47	OOD SOME SWN	KMBC
29	120556	14.7N 80.0E	PCN 4		DWSP44	EYE NOT USBL GOOD CI OUTFLOW	KMBC
30	121135	15.5N 78.0E			TIMON4	EYE DEFINABLE FST. DTS	FJDB
31	121602	16.2N 79.0E	PCN 4		DWSP47	EYE NOT USBL	KMBC
32	120192	16.4N 78.0E	PCN 0		DWSP47	UPR LVL ANTICYCLONE	KMBC
33	120530	16.0N 77.0E	PCN 0	T3.0/4.0-/M2.0/24HR	DWSP44		KMBC

TC 18-79

RATEL I I T F FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACRY	DVORAK CODE	SATellite	COMMENTS	SITE
1	170645	18.0N 69.2E	PCN 0	T1.0/1.0	DWSP44	INIT OBS/ANTICYCLONE ALOFT	KMBC
2	171349	18.7N 71.1E	PCN 0		DWSP47		KMBC
3	171927	17.0N 66.0E	PCN 0		DWSP44		KMBC
4	180230	18.2N 69.0E	PCN 0		DWSP47	UPR LVL ANTICYCLONE CI OUTFLOW	KMBC
5	180627	17.7N 68.2E	PCN 4	T2.0/2.0 /D1.0/24HR	DWSP47		KMBC
6	181100	18.1N 68.0E			TIMON4		KMBC
7	181311	18.2N 69.0E	PCN 0		DWSP47		KMBC
8	181800	18.5N 67.6E	PCN 0		DWSP44	POSIT BASED ON EXTRAP	KMBC
9	180800	18.0N 68.9E			TIMON4		KMBC
10	180210	18.0N 68.7E	PCN 0		DWSP47		KMBC
11	180600	18.2N 68.1E	PCN 5	T2.5/2.5 /D0.5/24HR	DWSP45		KMBC
12	180750	18.3N 68.3E	PCN 5		DWSP44	ON EDGE OF DATA	KMBC
13	181139	18.7N 57.0E			TIMON4		KMBC
14	181650	19.0N 60.5E	PCN 5	T2.5/2.5 /D0.5/24HR	DWSP47	BASED ON EXPANDED LLC	KMBC
15	181950	19.1N 60.7E	PCN 0		DWSP44	POSIT BASED ON EXTRAP	KMBC
16	182300	19.0N 58.0E			TIMON4		KMBC
17	200150	19.1N 57.0E	PCN 0	T2.0/2.5 /M0.5/24HR	DWSP47		KMBC
18	200731	19.3N 66.0E	PCN 5		DWSP44		KMBC
19	201630	21.4N 66.9E	PCN 0		DWSP47		KMBC
20	210619	19.4N 57.1E	PCN 5	T1.0/2.0 /M1.0/27HR	DWSP47	POSIT BASED ON EXTRAP	KMBC

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (NM)	COMMENTS
1	171200	17.5N 67.0E	30	40	
2	171800	18.0N 66.5E	30	20	
3	180800	18.0N 66.0E	45	60	
4	181200	19.0N 66.0E	35	80	
5	211500	21.0N 66.5E	15	200	

TC 22-79

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCRV	DVDRK CODE	SATFLITE	COMMENTS	SITE
1	211200	9.5N 84.0E			TIROXN		KNSS
2	211340	11.5N 84.4E	PCN 6		DWSP17	INIT DGS	KOMC
3	211602	12.0N 84.2E	PCN 6		DWSP10	INIT DGS	KOMC
4	220039	14.6N 87.2E	PCN 6	71.5/1.5	DWSP17		KOMC
5	220100	13.5N 87.1E			TIROXN		KNSS
6	220443	14.3N 86.0E	PCN 6		DWSP10		KOMC
7	221320	15.0N 89.0E	PCN 6	71.5/1.5	DWSP17	INIT DGS	KOMC
8	221543	15.7N 89.4E	PCN 6		DWSP10	INIT DGS	KOMC
9	220413	16.0N 81.2E	PCN 6	71.5/1.5	DWSP10	INIT DGS/PSN BASED ON COMV	KOMC
10	220424	16.0N 81.3E	PCN 6	71.5/1.5 /00.5/24HR	DWSP10	PSN BASED ON CENTER OF COMV	KOMC

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (NM)	COMMENTS
1	200000	9.0N 84.0E	20	250	
2	201200	10.0N 87.0E	20	200	

TC 23-79

SATELLITE FIXES

FIX NO.	TIME (Z)	FIX POSITION	ACCRV	DVDRK CODE	SATFLITE	COMMENTS	SITE
1	180559	12.6N 71.0E	PCN 5	71.0/1.0	DWSP10	INIT DGS/CENTER BASED ON LLCC	KOMC
2	181441	12.6N 70.1E	PCN 6		DWSP17		KOMC
3	180140	14.6N 70.4E	PCN 5	72.0/2.0 /01.0/24HR	DWSP17		KOMC
4	180443	14.1N 71.3E	PCN 5		DWSP10		KOMC
5	180541	14.1N 71.9E	PCN 5		DWSP10		KOMC
6	181421	14.0N 69.0E	PCN 6		DWSP17		KOMC
7	181640	13.5N 68.7E	PCN 6		DWSP10		KOMC
8	200120	14.4N 70.3E	PCN 6	70.5/1.5 /01.5/24HR	DWSP17	PSN BSU ON CNTR OF COMV/NO LIC	KOMC
9	200512	15.6N 70.4E	PCN 6		DWSP10		KOMC
10	201015	15.0N 69.0E			TIROXN		KNSS
11	201400	15.0N 69.0E	PCN 6		DWSP17		KOMC
12	201606	16.7N 69.4E	PCN 6		DWSP10	PSN BSU ON APPROX LLCC	KOMC
13	210059	16.7N 69.0E	PCN 6		DWSP17	PSN BSU ON APPROX LLCC	KOMC
14	210321	16.0N 69.5E	PCN 6		DWSP10		KOMC
15	211100	18.0N 68.0E	PCN 6		TIROXN		KNSS
16	211340	17.0N 69.4E	PCN 6	71.0/1.0 /00.5/24HR	DWSP17		KOMC
17	211447	16.0N 67.0E			TIROXN		FJBJ
18	220039	18.5N 64.2E	PCN 3	73.0/3.0 /02.0/24HR	DWSP17		KOMC
19	220100	17.7N 65.4E			TIROXN		KNSS
20	220221	18.4N 64.2E	PCN 3		DWSP17		KOMC
21	220625	18.0N 64.7E	PCN 3		DWSP10		KOMC
22	221130	19.0N 64.2E			TIROXN		KNSS
23	221501	19.4N 64.3E	PCN 6		DWSP17	UPR LVL OUTP IN GOOD	KOMC
24	221712	20.7N 67.3E	PCN 6		DWSP10		KOMC
25	221724	19.3N 67.5E	PCN 6	73.0/3.0 /02.0/24HR	DWSP10	PSN BASED ON CENTER OF COMV	KOMC
26	220200	19.7N 67.4E	PCN 6	72.0/3.0 /01.0/24HR	DWSP17		KOMC
27	220413	19.6N 67.3E	PCN 3		DWSP10		KOMC
28	220606	19.7N 67.2E	PCN 3		DWSP10	PSN BASED ON PROPOSED LLC	KOMC
29	221100	19.1N 61.0E	PCN 6		TIROXN		KNSS
30	221441	20.0N 61.0E	PCN 6	72.0/3.0 /01.0/24HR	DWSP17		KOMC
31	221705	20.3N 60.0E	PCN 6		DWSP10	POSIT DSN ON FIXTRAP	KOMC
32	240140	20.4N 60.1E	PCN 3	71.0/2.0 /01.0/24HR	DWSP17		KOMC
33	240354	20.3N 60.0E	PCN 3		DWSP10		KOMC
34	240547	19.0N 59.4E	PCN 6		DWSP10	GOOD LL FLD TIME/NO COMV	KOMC
35	241421	19.4N 58.0E	PCN 6		DWSP17	PSN-DS BASED ON LL CU LINE	KOMC
36	241646	19.6N 58.1E	PCN 6		DWSP10	COMV VAL/POSIT NSD ON LLC	KOMC

SYNOPTIC FIXES

FIX NO.	TIME (Z)	FIX POSITION	INTENSITY ESTIMATE	NEAREST DATA (NM)	COMMENTS
1	241000	20.0N 57.0E	10	200	

TC 24-79

SATELLITE PAGES

FIA NO.	TIME (Z)	FIX POSITION	ACFT	ORIGIN CODE	SATellite	COMMENTS	SITE
1	201624	10.24	00.5E	PCN 0	70.0/0.5	DWSP04	KOMC
2	202350	10.24	01.5E	PCN 0	71.0/1.5	DWSP07	KOMC
3	200164	10.24	00.0E			TIM004	FJOJ
4	200333	11.24	00.7E	PCN 0		DWSP04	KOMC
5	200440	11.24	00.3E	PCN 0		DWSP04	KOMC
6	201230	12.24	00.0E	PCN 0		DWSP07	KOMC
7	201500	12.24	00.3E	PCN 0		DWSP04	KOMC
8	300130	12.24	00.1E			TIM004	FJOJ
9	300315	12.24	00.5E	PCN 5	71.0/1.5	DWSP04	KOMC
10	300027	11.00	00.7E	PCN 5	71.0/1.5 /50.0/20MR	DWSP00	KOMC
11	301210	11.00	00.0E	PCN 0		DWSP07	KOMC
12	301207	12.00	00.3E	PCN 0		DWSP07	KOMC
13	300230	12.00	00.0E			DWSP00	KOMC
14	310050	12.24	00.3E	PCN 5	72.0/2.0 /00.5/20MR	DWSP07	KOMC
15	310257	12.24	00.7E	PCN 5		DWSP04	KOMC
16	310000	12.24	00.1E	PCN 5		DWSP04	KOMC
17	310000	12.00	00.5E			TIM004	FJOJ
18	311339	12.24	00.7E	PCN 5		DWSP07	KOMC
19	010030	12.24	01.0E	PCN 5	70.0/2.0 /00.5/20MR	DWSP07	KOMC
20	010530	12.24	00.0E	PCN 5		DWSP07	KOMC
21	011310	12.24	70.0E			DWSP07	KOMC
22	011030	11.24	70.0E	PCN 0		DWSP04	KOMC

TC 25-79

SATELLITE PAGES

FIA NO.	TIME (Z)	FIX POSITION	ACFT	ORIGIN CODE	SATellite	COMMENTS	SITE
1	100502	11.24	72.0E		70.0	DWSP	KOMC
2	101017	10.24	70.1E	PCN 0		DWSP07	KOMC
3	101000	11.00	00.0E	PCN 5		DWSP04	KOMC
4	100110	12.00	00.5E	PCN 5		DWSP00	KOMC
5	100020	12.00	00.7E	PCN 5	70.0/0.5 /50.0/20MR	DWSP04	KOMC
6	101700	10.00	00.5E	PCN 0		DWSP07	KOMC
7	100005	10.24	70.0E	PCN 5	70.0/0.5 /50.0/20MR	DWSP00	KOMC
8	101330	10.00	00.0E	PCN 0		DWSP07	KOMC
9	101705	10.00	00.7E	PCN 0		DWSP04	KOMC
10	100210	10.24	00.5E	PCN 0		DWSP07	KOMC
11	100000	10.24	00.7E	PCN 5	71.0/1.5 /01.0/20MR	DWSP04	KOMC
12	101057	10.00	70.1E	PCN 0		DWSP07	KOMC
13	101000	17.24	70.0E	PCN 0		DWSP00	KOMC
14	170130	17.00	71.1E	PCN 5		DWSP07	KOMC
15	170527	10.24	00.0E	PCN 5	71.0/1.5 /00.5/20MR	DWSP00	KOMC
16	171030	10.00	70.1E	PCN 5		DWSP07	KOMC
17	171020	10.00	70.2E	PCN 0		DWSP00	KOMC

TC 26-79

SATELLITE PAGES

FIA NO.	TIME (Z)	FIX POSITION	ACFT	ORIGIN CODE	SATellite	COMMENTS	SITE
1	201000	00.00	00.0E			DWSP00	KOMC
2	210033	00.00	00.0E			DWSP00	KOMC
3	210000	10.00	00.0E			DWSP00	KOMC
4	211314	10.24	01.0E	PCN 5		DWSP07	KOMC
5	211000	10.00	01.0E	PCN 0		DWSP00	KOMC
6	211010	7.24	01.0E			DWSP00	KOMC
7	200013	10.00	01.0E	PCN 0		DWSP07	KOMC
8	201203	10.00	00.0E	PCN 0		DWSP07	KOMC
9	201031	10.00	00.7E	PCN 0	70.0/0.5	DWSP00	KOMC
10	200303	10.24	00.1E	PCN 0		DWSP07	KOMC
11	200303	10.24	00.2E	PCN 0		DWSP07	KOMC
12	200330	10.00	00.0E	PCN 5	70.0/0.5 /50.0/20MR	DWSP00	KOMC
13	200331	10.00	07.0E	PCN 5	70.0/0.0	DWSP00	KOMC
14	201233	12.00	00.3E	PCN 5		DWSP07	KOMC
15	201010	10.24	00.0E	PCN 5		DWSP00	KOMC
16	200003	10.24	00.7E	PCN 5	70.0/2.0 /00.0/20MR	DWSP00	KOMC
17	201003	10.00	00.1E	PCN 0		DWSP07	KOMC
18	200002	10.00	70.0E	PCN 0		DWSP07	KOMC
19	200003	10.10	00.0E	PCN 5	71.0/2.0 /01.0/20MR	DWSP00	KOMC
20	201031	10.24	77.0E	PCN 5		DWSP04	KOMC

## APPENDIX

### I. CONTRACTIONS

AC&W	Aircraft Control and Warning System	ICAO	International Civil Aviation Organization
ACRY	Accuracy	IR	Infrared
ACFT	Aircraft	KM	Kilometer(s)
AIREP	Aircraft Weather Report(s) (Commerical and Military)	KT	Knot(s)
ANT	Antenna	LLCC	Low Level Circulation Center
APT	Automatic Picture Transmission	LVL	Level
ARWO	Aerial Reconnaissance Weather Officer	M	Meter(s)
ATT	Attenuation	M/SEC	Meters per Second
AVG	Average	MAX	Maximum
AWN	Automated Weather Network	MB	Millibar(s)
BRG	Bearing	MET	Meteorological
CDO	Central Dense Overcast	MIN	Minimum
CI	Current Intensity	MOHATT	Modified Hatrack
CLD	Cloud	MSN	Mission
CLSD	Closed	NAV	Navigational
CNTR	Center	NAVPGSCOL	Naval Postgraduate School
CONF	Confidence (number)	NEDN	Naval Environmental Data Network
CPA	Closest Point of Approach	NEDS	Naval Environmental Display Station
DEG	Degree(s)	NEPRF	Naval Environmental Prediction Research Facility
DIAM	Diameter	NESS	National Environmental Satellite Service
DIR	Direction	NET	Near Equatorial Trough
DMSF	Defense Meteorological Satellite Program	NM	Nautical Mile(s)
EASTPAC	Eastern Pacific	NOAA	National Oceanic and Atmospheric Administration
ELEV	Elevation	NRL	Naval Research Laboratory
FLT	Flight	NTCC	Naval Telecommunications Center
GOES	Geostationary Operational Environmental Satellite	OBS	Observation(s)
HATRACK	Hurricane and Typhoon Tracking (numerical forecast)	PCN	Position Code Number
HGT	Height	PE	Primitive Equation
HPAC	Mean of XTRP and Climatology	PSBL	Possible
HU	Hurricane	PTLY	Partly
HR	Hour(s)	QUAD	Quadrant
HVY	Heavy	RADOB	Radar Observation
		RECON	Reconnaissance

RNG	Range
RPD	Rapid
SAT	Satellite
SFC	Surface
SLP (MSLP)	Sea Level Pressure (Minimum Sea Level Pressure)
SMS	Synchronous Meteorological Satellite
SPOL	Spiral Overlay
SRP	Selective Reconnaissance Program
STNRY	Stationary
SST	Sea Surface Temperature
ST	Super Typhoon
TC	Tropical Cyclone
TCARC	Tropical Cyclone Aircraft Reconnaissance Coordinator
TCM	Tropical Cyclone Model
TD	Tropical Depression
TIROS	Television Infrared Observation Satellite
TS	Tropical Storm
TY	Typhoon
TUTT	Tropical Upper Tropospheric Trough (Sadler, 1976)
VEL	Velocity
VIS	Visual
VSBL	Visible
WESTPAC	Western Pacific
WMO	World Meteorological Organization
WND	Wind
WRS	Weather Reconnaissance Squadron
XTRP	Extrapolation
Z	Zulu Time (Greenwich mean time)

## 2. DEFINITIONS

**BEST TRACK** - A subjectively smoothed path, versus a precise and very erratic fix-to-fix path, used to represent tropical cyclone movement.

**CENTER** - The axis or pivot of a tropical cyclone. Usually determined by wind, temperature or pressure distribution.

**CYCLONE** - A closed atmospheric circulation rotating about an area of low pressure (counterclockwise in the northern hemisphere)

**EPHEMERIS** - Position of a body (satellite) in space as a function of time. When no geographical reference is available for gridding satellite imagery, then only ephemeris gridding is possible which is solely based on the theoretical satellite position and is susceptible to errors from satellite pitch, orbit eccentricity and the non-spherical earth.

**EXPLOSIVE DEEPENING** - A decrease in the minimum sea level pressure of a tropical cyclone of 2.5 mb/hr for 12 hrs or 5.0 mb/hr for 6 hrs (ATR 1971).

**EXTRATROPICAL** - A term used in warnings and tropical summaries to indicate that a cyclone has lost its "tropical" characteristics. The term implies both poleward displacement from the tropics and the conversion of the cyclone's primary energy sources from release of latent heat of condensation to baroclinic processes. The term carries no implications as to strength or size.

**EYE** - "EYE" is used to describe the central area of a tropical cyclone when it is more than half surrounded by wall cloud.

**FUJIWARA EFFECT** - An interaction in which tropical cyclones within about 700 nm of each other begin to rotate cyclonically about one another. When intense tropical cyclones are within about 400 nm of each other, they may also begin to move closer to each other.

**MAXIMUM SUSTAINED WIND** - Maximum surface wind speed averaged over a 1-minute period of time. Peak gusts over water average 20 to 25 percent higher than sustained wind.

**RAPID DEEPENING** - A decrease in the minimum sea level pressure of a tropical cyclone of 1.25 mb/hr for 24 hrs (ATR 1971).

**RECURVATURE** - The turning of a tropical cyclone from an initial path toward the west of northwest to the north then northeast.

**SIGNIFICANT TROPICAL CYCLONE** - A tropical cyclone becomes "significant" with the issuance of the first numbered warning by the responsible warning agency.

**SUPER TYPHOON/HURRICANE** - A typhoon/hurricane in which the maximum sustained surface wind (1-minute mean) is 130 kt or greater.

**TROPICAL CYCLONE** - A nonfrontal low pressure system of synoptic scale developing over tropical or subtropical waters and having a definite organized circulation.

**TROPICAL CYCLONE AIRCRAFT RECONNAISSANCE COORDINATOR** - A CINCPACAF representative designated to levy tropical cyclone aircraft weather reconnaissance requirements on reconnaissance units within a designated area of the PACOM and to function as coordinator between CINCPACAF, aircraft weather reconnaissance units, and the appropriate typhoon/hurricane warning center.

**TROPICAL DEPRESSION** - A tropical cyclone in which the maximum sustained surface wind (1-minute mean) is 33 kt or less.

**TROPICAL DISTURBANCE** - A discrete system of apparently organized convection--generally 100 to 300 miles in diameter--originating in the tropics or subtropics, having a non-frontal migratory character, and having maintained its identity for 24 hours or more. It may or may not be associated with a detectable perturbation of the wind field. As such, it is the basic generic designation which, in successive stages of intensification, may be classified as a tropical depression, tropical storm or typhoon (hurricane).

**TROPICAL STORM** - A tropical cyclone with maximum sustained surface winds (1-minute mean) in the range of 34 to 63 kt, inclusive.

**TROPICAL UPPER TROPOSPHERIC TROUGH (TUTT)** - "A dominant climatological system, and a daily synoptic feature, of the summer season over the tropical North Atlantic, North Pacific and South Pacific Oceans," from Sadler, James C., Feb. 1976: Tropical Cyclone Initiation by the Tropical Upper Tropospheric Trough. (NAVENVPREDRSCHFAC Technical Paper No. 2-76)

**TYPHOON/HURRICANE** - A tropical cyclone in which the maximum sustained surface wind (1-minute mean) is 64 kt or greater. West of 180 degrees longitude they are called typhoons and east of 180 degrees they are called hurricanes. Foreign governments use these or other terms for tropical cyclones and may apply different intensity criteria.

**WALL CLOUD** - An organized band of cumuli-form clouds immediately surrounding the central area of a tropical cyclone. The wall cloud may entirely enclose the eye or only partially surround the center.

### 3. REFERENCES

- Atkinson, G. D., and Holliday, C. R., 1977: Tropical Cyclone Minimum Sea Level Pressure - Maximum Sustained Wind Relationship for Western North Pacific, Monthly Weather Review, Vol. 105, No. 4, pp. 421-27 (also FLEWEACEN TECH NOTE: JTWC 75-1).
- Dvorak, V. F., 1973: A Technique for the Analysis and Forecasting of Tropical Cyclone Intensities from Satellite Pictures, NOAA TN NESS 45, 19 pp.
- Guard, C. P., 1979: The Intensity of Recurving Western North Pacific Tropical Cyclones: A New Look. Unpublished, 33 pp. (available from NAVOCEANCOMCEN/JTWC, COMNAVMAR, Box 17, FPO SF 96630).
- Ramage, C. S., 1971: Monsoon Meteorology, Academic Press, 253 pp.
- Riehl, H., 1971: Intensity of Recurving Typhoons, NAVWEASERSCHFAC Technical Paper No. 3-71, 11 pp.
- Sadler, J. C., 1976: Tropical Cyclone Initiation by the Tropical Upper Tropospheric Trough, NAVENVPREDRSCHFAC Technical Paper No. 2-76, 103 pp.
- Sikora, C. R., 1976: A Reevaluation of the Changes in Speed and Intensity of Tropical Cyclones Crossing the Philippines, FLEWEACEN TECH NOTE: JTWC 76-2, 11 pp.



## DISTRIBUTION

AFGWC (2)	HAVEASTOCEANCEN, NORFOLK (1)
AFGL/LYU (2)	NAVHISTCEN (1)
AF WEACEN TAIWAN (3)	NAVHISTCEN, DIR (1)
AMER EMBASSY, BANGKOK (5)	NAVOCEANCOMCEN, ROTA (1)
AMERICAN INST OF TAIWAN (1)	NAVOCEANCOMFAC, JACKSONVILLE (1)
ARRS/CC (2)	NAVOCEANCOMFAC, YOKOSUKA (3)
AWS/DNT (5)	NAVPOLAROCEANCEN, SUITLAND (1)
AWS/DOR (5)	NAVWESTOCEANCEN, PEARL HARBOR (2)
BUR OF MET, BRISBANE (2)	NAVY ROTC, TULANE UNIV (1)
BUR OF MET, MELBOURNE (4)	NCBC (1)
BUR OF MET, PERTH (1)	NEPRF (8)
CENWEABUR TAIWAN (3)	NESS/SFSS (1)
CINCPAC (2)	NHC, NOAA (3)
CINCPACAF/DOW (1)	NOAA/EDS CORAL GABLES, FL (4)
CINCPACFLT (5)	NOAA/EDS WASHINGTON, DC (2)
CIUDAD UNIV, MEXICO (1)	NOAA/ERL BOULDER, CO (1)
CIVIL DEFENSE, GUAM (4)	NOAA/ERL MIAMI (2)
CIVIL DEFENSE, SAIPAN (6)	NOAA/HYDROLOGY BR SILVER SPRINGS, MD (1)
CNO WASHINGTON DC (1)	NOAA/LIBRARY ROCKVILLE, MD (1)
CNOC (2)	NOAA/NESS WASHINGTON DC (2)
COLORADO STATE UNIV (2)	NOAA/PMEL SEATTLE, WA (2)
COLORADO STATE UNIV (LIBR) (1)	NOCD, AGANA (3)
COMFAIRECONRON ONE (VQ-1) (3)	NOCD, ALAMEDA (1)
COMLOGSUPPORTFORSEVENTHFLT (1)	NOCD, ASHEVILLE (1)
COMNAVAIRSYSOM (1)	NOCD, ATSUGI (1)
COMNAVFACENGCOMPACDIV (1)	NOCD, BARBERS POINT (1)
COMNAVFORJAPAN (1)	NOCD, CUBI POINT (1)
COMNAVMARIANAS (2)	NOCD, KADENA (2)
COMNAVSURFPAC (2)	NOCD, MISAWA (2)
COMPATRECONFORSEVENTHFLT (1)	NPGS DEPT OF MET (3)
COMPHIBGRU ONE (1)	NPGS LIBR (1)
COMSC (1)	OCEAN ROUTES INC, CA (2)
COMSEVENTHFLT (2)	OCEANO SERVICES INC, CA (1)
COMSUBGRU SEVEN (1)	OKINAWA MET OBS (1)
COMTHIRDFLT (1)	OLG/HQ AWS (1)
COMUSNAVPHIL (1)	OUSDRE, WASHINGTON, DC (2)
DDC, VA (1)	PAGASA RP (3)
DEPT OF AIR FORCE (1)	ROYAL OBSERVATORY HONG KONG (4)
DET 2, 1WW (2)	TAIWAN UNIV (3)
DET 2, 7WW (1)	TEXAS A&M UNIV (1)
DET 4, 1WW (2)	TTPI, SAIPAN (8)
DET 4, HQ AWS (2)	TYPHOON COMM SECR, MANILA (1)
DET 5, 1WW (1)	UNIV OF CHICAGO (1)
DET 8, 30WS (2)	UNIV OF GUAM (2)
DET 10, 30WS (1)	UNIV OF HAWAII DEPT OF MET (3)
DET 15, 30WS (1)	UNIV OF HAWAII LIBR (1)
DET 17, 30WS (1)	UNIV OF ILLINOIS AT URBANA-CHAMPAIGN (1)
DET 18, 30WS (1)	UNIV OF MEXICO (1)
DISTAD MARSHALLS (10)	UNIV OF RP (2)
ENVSCISUPGRU (4)	UNIV OF WASHINGTON (1)
ESCAP, BANGKOK (5)	USS BLUE RIDGE (1)
FAA, GUAM (5)	USS CONSTELLATION (2)
FLENUMOCEANCEN MONTEREY (2)	USS CORAL SEA (1)
FLORIDA SEVERE WEATHER NETWORK (4)	USS ENTERPRISE (1)
FLORIDA STATE UNIV TALLAHASSEE (2)	USS KITTY HAWK (1)
GEN MET DEPT THAILAND (2)	USS LONG BEACH (2)
GEOLOGICAL SURVEY, GUAM (1)	USS MIDWAY (1)
GOVERNOR OF GUAM (4)	USS NEW ORLEANS (2)
GUAM PUBLIC LIBRARY (5)	USS OKINAWA (1)
INDIA MET DEPT (2)	USS RANGER (2)
INST OF PHYSICS, TAIWAN (2)	USS TARAWA (1)
JAPAN MET AGENCY (3)	USS TRIPOLI (1)
JASDF, TOKYO (2)	WEA SERV MET OBS (2)
LOS ANGELES PUBLIC LIBR (1)	WORLD WEATHER BLDG LIBR (1)
MAC/HO, IL (2)	1WW/DON (6)
MCAS FUTENMA (1)	3AD/DOX (1)
MCAS IWAKUNI (2)	3WW/DNC (1)
MET DEPT BANGKOK (1)	5WW/DNC (1)
MET RESEARCH INST LIBR, TOKYO (2)	30WSQ (3)
NASA GREENBELT, MD (4)	41NCRW (2)
NAT CLIM CNTR, NC (1)	43SW/OI (1)
NATWEASERV FOROFF, HONOLULU (2)	54NRS (3)
NATWEASERV PACREG (2)	3350 TCHTG (1)
NAVAL ACADEMY (1)	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Annual Typhoon Report 1979	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ANNUAL TYPHOON REPORT 1979	5. TYPE OF REPORT & PERIOD COVERED Annual (JAN-DEC 1979)	6. PERFORMING ORG. REPORT NUMBER
		8. CONTRACT OR GRANT NUMBER(s)
7. AUTHOR(s)	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
9. PERFORMING ORGANIZATION NAME AND ADDRESS U. S. Naval Oceanography Command Center/Joint Typhoon Warning Center (NAVOCEANCOMCEN/JTWC) FPO San Francisco 96630	12. REPORT DATE 1979	
11. CONTROLLING OFFICE NAME AND ADDRESS U. S. Naval Oceanography Command Center/Joint Typhoon Warning Center (NAVOCEANCOMCEN/JTWC) FPO San Francisco 96630	13. NUMBER OF PAGES 191	
	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Tropical cyclones                      Tropical storms Tropical cyclone forecasting        Tropical depressions Tropical cyclone research            Typhoons Tropical cyclone steering model     Meteorological satellite Tropical cyclone fix data             Aircraft reconnaissance		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Annual publication summarizing the tropical cyclone season in the western North Pacific, Bay of Bengal and Arabian Sea. A brief narrative is given on each significant tropical cyclone including the best track. All reconnaissance data used to construct the best tracks are provided. Forecast verification data and statistics for the JTWC are summarized. Research efforts at the JTWC and NEPRF are discussed briefly.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE  
S/N 0102-014-6001

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)