



Catalog
HA 25.75 ·
2024

MEDIUM-VOLTAGE SWITCHGEAR

Medium-Voltage Switchgear **Type NXAIR M** up to **24 kV**, up to **25 kA**, Air-Insulated

[siemens.com/nxair](https://www.siemens.com/nxair)

SIEMENS

Application

Typical uses



NXAIR M circuit-breaker switchgear is used in transformer and switching substations, mainly at the primary distribution level, e.g.:

Application Public power supply

- Power supply companies
- Energy producers
- System operators.



Application Industry and offshore

- Automobile industry
- Traction power supply systems
- Mining industry
- Lignite open-cast mines
- Chemical industry
- Diesel power plants
- Electrochemical plants
- Emergency power supply installations
- Textile, paper and food industries
- Iron and steel works
- Power plants
- Petroleum industry
- Offshore installations
- Petrochemical plants
- Pipeline installations
- Data centers
- Shipbuilding industry
- Steel industry
- Rolling mills
- Cement industry.



MEDIUM-VOLTAGE SWITCHGEAR

Medium-Voltage Switchgear Type NXAIR M up to 24 kV, up to 25 kA, Air-Insulated

Catalog HA 25.75 · 2024

Invalid: Catalog HA 25.71 · 2019

[siemens.com/nxair](https://www.siemens.com/nxair)

Contents

Page

Application

Typical uses **2**

Customer benefit

Ensures peace of mind **4**

Saves lives **5**

Increases productivity **6**

Saves money **7**

Preserves the environment **8**

Sustainability

NXAIR M: A sustainable investment
for today and tomorrow **9 and 10**

Design

Classification **11**

Basic panel design **12 to 14**

Compartments **15 and 16**

Operation **17 and 18**

Components

Vacuum circuit-breaker **19**

Three-position switch-disconnector/fuse combination **20**

Circuit-breaker/fuse combination **21**

Current transformers **22 and 23**

Voltage transformers **24 to 26**

Low-voltage compartment **27**

Optical arc detection systems **28**

Technical data

Electrical data **29**

Product range, single busbar **30 to 33**

Product range, duplex (back-to-back) **34 and 35**

Dimensions **36**

Room planning **37 and 38**

Transport and packing **39**

Standards

Standards, specifications, guidelines **40 to 42**

The products and systems described in this catalog are manufactured and sold according to a certified management system (acc. to ISO 9001, ISO 14001 and BS OHSAS 18001).

Customer benefit

Ensures peace of mind



Ensures peace of mind

For power supply companies and industrial plants, the platform concept of the NXAIR family introduced at all production locations has very concrete advantages:

Smooth operation, exemplary availability, and optimal safety.

Features

- No handling of insulating gas and no pressure monitoring required
- As insulating medium, air is always available
- Factory-assembled, type-tested switchgear according to IEC 62271-200
- Platform concept introduced worldwide, centrally controlled development, local manufacture
- Use of standardized block-type current transformers
- Use of standard components available worldwide, locally manufactured components, in consideration of regional standards
- More than 610,000 air-insulated switchgear panels of Siemens in operation worldwide
- Use of maintenance-free vacuum circuit-breakers or switch-disconnectors
- Type testing of the main switching devices and the make-proof earthing switch in the panel
- Pressure-resistant partitions
- Flexibility regarding the low-voltage equipment (removable compartment, plug-in wires)
- Quality assurance in accordance with DIN EN ISO 9001.

Customer benefit

Saves lives



Saves lives

All switchgear types of the NXAIR family are approved with internal arc classification IAC A FLR, loss of service continuity category LSC 2B, and partition class PM.


This makes them suitable for universal installation, meeting the highest requirements regarding personal safety.

Features

- All operations can only be performed with closed and interlocked high-voltage door
- Metallic enclosure, earthed shutters and partitions
- Internal arc classified switchgear according to IAC A FLR (front, lateral and rear accessibility) for all short-circuit currents and an arc duration of 1 s
- Loss of service continuity category LSC 2B (separate partitioning of the busbar, connection and switching-device compartments)
- Partition class PM (metal-clad in pressure-resistant design)
- Unambiguous position indicators and control elements on the high-voltage door
- Use of maintenance-free vacuum circuit-breakers or switch-disconnectors
- Standard degree of protection IP3XD; different degrees of protection possible as an option
- Positively driven shutters (separately lockable)
- Logical mechanical interlocking system.

Customer benefit

Increases productivity

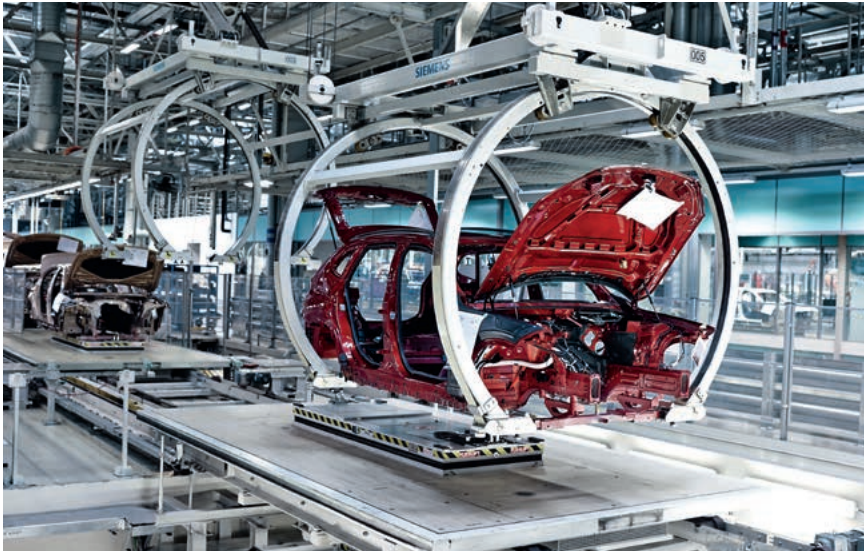

Increases productivity

Properties such as modular design, type tests of the switching devices in the switchgear, confinement of an internal arc to the respective compartment, and thus maximum operational reliability, contribute to optimum operation and a remarkable increase of productivity.

Features

- Loss of service continuity category LSC 2B
- Partition class PM
- Maximum degree of protection IP51 possible
- Positively driven shutters
- Use of standardized block-type current transformers
- Cable testing possible without isolating the busbar
- Functions such as establishment of the isolating distance, as well as feeder and busbar earthing, can be completely controlled from remote
- Confinement of an internal arc to the respective compartment up to 25 kA
- Use of maintenance-free vacuum circuit-breakers or switch-disconnectors
- Control cables in metallic wiring ducts
- Easy access to all switchgear components
- Rapid interruption of an internal arc optionally possible by installation of arc detection systems.

Customer benefit

Saves money

Saves money

The compact design of the NXAIR family pays twice for owners thanks to the use of the new SION circuit-breaker series.

On the one hand, building costs can be reduced in this way, and on the other hand, the maintenance-free circuit-breakers and the modular design enable continuous operation without expensive downtimes.



Features

- Use of maintenance-free vacuum circuit-breakers or switch-disconnectors
- Maintenance-free switchgear for up to 10 years
- Interruption of operation reduced to a minimum by logical mechanical interlocking system
- Minimized space requirements (reduced building investments) thanks to compact design and flexible cable connection options, and/or flexible pressure relief duct systems.

Customer benefit

Preserves the environment



Preserves the environment

Air used as insulating medium, local production locations with short transportation ways and times, as well as a service life of more than 30 years, optimize the total energy balance.

Features

- Air as insulating medium is absolutely neutral to the environment
- Local production presence in all regions, minimized energy consumption (CO₂) regarding transport
- A service life of more than 30 years optimizes the energy balance additionally
- The materials used are fully recyclable without special knowledge
- Easy disposal.

Sustainability

NXAIR M: A sustainable investment for today and tomorrow



NXAIR M: A sustainable investment for today and tomorrow

At Siemens, we believe in sustainable development that meets current needs without compromising the future.

Siemens supports sustainability with a customized program, our “DEGREE framework”. Our DEGREE framework guides our efforts in six crucial areas of action that drive sustainability and continuously evolve.

Decarbonization: Support the 1.5 °C target to fight global warming

Ethics: Foster a culture of trust, adhere to ethical standards, and handle data with care

Governance: Apply state-of-the-art systems for effective and responsible business conduct

Resource efficiency: Achieve circularity and dematerialization

Equity: Foster diversity, inclusion, and community development to create a sense of belonging

Employability: Enable our people to stay resilient and relevant in a permanently changing environment.

Air-insulated medium-voltage switchgear NXAIR M is a prime example for our commitment to sustainability. Decades of experience have made **NXAIR M** a leader in **resource efficiency and decarbonization:**

- Use of natural air as insulating medium and vacuum interrupters for switching
- Free of all materials harming the environment (e.g., asbestos, mercury, SF₆ gas or other F-gases)

- Reduced fire load by using a minimum of insulating material
- Easily recyclable and reusable thanks to the use of homogenous material
- Use of maintenance-free vacuum circuit-breakers, and 10-year maintenance intervals for the switchgear
- Long product lifetime and serviceable life of more than 30 years
- Safe spare part supply over a period of minimum 10 years after phase-out
- Short transportation routes to customers thanks to global manufacturing network
- Global service network close to the customer
- Possibility for remote factory acceptance tests (FAT) and remote support for commissioning, service and maintenance
- Upgradable with condition monitoring systems for predictive maintenance
- Continuous improvement of durability by means of simulation software for development, testing and production based on the corresponding international standards and design directives.

Sustainability

NXAIR M: A sustainable investment for today and tomorrow



NXAIR M: A sustainable investment for today and tomorrow

Low-power instrument transformers (aka. NCITs) support making our switchgear even more sustainable. In the use phase, they help to reduce energy consumption and CO₂ emissions, as well as operating costs.

Additionally, we as Siemens commit ourselves to comply with all legal provisions and regulations like REACh, the Minamata Convention, the Responsible Minerals Initiative, as well as the Stockholm Convention consequently to ensure a sustainable future for all.

For NXAIR M, Life Cycle Assessments (LCA) are performed, and Environmental Product Declarations (EPD) for reference installations are available.

With its environmentally friendly design, resource-efficient production, and long-lasting performance, NXAIR M is the ideal solution for your power supply.

NXAIR – Enjoy the Air

Explanations:

REACh (Registration, Evaluation, Authorization and Restriction of Chemicals)

REACh - Regulation (EC) 1907/2006 is the European Chemicals Regulation concerning the registration, evaluation, authorization and restriction of chemicals. It has been in force since 2007 and replaces 40 individual laws. The REACh Regulation is considered to be one of the world's most stringent chemicals laws.

Environmental Product Declaration (EPD)

An Environmental Product Declaration (EPD) is used to provide the customer with information about the

“ecological footprint” of a product. Siemens has a clearly formulated strategy for the development of EPDs. EPDs are based on independently verified data from life cycle assessments, life cycle inventory analyses, or information modules, which comply with the ISO 14040 series of standards.

Life Cycle Assessments (LCA)

We use Life Cycle Assessments (LCA) to help us calculate the ecological footprint of our products and systems over their entire life cycle. Siemens follows the strict requirements of the ISO 14040 and ISO 14044 standards when applying an LCA.



Classification

Circuit-breaker switchgear NXAIR M is factory-assembled, metal-enclosed and type-tested switchgear for indoor installation according to IEC 62271-200, and corresponds to the following classifications.

Loss of service continuity category and partition class

Loss of service continuity category	LSC 2B
Partition class	PM
Accessibility to compartments	
– Busbar compartment	Tool-based
– Switching-device compartment	Interlock-controlled
– Connection compartment	Interlock-controlled or tool-based

Internal arc classifications

The following internal arc classifications are fulfilled:
IAC A FLR, I_{sc} , t


IAC	Internal Arc Classification
A	300 mm distance of indicators for test (installation in closed electrical service location)
F	Front arrangement of indicators for test
L	Lateral arrangement of indicators for test
R	Rear arrangement of indicators for test
I_{sc}	Test current for NXAIR up to 25 kA
t	Arc duration 1 s

In this way, NXAIR switchgear is suitable for unrestricted application (wall- or free-standing arrangement) in electrical service locations up to the maximum short-circuit current ratings.

Design


Basic panel design

Basic panel design – circuit-breaker panel (example)

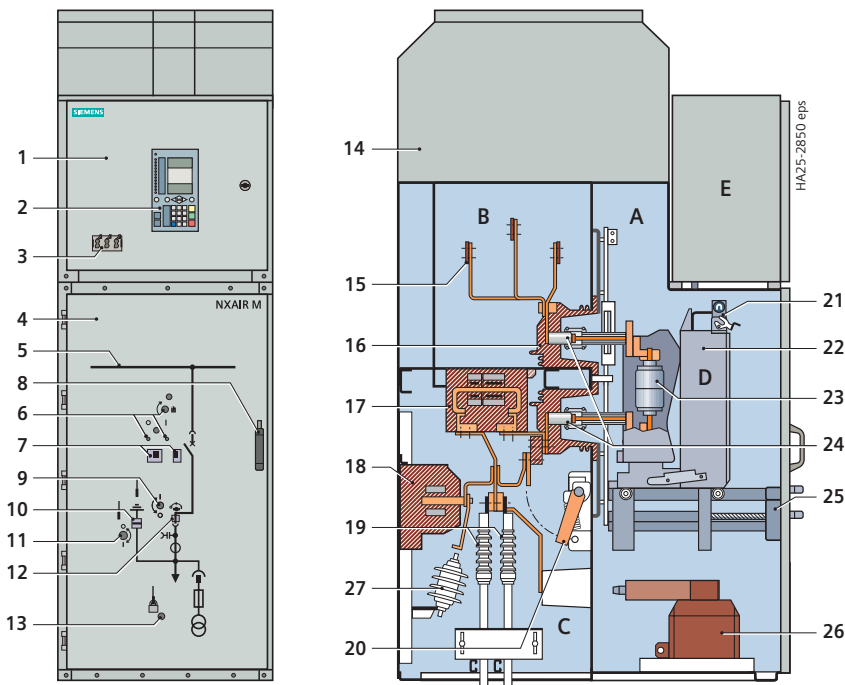

- | | | |
|--|--|--------------------------------|
| 1 Door to low-voltage compartment | 14 Pressure relief duct | A Switching-device compartment |
| 2 Protection device | 15 Busbars | B Busbar compartment |
| 3 <u>Option:</u> Capacitive voltage detecting system for feeder and busbar | 16 Bushing-type insulator | C Connection compartment |
| 4 High-voltage door | 17 Block-type current transformer | D Withdrawable circuit-breaker |
| 5 Mimic diagram | 18 Voltage transformer | E Low-voltage compartment |
| 6 "CLOSE-OPEN" actuating openings for the circuit-breaker, opening for spring charging | 19 Cable connection | |
| 7 Inspection window to recognize the "CLOSED-OPEN" indicator of the circuit-breaker, "closing spring charged" indicator, operation counter | 20 Make-proof earthing switch | |
| 8 Handle for opening the high-voltage door | 21 Low-voltage connection, plug-in type | |
| 9 Actuating opening for racking the switching device | 22 Operating and interlocking unit for circuit-breaker | |
| 10 Mechanical position indicator for feeder earthing switch | 23 Vacuum interrupter | |
| 11 Actuating opening for feeder earthing switch, manual or optionally motor operation | 24 Contact system | |
| 12 Mechanical position indicator for withdrawable part position | 25 Operating and interlocking unit for racking the switching device and for earthing, manual or optionally motor operation | |
| 13 Actuating opening for withdrawable voltage transformers | 26 <u>Option:</u> Withdrawable voltage transformers | |
| | 27 <u>Option:</u> Surge arresters | |

Basic panel design – circuit-breaker panel (example) – duplex (back-to-back)

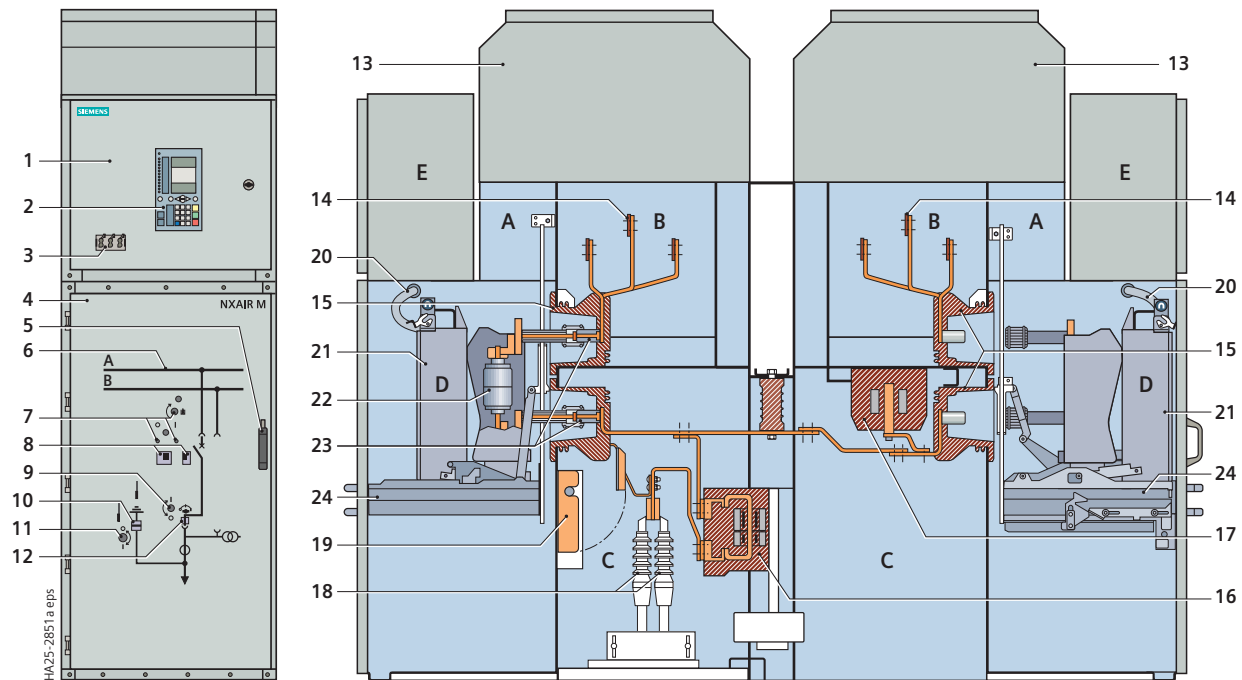


- | | | |
|---|--|---|
| <ul style="list-style-type: none"> 1 Door to low-voltage compartment 2 Protection device 3 <u>Option:</u> Capacitive voltage detecting system for feeder and busbar 4 High-voltage door 5 Handle for high-voltage door 6 Mimic diagram 7 "CLOSE-OPEN" actuating openings for the circuit-breaker, opening for spring charging 8 Inspection window to recognize the "CLOSED-OPEN" indicator of the circuit-breaker, "closing spring charged" indicator, operation counter 9 Actuating opening for racking the switching device 10 Mechanical position indicator for feeder earthing switch 11 Actuating opening for feeder earthing switch, manual or optionally motor operation 12 Mechanical position indicator for withdrawable part position | <ul style="list-style-type: none"> 13 Pressure relief duct; with top-mounted arc absorber, if required 14 Busbars 15 Bushing-type insulator 16 Block-type current transformer 17 Voltage transformer 18 Cable connection 19 Make-proof earthing switch 20 Low-voltage connection, plug-in type 21 Operating and interlocking unit for circuit-breaker 22 Vacuum interrupter 23 Contact system 24 Withdrawable part for racking the switching device and for earthing, manual or optionally motor operation | <ul style="list-style-type: none"> A Switching-device compartment B Busbar compartment C Connection compartment D Withdrawable circuit-breaker E Low-voltage compartment |
|---|--|---|

Design

Basic panel design

Basic panel design – three-position switch-disconnector panel with HV HRC fuses (example)

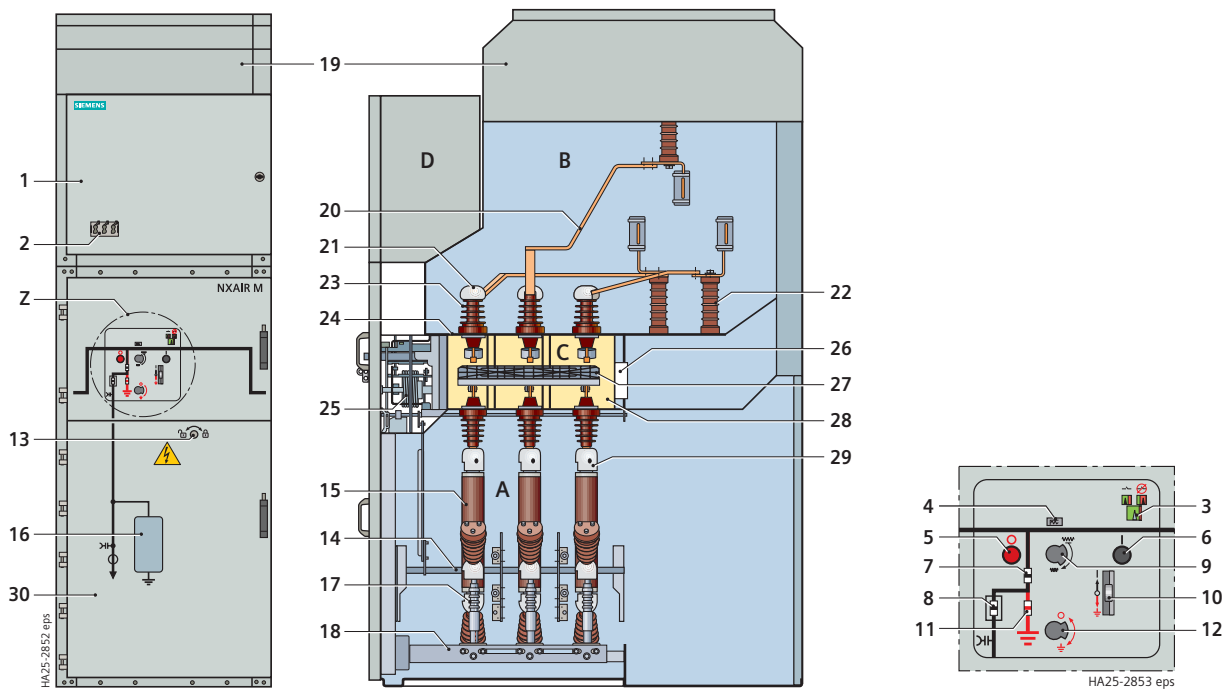

- | | | |
|---|---|--|
| <ul style="list-style-type: none"> 1 Door to low-voltage compartment 2 <u>Option:</u> Capacitive voltage indicating system 3 Ready-for-service indicator 4 "Spring charged" indicator for stored-energy mechanism "OPEN" 5 Operation for stored-energy mechanism "OPEN", red 6 Operation for stored-energy mechanism "CLOSED", black 7 Position indicator for switch-disconnector 8 "Fuse tripped" indicator 9 Manual operation for "spring charging" 10 Control gate for the "disconnecting / earthing" functions of the three-position switch 11 Position indicator for earthing switch 12 Manual operation for earthing function 13 Interlock for high-voltage door 14 Earthing switch on feeder side 15 HV HRC fuse-link (e = 442 mm) 16 Inspection window 17 Post insulator for the cable connection 18 Cable bracket for fastening cables | <ul style="list-style-type: none"> 19 Pressure relief duct 20 Busbar 21 Insulating cap at the busbar 22 Post insulator for the busbar 23 Upper bushing-type insulators for three-position switch-disconnector 24 Metallic partition of busbar compartment 25 Spring-operated/stored-energy mechanism for three-position switch-disconnector 26 Pressure relief device for switching device 27 Three-position switch-disconnector 28 Gas-insulated vessel for switching device, filled with SF₆ gas 29 Terminal for HV HRC fuse assembly (with tripping) 30 High-voltage door | <ul style="list-style-type: none"> A Switching-device/ connection compartment B Busbar compartment C Switch-disconnector/ fuse combination D Low-voltage compartment |
|---|---|--|

Compartments of circuit-breaker panel

Switching-device compartment

- Enclosure made of sendzimir-galvanized sheet steel, alternatively with cast-resin powder-coated sheet steel
- Pressure relief upwards
- Panel front powder-coated with epoxy resin
- Standard color RAL 7035
- Separate shutter mechanism for opening and closing the
 - Busbar compartment
 - Connection compartment
- Metallic shutters
- High-voltage door pressure-resistant in the event of internal arcs in the panel
- Pressure-resistant partitions to connection and busbar compartments
- Lateral metallic wiring duct for laying the control cables
- Low-voltage plug connector for connection of control cables between primary part and secondary part
- Switching-device compartment for the different panel versions with withdrawable devices:
 - Vacuum circuit-breaker
 - Withdrawable disconnecter link
 - Withdrawable metering part
- Endurance classes for
 - Circuit-breaker: E2, M2, C2
 - Isolating distance (withdrawable part): M0, manual or optionally motor operation for withdrawable circuit-breaker and withdrawable disconnecter link.

Busbar compartment

- Enclosure made of sendzimir-galvanized sheet steel, alternatively with cast-resin powder-coated sheet steel
- Pressure relief upwards
- Option: Transverse partition from panel to panel
- Busbars made of flat copper, bolted from panel to panel
 - Option: Insulated
- Pressure-resistant partitions to connection and switching-device compartments, pressure-resistant rear wall
- Shutters can be opened and locked separately
- Bushing-type insulators for supporting the busbars and for accommodating the upper fixed contacts for the switching device
- Option: Coupling electrode for capacitive voltage detecting system
- Option: Bushing-type low-power instrument transformers for current and/or voltage.

Additional compartments (option) for busbar components¹⁾

- Top-mounted compartment over the busbar compartment, within the pressure relief duct
- Separate pressure relief of the additional compartment via pressure relief flaps
- Options: Possibility of installing the following components (but not for panels with natural ventilation, see also product range)
 - Voltage transformers
 - Make-proof earthing switch (endurance classes: M0, E1), manual or optionally motor operation
 - Bar connection
 - Surge arresters.

Connection compartment

- Enclosure made of sendzimir-galvanized sheet steel, alternatively with cast-resin powder-coated sheet steel
- Pressure relief upwards through rear pressure relief duct
- Pressure-resistant partitions to switching-device and busbar compartments
- Shutters can be opened and locked separately
- Earthing busbar
- Option: Installation of bushing-type insulators or block-type current transformers
- Option: Bushing-type low-power instrument transformers for current and/or voltage
- Option: Coupling electrode for capacitive voltage detecting system
- Pressure-resistant floor cover
- Connection from front/bottom, or from rear/bottom, or from rear/top
- Suitable for connection of:
 - Single-core XLPE cables up to 4 × 500 mm² per panel depending on the rated continuous current and other built-in components
 - Three-core cables up to 2 × 240 mm² per panel depending on the rated continuous current and other built-in components
 - Flat copper bars with bushings in a base plate, or fully-insulated bars including floor cover.

1) See also product range.

Design

Compartments

Compartments of circuit-breaker panel

Connection compartment (contin.)

- Installation of voltage transformers
 - Cast-resin insulated
 - 3 × 1-pole
 - Fixed-mounted, without primary fuses
 - Or withdrawable with primary fuses
- Make-proof earthing switch
 - With manual operation, optionally motor operation
 - In addition to the standard interlocking: Earthing switch optionally lockable or electromagnetically interlocked against the withdrawable switching device
- Endurance classes for earthing switch: M0, E1
- Surge arresters
 - For protecting the switchgear against external overvoltages.

Compartments of three-position switch-disconnector panel with HV HRC fuses

Busbar compartment

- Enclosure made of sendzimir-galvanized sheet steel, alternatively with cast-resin powder-coated sheet steel
- Pressure relief upwards
- Option: Transverse partition from panel to panel
- Busbars made of flat copper, bolted from panel to panel
 - Option: Insulated
- Bushing-type insulators for supporting the busbars
- Pressure-resistant partition to switching-device/connection compartment
- Option: Coupling electrode for capacitive voltage detecting system.

Switching-device/connection compartment

- Enclosure made of sendzimir-galvanized sheet steel, alternatively with cast-resin powder-coated sheet steel
- Pressure relief upwards
- Panel front powder-coated with epoxy resin
- Standard color RAL 7035
- High-voltage door pressure-resistant in the event of internal arcs in the panel
- Pressure-resistant partition to busbar compartment
- Lateral metallic wiring duct for laying the control cables
- Firmly wired cable harness for connection of control cables between primary part and secondary part
- Switching-device/connection compartment with fixed-mounted three-position switch-disconnector/fuse combination (LSC 2)
- Endurance classes for three-position switch-disconnector/fuse combination:
 - General-purpose switch: M1, E3
 - Earthing switch: M0, E2
- HV HRC fuse:
 - 1 fuse per phase
 - Reference dimension: 442 mm
- Earthing busbar
- Connection from front/bottom
- Option: Coupling electrode for capacitive voltage detecting system
- Pressure-resistant floor cover
- Suitable for single-core XLPE cables with $1 \times 120 \text{ mm}^2$ as a maximum
- Earthing switch, arranged on feeder side, downstream from HV HRC fuse:
 - With manual operating mechanism
 - Endurance class: M0, E1
 - Standard interlock against high-voltage door
 - In addition to the standard interlock, optionally lockable
- Option: Installation of cable-type current transformer 4MC7033
 - Arranged on the cable at the panel connection
 - For shielded cables.

Operation – circuit-breaker panel

Features

- Integrated mimic diagram
- Indication of the respective switch positions for circuit-breaker CLOSED/OPEN, disconnected position, and earthing switch CLOSED/OPEN on the integrated mimic diagram
- Unambiguous assignment of actuating openings and control elements to the corresponding position indicators
- All switching operations can only be performed with closed high-voltage door
- Ergonomically favorable height for all control elements and indicators
- Option: Verification of safe isolation from supply for feeder or busbar by means of the capacitive voltage detecting system with panel front closed.

Interlocks

- Interlocking conditions specified according to IEC 62271-200 are fulfilled
- Feeder earthing switch can only be operated with switching device in disconnected position
- Switching device can only be racked on the movable part with the associated switching device in OPEN position and with earthing switch OPEN
- Switching device can only be operated in interlocked disconnected or service position.

Beyond the specifications of the standards

- Coding prevents insertion of switching devices with a lower rated continuous current into panels with a higher rated continuous current
- Interlocking between the high-voltage door and the position of the withdrawable part
- Option: Electromagnetic interlocks, mechanical key interlocking systems, padlocks.



Design

Operation

Operation – three-position switch-disconnector panel with HV HRC fuses

Features

- Integrated mimic diagram
- Indication of the respective switch position for three-position switch-disconnector CLOSED/OPEN/EARTHED on the integrated mimic diagram
- Unambiguous assignment of actuating openings and control elements to the corresponding position indicators
- All operations with closed high-voltage door
- Ready-for-service indicator integrated in the operating front
- Actuating openings are functionally interlocked against each other, and are optionally lockable
- Separate operating levers for disconnecting and earthing function.


Interlocks

- Interlocking conditions specified according to IEC 62271-200 are fulfilled
- Three-position switch: Disconnecting function against earthing function
- Access to cable compartment is generally only possible if:
 - The feeder is isolated
 - The feeder is earthed (“EARTHED” position)
- The three-position switch-disconnector cannot be switched from “EARTHED” position to “OPEN” position when the high-voltage door is open and the HV HRC fuse compartment is open
- Option: Locking device for padlock available for three-position switch-disconnector and lockable on the operating mechanism side in every switch position.

Vacuum circuit-breaker

Features

- The circuit-breakers conform to the following standards:
 - IEC 62271-1
 - IEC 62271-100
- All circuit-breakers fulfill the endurance classes C2, E2, M2 and S1 according to IEC 62271-100, as well as the shortest rated operating sequence O – 0.3 s – CO – 15 s – CO.
Option: Rated operating sequence O – 0.3 s – CO – 3 min – CO
- Suitable for all switching duties
- Stored-energy spring mechanism with motor operation, manual operation always possible
- Racking the circuit-breaker with manual operation, optionally with motor operation
- 64-pole low-voltage plug connection between circuit-breaker and fixed part
- The circuit-breakers are maintenance-free:
 - Under normal ambient conditions according to IEC 62271-1
 - Up to 10,000 operating cycles, maintenance-free
 - No greasing
 - No readjusting
 - Up to 30,000 operating cycles, with maintenance work.

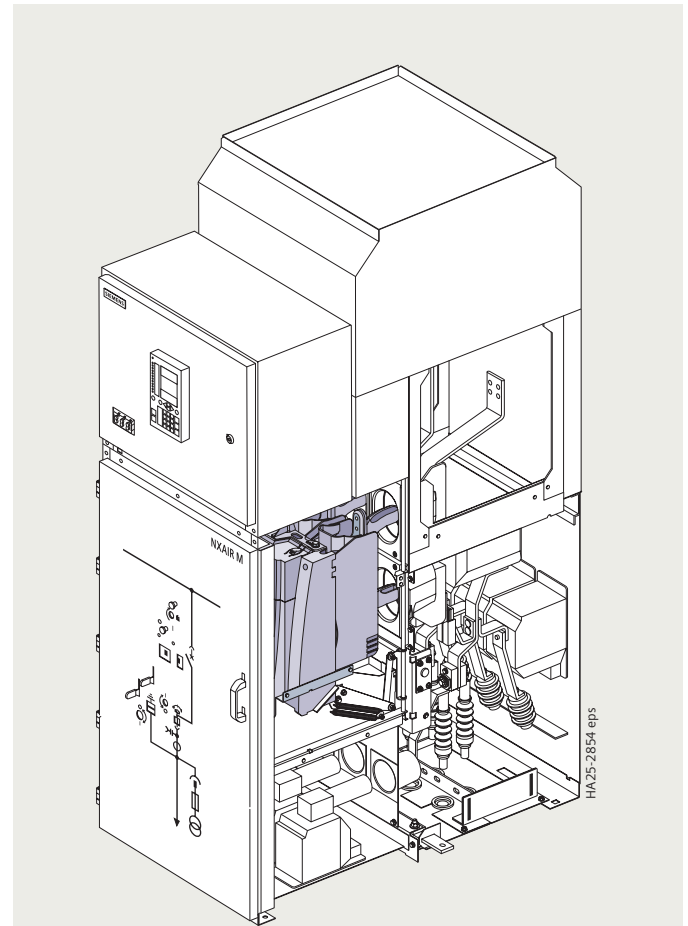

Vacuum circuit-breaker

Electrical data for	Vacuum circuit-breaker
Rated operating voltage	24 kV
Rated short-circuit breaking current	up to 25 kA
Rated short-time withstand current	up to 25 kA/3 s
Rated short-circuit making current	up to 63/65 kA
Rated peak withstand current	up to 63/65 kA
Rated continuous current	up to 2500 A
Endurance class	E2, M2, C2



SION vacuum circuit-breaker 3AE5
with withdrawable module

Components

Three-position switch-disconnector/fuse combination

Three-position switch-disconnector/fuse combination

Features


- Switch positions: CLOSED – OPEN – EARTHED
- Switching function as general-purpose switch-disconnector (class E3) according to IEC 72271-103
- Designed as a three-position switch with the functions
 - Switch-disconnector and
 - Make-proof earthing switch
- Climate-independent switching element in the gas-filled switching-device vessel
- Maintenance-free operating mechanisms under normal climatic conditions and for the max. permissible number of operating cycles
- Spring-operated/stored-energy mechanism
- Switching movement independent from the operating speed
- The closing and opening springs are both charged during the charging process
- Closing and opening via pushbuttons.

Electrical data for	Three-position switch-disconnector/fuse combination
Rated voltage	24 kV
Rated short-time withstand current $t_k = 1$ s	up to 25 kA
Rated peak withstand current	up to 63/65 ¹⁾ kA
Rated short-circuit making current	up to 63/65 ¹⁾ kA
Rated continuous current ²⁾	up to 200 A
Endurance class for general-purpose switch	M1, E3
Endurance class for earthing switch	M0, E2
Maximum transformer rating	1600 kVA
Rated transfer current (max.)	1400 A


Electrical data for	Earthing switch on feeder side downstream from HV HRC fuses
Rated short-time withstand current $t_k = 1$ s	2 kA
Rated short-circuit making current	2 kA
Endurance class for earthing switch on feeder side	M0, E1

1) Value applies to 60 Hz

2) Depending on the HV HRC fuses installed

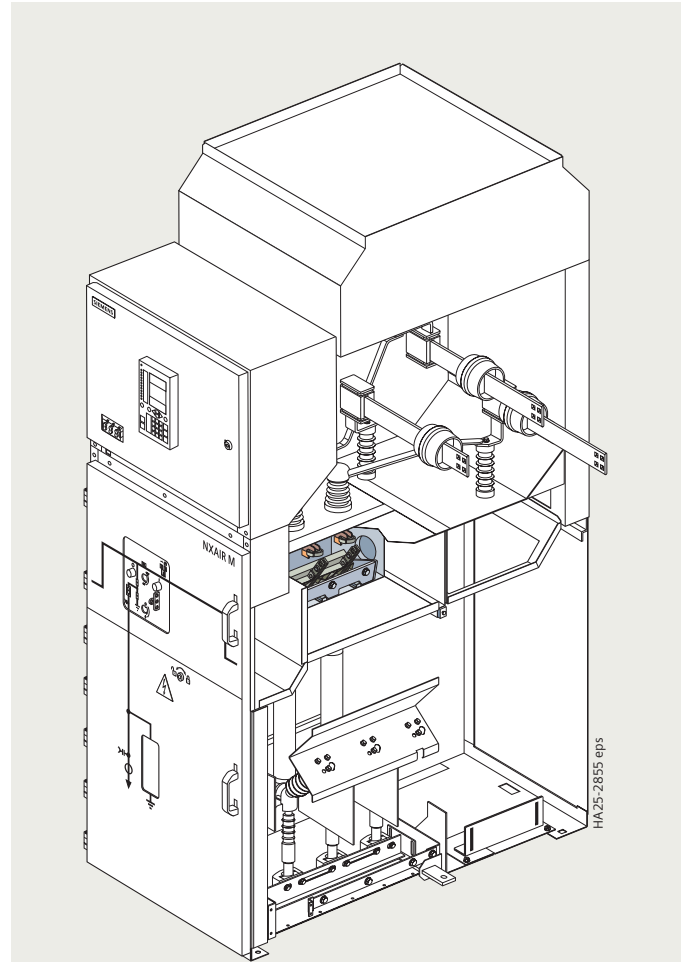

Three-position switch-disconnector/fuse combination

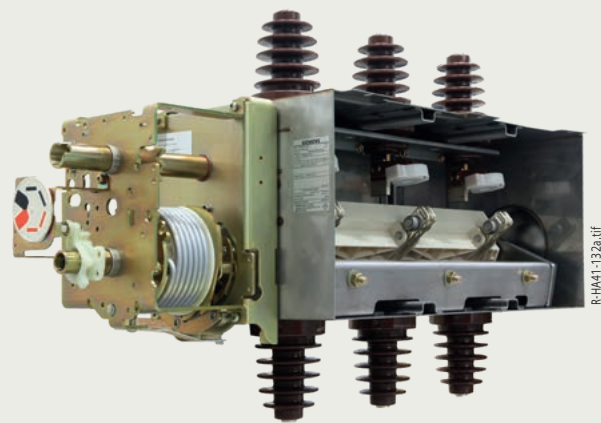


Three-position switch-disconnector/fuse combination

Circuit-breaker/fuse combination

Features

- Only available for single busbar application
- Circuit-breaker/fuse combination according to IEC 62271-107
- Circuit-breaker on withdrawable part due to requested switching rate $I_n = 10,000$
- For switching and protecting auxiliary transformers up to 2000 kVA
- Racking the circuit-breaker with manual operating mechanism
- Use of HV HRC fuses with a reference dimension of 442 mm
- Maximum rated current of fuse 125 A
- With all-pole mechanical tripping through the striker of the HV HRC fuse
- Option: Fuse trip indication through signaling switch (electrical)
- Fuse replacement always outside the panel and without tools
- Confinement of an internal arc to the respective compartment (pressure-resistant partitions), beyond the specifications of the standard.

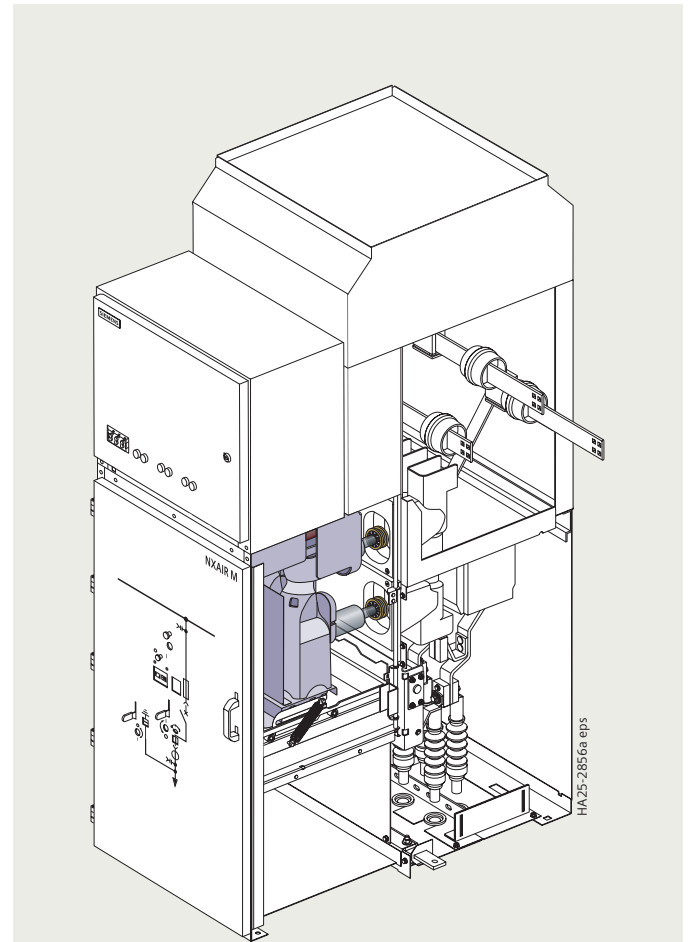

Circuit-breaker/fuse combination

Electrical data for	Circuit-breaker/fuse combination
Rated voltage	24 kV
Rated short-circuit breaking current	up to 25 kA
Rated short-time withstand current	up to 25 kA/3 s
Rated short-circuit making current	up to 63/65 ¹⁾ kA
Rated peak withstand current	up to 63/65 kA
Rated continuous current of the feeder ²⁾	800 A
Rated continuous current of the HV HRC fuse	up to 125 A
Permissible load current at 40 °C	up to 73 A

1) Value applies to 60 Hz

2) Depending on the HV HRC fuses installed



SION vacuum circuit-breaker 3AE5 with HV HRC fuses

Components

Current transformers according to IEC/EN 61869-1 and -2

Block-type current transformer 4MA74

Features

- Inductive indoor support-type current transformer in block-type design
- Cast-resin insulated
- Insulation class E
- Standardized
- Narrow design according to DIN 42600 Part 8
- Secondary connection by means of screw-type terminals

Options

- With coupling electrode for capacitive voltage detecting systems
- Secondary multiratio possible
- Current transformer with type approval and declaration of conformity

Mounting location

- Factory-assembled
- In the connection compartment.


Cable-type current transformer 4MC7033

Features

- Indoor ring-core current transformer
- Insulation class E
- Inductive type
- Closed
- Enclosure free of dielectric stress
- Climate-independent

Mounting location

- Factory-assembled
- In the connection compartment.

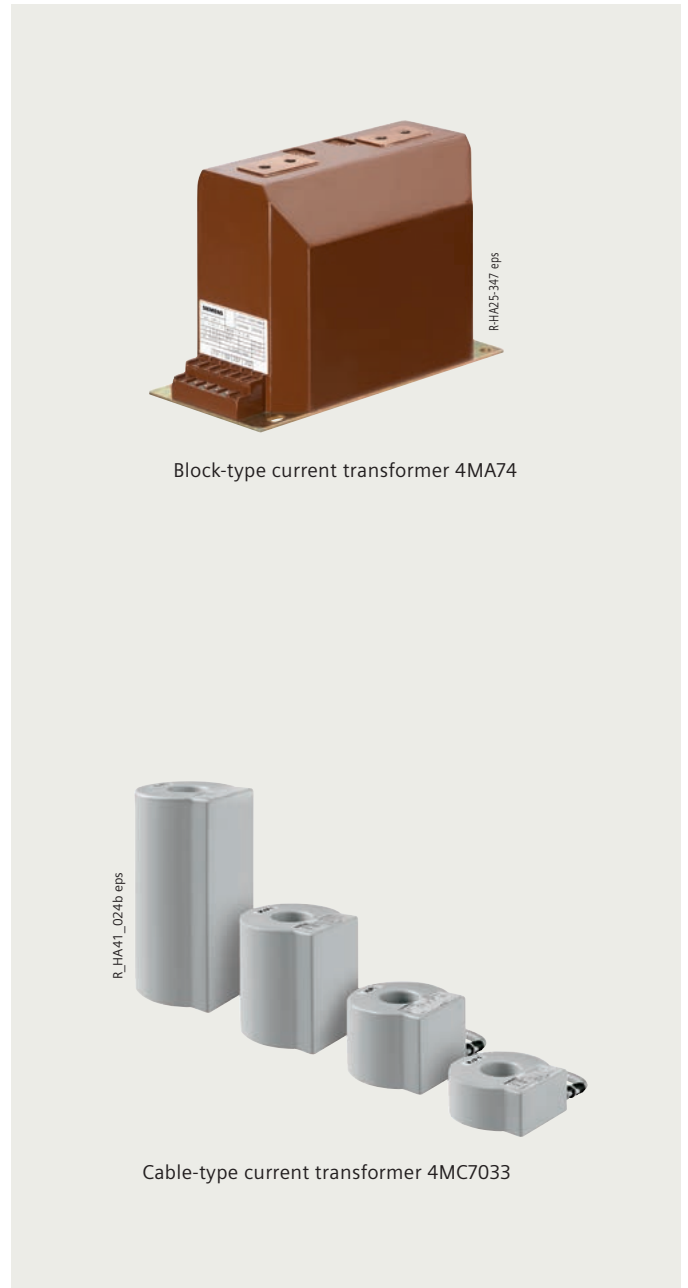

Block-type current transformer 4MA74

Cable-type current transformer 4MC7033

Electrical data for	Block-type current transformer 4MA74	Cable-type current transformer 4MC7033
Rated operating voltage	up to 24 kV	up to 24 kV
Rated primary current	up to 2500 A	up to 200 A
Rated frequency	50 Hz/60 Hz	50 Hz/60 Hz
Rated short-time thermal current	up to 25 kA	up to 25 kA
Rated peak withstand current	up to 65 kA	up to 65 kA
Duration of short-time withstand current	1 s or 3 s	1 s or 3 s
Number of secondary cores	up to 3	up to 1
Rated secondary current	1 A or 5 A	1 A or 5 A
Accuracy classes		
– Measuring	0.2/0.5/1.0	0.5/1.0
– Protection	5P/10P	
Rating	up to 30 VA	up to 10 VA


Zero-sequence current transformer 4MC9672

Features

- Inductive indoor ring-core current transformer
- Cast-resin insulated
- Insulation class E
- For earth-fault current detection
- Divisible
- Secondary connection by means of screw-type terminals

Mounting location

- At the cable connection
- Inside a deep bottom pan or below the panel.

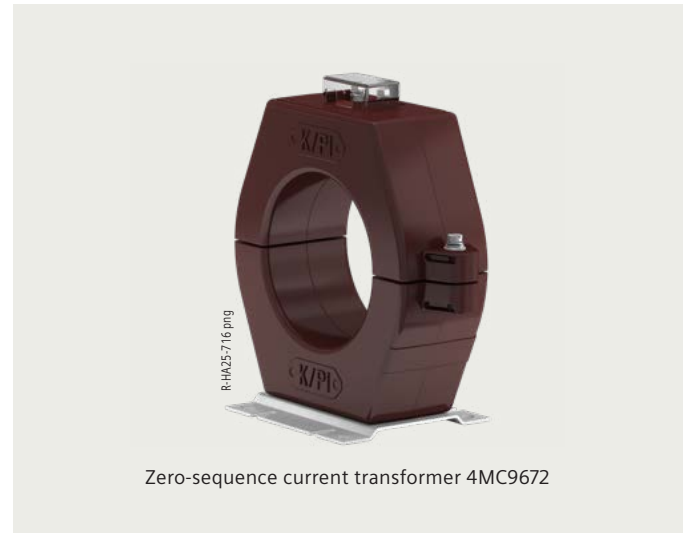

Electrical data for	Zero-sequence current transformer 4MC9672
Rated insulation level	0.72 / 3 / – kV
Rated primary current	up to 100 A
Rated frequency	50 Hz / 60 Hz
Rated short-time thermal current	up to 25 kA
Rated peak withstand current	up to 65 kA
Duration of short-time withstand current	1 s or 3 s
Number of secondary cores	1
Rated secondary current	1 A
Accuracy classes	
– Measuring	1FS10
– Protection	–
Rating	1.25 VA

Components

Voltage transformers according to IEC/EN 61869-1 and -3

Voltage transformer 4MR

Features

- Inductive indoor support-type voltage transformer in block-type design
- Single-pole
- Cast-resin insulated
- Insulation class E
- Standardized
- Narrow design according to DIN 42600 Part 9
- Without primary fuse
- Secondary connection by means of screw-type terminals

Options

- With earth-fault winding
- Voltage transformer with type approval and declaration of conformity

Mounting location

- Factory-assembled
- In the connection compartment
- In the additional compartment, at the busbar.

Voltage transformer 4MR, withdrawable with primary fuse

Features

- Inductive indoor support-type voltage transformer in “revolver” design
- Single-pole
- Cast-resin insulated
- Insulation class E
- With exchangeable primary fuse
- Secondary connection by means of screw-type terminals

Options

- With earth-fault winding

Mounting location

- Factory-assembled
- In the switching-device compartment underneath the withdrawable part
- In the metering panel as withdrawable metering part.



Voltage transformer 4MR



Voltage transformer 4MR, withdrawable with primary fuse

Electrical data for	Voltage transformer 4MR	Voltage transformer 4MR, withdrawable with primary fuse
Rated operating voltage	up to 24 kV	up to 24 kV
Rated secondary voltage	up to 110 V or up to 110 V/√3	up to 110 V or up to 110 V/√3
Rated frequency	50 Hz/60 Hz	50 Hz/60 Hz
Accuracy classes		
– Measuring	0.2 / 0.5 / 1.0	0.2 / 0.5 / 1.0
– Protection	3P / 6P	3P / 6P
Rating	up to 150 VA	up to 150 VA

Bushing-type low-power instrument transformer 4ME

Features

- Indoor bushing-type current sensor
- Current measurement through cast-in Rogowski coil
- Cast-resin insulated
- Insulation class E
- Cast-in secondary wire
- Connection with RJ45 plug connector

Options

- With coupling electrode for capacitive voltage detecting systems
- Additionally available with voltage sensor as a combined sensor

Mounting location

- Factory-assembled
- In the busbar compartment, between the busbar and the circuit-breaker
- In the connection compartment, between the circuit-breaker and the connection.


Zero-sequence current transformer GAE120/SENS-JW1003

Features

- Indoor ring-core current transformer
- Current measurement through cast-in measuring shunt
- Cast-resin insulated
- Insulation class E
- For earth-fault current detection
- Divisible
- Secondary connection by means of screw-type terminals
- Connection with RJ45 plug connector

Mounting location

- At the cable connection around the cables
- Inside a deep bottom pan or below the panel.

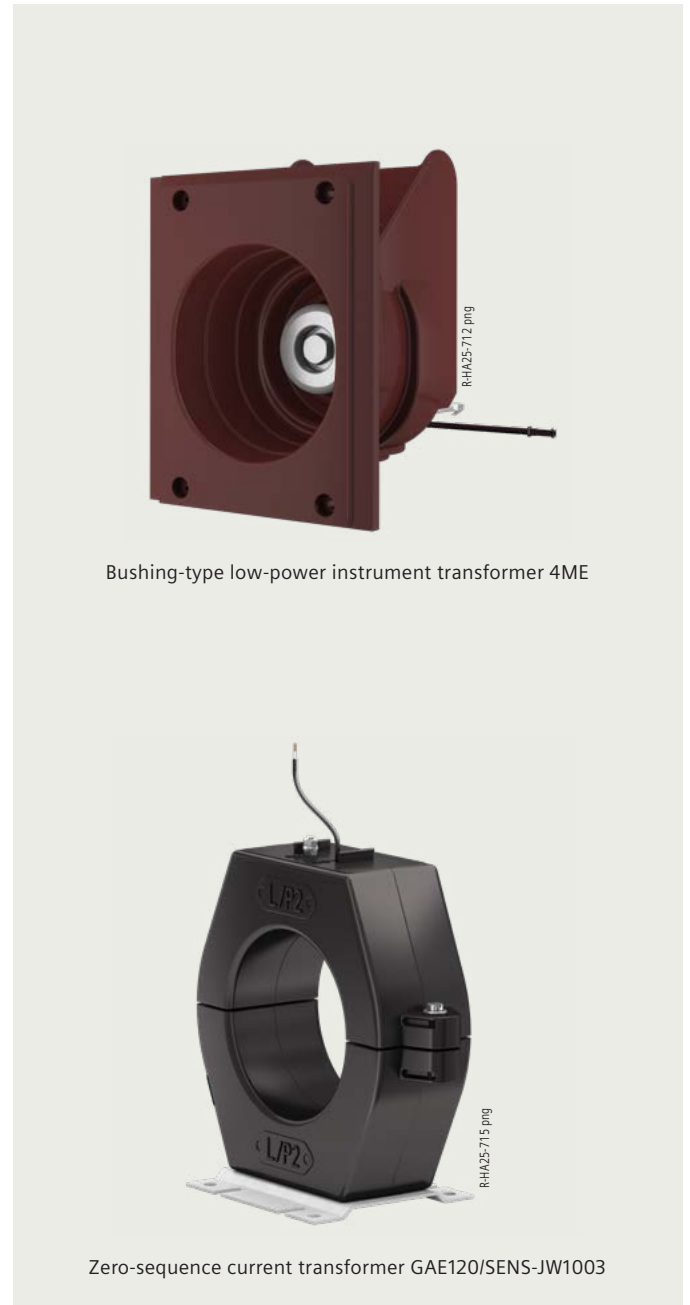

Bushing-type low-power instrument transformer 4ME

Zero-sequence current transformer GAE120/SENS-JW1003

Electrical data for	Bushing-type low-power instrument transformer 4ME	Zero-sequence current transformer GAE120/SENS-JW1003
Rated insulation level	0.72 / 3 / – kV	0.72 / 3 / – kV
Rated primary current	80 A to 2500 A	60 A
Rated frequency	50 Hz/60 Hz	50 Hz/60 Hz
Rated short-time thermal current	up to 25 kA	up to 25 kA
Rated peak withstand current	up to 65 kA	up to 65 kA
Duration of short-time withstand current	1 s or 3 s	1 s
Secondary signal	22.5 mV at 80 A and 50 Hz 27 mV at 80 A and 60 Hz	225 mV at 60 A and 50 Hz 270 mV at 60 A and 60 Hz
Accuracy classes		
Measuring / Protection	0.5 / 5P630	1 FS10

Components

Voltage sensors (LPVT) according to IEC/EN 61869-1 and -11

Bushing-type low-power instrument transformer 4ME

Features


- Indoor bushing-type voltage sensor
- Voltage measurement through cast-in resistor divider
- Cast-resin insulated
- Insulation class E
- Cast-in secondary wire
- Connection with RJ45 plug connector

Options

- With coupling electrode for capacitive voltage detecting systems
- Additionally available with current sensor as a combined sensor

Mounting location

- Factory-assembled
- In the busbar compartment, between the busbar and the circuit-breaker
- In the connection compartment, between the circuit-breaker and the connection.

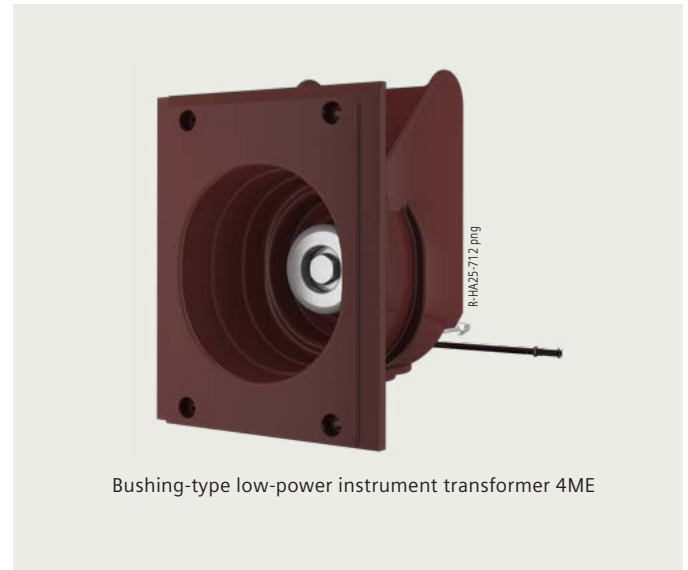


Electrical data for	Bushing-type low-power instrument transformer 4ME
Rated operating voltage	22 kV
Rated secondary voltage	$3.25 V / \sqrt{3}$ at $24 kV / \sqrt{3}$
Rated frequency	50 Hz / 60 Hz
Rated voltage factor	1.9
Rated time	8 h
Rated phase offset (phi)	0°
Accuracy classes	
– Measuring	0.5
– Protection	3P


Low-voltage compartment

Features

- Low-voltage compartment for accommodation of all protection, control, measuring, and metering equipment
- Partitioned safe-to-touch off the high-voltage part
- Low-voltage compartment can be removed, as all bus wires and control cables are plugged in
- Option: Higher low-voltage compartment
- Option: Separation wall from panel to panel
- Low-voltage cables are flexible and protected by metal covers
- Connection of withdrawable part wiring and panel wiring to low-voltage compartment via 10-pole, coded plug connections
- Bus wires can be plugged from panel to panel.

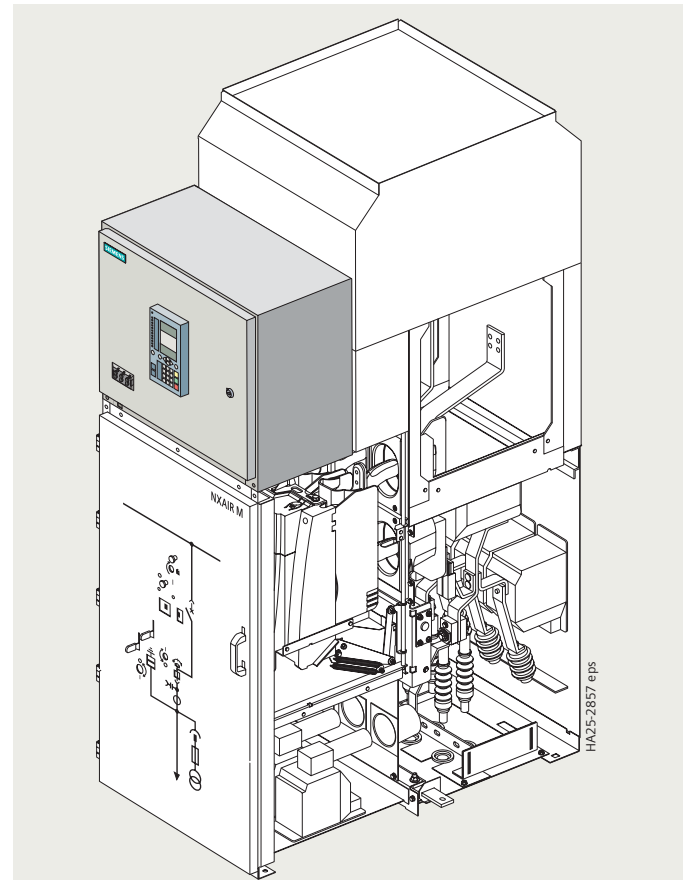

Low-voltage compartment

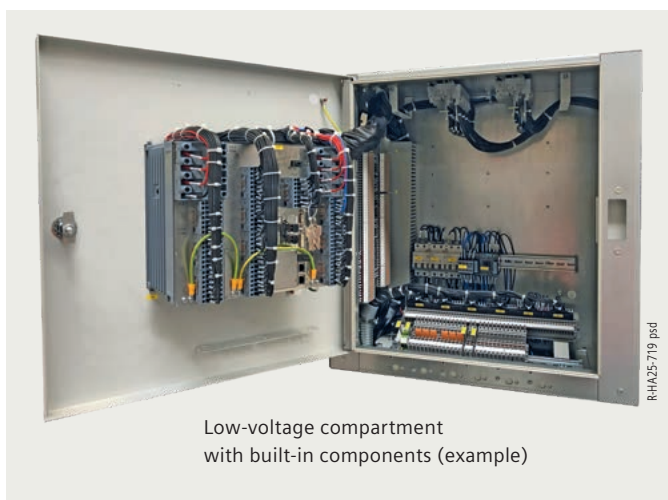

Low-voltage compartment
with built-in components (example)



Door of low-voltage compartment (example)

Components

Optical arc detection systems

Optical arc detection systems

Description

- Optical arc detection systems recognize internal arcs by means of optical sensors. This allows to detect arising internal arcs reliably and quickly. Accordingly, the protection device can trip quickly and without delay times.
- The internal arc is interrupted within 100 ms and prevents damage to the switchgear, which would otherwise occur due to the thermal phase of the internal arc.

Benefits

- Reliable detection of internal arcs
- Extremely fast break times ≤ 100 ms incl. the total break time of the circuit-breaker
- Clear reduction of the arc energy
- Minimization of thermal damage
- Increase of personal safety
- Minimization of downtimes
- EMC-safe thanks to purely optical sensors.

Design and function

- Basic components
 - Optical sensors in every compartment
 - Bay controller
 - Circuit-breaker
- Internal arcs are detected optically, almost without delays and by using an additional current criterion for preventing overfunctioning, e.g. due to external light
- Tripping of the circuit-breaker and interruption of the arc fault current within 100 ms.

Versions

Siemens SIPROTEC 5 with arc protection module

- Optical point sensors with optical fiber for signal transmission
- Line sensors in the busbar compartment possible as an option
- Arc protection module with three inputs for connection of optical point sensors or line sensors
- SIPROTEC 5 with protection function.

On request, selected optical arc detection systems can be installed as autonomous devices.



Electrical data

Rated values

Rated voltage	kV	24	
Rated frequency	Hz	50/60	
Rated short-duration power-frequency withstand voltage (phase-to-phase, phase-to-earth)	kV	50 ¹⁾	
Rated lightning impulse withstand voltage (phase-to-phase, phase-to-earth)	kV	125	
Rated short-circuit breaking current	max. kA	25	
Rated short-time withstand current, 3 s	max. kA	25	
Rated short-circuit making current ²⁾	max. kA	63/65	
Rated peak withstand current ²⁾	max. kA	63/65	
Rated continuous current of the busbar	max. A	2500	
Rated continuous current of the feeders	With circuit-breaker	max. A	2500
	With withdrawable disconnecter link	max. A	2500
	With circuit-breaker / fuse combination	max. A	800 ³⁾
	With three-position switch-disconnector / fuse combination	max. A	200 ³⁾
	Bus sectionalizer	max. A	2500
Busbar connection panel	max. A	2500	

Internal arc classification

Rated voltage	kV	24
Arc fault current	max. kA	25
Arc fault duration	s	1
Classification		A FLR

Degree of protection

Enclosure	Standard	IP3XD
	Options	IP4X
		IP31 / IP32
		IP41 / IP42
		IP51
Between the compartments	Standard	IP2X

Loss of service continuity category

Panel with circuit-breaker	LCS 2B
Panel with withdrawable disconnecter link	LCS 2B
Panel with fixed-mounted three-position switch-disconnector / fuse combination	LSC 2
Busbar connection panel	LSC 1

Panels without connection compartments are not assigned a loss of service continuity category according to IEC 62271-200.

Partition class

Panels in withdrawable design	PM	Partitions made of metallic material
-------------------------------	----	--------------------------------------















R-257-003.jpg


1) 65 kV optional for GOST standard
 2) Values for 50 Hz: 63 kA, 60 Hz: 65 kA
 3) Depending on the HV HRC fuses installed

Technical data

Product range, single busbar


	Current transformer
	Voltage transformer
	Withdrawable voltage transformers with primary fuses
	Make-proof earthing switch, optionally manual or motor operation
	Capacitive voltage detecting system
	Cable sealing ends ¹⁾ max. 4 x 500 mm ² per phase
	Outgoing bar feeder
	Withdrawable circuit-breaker, optionally manual or motor operation
	Withdrawable disconnecter link, optionally manual or motor operation
	Bar connection
	Arrester
	Low-power passive instrument transformer for current and/or voltage

Circuit-breaker panel

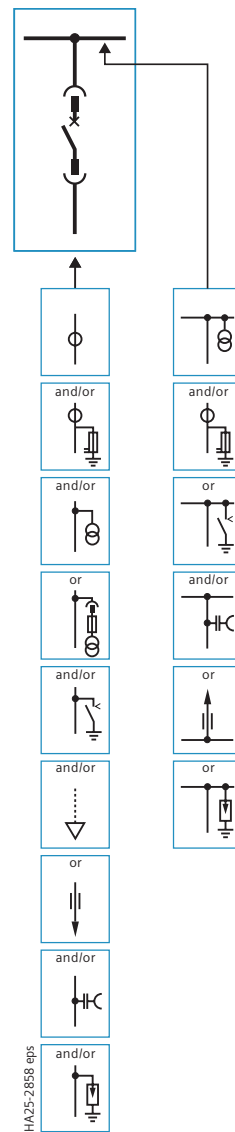

HA25-2858 eps


Disconnecting panel

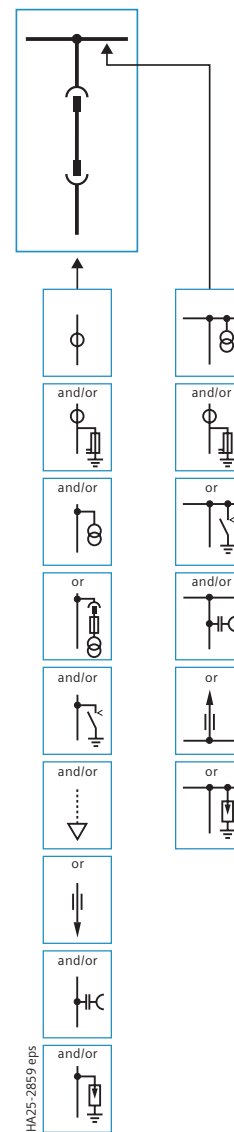


HA25-2859 eps

1) The details refer to conventional single-core sealing ends and depend on the rated continuous current and other built-in components.

Circuit-breaker panel with HV HRC fuses

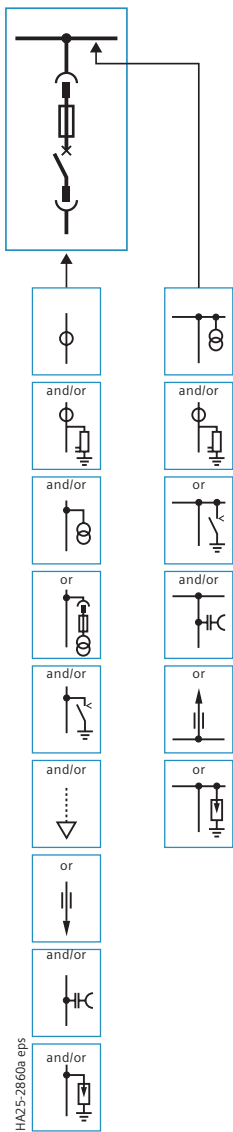

Metering panel

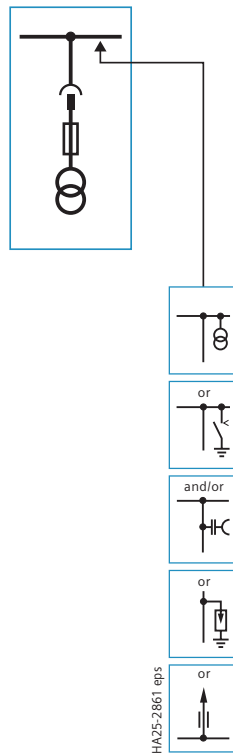










For other components in the busbar and connection compartments, see page 15.

	Current transformer
	Voltage transformer
	Withdrawable voltage transformers with primary fuses
	Make-proof earthing switch, optionally manual or motor operation
	Capacitive voltage detecting system
	Cable sealing ends ¹⁾ max. 4 x 500 mm ² per phase
	Outgoing bar feeder
	Withdrawable circuit-breaker, optionally manual or motor operation
	Withdrawable disconnecter link, optionally manual or motor operation
	Bar connection
	Arrester
	Withdrawable circuit-breaker with HV HRC fuses
	Low-power passive instrument transformer for current and/or voltage


¹⁾ The details refer to conventional single-core sealing ends and depend on the rated continuous current and other built-in components.

Technical data

Product range, single busbar


	Current transformer
	Voltage transformer
	Make-proof earthing switch, optionally manual or motor operation
	Capacitive voltage detecting system
	Withdrawable circuit-breaker, optionally manual or motor operation
	Withdrawable disconnecter link, optionally manual or motor operation
	Withdrawable voltage transformers with primary fuses
	Arrester
	Low-power passive instrument transformer for current and/or voltage

Bus sectionalizer (mirror-image installation also possible)

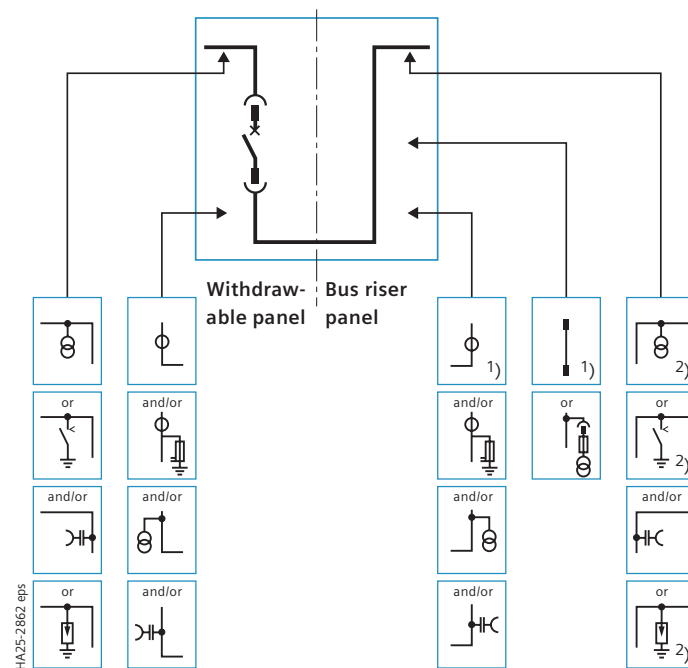


1) Current transformers only possible in combination with withdrawable disconnecter link.
 2) Busbar components only possible in combination with withdrawable disconnecter link.

Busbar connection panel

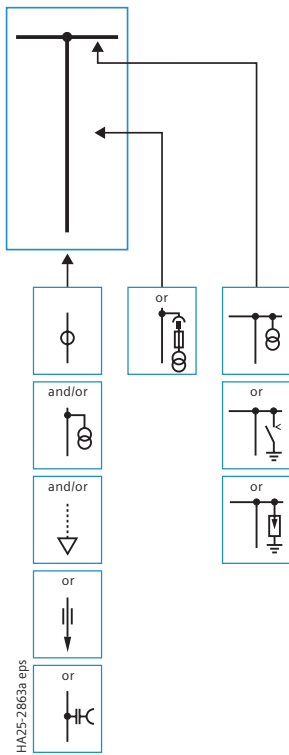

Three-position switch-disconnector panel with HV HRC fuses

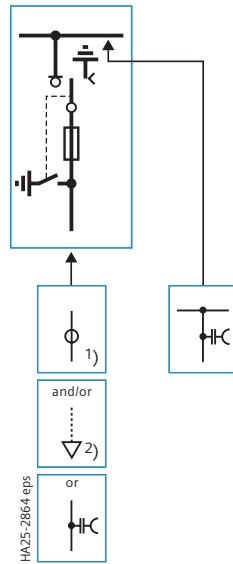

For other components in the busbar and connection compartments, see page 15.

1) Current transformer only possible as cable-type current transformer 4MC7033.
 2) The details refer to conventional single-core sealing ends and depend on the rated continuous current and other built-in components.


	Current transformer
	Voltage transformer
	Make-proof earthing switch, optionally manual or motor operation
	Capacitive voltage detecting system
	Cable sealing ends ²⁾ max. 4 × 500 mm ² per phase
	Outgoing bar feeder
	Withdrawable voltage transformers with primary fuses
	Arrester
	HV HRC fuse
	Three-position switch-disconnector
	Discharge switch
	Cable-type current transformer, 4MC7033

Technical data

Product range, duplex (back-to-back)

	Current transformer
	Voltage transformer
	Make-proof earthing switch, optionally manual or motor operation
	Capacitive voltage detecting system
	Cable sealing ends ¹⁾ max. 6 x 500 mm ² per phase
	Outgoing bar feeder
	Withdrawable circuit-breaker, optionally manual or motor operation
	Withdrawable disconnecter link, optionally manual or motor operation
	Bar connection
	Arrester
	Low-power passive instrument transformer for current and/or voltage

Circuit-breaker panel (incoming sectionalizer)

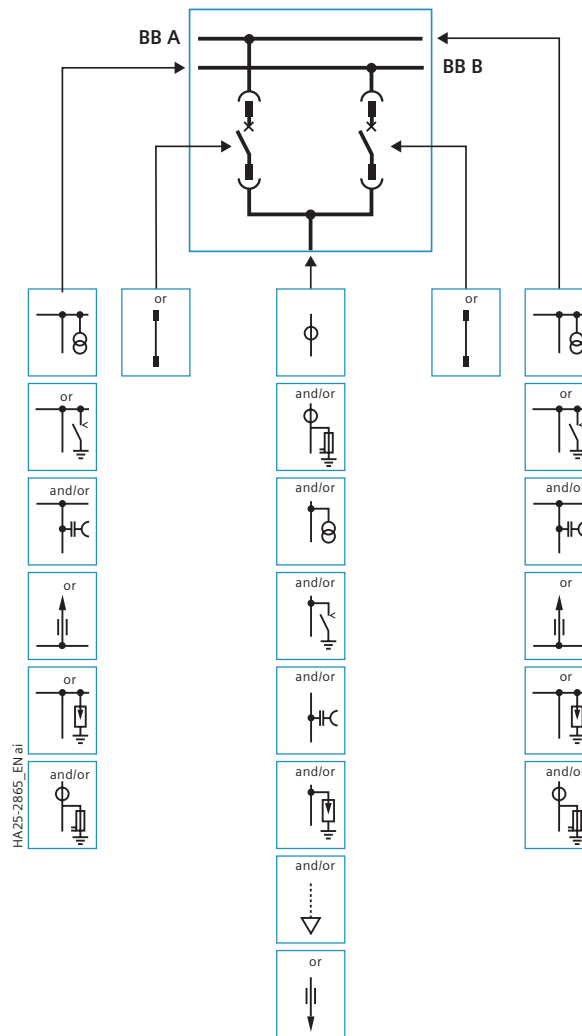

For other components in the busbar and connection compartments, see page 15.

BB A = Busbar A


BB B = Busbar B

¹⁾ The details refer to conventional single-core sealing ends and depend on the rated continuous current and other built-in components.

Technical data





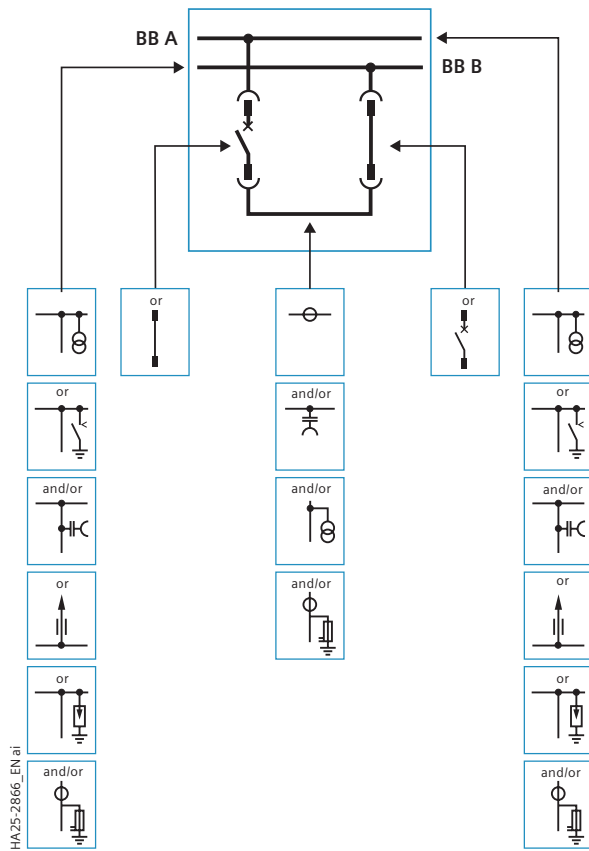




Product range, duplex (back-to-back)

Bus coupler



BB A = Busbar A


BB B = Busbar B

-  Current transformer
-  Voltage transformer
-  Make-proof earthing switch, optionally manual or motor operation
-  Capacitive voltage detecting system
-  Withdrawable circuit-breaker, optionally manual or motor operation
-  Withdrawable disconnector link, optionally manual or motor operation
-  Bar connection
-  Arrester
-  Low-power passive instrument transformer for current and/or voltage

Technical data


Dimensions

Single busbar

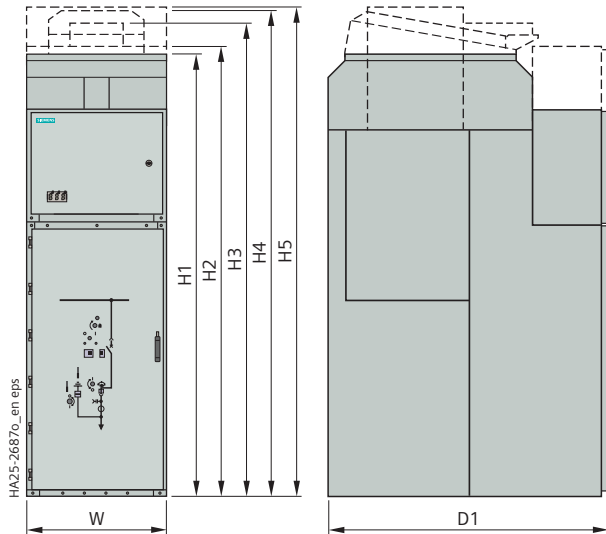

Double busbar

(back-to-back arrangement)


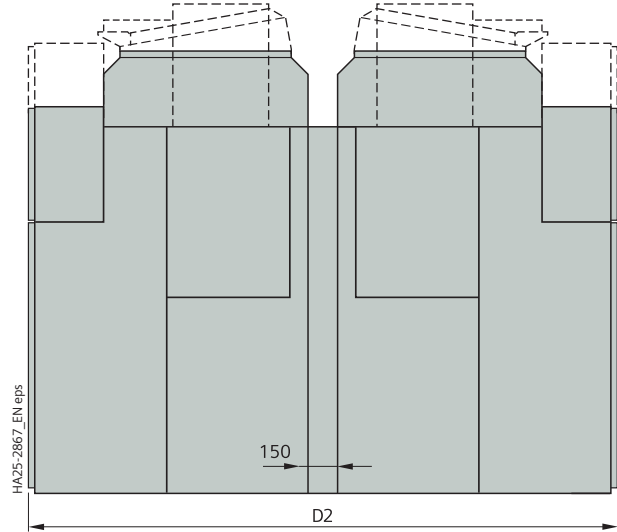


Dimensions	Panel type	Rated continuous current	Short-time withstand current		
			16 kA	20 kA	25 kA
		A	mm	mm	mm
Width	W	Circuit-breaker panel, disconnecting panel	800	800	800
			1250	800	800
			2000	1000	1000
			2500	1000	1000
	Bus sectionalizer	1250	2 × 800	2 × 800	2 × 800
		2500	2 × 1000	2 × 1000	2 × 1000
	Metering panel	–	800	800	800
	Circuit-breaker panel with HV HRC fuses	800 ²⁾	800	800	800
	Busbar connection panel	1250	800	800	800
		2500	1000	1000	1000
Three-position switch-disconnector panel with HV HRC fuses	200 ²⁾	800	800	800	
Height	H1	Standard panel	2510	2510	2510
	H2	With higher low-voltage compartment	2550	2550	2550
	H3	With natural ventilation	2700	2700	2700
	H4	With optional arc absorber ¹⁾	2750	2750	2750
	H5	With additional compartment for busbar components	2770	2770	2770
Depth	D1	Single busbar	1600	1600	1600
	D2	Double busbar	3350	3350	3350


1) Number of absorbers depending on switchgear configuration

2) Depending on the fuses installed

Pressure relief out of the switchgear room through a pressure relief duct

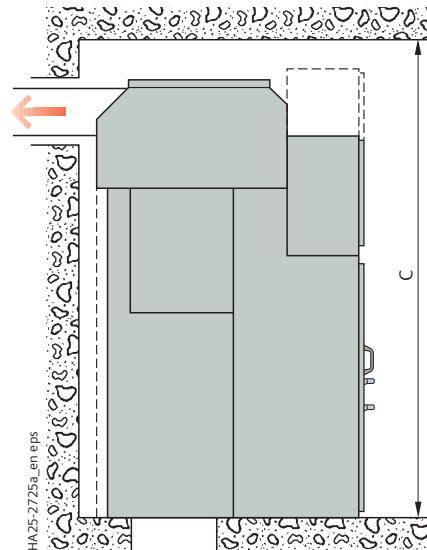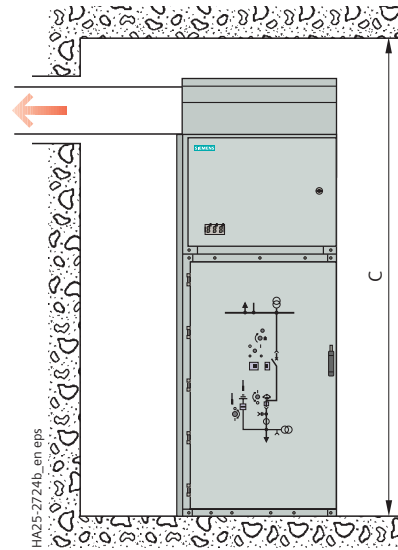

Pressure relief into the switchgear room through absorbers

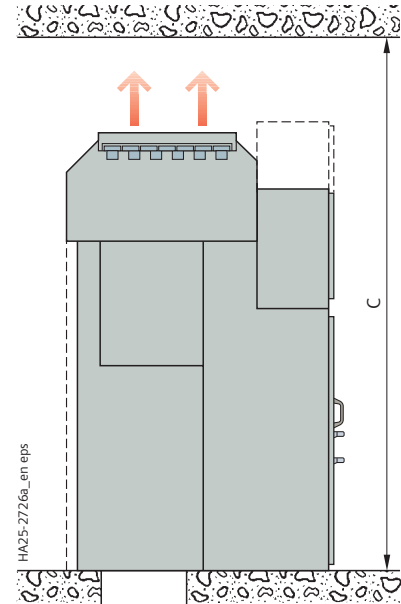


Ceiling height C at short-circuit current ≤ 25 kA and for panels with additional roof for upgrading the degree of protection IPX1/IPX2

Type of pressure relief	Rated voltage	Short-time withstand current ≤ 25 kA
Pressure relief into the switchgear room through absorbers	24 kV	≥ 3300 mm
Pressure relief out of the switchgear room through a pressure relief duct ¹⁾	24 kV	≥ 3000 mm

1) For designs with a closed pressure relief duct to the outside, a distance of ≥ 500 mm is required on this side for installation. In case of a lower ceiling height, please contact your Siemens partner

Wall-standing arrangement for single busbar

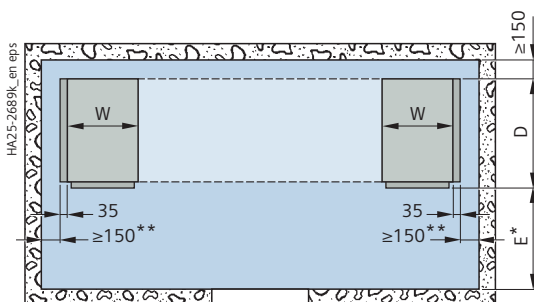


All panels with cable connection at the front

- * Control aisle E depending on national requirements:
 - For replacement of switching devices ≥ 1350 mm recommended
 - For extension / panel replacement ≥ 1800 mm recommended
- ** Lateral wall distances on the left or on the right:
 - ≥ 150 mm recommended (acc. to IEC 62271-200)
 - For installation and maintenance ≥ 500 mm recommended (acc. to IEC 61936-1)

Technical data

Room planning


Free-standing arrangement for single busbar

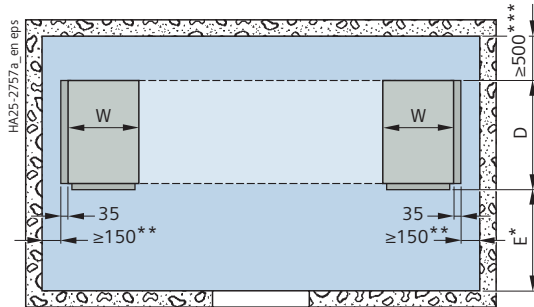

All panels with cable connection at the front or at the rear and rear cable duct

- * Control aisle E depending on national requirements:
 - For replacement of switching devices ≥ 1350 mm recommended
 - For extension / panel replacement ≥ 1800 mm recommended
- ** Lateral wall distances on the left or on the right:
 - ≥ 150 mm recommended (acc. to IEC 62271-200)
 - For installation and maintenance (acc. to IEC 61936-1) ≥ 500 mm recommended
- *** Rear wall distance
 - ≥ 500 mm aisle for installation and maintenance (acc. to IEC 61936-1)
 - ≥ 800 mm aisle for operation (acc. to IEC 62271-200)


Free-standing arrangement for single busbar

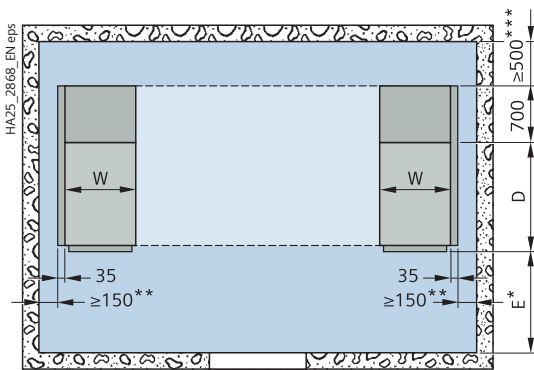

All panels with cable connection at the front or at the rear and rear cable duct

- * Control aisle E depending on national requirements:
 - For replacement of switching devices ≥ 1350 mm recommended
 - For extension / panel replacement ≥ 1800 mm recommended
- ** Lateral wall distances on the left or on the right:
 - ≥ 150 mm recommended (acc. to IEC 62271-200)
 - For installation and maintenance (acc. to IEC 61936-1) ≥ 500 mm recommended
- *** Rear wall distance
 - ≥ 500 mm aisle for installation and maintenance (acc. to IEC 61936-1)
 - ≥ 800 mm aisle for operation (acc. to IEC 62271-200)

Free-standing arrangement in duplex design (back-to-back)

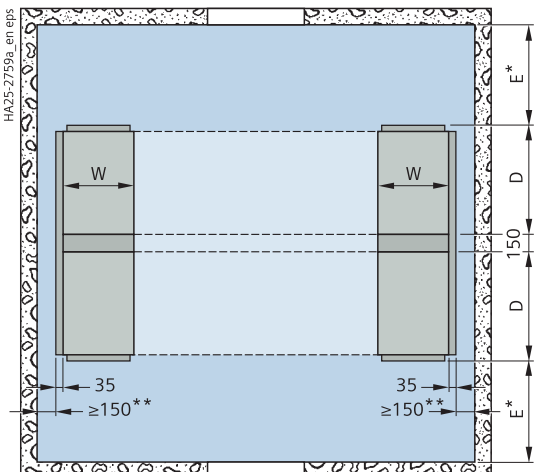

All panels with cable connection at the front

- * Control aisle E depending on national requirements:
 - For replacement of switching devices ≥ 1350 mm recommended
 - For extension / panel replacement ≥ 1800 mm recommended
- ** Lateral wall distances on the left or on the right:
 - ≥ 150 mm recommended (acc. to IEC 62271-200)
 - For installation and maintenance ≥ 500 mm recommended (acc. to IEC 61936-1)
 - ≥ 800 mm for operation (acc. to IEC 62271-200)
 - ≥ 1000 mm for panel replacement (panels of 800 mm)
 - ≥ 1200 mm for panel replacement (panels of 1000 mm)

Transport and packing

Transport

NXAIR M switchgear is delivered in form of individual panels.

The following must be observed:

- Transport facilities on site
- Transport dimensions and transport weights
- Size of door openings in building.

Packing

Means of transport: Rail and truck

- Panels on pallets
- Open packing with PE protective film.

Means of transport: Seafreight

- Panels on pallets
- Sealed in PE protective film, with closed wooden box
- With desiccant bags
- With sealed wooden base
- Max. storage time: 12 months.

Means of transport: Airfreight

- Panels on pallets
- In wooden latticed crate with sealed upper and lower PE protective film.

These transport and packing stipulations apply to the complete NXAIR product family. More information on transport dimensions / transport weights is given in the corresponding table.

Transport dimensions, transport weights¹⁾ for individual panels²⁾

Transport	Panel spacing mm	Transport dimensions			Transport weight ¹⁾	
		Width mm	Height mm	Depth mm	with packing kg	without packing kg
NXAIR up to 25 kA						
Truck or rail	1 × 800	1200	2980 ⁴⁾	1810	1340	1200
	1 × 1000	1200	2980 ⁴⁾	1810	1440	1400
Seafreight or airfreight	1 × 800	1200	2500	2000	1410	1250
	1 × 1000	1200	2500	2000	1410	1250

1) Average values depending on the degree to which panels are equipped

2) The double-busbar panels (back-to-back arrangement) are delivered as individual panels. Back-to-back connection is done on site

3) Pressure relief ducts or busbar components such as earthing switches or voltage transformers as separate delivery for 10 panels each (W 1100 × H 2000 × D 1800)

4) A height of 2450 mm is possible if the pressure relief duct is transported as a separate delivery

Standards

Standards, specifications, guidelines

Type of service location

- The switchgear can be used at the following locations as an indoor installation according to IEC 61936
 - Outside lockable electrical service locations at places which are not accessible to the public. Enclosures of switchgear can only be removed with tools.
 - In lockable electrical service locations. A lockable electrical service location is a place outdoors or indoors that is reserved exclusively for housing electrical equipment and which is kept under lock and key. Access is restricted to authorized personnel and persons who have been properly instructed in electrical engineering. Untrained or unskilled persons may only enter under the supervision of authorized personnel or properly instructed persons.

Dielectric strength


- The dielectric strength is verified by testing the switchgear with rated values of short-duration power-frequency withstand voltage and lightning impulse withstand voltage according to IEC 62271-1 (see table "Dielectric strength").
- The rated values are referred to sea level and to normal atmospheric conditions (1013 hPa, 20 °C, 11 g/m³ water content according to IEC 60071).
- The dielectric strength decreases with increasing altitude. For site altitudes above 1000 m (above sea level), the standards do not provide any guidelines for the insulation rating, but leave this to the scope of special agreements.
- Site altitude
 - The dielectric strength of air insulation decreases with increasing altitude due to low air density. This reduction is permitted up to a site altitude of 1000 m according to IEC.
 - For site altitudes above 1000 m, a higher insulation level must be selected. It results from the multiplication of the rated insulation level for 0 to 1000 m with the altitude correction factor K_a .

Table for dielectric strength

Rated voltage (r.m.s. value)	kV	24
Rated short-duration power-frequency withstand voltage (r.m.s. value)		
– Between phases and to earth	kV	50
– Across isolating distances	kV	60
Rated lightning impulse withstand voltage (peak value)		
– Between phases and to earth	kV	125
– Across isolating distances	kV	145

Altitude correction factor K_a

For site altitudes above 1000 m, the altitude correction factor K_a is recommended, depending on the site altitude above sea level.

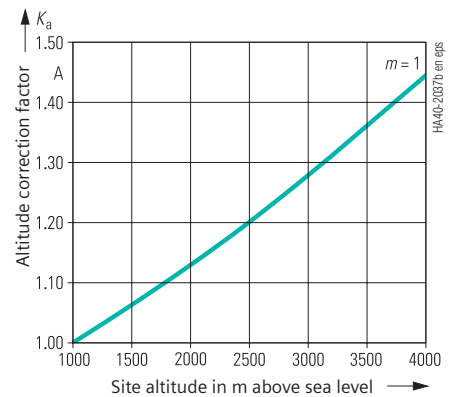

Rated short-duration power-frequency withstand voltage to be selected for site altitudes > 1000 m

≥ Rated short-duration power-frequency withstand voltage up to ≤ 1000 m · K_a

Rated lightning impulse withstand voltage to be selected for site altitudes > 1000 m

≥ Rated lightning impulse withstand voltage up to ≤ 1000 m · K_a

Example:

3000 m site altitude above sea level,
17.5 kV switchgear rated voltage,
95 kV rated lightning impulse withstand voltage

Rated lightning impulse withstand voltage to be selected =
95 kV · 1.28 = 122 kV

Result:

According to the above table, switchgear for a rated voltage of 24 kV with a rated lightning impulse withstand voltage of 125 kV is to be selected.

Standards

		IEC standard / EN standard	Title
Switchgear		62271-1	High-voltage switchgear and controlgear: Common specifications for alternating current switchgear and controlgear
		62271-200	High-voltage switchgear and controlgear: AC metal-enclosed switchgear and controlgear for rated voltages above 1 kV and up to and including 52 kV
Switching devices	Circuit-breakers	62271-100	High-voltage switchgear and controlgear: Alternating-current circuit-breakers
	Disconnectors and earthing switches	62271-102	High-voltage switchgear and controlgear: Alternating current disconnectors and earthing switches
	Switch-disconnectors	62271-103	High-voltage switchgear and controlgear: Switches for rated voltages above 1 kV up to and including 52 kV
	Switch-disconnector / fuse combinations	62271-105	High-voltage switchgear and controlgear: Alternating current switch-fuse combinations for rated voltages above 1 kV up to and including 52 kV
	Circuit-breaker / fuse combination	62271-107	High-voltage switchgear and controlgear: Alternating current circuit-breaker-fuse combinations for rated voltages above 1 kV up to and including 52 kV
Voltage detecting systems		62271-213	Voltage detecting and indicating system (VDIS)
		62271-215	Phase comparator used with VDIS
HV HRC fuses		60282-1	High-voltage fuses: Current-limiting fuses
Surge arresters		60099-4	Surge arresters
Degree of protection		60529	Degrees of protection provided by enclosures (IP code)
		62262	Degree of protection provided by enclosures (IK code)
Insulation		60071	Insulation co-ordination
Instrument transformers		61869-1	Instrument transformers
		61869-2	Current transformers
		61869-3	Voltage transformers
		61869-6	Low-power instrument transformers
		61869-10	Low-power passive current transformers
		61869-11	Low-power passive voltage transformers
Installation		61936-1	Power installations exceeding 1 kV a.c.
Environmental conditions		60721-3-3	Classification of environmental conditions
Operation		EN 50110	Operation of electrical installations

Standards

The switchgear complies with the relevant standards and specifications applicable at the time of type tests.

In accordance with the harmonization agreement reached by the countries of the European Union, their national specifications conform to the IEC standard.

Current-carrying capacity

- According to IEC 62271-200 or IEC 62271-1, the rated continuous current refers to the following ambient air temperatures:
 - Maximum of 24-hour mean + 35 °C
 - Maximum + 40 °C
- The current-carrying capacity of the panels and busbars depends on the ambient air temperature outside the enclosure.

Internal arc classification

- Protection of operating personnel shall be ensured by means of tests for verifying the internal arc classification
- Internal arcing tests must be performed in accordance with IEC 62271-200
- Definition of criteria:
 - Criterion 1: Correctly secured doors and covers do not open, limited deformations are accepted
 - Criterion 2: No fragmentation of the enclosure, no projection of small parts above 60 g
 - Criterion 3: No holes in accessible sides up to a height of 2 m
 - Criterion 4: No ignition of indicators due to hot gases
 - Criterion 5: The enclosure remains connected to its earthing point
- Beyond the specifications of the above-mentioned standards, NXAIR M switchgear is optionally designed with confinement of internal arcs to the respective compartment.

Standards

Standards, specifications, guidelines

Seismic withstand capability (option)

NXAIR M switchgear can be upgraded for regions at risk from earthquakes. For this upgrade, earthquake qualification testing has been carried out in accordance with the following standards:

- IEC/TS 62271-210 "Seismic qualification for metal enclosed switchgear and controlgear for rated voltages above 1 kV"
- IEC 60068-3-3 "Guidance – seismic test methods for equipment"
- IEC 60068-2-57 "Test Ff: Vibration – Time-history method"
- IEC 60068-2-6 "Environmental testing – Part 2–6: Test Fc: Vibration (sinusoidal)"
- IEEE 693-2005 "Recommended Practice for Seismic Design of Substations".

For installation on even and rigid concrete or steel structure (without considering building influences), the tested ground accelerations meet the following requirements:

- Uniform Building Code 1997 (UBC) – Zone 4
- IEEE 693-2005 – High required response spectrum (Fig. A.1).

Shock, vibration (option)

NXAIR M switchgear can be upgraded to withstand stress caused by shock and vibration. For this upgrade, shock and vibration tests have been carried out in accordance with the following standards:

- ETSI EN 300 019-2-2; T2.3 Public Transportation
- IEC 60721-3-2 "Classification of environmental conditions Section 2: Transport".

Recycling

The switchgear can be recycled in ecological manner in compliance with existing legislation. Auxiliary devices such as short-circuit indicators have to be recycled as electronic scrap. Batteries have to be recycled professionally.

Terms

"Make-proof earthing switches" are earthing switches with short-circuit making capacity according to IEC 62271-102.

Protection against solid foreign objects, electric shock and water

NXAIR M switchgear fulfill according to the standards

IEC 62271-1	EN 62271-1
IEC 62271-200	EN 62271-200
IEC 60529	EN 60529
IEC 62262	EN 50102

the following degrees of protection:

Panel	NXAIR M
Degree of protection for the enclosure, optional	IP3XD, IP31, IP32 IP4X, IP41, IP42 IP51
Degree of protection for the enclosure, with ventilation	IP3XD, IP31, IP32 IP4X, IP41, IP42
Degree of protection for the partitions	IP2X
Degree of protection for the enclosure against mechanical impacts from outside	IK07

For secondary devices in the low-voltage door, the stipulations of the IP degree of protection apply according to the definitions for the switchgear enclosure.

Color of the panel front

RAL 7035 (light gray).

NXAIR M switchgear is suitable for application in indoor installations under normal service conditions as defined in the standard IEC 62271-1.

- Temperature –5 °C to +55 °C
–25 °C to +55 °C¹⁾ (option)
- Rel. air humidity
 - Mean value over 24 h¹⁾: ≤ 95 %
 - Mean value over 1 month: ≤ 90 %
- Condensation
 - Occasionally
 - Frequently (with min. degree of protection IP31D, with anti-condensation heater in LV part²⁾)
- Site altitude
 - Observe altitude correction (see page 40)
- No significant pollution of the ambient air (dust, gases, vapors, salts).

Furthermore, the high-voltage part of NXAIR M switchgear can be used in environmental conditions of the climatic categories 3K3 and 3K5 according to the standard IEC 60721-3-3.

NXAIR M switchgear has been subjected to a climatic test according to IEC 60932, Level 2, and is suitable for service conditions according to "Design Class 2".

This test also meets the requirements of IEC 62271-304 for "Design Class 2".

1) Secondary devices (e.g. protection devices, meters, measuring transducers, etc.) must be suitable for the given service conditions

2) Heater in the LV compartment and in the operating mechanism box of the circuit-breaker

Smart Infrastructure combines the real and digital worlds across energy systems, buildings and industries, enhancing the way people live and work and significantly improving efficiency and sustainability.

We work together with customers and partners to create an ecosystem that both intuitively responds to the needs of people and helps customers achieve their business goals.

It helps our customers to thrive, communities to progress and supports sustainable development to protect our planet for the next generation.

[siemens.com/smart-infrastructure](https://www.siemens.com/smart-infrastructure)



**Published by
Siemens AG**

Smart Infrastructure
Electrification & Automation
Mozartstrasse 31 C
91052 Erlangen, Germany

For further information, please contact
our Customer Support Center:

Phone: +49 180 524 70 00

Fax: +49 180 524 24 71

E-mail: support.energy@siemens.com

[siemens.com/medium-voltage-switchgear](https://www.siemens.com/medium-voltage-switchgear)

[siemens.com/nxair](https://www.siemens.com/nxair)

Article No. SIEA-C10149-00-7600

VO 238031 en KG 01.24 0.0

**For the U.S. published by
Siemens Industry Inc.**

100 Technology Drive
Alpharetta, GA 30005
United States

Status 01/2024

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.

© Siemens 2024