

## FOR THOSE OF YOU WHO ARE HAVING SECOND THOUGHTS ABOUT YOUR FIRST CB.

Move up to the all-new Cobra 29GTL. It's the third generation of the trucker-proven Cobra 29. And like the 29 and the 29XLR before it, it advances the state of the art.

Transmitter circuitry has been refined and updated to improve

performance.

Receiver circuits have been redesigned to include dual FET mixers, a monolithic crystal filter and a ceramic filter to reduce interference and improve reception.

By improving the transmitter circuitry the 29GTL keeps you punching through loud and clear. By incorporating new features for better reception everything you copy comes back loud and clear.

So if you're having second thoughts about your first CB, make your next CB the Cobra 29GTL.

We back it with a guaranteed warranty and a nationwide network of Authorized Service Centers where factory-trained technicians are available to help you with installation, service and advice.

But more important than that, we sell it at a price you won't have second thoughts about.



#### Punches through loud and clear.

Cobra Communications Products DYNASCAN CORPORATION 6460 W. Cortland St., Chicago, Illinois 60635

Write for color brochure EXPORTERS: Empire • Plainview, N.Y • CANADA: Atlas Electronics • Ontario



# The Great Breakthru!


Computer Engineered Duo-Phased Performance!



Powerwave of Base Loaded Antenna



Powerwave of Top Loaded Antenna



Powerwave of Shakespeare's Two Load™ Antenna

NEW LONGER RANGE! NEW TALKPOWER! NEW STRENGTH! NEW MOUNTS!

Black . White!

Shakespeare's computer engineered

Two Load™Antenna doubles the advantage
of both base and top loaded antennas. Base
loading means low SWR. Top loading gets
the signal out! With loading coils stacked
and co-phased in the vertical mode, the
Shakespeare Two Load™multiplies your signal
in all directions...power up to get out over
the top of nearby interference...power down
to ensure superior performance and low SWR

#### Big New Bonus in Reach and Range

**TIP LOAD**...the top loading coil is completely encased in Shakespeare's exclusive fiberglass process. No bulge. No lump. No exposed coil. And the sleek, thin design stays erect at highway speeds.

**BASE LOAD...**the Shakespeare base loaded coil is your booster...promising extra performance and delivering a true power match.



PLUS...the new sculptured chromed trunk mount that has Detroit cheering. With built-in electronics. A moulded rubber shield to protect your car's finish. And the new Spin-Off/On Feature lets you laugh at the guys at the car wash. The stud is stainless...the housing sealed...making the entire unit moisture

Two Load™ Antenna Style 5000-1E Trunk Ld Mount with "Duo-Phased" loading

under



ELECTRONICS AND FIBERGLASS DIVISION

Antenna Group/P.O. Box 246, Columbia, S.C. 29202

The Shakespeare Company/Manufacturers of Communications Antennas, Marine Electronics, Fishing Tackle, Industrial Fiberglass, Lighting Poles, Wonderthread and Specialized Monofflaments, Goff Equipment, Automotive Products, Saddlery and Educating Accessories

proof and completely corrosion resistant!

#### THE STAFF

Editor-in-Chief Julian S. Martin Managing Editor Alan H. Rose, K2RHK

Technical Editor Gordon Sell, KBDA1464

Associate Editor Lee Lensky, KA2DKT

Citizens Band Editor Kathi Martin, KGK3916

**Editorial Assistant** Cynthia McClean, KBKF3780

> Workbench Editor **Hank Scott**

**Art Director** 

Ralph Rubino

Associate Art Director

**David Pindar** Assistant Art Director

**Michael Vessio** 

Cover Art Director Irving Bernstein

Art Editor Joe Groom

Art Assistants

Celeste Barbera Leslie Wallant Delia Nobbs

Advertising Director Ralph Vega

**Production Director Carl Bartee** 

**Production Manager Carole Dixon** 

Production Assistant **Annette Simon** 

**Newsstand Circulation** Director

Don Gabree

Subscription Circulation Director Robert V. Enlow

Subscription Circulation Manager Éugene S. Slawson

Marketing Director James C. Weakley

President and Publisher Joel Davis

> Vice President and General Manager Leonard F. Pinto

Vice President and Treasurer Victor C. Stabile, KBP0681

ISSN: 0013-595X

ELEMENTARY ELECTRONICS is published bi-monthly by Davis Publications, Inc. Editorial and Executive offices: 380 Lexington Ave., New York, NY 10017; all subscription orders and mail regarding subscriptions should be sent to P.O. Box 2630, Greenwich, CT 06835. In U.S.A. and possessions, one-year subscription (six issues) \$16.95; two-year subscription (12 issues) \$12.95; three years (18 issues) \$18.95; and four years \$23.95. Elsewhere, add \$1.00 postage for each year. For change of address, please advise 6 to 8 weeks before moving. Send us your current mailing label with new address. Advertising offices. New York, 380 Lexington Ave., New York, NY, 10017, 212-557-9100; Chi-quantification of the controlled circulation rates are pending at NY. NY and Sparts Illipsic Conv. ELEMENTARY ELECTRONICS is pubtrolled circulation rates are pending at N.Y., N.Y. and Sparta, Illinois. Copy-right 1979 by Davis Publications Inc.

### ementar May/June 1979 Volume 19, No. 3

#### RADIO ROUND-UP

- 43 Wireless Microphones—be the first broadcast station on your block
- 46 Signal Snare—lure those stations into your shack like Grandpa did 61 How Not to Be a Lid—nip those bad operating habits in the bud!

- 65 Solar Swinger—chases the radio clouds away
  73 Antique Radio Corner—on insuring those priceless antiques

#### SPECIAL FEATURE—THE HISTORY OF ELECTRICITY

☆ 68 The New Edisons—after one hundred years of light, what's next?

#### **NEAT AND NIFTY CONSTRUCTION PROJECTS**

- ☆ 35 The Third Ear—transistorized servant follows your every command
  - 51 Space Cushion Timer—helps you avoid that next bumper bender
  - 72 Washer Watcher—never another dirty windshield

#### COMPUTER TIPS

- 70 Simply Basic—keep track of all those record albums
- 77 Computer Readout—how a computer instructs itself

#### THE WIDE WORLD OF SHORTWAVE LISTENING

- 48 DX the BBC World Service—this is the British Broadcast Empire
- 63 Curing Receiver Images—keep your receiving circuits clean

#### **KEEPING UP WITH CB**

- 75 Kathi's CB Carousel—Kathi programs the Pace 8117
- 76 CB XCVR Checkout—four more of the most interesting rigs get the going-over

#### ROUGHING UP SOME NEW EQUIPMENT

- ☆ 50 e/e Checks Out the . . . Redco RFC 50 Frequency Counter
- 53 e/e Checks Out the . . . SOL-20 Personal Computer Kit
- 55 e/e Checks Out the . . . Palomar Broadcast Band Loop Antenna
  - 59 e/e Assembles the... Heath Active Audio Processor

#### **OUR REGULAR DEPARTMENTS**

- 9 Hey, Look Me Over—the newest products that it was worth waiting for
- 24 DX Central—our resident DX-pert goes over some pertinent points
- Newscan—some very interesting developments
- Bookmark-by Bookworm
- 32 Hi-Fi Reports—our audio editor equips a disco 79 Basic Course—hurry up and get started on transistors
  - 95 Literature Library
  - 98 Ask Hank, He Knows—Hank fixes everything







#### **AUTHORS IN THIS ISSUE**

Homer Davidson, Bruce Evans. Thomas Fox, James A. Fred, Charles Green, Larry Friedman, Jorma Hypia, Don Jensen, Kathi Martin, Brian Rogers, Hank Scott, Gordon Sell, Walter Sikonowiz, C. M. Stanbury, Thomas Sund-strom, Martin Weinstein, Tom Williams, and the ELEMENTARY ELECTRONICS editorial staff.



Cover photo by Dave Niedo

#### WAYS TO INCREASE YOUR **ELECTRONICS KNOW-HOW!**

SEND NO MONEY! We'll invoice you on 10-DAY FREE TRIAL.
ALL BOIKS 100% GUARANTEED. You must be satisfied or return the books and we'll cancel the invoice

#### COMPUTERS, MICROPROCESSORS & ROBOTICS

COMPUTERS, MICROPROCESSORS & ROBOTICS

71—The Complete Handbook of Hobotics 394 p. 137 il.

85—22 Tested, Ready-To-Run Game Programs in BASIC 252 p.

79—Digual Interfacing with an Analog World 406 p. 277 il.

88—illustrated Oict of Microcomputer Terminodogy 322 p. 150 il.

79—Affacial Interfacing with an Analog World 406 p. 277 il.

88—illustrated Oict of Microcomputer Terminodogy 322 p. 150 il.

79—Affacial Intelligence 252 p. 118 il.

88—illustrated Oict of Microcomputer Terminodogy 322 p. 150 il.

88—intelligence 252 p. 118 il.

89—intelligence 252 p. 118 il.

89—i

#### BASIC & GENERAL ELECTRONICS TECHNOLOGY

BAS © & GENERAL ELECTRONICS TECHNOLOR

510— ow to Read Electronic Circuit Diagrams 192 p. 140 il.
588— 6 asic Electronics Course 384 p. 275 ii.
891—Fractical Solid-State DC Power Supplies 196 p. 151 ill.
682—Esais Electronics 280 gengining Electronics 252 p. 196 il.
830—stroduction to Medical Electronics 320 p. 126 il.
830—stroduction to Medical Electronics 320 p. 126 il.
830—stroduction to Medical Electronics 320 p. 126 il.
872—13sic Digital Electronics 210 p. 117 il.
872—13sic Digital Electronics 210 p. 117 il.
872—3 witching Regulators & Power Supplies 252 p. 126 il.
873—mdustrial Electronics Principles & Practice 416 p. 380 il.
873—andustrial Electronics 270 p. 487 il.
873—andustrial Electronics 420 p. 487 il.
874—13sic Color Television Course 420 p. over 300 il.
875—Modern Radar—Theory, Oper, and Maint, 480 p. 253 il.
104—3 asic Radio Course 224 p. 128 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse Electronics Hendbook 192 p. 106 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
878—3 ulse & Switching Circuits 256 p. 184 il.
879—3 ulse & Switching Circuits 256 p. 184 il.
879—3 ulse & Switching Circuits 256 p. 184 il.
870—3 ulse & Switching Circuits 256 p. 184 il.
870—3 ulse & Switching Circuits 256 p. 184 il.
870—3 ulse & Switching Circuits 256 p. 184 il.

JITS BOOKS, HOBBY ELECTRONICS & PROJE

How To Design & Build Your Own Custom TV Gamers 546 p.

The Power Supply Handbook 420 p. 292 il.

Lasers. The Lught Fantastic 294 p. 158 il.

How to Build & Use Low-Cost Hydropnones 140 p. 98 il.

- Understanding Electronic Circuits 308 p. 265 il.

- Master Hdbk of 1001 Practical Electronic Circuits 602 p. 303 il.

- Beginner's Gde. to Designing/Bld. p. Iransistor Radios 140 p. 9.

- 303 Dynamic Electronic Circuits 308 p. 303 il.

- Beginner's Gde. to Designing/Bld. p. Iransistor Radios 140 p. 113 il.

- Beginner's Gude to Making Electr Gadgets 140 p. 113 il.

- The ABC Book of Hi-Fil-Audio Projects 186 p. 13 il.

- The ABC Book of Hi-Fil-Audio Projects 186 p. 13 il.

- How to Build Metal/Treasure Locators 140 p. 60 il.

- How to Build Metal/Treasure Locators 140 p. 60 il.

- How to Build Metal/Treasure Locators 140 p. 60 il.

- How to Build Book of Cypial Electronic Tregets 236 p. 175 il.

- Hought Book of Digital Electronic Timepieces 294 p. 209 il.

- Model Radirada Electronics 308 p. 218 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Model Radirada Electronics 308 p. 218 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- How the Electronics Guidebook-with Propects 186 p. 115 ill.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Timepieces 294 p. 209 il.

- Build-II Book of Digital Electronic Hobbysts 168 p. 77 il.

- Display Electronic Sudebook villado Propects 322 p. 136 il.

- Bettornois Of Shulterbook villado Propects 322 p. 136 il.

- Bettornois Sell-Taught with Exp. 8 propects 289 p 64 Hobby Projects for Home & Car 192 p. 195 il.
1250 Che-Transstor Projects 192 p. 125 il.
1250 Che-Transstor Projects 192 p. 125 il.
Fun with Electricity 128 p. 94 il.
Stereo Quad Hi-Fi Principles & Projects 192 p. 100 il.
Electronic Hobbyist si C Project Handbook 154 p. 86 il.
New IC PET Principles & Projects 154 p. 60 il.
104 Easy Transistic Projects You Can Build 224 p. 105 il.
Practical Solid-State Principles & Projects 176 p. 127 il.
R. Projects for Amateur & Experimente 192 p. 252 il.
Transistor Projects for Hobbyists & Students 192 p. 153 il.
Electronic Puzzles & Games 128 p. 754.

ELECTRONIC TEST EQUIPMENT How to Test Almost Everything Electronic 160 p. 144 ji.

–Effective Troubleshooting with EVM. Scope 238 p. 185 ii.

–How To Design Build Electr Instrumentation, 420 p. 270 ji.

–Build-It Book of Miniature Test & Memi Instr 238 p. 151 ii.

–Working with the Oscilloscope 104 p. 183 if. 7 x. 97 j.

–Understanding & Using the VOM & EVM. 192 p. 187 ii.

–How to Use AF & RF Signal Generators 238 p. 182 iii.

–Electronic Museumenents Simplified 240 p. 217 ii.

–FR & Bugstal Test Equipment You Can Build 252 p. 217 iii.

–FR & Digital Test Equipment You Can Build 252 p. 217 iii.

–How to Use AF Signal Generators 294 p. 120 iii.

–Under & Using Modern Signal Generators 294 p. 120 iii.

–How to Use Office TV Test Instruments 256 p. 230 ii.

–How to Use Office Total Concess 250 p. 153 ii.

–How to I mitoot & Repair Electr. Test Egit 252 p. 143 iii.

–How to I mitoot & Repair Electr. Test Egit 252 p. 143 iii.

–How to Use Your Oscilloscope 192 p. 357 ii.

–How to Use Test Instruments Servicing .56 p. 234 ii.

Vectorscopes-Scopes Sweep Market Generators 255 p. 234 ii.

How To Install Your Own Home or Mobile Ele. Power Plants
Direct Current Motors 252 p. 172 il.

Sheaning Aid Handbook 336 p. 224 il.

Complete Hoth, of Electrical House Wirring 476 p. 196 il.

Homeowner's Gde to Solar Heating/Cooling 196 p. 113 il.

Microwave Oven Service & Repair 420 p. 210 il.

Microwave Oven Service & Repair 420 p. 210 il.

Guide to Modern Energy Efficient Heating/Cooling Sys.

How to Completely Secture Your Home 224 p. 162 il.

-101 Practical Uses for Propaire Torches 140 p. 93 il.

Bullot-II Book of Solar Heating Projects 196 p. 111 il.

-Central Heating Air Cond Repair Guide 320 p. 285 il.

Electric Motor Test & Repair 160 p. 102 il.

-Small Appliance Repair Guide-Vol. 1 224 p. 100 il.

-How to Repair Small Gasoline Engines 392 p. 251 il.

-How to Repair Home Kitchen Appliances 294 p. 205 il.

-Complete Hobk of Locks & Locksmithing 392 p. 248 il.

-Complete Hobk of Locks & Locksmithing 392 p. 248 il.

-Small Appliance Repair Guide-Vol. 2 2 100 il.

-How to Repair Home Kitchen Appliances 290 p. 137 il.

-Small Appliance Repair Guide-Vol. 2 2 100 il.

-How to Repair Home Kitchen Appliances 290 p. 137 il.

-Small Appliance Repair Guide-Vol. 2 2 100 il.

-How to Repair Home Kitchen Appliances 290 p. 137 il.

-Small Appliance Repair Guide-Vol. 2 2 100 il.

-Bertigeration 160 p. 53 il.

-How to Repair Home Autor Air Conditioners 208 p. 100 il.

-Refrigeration 160 p. 53 il.

445 1

CB, COMMUNICATIONS, HAM RADIO & PHONES

097—All About Telephones 192 p. 140 ll.

052—Radar Detector Handy Manual 80 p. 83 H

053—Radar Detector Handy Manual 80 p. 83 H

054—Antenna Construction Holk for Ham. CB & SWL 238 p. 55 95

005—Holds to Solar Flare Monitoring & Prop Forecasting 196 p. 55 95

907—The Handbook of Telephones & Accessories 432 p. 215 ll. 99 99

909—CBer s Handy Manual of Base Stations 96 p. 55 ll.

881—Master Handbook of Ham Radar Oricults 392 p. 30 ll 48 95

909—CBer s Handy Manual of Base Stations 96 p. 55 ll.

882 95—CBer s Handy Manual of Base Stations 96 p. 15 ll.

883 95—CBer s Handy Manual of SSB 80 p. 42 ll.

884 95—CBer s Handy Manual of SSB 80 p. 42 ll.

885 95—CBer s Handy Manual of SSB 80 p. 42 ll.

886 95—Pictorial Guide to CB Radio Install Repair 256 p. 304 ll.

887 95—CBer s Handy Manual 48 p. 16 ll.

888 95—CBer s Handy Manual 48 p. 16 ll.

889 95—CBer s Handy Manual 48 p. 16 ll.

889 95—The Complete FM C-Way Radio Handbook 294 p. 111 ll.

889 95—The Complete FM C-Way Radio Handbook 294 p. 111 ll.

889 95—Pictorial CB Radio Troubleshooting & Repair 406 p. 169 ll.

889 95—The Complete FM C-Way Radio Handbook 294 p. 111 ll.

889 95—The Complete Handbook of Slow-Scan TV 304 p. 169 ll.

889 95—Pictorial CB Radio Troubleshooting & Repair 406 p. 169 ll.

889 95—Pictorial CB Radio Troubleshooting & Repair 406 p. 169 ll.

889 95—Pictorial CB Radio Troubleshooting & Repair 406 p. 169 ll.

899 95—Pictorial CB Radio Troubleshooting & Repair 406 p. 169 ll.

899 95—Pictorial CB Radio Troubleshooting & Repair 406 p. 169 ll.

899 95—Pictorial CB Radio Troubleshooting & Repair 406 p. 169 ll.

899 950—Bit First Handy All Stock Properties Scan Brown Repair Brown

ectronic Music Circuit Guidebook 224 p. 180 il.
urcebook of Electronic Organ Circuits 168 p. 101 il.,
urcebook of Electronic Organ Circuits 168 p. 101 il.,
uto Repair Musical Instrument Amplifiers 288 p. 50 il.,
etronic Musica Production 156 p. 79 il.,
permenting with Electronic Music 180 p. 103 il.,
etronic Musical Instruments 192 p. 121 il.,
eteronic Musical Instruments 192 p. 121 il.,
eteronic Musical Instruments 193 p. 81½ il.,
rvicing Electronic Organs 196 p. 81½ il., 1111 145 il.,
rvicing Electronic Organs 196 p. 81½ il., 1111 145 il.

#### AUDIO, RECORDING, HI-FI & STEREO

How to Design Build Test Complete Speaker Systems 336 p.

Install Everything Electr in Cars Boats-Planes/Trucks 364 p. 8
Jap Radio. Record / Tape Player Schem Manual —V. 2.200 p.

Understanding Sound, Video & Film Recording 140 p. 74 il. 9
Complete Handbook of P.A. Sound Systems 272 p. 148 il. 9
Amateur Filmmakers Hdbk Sound Sync Sconing 210 p. 9
Microphones—How Work & How to Use Them 224 p. 97 il. 9
Acoustic Techniques for Home & Studio 224 p. 168 il. 9
Handbook of Mullichannel Recording 322 p. 196 il. 9
Pictorial Guide to Tape Recorder Repairs 255 p. 320 il. 9
Pictorial Guide to Tape Recorder Repairs 255 p. 320 il. 9
Pictorial Guide to Tape Recorder Repairs 255 p. 320 il. 9
Basic Audio Systems 240 p. 302 il. 9
Cassette Tape Recorder-How Work Care/Repair 204p.171 il. 9
Tape Recording for Fun & Profit 224 p. 171 il. 9
Audio Systems Handbook 192 p. 125 il. 9
Gevicing Cassette & Cartridge Tape Players 294 p. 196 il. 9
Servicing Cassette & Cartridge Tape Players 294 p. 196 il. 9
Installing & Servicing Home Audio Systems 256 p. 136 il. 9
Lelements of Tape Recorder Circuits 244 p. 145 il. 9
Lap Radio. Record & Tape Player Service Manual 228 p. 1
Installing Her. Fi Systems 224 p. 157 il. 9
Servicing Record Changers 224 p. 173 il. 9
Servicing Record Changers 224 p. 173 il.

2—TV Field & Bench Servicer's Handbook 308 p. 157 it.

9—Color TV Trouble Factbook —4th Edition 532 p.

8—How To Repair Video Games 270 p. 182 it.

9—Hodbook of Marine Electronic & Electrical Systems 546 p.

1—CET License Handbook-2rd Edition 448 p. 159 it.

1—TV Troubleshooter's Handbook-3rd Ed. 488 p. over 300 it.

8—Beginne's Guide to TV Repair 176 p. 50 it.

1—Fire & Theft Security Systems-2rd Ed. 192 p. 108 it.

1—Color TV Case Histories Illustrated 238 p. 219 it.

1—Photo-Guice Solid-State Color TV Troubles 224 p. 169 it.

1—Troubleshooting with the Dual-Trace Scope 224 p. 252 it.

1—Install: Svering Electri. Protective Systems 252 p. over 160 it.

1—TV Schematics Reading-14 Protective Systems 252 p. over 160 it.

1—TV Tuner Schematic Servicing Manual-Vol. 1 242 p. 287 it.

1—TV Inner Schematic Servicing Manual-Vol. 1 242 p. 287 it.

1—Logical Color TV Troubleshooting video p. 151 it.

1—Logical Color TV Troubleshooting video p. 151 it. -1V Tuner Schematics-Erwicing Manual-Vol. 2 (200 p. 374 li. Logical Coler. TV Troubleshooting 240 p. 151 ll. -199 TV Tough-Dog Problems Solved 252 p. 199 il. -Modern Radio Repair Tochniques 260 p. 207 il. -How to Repair Solid-State Imports 192 p. 81 yr. -111122 il. -Pictorial Goute to Coler TV Circuit Troubles 256 p. 262 ll. -TV Servicing Guidebook 176 p. 110 p. 1252 il. -127 Jan. -1 apair Solid-sime visuale for Solid-ship visuale to Coine TV Circuit Troubles 256 p. 262 in guidebook 176 p. 110 it. service Unitino No. 3.252 p. 122 if. s. Service Clinic No. 1.192 p. 125 if. v. Troubles in 10 Minutes 327 p. 394 if. Servicing Techniques 228 p. 77 if. servicing Techniques 228 p. 77 if. servicing Techniques 228 p. 77 if. servicing Techniques 224 p. 178 if. v. Troubles in Symptom to Repair 224 p. 170 if. g. Solid State Electr. Power Supplies 192 p. 85 if. servicing Manual 240 p. 367 if. serv

#### SEMICONDUCTORS. TUBES & TRANSISTORS

1016—Towers International FET Selector 140 p
1010—Towers Inter Transistor Selector 2001 p. 179 if 7" x 10"
856—Master OP-AMP Applications Handbook 476 p. 320 il.
960—IC Function Locator 224 p
984—CMOS Databook 280 p. 270 il.
870—Master Tube Substitution Handbook 548 p. 322 il.
970—Master Transistor IC Substitution Handbook 518 p. 165 il.
717—Transistor Theory for Technicians & Engrs. 224 p. 116 il.
938—Linear IC Applications Handbook 284 p. 183 il.
470—Transistor Circuit Gurdebook 224 p. 118 il.
794—Microelectronics 266 p. 228 il.
708—Modern Applications of Linear ICs. 276 p. 301 il.
513—Understanding Solid-State Circuits 192 p. 104 il.
116—Getting Started with Transistors 160 p. 90 il.

#### ENGINEERING & REFERENCE

| 035—Instrumentation & Control Sys. Eng. Hdbk. 434 p. 184 il. | 519.95 |
| 229—Solio-State Motor Controls 322 p. 152 il. | 529.55 |
| 422—Prol Electrical Electr. Engr. s. License Study Guide 476 p. |
| 750—Electronic Conversions. Symbols & Formulas 224 p. 46 il. |
| 55.95 |
| 829—Impedasce 196 p. 90 il. |
| 744—Digital Logic Electronics Handbook 308 p. 226 il. |
| 55.95 |
| 118—Electronic Curcul Design Hdbk. Afth. Edition 416 p. 966 il. |
| 55.95 |
| 118—Electronic Curcul Design Hdbk. Afth. Edition 416 p. 966 il. |
| 55.95 |
| 125—Handbook of Electronic Tables 224 p. 16 il. |
| 54.95 |

#### COLOR TV SCHEMATIC/SERVICING MANUALS

n vol. has complete service data: parts lists tuli-size schematic fold section: and all other info needed. Each 8.1.2 x 11, only \$5.95 ur otherwise marked.

otherwise marked

Sverig New Modular Color TV Recvrs Vol. 1 176 p.

Admiral Vol. 1 195 p. 12 schematics

Admiral Vol. 1 195 p. 12 schematics

Admiral Wol. 1 195 p. 13 schematics

Admiral Wol. 1 195 p. 13 schematics

General Electric Vol. 1 196 p. 12 schematics

General Electric Vol. 2 196 p. 13 schematics

General Electric Vol. 3 195 g.

Japa Vol. 2—Delmonico. Hitachir Panasonic, etc. 212 p.

Japa Vol. 2—Delmonico. Hitachir Panasonic, etc. 212 p.

Japanese Vol. 3—Hitachir Sanyo, Coronado 228 p.

Japanese Vol. 3—Hitachir S -Mourole voti - 25 per super Phiko 196 p. 12 Schematics - RCA Vol 1 212 p. 12 Schematics - RCA Vol 2 212 p. 12 Schematics - RCA Vol 3 196 p. 12 Schematics - RCA Vol 3 196 p. 12 Schematics - RCA Vol 4 196 p. 12 Schematics 822—RCA Vol. 5.196 p. 36 p. schematic section 740—Sears 228 p. 12 schematics 618—Sylvania Vol. 2.212 p. 8 schematics 760—Toshba 160 p. 12 schematics 502—Zenith Vol. 1.196 p. 12 schematics 562—Zenith Vol. 2.198 p. 12 schematic foldout 688—Zenith Vol. 3.180 p. 36 p. schematic foldout 838—Zenith Vol. 4.196 p. 36 p. schematic foldout 918—Svong, Zenith T V Modules 200 p. over 200 t.

#### CB & HOME AUDIO SCHEMATIC SERVICING MANUALS

Contain all the data needed to service each unit including complete schematic diagrams backed up with step-by-step troubleshooding into theory, tips for isolating problems, etc. All 7" x 10". Each only \$5.95 to 2.056—Vol. 3—Automatic Radio, Admirat. Midland, Sharp \$5.95 to 2.2—Channel-Master, Goronado, Hitach \$5.95 to 2.2—Vol. 1—Kirs, Browning, Hy-gain, Penney s \$5.95 to 3.2—Leaperly, Ettrona, Peacres-Simpson Unimetrics \$5.95 to 3.3—Johnson Linear-SBE, Royce, Sonar \$5.95 to 3.3

#### 10-DAY FREE TRIAL --- NO RISK COUPON

IV WAT			No mon	0001 014
TAB BO	OOKS, E	Blue Ridg	e Summit,	Pa. 17214
Please	send me	the book	s indicated	helow


☐ I enclose \$			Send postpaid.			
☐ Invoice	me on	10-day	trial	(plus	shipping)	

BOOK #	DOOK *	BOOK 4	DOOK #		
		1/2			
Name		Phone			

City\_\_\_\_\_State \_\_\_\_\_ Zip\_

Pa. add 6% Sales tax. Ail orders outside USA must add 15% shipping and be prepaid. 

# "If you're going to learn electronics, you might as well learn it right!"

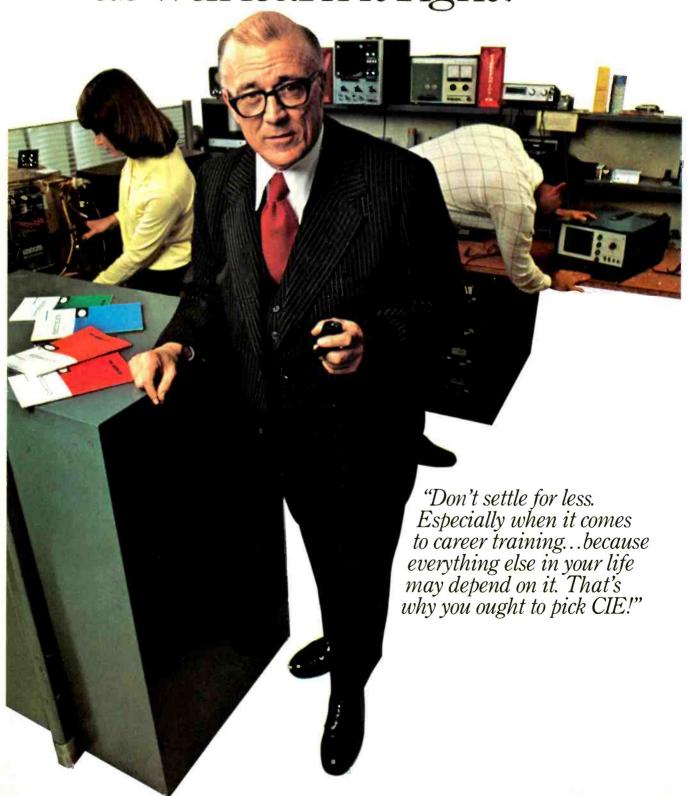

ou've probably seen advertisements from other electronics schools. Maybe you think they're all the same.
They're not!

ČIE is the largest independent home study school in the world that specializes exclusively in electronics.

### Meet the Electronics Specialists.

When you pick an electronics school, you're getting ready to invest some time and money. And your whole future depends on the education you get in return.

That's why it makes so much sense to go with number one . . . with the specialists . . . with CIE!

#### There's no such thing as bargain education.

If you talked with some of our graduates, chances are you'd find a lot of them shopped around for their training. Not for the lowest priced but for the best. They pretty much knew what was available when they picked CIE as number one.

We don't promise you the moon. We do promise you a proven way to build valuable career skills. The CIE faculty and staff are dedicated to that. When you graduate, your diploma shows employers you know what you're about. Today, it's pretty hard to put a price on that.

### Because we're specialists, we have to stay ahead.

At CIE, we've got a position of leadership to maintain. Here are some of the ways we hang onto it...

### Our step-by-step learning cludes "hands-on" aining.

At CIE, we believe theory is portant. And our famous to-Programmed® Lessons teach the principles in logical steps.

But professionals need more in theory. That's why some of our urses train you to use tools of the de like a 5 MHz triggered-sweep, id-state oscilloscope you build urself—and use to practice trouble-poting. Or a beauty of a 19-inch igonal Zenith solid-state color TV use to perform actual service rations.

#### ar specialists offer you promal attention.

Sometimes, you may even have uestion about a specific lesson. It. Write it down and mail it in. It experts will answer you imptly in writing. You may even the specialized knowledge of all CIE specialists. And the answer iget becomes a part of your perment reference file. You may find a even better than having a classim teacher.

### Pick the pace that's right for you.

CIE understands people need to learn at their own pace. There's no pressure to keep up... no slow learners hold you back. If you're a beginner, you start with the basics. If you already know some electronics, you move ahead to your own level.

### Enjoy the promptness of CIE's "same day" grading eyele.

When we receive your lesson before noon Monday through Saturday, we grade it and mail it back the same day. You find out quickly how well you're doing!

#### CIE can prepare you for your FCC License.

For some electronics jobs, you must have your FCC License. For others, employers often consider it a mark in your favor. Either way, it's government-certified proof of your specific knowledge and skills!

More than half of CIE's courses prepare you to pass the government-administered exam. In continuing surveys, nearly 4 out of 5 CIE graduates who take the exam get their Licenses!

#### For professionals only.

CIE training is not for the hobbyist. It's for people who are willing to roll up their sleeves and go to work ... to build a career. The work can be hard, sure. But the benefits are worth it.

#### Send for more details and a FREE school catalog.


Mail the card today. If it's gone, cut out and mail the coupon. You'll get a FREE school catalog plus complete information on independent home study. For your convenience, we'll try to have a CIE representative contact you to answer any questions you may have.

Mail the card or the coupon or write CIE (mentioning name and date of this magazine) at: 1776 East 17th Street, Cleveland, Ohio 44114.



Patterns shown on TV and oscilloscope screens are simulated.

	Cleveland Institute of Electronics, Inc.
	1776 East 17th Street, Cleveland, Ohio 44114
	Accredited Member National Home Study Council
TES catalog – includi	I want the best of everything! Send me my FREE CIE school lng details about troubleshooting courses – plus my FREE package formation.
Print Name	
Address	Apt
City	
State	Zip
Age	Phone (area code)
Check box for G. MAIL TOE	I. Bill information:   Veteran   Active Duty  AY!

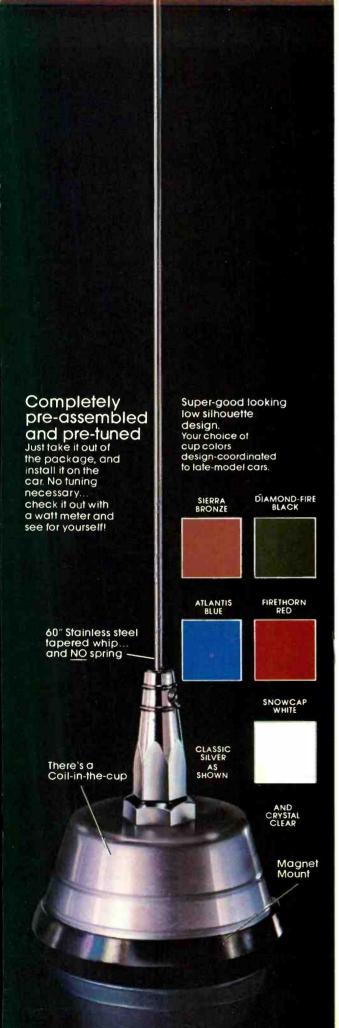

# These new Persuader Antennas low profile, extra long whip, deliver performance equal to, or better than anything else on the road!

There's a hand-wound, hand-tuned coil in the cup...



a major advance in antenna technology from the Antenna Pros field tested and field proven by thousands of CBers

Only \$34.98 suggested retail. Compare with K-40 at \$38.50 or any other antenna. You'll see there's no comparison.

### 5 year guarantee

Materials and workmanship of PERSUADER ANTENNAS (Models 13505 & 17605) are guaranteed for a full five years if this antenna is installed by the dealer and a full three years if this antenna is installed by the consumer.

Any part that fails within the guarantee period will be replaced absolutely free provided the registration card has been completely filled out and returned to Antenna Incorporated.



#### A word from the Old Pro:


When you buy this antenna, my reputation...built over 38 years in the antenna business...will be riding on your roof. I'm confident that the Persuader Antennas will persuade you... you've chosen the Best.

M.R. Friedberg, President Antenna Incorporated

#### In stock at your dealer now...

or call the Antenná Hotline ...1-800-447-4700. (Illinois: 800-322-4400; Sorry, no Hotline service in Alaska or Hawaii).





Antenna promptly, in the mount and color of your choice. Hotline orders add \$1.50 for shipping and handling. Applicable local taxes extra. Allow 2 to 4 weeks for delivery.

The family of fine antennas from the fine antenna family.



26301 Richmond Road, Cleveland, Ohio 44146 (216) 464-7075

In Canada: Cardon Import Canada Ltd., P.O. Box 937 Hamilton, Ontario LBN 3P9
Antenna Incorporated, International Division, P.O. Box 1002 Rockville Centre, New York 11571

www.americanradiohistory.com

#### These features will persuade you... The Persuader™ Antenna is Your Best Antenna Choice

### 60" Stainless Steel Tapered Whip...and No Spring

The super-long whip increases the aperture of the anienna. This increases

- · the signal capture area on reception
- the transmit signal and radiation intensity at the horizon
- bandwidth to well over a 40-channel capability.
   The .125" diameter whip is tapered, so shock is distributed evenly. There's no spring to stretch, break, or bend the whip away from the straightest possible upright position.

#### Exclusive coil-in-cup design

Loading of most low-profile antennas is by a simple printed circuit board that can't be tuned and will eventually burn out. These new Persuader antennas are completely pre-assembled and pre-tuned and feature an actual hand-wound, hand-tuned copper wire loading coil tested with 500 watts, rated at 100 watts continuous. It's even more efficient than our base-loaded coils because it's wound to a larger diameter, with fewer turns.

This unique design also involves fewer mechanical and electrical connectors—fewer resistive contacts between loading coil and cable terminations—less chance for dust, moisture or road gunk to contaminate the contacts.

This concept has been field tested by thousands of CBers in our Model 13503 (shorter whip, plain white cup). Your good buddies will tell you everything we say about it is true.

#### Available with Trunk-Lip or Magnet Mount


#### for performance:

- SWR of 1.5:1 or less across all 40 AM and SSB channels.
- Shunt-fed loading coil is DC grounded for quiet performance; bleeds off static from rain, snow, air particles. Performance is virtually identical to body mount antennas.
- Center-roof placement of magnet mount provides your most uniformly omni-directional signal. (Can also mount on trunk lid).
- Unique Antenna Incorporated design provides capacitive coupling. Aluminum plate puts the ground potential right at the mounting surface.

for convenience: Magnet and trunk lip, the two easiest installations! Place the antenna where you want it, plug the cable into the transceiver. No holes to drill. Readily removed for antitheft protection. Magnet mount supplied with 12' RG-58/U coaxial cable with PL-259 type connector; trunk lip mount with 17' of cable.

for magnet mount adherence: Heavy-duty 2½" magnet in plastic cup with soft rubber gasket. Holds at top highway speeds of 55 mph. (Trunk lip mount recommended for vinyl roof cars.) Since it won't walk, it won't detune! "Oil-can" effect of cup; resting on gasket, provides a larger magnet plane than if the magnet itself were touching the surface—yet there's less weight on the car, less scratch potential.

All magnet mount benefits are standard...
not an extra-cost accessory!



#### Call for Echo

An analog echo unit with no moving parts and a two-position output level selector, which controls signal strength for use either in home stereo systems or electronic musical instrument systems is the RolandCorp DC-10. This versatile unit provides a full range of effects, from single delay to the recreation of sound



#### CIRCLE 48 ON READER SERVICE COUPON

as it might be heard in a large concert hall. The lightweight model features stereo output, and allows remote control of echo effect through an optional footswitch. Single delays, acoustic echo effects, sustained echos and chorus effects similar to those achieved by a phase shifter can be achieved, but all of them can be by-passed by the footswitch, which changes the effects instantly to direct, unaffected sound. A three-position input selector (-20, -35, -50 dB) makes it easy to accept nearly any kind of input. The DC-10 analog echo unit sells for \$390. For more info, write to RolandCorp US, 2401 Saybrook Avenue, Los Angeles, CA 90040.

#### Three New Oscilloscopes

Quick and easy set-up and operation are the key features in a new line of push-button-triggered oscilloscopes introduced by Hickok. They consist of three models which feature automatic triggering, color-coded front panels, and conveniently grouped controls. The Model 532 at \$995 (including probes) is a dual-trace 30 MHz scope with 11.7 nSec risetime and a



**CIRCLE 47 ON READER SERVICE COUPON** 

built-in delay line for leading edge viewing of fast risetime pulses. Full time 4X expansion allows any portion of a pulse train up to 40 full divisions long to be viewed without the use of a multiplier. It is well suited for logic and pulse circuit applications. The Model 517 is a dual-trace 15 MHz scope with 5 mV/cm sensitivity and reliable triggering up to

30 MHz. Priced at \$695 (including probes) the Model 517 features automatic selection of chopped or alternate operation in dual trace mode depending on sweep speed selected. The Model 517 is ideal for TV, VCR, audio and video maintenance and repair, as well as design and troubleshooting of most digital logic circuits. The Model 515 offers most of the features of the Model 517 in a lower-priced (\$495 including probe) single trace version well suited to servicing and hobby applications. TV sync separators are built-in for easy locking to complex TV video wave forms at any sweep speed and, like the Model 517, it provides x-y operation for vectorscope measurements. For all the facts, write to the Hickok Electrical Instrument Co., 10514 Dupont Ave., Cleveland, OH 44108.

#### **Mighty Mite**

Radio Shack's Realistic STA-7 AM/FM stereo "mini" receiver delivers 10 wattsper-channel RMS into 8 ohms over 20-20,000 Hz with a 0.5% total harmonic distortion. The low-profile receiver features an equalization (EQ) circuit which produces high-fidelity sound from the latest "mini" speaker systems like Radio Shack's Minimus-7s. The EQ circuit uses both voltage and current negative feedback to tailor the low-end response for



50 Hz bass in "mini" speaker systems. The circuit can be switched out for use with full-size speaker systems, too. It sells for \$159.95 and \$219.95 with the Minimus speakers shown, in Radio Shack stores nationwide and in Canada.


#### Stereophone

The Koss K/6A Stereophone offers the pleasures of private listening for those starting their interest in high fidelity. It features low-angle drivers which mini-



mize distortion, 10-16,000 Hz frequency response range, contoured earcushions, professional styling, and space-age durability. Suggested retail price of the K/6A is \$24.95. For more information, write to Koss Corporation, 4129 N. Port Washington Ave.. Milwaukee, WI 53212.

(Continued on page 14)

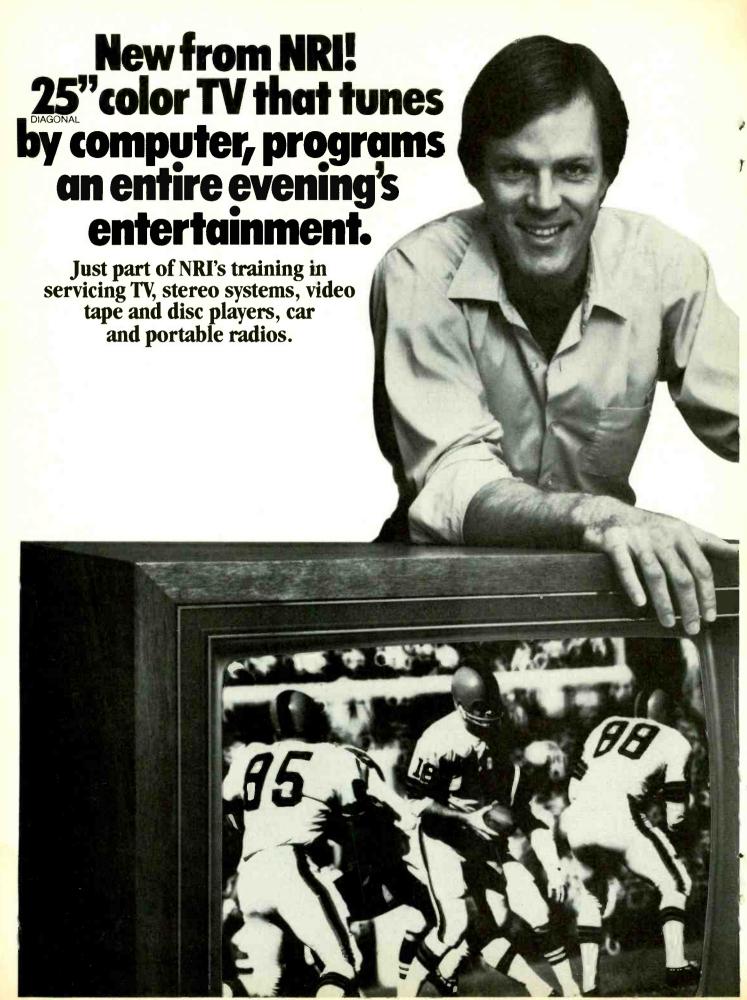

Only NRI home training prepares you so thoroughly for the next great leap forward in TV and audio...digital systems. Already, top-of-the-line TV's feature digital tuning, computer programming is appearing, and new digital audio recording equipment is about to go on the market.

NRI is the only home study school to give you the actual "hands-on" training you need to handle servicing problems on tomorrow's electronic equipment. Because only NRI includes this designed-for-learning, 25" diagonal color TV with electronic tuning, built-in digital clock, and computer programmer as part of your training. With this advanced feature, you can pre-program an entire evening's entertainment... even key lock it in to control children's viewing.

how digital tuning systems work, how
to adjust and service them. You work
with the same advanced features
used in the new programmable
TV's and video tape recorders. It's exclusive NRI
training that keeps you

As you assemble it, you learn

up with the leading edge of technology. **Exclusive** 

Designed-forlearning Concept The color

The color
TV you build
as part of NRI's
Master Course
looks, operates,
and performs like
the very finest commercial sets. But
behind that pretty
picture is a unique
designed-forlearning chassis...



the only such unit in the world. Rather than retrofit lessons to a hobby kit or an already-built commercial set, NRI instructor/engineers have designed this television so each step of construction is a learning experience.

As you build it, you perform meaningful experiments. You see what makes each circuit work, what it does, how it interacts with other circuits. You even introduce defects, troubleshoot and correct them as you would in actual practice. And you end up with a magnificent, big-picture TV with advanced features. One you can sell or use in your home.

#### Also Build Stereo, Test Instruments

That's just a start. You demonstrate basic principles and circuits on the unique NRI Discovery Lab,<sup>®</sup> then apply them as you assemble a fine AM/FM stereo receiver, complete with speakers. You also get practical experience as you build your own test instruments, including a 5" triggered sweep oscilloscope, CMOS digital frequency counter, color bar generator, and transistorized volt-ohm meter. Use them for learning, use them for earning as a full- or part-time TV, audio, and video systems technician.

### Complete, Effective Training Includes Video Systems

Using NRI's exclusive methods, you learn far more than TV servicing. You'll be prepared to work with stereo systems, car radios, record and tape players, transistor radios, short-wave receivers, PA systems, musical instrument amplifiers, electronic TV games, even video tape recorders and tape or disc

video players. Your training covers just about every kind of electronic entertainment equipment available now or in the near future.

And because NRI has unmatched experience gained in over 60 years and a million students worth of training, your course is designed for ease of learning and practical utility. You need no previous experience of any kind. Starting with the basics, exclusive "bite-size" lessons cover subjects thoroughly, clearly, and concisely. "Hands-on" experiments reinforce theory for better comprehension and retention. And your personal NRI instructor is always available for consultation, ready with explanations, answers, and advice.

#### Send for Free Detailed Catalog... No Salesman Will Call

Get all the facts on this exciting course and its potential for you by mailing the postage-paid card today. Our free 100-page catalog includes color photos of all kits and equipment, complete lesson plans, convenient time payment plans, and information on other electronics courses. You'll also find out about NRI's new Computer Technology



microcomputer. Or Complete Communications with 2-meter transceiver that gets you ready for opportunities in broadcasting, 2-way radio, microwave, and other growing fields. If card has been removed, write to:



NRI Schools McGraw-Hill Continuing Education Center 3939 Wisconsin Ave. Washington, D.C. 20016

#### The "mobile moonraker" by Avanti

### OUTPERFO

Outperforms all top. center, or base loaded antennas tested including K-40, A/S, Firestik, Hustler and Hy-Gain.

#### WE GUARANTEE IT!


Get the facts. See your Avanti dealer or write for details.

avanti<sup>®</sup> antennas

AVANTI RESEARCH and DEVELOPMENT, INC. 340 Stewart Avenue. Addison. IL 60101 • (312) 628-9350 IN CANADA: Lenbrook Industries. 1145 Bellamy Scarbo

ough, Onlario MIH IHS


give clearest reception!! Low S.W.R. across 40 channels!



Creators of the famous Moon-rakers • PDL II • Astro-plane • Astro Beam • Sigma II • Saturn • Astro Scan • Mobile Racers

CIRCLE 41 ON READER SERVICE COUPON

# Add-on Mini-Disc for the TRS-80



PERCOM DATA COMPANY, INC.

Requires 16K RAM. Level II BASIC and Expansion Interface.

Dept. EE · 318 Barnes · Garland, TX 75042 Phone: (214) 272-3421 To Order Call 1-800-527-1592

\*RADIO SHACK and TRS-80 are trademarks of Tandy Corporation which has no relationship to PERCOM DATA COMPANY, INC.


**CIRCLE 15 ON READER SERVICE COUPON** 

#### HEY, LOOK ME OVER

(Continued from page 9)

#### Power Pumper for Car

Added to the J.I.L. "Power Pumper" Line of high-powered car stereo units is the Model 633 AM-FM-MPX/Cassette unit which incorporates a special power boost switch that enables the unit to deliver a full 20-watts RMS per channel maximum, for big, home-stereo-like sound. The tuner section features an FET front end and a phase-lock-loop circuit in the multiplex for top broadcast reception and excellent FM-stereo separation. A Local/Distance switch and FM muting are also incorporated. Model 633 offers automatic reverse, push-button eject, locking rewind and fast forward, and tape direction indicator. Adjustable shafts simplify in-




CIRCLE 42 ON READER SERVICE COUPON

stallation. It's priced at \$244.95. For complete information. write J.I.L., Department P, 737 West Artesia Blvd., Compton, CA 90220.

#### S-100 Video Board

SSM (formerly Solid-State Music) has introduced the VB2, an I/O-controlled video interface board. The VB2 has its own keyboard input port, so there is no need for another I/O board for either keyboard or video display. The hardwafe-controlled cursor for line feed, carriage return, backspace, and clear-screen frees up valuable memory space. The display is 64 by 16, and features all upper case letters




CIRCLE 44 ON READER SERVICE COUPON

as well as numbers and symbols, and is switch-selectable for white-on-black or black-on-white. VB2 is available in kit form, priced at \$149.95. For further information contact SSM, 2116 Walsh Avenue, Santa Clara, CA 95050.

#### **Prototyping Board**

A new prototyping circuit board, bus and shape compatible with Altair and Imsai microcomputer boards, holds up to seventy 14- or 16-pin DIPS or any combination of DIP sockets with 0.3-, 0.4-, 0.6-, or 0.9-inch lead spacing. Designed by Vector Electronic Company as their "ANY DIP" Plugbord, the Model 8804 board's convenient power and ground-plane network makes it ideal for "homebrew" computers or custom-interface construction. The 5.3-inch by



CIRCLE 46 ON **READER SERVICE COUPON** 

10-inch by 0.062-inch board has 100 (50 each side) cardedge contacts on 0.125-inch centers to accommodate an S-100 bus organization. Two 100-hole rows of individual 0.1-inch spaced pads across the top of the board, permit additional input/output via ribbonwire assemblies. Inexpensive wrap posts may be fabricated by inserting Victor's T46-5-9 wrapped-wire pins into the holes. One corner of the 8804 may be used for a low-profile heat sink with two regulators in TO-220 packages. 8804 Plugbords are priced at \$21.95 singly, and \$19.76 each in quantities of five or more. Write to Vector Electronic Company, 12460 Gladsone Avenue, Sylmar, CA 91342, for further information.

(Continued on page 16)

### PROGRESSI RADIO-T.V. COURSE

Now Includes

- # 12 RECEIVERS # 3 TRANSMITTERS
- WAVE GENERATOR

- SIGNAL TRACER
  AMPLIFIER
  SIGNAL INJECTOR
  CODE OSCILLATOR
- ★ No Knowledge of Radio Necessary
- No Additional Parts or Tools Needed
- \* Solid State Circuits
- ★ Vacuum Tube Circuits

#### YOU DON'T HAVE TO SPEND HUNDREDS OF DOLLARS FOR A RADIO COURSE

The "Edu-Kit" offers you an outstanding PRACTICAL HOME RADIO COURSE at a rock-bottom price. Dur Kit is designed to train Radio & Electronics Technicians, making use of the most modern methods of home training. You will learn radio theory, construction practice and servicing. THIS IS A COMPLETE RADIO COURSE IN EVERY DETAIL. You will learn how to build radios, using regular schematics; how to wire and solden in a professional manner; how to service radios. You will work with the standard type of punched metal chassis as well as the latest development of Printed Circuit chassis. You will learn the basic principles of radio. You will construct, study and work with RF and AF amplifiers and oscillators detectors, rectifiers, test equipment. You will learn and Dractice code, using the Progressive Code Oscillator. You will learn and practice trouble-shooting, using the Progressive Signal Tracer, Progressive Signal Injector. Progressive Dynamic Radio & Electronics Tester, Square Wave Generator and the accompanymag Instructional material.

You will receive training for the Novice, Technician and General Classes of F.C.C. Radio Amateur Licenses. You will build Receiver, Transmitter, Square Wave Generator, Code Cscillator, Signal Tracer and Signal Injector circuits, and learn how to operate them. You will receive an excellent background for television, Mi-Fi and Electronics.

Absolutely no Drevious knowledge of radio or science is required. The "Edu-Kit" is the product of many years of teaching and engineering experience. The "Edu-Kit" will provide you with a basic education in Electronics and Radio, worth many times the low price you pay. The Signal Tracer alone is worth more than the price of the kit.

#### THE KIT FOR EVERYONE

You do not need the slightest background in radio or science. Whether you are interested in Radio & Electronics because you want an interesting hobby, a well paying susiness or a job with a future, you will find the "Edu-Kit" a worth-while investment. Many thousands of individuals of all

ages and backgrounds have successfully used the "Edu-Kit" in more than 79 countries of the world. The "Edu-Kit" has been carefully designed, step by step, so that you cannot make a mistake. The "Edu-Kit" allows you to teach yourself at your own rate. No instructor is necessary.

#### PROGRESSIVE TEACHING METHOD

The Progressive Radio "Edu-Kit" is the foremost educational radio kit in the world, and is universally accepted as the standard in the field of electronics training. The "Edu-Kit" uses the modern educational prinfelple of "Learn by Doing." Therefore you construct, earn schematics, study theory, practice trouble shooting—all in a closely integrated program designed to provide an easily-learned, thorough and electronics may read the "Edu-Kit" you then learn the "unction, theory and wiring of these parts. Then you build a simple radio. With this first set you will enjoy listening to regular hroadcast stations, learn theory, practice testing and trouble-shooting. Then you build a more advanced radio, earn more advanced theory and techniques. Gradually, in a progressive moner, and at your own rate, you will ind yourself constructing more advanced multi-tube radio circuits, and doing work like a professional Radio Technician.

Included in the "Edu-Kit" course are Receiver, Transmitter, Code Oscillator, Signal racer, Square Wave Generator and Signal Injector Circuits. These are not unprofessional wiring and soldering on metal chassis, plus the new method of radio construction known as "Printed Circuity." These circuits operate on your regular AC or DC house current.

THE "EDU-KIT" IS COMPLETE

You will receive all parts and instructions necessary to build twenty different radio and electronics cir-cults, each guaranteed to operate. Our Kits contain tubes. Uube sockets, variable, electrolytic, mica, ceramic and paper delectric condensers, resistors, tie strips, hardware, tubing, punched metal chassis, Instruction Manuals, hook-up wire, solder, selenium rectifiers, colls, volume controls, switches, solid state devices, etc.

In addition, you receive Printed Circuit materials, including Printed Circuit chassis, special tube sockets, hardware and instructions. You also receive a useful set of tools, a professional electric soldering iron, and a self-powered Dynamic Radio and Electronics Tester. The "Edu-Kiti" also includes Code Instructions and the Progressive Code Oscillator, in addition to F.C.C. Radio Amateur License training. You will also receive lessons for ervicing with the Progressive Signal Tracer and the Progressive Signal Injector, a High Fidelity Guide and a Quiz Book. You receive Membership in Radio-TV Club, Free Consultation Service, Certificate of Merit and Discount Privileges. You receive all parts, tools, instructions, etc. Everything is yours to keep.



Training Electronics Technicians Since 1946

#### FREE EXTRAS

#### • SET OF TOOLS

- SOLDERING IRON
- ELECTRONICS TESTER

- ELECTRONICS TESTER
  PLIERS-CUTTERS
  VALUABLE DISCOUNT CARD
  CERTIFICATE OF MERIT
  TESTER INSTRUCTION MANUAL
  HIGH FIDELITY GUIDE & QUIZZES
  TELEVISION BOOK & RADIO
  TROUBLE-SHOOTING BOOK
  MEMBERSHIP IN RADIO-TV CLUB:
  CONSULTATION SERVICE & FCC
  AMATEUR LICENSE TRAINING
  PRINTED, CIRCUITRY

#### SERVICING LESSONS

You will learn trouble-shooting and servicing in a progressive manner. You will practice repairs on the sets that you construct to the set that you construct to the set that you construct to the set that a set to the set

#### FROM OUR MAIL BAG

Ben Valerio. P. O. Box 21. Magna, Utah: "The Edu-kits are wonderful. Here I am sending you the questions and also the answers for them. I have been in Radio for the last seven years, but like to work with Radio Kits. and like to build Radio Testing Equipment. I enjoyed every minute I worked with the different kits: the Signal Tracer works tine. Also like to let you know that I feel proud of becoming a member of your Radio-Tv Club."

Nohert L. Shuff. 1534 Monroe Ave., Huntington, W. va.: "Thought I would drop you a few lines to say that I received my Edu-kit, and was really amazed that such a bargain can be had at such a low price. I have already started repairing radios and phonographs. My riends were really Surprised to see me get into the swing of it so quickly. The Trouble-shooting Tester that comes with the Kit is really swell, and finds the rouble. If there is any to be found."

#### **SOLID STATE**

Today an electronics technician or hobbylst re-quires a knowledge of solid state, as well as vacuum tube circultry. The "Edu-Kit" course teaches both. You will build vacuum tube, 100% solid state and combination ("hybrid") circults.

#### PRINTED CIRCUITRY

At no increase in price, the "Edu-Kit" wincludes Printed Circuitry. You build a Printed Circuit Signal Injector. a unique servicing instrument that can detect many Radio and TV troubles. This revolutionary new technique of radio construction is now becoming popular in commercial radio and TV sets.

becoming popular in the state of the sets.

A Printed Circuit is a special insulated chassis on which has been deposited a conducting material which takes the place of wiring. The various parts are merely plugged in and soldered to terminals.

Printed Circuitry is the basis of modern Automation Electronics. A knowledge of this subject is a necessity today for anyone interested in Electronics.

Progressive "Edu-Kits" Inc., 1189 Broadway. Dept 596-DJ Hewlett, N.Y. 11557

Please rush me free literature describing the Progressive Radio-TV Course with Edu-Kits. No Salesman will call.

NAME.....

ADDRESS....

CITY & STATE......ZIP. ...... PROGRESSIVE "EDU-KITS" INC.

Hewlett, N.Y. 11557 1189 Broadway, Dept. 596-DJ

CIRCLE 14 ON READER SERVICE COUPON

# The world of electronics gee-wizardry



#### -YOURS FREE.

32-pages of test instruments — from the latest digital multimeters to the famous EICO scopes. Security systems. Automotive and hobbyist products. Kits and assembled. EICO quality. EICO value. For FREE catalog, check reader service card or send 75¢ for first class mail.




108 New South Road Hicksville, N.Y. 11801

CIRCLE 2 ON READER SERVICE COUPON

Put Professional Knowledge and a

#### COLLEGE DEGREE

in your Electronics Career through



by correspondence, while continuing your present job. No commuting to class. Study at your own pace. Learn from complete and explicit lesson materials, with additional assistance from our home-study instructors. Advance as fast as you wish, but take all the time you need to master each topic.

The Grantham electronics degree program begins with basics, leads first to the A.S.E.T. degree, and then to the B.S.E.T. degree. Our *free* bulletin gives complete details of the program itself, the degrees awarded, the requirements for each degree, and how to enroll. (We are located at 2500 S. LaCienega Bl., Los Angeles, Calif.) Write to our mailing address shown below for *Bulletin G-79*.

#### Grantham College of Engineering P. O. Box 35499

Los Angeles, California 90035

Worldwide Career Training thru Home Study
16 CIRCLE 11 ON READER SERVICE COUPON

#### HEY, LOOK ME OVER

(Continued from page 14)

#### Oscilloscope Kit

A new, low-cost, DC-to-5 MHz Dual Trace Oscilloscope kit, the Heathkit 10-4205, features a vertical input sensitivity of 10 mV/cm, a stable triggering circuit for solid waveform displays, seven calibrated time bases from 200 mS/cm to 0.2  $\mu$ S/cm, a regulated vertical amplifier, and horizontal sweep circuit power supplies. Other 10-4205 features include a partial mu-metal shield, an extra-bright 5-inch flat-screen CRT, and a lightweight durable cabinet with flush-mounted handle for easy carrying and "stackability" with other instruments. All controls and




CIRCLE 1 ON READER SERVICE COUPON


inputs are front panel-mounted for simple, convenient operation. It sells for \$259.95 FOB Benton Harbor, MI. For more information on the new, low-cost IO-4205 Dual Trace Oscilloscope kit, send for the latest Heath-kit catalog. Write Heath Company, Department 570-130, Benton Harbor MI 49022.

#### 2-Meter Yagi Antennas

Two models of the new Star Tracker series of Hustler 2-meter yagi antennas are 5 and 11-element rotatable beam antennas. They are completely tuneable, from 144-148 MHz with an unique adjustable matching system for 1.5:1 or better SWR. At resonance, SWR is typically 1.1:1. This system provides for optimum energy transfer without sacrificing gain or pattern control Each model can be easily mounted for vertical or horizontal polarization for station-to-station VHF DX work. The Star Tracker



CIRCLE 43 ON READER SERVICE COUPON



Model ST-5 is a compact, 54-inch, 2-meter beam with 5 optimumly-spaced elements. Forward gain is greater than 10 dB and the front-to-back ratio is greater than 22 dB over the antenna's 4 MHz bandwidth. Half-power beamwidth is normally 50°. The Model ST-11 Star

Tracker is a 144-inch center-mounted 11element beam. Optimum element spacing provides a forward gain of greater than 13 dB. Front-to-back ratio is greater than 27 dB over the 4 MHz bandwidth. Halfpower beamwidth is normally 36°. Hustler furnishes all stainless steel hardware and the corrosion-resistant steel clamps. There are no mounting holes in the elements or boom, thus providing extra strength. The suggested list price of the Model ST-5 is \$39.95. The Model ST-11 is \$59.95. For further information on these or any Hustler products, write to New-Tronics Corporation, 15800 Commerce Park Drive, Brookpark, OH 44142.

#### Hand-Held CB

A 40-channel, hand-held CB transceiver, the Dyna-Com 40, made by Lafayette Radio, is a full-powered unit, priced at \$149.99. The Lafayette Dyna-Com 40 incorporates full five-watt input at the final amplifier with an LED (light emitting diode) channel indicator, and digital Phase Lock Loop (PLL) circuitry. Other features are a full-time "range boost" circuit that concentrates more audio power into the sidebands for greater transmission range, squelch control, automatic gain control, automatic noise



CIRCLE 45 ON READER SERVICE COUPON

limiter, S/RF power meter, battery condition indicator, and an external microphone input jack. Lafayette Radio Electronics Corp. sells nationwide through 140 company-owned stores, an extensive direct-mail operation and nearly 300 associate stores and authorized dealers.

#### What You See is What You Get

Sparkomatic's new car stereo graphic equalizer/booster amplifier enables the traveller to "see" the amplifier response shaped by the various tone controls on the unit. The AcoustaTrac GE-500 pro-



#### CIRCLE 50 ON READER SERVICE COUPON

duces a visual response curve on an illuminated screen which graphically shows how the amplifier performs, in order to create the most acceptable sound for individual listening tastes. As the controls of the GE-500 are moved to

adjust for tone, an illuminated flexible rod changes its shape in conformance with the control movement. The GE-500 contains integrated circuitry for maximum reliability, wide frequency response, and 40 (20 + 20) watts of undistorted RMS stereo power. Other features include slide controls that infinitely adjust five different frequency bands, a frontto-rear fader control, a power indicator light, and an audio by-pass switch. The unit can be used with all tape decks and radios and with all speakers that have a power handling capability of 15 watts or greater. Suggested retail price is \$89.95. Get all the facts direct from the Sparkomatic Corp., Milford, PA 18337.

#### **On-the-Road Convenience**

Courier has added a new mobile AM/SSB transceiver to their line. The Courier Galaxy is a straight-forward under-dash unit with features designed with the operator in mind. It has controls for noise blanker, SWR calibration, clarifier, mic and RF gain and PA capability. The Galaxy also has a large LED channel indicator and a three-in-one SWR, calibration, and S/RF meter. One popular feature is a channel 9 priority switch that




CIRCLE 78 ON READER SERVICE COUPON

allows selection of channel 9 without tuning the dial. Its suggested retail price is \$279.95. For more information write to Fanon/Courier Corporation, 990 South Fair Oaks Avenue, Pasadena, CA 91105.

TRS AM/SSB BASE

This handsome looking AM/SSB base station transceiver from TRS is a full-function CB with a complete set of controls. The TRS Challenger Model 1400 has separate S and SWR meters, digital channel indicator, and a built-in digital clock/timer. The 1400 also features RF gain control, switchable noise blanker, adjustable squelch, ANL, Delta tuning and tone control. According to TRS the Model 1400 puts out 4 watts RMS




CIRCLE 79 ON READER SERVICE COUPON

on AM and 12 watts PEP on SSB. The modulation is limited to 100 percent and spurious and harmonic suppression is —60 dB. The manufacturer claims an AM sensitivity of 0.7 uV and an SSB sensitivity of 0.3 uV. It operates on 117 VAC. Retails for \$599.95. For more information write to TRS Marketing Inc., 137 East Savarona Way, Carson, CA 90746.

#### **CB/VHF Marine Antenna**

Antenna Specialists' new ASM-107 dual band VHF/CB marine antenna is now in limited production. The ASM-107 is a



CIRCLE 80 ON READER SERVICE COUPON

17-foot fiber-glass whip capable of simultaneous high performance on both VHF (156-163 MHz) and CB (all 40 channels). What makes it possible is an electronic isolation coupler which separates the signals and feeds the two transceivers. The advantages of the ASM-107 are extra safety and the convenience of two separate two-way radio systems aboard without the work, hassle, and cost of drilling extra holes, mounting extra hardware, running an extra coax cable, and buying two antennas. Sells for \$149.95. For more details on the ASM-107 and the complete A/S marine products line, contact The Antenna Specialists Co., 12435 Euclid Avenue, Cleveland, OH 44106.

#### Organized Sound

Shakespeare Marine Electronics has a deck hailer, called the Shakespeare Sound Center, that is designed to co-



CIRCLE 81 ON READER SERVICE COUPON

ordinate all on-board communications functions, including high power audio talking and listening from stem to stern, intercom, manual or automatic fog horn sounding and, with optional component connections, an alarm system for bilge leaks, engine fires, or unauthorized entry. It is constructed of corrosion protected aluminum and transistorized electronic parts, with a molded high-impact front panel and vinyl-clad aluminum casing. The Sound Center permits the boat's crew to project and amplify voices to hail people on-board or on passing vessels, docks or bridges. In the listen mode, it

can amplify conversations, buoys or noises from nearby craft. Sells for \$199.50. Get all the details direct from Shakespeare Marine Electronics, 229 N.W. 14th St., Miami, Florida 33125.

#### 20 MHz Triggered Scope

The Leader LBO-507, a 20 MHz triggered scope is designed for broad use in industry, hobby, laboratory and service. The LBO-507 offers automatic triggered circuitry to assure maximum display stability with minimal adjustments as well as a trigger sensitivity over the entire operational range. It



CIRCLE 72 ON READER SERVICE COUPON

provides convenience of pushbutton switch selection for every functional demand; 10 mV/cm vertical sensitivity calibrated in 11 steps—in a 1-2-5 sequence up to 50 V/cm with variance control; and a 17.5 nanosecond rise time. Bandwidth is DC to 20 MHz. Sweep speed for the LBO-507 is 0.5 uSec/cm, 18 steps in a 1-2-5 sequence up to 500 mS/cm with variable control. The LBO-complete with low capacitance probe and terminal adapter. Get the complete specs 507 is priced at less than \$500 and is direct from Leader by writing to Leader Instruments Corp., 151 Dupont St., Plainview, NY 11803.

#### 3½ Digit DVOM

The new 3½ digit Model 3300 digital VOM just introduced by the Triplett Corp. features an extra-visible .3-in. high digital LED readout display with Polarity Indica-



CIRCLE 71 ON READER SERVICE COUPON

tion, .5% accuracy and low-power ohms readings. The five function, 22 range Model 3300 offers complete portability with precision measurement capability.


### **BIG SCREEN COLOR TV!**

Convert any portable color TV! TV not included.

Can be built in a few spare hours. No special tools or electronic skills required. SAVE \$15 ON ALL PACKAGE ORDERS!

LIFESCREEN III

LIFESCREEN III projection system gives you all the enjoyment and excitement of the \$4000 systems. Our new injection molded Tron-Ex tens (F/1.9) produces an amazing image that is over 3 times brighter than most nationally marketed big-screen TVS—including Sony. And the Tron-Ex delivers sharper tocus to the screen edge for better overall clarity. Our light-enhancing Extron LS-50 screen is 6 times brighter than most movie screens, because the molded parabolic contour rejects extraneous light, concentrating a directionally selective TV image for clear. colorful viewing. The LIFESCREEN III plans provide exact dimensions to fit the 13" Toshiba (model C389), but they can be modified to fit most 12" to 19" portables. Pre-constructed LIFESCREEN III lens housings available TVs. Order the components catalog below. COMPLETE PACKAGE \$319



NEW! TRON-EX F/1.9 LENS

featured in November

Popular Science.



#### LIFESCREEN II

The self-contained projection system (12 to 19") requires only 2 x 4 feet of floor space . . . fits neatly against any wall and lends its beauty to the decor of any room, includes Tron-Ex F/1.9 iens, Extron LS-50 screen, two front surface mirrors, and building plans for

COMPLETE PACKAGE \$369

LIFESCHEEN!
The original Independent projection
system from Extron. Works with the
Sharp 13" model 13A29 color TV or
Sony 15" model KV1541R color TV. Can be used with any size screen. The LIFESCREEN I includes our new Tron-Ex F/1.9 lens, one front surface mirror building plans for cabinet, and the LS-50 screen, 32" x 40"/50" diagonal.

LIFESCREENI

COMPLETE PACKAGE \$339

EXTRON BUARANTEES EVERYTHING: the professional quality, accuracy of description and availability of components described in this ad. After building your LIESCREER PROLECTION SYSTEM, if you are not satisfied for any reason, return all components to EXTRON for instant return.

LARGER SCREENS FOR THE LIFESCREEN I AND LIFESCREEN III SYSTEMS CAN BE ORDERED FROM OUR CATALOG.

Please send me the items checked below:	
ONE COMPLETE SET OF LIFESCREEN IPLANS	
ONE COMPLETE SET OF LIFESCREEN II PLANS	
ONE COMPLETE SET OF LIFESCREEN III PLANS	Name _
COMPLETE LIFESCREEN I PACKAGE	Address
COMPLETE LIFESCREEN II PACKAGE	City
COMPLETE LIFESCREEN III PACKAGE \$319.00	
EXTRON COMPONENTS CATALOG . (Applicable toward any purchase) \$1.00	CARD NA
All prices F.O.B. factory—Cal. residents add 6% sales tax	CARD NU
TOTAL \$	SIGNATU

EXTRON LIFESCREEN PROJECTION SYSTEMS 8833 Sunset Boulevard Suite 202 West Hollywood, CA 90069 State Zia MBER

CIRCLE 9 ON READER SERVICE COUPON



Don Lancaster's "Cheap Video" concept allows almost unlimited options, including:

- \* Scrolling. Full performance cursor.
- Line/Character formats of 16/32, 24/80, 32/64 .... or almost anything.
- \* Graphics-up to 256 X 256 B&W 96 X 128 COLOR (requires low-cost option modules)
- \* Works with 6502, 6800 and other micros

SPECIAL OFFER: Buy the Kit (upper case alpha numeric option included) & get the Book at 1/2 price.

	ELECTRONICS 1020 W. WILSHIRE BLVO. OKLAHOMA CITY. OK 73116
ı	I'm Sold, PLEASE RUSH () SEND FREE CATALOG
	() TVT-658 Kit & Cheap Video Cookbook - \$42.95 enclosed () TVT-658 Kit only (book required for assembly)-\$39.95
	name:address:

ELECTRONICS , DEPT. 5-E ,1020 W. WILSHIRE BLVD. OKLAHOMA CITY. DK 73116 CIRCLE 28 ON READER SERVICE COUPON

\_\_ zip: \_

\_ state: \_\_\_

FREE SUITE CATALOG Audio—Computers

Instruments

Kits & Assembled



Southwest Technical Products Corporation 219 W. RHAPSODY SAN ANTONIO, TEXAS 78216

HEY, LOOK ME OVER

The new DVOM sells for only \$175.00, complete with long life Ni-Cad batteries and AC Adaptor Charger plus test probes with safety boots. The Triplett Model 3300 is a safety-conscious design with no exposed metal parts and it includes a high energy 2A/600 V fuse for ample overload protection. A fused probe provides for both high energy and normal use circuit protection. Over-range is indicated by a blinking display and a low battery warning is included. DC polarity is automatic with indication directly on the readout display. Full details on the new Model 3300 DVOM and its complete line of accessories may be obtained at leading electronic distributors, or write to Triplett Corporation, Bluffton, OH 45817 or call (419) 358-5015.

#### 50 MHz Logic Probe

Dynascan's new B&K-Precision logic probe is capable of measurements from DC to 50 MHz. The new probe, Model DP-50, is a multi-family device that is compatible with TTL, DTL, RTL, HTL, CMOS, MOS, and high-noise immunity logic (HiNIL). Three bright LED indicators display pulse presence and high



and low logic states. The DP-50 will continue to indicate pulse presence through its maximum frequency of 50 MHz. For high-speed or intermittent pulses, the DP-50 offers a memory mode to "freeze" and store the pulse display. In the pulse mode, short duration pulses "stretched" for a clear visual indication. Input impedance is 2 megohms in all modes. The DP-50 is overload protected and will withstand ±50 VDC at the input. Reverse polarity protection for the power leads is also 50 volts. Sells for \$50.00. For additional information, contact B&K-Precision, 6460 W. Cortland St., Chicago, IL 60635.

#### Two Meters in a Fist

The YAESU amateur radio hand-held transceiver, Model FT-202R, provides 1watt performance in a lightweight, completely portable package on 2-meter FM. With the flexibility of six crystal:controlled channels (three installed), the unit may be powered with eight nicad size AA cells, or seven alkaline dry batteries, to provide 1 watt output. Options include external speaker / microphone, battery charger, and leather carrying case. The FT-202R comes with the "Rubber Ducky" antenna, dummy battery, vinyl carrying case and shoulder strap, and sells for \$199.00. Bat-

(Continued on page 87)

# "HOT" NEW BOOKS FOR MICRO-COMPUTER PROS!

The latest in micro-computer books that people waited in line to buy!

Now available by mail for the first time.



#### How to Buy & Use Minicomputers & Microcomputers

By W. Barden, Jr.

Explores the basics; covers hardware, software, peripheral devices, programming languages & techniques; use for fun or profit! 240 pgs. #21351 ... \$9.95

#### Microcomputer Primer

By M. Waite & M. Pardee

Explains it all: central processing unit, memory, input/output interfaces, programs. Discusses well-known models & shows how to program your own. 224 pgs. #21404 . . . \$7.95

#### **Basic Primer**

By M. Waite & M. Pardee

Covers BASIC fundamentals, program control, organization, functions & variations. With a game program & data on numbering systems & ASCII character codes. 192 pgs. #21586...\$8.95

#### **How to Program Microcomputers**

By W. Barden, Jr.

Examines assembly-language programming of 8080, MC6800 & MCS6502 models. Explains concepts, operation & architecture. With precanned operations. 256 pgs. #21459...\$8.95

#### Fundamentals of Digital Computers (2nd Ed.)

By D. Spencer

Explains computers, programming, hardware, BASIC, FORTRAN & COBOL languages, acvanced concepts & computer center operation. 320 pgs. #21534...\$9.95.

#### The 8080# Bugbook\*: Microcomputer Interfacing and Programming

By Rony, Larsen & Titus

Emphasizes the computer as a controller. Covers principals & 4 basic tasks of computer interfacing. BUGBOOK® is a registered trademark of E&L Instruments, Inc., Derby, Conn. 06418. 416 pgs. #21447...\$10.50

#### DBUG: An 8080 Interpretive Debugger

By C. Titus & J. Titus

How to use DBUG (a software debugging package) to develop & test programs. With documented hexadecimal & octal listings. 112 pgs. #21536...\$4.95

#### Introductory Experiments in Digital Electronics and 8080A Microcomputer Programming and Interfacing

By Rony, Larsen & Titus

Covers basic gates thru microcomputer interrupts, with hardware & software examples. Experiments re: breadboarding, circuits, etc. over 416 pgs. each. Book 1: #21550 ... \$12.95. Book 2: #21551 ... \$10.95. Both: #21552 ... \$20.95

#### NCR Data Communications Concepts By NCR Corp.

Explores concepts, techniques & limitations of data communications: telephone-based & others. 208 pgs. #21548 . . . \$6.95

#### NCR Data Processing Concepts Course

By NCR Corp.

Intro to data processing, computers & digital logic. Covers input/output devices, memories, control. 256 pgs. #21547...\$7.95

#### Understanding CMOS Integrated Circuits (2nd Ed.)

By R. Melen & H. Garland

Begins with basic digital ICs; covers semiconductor physics, CMOS fabrication technology & design, & advanced CMOS applications. 144 pgs. #21598...\$5.95

#### Transistor-Transistor Logic (2nd Ed.) By G. Flynn

Discusses digital logic & different types of logic circuits used in the TTL functional class. With block diagrams, schematics, logic truth tables. 288 pgs. #21572,...\$6.95

SAVE 10% when you order 3 or more!

Examine any book(s) at NO RISK for 15 Days!

### Clip Out-Mail Today!

YES-Please	cond	mo	tho	bookle	\ Indi-
cated below. If					
may return any					
for full credit or	refun	d. Ac	dd sa	ales tax	where
applicable.		2153	4		21552

- ☐ 21351 ☐ 21447 ☐ 21548 ☐ 21404 ☐ 21536 ☐ 21547 ☐ 21586 ☐ 21550 ☐ 21598 ☐ 21459 ☐ 21551 ☐ 21572
  - I have checked 3 or more titles and deducted my 10% savings.

Name (Please Print)

Address

State Zip Code

Total: \$

☐ Check ☐ Money Order ☐ Master Charge

☐ Visa/BankAmericard

Exp. Date\_\_\_\_\_

Account No.: \_\_\_\_\_

(Master Charge only)

> MAIL TO: Howard W. Sams & Co., Inc. 4300 W. 62nd St.

Indianapolis, IN 46206

Prices subject to change 6 months after issue date

MO53

### See The Newest In Quality Electronics You



Custom Car Accessories like the Heathkit GC-1406 Digital Quartz Car Clock shown, or It's companion car clock with trip timer and stopwatch functions for the rally enthusiast, are easy and fun to build. And you have the quality and dependability in custom car accessories you can show-off with pride. Now you can choose one of these fine car clocks, a windshield wiper delay, a deluxe mobile siren and P.A. system, an ultrasonic intrusion alarm, an electronic speed control or a cabto-camper intercomm — all in money-saving kit form you can build, service and install yourself.

A Super-Accurate Digital.
Alarm. The ideal choice for a
'first kit'—with snooze feature, AM and PM Indicator,
12 or 24 hr. format and pleasant green-blue digital display. Budget priced, tool



A Doorbell That Plays Your Favorite Tune! A fun way to greet guests with any 16note tune you program — and you can even add remote speakers!

Low-Cost Home Security with this Heathkit GD-600 Photoelectric Lamp Switch. Turns your lamp on at dusk — off at daylight, for that 'lived-in' look when you're away from home.

Super Coinshooter! The GD-1190 is Heath's finest metal locator with adjustable discrimination and push-button tuning that rejects junk and finds coins.

For Treasure Hunters!

The Heathkit GD-348 finds buried metal objects with it's sophisticated "Induction-balance" system. The tone from the built-in speaker grows louder as you pinpoint your find — or you can use the front panel meter or optional headphones.



Learn To Service and Maintain Your Car's Electrical System with this newest Heathkit Automotive Electrical Continuing Education Program. Think of the money you'll save when you really understand how your car's electrical system works and how you can service It. This 4-part self-tearning program takes you through electrical principles, starting and charging systems and accessories and body electrical... all at your own pace and at lowest cost.


Learn How To Use Electronic Test Instruments with this new Heathkit self-learning program. A progressive 4-part program using Heath's famous programmed instruction with audio and visual aids for maximum efficiency. Learn to use electronic meters, oscilloscopes, frequency generators and special measuring instruments.

Radio Control Gear You Can Depend On!
From the leader in R/C development. See this new 8-channel, open gimbal transmitter with Heath's instant plugin frequency change feature...all Heath firstst...plus sensational savings on complete systems and R/C Starter Sets.



Build Your Own Custom Stereo And Get Heath Quality Plus System Savings! Choose from Heath's complete line of quality audio products for the kind of custom sound reproduction you want...from the newest and finest professional rack-mounted components to a full range of super-value components including: receivers, tuners, ampliflers, pre-amps., custom control systems, speakers, and name-brand turntables and cartridges—all available individually at low catalog prices or at money-saving system discounts.





Choose from the nearly 400 quality Heathkit products for home or business, including the world's finest values in amateur radio equipment, complete personal computing systems and educational programs

Every Heathkit product is backed by world-famous technical service and counsel-plus sales and service facilities for 54 Heathkit Electronic Centers\* coast-to-coast (\*units of Schlumberger Products Corporation).

See the white pages of your phone directory.

Can Build Yourself...All In This Big

See and read about the most exciting electronic products around - all in easy-to-build, money-saving kit form - from Heath; world leader in kit electronics. From the first computerized personal weather station to the first computerized color TV you can program for an entire evening's viewing, Heath leads the way in sophisticated, quality electronics. And every Heathkit product comes with their worldfamous step-by-step instruction manual that makes for your Heathkit catalog today and choose from nearly 4C0 fully illustrated and described kits that will give you the pride and satisfaction of saying, "I built it myself!"



MEATHATT MAIL ORDER CATALOG NO. 844

**SEND FOR YOUR FREE COPY TODAY!** 

Building Heathkit products is a great family affair. There's nothing better for family fun and education...and you always end up with top-quality equipment at low kit prices.

> ...all in this FREE CATALOGget yours now!

If card or coupon is missing, write: Heath Company, Dept. 139-530 Benton Harbor, Michigan 49022

HEATH Schlumberger	Heath Company, Dept. 139-530 Benton Harbor, Michigan 49022
Please send me your catalogs.	my FREE Heathkit Catalog. I am not now receiving
Name	
Address	
City	State
CL-690	Zip



Hi-Fi/Stereo BUYERS' GUIDE gives you the absolute tops in number of equipment test reports per issue.



If you're a "best-buy" buyer, don't miss a single issue!

Mail this coupon to: Hi-Fi/Stereo BUYERS' GUIDE Box 1855 GPO New York, NY 10001

SAVE \$2.97 off regular subscription rate, \$5.12 off newsstand rate.

(outside U.S.A., possessions send \$4.00)
Name.
Address
City
State. Zip.
CREDIT CARD OWNERS
You may use Master Charge or Visa card. ☐ 18 issues for \$8.94
Canada, other countries [] 18 Issues \$12.00.
Credit Card #

EXPIRATION DATE\_\_\_\_\_\_SIGNATURE\_\_\_\_\_

H9D022

# DX central reporting

A world of SWL info!

BY DON JENSEN

ADIO MOSCOW IS TRYING to cover all the bases in its attempt to increase its English-speaking audiences, especially those right here in North America.

Faithful and diligent SWLs have, no doubt, already noted that it is now possible to hear English programs from Radio Moscow around the clock, thanks to the new World Service, instituted last fall to fill around the former evening services to North America.

The expanded World Service, in direct competition with the British Broadcasting Corp. and the Voice of America, has a heavy emphasis on news and current events.

It is said the expansion was made possible by the addition of two dozen half-million-watt shortwave transmitters. However, reliable sources indicate that these high powered monsters really have been on line for a number of years. Supposedly the first of the French-built Thomson-CSF transmitters was heard as far back as mid-1974.

One Million Watts? And I wouldn't be too surprised to find the Russians are hooking up pairs of these high wattage units in tandem to sock out a million watts per!

Closer to home, though, it will be possible to hear Radio Moscow English programs on your favorite hometown AM radio station!

American stations are being offered the opportunity to broadcast, via tape recordings, honest-to-goodness Radio Moscow English programs.

Gheli A. Shakhov, editor-in-chief of Radio Moscow, in a letter to U.S. radio stations, offered to provide free tapes of some of the better known—to SWLs at least—programs and featurettes of good ol' R.M.

These include the familiar "Moscow Mailbag" program, the 15-minute show featuring the pudgy and personable Joe Adamov and his answers to listeners' letters. Another program offered is Vladimir Pozner's views on domestic and foreign policy, "Moscow Meridian." Other shows known to DXers featuring USSR folkmusic and focuses on Russian science and the arts are also in the free package.

Though the offering is said to be without cost to the stations, Shakov made it clear that after airing the tapes, the stations are expected to return them to Radio Moscow.

Detente Tuning. In concluding, Editor Shakov expressed his wishes for "fruitful cooperation between your radio station and Radio Moscow."

According to United Press International, at least one AM station in Illinois, WSDR in Sterling accepted the program offer.

If other stations across the U.S. follow suit, R.M. Will have managed to expand its program audiences to far more than SWLs.

AWR Expanding. Many shortwave listeners are familiar with the programs of Adventist World Radio, the voice of the Seventh-day Adventist church. Since 1950, AWR programs have been aired, during purchased time, by the transmitting facilities of the Sri Lanka Broadcasting Corp., Sri Lanka, of course, is the former Ceylon, the large island off the southern tip of India.

And since 1971, AWR programs have been broadcast, under a similar arrangement by the German-owned shortwave facility called Radio Trans

Europe at Sines, Portugal.

Now, however, Adventist World Radio is expanding its operations with its own facilities in Guatemala. The project began last August and shortwave, medium wave and FM transmitters were expected to be operational this year. The AM-FM outlets may already be on the air, with the shortwave transmitter in Guatemala, planned for "international outreach," to be on the air by mid-year.

An even more ambitious AWR project was approved at the Seventh-day Adventist annual council in Washington, D.C., last October. That program, to begin also in 1979, though probably not to be completed this year, calls for four shortwave transmitters to be located at a site in Liberia, West Africa.

The AWR international transmitters will be one of 250 kilowatts, two of 100 kilowatts and a single 50,000 watt SW unit. A medium wave station will serve local Liberian audiences.

DX Programs. Ambrosio Wang An-Po, DX editor of Radio Exterior de Espana in Madrid, Spain, whom a number of North American DXers had the opportunity to meet at the Association of North American Radio Clubs (ANARC) convention sponsored by Radio Canada International in Montreal last summer, recently announced an expanded DX program.

Radio Exterior de Espana's DX programs from Madrid will include, he notes, announcements about the most important news of other stations with DX programs, such as changes in times and frequencies, new services, contests and meetings or anniversaries.

The station's DX program in English is, at this writing, aired every Sunday, 2115 to 2130 GMT, and is repeated an hour later, on 6,100, 7,275, 9,505 and

### BEARCAT. SCANNERS ANNOUNCE AMERICA'S ONLY 50-CHANNEL, MICRO PROCESSOR CONTROLLED SCANNER. IT SEARCHES, STORES, REMEMBERS AND ALL BUT THINKS FOR YOU.

The new *Bearcat* 250. An unbelievable advancement in no-crystal scanning.

Bearcat's new, 250 is fully synthesized for punch-in programming. It searches, stores, and recalls every bit of programming, on a vast, 50-channel spectrum.

Automatically.
Unbelievable? Read and believe.

#### CRYSTAL-LESS. Micro processor

Micro processor controlled. Brings in every local frequency, automatically, without a crystal

50 CHANNELS. Scans up to 50 channels in banks of 10 each. Scans any combination of banks at the touch of a button.

SEARCH/STORE. Seeks out and

SEARCH/STORE. Seeks out and stores up to 64 active local public service frequencies automatically.

SEARCH/RECALL. Retrieves stored frequencies for simple entry into scan program.

PRIORITY CHANNEL. Samples a designated priority frequency on channel 1 every two seconds.

DIGITAL CLOCK, A genuine, LED quartz crystal digital clock. Shows hours, minutes, seconds.

5-BAND COVERAGE. Low, high, UHF, UHF-T. Plus 2 meter amateur ham band, and other UHF frequencies.

COUNT. Transmissions on each frequency counted automatically to determine which are most active. SCAN/SEARCH LOCKOUT. A unique feature. Not only locks out channels while scanning, it also eliminates unwanted frequencies while searching.

MUCH MORE!

Selective Scan Delay.
Direct Channel
Selection. Scan Speed
Control. Automatic Squelch.
Track Tuning Circuitry. FrontMounted Speaker. Decimal
Display. Quality Construction.
AC/DC. UL listed. FCC-Certified

THE INCREDIBLE, NEW BEARCAT® 250 SCANNER.

LEADING THE WAY TO REAL EXCITEMENT.


Copyright 1978, Masco Corporation of Indiana

CIRCLE 30 ON READER SERVICE COUPON

#### Portable Miniscopes for Electronic Professionals on the Go!!!

The standout oscilloscope development of the decade!!!

Now-single & dual trace models. Compare the performance, then compare the price.





MS-15

\$318

MS-215

\$435

- 15-megahertz bandwidth. Accuracy—3% full scale.
- Internal, line or external trigger.
   Batteries and charger/transformer unit included. 

  Graticule: 4 x 5 divisions, each division 0.25". • Weight: Less than · 3 lbs with batteries. ● Size: 2.9" H x 6.4" W x 8.0" D.

NLS products are available from Nationwide Electronic Distributors. Send for our brochure today!



#### Non-Linear Systems, Inc.


Originator of the digital voltmeter.

Box N, Del Mar, California 92014 Telephone (714) 755-1134

**CIRCLE 34 ON READER SERVICE COUPON** 

### for the Experimenter!

INTERNATIONAL CRYSTALS and KITS



**OF-1 OSCILLATOR** 

\$448

The OF-1 oscillator is a resistor/capacitor circuit providing oscillation over a range of frequen-

10 North Lee Oklahoma City. Oklahoma 73102

cies by inserting the desired crystal. 2 to 22 MHz, OF-1 LO, Cat. No. 035108. 18 to 60 MHz, OF-1 HI, Cat. No. 035109. Specify when ordering.

Cat. No. 031300

3 to 20 MHz - For use in OF-1L OSC

Specify when ordering 031310

.02% Calibration Tolerance

**EXPERIMENTER** 

**CRYSTALS** 

(HC 6/U Holder)

20 to 60 MHz — For use in OF-1H OSC Specify when ordering.

**Specifications** 

MXX-1 Transistor RF Mixer 3 to 20 MHz, Cat. No. 035105 20 to 170 MHz, Cat. No. 035106 \$5.80 ea. SAX-1 Transistor RF Amp 3 to 20 MHz, Cat. No. 035102 20 to 170 MHz Cat. No. 035103 BAX-1 Broadband Amp 20 Hz to 150 MHz Cat. No. 035107

\$5.80 ea.

International Crystal Mfg. Co., Inc.

Enclose payment with order (no C O D ). Shipping and postage (inside U S. Canada and Mexico only) will be prepaid by International Prices quoted for U.S. Canada and Mexico orders only. Orders for ent to other countries will be quoted on re Price subject to change. Address orders to

M S Dept PO Box 32497 Oklahoma City Oklahoma 73132 WRITE FOR BROCHURE

CIRCLE 13 ON READER SERVICE COUPON

The American Heart Association (1)



WE'RE FIGHTING FOR YOUR LIFE

#### DX CENTRAL

11,840 kHz.

June in Minneapolis. The mention of the bang-up 1978 convention of the Association of North American Radio Clubs in Montreal last summer reminded me to remind you readers that the '79 gathering of listeners from across the continent is scheduled for the weekend of June 22-24 in Minneapolis,

This convention will be hosted by the Minnesota DX Club in cooperation with the Department of Speech-Communication of the U of Minnesota.


Kim Andrew Elliott, convention chairman, has indicated among the special events planned is a special ANARC television program, Saturday, June 23, at the Minneapolis campus of the U. of Minnesota.

For details, drop a note to ANARC Executive Secretary Dave Browne, care of Association of North American Radio Clubs, 557 North Madison Avenue, Pasadena, CA 91101. Be sure to include a stamped, self-addressed envelope so Dave can send you the data on how to register for the ANARC '79 Convention.

Down the Dial. (Times in GMT, frequencies in kHz) . . . 610-National Broadcasting Service, the voice of Trinidad and Tobago, in the West Indies, upped its transmitter power from 10 kilowatts to 50 kilowatts. Some east coast broadcast band listeners have reported improved reception, as a result, prior to sign off at 0400 . . . 4,720-The Spanish-speaking station you may log here late at night has been fooling some SWLs for a long time. The reason is that it doesn't belong here at all. It is a harmonic (the 8th multiple, to be exact) of the medium wave outlet of La Voz de Cuba which operates on 590 kHz . . . 5,055-Costa Rica in Central America is one Latin country that many SWLs are hunting for. Try the outlet of Faro del Caribe, which translates as the Lighthouse of the Caribbean, TIFC, a religious station. You will find it in English prior to its 0400 sign off . . . 9,620-Radio Yugoslavia is not the most commonly heard of the many European shortwave stations. But you can hear it broadcasting in English at 2200 . . . 11,642-Looking for Radio Pakistan? Try this frequency at 1815 for English programming . . . 17,800 -The Voice of Chile has been reported here at 0115 with political commentaries in English. (Credits: Bob Foxworth, NY; Ernest Behr, ONT.; Wade Smith, MA; Richard McVicar, ONT.; Dean White, IL; National Radio Club, Membership Center, P.O. Box 118, Poquonock, CT 06064; North American SW Association, P.O. Box 13, Liberty, IN 47353)



### Meet Super Grip II, the great new test clip from A P Products.



New narrow-nose design makes it easy to attach on high-density boards. And now you can test ICs with only .040" between opposing legs.

New "duck bill" contacts are flat, - won't roll off iC leads.


Open-nose construction enables probe at iC leg.

Pin rows are offset for easy attachment of probes.

Contacts are gold-plated phosphorbronze. "Contact comb" construction separates contacts with precision. No shorts.

Heavy-duty, industrial-grade springs for firm contact pressure—and a good grip when pulling ICs. They'll keep their spring indefinitely. No intermittents.

Steel pivot pin. Engineering-grade thermoplastic body moided around contact pins. Made to lasti



New button-head pins keep probes from sliding off. (Straight pin models for logical connections.)

The new A P Super Grip II is, without question, the best way there is to trouble-shoot DIP Cs.

You get positive contacts. No intermittents, No shorts, Ever,

So it's endlessly useful to you—and it's

bullt to stay useful indefinitely.
Try one. You'll find 8, 14, 16, 16 LSI, 18, 20,



AP PRODUCTS INCORPORATED

Box 110C • 72 Corwin Drive Painesville, Ohio 44077 Tel. 216/354-2101 TWX: 810-425-2250 22, 24, 28, 36 and 40-pin models at your nearby A P store. (Make sure It's your A P store.)

Need the address? Call (toll-free) 800-321-9668. And ask for our complete A P catalog, The Faster and Easier Book

Faster and Easier is what we're all about.

go backpacking . . . go trailering . . . go fishing . . . go relaxing . . . go adventuring . . . but

#### don't go outdoors again without CAMPING JOURNAL

—the =1 family outdoor recreation magazine!



It's more than that. It's the #1 passport to America's favorite recreation . . . and the whole wonderful world of outdoor fun for you and your family.

Discover for yourself new and exciting places that get you away from day-to-day routine. CAMPING JOURNAL is crammed like an overstuffed backpack with ideas for more camping FUN. What to do. Where to find it. What kind of gear to get and how to keep it working right.

A great magazine. Your kind. When you're reading CAMPING JOURNAL you soon realize we're staffed with stone-hard camping fanatics. See for yourself how much we can add to your favorite leisure-time activity!

CAMPING	JOURNAL,		
Box 2620.	Greenwich.	CT	06835

☐ Send me	9	issues	for	ONLY	\$6.	95
☐ I encl	ose	\$6.95	[	Bill	me	\$6.95
(Outside	U.S	.A. and	pos	sessio	ns,	\$8.48


Name	
Address	
City	
State	Zip
Please allow 6 to 8	weeks for delivery of first copy.

### newscan

**Electronics in the News!** 

#### Ceramic Braid

In steel and glass plant furnaces and aboard America's new space shuttle, the Enterprise, a new material is solving many heretofore hard-to-handle heat problems—protecting vital cables, wires, meshes, tubes and hoses in high temperature environments. And a World War II uniform company is fabricating the product.



In addition to protecting materials against temperatures up to 2,600 degrees F for extended periods of time, SF2600, braided ceramic sleeving offers short term protection up to 3,000 degrees F. The sleeving retains its strength at elevated temperatures.

This "space age" insulating material, 3M Ceramic Fibers, is being fabricated in the form of protective sleeving by Santa Fe Textiles, Inc., Santa Ana, California. Specific applications for this new insulation, which Santa Fe calls SF2600, include protecting cables from open flames and shielding thermocouple wires as they measure the heat in ovens. In addition, the sleeves protect hoses from molten metals in steel plants, guard fire control systems, insulate furnace components to cut down on heat loss and serve as the sleeving over wire mesh for gaskets on the Enterprise.

In the home, braided ceramic sleeving can be used as a gasket around the doors of self-cleaning ovens. This material also is being used to insulate heaters, hair dryers, coffee makers and other home appliances.

#### Adding Memory With a Laser

A new approach to storing data in computers, using a tunable dye laser, is described in a U.S. Patent awarded to scientists at IBM's San Jose Research Laboratory. Based on a photochemical process called "hole burning," the technique greatly increases the amount of information that can be packed into a

given space.

In the system described by the patent, each unit (called a "bit") of computer data is identified by its location in the frequency spectrum as well as by its location in two- or three-dimensional space. Potentially, many hundreds or even thousands of the "frequency coded" bits could be stored at a single, microscopically small region in space. The size of these regions could be as small as the "diffraction limit" of a laser beam, a dimension in the order of one micrometer (1/25,000 of an inch).

The invention depends on the use of a laser that can be tuned—like adjusting the station selector on a radio—so that it emits light of various colors.



IBM research scientists have invented a new approach to storing computer data that uses a variable-color laser beam to induce chemical changes in selected molecules of a storage material. By changing the frequency of the laser light, it becomes possible to select many hundreds or thousands of different molecular groups from the same sample of storage material. Each molecular group can be associated with a unit of computer data. This technique, called "photochemical hole-burning," offers the potential for storing data at much higher densities than can be achieved with other storage technologies known today. In the photograph, inventors (from left) Dietrich Haarer, George Castro and Roger Macfarlane are shown adjusting an apparatus that projects the light from a laser onto a sample of a photoreactive material.

Work on the new storage technique is still at a very early stage of research. "We have a long way to go before this can be made into a technology," says Dr. George Castro, manager of the IBM San Jose laboratory's physical science department. "So far we are investigating a variety of potential storage materials and trying to understand the temperature limitations of the phenomena. We still have to address the many unsolved problems that have prevented other optical methods of storage from becoming technologies. In fact, optical methods of storing information were expected to lose an important advantage, namely that of high storage density, as the storage densities in the existing magnetic recording technologies approach optical limits in the next decade. Hole burning breathes new life into optical storage by theoretically extending that density a few orders of magnitude."



# Quartz-Lock by Realistic.

 $\pm 0.0005\%$  Speed Accuracy.

Don't buy any turntable before you see the new direct-drive Realistic® LAB-500. It's already switched many an audiophile to Radio Shack's

22-year-old Realistic brand. The specs tell you why.

Speed

accuracy of  $\pm 0.0005\%$  just 1.5 seconds after start-up, wow and flutter of 0.025%, rumble of

only  $-70 \, dB \, (DIN \, B)$ . This kind of performance is superior to some broadcast and disco equipment, and is made possible by a massive 12-5/8", 3.1-lb. platter resting directly atop a 12-pole brushless DC servomotor controlled by a quartz oscillator and PLL circuitry. But there's still more to recommend the LAB-500. Like all

Realistic turntables, the price includes dust cover and cartridge. And the cartridge is our best, made by Shure,

factory mounted in an integrated headshell for minimum mass and precision tracking even at 3/4 gram. Audio response is a linear 20-20,000 Hz. The automatic arm-return is tripped optoelectronically—assuring no change in record speed even at the end of the disc. Out-front controls, including electronically actuated cueing, make operation easy.

There are single-play/repeat and anti-skate controls, too.

All this, including the \$49.95 value cartridge and hinged cover and low-profile walnut vinyl base, for 259.95\* By Realistic. Sold only at Radio Shack!

\* Retail price may vary at individual stores and dealers





OOKMARK BY BOOKWORM

For Project Builders. A Beginner's Guide to Making Electronic Gudgets by R. H. Warring is a new project-by-project selftraining course in modern electronic circuits and devices. It has a thorough introduction to the fundamentals, lots of easyreading build-it instructions, and plenty of detailed circuit diagrams! The book explores every modern circuit type and device, and then shows how to use the information learned to create more complicated and sophisticated circuits. Step-by-step instructions, backed up by circuit diagrams containing parts values, show how to build a wide range of devices using all the latest semiconductors and miniature components like transistors, resistors, FETs, capacitors, etc. You can build circuits like audio oscillators, transistor radio boosters, DC ampli-



Learn electronics through construction projects.

Soft cover 140 pages \$4.95

**CIRCLE 55 ON READER** SERVICE COUPON

fiers, stroboscopes, tuned amplifiers, band stop filters, RF and IF amplifiers. Hartley oscillators, telephone amplifiers, light-operated oscillators and output stages. Published by Tab Books. Blue Ridge Summit, PA 17214

Audio Builder's Guide, Now, with the over 100 projects contained in The ABC Book of Hi-Fi/Audio Projects by George Leon, anyone can boost the capability and performance of any hi-fi/audio system-or build a complete system from scratch if preferred. Each project is accompanied by a complete schematic wiring diagram and a detailed parts list. Many have PC board layouts ready for photo pickup. In this learnas-you-build volume, the reader will find out how to design his own circuits, how to create new audio power supplies, how to build amplifiers, how to use timer circuits. how to make mockups of chassis layouts and control panel designs, how to construct



Do-It-Yourself Hi-Fi construction projects.

Soft cover 182 pages \$4.95

**CIRCLE 55 ON READER** SERVICE COUPON

enclosures, how to make mixer circuits, how to make printed circuit boards, how to build preamplifiers, how to modify and futurize his system in hundreds of ways. And one doesn't have to be an electronics whiz kid either-even a beginner can follow these simplified instructions and explanationsand then customize to his heart's content! Published by Tab Books, Blue Ridge Summit, PA 17214.

Optofun. Optoelectronics-the world of light, lasers, lenses and sicence-fiction devices-a world that's completely unfolded in



Optoelectronics in an illuminating package

Soft cover 238 pages \$5.95

CIRCLE 55 ON READER SERVICE COUPON

a practical new book, project by project, in as plain a prose as one can find anywhere! The book is Build-It Book of Optoelectronic Projects by C. K. Adams. Step-bystep instructions and clear explanations tell how to build everything from a digital tachometer to a two-level logic probe to a garage nightlight. The reader learns by building optoelectronics packages loaded with goodies like LEDs. LCDs. displays, photodetectors, optoisolators, and photodiodes. Every project comes with complete parts lists, and pin data (every IC is listed by type number and detailed in separate package diagrams calling out every pin function), detailed circuit descriptions, fast-reading reviews of pertinent concepts, circuit options, and can be used in project after project. Published by Tab Books, Blue Ridge Sumit, PA 17214.

Getting the Data Out. NCR Data Communications Concepts, an introduction to the principles, characteristics, and testing of




Data transmission for the Computer Hobbyist.

Soft cover 220 pages \$6.95

CIRCLE 60 ON READER SERVICE COUPON

data transmission circuits, has been added to the Bugbook Reference Series. Edited by Titus, Titus, Larsen, and Rony, the text contains practical and useful information for electronic data processing technicians, communications engineering students, and computer hobbyists. The book concentrates on the properties and limitations of real transmission performance. The book discusses filters, equalizers, and other corrective devices from the user's point of view, and explains the use and testing of modems and other terminal equipment. ASCII codes and detailed guides to interpretation of communications circuit specifications are presented. Review questions stressing key concepts are included. Published by E&L Instruments, Inc., 61 First St., Derby, CT

# FUIT

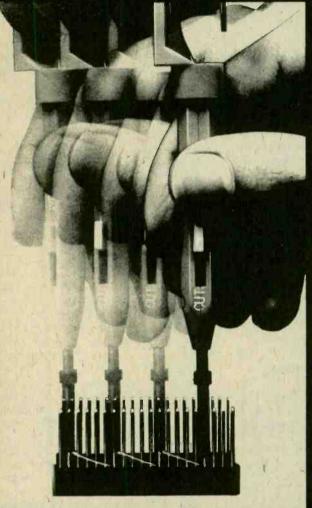

WHY CUT? WHY STRIP? WHY SLIT?

WHY NOT...

# JUST WRAP

• AWG 30 Wire

• .025" Square Posts

• Daisy Chain or Point To Point

 No Stripping or Slitting Required ....JUST WRAP ™....


Built In Cut Off

• Easy Loading of Wire

 Available Wire Colors: Blue, White, Red & Yellow U S A FOREIGN PATENTS PENDING

\$1495





DA SY CHAIN

POINT TO POINT



OK MACHINE & TOOL CORPORATION 3455 CONNER ST. BRONX, N.Y. 10475 (212) 994-6600/TELEX 125091
\*MINIMUM BILLING \$25.00 / ADD SHIPPING CHARGE \$2.00 / NEW YORK CITY / STATE RESIDENTS ADD APPLICABLE TAX.

#### **Extend your listening** distance with FINCO'S new Highest gain **AUTO FM AMPLIFIER**



stereo I

FINCO'S self contained top of the line Auto FM Amplifier with variable gain control

- Increases Signal up to 16 Times
- Will Not Overload in Strong, Signal Areas
- Provides Crisp, Clear FM Reception
- Switch for FM and AM Reception
- No Adverse Effect on AM Reception
- Extends FM Reception Range
- L.E.D. Indicator Light
- Linear Potentiometer Gain Control
- SOLID State Dual MOSFET Circuitry



Write for Catalog - No. 20-852, Dept.EL-56

THE FINNEY COMPANY

34 West Interstate Street, Bedford, Ohio 44146 (216) 232-6161 INCO, the Champion of all Electronic Independent Service!

**CIRCLE 31 ON READER SERVICE COUPON** 



Big opportunities. Big profits. Earn quickly. Full or part time. Learn at home, it's easy. Do real jobs: All Tools-Materials Supplied. Accredited member NHSC. Lic. State of NJ-

Locksmithing Institute, Dept. 1472-059
Div. Technical Home Study Schools.

Little Falls, N. J. 07424

# Don't Smoke

WRITE MCGEE'S **BIG SPEAKER CATALOG** 

1001 BARGAINS IN

SPEAKERS - PARTS -TUBES - HIGH FIDELITY COMPONENTS - RECORD CHANGERS Tape Recorders—Kits—Everything in Electronics 1901 McGee Street, Kansas City, Missouri 64108


HI-FI REPURIS ITS HI-FI REPORTS HI-FI PORTS HI-FI REPORTS HI-FI RL PORTS HI-FI REPORTS HI-FI REPO REPORTS HI-FI REPORTS HI-FI REPOR FIREPORTS HI-FI REPORTS HI-FI REPORT

REPORTS HI-FI REPORTS HI-FI REPORT PORTS HI-FI REPORTS HI-FI REP PORTS HI-FI REPORTS HI-FI'P ORTS HI-FI REPORTS H 41-FI REPORTS

A pair of performers that can keep in step with the demands of disco. By Gordon Sell

WITH THE BOOMING POPULARITY OF disco dancing, disco music and disco parties many people are converting basements and spare rooms into discos, complete with flashing lights and high-power audio systems. The nationwide popularity of disco was recently brought home to me in a letter from a reader in Eugene, Oregon. He and a friend had rented a large old house together and wanted to use the giant living room for disco parties. They were trying to find a system that was high powered, yet rugged and easy to use in the often confused environment of a party.

In such a situation you need the power to drive four speakers at high



Realistic STA-2100

CIRCLE 32 ON READER SERVICE COUPON

levels-at least an 80-plus watt-perchannel (that's only 40 watts per channel with four speakers) receiver or power amp in order to avoid clipping at disco sound levels. Another consideration is more mechanical. Turntables are very sensitive to vibration, so try to put your system on something solid. A shakey or hollow cabinet can pick up vibrations that will give a turntable fits. Try to isolate it from the floor.

It was with these types of situations in mind that I chose the two units for lab testing in this issue. The Realistic STA-2100 is a real, earth shaking AM/ FM receiver that pumps out 120+ watts, and Kenwood's KD-5070 automatic record player is specifically designed to minimize the effects of external shock and vibration.

Realistic STA-2100. This receiver is conservatively FTC-rated at 120 watts per channel RMS into 8 ohms but when we cranked it up to take-off power (clipping level) on the test bench it went to 135 watts without batting an LED. At this power the frequency response is flat (+0/-1) dB) from 20 to 20,000 Hz, with distortion (THD) no higher than 0.12 percent; just right for a disco.

The STA-2100 has plenty of nice features for the audiophile: dual phonograph inputs, one of which is adjustable for sensitivity; inputs for two tape systems and outputs for four speakers. There are level adjust controls for bass, midband and treble. The bass level is switch selectable for turnover frequencies of 150 Hz or 300 Hz, and the treble turnover frequencies can be selected at 3,000 or 6,000 Hz. It's almost like having a built-in five-band equalizer. The FM de-emphasis is adjustable for Dolby and non-Dolby signal sources.

The FM tuner features excellent selectivity and relatively broad 'center' tuning. The signal-to-noise ratio measures 73 dB. The high fidelity sensitivity on mono is 9 µV (60 dB quieting) while the stereo sensitivity is 80 µV (55 dB quieting). Full limiting is attained with 3.4 µV. At standard test level the stereo frequency response with 75 μSec de-emphasis measures +0.2/ -1.2 dB from 20 to 15,000 Hz. With 25  $\mu$ Sec de-emphasis it is +0.3/-0.5from 20 to 20,000 Hz. The AM tuner performance is about average for a receiver in this price range. In the amplifier section the stereo separation is 55 dB and the magnetic input hum and noise measures -63 dB.

Almost everyone who has listened to the STA-2100 is impressed with the clean sound in the midrange. All in all this receiver is an excellent buy for any hi-fi buff at \$599.95.

Kenwood KD-5070. With this turntable the old adage 'steady as a rock' is more than just a figure of speech. The base is made from a composite of chunks of limestone, limestone powder, glass powder and polyester resin. This is compression-molded into marble-like



material that attenuates vibrations in the turntable base. The shock and vibration resistance is considerably su-(Continued on page 87)

# you be bribed?

You get a \$35.21 bribe when you try only 10 DAK ML90 high energy cassettes for only \$2.19 each!

Hats off to Maxell. Their UDXL cassette established a new standard of quality for all cassettes.

The new DAK ML90 starts another new technology. A technology of extreme reliability and protection from Hi frequency losses.

Later we are going to offer you a valuable bribe, if you will test these cassettes, risk free; so read on!

YOUR TIME IS PRECIOUS Imagine yourself just finishing recording the second side of a 90 minute cassette and horrors, the cassette jams. Tape is wound around the capstan, your recorder may be damaged and you've just wasted 90 minutes of your time and perhaps lost a great recording off FM.

I'm sure this is one experience we all dread, and is one of the main reasons to buy name branded guaranteed tape you can trust.

Enter DAK. We manufacture over one million units of cassette tape each month, and many of our cassettes are used for high speed duplication, which causes more cassettes to fail than any other use.

When we first started, DAK's cassettes failed just like many others. So we installed over \$20,000 worth of high speed duplication equipment at our factory and set out to design the perfect cassette.

#### FAILURE

Failure after failure. We substituted, remace, tested and retested the over 20 parts of our cassette, and checked everyone elses cassettes. Finally after over 6 years we positively linked cassette failure or the prevention of failure to the slip sheets, or liners in the

We were not alone. Scotch, TDK, and several others must have been doing the same research because they have also been coming out with special improved slip sheets.

#### MOLYSULFIDE

A rew chemical named molysulfide, that reduces friction within the cassette several times better than graphite gave us success.

We developed polyester slip sheets with raised spring loaded ridges coated with a unique formulation of molysulfide and graphite.

The tape ran more smoothly than ever before within the cassette. The new formulation is also much tougher than the graph te formulation, so it is extremely resistant to wear.

Static electricity within the cassette was drastically reduced by the low friction, and easily bled off, so its tendency to erase very high frequencies was drastically reduced. A very important consideration for often played tapes.

The molysulfide formulation gives both superior electrical and mechanical performance, thus it has formed the ELEMENTARY ELECTRONICS/May-June 1979 basis for the birth of the new DAK ML cassette.

#### MAXELL IS BETTER

Yes honestly, if you own a \$1000 cassette deck like a Nakamici, the frequency response of Maxell UDXL is superior to DAK and you just might be able to hear the difference.

DAK ML has a frequency response that is flat from 40cps to 14,500cps ±3db. Virtually all cassette recorders priced under \$600 are flat from 40cps to about 12,000cps, so we have over 2000cps to spare, and you'll probably never know the difference.

No apology We feel that we have equalled or exceeded the mechanical reliability of virtually all cassettes and offer one of the best frequency responses in the industry. Maxell UDXL is truly the Rolls Royce of the industry, and DAK is the 100% US made Cadillac or Corvette!

Price DAK manufactures the tape we sell, you avoid paying distributor and retailer mark ups. While Maxell UDXL 90s may sell for \$3.50 to \$4.50 each, DAK ML90s sell factory direct to you for only \$2.19 each.

#### YOU WIN

You are paying less for the 10 90 minute cassettes than you would pay for the bribes we are offering if you went to a Radio Shack Store.



### CHECK THE VALUE OF THE BRIBES AT RADIO SHACK Think of it, 10 six foot hook up cords

with RCA plugs at each end. Whether you use the cords now, or when you buy new equipment, those of us who are tape recorder nuts, never seem to have enough. Radio Shack sells six foot cords for \$1.89 each.

You will find dozens of uses for this deluxe battery eliminator AC adaptor around your home or office. 4 voltages, 3, 4.5, 6 and 9 volts. 4 plugs will fit virtually any calculator, radio, or battery operated recorder we have seen. You'll save a lot of money on batteries. Radio Shack sells a similar 4 voltage adaptor for \$9.95.

HIGH ENERGY ML 90

10 free 6 ft. RCA to RCA hook up cords

The deluxe 12oz can of spray head cleaner will clean your tape heads for years to come. The handy snorkel included, can reach just about any tape head, even 8trk heads. Radio Shack does not sell a large 12oz can, but 12oz from them costs \$6.36.

The Radio Shack prices are not list prices, but the actual prices you would pay when you walk in the door.



#### WE WIN TOO

Customers like you are very valuable in the form of future business. We anticipate receiving over 6000 orders and 4500 repeat customers from this advertisement. We are betting you will buy our cassettes again, and we are putting our money where our mouth is!

TRY DAK ML90 FREE We want you to try these high energy cassettes on your own recorder without obligation for 30 days. If you aren't 100% satisfied for any reason, simply return the tapes and bribes to DAK for a full refund.

To order your 10 DAK ML90 minute high energy cassettes and receive your \$35.21 bribe with your credit card, simply call toll free 800, 423-2636, (in Calif. call 213-984-1559) or send your check for \$21.90 plus \$3 for postage and handling for each group of 10 cassettes and bribes to DAK. (Calif. residents add

6% sales tax).

DAK unconditionally guarantees all DAK cassettes for one year against any defects in material or workmanship.

Why not order an extra group of 10 DAK ML90 cassettes for yourself or a friend? We will add one free ML90 cassette fo reach additional 10 you buy and of course you get all 3 bribes with each group of 10 tapes.



Call TOLL-FREE (800) 423-2636 In California Call (213) 984-1559 10845 Vanowen St., North Hollywood, CA 91605

# Test semiconductors without testing your patience.

The real value of using a semiconductor tester should be time savings. B&K-PRECISION semiconductor testers are designed for maximum speed and reliability to save you more time than any other testers.

B&K-PRECISION semiconductor testers are proved as highly cost effective answers to

the needs of testing discrete semiconductor devices. Recently, they were evaluated by America's best known manufacturer of expensive test instruments and the \$310 Model 530 compared favorably with a \$30,000 custom test system! B&K-PRECISION has a model for most every application.



The B&K-PRECISION Model 530 is one of the most versatile semiconductor testers available and can actually perform more tests on more devices than any instrument in its price class. Features include: Exclusive patented  $f_{\tau}$  measurement circuit...Non-destructive breakdown voltage testing...Automatic lead and polarity identification, in- or out-of circuit... Measurement of beta and gm...Aural and visual test indications...Testing of new power FET's. CSA listed. \$310

For value, the Model 520B industrial semiconductor tester is tough to beat. Dynapeak® circuitry with high/low drive allows the 520B to work in-circuit where others won't... A complete test takes about 9 seconds ...Identifies all leads of transistors and SCR's and polarity...CSA-listed version available..."Good device" indicated visually and aurally. \$175

At only \$97, the Model 510 offers Dynapeak® test method reliability with pocket-size portability...LED test result indicators...Tests all types of transistors, FET's and SCR's...Digital stability never needs calibration...Complete with case and leads. \$97

When applications demand analysis of the characteristic curves of semiconductor devices, the B&K-PRECISION Model 501A is the cost-effective answer ... Displays characteristic curves for all semiconductor devices on most any scope... Non-destructive breakdown voltage tests... Simulates actual operating conditions...Internal calibration source... Current limiting protects device under test. \$198

Start testing semiconductors faster now. See your local distributor for immediate delivery.



6460 W. Cortland Avenue, Chicago, IL 60635 312/889-9087

In Canada: Atlas Electronics, Ontario • International Sales: Empire Exporters, Inc., 270 Newtown Road, Plainview, Ll., NY 11803


two ears are the norm. The two-eared arrangement does more than allow listening to your mother-in-law and wife at the same time. Thanks to some special neural circuitry (which, among other things, performs phase and magnitude comparisons between left and right ear signals) a two-eared individual can quite accurately tell where a sound is coming from. You know how marvelously well the present system works, but think of the possibilities afforded by a third ear.

Wait a second now, no one is advocating surgery as a hobby (à la Frankenstein). The *Third Ear* in this instance is a versatile, electronic, sound-actuated control system. It can spy on your friends, mind the phone, babysit, thwart would-be burglars and much more. Later on, the *Third Ear's* applications will be explored in detail, but first let's examine its circuit.

The Circuit. The heart (better yet, the eardrum) of the Third Ear is a tiny module, the ETCO S-210U sound trigger. This little device originally formed the rervous system of an electronic turtle. The species is now extinct, unfortunately, but its innards are available as a great surplus bargain. As you can see from the schematic, the S-210U contains a crystal microphone, a transistor amplifier, and an SCR. The module's black lead goes to the minus side of a battery, while the red and green leads will be shorted together in this application. The shorted leads connect to one side of a low-resistance load (like a relay), and the opposite end of the load goes to battery positive. Sound picked up by the microphone is amplified by the transistor and fed to the SCR's gate. If the sound is sufficien:ly loud, the SCR latches in a conducting state, thus drawing a relatively large current through the connected load. Power must be removed in order to turn off the device again.

A more versatile system should operate in either of two modes, latch or pulse After the first triggering impulse of sound, the latch-mode system remains active. A pulse-mode system, on the other hand, remains active only for some pre-determined time interval after triggering. It then returns to its inactive state, where it rests until re-triggering occurs. Then, the process repeats itself.

Construction. Adding pulse-mode capability to the S-210U is a simple matter. All it takes is some auxiliary circu try to sense the latching of the SCR and to unlatch it again after a user-selected time delay. Unlatching an SCR can be accomplished by opening

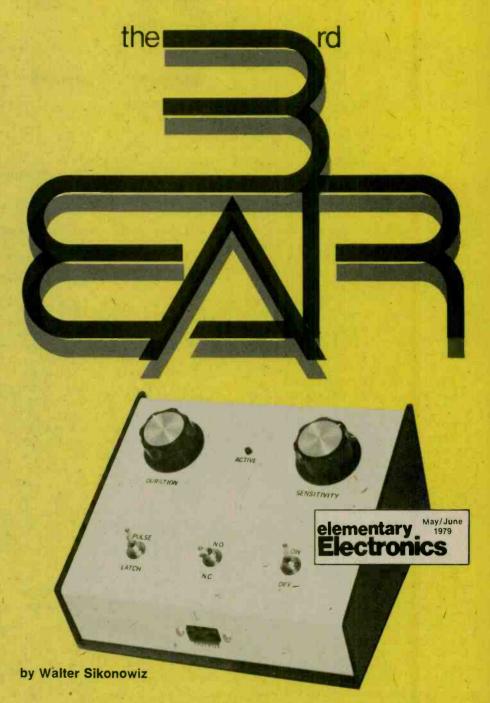

#### This electronic servant will jump at the snap of your fingers

a switch in series with the anode or closing a switch to short the anode and cathode together. The latter method is the one used in the Third Ear, but before getting any further into that, there are a few easy modifications that must first be made to the S-210U.

The pictorial diagram shows the four necessary modifications in detail. First, remove the 5000-ohm trimmer by unsoldering it. This device is unusual in that it has two mounting pins, not three. Wire a 2500-ohm potentiometer in series with a 680-ohm resistor so that the net resistance is a minimum

(680 ohms) when the pot is fully clockwise. The two wires from the pot/resistor combination should be soldered into the holes vacated by the 5000-ohm trimmer. This new pot will function as the Third Ear's sensitivity control (with maximum sensitivity in the clockwise position).

The second modification requires that the 0.1-uF disc capacitor in the upper left-hand corner of the S-210U be unsoldered. In the holes vacated by the capacitor, install and solder a jumper of bare, solid hookup wire.

The third step is to cut the red wire

### THE THIRD EAR

in the lower lefthand corner completely off at the point where it joins the PC board.


Finally, unsolder the 32-uF electrolytic capacitor from the board, and replace it with a similar unit having a higher working voltage; 16 VDC or higher. In general, your replacement may have a value anywhere between 22 and 47-uF, with 33-uF being about optimum. Remember that since you are dealing with electrolytic devices, the orientation must be correct. In the pictorial you can see that capacitor positive (+) must be pointing upward.

Now, let's see how the modified S-210U mates with the rest of the circuitry in our Third Ear. As the schematic diagram shows, the green and black leads of the module are its only connections to the external circuitry. Capacitor C2 bypasses the module's supply leads in order to keep the sensitivity high, while R1 isolates C2 to reduce its effects on the performance of the rest of the circuit. Whenever the module's SCR latches into conduction (due to sonic triggering), current will be drawn through relay K1 and the LED1/R2 combination. As a result, the normally open relay contacts will close, and the LED will light simultaneously. These two conditions will persist as long as the SCR remains latched.

Note how switch S3 selects either the normally open (N.O.) or normally closed (N.C.) contacts of K1. This allows a load to be turned on or off, respectively, when the circuit is activated. Diode D1, connected across K1's coil, is normally reverse-biased (not conducting). When the SCR is forced to unlatch, however, K1's coil generates an inductive kickback voltage which could cause trouble if D1 were not there to clip it.

In order to see how unlatching is accomplished, let's assume that the SCR in the module is initially unlatched, and that mode switch S2 is closed in its "pulse" position. Since the SCR is not conducting, the voltage at the green lead of the module must be high (about 7 volts above ground). This potential drives sufficient through R3, D2 and D3 into the base of transistor Q2 to ensure that Q2's collector is conducting current heavily. This prevents the voltage on C3 from rising, and nothing of interest happens.

Suppose, however, that a sound triggers the module into conduction. The

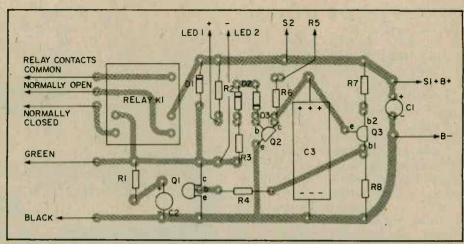


This is the component-side view of the main printed circuit board. The foil pattern is on the reverse side. If your K1 relay has mounting tabs you may have to make some holes.


potential of the green lead drops to less than one volt, which is less than the 2-volt minimum needed to turn on the D2/D3/Q2 combination. Consequently, Q2's collector no longer conducts current, and the potential across capacitor C3 rises as charging occurs through R5 and R6. The rate of ascent is controlled by potentiometer R5; higher resistance causes the potential on C3 to climb more. Eventually, the voltage on C3 will reach a critical level. at which point unijunction transistor Q3's emitter-to-base 1 impedance will break down to a very low level. This rapidly discharges C3 and causes the appearance of a voltage spike across resistor R8.

This voltage spike drives current through R4 into the base of transistor Q1. As a result, Q1's collector conducts current heavily, thus shorting the module's green and black leads together. This deprives the SCR of anode current, causing it to unlatch. Because the voltage spike lasts only a brief instant, less than 0.1 second, Q1 soon loses base drive and ceases to conduct. When this happens, current can no longer activate K1 or LED1, and both will remain off until another sound triggers the module. As you can see, the circuit has returned to the state it was in at the beginning of this discussion.

If mode switch S2 had been opened to its "latch" position, no current would have been able to flow through R5 and R6 to charge C3. Since the charging of C3 is an essential part of the unlatching process, it is clear that the module would have remained latched indefinitely. In fact, in the latch mode, the only way to reset the circuit to its inactive state is by opening power switch S1 for at least five seconds.

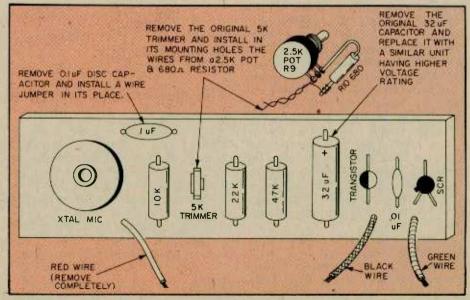

This pictorial diagram shows all the modifications that are needed on the S-210U module. The 32 uF capacitor should be replaced by one with a 16-VDC or higher voltage capacity.

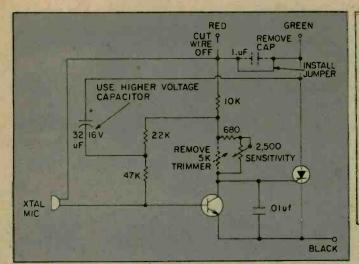

The above schematic shows the circuit of the S-210U. The module can be obtained from the company listed in the parts list.

This gives the various capacitors time to discharge completely, thus ensuring that the circuit will be inactive when SI is again closed. Similarly, should you wish to manually unlatch the

RELAY KI

SU-210

MODULE

CRYSTAL

MICROPHONE

This shows internal arrangement of The Third Ear. Note how the S-210U crystal microphone is mounted over the hole in the front panel of the case. Using a large, factory built case such

as the one shown here makes assembly of a project like this

a snap. The batteries mount in the other half of the cabinet.

ACTIVE


module in the pulse mode before the time delay elapses, the same procedure applies.

DURATION

In the prototype's pulse mode, duration control R5 was able to produce


time delays between 9 and 130 seconds. The actual control range obtained in your model is likely to be somewhat different because of variations in the characteristics of Q3 and C3. Fur-

SENSITIVITY

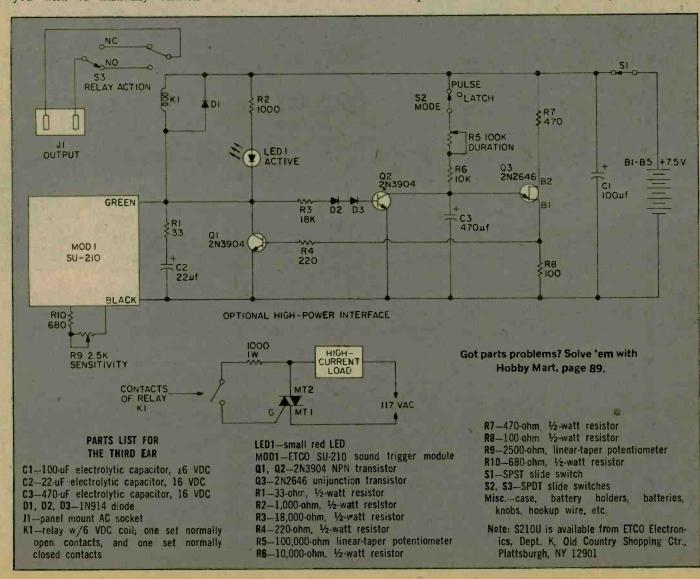

### Train with NTS for the

# MicroComputers, digital the first name

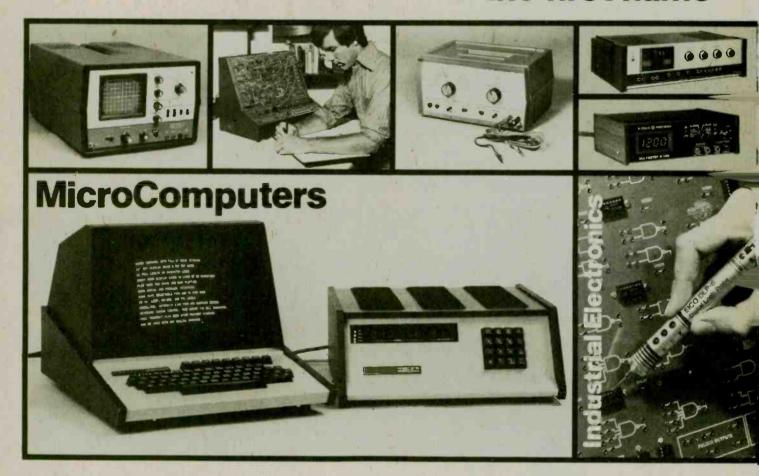

The world of electronics is daily becoming more challenging. Technology is growing more specialized, and the importance of digital systems increases every day. Test instruments, home entertainment units and industrial control systems are all going digital. And now, NTS training programs include a wider choice of solid-state and digital equipment than ever before offered in any home study course:

Advanced NTS/Heath digital color TV (25" diagonal with optional programming capability), NTS/Heath microcomputer, digital test equipment, digital stereo receiver (70 watts per channel), NTS compu-trainer, plus much more state-of-the-art equipment to make your training exciting and relevant.


The equipment you receive with NTS training programs is selected to provide you with a solid

background in electronic systems. Kits and lessons are designed to work together to demonstrate electronic principles and applications. The kit-building not only shows you how electronic hardware functions, but how various circuit designs accomplish different purposes. Your lessons guide you through any number of experiments associated with many projects. This is the Project-Method, and it works. Step-by-step, you learn how and why digital electronics has become a part of our world, and the even bigger role it is sure to play in the future.

Whether you are looking for training in Consumer, Commercial, or Industrial electronics, NTS offers fourteen courses, some basic, many advanced, in several areas of electronics. An all-new full-color NTS catalog shows you what each course covers,

### electronics of the future.

systems and more...from in home study.

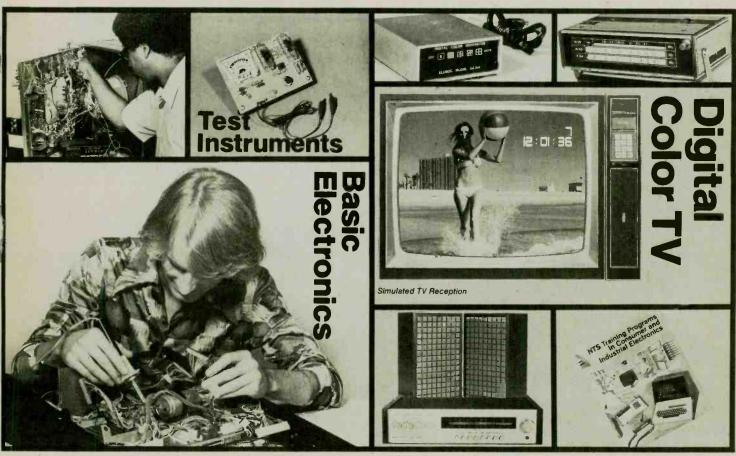

and every piece of equipment included.

Send for it today, and see for yourself what's really happening in electronics training technology at NTS. Find out how much has changed, and what new directions the field is taking. You'll probably want to be a part of it.

It's free. Just mail the card or coupon. Today.

NO OBLIGATION. NO SALESMAN WILL CALL. APPROVED FOR VETERAN TRAINING.



TECHNICAL-TRADE TRAINING SINCE 1905
Resident and Home-Study Schools
4000 South Figueroa St., Los Angeles, Calif. 90037

4000 South Figueroa Street,	AL SCHOOLS Dept. 222- Los Angeles, California 90037
Please send FREE Color Ca	talog and Sample Lesson.
□ Color TV Servicing □ B & W TV and Rad □ FCC License Cour □ Electronic Commu □ Electronics Techne □ Audio Electronics □ Digital Electronics □ MicroComputers/M	io Servicing se nications plogy Servicing
Name	
Name	
	Age
Address	Age

### THE THIRD EAR

thermore, any leakage within C3 will exert yet another influence on the time delay; the leakier the capacitor, the longer the charging time. With this in mind, it is wise to use a new, high-quality electrolytic capacitor for C3.

Power Supply. Power for the Third Ear comes from five "D" cells in series, yielding 7.5 volts. Electrolytic capacitor C1 keeps the power supply's impedance low. Inactive, the Third Ear draws only 2 milliamps, but current consumption jumps to 22 mA when the circuit is active. At these small rates of discharge, "D" cells will last a long time. Some readers might prefer to see the Third Ear powered by an AC supply; however, transformers hum at 60 Hz, and the Third Ear is sensitive enough to be triggered if a transformer is mounted inside its case. If you want to use an AC supply, a 6- to 9-volt DC unit will work well, but it must not be mounted inside the Third Ear's case.


Construction. Construction is easy because you don't need to worry about the layout; anything will do. A PC board is not absolutely necessary, but if you like to give your projects that professional look, use the PC patterns provided.


You should test LED1's sensitivity before wiring it into the circuit. Bargain LEDs especially may not be sensitive enough to be used here. Hook your LED in series with a 1000-ohm resistor, and connect the combination to a 7.5 VDC source. (Get the polarities right.) If you do not obtain an easily visible red glow, try another LED. Red LEDs are more sensitive than green or yellow ones, so stick with red.

When wiring duration control R5, make sure you obtain maximum resistance in the fully clockwise position. This will then give you a maximum time delay.

When building your Third Ear, you

The printed circuit board for The Third Ear is easy to make. You can use this template for a photographic copy or just duplicate the pattern with a resist pen.





Make a three-quarter-inch diameter hole in the front panel of the cabinet or wherever you want to put the microphone. Adjust the sensitivity so that it triggers correctly.

would be better off with slide switches. When a toggle is snapped quickly, the click of the switch can activate your system, regardless of the sensitivity setting. Slide switches require very little operating force and are practically silent.


The contacts of relay K1 are rated for a load of up to one ampere, which is more than adequate for most applications. Sometimes, however, you may wish to control a high-power load, such as a flood lamp. One method of doing this would be to substitute a relay with a higher contact rating for K1, but high-current, good-quality relays are expensive. Besides that, all relays arc, especially with high-power loads, so a relay's lifetime under such conditions is limited. A cheaper, better solution is the high-power interface. Note that the triac controls the AC load, but the relay contacts control the triac. In this way, the relay contacts carry only the small gate current of the triac, and your Third Ear remains isolated from the AC line (and shock hazards) by the relay. Choose a triac with a current rating high enough for your load, and heat sink it. Mount the triac and heat sink in a well-ventilated plastic case to prevent accidental shocks.

Checking it Out. After construction is complete, you should check out the operation of your project. Set your Third Ear into the pulse mode, with R5 set for a minimum duration, and sensitivity control R9 placed at the midpoint of its range of rotation. Now, turn on power switch S1. LED1 should flash momentarily as power is applied. Snap your fingers directly in front of the microphone, and note the length of time that LED1 remains lit.

Next, rotate the duration control to maximum. Snap your fingers, and again make a note of how long LED1 stays illuminated.

Finally, turn the power switch off, and flip S2 to the latch mode. After five seconds, re-apply power. Snapping your fingers should now cause the LED to light and stay lit for as long as power is applied. You can do some experimenting with the sensitivity control, too. In the prototype, operation at maximum sensitivity was impossible because even the faintest ambient noise would trigger the circuit.

The applications for the Third Ear are only limited to the uses your imagination can find, and with its switching flexibility, it can control almost anything you may wish to operate around the home or office.



The Third Ear can be adjusted so that it triggers and holds, or so that it triggers and resets. This chart shows how the output level varies with incoming sound pulses.



Et's face it! Wireless microphones have an "image" problem. There are people who still think of wireless mikes as merely toys or party-time novelty items, while other folk invariably associate these miniaturized electronic marvels with the nefarious bugging activities of cloak-and-dagger CIA agents, and with gum-shoe private eyes prying into other people's affairs for monetary gain. Such activities do go on, yet the fact remains that there are virtually endless applications for wireless microphones that are entirely legal and unquestionably ethical.

Regular readers of ELEMENTARY ELECTRONICS of course need not be reminded that there are proper and improper uses for just about anything, from dynamite to every conceivable variety of electronic gear. But just in case a reader loses his copy of EE, and it falls into the wrong hands, we hasten to append this warning: FCC rules clearly prohibit the use of wireless microphones for eavesdropping on the conversation of unsuspecting people. Getting caught at wireless snooping could lead to federal prosecution. Moreover, the citizen whose privacy has been violated is very likely to file a king-sized civil suit for damages.

Using the Mike. A wireless mike

system can be a very handy electronic watchdog. You can hear the baby cry, respond to a call from a bed-ridden patient, or run for the telephone or door when either bell rings. Just plant your mike in the appropriate location and take your portable, battery-powered radio wherever you go into the house, or even outdoors, to know what's going on inside.

Having problems with intruders? Perhaps only the seasonal kind that splatter hard-to-remove raw eggs all over your patio bricks? Put a mike out in the yard as an effective early-warning system. On the farm, put the mike in the hen house to help catch that wiley four-footed intruder that has been eluding capture for so long.

When you install that new TV antenna, take a portable radio up on the roof. As you rotate the antenna, another person watching the TV screen down below can use the wireless mike to tell you when the picture is clearest. And what about the housewife who can't bear to miss that next episode of her favorite soap opera, yet absolutely must spend some time down in the laundry? She can put the mike in front of the turned-on TV and at least hear whether Mary will actually leave John to start cooking for Harry.


Countless other applications for wireless microphones relate to such broad activities as business, leisure-time activities, sports and education. Use your system as a hot-line, tag sale communicator, public speaking aid, or a secret prop during a magic show or other amateur theatrical performance. You can even hook your receiver to a tape recorder to obtain permanent records of your personal transmissions. Just plug the speaker output on your portable radio to the auxiliary input of a tape recorder. You can then wander anywhere in the house and dictate information onto tape.

It's an easy way to make an inventory of personal possessions without lugging around the whole tape recorder.

Choose Optimum Range. Our experience indicates that the factory-built wireless mikes have substantially greater range than the kit jobs. In some applications you need that extended reach, but in other situations it could be a handicap. If your home is on a large property, the more powerful mikes are best. But if your neighbors live only a few feet away, you may be better off with a mike having a limited range for two reasons: To keep from annoying your neighbor, and to keep your personal broadcasts truly personal.

As you read the following comments about our performance tests, bear in mind that many variable factors can materially influence the quality of transmission. The quality of your FM radio can be as important as the quality of the microphone you choose, for example. Even the physical orientation of the receiving radio can affect the clarity of reception. So, inevitably, you will have to do some practical experimenting to get the most from your system.

Our informal range tests were made in the following manner. An old manual darkroom timer was used to pro-



The Micro FM, from MLI, is the smallest unit we have found. It features a built-in on/off switch, obviating removal of the battery when it's not in use. Circle 74 on Reader Service Coupon.

duce a noise having a constant pitch and intensity. This was put in the kitchen of a ranch-style house situated on one acre of real estate. Each mike was first carefully tuned to the selected FM frequency (usually about 108 MHz) by simply turning a small tuning coil (with screwdriver or alignment tool) until the nearby radio squealed. Each microphone was then placed in the same position near the noise-making timer while the output signal was monitored throughout the house and outof-doors with the portable radio. Warning: the tuning coils in the mikes are very delicate and will absolutely not take heavy-handed abuse. Heed manufacturer warnings about using a light touch and against playing with the coils unnecessarily.

In the following summaries, we'll first provide pertinent manufacturer information, and then add our own test observations.

Micro FM Wireless Mike. (MLI Industries; \$19.95 plus \$1.50 postage and handling) is the smallest of the factory-built microphones, measuring only 13/4 inches by 3/4 inches by 5/8 inches (less than one cubic inch!), yet it has one of the longest transmission ranges. The manufacturer says the range is up to 100 feet indoors and 300 feet outdoors. The tough aluminum case is black-anodized for durability, and the 1.3-volt mercury battery (included in the purchase price) is claimed to provide from 60 to 80 hours of continuous use. The mike is continuously tunable to any frequency between 88 and 108 MHz-the full FM broadcast band.

Semiconductors in the mike include an FET, one IC, one diode, and three silicon transistors. The modulation bandwidth is ±100 kHz and the field strength is 50 microvolts/meter at 50 feet (open area). It incorporates an electret microphone, has a permanently attached ¼-wavelength flexible wire antenna (29 inches long), and has FCC


type approval.

The first thing we liked about this compact little marvel is the slide switch which helps prolong the life of the battery without the need to remove it. We were equally impressed by performance. With the receiver volume set only about one-eighth of maximum, the noise could be monitored anywhere in the house, even throughout the basement area. By turning the receiver volume gradually to maximum, clear pickup was possible everywhere on the one acre of property. The test was made at 108 MHz, because the manufacturer recommends you start from this end of the FM band in the search for the first quiet zone.

Micro Mini Mike. (AMC Sales; \$18.95 plus \$1 postage and handling), Model WM-F2, measures 2½ inches by ¾ inches by ½ inch (% cubic inch). This second-smallest factory-built mike features a durable black metal case, 1.3-volt mercury battery, 27-inch flexible wire antenna, and the following semiconductors: one FET, two diodes, two transistors, and one IC. It has FCC type approval. Frequency deviation is +100 kHz/MHz and field strength is put at 50 uV/m at 50 feet.

The manufacturer specifies a range of up to 100 feet indoors and 300 feet outdoors. Battery life is said to be from 60 to 80 hours. It can be tuned anywhere in the 88 to 108 MHz FM band.

Tuning to 103 MHz seemed to produce better results than at 108 MHz. By turning the receiver volume to about halfway to maximum, the transmitted noise signal could be heard anywhere inside the house. By turning the radio volume to maximum, reception could be extended to reach a short distance outside the house, about 35 feet from the mike. The microphone was judged to have a somewhat more limited range than the feisty little Micro FM already discussed. On other drawbacks is that



Formula International's TECT model WEM-16 is powered by a penlite battery, and features an omni-directional electret condenser microphone element. Cost is \$16.50. Circle 75 on Reader Service.

the lack of an on/off switch necessitates physical removal of the battery when the mike is not being used. Nonetheless, this mike was judged to be a good buy provided these limitations can be accepted, and a preferred mike if your home is close to neighbors and you need a limited range to ensure privacy of your in-house broadcasting.


TECT FM Wireless Microphone, Model WEM-16 (Formula International; \$16.50) is in a different class from the two "Micro" mikes just discussed, if only because of its relatively large size. This mike is 6¼ inches long and has a front-end diameter of just under one inch.

This three-transistor (one FET) mike features an omni-directional electret condenser type microphone element, a penlight single-cell power source, a 24" flexible cord antenna, attractive black-and-chrome casing, plus an on/off switch. Specifications include: frequency range from 88 to 108 MHz, radiation field intensity less than 15 uV/m at 100 m; maximum frequency tolerance ±75 kHz, and a current drain of 3mA maximum.

The oscillating frequency of this microphone is set at 90 MHz at the factory, but you can easily tune to any other frequency in the FM band by means of a coil accessible through a small hole near the switch. Battery life is put at about 100 hours.

With the receiver volume set at about one-fourth of maximum, the test noise could be heard anywhere inside the house, including the basement. By increasing the radio gain, excellent reception was obtained everywhere on the one-acre lot; sound quality was judged very good. If the larger size is no handicap, this mike should handle any domestic transmission conditions with ease.

FM Transmitter Kit (Formula International; \$6.95) requires the soldering of about 17 components, including



The FM Transmitter Kit, by Formula International, costs \$6.95, less battery. Circle 75 on Reader Service Coupon.


the 2- to 3-foot long antenna wire, to a 1 inch by 1½ inch PC board. The component locations are marked on the PC board, albeit with somewhat blurred printing. However, if you start with the resistors, you should have no difficulty orienting the various parts. Helpful diagrams as well as a schematic are provided, but there are no step-by-step instructions. It's assumed you know how to read resistor value codes. Tip: when installing the coil, insert the leads bridged by a purple line into holes 1 and 2.

The manufacturer suggests you first test the assembled circuit with an ammeter, but this should not be necessary if the assembly has been done with care, especially being sure that the three transistors are oriented correctly. This kit comes with a small electret microphone and a battery cable, but you must provide the 9-volt battery.

This wireless unit was tested at 108 MHz. With the radio volume set at about halfway to maximum, the test noise could be heard in all parts of the house, including the basement. There was some "reach" into yard areas, to a distance of about 35 feet from the mike. The range was found to be roughly comparable to that of the factory-assembled Micro Mini Mike sold by AMC. The cost is lower, but you have the problem of finding a suitable case to contain the PC board and the much larger 9-volt battery. The mike otherwise seems suitable for use in areas where a limited range is desired.

The sound quality seemed a bit more ragged than that obtained with the AMC mike, which has the benefit of a metal case for shielding to minimize body capacitance effects.

Super Sens FM-2 Mike Kit (Ramsey Electronics; \$4.95) requires soldering about 16 components, including a short 5 inch to 10 inch antenna wire, to a PC board measuring 1 inch by 1½ inches. There are no identifying mark-




Ramsey Electronics' FM-2 Wireless Kit sells for \$4.95. You supply mike and battery. Circle 77 on Reader Service Coupon.

ings on the PC board, but a clear diagram, good parts identification list, and a schematic of the circuit make the assembly easy. It should be noted that the kit does not include a microphone element, battery connector, or a 9-volt battery. You must find these locally. The manufacturer states that you can use a crystal, ceramic, or dynamic microphone. The crystal type is the most sensitive, but the dynamic type offers better fidelity. It's claimed that the mike works with a power supply of 3 to 9 volts, the higher voltage being preferable. You are cautioned that the antenna affects the transmitter frequency, therefore close movement next to it should be avoided.

The main problem encountered with this wireless kit concerned difficulty of tuning it to the desired FM frequency, mainly because body capacitance effects were very pronounced. Getting a hand near the antenna is unavoidable when adjusting the tuning coil. When proper response was obtained with the receiver during the tuning operation, it was immediately lost when the hand was moved away. Thus it appeared necessary to tune in "bits-and-pieces" making minor adjustments and then removing the hand to see if the frequency was locked in properly.

The mike was tested first with an electret microphone, and then with a crystal mike cartridge. The crystal seemed to give somewhat better results although we did not succeed in getting performance comparable with that of any other wireless discussed in the above sections.

Science Fair AM Broadcaster (Radio Shack, cat. no. 28-209, \$7.95) is the only AM transmitter found on the market. The price includes everything you need, except a 9-volt battery. Assembly of the components on a 414 inch by 6 inch board requires no soldering because all connections are made to spring-type fasteners that plug into



Radio Shack's AM Broadcaster costs \$7.95, and includes everything except battery. Circle 32 on Reader Service Coupon.

holes in the board. The tuning coil is made by winding 34 turns of wire around a plastic frame measuring 3 inches by 4½ inches, which is then mounted vertically at one edge of the main component board. The transmitter utilizes a crystal microphone, three transistors, a tuning capacitor, choke coil, modulation transformer, and several capacitors and resistors, all of which are clearly identified.

The manufacturer claims broadcast range can be as much as 40 feet under ideal conditions. The author managed transmission over a somewhat shorter range indoors. There is no critical coil tuning required. Just set your AM to any unused frequency and rotate the tuning knob on the components board to match the frequency.

Because of the limited range, and especially because of the bulk of this wireless, the Broadcaster cannot be put into the same class for comparison with the FM mikes already discussed. It's not intended to be a working mike, but a Science Fair educational kit. As such, it meets all claims made for it.

#### Manufacturers of Wireless Microphones

A.M.C. Sales, Inc. Box 928 Downey, CA 90241

Formula International, Inc. 12603 Crenshaw Blvd. Hawthorne, CA 90250

MLI Industries 50 Hunt Street Watertown, MA 02172

Radio Shack 500 One Tandy Center Fort Worth, TX 76102 (Buy from local stores)

Ramsey Electronics P.O. Box 4072 Rochester, NY 14610

N AMPLIFIER STAGE that is used at two widely separated frequencies (such as RF and audio) is called a reflex amplifier. This type of amplifier circuit was used in the early days of radio because of its economical use of the then expensive vacuum tubes. Later, during the depression period of 1934 to 1937, reflex circuits were used in small home radios. When transistors first became popular, two transistor radios were manufactured in Japan and sold here for very small prices. These transistor circuits employed reflex amplifiers, usually in a TRF type of receiver with a crystal diode detector. One transistor was employed as a reflex RF amplifier and first audio stage, and the second transistor was used as the audio power amplifier.

You can experiment with the reflex circuit by building our simple one-Transistor Reflex Receiver project. The circuit employs a j-FET as a tuned RF amplifier and also as a stage of audio (after the signal is detected by a germanium diode). The circuit is laid out breadboard style for easy construction.

The Reflex Action. The reflex circuit is a system in which an amplifying device (transistor or vacuum tube) is made to function at both RF (or IF) and audio frequencies. As commonly used, the signal is amplified by the device, detected, and the resultant audio signal fed back into the same device for further amplification. Such a circuit has two inputs (one for each type of signal frequency) and two outputs, with filtering necessary to split the two sets of signals.

Look at the signal flow block diagram of the one-Transistor Reflex Receiver project. This is a diagram of a typical reflex circuit. Signals are amplified at RF frequencies and then fed through a signal splitter to a crystal diode detector. The detected output is filtered and coupled back through the tuned circuit to the amplifier, where the signal is now at audio frequencies. The audio frequencies are amplified and fed through the signal splitter to the low pass filter and to the headphones.

As shown in the block diagram and the schematic, radio signals are coupled through J1 and C1 to the tuned circuit of C3/L1/and to the gate of the field-effect transistor (j-FET) Q2. C2 places the bottom end of L1 and the rotor of C3 at RF ground. R3 supplies the bias for Q2, and C8 is the RF/AF bypass capacitor. R1 functions as the Q1 gate DC return and audio input load. The amplified RF signals from the drain of Q1 are coupled through C9 to R5 and detector D1. C7 is connected in shunt with the RF out-



#### An easy-to-build one-transistor reflex receiver

put of Q1 and is used to adjust the RF gain of the j-FET.


The detected audio signal is fed through the RC filter composed of R4, C5, and C6 to the volume control R2. The audio is then coupled through C4 to the junction of R1, C2, L1, and C3. C2 presents a low impedance to RF, but has a high impedance to audio. L1 has a high impedance to RF, but has a low impedance to audio. The two types of signals (RF and audio) are therefore applied directly to the gate of Q1, each being amplified therein.

The amplified audio signal at the drain of Q1 is coupled through L2 to the J2 headphone jack. L2 serves as both a component of the low-pass filter (L2/C10) and as an RF load for the signal splitting action of C9 to D1. L2 is chosen to have a high value of reactance over the broadcast band and serves to broadly tune the D1 detector circuit over the range of 550 kHz to 1500 kHz.

The DC power for the circuit is supplied by an external 6-volt battery (or DC power supply), and C11 serves as an audio filter for the power input.

Construction. The receiver, as shown in the photos, is built on a 6-inch long by 3¾-inch wide by 2-inch high plastic box with a perf-board section installed on top. Most of the components are mounted on the perfboard with push-in solder terminals. The input and output connectors, J1 and J2, are mounted on the front and rear of the box. The 6volt battery, or power supply, is connected via two leads fed through a hole in the rear of the box. The tuning capacitor C3 is mounted directly on the perfboard with machine screws, and the volume control R2 is mounted on a small bracket made from sheet aluminum that is also installed on the perfboard.

Begin construction by cutting a perfboard section to size to fit the top of the box. Locate corner holes to fit the threaded molded screw retaining extrusions located inside the top corners of the box. Mount C3 on the perfboard in the location shown in the photo of

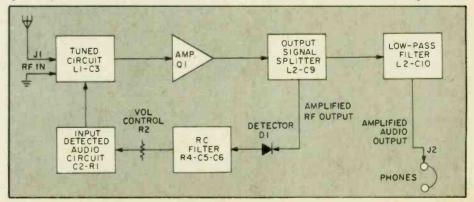

This block diagram shows how the signal is amplified as AF and RF, then split and fed back to the tuned LC circuit. The low pass filter separates the amplified audio signal.

the top of the receiver. The capacitor used in our model had threaded holes in the bottom for easy mounting with machine screws and washers to lift up the stator insulating panels from contact with the board surface. If your capacitor does not have these mounting holes, the capacitor can also be mounted by a small bracket cut from sheet aluminum to fit front mounting holes. Cut a bracket to fit R2 and mount it on the front of the perfboard in the general location shown in the photos. Use an internal toothed lock washer between the R2 mounting nut and the bracket surface to prevent accidental movement of the volume control.

Mount the remainder of the components on the perfboard with push-in solder terminals in the locations shown in the top of the board photo. The locations are critical, so follow the layout of our receiver model. Install a solder lug on the frame of the tuning capacitor C3 for connection to the rotor. Wire the board components as shown in the schematic and keep the connecting leads as short and direct as possible. L1 is mounted with two push-in terminals soldered to the coil connecting lugs.

Install the headphone jack J2 on the box front and the antenna/ground jack, J1, on the rear of the box as shown in the photos. Cut a hole in the rear of the box for the battery leads and complete the wiring of the perfboard with the interconnecting leads to the box components. Install lugs on the hattery leads to fit your battery terminals. The leads on our model extended approximately 10 inches from the box, but the lead lengths are not critical and can be any convenient length to fit your particular installation. To minimize accidental hreakage, the battery leads should be stranded wire (preferably color coded; red for positive and black for negative)

Testing Your Reflex. For best results. an outdoor antenna and a good ground should be connected to J1 (center connector to the antenna and the outer shell to ground). Inasmuch as the Reflex Receiver project only uses a simple tuned circuit, you may have some problems with overloading on strong local stations. C1 value can be changed to adjust the antenna loading; small capacitance (3 to 20 pF) for light loading and better selectivity, and larger capacitance (25 pF to 47 pF) for heavier loading, higher senstivity, but lesser selectivity.

Before connecting up the receiver project to the battery, check the wiring and then adjust the RF Gain control, C7, to maximum capacity (minimum


03. C7 R2 The author used perfboard mounted on a plastic box as chassis for the signal snare. Push-in solder terminals make construction a snap. The input/ output jacks are all mounted on box under the board. R5 C6 CZ RI C4 C8 R3 QI CIO L2 CH

RF Gain). Set the volume control R2 full counter-clockwise (for minimum audio gain). Check the lead polarity before connecting the 6-volt battery to the receiver, then plug in the headphones (2000-ohm type).

Tune the broadcast band with C3 while adjusting R2 for a comfortable audio volume. Adjust L1 for best band coverage for your particular location.

Tune the slug in for more inductance. Adjust C7 for increased RF sensitivity over the band, and if oscillation occurs, adjust for maximum capacity (just short of the oscillation point).

Check the RF amplifier action in the reflex circuit by tuning in a weak station and then connecting a 500 pF capacitor (approximate value) be-(Continued on page 87)

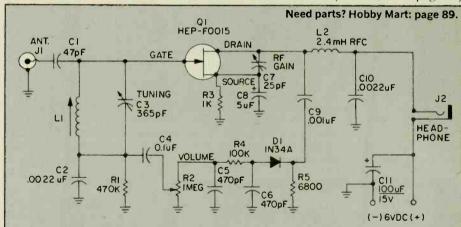


#### PARTS LIST FOR ONE TRANSISTOR REFLEX RECEIVER

- C1-47-pF ceramic disc capacitor, 15 volts C2, C10-0.0022-uF ceramic disc capacitor, 15-volts
- C3-365-pF variable capacitor
- C4-0.1-uF ceramic disc capacitor, 15-volts
- C5, C6-470-pF mica capacitor, 15-volts
- C7-2 to 25-pF mica trimmer capacitor
- C8-5-uF electrolytic capacitor, 15-volts
- C9-0.001 uF ceramic disc capacitor, 15-
- C11-100 uF electrolytic capacitor, 15-volts D1-1N34A germanium diode (or equiv.)
- J1-Phono jack (RCA type) for Ant. and Gnd. connector

- J2-Phone jack (to fit your headphones)
- L1-broadcast band loopstick antenna coil (Radio Shack #270-1430 or equiv.)
- L2-24-millihenry RF choke
- Q1-HEP F0015 NPN FET (Motorola) or equiv-
- R1-470,000-ohm, 1/4-watt resistor
- R2-1-megohm potentiometer, audio taper
- R3-1000-ohm, 1/4-watt resistor
- R4-100,000-ohm, 1/4-watt resistor
- R5-6800-ohm, 1/4-watt resistor
- Misc.-Plastic box, approx. 33/4 by 6 by 2inches with perf-board top section, knobs, sheet aluminum bracket for R2, push-in clips for perf-board, hookup wire. Also: Hi-Z headphones (2000-ohms or higher) and a 6-volt battery or DC power supply.

# The BBC's World Service by Brian Rogers



The sun never sets on the

One of a DXer's best know addresses, Bush House, London—headquarters of the BBC.

T THE AGE OF 12, while exploring the "shortwave" dial setting on our family radio, I picked up a transmission from the British Broadcasting Corporation in London. I'd never heard a foreign station before and I was thrilled that a fragile thread of energy called a radio wave could span a mighty ocean and link the far-off British Isles with the "Silvertone" console in our living room.

Since then, using receivers bearing names like Hammarlund, Hallicrafters, Drake and Realistic, I've heard the BBC countless times. But I haven't forgotten the evening, nearly thirty years ago, when I heard the station for the first time.

I still listen to the BBC today, and not just to recall a pleasant boyhood experience. Along with millions of other SWL's, I listen because, in its long broadcasting day, the World Service of the BBC offers a tremendous variety of programs received at good strength just about anywhere on the globe where you and your receiver happen to be.

British broadcasting empire

Empire Service. Calling its short-wave programs the "Empire Service," the BBC began broadcasting on high frequency December 19, 1932. Six days later, on Christmas, King George V used the infant medium to address his subjects throughout the world. He spoke of radio's power to do good and bring people closer together.


A service in Arabic was begun in 1938 to counter Mussolini's anti-British broadcasts to the Middle East. Other foreign-language broadcasts soon followed.

World War II gave the BBC an opportunity to earn a reputation for impeccable accuracy and thoroughness in news coverage. A reputation it still enjoys today. Citizens of occupied countries learned they could trust the station because it always told the truth, no matter who the truth might hurt. England's setbacks and defeats were reported as faithfully as her triumphs and victories.

By 1945, almost everyone in Europe believed unquestioningly in BBC newscasts. On D-day, when General Eisenhower used these programs to instruct French civilians, thousands of people obeyed without hesitation.

Today the BBC External Services emply 110 journalists working in shifts to process the more than one million words a day that pour into the newsroom in London's Bush House. This flood is whittled down to fill 250 separate news programs in the 39 languages the broadcaster currently uses.

The English language "around-the-world, around-the-clock," World Service includes seventeen nine-minute bulletins of world news daily. Also heard are five-minute summaries of British





While the BBC doesn't normally send QSL cards, it does have frequent SWL contests. These DX certificates and World Radio Club banners are often an SWL's most prized possessions.



The main console in the control room in the BBC External Services headquarters. The BBC multilingual system is highly organized.



Henry Hatch, the resident engineering personality of the World Radio Club, demonstrates a crystal receiver of his own design.

news called "News About Britain," and reports from BBC correspondents in fifteen-minute "Radio Newsreel," programs.

World News Roundup. In addition to major wire services such as the Associated Press, United Press International, and Reuters, the BBC uses as a news source its own radio monitoring service. Located at Caversham Park, about 50 miles from London, its professional SWL's listen to over 400 news bulletins from more than 30 countries every day.

But BBC programming isn't all news. Of special interest to DXers is the World Radio Club, now boasting in excess of 30,000 members. "Meetings" of the BBC sponsored organization are held on the air weekly. The best time for North American listeners to hear these electronic conclaves is 2315 GMT (6:15 p.m. EST) on Wednesdays. The sessions are repeated at 2100 GMT (4:00 p.m. EST) on Fridays. Membership is granted free-of-charge to anyone who writes for it.

Long a favorite of shortwave buffs, retired BBC engineer Henry Hatch currently conducts monthly instructional talks called "Radio for Beginners," on the club programs. Also featured are reports of stations heard by noted DXers and what the "pros" at Caversham are hearing.

Listener Envolvement. Every month colorful pennants are awarded to 25 lucky listeners who correctly answer a question posed by Mr. Hatch. Subjects of recent queries have included such topics as elementary electrical math, the international 'Q' code, and schematic circuit diagram symbols. Names of club members providing correct responses are put in a container and a drawing is held to select the pennant recipients.

The BBC issues verification (QSL) cards only on special occasions. One



The BBC's worldwide reputation for clear, accurate and non-political news broadcasting is due to its large staff of highly trained and motivated reporters, editors and announcers.

such opportunity occurred in 1972 when the parent BBC organization celebrated its fiftieth anniversary of going on the air.

Annually, in the summer, another chance for a BBC QSL is offered when the World Radio Club holds its members-only DX Award competition. Certificates are awarded to DXers who correctly report reception from various BBC transmission sites during the two-week contest period. Dates, times, frequencies and transmitter locations are typed on the attractive 8½- by 10½-inch award certificates.

Contemporary rock music found on the international charts is played by Brian Matthew during his "Matthew on Music" program heard Wednesdays following World Radio Club.

The BBC World Service is one of only a handful of sources for radio drama today. Programs called "Radio Theater" and "Theater of the Air" are heard weekly.

Relays. From the 50-studio center in the Bush House headquarters, BBC shortwave programs reach listeners via seventy high-powered transmitters located on ten sites throughout the world. North American listeners are best serv-

ed by stations on Antigua, in the Caribbean; and at Sackville, New Brunswick, and Greenville, North Carolina. These relays are shared with other broadcasters, such as Deutsche Welle and Radio Canada International.

Other BBC relays are located on Ascension Island, Cyprus and Singapore. Programs reach these transmitters by means of undersea cable, SSB radio link, and satellite.

Many frequencies are used by the BBC to reach its estimated audience of seventy million and it would be impossible to list all those dial settings here.

North American listeners might check 11,775 kHz in the morning however, and 6 175 kHz in the evening.

All World Service times and frequencies are listed in a monthly magazine known as "London Calling." It is available by mail for \$10.00 per year. Pictures of station personalities and descriptions of upcoming programs are included.

"London Calling," as well as membership in the World Radio Club, can be obtained by writing to BBC World Service, P.O. Box 76, Bush House, London, WC2B 4PH, England.



A frequency counter designed with the radio hobbyist in mind

N THIS DAY AND AGE there is virtually no communications service that does not require precise measurement of the transmitter's carrier frequency.

Sure, if you plunk yourself down in the middle of one of the amateur bands, you can be reasonably certain that if other stations don't get on your back, you're somewhere in a legitimate segment of the band. But there's no way you're going to crowd the edges of the bands, where much DX hangs out, or accurately zero-beat a net, without a frequency counter built into the transceiver or transmitter, or an external counter. And unless you're in the market for one of those new, digital readout transmitters priced close to \$1000, the external counter is your best bet. It certainly beats asking the receiving station if you're on frequency, for his receiver is most likely no better calibrated than your transmitter.

Why a Counter? Most important, precise transmitter frequency is often required for proper reception. For example, many modern AM CB transceivers are so selective, that even with delta tuning, a transmitter near the frequency toleranec limits will be received with "spitty," garbled modula-tion. Even worse, SSB requires the transmitter carrier be well within tolerance, for the receiver clarifiers often cannot properly tune a signal near the tolerance limits, and what you hear in this instance is a high pitched "Donald Duck" sound. For best reception on the receiving end, a modern CB transmitter should be within about ±1000 Hz of the channel frequency. If it gets beyond these limits, you really should have a service shop align the frequency synthesizer so your transmitter's carrier is as close to the channel frequency as is possible.

While a frequency counter is probably the most reliable way for the hob-



Front panel of the REDCO RC-50 contains a six-place 0.3-inch LED display, the power/resolution selector, and a 50-ohm direct connection to the counter. The "10" and "100" resolution settings mean multiply the reading by 10 or 100 for the frequency in Hz.



The rear apron has a dual voltage power connector and an in-line "sampler" connection for the transmission line. The associated power cord automatically switches the power supply for 120 VAC or 13.8 VDC operation. The in-line antenna connection will accommodate transmitters on all frequencies to its upper limit of 40 MHz.

byist to check transmitter frequency, using one can often be a first rate headache, for few are sufficiently sensitive to sniff the carrier leakage through the transmitter cabinet, or receive the signal with a short antenna. The way to get reliable, full-time measurement of the carrier is to have the counter work in-line, through a transmission line sampler. Better still, simply use a counter, such as the REDCO RFC-50, that has the sampler built in; a counter specifically designed for in-line connection to transmitters.

For full-time indication of the carrier frequency of AM and CW signals, for SSB signals of sufficient output power so the counter can be triggered by the carrier leak-thru, or for the "tune up" carrier of SSB transmitters so equipped, you just connect the trans-

ceiver or transmitter output to a UHF connector on the rear of the REDCO RFC-50, connect the transmission line to another UHF connector, and key the transmitter. The carrier frequency will be indicated by a six digit, 0.3-inch, LED readout. Since the RFC-50 works off a minute sample of the power in the transmission line it can be left permanently connected, ready to indicate the transmitter's output frequency at all times.

Specifications. The REDCO RFC-50 Communications Frequency Counter is housed in a 7½-in. by 8-in. by 2¼-in. cabinet. It can be powered by 120-VAC or 13.8-VDC, depending on which of two supplied power cords is plugged into a rear apron connector. The switching from one power supply voltage to the other is done automatically by the plug on the power cord.

The rated frequency range is 500 Hz to 40 MHz through a direct connection via a front panel BNC connector. Unlike most hobby type counters with direct connection, however, the input is not the usual 1-megohm; it is 50 ohms with back-to-back diodes across the load resistor providing protection against excessive input voltage. Two UHF connectors on the rear apron provide an RF sample from a transmission line for the counter input.

Operation. A resolution switch on the front panel positions the decimal point and provides the proper gate time for direct indication of MHz and kHz. It also serves as the power on-off switch.

Resoultion is 10 Hz, meaning that in any frequency reading, the last place is not indidcated. For example, 195.599 kHz is indicated as 0195.59 with the resolution selector at the "10" setting meaning that you should multiply the reading by 10. 0195.59 times 10 becomes 195.590 kHz. In another ex-


(Continued on page 88)




ost of us who drive the highways these days have become witness, at one time or another, to the gruesome sight of a high speed, rear-end collision. With today's cars becoming smaller and lighter, the only way the auto makers can provide a margin of collision safety for the occupants is to design the cars to crumple on impact, thus absorbing the shock and hopefully leaving the passengers uninjured.

The drawback to this method is that while you and your loved ones may manage to avoid serious injury, your car is likely to be suited for use as nothing more than junkyard scenery.

The Principle. To help you avoid these unpleasant consequences, we suggest you build the Space Cushion Timer. This device works on the "twosecond rule." The rule simply says that if a two-second interval is kept between cars at all speeds, ample braking distance will be provided for safe stops. In practice, you would fix a landmark at the side of the road, such as a light pole. When the car in front of yours passes the pole, two seconds should elapse before your car reaches that same spot. With our timer, you merely trip the touch plate, and 2.1 seconds later, a pleasant tone sounds. If you're at the landmark, then you are a safe dis-



Separate the template for the touchplate and make an individual printed circuit board for it. Make both PC boards very carefully.



The components all mount on the side opposite the foil pattern. Be sure to double check the polarities of electrolytic capacitors.

## SPACE TIMER


tance behind. If not, then adjust your speed accordingly.

Construction. Best results will be obtained by constructing the timer on a PC board. We have provided a template which you can use for etching your own board. All components, except for the speaker, switches, and the touch plate, are mounted on the PC board. The polarity protection circuit may be wired point-to-point on a small chunk of perfboard, and mounted on or near the car's fuse box, in order to save space within the timer's cabinet.

Instead of using a cabinet, especially if your car has a bit of room behind the dash, you may wish to mount the timer's PC board right inside, and have the touch plate and the switches mounted flush on the dash, in order to give the project that "built-in" look.


How it Works. IC1 consists of two 555 timers, one operating in a monostable mode, and the other in an astable mode. The monostable multivibrator is triggered when your finger contacts the touch plate. It has a pulse length of 2.1 seconds when S1 is in the normal, or closed position, and about 5.2 seconds in the poor, or open position. The output of this circuit goes to the base of Q1, which serves as a differentiator / inverter, shaping the pulse into a positive sawtooth, with a duration of 0.25 seconds. The reshaped pulse is then fed to the reset side of the astable oscillator which operates at 600 Hz. This oscillator will only produce an output when the reset input is held above ground potential (minimum of 0.4 volts). Therefore the oscillator will produce a 600-Hz tone for 0.25 seconds, which is fed into the speaker as the audible warning.

Operation. After connecting the protection circuit to the fuse box and the timer, you're ready for the safest driving you've ever done. Consult the table for the proper setting for the road conditions and the prevailing speed of traffic. The look-ahead feature of switch S3 allows you to set a considerably greater safety margin for conservative driving. You may wish to clip the table from the page and fasten it to the underside of your sun visor where it will be handy when you need it. Remember! The Space Cushion Timer will not prevent accidents if you don't use it, and even when you do use it, it's not intended as a substitute for seat belts and common sense.

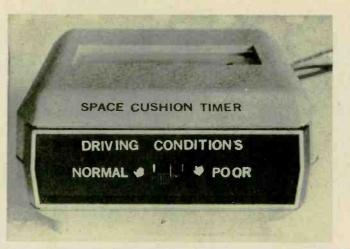

While almost any case can be used for the space cushion timer, this Radio Shack clock case seems ideal. This unit can be mounted at almost any convenient spot on the dash-board of your car.

	Rationale For Two Seconds Following Distance			
Car Feet Car Will Speed Travel In 1 Second		At 1 Car Length For Each 10 M.P.H. You Will Be (based on 20 ft. vehicle)	2 Second Safety Rule You Will Be	
30 = 40 = 50 = 60 =	44.4 58.6 73.3 88.0	60 ft. back 80 ft. back 100 ft. back 120 ft. back	88.8 ft. back 117.2 ft. back 146.6 ft. back 176.0 ft. back	

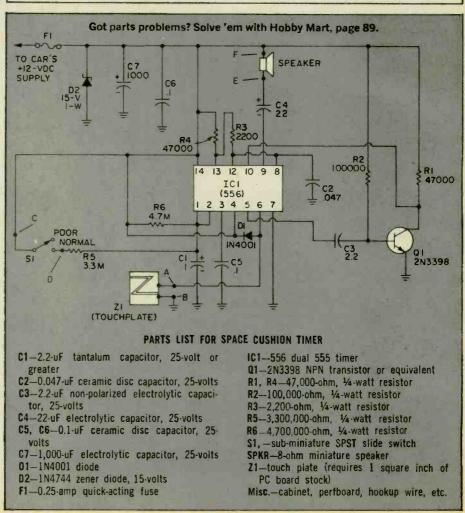


Y LOVE AFFAIR with microcomputers began with Popular Electronics' COSMAC Elf and progressed through the Bugbooks to the Mark 80 by E&L Instruments Company. They were great instructors, but it was becoming obvious that what I needed was a full system with a mainframe microcomputer.

In choosing such a system, I wanted something that was compact and aesthetically pleasing. Front panels and separate keyboards may fit the image of the electronic experimenter's laboratory but they sure clutter one's desktop! I also wanted a complete system because although it puts the payments in one large lump sum, it is cheaper in the long run than shelling out a hundred dollars here for software and another couple of hundred dollars there for an interface or two. But probably the biggest factor in my choice of Processor Technology's SOL-20 was the praise my friends had for this company's VDM and CUTSboard as well as their software including the SOLOS monitor program. Several of them have files full of Processor Technology material!

I am fortunate here in Toronto as there are three computer stores that sell the SOL-20. All were very helpful and their prices were very close. Here again I relied upon the advice of a friend who had dealt with them and chose The Computer Place on Queen St. West here in Toronto. I found their after service advice invaluable and they checked my results twice when my troubleshooting ability failed.

The kit came packaged in the original air cargo container. The flight crew could have kicked this well packaged box safely out the cargo door without doing any damage! However, I was a bit discouraged to find a revision notice right on the outside of the shipping box. What lay ahead?

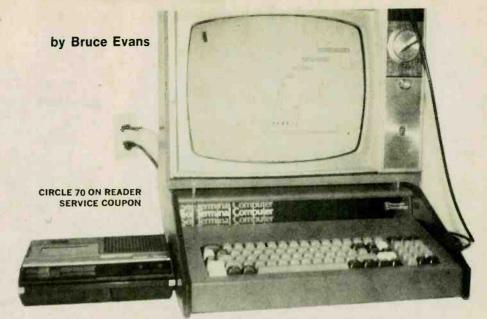

## The Hobby Computer... One SOLution

A user/builder report on the Processor Technology SOL-20 home computer


The individual components were all of excellent quality. Most were made in the U.S.A. The PC boards were double sided, had solder masks and plated-through holes. More than enough Texas Instruments' sockets were included for the I.C.'s. One puzzle was that all the components were grouped and placed in numbered "zip-lock" plastic bags but no code to the numbering was included.

For instructions, I was expecting a schematic and a bag of components but I was very pleasantly surprised.

The manual is huge and very well organized. It is not quite in the Heathkit category but still darned good. There is a section very clearly giving the theory of this computer and an excellent set of schematic and construction diagrams. All the software included in the SOLOS' "personality module", which acts as a firmware monitor, is clearly documented. Unfortunately, the BASIC-5 included is not.

The assembly instructions were well thought out and follow a logical plan, with tests carried out as each phase of construction progressed. One failing of the instructions is that it is stated than an oscilloscope is optional and that the function testing can be done with a VOM. I found that not only is a scope mandatory, but that I needed the 50-MHz Hewlett-Packard oscilloscope in the lab of the local community college since a 10-MHz bandwidth was insufficient.

Construction. At this point, I would like to give two construction hints that I have developed and which were very helpful in building this kit. There is a lot of detailed checking of very dense PC boards before and after soldering and for this I have always used a stamp collector's light with magnifying lens. These can be purchased quite cheaply

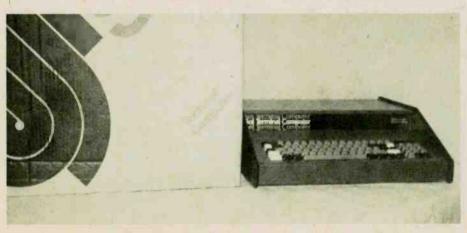

The people at Processor Technology certainly don't skimp on the packaging. The SOL-20 arrives in a massive case that belies the size of the computer kit that is inside of it.

## @/@ SOL 20

at any philatelic supply store. Also I use a soft nylon toothbrush to clean off the board after soldering to remove stray splatters of lead that can cause solder bridges. It works quite well.

Assembly starts with the power supply. It is self contained and very compact. The fan is much quieter than on other computers and is unnoticeable when the chassis is closed. On the PC board, a small modification had to be made to desensitize the "crowbar" circuit protecting against a power surge. Interestingly, a similar circuit was demonstrated in "Kilobaud Klassroom #6."

There is very little point to point wiring as snap-on connectors and two cable assemblies are included. Amphenol RF connectors are supplied and are of the highest quality. All voltage tests were passed with honors.

The keyboard came pre-assembled, and I was disappointed at missing the chance to build it. The store informed me that there had been too many construction problems with it. As you can see, it has a separate calculator type, keyboard which duplicates the numbers on the QWERTY keyboard but is simpler when entering numbers. Again, all function tests were passed.

The 16K RAM board comes as a "semi-kit". This means that it is assembled, but jumpers have to be added or removed to create the options that you need. The board is not burned-in. but two programs are included to do this. Unfortunately, neither is on cassette or paper tape and must be entered manually. More annoyingly, both these programs require additional RAM to operate, and must be located at address 0000. This doesn't allow the use of the RAM on the main PC board, which is addressed in the high area of memory for the use of the monitor program and cannot be readdressed. You will have to borrow a working memory board which is properly addressed from a friend or the store where you buy the kit. Some people may nitpick that this particular memory board has dynamic rather than static chips, but the day is long gone when the CPU had to halt to allow refreshing and the average hobbyist will not be held up by the refresh time.

The main PC board was the major task. All ICs were socketted except two where there wasn't enough room. There are repeated cautions in the manual about the handling of MOS devices, but I found that using the hottom of the chassis as a work surface

BAUD RATE I6K RAM BOARD DIP SWITCHES DIAGNOSTIC SOCKET The SOL-20 is well laid out. There are a number of slots additional for memory boards. The power supply is behind the monitor output jack SOLOS MONITOR and cooling fan. BOARD SERIAL / PARALLEL I/O PORTS OUTPUT TO MONITOR

with the power supply plugged in provided a good grounded work surface and the fan kept the solder fumes away.

Here is where I encountered the necessity of a good oscilloscope. The clock and VDM circuits both passed their tests on my VOM, but the VDM refused to work. A shorted disc capacitor in the clock circuit proved to be the culprit, but this could only be traced by examing the waveforms. Also, the value of resistor number 80 had to be decreased to 270-ohms to increase the sync amplitude on the video output to enable it to be displayed.

Interfacing. I used a "Pixie-verter" to interface to an old T.V. I chose this method mainly because it was cheap but it also allows me to attach the computer to another T.V. without difticuly. Furthermore, most old TVs (the ones favored by hobbyists) lack schematics and have "hot chassis" which makes patching one's computer directly to the video amplifier circuit rather hazardous both to man and machine. I also tried the "Waterloo Modulator" featured in the January 1978 issue of Byte. This uses a 7413 to create an oscillator but the display was not as sharp. Another possibility I considered was a UHF modulator, but most old TVs don't have UHF tuners. Theoretically, a UHF modulator would not give RF interference, but my Pixie-verter doesn't seem to cause problems. However, the computer itself does cause considerable interference, which I believe is from the power supply even though it is shielded and well grounded. For this reason it is best to keep both your monitor and cassette as far from the computer as practical.

The chassis is of very heavy grade metal and sturdy. As I mentioned before, I used this as a grounded work surface. However, I feel that the solid walnut ends should be optional. I don't know the current price of walnut but

I would have preferred to have seen the money going for more hardware or a larger version of BASIC.

The backplane board is the equivalent of a motherboard but has only 5 slots. This does not present quite the hardship it sounds, as the VDM module and all I/O circuitry are on the main PC board and do not require space. Sockets are included for all five slots and a diagnostic socket is used on the top of the backplane board and can be used either as a sixth socket or for an extender board.

Unfortunately, their diagnostic socket is not the same quality as the other sockets. Mounting the backplane on the chassis was not an easy job and it is necessary to remove it if you want to remove the main PC board for servicing. Perhaps Processor Technology's designers feel that their products never need servicing!

Once the construction was finished, I had some difficulty loading BASIC from a cassette and my VDM had a "nervous breakdown" during the burning-in period. At this point, I found the service at the Computer Place, where I had bought the kit, to be excellent and the fault was detected and repaired in just over a week.

I learned a great deal about computers by constructing one and found the experience a lot of fun. As a "hardware man" I have many plans for the future of my SOL. I am planning a circuit to create a typing sound when information is entered on the keyboard, and a bell sound at the end of the line. Heathkit already uses such a circuit and it makes data entry easier for a person used to a standard typewriter. I also plan to build the modem described in the November 1977 issue of Kilobaud. Always remember that as long as you are still building, you can counter the inevitable question of: "But what's it good for?" with the answer, "Well, just wait until I have everything finished". You never will!





This DXer's delight can pluck a flea-powered station right out from under the nose of a clear-channel giant

OW WOULD YOU LIKE TO tune to a "dead" part of the broadcast band, flip a switch, and suddenly find it's jam-packed with stations? That's exactly what happened to us when we tried the Palomar Engineers' BCB Loop Antenna System!

We connected everything togetherthe loop antenna system and a budget receiver-set the dial to the high end, between stations, so we could hear how the loop antenna first affected the reception of interstation noise. We expected the noise would give us some idea of whether the antenna system actually had "gain". Problem was, the instant we flipped the antenna system's power switch on, the radio was no longer tuned to a "dead spot;" rather, we got a signal booming in like the transmitter was out the back door.

Tuning the receiver told us we were not going to find any "dead spots," because the high end was filled with DX we'd never heard before. To make certain some unusual skip condtion wasn't playing tricks, we turned off the Palomar loop antenna system and the high end went almost dead as the proverbial doornail. Where we had heard S3 to S7 signals, we could no longer hear anything but noise-there wasn't a trace of a signal even with the receiver's BFO turned on.

Talk about digging out signals from under the noise. The Palomar loop ans



The single transistor-radio type battery used for the power supply is secured to the rear apron with a U-clip. Current drain of the internal amplifier is very low and the battery should last many months, if not its shelf-life depending on use. The UHF connector is the amplifier output.

tenna was digging out signals we didn't even know existed!

Maybe if we had a longwire antenna we would receive those magical signals we received with the Palomar. But in this age of apartment houses with sealed windows, condominiums where you can't hang anything out the window, townhouses where any form of wire or antenna brings petitions of protest from the other side of town, and private homes with backyards no larger than a postage stamp, the longwire antenna is fast becoming a legend from the golden days of radio. Most BCB DXers are relegated to a piece of wire lying on the floor, or concealed under the carpet, for a skyhook.

**Palomar Engineers** Loop Antenna

The Palomar Engineers BCB Loop Antenna System has come to the rescue. The system consists of two separate devices. The first is a loop amplifier: a metal cabinet 71/4 x 6 x 21/4 inches that houses a broadband preamplifier, tuning capacitor, and power switch. The 9-volt battery power supply mounts on the back adjacent to a standard coaxial connector used for the output. The top of the cabinet has a phone-type jack mounted in the center of a 360° compass (which is also centered on the cabinet's top.)

The second part of the system is a somewhat oversize loop antenna assembly that plugs into the loop amplifier. The loop can be continuously rotated through 360°, or tilted ±90° from horizontal. A tilt scale is part of the loop assembly. The rotational scale is the 360° compass on top of the loop amplifier. The loop itself is but a small part of the total loop assembly; but the oversize hardware permits the loop to be positioned by the user without "hand effects" on the loop antenna it-

## PALOMAR LOOP

When the antenna is plugged into the loop amplifier, the tuning capacitor (which is built into the amplifier) tunes the coil to the desired frequency or narrow range of frequencies, thereby providing the "amplification" associated with high-Q tuned circuits. Though the amplifier itself is rated by Palomar for a nominal gain of 20 dB, we attained signal improvements of 3 to 6 S-units, which represents a gain range of 18 to 36 dB—assuming the accepted value of 6 dB per S-unit.

The "extra" 16 dB of gain (63 dB -20 dB) is actually the result of tuning the loop, and the gain is realized in comparison with reception from a receiver having a built-in BCB antenna.

Peak or Null. For some unaccountable reason Palomar stresses using the device for nulling a strong signal in order to reduce interference to a weak signal, and both their instructions and descriptive literature concentrate on "nulling." This might reflect, the fact that they make loops for the 160/80 meter amateur radio bands, 150-550 kHz VLF, 40-150 kHz Loran, and 10-40 kHz OMEGA bands, where nulling of a strong local groundwave signal might be required in order to receive a skywave signal. (A loop antenna produces sharp nulls on groundwaves, but the nulls are broad or nonexistent on skywave signals. This permits local interference to be attenuated, or eliminated, while DX stations can be heard from all directions.)

But when it comes to BCB DXing it's the gain of the system that really pays off. It is possible, however, that some DXers might experience interference by a local station while monitoring DX, so we'll cover our results in both peaking and rejecting signals.

Hook up. The Palomar Loop Antenna system is connected to the receiver with a short length of coaxial cable: anything in the thin category such as RG-58 or RG-59 will suffice. Use the shortest possible length. If the receiver you're using for BCB DXing has a coaxial antenna jack simply use a matching plug on the end of the cable.

It is more than likely, however, that the shortwave radio, or hi-fi AM/FM receiver you're using has screw terminals for the BCB or AM antenna connection, so simply solder a set of solder-lugs to the free end of the coaxial cable.

If your radio/receiver has screw terminals it's possible that because of the extra-high sensitivity of the Palomar

antenna a certain position(s) of the loop will cause "feedback" if the antenna system is mounted directly on the receiver, or immediately adjacent to the antenna terminals. The "feedback" is evidenced either by receiver blocking, or a loss of sensitivity in the receiver coincident with a whistle caused by self-oscillation of the system. Simply moving the Palomar unit a foot or so away from the receiver will eliminate the "feedback."

Set the loop antenna so there is no tilt, as indicated by the 0° index of the loop assembly pointing straight down. Set your receiver's tuning to a desired station, or to a "dead" frequency where you believe a station to exist. Switch on the loop amplifier and then adjust the loop amplifier's tuning knob for maximum received signal strength or noise. If you tune for maximum noise readjust the tuning knob after you have a station tuned in. Then, holding the loop's metal bracket and not the loop itself, rotate the loop assembly for maximum received signal strength.

If your receiver has an S-meter you will see an increase in the meter reading. If your receiver does not have an S-meter you will hear the signal increase in volume only if it was very weak—or not received—without the Palomar. If the signal was strong to start with, you probably will hear no effect from the speaker or headphones because the receiver's AGC (automatic gain control) will absorb the extra gain by reducing the receiver's gain an amount equal to the gain provided by the Palomar system.

Now assume the DX station you want to receive is adjacent to the frequency of a strong local broadcaster.

This is where you use the null feature. Remember, nulling only applies to a groundwave signal; you cannot null a skywave in order to receive another skywave.

One of the easiest ways to null is to first peak the Palomar to the undesired local signal; then rotate the loop for minimum reception, followed by adjusting the loop's tilt for additional null. With a little practice you can simultaneously adjust position and tilt to almost instantly null a station. The null is very deep; we have virtually eliminated all traces of a local broadcaster using a completely shielded Palomar-to-receiver input connection. When the receiver has screw terminals. some signal will be picked up by the screw itself and the short length of unshielded coaxial wire connected to the screw, but the pickup will be insignificant. The null is exceptionally deep, and we have actually extracted a skywave signal out from under the sideband interference of a local station by simply nulling out the local. (It really works!)

The nulling can also be used to reduce or eliminate local electrical interference. Say the motor or ignition system on your neighbor's oil burner, or a faulty flourescent light, is giving you broad-spectrum noise—hash all across the band. Under certain conditions (it doesn't work every time) you will be able to null out the electrical interference. We even got rid of the hash generated by a sewing machine motor in the next apartment.

Summing Up. If you already have a longwire outdoors there will be little, if any, advantage—unless you can util(Continued on page 86)

To null out an interfering groundwave signal the loop can be both rotated and tilted. Skywave signals are not affected when the loop is tilted. Loop tilt can also be used to reduce many forms of local electrical noise (interference).

### e/e assembles the...



## **Heathkit AD-1304 Audio Processor**

#### Hi-Fi add-on stretches your system's dynamic range and filters out some unwanted noises

THERE ARE CERTAIN CONDITIONS when the dynamic range of recordings or live broadcasts is limited to prevent overmodulation of the recorder or transmitter. There are also times that a relatively high background noise could be sobtrusive. For the stereophiles for whom the occurance of dynamic range limiting or background noise might prove annoying, the marketplace offers several types of audio processors which expand the dynamic range and/or reduce high frequency background noise. One of the devices that provides both dynamic range expansion and high frequency noise reduction in a single modular component is the Heathkit Model AD-1304 Active Audio Processor.

The AD-1304 is a line-level device that connects between an amplifier's or receiver's preamplifier output and main

amplifier input. This is generally accomplished by using the amplifier's tape connections and the associated tape monitor switch (same way you'd switch any other line-level accessory). The tape monitor connections are simply moved to the audio processor.

Three Functions. This in-line connection permits the AD-1304 to provide any combination of three functions: dynamic range expansion; noise reduction: high frequency filter. A separate on-off switch is provided for each of the functions.

The dynamic range expansion is applied to both the signal peaks and the lowest volumes in such a way that the normal dynamic range of the signal source is increased by approximately 7 dB at midband frequencies. Figure 1 shows how this is done.


Figure 1 is a picture directly off a spectrum analyzer oscilloscope. The horizontal sweep is calibrated from 20 to 20.000 Hz. Each major vertical division represents 5 dB; each minor vertical division is 1 dB. An unprocessed normal signal dynamic range of 20 dB is indicated by the two essentially straight lines two major divisions from the top and bottom. To this "normal" 20 dB range we apply the Heathkit dynamic expansion. The maximum signal is expanded approximately I dB at midband. But note the bass and high end are below the reference maximum level. The average between the lowhigh extremes and the midband is about 3 dB. Added to the 1 dB actual midband expansion, the effective value is about 4 dB.

The low level signal is attenuated 3 dB below the "normal" level at the midband by the expander. In total, the expander increases the dynamic range about 7 dB over most of the midband.

Noise Reduction. The AD-1304 is designed to suppress continuous high frequency noise. It does not suppress clicks and pops, such as you might hear from a dusty or mishandled record, or even radio static.

Noise suppression is accomplished by passing the signal through three triggered bandpass filters with center frequencies of 5 kHz, 9 kHz, and 13 kHz. The AD-1304 continuously monitors the program for high frequency content in the range of each filter. When there is no program content the filter is normally in-circuit, and the higher frequencies are attenuated, starting at about 2 kHz. Since continuous noise (hiss) are high frequencies it is attenuated by the bandpass filters.

If there is high frequency program information within the range of a filter it is sensed and the filter is shorted, al-

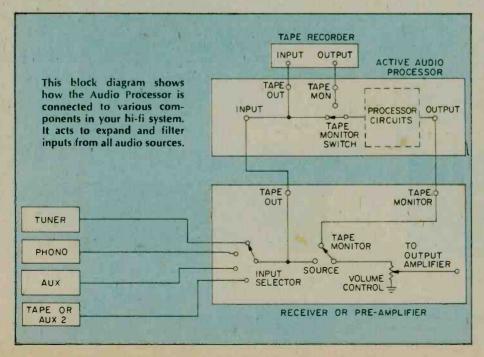

## AUDIO PROCESSOR

lowing the frequencies within the range of that particular bandpass filter to pass through to the output unfiltered.

Each filter continuously samples the signal, opening and closing in step with the program information. This is dynamic high frequency filtering, in contrast to a fixed high frequency filter that attenuates high frequencies regardless of the program signal's frequency distribution.

Figure 2 illustrates the dynamic noise filter. The more-or-less flat line is the overall response to high level signals in the range of 20 to 20,000 Hz. The roll-off, which starts at about 1.5 kHz, is the maximum filtering of high frequencies, obtained when there is no high frequency program information to "short" the bandpass filters. You can actually see the nulls of the center frequencies at 5k, 9k and 13kHz.

Fixed Filter. For those really tough noise problems, such as an old, worn 78 rpm record, the AD-1304 provides the fixed high frequency filter shown in Fig. 3. The straight line is the overall response with the filter switched out. Switched in, the filter is 3 dB down at about 7kHz, and 10 dB down at about 15kHz. This is what's known as a "mild" filter, meaning it can be used with most program sources, even modern recordings, and will not remove so much high frequency program information (if recorded) that the signal gets an overall "muddy" sound quality.

Adjust To Taste. Both the expander and dynamic filter have front panel sensitivity adjustments that allow the user to establish the optimum value of expansion and noise suppression for a particular system, or recording. Screwdriver adjustments on the rear apron for both the left and right inputs allow the user to match the sensitivity to the normal program line level.

Once connected to the associated amplifier, each function can be individually switched in and out, or the tape monitor can be switched in as the signal source for the processor. With all processing switched out the overall frequency response is +0/2 dB 20-20kHz at a distortion no higher than 0.1% THD.

Build It Yourself. The AD-1304 is available in kit form for \$199.95 (mail order price). Most of the circuit is on printed circuit boards: There is a large "mother" board with sockets for plug in expander and control/bandpass filter modules which are also printed circuit assemblies. A separate meter assembly is provided for tests and adjustments. The meter "panel" is internal and not normally seen when the cabinet is secured.

There is extensive user alignment and adjustment. Not difficult, but time consuming and requiring considerable care; just don't rush through the adjustments if you want optimum operation.


Performance. The expander does just what it's supposed to do: namely, expand the dynamic range. However, limiting during mastering is performed on signal peaks, not the average program level, yet expanders expand average program level. This produces minor volume surges which do not exist in the tape-to-record-master process.

As for the noise filter, it also works as claimed. If you have a very old tape recording with a relatively high hiss level, or are listening to a very weak FM station, the noise filter noticeably reduces the high frequency noise.

As with most expanders and noise reduction systems the Heathkit AD-1304 is somewhat limited in application if you are interested in high fidelity sound. But if you want larger than life dynamic range, and have signal sources that require "hiss" reduction, the AD-1304 might fill your needs.


For additional information on the Heathkit AD-1304 circle No. 1 on the reader's service coupon.

Figure 1




This oscilliscope photograph shows the AD-1304's dynamic range expansion, which is explained in the text on preceeding page.

Figure 2




Here you can see the nulls of the 5-, 9and 13-kHz dynamic noise filters. The top line shows when they are not activated.

Figure 3



This 'scope shot shows how the high frequency filter affects the top end of the spectrum. The signal is 10dB down at 15 kHz.



The expander and three filter modules plug into the main board assembly. The test meter is built into the cabinet and is used for circuit alignment during construction and for circuit testing.

CONNECTIONS TO RECEIVER OR TAPE RECORER AND SWITCHED AND UNSWITCHED AC OUTPUTS

Since the processor will utilize a receiver's tape connections, the tape connections are moved to the processor along with the tape/source monitor switch. It can be built for 120 or 240 use.

AMPLIFIER

## The Complete Idiot's Guide to Becoming a Lid

(or how to be a lousy operator)

by Thomas R. Sundstrom W2XQ

THE ASTOUNDING GROWTH in the number of amateur radio licenses issued in the past few years has resulted in a virtual logiam on the bands. As a byproduct of this overcrowding, good operating practices are vanishing as rapidly as bottles of '64 Laffite Rothschild.

A poor operator is known as a "lid," and a lid is to be pitied, and hopefully educated, but not tolerated. If the educatory process is approached with tact, the errant operator's practices can be amended without alienating him or her. In this light, we bring you The Complete Idiot's Guide to Becoming a Lid.

On Tuning Up. Don't bother using one of those ridiculous oil-filled dummy loads for tuning up your transmitter. The only people who advocate their use


are the people who manufacture them. The \$20 to \$30 which you might waste on them could buy a lot of beer. Instead, find the busiest frequency on the band, be it CW or phone. Since most of the activity is taking place here, it makes sense to load up your rig in the neighborhood in which you'll be operating, right? To allow for temperature variations, take at least ten minutes to accomplish tuneup, throwing a test tone about every 20 seconds or so, to allow for drift, and to let the other ops know that you're there.

On Calling CQ. Any frequency within your license segment is fair and legal territory for you to call CQ in. You

don't necessarily have to be concerned with other stations transmitting on the same frequency, since you won't bother them while they are transmitting because they can't hear you.

Never answer another operator's CQ. Where's the challenge in that? You already know he wants to start a QSO. Instead, try calling a CQ right on the same frequency, and see who gets the first response. After all, why shouldn't every day be a contest day?

On CW. Now that you've finally gotten rid of that old manual key in favor of one of the new keyers, you can really burn up the ether with your speed. Always send just a bit faster than you can copy, because chances are the other op can't copy that fast either, and he'll have to ask you to QRS (slow down).

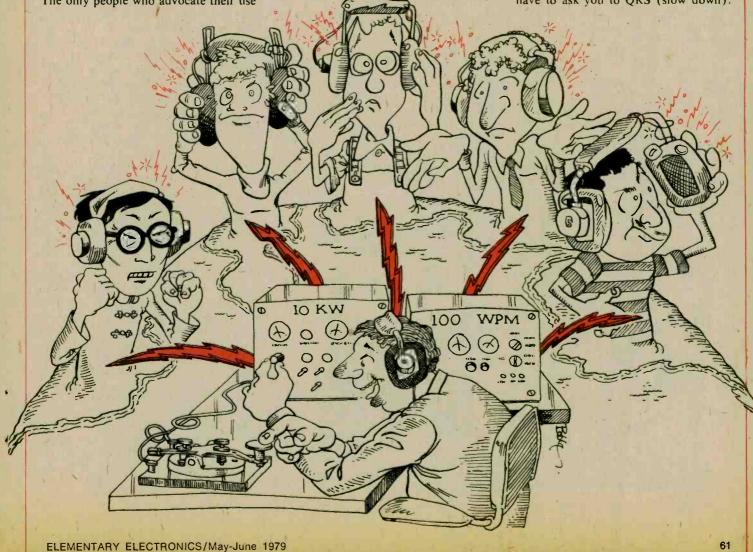

## BEING A LID


It's a lot better, and less embarrassing, than if he asks you to QRQ (send faster). After all, you did spend a lot of money on that keyer.


Since you did spend all that money with the idea of becoming a better CW operator, it's a good idea to stay away from all of those abbreviations and "Q" signals. Nobody understands them, and you get more practice if you spell every word out.

On Phone. Stay away from those international phonetics when sending your call. Tres passé. Something catchy and current is much better. If those foreign ops can't get it, that's tough. They should watch more television.

Remember, there are many more CB'ers than hams, and the CB lingo is now part of everyday English. There's absolutely nothing wrong with using everyday vocabulary on the ham bands. That textbook grammar is strictly kid stuff.

One of the most efficacious methods of "punching through" on the HF phone bands (below 30 MHz) is to turn up your speech compressor to maximum. The splatter will clear out anything within 10 kHz in either direction. Let's face it: if your phone signal is good within its limited 2 kHz bandwidth, it ought to sound five times as good with the additional space. Don't give in to those guys who inevitably will ask you to detune. If their rigs don't have enough receiver filtering, that's their problem, not yours.

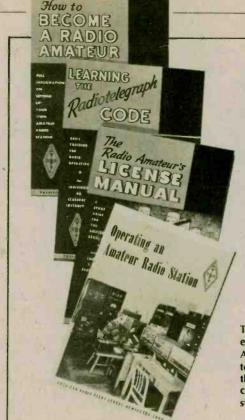



These five ARRL publications, comprise an excellent desktop reference series for the Amateur. From basic principles of radio, to the finer points of station operation, these books are the answer to avoiding becoming what is known as a "lid." An outstanding bargain even at twice the price.


On Working DX. Don't wait until that DX station finishes calling CQ before you start answering. Start calling him as soon as you have his call down. He may have a local frequency manager listening on the side, who is taking down the calls of the stations answering the CQ. in order to have a list for the DX station to reply to. You can be first on the list, so why wait?

Regardless of how many other stations might be waiting to work him, always get the QSL routing information from your DX contact. Not only do you get the information you need, but you perform a service to the other operators waiting on frequency by allowing them to copy it also. Making the DX station repeat it a few times is always a good practice. Sometimes their English ain't too cool.

On VHF\_FM Repeaters. Always initiate a conversation by calling CQ. It's foolish to announce that you are listening on the frequency, because if you're not talking, it's obvious that you are indeed listening. Calling CQ will identify you as an A-1 HF operator.

Once you have the repeater, keep the pauses between transmissions to an absolute minimum, because there's always the possibility of losing the channel to someone else. First come, first served. Also, don't be misled by those people who yell "emergency!" That's just a ruse to get you off, and get themselves on. If there's a real emergency, they can use the landline. That's what it's there for.

Conclusion. Obviously, this has been a guide towards what not to do, and you can probably add to it based upon your own experiences. It is truly unfortunate that many operators substitute dollars and cents for common sense, and kilowatts for milliwatts when the latter, in each case, is sufficient to accomplish the task at hand. Remember, the whole world is listening to you. Think about it the next time you fire up the rig.





The Radio Amateur's Handbook, and Understanding Amateur SSB are excellent examples of the educational material available.

THE MOST ANNOYING PROBLEM faced by DXers and SWLs is the image. Unlike harmonics and other spurious signals produced by the transmitter, an image is not real—it is produced within the receiver itself. It causes novice SWLs to report stations on erroneous frequencies, and creates additional interference for DXers. You can't always cure them but every listener should be able to tell these phonies from the real thing.

Superheterodyne. All images are the result of superheterodying, i.e. the mixing of two frequencies in a circuit to produce two other frequencies—the sum and difference of the two original frequencies. If you mixed WWV's 2500 kHz signal with Voice of America's 6190 kHz Greenville transmission, WWV and VOA would appear on 8690 kHz (6190 plus 2500) and 3690 kHz (6190 minus 2500). All modern radio receivers take advantage of the superheterodyne principle to provide more efficient and less expensive amplification circuits.


Every receiver contains its own built in mini-transmitter known as a "local oscillator." In the simplest radio, whatever frequency you are tuned to the local oscillator will operate exactly 455 kHz higher. Thus, if you are tuned to Radio Surcolombia on 5010 kHz, your local oscillator would be on 5465 kHz. The two are combined in your receiver's "mixer" circuit producing, of course, that desired 455 kHz "intermediate frequency" (usually referred to as the "IF"). From there on, all amplification circuits in the receiver (except those in the audio section) can be pre-set to this fixed IF. Equally important, selectivity (the ability to separate the desired signal from those on adjoining frequencies) is considerably better at 455 kHz than on higher frequencies.

Suppose, while you are listening to Radio Surcolombia on 5010 kHz (and your local oscillator is at 5465), Radio Moscow has a strong signal on 5920 kHz. 5920 just happens to be 455 kHz above 5465 so if it mixes with your local oscillator it will also produce an intermediate frequency of 455 kHz. In other words, Radio Moscow's 5920

Like mirages in the desert radio stations are not always where they appear to be signal will show up as an image on 5010 kHz. Note that resultant frequency relationship—this type of image always shows up 910 kHz (two times the 455 kHz IF) below the real frequency. Therefore, your local oscillator and VOA's 6190 signal can produce a 5280 kHz image white WWV's 2500 kHz transmission might even show up at 1590 kHz on the standard AM band.

Another Kind Of Heterodyne. So far the kind of heterodyning process we've talked about has involved only radio frequencies. But there are also audio heterodynes. If you are tuned to BBC Ascension Island on 6005 kHz there may be interference from Radio Reloj de Costa Rica on 6006 kHz. No one need a pocket calculator to tell them that the difference between these two frequencies is 1 kHz 1000 Hz)-well within the audio range. When this (notso-super) heterodyne reaches the receiver's audio circuit it will be amplified and emerge from your speaker or headphones as a very annoying whistle. To distinguish it from other forms of the heterodyning process, the audio heterodyne is usually referred to simply as a

Just as real interference can cause a

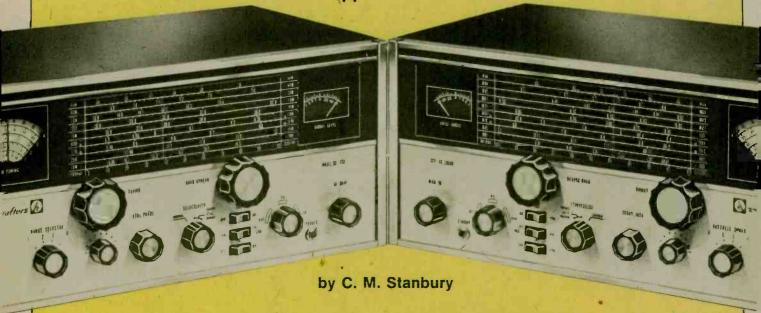

## IM AGES

## (a) (a) IMAGES

het, so can image interference—but there is one important difference. When the local oscillator produces interference on the frequency to which you're tuned by mixing with a strong station on another frequency, the resultant het will vary in pitch as you tune across it—unless the image is caused by a pulse modulated station such as Loran or shortwave radar.

If, while listening to Radio Surcolombia on 5010 kHz, there is a het, turn the dial slightly. If the het varies in pitch, it is being caused by the Radio Moscow image (or some other strong station on 5920). If the het remains constant then there really is a second station within a few kHz of 5010.

Some Strategy. Short of actually modifying your receiver, or buying a new one, your most important defense against images caused in your local oscillator is the antenna tuner knob. Determine which antenna setting is best for each "band," or more precisely the best setting for each MegaHertz. If you find two stations and know that one is an image but don't know which, the real signal will be strongest at the proper antenna tuner setting while the image will be strongest at a slightly different setting.

The next step is to eliminate the het caused by that image—and, yes, you can. Tune the dial very carefully until the pitch of the het drops to zero. Unfortunately, most inexpensive receivers are a bit unstable so you may have to repeat this process every few minutes. However, if the image is caused by a broadcast station or even some utility stations with voice modulation, the worst of the interference will be eliminated so it is worth the effort. If the image is from radioteletype, facsimile, etc., the victory will be less clear cut.

Even if an image doesn't cause interference it can, as noted at the beginning of this article, lead you to report a station on a false frequency. Any time you hear a broadcast station about 910 kHz below a regular shortwave broadcast band (see our chart) check that band to make sure you can't find this same station with an even stronger signal. A station will always be strongest on its real frequency.

Overload. Sometimes signals will come in so strongly that a sensitive receiver cannot handle them. Under these circumstances, mixing will take place independent of the local oscillator—that hypothetical case of WWV (2500) and VOA Greenville (6190) producing images of 8690 and 3690 kHz. That


The Shortwave	Broadcast Bands
3200-3400 3800-4000	Shared with utilities

3200-3400	Shared with utilities
3800-4000	Shared with amateurs
4750-5060	Shared with utilities
5950-6200	
7100-7300	Shared with amateurs
9500-9775	
11700-11975	
15100-15450	
17700-17900	THE RESERVE OF THE PARTY OF THE
21450-21750	
25600-26100	

If you hear a broadcast station approximately 910 kHz below one of these bands, it may be an image. The frequencies listed on the chart shown above are in kiloHertz.

sort of extreme frequency spread usually occurs only with standard AM stations—if you lived in New York City you might find WQXR (1560) mixing with WMCA (570) on 990 (1560 minus 570) and 2130 (1560 plus 570)—ar I even then it may mean that small amounts of unwanted direct current are getting into the "RF" circuit" (see block diagram). If you use an external antenna, make sure it isn't "grounded." Check for bare antenna wires touching tree limbs, or insulators which have become saturated with moisture after several years use.

More difficult interference problems from overload images are the result of more complex mathematical relationships which can be expressed in multiples (called "harmonics") of 'he frequencies involved. If you are receiving very strong signals from VOA Greenville on 6190 and Radio Canada International 6140, they might produce an image on 6240 kHz (2 x 6190 minus 6140). This calculation is derived algebraically from the relationship (6190



This block diagram shows how an image signal is formed. It will always be twice the intermediate frequency below the station. Double conversion receiver may cure image.


minus 6140) plus 6190. Note the difference between the image frequency and the real frequency is relatively slight so your antenna tuner control won't help.

To make things still more complicated, such mixing may not be occuring in your receiver or antenna at all. If two transmitters are at the same location, a technical malfunction can cause mixing right at the transmitter site (in which case it is usually referred to as "cross-modulation." We once found VOA Greenville transmissions on 15140 and 15280 interfering with WWV on 1500 kHz (2 x 15140 minus 15280). Neither 15140 nor 15280 were anywhere near strong enough to overload our receiver so the Greenville signal on 15000 was obviously real. On medium and long wave, cross-modulation occasionally occurs in the ionosphere (the "Luxembourg effect"). This has been extremely rare in North America due to the absence of super-powered transmitters which can quite literally overload the ionosphere. We have not seen the Luxembourg effect reported on short wave in any part of the world.

Still More Complex. Certain other minor receiver defects can create some outrageously exotic mathematical combinations. Minute radiation from the 455 kHz intermediate frequency amplifier can mix with incoming signals, and the local oscillator may radiate at its second harmonic. Suppose a listener in the Buffalo, N.Y. area is tuned to 1495 kHz. His local oscillator will be at 1950 kHz (1495 plus 455) and its second harmonic will be at 3900 kHz (2 X 1950). Meanwhile, there is a powerful local (WKBW) on 1520 kHz and another (CHOW) on 1470 kHz. If WKBW overloads the receiver, we have the equation; 3900 - (1520 + 1470 +455) = 455 kHz. Therefore WKBW and CHOW will appear on 1495 kHz. Fortunately such images, which can be detected via the variable het test previously described, are usually weak and generally limited to the standard AM hand

Then there are the new crop of synthesized frequency receivers. These use multiple local oscillators some of which deliberately radiate harmonics. Each model has its own particular arrangement of intermediate frequencies thus we cannot deal with them comprehensively here. However, note that overloading can be a major problem with the less expensive models. On the other hand, simple superheterodyne, local-oscillator-caused images are virtually eliminated by dual conversion.

Buying A New Receiver. When it (Continued on page 87)

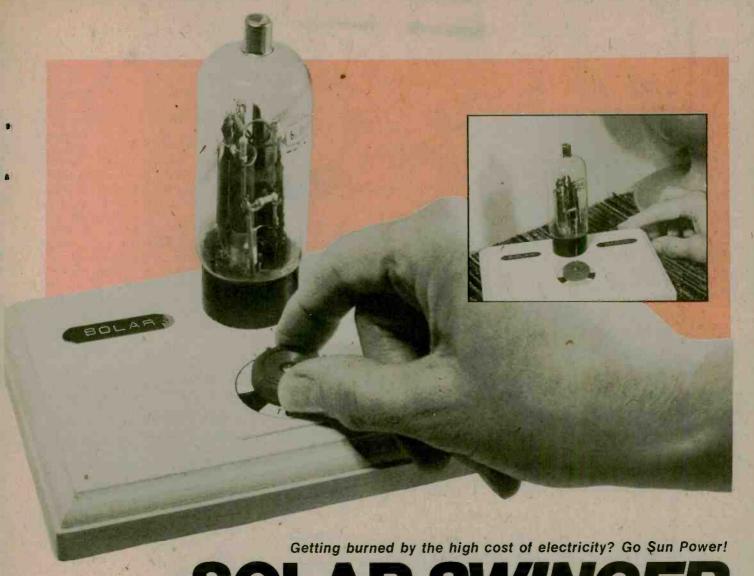

### SOLAR SWINGER

Homer L. Davidson

AVE YOU EVER seen a model ship inside a bottle? The next logical step is to build a small radio inside of a radio or TV vacuum tube! We call it the Solar Swinger and it has no on/off switch, batteries or power supply. If you want to turn the Solar Swinger off, just place a cap or hood over the tube. You may want to let it play all the time-it doesn't hurt a thing. No need to worry about batteries running down, for the little radio is solar powered. It will operate in the sun, shaded daylight or under a desk lamp in the evening. Of course, the radio won't blast your ear drums with music, but you can listen to local AM broadcast stations with ease.

Tube Preparation. Select a defective radio or TV tube with a bakelite base. The larger the glass tube, the greater building area for the small radio components. An antique radio tube is ideal, but not necessary. If you can't find one in the junk box, check with your local

Radio-TV shop—they may throw out several hundred of these old tubes every year.

There are many old power output tubes available, such as 6L6G, 6C6G and 5U4G. Don't select a 6BK4 type as you cannot remove the top metal anode from inside the glass envelope. You may use a large tube (6LQ6) with a glass base and then mount it on top of a black tube base. Pickup five or six old tubes to practice on.

Before attempting to remove the bakelite base from the tube, let air into the bottom of it. All radio and TV tubes operate with an internal vacuum—the air having been pumped out. A small glass seal is located at the bottom of the tube.

Always wear a pair of gloves when working around glass or warm components.

Now you want to let air back inside the tube. Break off the black bakelite center key locator between the tube side the tube. Break off the black bakelite center key located between the tube prongs. You should see the pointed glass seal. Take a pair of long nose pliers and break off the glass tip. You may hear a rush of air, or see a couple of white areas form near the bottom of the tube envelope.


To prevent glass pieces or excess solder from falling on the floor or work bench, do all of the glass preparation inside of a large pasteboard box.

Next remove the soldering iron tip from a 150 or 250 watt soldering gun. Take a six-inch piece of number 14 copper wire, (you can remove the insulation from a piece of number 14 romex or a single conductor electrical wire for this purpose) and form a loop shaped soldering element. Wrap the bare wire around the base of the tube next to the bakelite base area and insert about one inch into the gun tip and bend over. Tighten down the soldering iron nuts-real tight. After cutting a couple of glass bases you may want to snug up the soldering iron nuts for a greater transfer of heat. Keep the copper loop close to the gun tips so






Break off the black tube-locator pin and the glass tip with some long nose pliers.




Note the clean easy cuts this technique produces. Make sure you have a back-up tube.



Form a loop of copper wire that fits snug around the tube and into a soldering gun.



The four copper support wires are soldered into the pin bases. The components are soldered and glued to these supports.



Put the loop over the part of the tube you wish to cut and hold the tube firmly. Wear gloves to keep from burning yourself on the hot glass. Next apply heat to the loop and rotate the tube until the glass cracks.

the loop will heat up faster. Pinch it close together, and snug, clear around the tube with a pair of long nose pliers. You have now constructed a copper wire loop to replace the soldering iron tip.

Slip the wire loop over the end of the tube base and press the loop together at the ends—but not so close as to touch. Now hold the tube in the left hand and soldering gun in the right. Very slowly turn the vacuum tube inside the heated loop. Within a few minutes you will hear the glass crack and break in a perfect cut at the base of the tube. Some glass tubes take longer to break than others. In the meantime you may smell a hot bakelite odor from the wire loop, which is normal. Often the glass will crack clear around and just a tap on the end of the bakelite base separates the two pieces.

If you have selected a tube with a metal cap on top, turn the inside components until the connecting wire breaks off. Be careful not to break the remaining glass envelope, which is very brittle. It's best to cut off the wires connecting the tube elements to the base with a small pair of side cutters. In case the tube elements and mica insulators will not pull through the small opening, use a pocket knife to cut out sections of the insulators. You may have to crush or remove the tube elements in sections. Again, proceed slowly to prevent breaking the glass envelope. If you break or crack the tube envelope, start on another one—one out of three is not a bad average.

If you choose a TV tube with a glass base (6LQ6), press the copper loop around the prongs and against the glass bottom of the tube. Break off the small glass seal between the prongs and let air into the tube. Heat up the soldering gun and rotate the tube until the glass cracks in a round circle. Now break and crush the glass base with the wire tube prongs into little pieces. Be very careful in removing the tube elements, they must be reduced in size until all parts fit through the small opening. You may want to cut and remove each element piece individually until all parts are removed from the tube envelope. Later on, you can glue this glass envelope over a separate bakelite tube

It's best to cut out three or four tube envelopes. After removing the tube elements, choose the best one. If the glass edge is a little irregular, don't worry; when placed upon the black base the area will be covered with rubber silicone cement and will look like it belonged there all along. Now wash out the white and dark areas inside the glass envelope.

Tube Base Preparation. To remove the remaining glass and connecting wires from the tube base, each tube prong must be unsoldered. Hold the tube base upright and over a pasteboard box. Apply heat from the soldering iron against each prong. Let the excess solder begin to boil and then fling the tube base downward and the excess solder will fall into the bottom of the pasteboard box. Use this method on each tube prong a couple of times to remove all of the solder. After the excess solder has been removed, pull the connecting wires out of the tube base area. You may have to break the glass in several pieces to remove some stubborn connections. Clean out the excess glass cement with a pocket knife and place the tube base with the glass envelope for safe keeping.


Tube Base Construction. Cut four pieces three inches long, of number 14 or smaller copper wire. These four support wires will become tie-in circuit and mounting supports for the small components. You may use any stiff wire for these supports as long as the wire itself can be soldered. Number 14 copper wire will just fit inside the tube pins and solder should be fed up from the bottom terminal. Also, you may solder the wire supports from the top side, down inside the tube base. Place support wires in terminals 1, 2, 6 and 8. Look at the bottom of the bakelite socket and start with Pin #1, to the

left of the center pin. (Although the tube locator pin is broken off you still can see where it was located.)


After all support wires are soldered into position, clean excess solder from each wire with a pocket knife. Scrape off rosin and excess solder down inside the base, next to the support wires.


Place a 6-32 3/4 inch machine screw and washer in the center hole of the tube socket. Slip a nut on the outside of the screw to hold it in position until the socket can be bolted to the wooden base. Temporarily, slip the glass envelope over the support wires to see if they will clear the top area. You may use longer support wires if the glass envelope is a lot longer in length. This may help string out the parts and keep them from shorting against each other. A cut glass envelope from a 5U4GT tube runs about three inches long.

A tube's pin terminal connections (bottom view) are shown. Remember the tie-wire supports are reversed when the tube socket is upright. Scratch a line straight up from the tube locator pin, along the side of the socket, with a pocket knife. Now place a piece of masking tape around it and mark the support wires. You can now solder to your heart's desire. The four supports will be used for component tie points and they are marked upon the sche-



The photo cells are mounted on two sides of the frame. The loop stick fits neatly in the middle of all the components. The transistors are in the base of the tube. matic. Wire support number 8 is used only as a wiring tie-point for the small components. All other support terminals will be tied into the circuit after the tube socket is bolted to the wooden base.

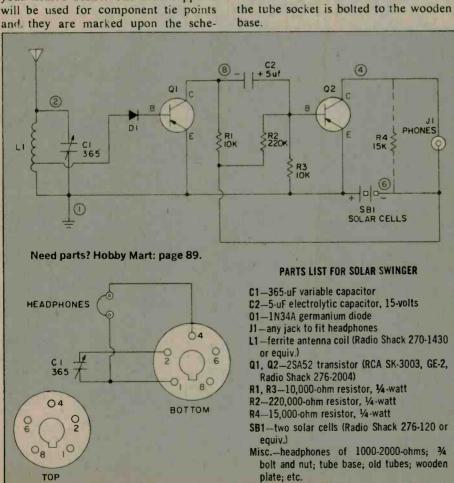



The only wood work needed is to make two large holes in the base. One for the tube and one for the tuning capacitor. A bolt through the base holds the tube in place.

Wiring in the Parts. Mount the antenna coil (L1) in the center of the support wires since it is the largest component. Solder the top wire to pin 2 and the bottom terminal to pin 1. Leave it loose until all parts are soldered and then use a dab of silicone cement to hold it in place. Solder the collector terminal of Q1 and negative terminal of C2 to support wire number 2. Keep the leads fairly short and place a pair of long nose pliers next to the transistor body as a heat sink. The emitter terminals from each transistor will tie to terminal support number 1.


Now solder in all small components to their correct support wire terminals. Place a piece of spaghetti over the collector wire of Q2 and solder into pin terminal 4, if it is long enough. If not, lengthen the terminal wire with a piece of hookup wire. Connect the small diode between the coil tap (L1) and the base terminal of Q1. Slip a piece of spaghetti over the wiring to prevent touching of other components.

Mount the solar cells last—inside the tube area. Be careful to observe correct wire polarity. The positive terminal will solder to terminal 1 and the negative wire to 6. After all wiring has been completed inside the tube socket, double check each component and tie wire before bolting to the wooden base. Now tack the antenna coil (L1) and solar cell into position with a dab of silicone cement.

Base Layout. You may pick up a wooden base mounting plate at any novelty or hobby store. Ours was 634 by 4½ and cost .99 cents. They may come in many sizes and shapes with a higher or lower price tag. Mark the parts layout on the bottom side of the wooden base. The tube socket may be mounted 1½" from the rear and in the center of the base plate. Place a

(Continued on page 94)

## in search of WEdisons

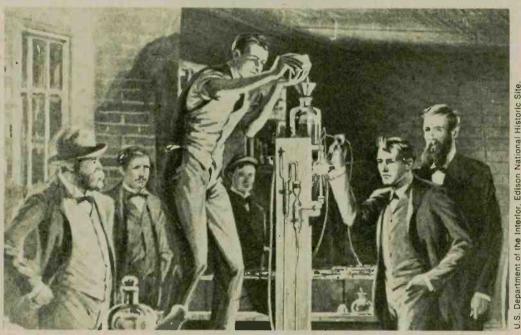

HOMAS ALVA EDISON was one of a kind, and the hero of every kid of the 1930s who made rotten-egg smells, and burned holes in his bedroom curtains with a chemistry set. All over the country, knee-pants test tube shakers dreamed of one day making great scientific discoveries for the betterment of mankind. And indeed some of them did just that, as witness the development of laser technology, plastics, television, and computer science, to mention but a few of the more obvious examples. Scientific progress continues to be made, of course, but something is clearly missing. It's the unique kind of inspired motivation that characterized Edison and other scientific greats of the past.

A year-long "Centennial of Light," an international celebration to commemorate the 100th anniversary of Thomas Edison's invention of the incandescent electric light bulb on October 21, 1879, has a second and equally important purpose: To inspire the youth of today and of the future in the belief that there are solutions to many of today's global problems. The solutions need only to be sought and found, through scientific developments

as well as through social, political, and economic advances.

Thomas Edison, a highly principled inventor-businessman, is the ideal inspirational symbol. As Robert I. Smith, chairman of Public Service Electric and Gas Company, and head of the International Committee for the Centennial of Light paraphrases an Edison biography, "Although Edison led no armies, conquered no countries, enslaved no people, his life and his inventions have influenced the course of history more than any other person in recorded civilization."

The light bulb was but one of more than 1,000 inventions patented by Edison. Other outstanding inventions included: An entire system of electric generation and distribution, the phonograph, the motion picture camera, and equipment that made telephone and telegraph systems commercially practicable. Edison's scientific genius had direct bearing, long after his death, on the development of the modern electronics world as we know it, including invention of radio, television and modern cinematography.


The Centennial of Light, kicked off in September 1978, will go on through-

out 1979. Major elements of the planning are designed to attract students and educators. For example, symposiums will bring selected high school students and teachers to Florida's Disneyworld in February, and university students and professors will go to San Francisco in April.

Science Fairs will be encouraged in elementary and high schools throughout the country. Educational materials and scholarship programs will emphasize the need to encourage young people to pursue scientific knowledge. Other plans in the works include: The showing of special films, television, and radio programs, traveling exhibits, displays and lectures, and even parades.

Among those already planning special programs, events and activities for the Centennial are: The American Association for the Advancement of Science, the Smithsonian Institution of History and Technology, the United States Park Service, the Edison National Historic Site in West Orange, N.J. (the site of Edison's research laboratory), Menlo Park, New Jersey, the city in which Edison conducted his successful experiments with the incandescent lamp, the New Jersey HistoriThe celebration of the centennial of electric illumination will recall Edison's light and hopefully shed some on the process of invention for the youth of today

by Jorma Hyypia



cal Commission, Fort Myers, Florida, site of Edison's winter home and former site of his "Fort Myers Lab", the Electric Power Research Institute, the Edison Electric Institute, and Rutgers University, which is initiating a 20-year project to organize and publish all of

Edison's scientific papers.

One major focus of Centennial activities will be Dearborn, Michigan, where 50 years ago Henry Ford dedicated Greenfield Village and the Ford Museum to American values and ingenuity, and to the man he considered to be the greatest genius the world has ever known. Ford removed the 82year-old inventor's first laboratory board-by-board and nail-by-nail from its original site in Menlo Park, and even transplanted, along with the reconstructed building, the actual earth from the building's front yard! Edison's wry comment on seeing the rebuilt lab: "Wonderful, only our floor was never as clean as this.'

On October 29, 1929, Edison reenacted the entire process, the "Miracle of the Millenium," by re-inventing the electric light at Greenfield Village. By his side was Francis Jehl, just as he had been a half century earlier. Dig-



Here, Edison poses with one of his later models of the incandescent lamp. Note the extra neck on the bulb for bleeding out air.

U.S. Department of the Interior, Edison National Historic Site.



Edison's 1889 Strip Kinetograph, the first motion picture camera using strip film. Note that the film moved horizontally 20-40 fps.

An engraving made by J. J. Cade after the photograph taken of Edison and his phonograph by the famous Matthew Brady. This model used foil as recording medium.



nitaries watching the second invention of the light bulb included: Herbert Hoover, Madame Curie, George Eastman, Harvey Firestone and Cyrus Eaton.

Another center of activity will be West Orange, New Jersey, where Edison lived and worked for many years. The National Park Service now maintains and conducts tours through the laboratory buildings and through Glenmont, Edison's home. Plans call for a series of special celebrations, complete with invited dignitaries.

Many U.S. and overseas electronics corporations will celebrate the Centennial of Light and Thomas Edison. This is rightly so, because these companies represent the breadth of activities with which the inventor was involved. Each organization grew, one way or another, from the work of this man, his patents, his improvements, his methods of scientific inquiry, and his formulation of modern day research. The list of corporations reads like an electronics industry Who's Who and includes such household names as: American Telephone and Telegraph, Allis-Chalmers, General Electric, GTE Sylvania, RCA, Westinghouse Electric, many well-known electric power companies, and even the Japan Atomic Energy Commission.

Is it possible for a man or woman having Edison-like inventive genius to make his or her mark these days as an independent thinker and doer? Or does the pace and sophistication (equate that with high cost) of modern research demand that scientific brains congregate in corporate laboratories, or find refuge in university laboratories, there to plead for research grants year in and year out? Is it possible to be a truly "free" inventor, and still survive? In short, would a latter-day Edison be an anachronism in modern society?

The issues could be debated endlessly, and this is not the place to start. I might make this one personal observation. Many years ago, when I left a plush chemical research laboratory (rife with intra-company politics) to work in a far more primitive laboratory in a smaller company, I received this sage counsel from a more experienced researcher: "A good scientist can do good work anywhere, even in a garage." And perhaps even the reverse is true today: "A mediocre scientist, not approaching being a genius, can succeed in a glamorous corporate research environment."

...

Use this low-memory inventory to keep track of your music

by Larry Friedman, WB2AHN



Just fifteen years old, Larry Friedman, who set up this program, is an old hand with computers. He has built his own computer system using an SWTP 6800 as the base. The computer gets such diverse uses as processing complex electronic equipment test reports and keeping the statistics for Larry's baseball and bowling teams. Larry is also a consultant on programs for electronics experimenters, and a real whiz as an amateur radio operator and as a beginning pilot.

showed how a disk system is used for is transmitted back to the disk. While dating and selective error correction it memory (RAM), even when using a N LAST ISSUE'S PROGRAM Inventory We The program is typical of its kind for data from the disk is taken into the computer's memory, manipulated and requires relatively enormous computer disk system which requires no additionsingle-drive disk systems in that all the processed, and then the new "data file" al memory for its own operating system massive data storage and fast retrieval. this arrangement allows for data up-(such as the PerCom LFD-400).

Less RAM. Now many of us computer hobbyists can't afford the amount of memory normally required by a disk inventory program. But, if we eliminate both selective error correction and deletion of unwanted data we sharply reduce the amount of RAM required

for data handling.

In fact, this month's program, Music Library, requires only enough RAM to process six data variables and the error correction loop. The whole bit (pun intended), including the program itself can be shoehorned into 4K of RAM.

Music Library will keep track of your records and tapes, and allow you to easily locate a long-lost treasure. Designed for SWTPCo version 2.0 BASIC in conjunction with the basic PerCom LFD-400 disk system, Music Library will run in about 4K of memory, and one single diskette will accommodate about 7000 individual entries, or in excess of 2300 complete entries consisting of artist, album (or tape) and song. The exact number will be determined the length of each individual entry.

by the length of each individual entry.

Updating. Once you have selected the starting disk sector (line 0115), the program will automatically and

continuously write your data entries onto the disk. This is accomplished at line 1080. The Update command automatically locates the end of your previous data and simply adds on the new data without requiring any additional memory in the computer. This is because the program does not use an array table (large list of variables, which takes large quantities of RAM).

which takes large quantities of KAM). To keep the program reasonably short it does not provide for removal of an entry (this requires a considerable amount of RAM). But, it does have Error Correction should you make a mistake while entering data. The Error Correction system is intermingled with the start mode (lines 1000-1090). It is somewhat unusual in that it employs the "negative reaction" technique, meaning it won't write to the disk until you confirm there is no error by not typing the word "error."

(Yes, it is difficult to follow on the first five read-throughs.)

On a program run the computer will only output the information that it has, it won't fill with blank spaces by attempting to print information it doesn't have stored on the disk. (See lines 2050, 2055).

If you utilize this program on a different computer system make certain the fundamental BASIC "conditional GoTo command" (IF-THEN) is tailored for your system. For example, in line 4030 the statement reads IF C\$==N\$ Z=1. Your computer might require the statement to read IF C\$==N\$ THEN Z=1. (This byte-saving type of statement has, been used throughout the program. Multiple statement lines have also been used to save RAM.)

The program can be easily modified to personalize the system for your particular needs

## MUSIC LIBRARY

0100 REM "MUSIC LIBRARY" BY LARRY FRIEDMAN 0101 REM FCR ELEMENTARY ELECTRONICS MAGAZINE 0102 REM 103 REM WRITTEN FOR SUTP 8K BASIC VERSION 2.0.
104 REM AND PERCOM LFD-400 DISK SYSTEM
105 REM \*

15 INPUT "SECTOR START",C

INPUT "NEED INSTRUCTIONS? (Y/N) ", IS: IF IS="Y" THEN 210

120 CPEN #10.C 130 DATA START.ARTIST.ALBUM.SONG.LIST.UPDATE

4057 PRINT "ALBUM: ";B\$
4066 3 OT 0 4020
4070 IF Z=1 THEN 150
4080 PRINT "NO SCN3 UNDER NAME: ",N\$:GOTO 150
5000 RESTORE #10
5020 PRINT "ART1ST";TAB(18);"ALBUM";TAB(36);"SONG"
5030 READ #10.A\$;B\$.C\$\)\
5030 READ #10.A\$;B\$.C\$\)\
5050 3 GT 0 5030
5040 PRINT A\$;TAB(18);B\$;TAB(36);C\$
5050 3 GT 0 5030
6010 3 OT 0 6000

7000

PRINT : INPUT "ARTIST", AS: IF AS="LEAVE" P=6:GOTO 1080

IF AS <>"ERRCR" THEN 1075

PRINT #10:DS:ES:FS:IF P=6 P=0:GOTO 150

IF DS="" THEN 1848

1075

1890

3 CTC 1030

DS=AS: ES=BS:FS=CS

INPUT "ALBUM", B\$
INPUT "SONG", C\$

1640

1055

3 OT C 1838

D\$ =...

1036 1637 1650 1060 1670

1035

1030

3CTC 1040 INPUT "NAME OF ARTIST", NS: X=0

READ #10.AS.BS.CS\2070 IF AS=NS X=1:30T0 2050

RESTORE #10

2010

2030 2040 2050 2052 IF CS="" THEN 2060

2055

2057 2070

PRINT "SONG: ";C\$

IF X=1 THEN 150

2060 2080 3000 3020 3030

IF BS="" THEN 2055 PRINT "ALBUM: "; B\$

3 CT C 2020

1000 PRINT :PRINT "ENTER ARTIST, ALBUM, AND SONG."
1010 PRINT "TYPE 'LEAVE' TO EXIT 'START" MODE"
1015 RESTORE #10

TO LEAVE PROGRAM"

PRINT "UPDATE

8388 PRINT "EXIT

3 CTC 115

0310

PRINT "NO ARTIST LISTED UNDER NAME: "JNS:GOTO 150 INPUT "ALBUM NAME ", NS:Y=0

READ #10.45.85.C\$\3070

REST CRE #10

3010

IF BS=NS Y=1:GOTO 3050

3 CT C 3020

IF AS="" THEN 3060" PRINT "ARTIST: ":AS

3848 3858 3855 3868

3 CT C 3020

3070 3080 4010

IF Y=1 THEN 150
PRINT "NC ALBUM LISTED UNDER NAME: ", NS : GOTO 150

4020 READ 416.AS.BS.CS\4070 4030 IF CS=NS Z=1:GOTC 4050

RESTORE #10

PRINT "ARTIST: "; A\$

IF B\$= ... THEN 4860

4050 IF AS="" THEN 4055

INPUT "S ONG". NS: Z=0

cation for use with other BASIC interpreters. Programs for this column are checked and debugged using a SWTP 6800 computer with 12K memory, a Micro-Term Programs are written in SWTP type 2.0 8K basic, and might require some modifi-ACT-1 CRT terminal, an ASR 33 TTY, and a National Multiplex CC8 recorder Printout will fit single line TTY or two lines on most CRT terminals.

CN X G OTC 1000,2000,3000,4000,5000,6000

PRINT "ILLEGAL COMMAND": GOTO 150

IF LS=CS THEN 200

0186 01190 0200

8610

FCR X=1 T0 6

0910

READ LS NEXT X FUNCT ION"

PRINT "COMMAND PRINT "-----

PRINT : PRINT

0210 0230

"ARTIST PRINT "START

PRINT

0250 0260 0270 0280

PRINT "ALBUM

PRINT "S GNG

PRINT "LIST

0150 PRINT :INPUT "COMMAND", CS:RESTORE 0155 IF CS="EXIT" CLOSE#10:END

RESTORE #10

0140

0

Let Had the annoying experience of having the car in front of yours on the highway begin to kick up dirty water on your windshield, and when you went for the washer button, nothing happened? Well, chin up, bunkie, the Washer Watcher is just for you. It not only warns you when the tank is empty, it warns you when you're nearing refill time. before it's too late. This handy device can also be an engine saver for those of you who have water-injected turbocharger setups on your car.

The heart of the unit is National Semiconductor's LM1830 fluid detector, which responds to the conductivity of fluids across its probe leads.

How It Works. The LM1830 generates an AC oscillator signal (in order to prevent electrolytic coating of the probes, thereby reducing their efficiency) which is coupled to the probes by a 0.05-uF capacitor. When the conductive fluid in the tank reaches a low enough level, the resistance between the probes rises past the 13,000-ohm reference level (set internally within the IC), and the oscillator signal is coupled to the amplifier segment of the IC. The amplified 6,000 Hz signal is then fed to an LED which indicates the low fluid condition.


Construction. The circuit can be assembled quickly and easily on solderless breadboard stock. We used Continental Specialties Corp.'s Experimenter 350. Component layout is not critical, but you can use the layout shown in the photograph if you're not feeling terribly creative.

The probe assembly in our model was made by drilling three holes in a triangular pattern in a large rubber stopper. After doing this, insert the metal probes (we used knitting needles). Measure the diameter of the narrow end of the stopper, and then cut a hole in the top of the fluid reservoir just slightly larger than the stopper's narrowest diameter, thus allowing a snug fit. Solder a wire to each probe, and connect them to the appropriate pins on the IC. Do not cement the probes into position on the stopper yet, because you still have to calibrate.

Calibration and Operation. The longest probe, which connects to a ground anywhere in the engine compartment that's handy, should be pushed down through the stopper so that it's just touching the bottom of the reservoir.

The "refill" probe may be inserted to any length, depending upon how much margin you wish to have between the first and last warnings.


Remember, water varies from area to area, and the type of solvent you use in

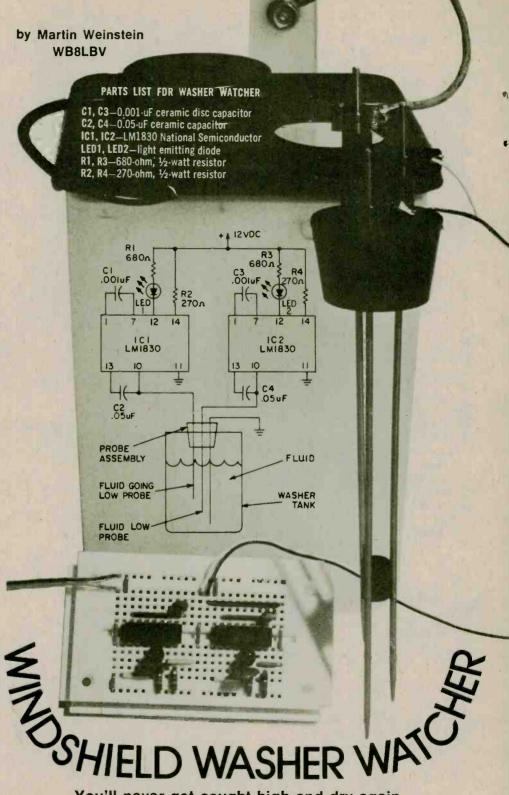


You'll never get caught high and dry again

your washer reservoir, and the resulting mixture, can affect the calibration. Before you cement the probes and stopper in place, check the operation of the unit by referencing the warning lights with visual observations. Try to keep the solvent/water mixture the same each time you refill, in order to keep the unit calibrated.

When you're satisfied with the unit's calibration, cement the probes into the stopper, both on the top and bottom, and then cement the stopper into the hole in the reservoir. Silicon bathtub sealer should do the job very nicely. The next time you take a trip, let the Washer Watcher take some of the grief out of driving for you.



## ANTIQUE RADIO CORNER



Some timely topics for the old time radio fan

by James A. Fred

WITHIN THE PAST FEW WEEKS I have received letters from two collectors who have found cathedral radio cabinets in near mint condition, but the radio chassis were missing. Now this seems strange to me because all the cathedral radios I've found that needed restoration had defective cabinets. The speaker grill and grill cloth are the most likely items to be damaged. There is usually veneer coming off in several places. I even have a radio whose front has come loose from the sides. To get back to the letters it seems like a good idea to set up a system to find chassis for these cabinets. The Philco cabinet had no model number, but from the drawing he sent I believe it to be a model 33B or an 84B. The only information I have on the Sears cabinet is that it is Beehive or Cathedral shaped. If any reader has a chassis or speaker to fit either cabinet and he writes to me in care of ELEMENTARY ELECTRONICS magazine I will pass the information on to the cabinet owners.


I just received word that Antique Radio Press will no longer publish Antique Radio Topics. After January 1, 1979 it will be published by Puett Electronics, P.O. Box 28572, Dallas TX 75228. If you are interested in subscribing or want a sample copy write to Puett Electronics.

Parts for Sale. Antique Radio Parts, P.O. Box 42, Rossville, IN 46065 will publish two antique radio parts catalogs in 1979. The catalog will list tubes, parts, and services available to collectors of old radios and wireless equipment. To receive both catalogs send 25¢ in coin plus two long, self-addressed envelopes to the above address. If you live outside the United States send International reply coupons or 40¢ U.S. coins. The Postal Service will not accept envelopes for mailing back to them with foreign stamps. I know because I have received stamped, selfaddressed envelopes from both Canada and Mexico and have been unable to

use them. Another problem I have is receiving letters with requests for help that do not contain return postage. This is especially true with requests from foreign countries. Airmail in most cases costs 31¢ per ½ ounce. International reply coupons can be purchased in First Class Post Offices, also International Money Orders. These two items can be used to send funds to any country that is a member of the International Postal Union

African Antique. Some time ago I received an interesting story and a photo of a round, metal table model radio from Ken Greenberg of Skokie, IL. The radio shown in one of the photos was purchased in the early 1950's. It was made by the Berec Battery Export Company in London, England for use in Africa. It was primarily used in Rhodesia and was sold to the natives for a small sum of money in an attempt to educate them via radio.

Mr. Greenberg's radio covers the medium and shortwave bands and operates on a power pack consisting of 1.5- and 90-volt batteries. It is a very rugged, moisture proofed radio that played surprisingly well when its attached wire antenna was extended. The radio uses a 1R5, 1S5, 1T4, and a 3S4 tube. It has a two-speed vernier dial



This is the heavy duty, battery powered round radio (referred to in the text) that was made for use in Rhodesia in the '50s.

drive. The cabinet is deep drawn from aluminum.

Radio/Phonographs. There seems to be a group of collectors who are looking for the radio/phonographs that were made between 1926 and 1931. Most collectors don't have room for these large console radios so the price hasn't shot up as has the older, smaller battery operated radios. I received a letter recently from a collector who is looking for several of these old radio/ phonographs. I was surprised to learn that one model of RCA had a Radiola model 17 radio along with a wind-up, 78 RPM, single play turntable in a highboy console cabinet. Likewise Wells-Gardner built a radio/phonograph for Lyon & Healy (a large Chicago music store) that had an AC operated radio in a lowboy phonograph cabinet with a hand-wound record turntable. The above named radio phonos all had electric pickups to recover the sound from the records. I recall a Majestic highboy that had both an electric turntable and an electric pick-up. This set was the model that used a five gang tuning capacitor and used type 26's, 27's, 45's and a "B" supply setting in the bottom of the cabinet. For a future column I'll try to find some photographs and more information on these early radio/ phonograph combinations.

An Old Acquaintance. One of the oldest names in radio may disappear from the scene this year. In the latter part of 1978 Dart Industries purchased the stock of the P. R. Mallory and Co., Inc., Dart Industries was especially interested in the battery division. The Duracell has found wide acceptance among the consumers of America.

P. R. Mallory started the company in 1916, the year in which I was born. In 1929 it moved to Indianapolis, IN and a major thrust was made into the radio parts replacement market. Major lines were capacitors, resistors, volume controls, vibrators, battery chargers, telephone plugs and jacks, auto radio

### ANTIQUE RADIO CORNER

power supplies, and some years later became a major battery manufacturer. I started my first radio repair shop in 1935 and for many years used Mallory parts exclusively. I remember when the Delco Radio Division of General Motors Corp. was buying 10,000 Mallory vibrators per day to keep Delco auto radio lines operating.

In recent years Mallory Distributor Products Company has been selling semi-conductors, security alarm systems, recording tape, and other modern products as well as their more traditional lines of replacement parts. Only time will tell if the Mallory name survives in the future of electronics.


New English Magazine. A new magazine titled Sounds Vintage is being published in Great Britain. Sounds Vintage is published bi-monthly and is written expressly for those persons interested in wireless and vintage sound. Among the areas covered are vintage wireless equipment, gramaphones and cylinder players, disc record players, vintage amplifiers, and pre-war literature. In the future there will be stories of wireless pioneers, and of companies involved in the manufacture of radio and wireless equipment.

The price will be £6.80 U.K. (English Pounds-send an International Money Order), postage paid by air mail, for a one year subscription of 6 copies. Write to: Sounds Vintage, 28 Chestwood Close, Billericay, Essex,

England.

More On Test Equipment. Many antique radio collectors neglect one of the most interesting facets of the hobby. These items are electrical meters and test equipment. I first became interested in radio in 1931 and have earned a living since 1935 in the radio-electronic field. I have always been interested in electrical meters and have built most kinds of simple test instruments. I built

This is an I-P-500 Crystal Detector Receiver made in 1918 that was a prize winner in the old equipment contest at the AWA Conference in 1978.



my first VOM (Volt-Ohm Meter) in 1934 and my first tube tester in 1935. Since then I've built capacitor testers, signal generators, VTVM's (Vacuum Tube Voltmeters) oscilloscopes, etc. I have built from scratch and from kits of parts, i.e., Heathkits and Eico kits.

Most collectors aren't interested in test equipment either because it is hard to find, is too expensive, or they aren't interested in electronic repairing of their own equipment. At the ARCA conference in King of Prussia, PA several collectors had test equipment for sale at very reasonable prices. I saw several tube testers made in the early 30's. These testers would check 201 A's, 199's, etc., which all collectors use. There were also individual test meters priced as low as 50¢ each which still worked well and only needed cosmetic repairs. In my stock I probably have more than 350 meters ranging in age from the 1920's to the 1960's. If you are interested the old brands to look for are Hoyt Jewell, Weston, Sterling, Beede, and Readrite. These meters were the more popular ones made for radio use. Other meters made for electrical and automotive use were Roller-Smith, Westinghouse, General Electric, and Splitdorf. The above named meters are the ones to look for in flea markets and garage sales.

Another group of meters were called pocket meters, or "Watch Case" meters and were intended for home use. This type meter was usually 21/3 inches in


diameter by a half-inch thick. The case was brass, nickleplated, and if the meter had only one range it would have one short lead wire and a pointed contact on the case. Most Watch Case meters were made to test filament and "B" batteries used with the 1920's battery radios. I know of several collectors who collect the brass, nickleplated meters. You can usually find these too at flea markets and garage sales.

A reprint of the Radiola III instruction booklet is now available along with the Radiola IIIA booklet that has been on sale for some time. You can get either booklet for \$2.00 postpaid from Antique Radio Press, P.O. Box 42, Rossville, IN 46065.

Safeguarding Your Collection. I want to emphasize one more time the importance of having a complete list of all your antique radio equipment put into a safe place (not in your home). I recommend a safety deposit box in a bank or similar institution. I have written on this subject before, but apparently most collectors don't want to do this. Periodically I hear or read about a collector who was "ripped off" by a thief.

The latest happening I have heard about took place on, the west coast. There is a collector out there who had 13,000 vacuum tubes. There were many tubes made between 1920 and 1930, some were made before 1920, and thousands were made after 1930. Fortunately he had the foresight to call in a prominent west coast antique radio appraiser who had seen the tubes and other collectibles the man had and had filed the proper paper work to prove these tubes existed. The collector was insured and his monthly premium was quite a lot of money. The insurance investigator was unhappy as were the local police because the collector had promised to install a burglar alarm, but hadn't done so. After the insurance company investigator interviewed the appraiser by telephone the claim was approved to be paid.

(Continued on page 92.)



An early spark telegraph transmitter also entered in the old equipment contest at AWA Conference. The Rolling - pin shaped glass tube holds the spark gap apparatus.



## Kathis (B Carousel

Kathi puts the Pace 8117 computerized CB through its paces

or something like two years compu-terized CB transceivers have been the big talk at equipment shows. The trouble is, that's just what its all been-talk. Why, the last time I looked and listened it was one of the heavies in the computer and calculator marketplace that was going to turn CB on its ear with a computerized CB. With the notable exception of SBE's excellent Key/Com 1000 (you can read about it in this issue's CB XCVR Checkout), which was developed from their model 55 marine VHF transceiver, the traditional CB manufacturers have ignored computer control for CB sets. With all the developments in VHF/UHF scanners you'd think some of the technology would rub off on some of the other CB biggies, but up to now it hasn't. Now, however, SBE has some heavy competition in the field-the Pace 8117 by Pathcom. A real honest-to-goodness computerized CB transceiver.

The Pace 8117 is basically a base station with provision for operation off a 13.8-VDC power source (the DC cable is not supplied). The rig features the usual 40-channel coverage, PA and remote speaker jacks, an LED digital channel display, S/RF-output meter,



A CB rig with a touchpad? Right! Because the Pace 8117 is controlled by an on-board microprocessor —meaning micro-computer. For more information circle number 64 on the reader service coupon.

RF gain control, Delta tuning, and the computer.

The Computer. The computer is programmed by a 4 by 3 (12 position) touch pad such as you would find on a touch-tone telephone. Ten of the buttons are dual function—numerals and commands—so there are effectively twenty-two operating keys which program the computer.

The instant power is applied the computer tunes the rig to channel 19. If you want to change channels there are fast and slow *up/down* selectors that step through each channel. If you want to go directly to a particular channel you can do that too. Now none of these features really requires an on-board


microprocessor; they simply come with the computer, which provides a userselected 10-channel scan mode, a continuous scan of all 40-channels without stop, a 40-channel scan and latch onto either a busy (BZ) or clear (CLR) channel, and a programmable monitor that allows you to receive on one channel and monitor another on a sampling for one-half second every 10-seconds.

Two front panel switches determine what happens when the computerized scan or monitor finds what you're looking for. One switch, labled BZ and CLR, determines whether a scan stops on a busy or clear channel. A switch labled CSS provides a continuous 40-channel scan without a stop. If the scan stops (latches) to a channel in the BZ or CLR mode it remains on that channel until the user resumes scanning by pressing the appropirate pad button.

Programmed Scan. Here's how you might utilize the computer. Assume you have four active "assistance" channels in your area: 9, 10, 11, and 19. You could program only these channels into the 10-channel memory and the computer would scan only these four channels, stopping on the first one to become active. If you had to shift immediately to channel 9, let's assume you have just received an emergency call on 19, you could do it by simply pressing the 9 EMR (9 emergency) pad button. You can start, stop, or resume the scan


(Continued on page 88)

#### CIRCLE 64 ON READER SERVICE COUPON



Dual purpose touch switches provide 22 alphanumeric functions. The numerals are for keying in the channel numbers, the "alpha" designations are the computer functions: for example, CL M means clear memory; MEM program means ENTER

means enter channel number into memory or monitor, STP means stop, the way you exit a computer mode. It looks complicated at first glance, but a short evening's practice is all it takes to make you a "computer programmer." The panel Switch BZ/CL determines whether the scan stops on a busy or clear channel. The CSS switch provides continuous 40 channel scanning with no stops. This is truly a super unit for the active CBer.

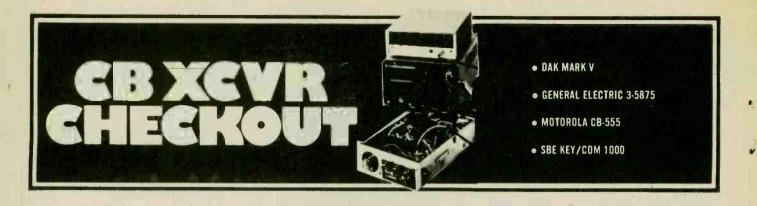

ELEMENTARY ELECTRONICS has been able to obtain some the latest 40-channel CB transceivers for review, and presents the test reports here. These units are not prototypes, but are "stock standard," the same as the transceivers that you can buy over the counter. If you don't find the particular unit you are interested in reported on here, check for the 1979 edition of CB BUYERS GUIDE, soon to be on the newsstands.

#### DAK MARK V

\$119.95 (M. H. Scott)

General Description: A 40-channel AM transceiver for mobile and P.A. operation. Delta fine tuning ±2.5 kHz is provided. Power supply is 12 to 13.8 VDC with negative or positive ground. Overall dimensions are 2½-in. H x 7½-in. W x 9-in. D. There are front panel controls for: channel selection, volume, squelch, RF gain, and Delta tune. Switches for: PA/CB, Noise blanker, ANL, channel indicator dimmer; and tone. Standard accessories include a micro-



**CIRCLE 53 ON READER SERVICE COUPON** 

phone, mobile mount, DC power cable.


#### Receiver Section Test:

Input sensitivity	0.4 µV
Adjacent channel rejection	56 dB
AGC action	7 dB
Input level for S9 meter	
indication	40 <sub>4</sub> V
Transmitter Section Test:	
AM RF output	3.8 watts
Modulation to 85%	yes

Relative sensitivity for 85%
mod. —43 dB
Modulation limited to 100% —yes
Editorial Remarks: The Mark V has a
6 dB per unit S-meter, double conversion, jacks for P.A. and remote speakers, L.E.D. digital channel indicator S/RF-output meter.

#### • GENERAL ELECTRIC 3-5875 \$469.95 (General Electric)

General Description: A 40-channel AM/SSB transceiver for mobile, P.A., base operation. Fine tuning ±2.2 kHz is provided. Power supply



CIRCLE 62 ON READER SERVICE COUPON

is ¶2 to 13.8 VDC with negative or positive ground and 120 VAC. There are front panel controls for: channel selection, volume, squelch. Fine and coarse clarifier, tone, MIC power, RF gain, SWR CAL and L.E.D. dim. Switches for power, AM/SSB modes, ANL, noise blanker, CB/PA, MOD/SWR meter, antenna A/B, speech compressor and clock/timer set. Standard accessories include a microphone, mobile mount, DC power cable and A.C. power cord.

#### Receiver Section Test:

Input sensitivity	0.4	μV
Adjacent channel rejection	57	dB
AGC action	9	dB
SSB opposite sideband		
rejection	.50+	dB
Input level for S9		
meter indication	50	"V

#### **Transmitter Section Test:**

atts
E.P.
yes
dB
yes

Editorial Remarks: The 3-5875 has a relative reading S-meter, double conversion, jacks for P.A. and remote speakers, L.E.D. digital channel indicator, speech compressor, Modulation/SWR and S/RF-output meters, and connections and switching for two antennas. Has digital clock/timer.


#### • MOTOROLA CB555 \$409.95 (Motorola, Inc.)

General Description: A 40-channel AM/SSB transceiver for mobile, P.A. base operation. Fine tuning ±1.1 kHz is provided. Power supply is 12 to 13.8 VDC with negative ground and 120 VAC. Features L.E.D. digital clock that works on AC only. Overall dimensions are 4-7/16-in. H x 11%-in. W x 11-in. D. There are front panel controls for: channel selection, volume, squelch, RF gain, clarifier, mike gain, SWR cal. Switches for:



#### CIRCLE 66 ON READER SERVICE COUPON

AM/LSB/USB, S/RF/SWR meter mode, PA/CB/Extend (Extend is a Noise Blanker), ON/OFF/AUTO for (Continued from page 94)



## PUTER READOUT

by Tom Williams


Tell a computer how to tell itself what to do

OST COMPUTERS CAN BE MANAGED quite nicely by learning one or more of the popular high-level languages like BASIC or PASCAL. That does not, however, prevent us from being a trifle curious about what is really going on inside the machine. One can drive a car quite well without any idea of how the engine actually works, and one cannot repair a car without devoting more attention and study to its functioning than most of us can afford. Many people, however, get a degree of satisfaction from appreciating the basic concepts of how it works. The same can be said of computers and the people who use them.

It is a well-known fact that a digital computer consists of an input/output device, central processor and memory, and that it does all its work by manipulating 1's and 0's which are represented by on or off conditions of electronic switches. But how is all this activity organized and how does the machine accomplish all its complex computations at such rapid speed using only on and off states?

Communication. To answer this question, we must take a quick look at how the central processing unit, or CPU, communicates with computer memory and then a more detailed look at what goes on inside the CPU. The simplest way to think of the CPU is as a mailman who goes from one numbered mailbox to another in succession. The mailboxes are locations in computer memory which contain program instructions or data for the CPU. The numbers of the mailboxes are the memorv addresses and it is to these addresses that the CPU refers as it steps through a program.

For instance, when the CPU looks at an address, it may find an instruction telling it to go to the next address and read the contents of that location into one of its registers. CPU registers are special memory locations inside the CPU that are used for temporarily storing and manipulating data. Because of its function, this type of memory is often referred to as "scratchpad memory."

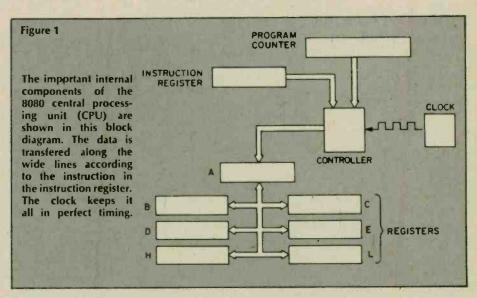

Going to the third address in line, the CPU may find a similar instruction which tells it to take the contents of the fourth location and store them in another CPU register. At this point, the CPU has two different numbers stored in two of its internal registers. The next instruction the central processor sees may be a command to add these two numbers together, that is, to add the contents of one register to the contents of another. The final instruction might then tell the CPU to take this result and store it in another specified location out in computer memory, or to output it to an output port where it could be read by a terminal device.

Our simple example has shown that a computer program consists of two things: Instructions to the CPU to perform certain operations, and data, or information that the CPU needs to carry out these instructions. The latter may come in various forms and we will discuss only a few of them here.

Architecture. Looking into the CPU, that microscopic silicon wonder, we find that it contains a number of distinct internal components. The ones we will discuss here are the registers, the program counter and the controller. The number, size and arrangement of these internal components is known as the CPU's architecture. For the pur-

poses of this article, we will refer to the architecture of the popular 8080 8-bit microprocessor.

Since the length of a data word for the 8080 is 8 bits, or one byte, each internal register will be able to store one byte. Two exceptions to this are a couple of specialized registers called the stack pointer and the program counter. These registers must store memory address information, and since addresses in the 8080 can be up to 16 bits in length, these two registers must be able to store two bytes.

We will not discuss the stack pointer at this time, but the program counter will be of central importance. You will notice I listed the program counter as a CPU component in its own right because of its importance, but it is really a specialized register.

Let us imagine our simplified 8080 as illustrated in figure 1. We see the different registers with connections between some of them so that data can be easily transfered among them. Also illustrated is the controller with the clock input. Other CPU components include the arithmetic logic unit, the address buffer, and the instruction decoder.

What makes the whole thing go? That is the function of the system clock, which is usually connected externally to the CPU. It is a crystal oscillator

## (a) COMPUTER READOUT

which produces a rapid series of pulses which are used as a timing reference by the entire system. It might be more useful to think of it as a metronome rather than a clock, as some functions require a different number of clock pulses to be performed than others. Every operation of the machine, however, uses this reference to time the sequence of its operations. In an 8080-based system, the clock frequency is typically 2MHz—which may do something to explain the speed with which a computer computes.

Operation. Let us now perform an actual addition of two numbers while examining what is taking place inside the CPU. To do this, it will be necessary to have an addition program contained in the computer's memory. As mentioned above, such a program will consist of instructions and data. The instructions are binary codes that cause the CPU to perform certain operations on the data. There is a limited number of instructions any given CPU can perform, and the list of these instructions is known as the instruction set for that CPU.

A computer program is a list of appropriate instructions, also known as opcodes, and their operands, or data the CPU needs to carry out the instructions, stored in an orderly manner in memory.

To execute the program, the program counter goes to the address of each instruction in turn, loads that instruction into the instruction register, and then goes to the address of the next instruction. The instruction in the instruction register is decoded by the instruction decoder and executed and the process is repeated until a programmer's error is encountered and the machine gets confused.

When writing programs such as these in machine language, the individual CPU's architecture is a major consideration. The nature of the machine's instruction set is based upon its architecture, and in order to program for a different CPU, a different instruction set must be learned. High level languages like BASIC and PASCAL allow us to communicate in English-like statements of the problem. The interpreter or compiler translates the program into machine instructions the CPU can understand.

For our purposes, let us assume that our addition program has either been entered in machine language by a programmer or been translated by a compiler. At any rate, it now resides in memory as absolute machine code—the stuff our CPU can digest. Also, for our purposes, we will not use a terminal (input/output can really get complicated) and assume that the two numbers to be added are contained in the program.

Instruction. While there are perhaps more elegant and efficient ways to write this program, it will serve to illustrate some of the things the computer does. To the CPU, our program would look like this:

1.	00100001
2.	10000000
3.	00100000
4.	00000110
5.	00000101
6.	00111110
7.	00000010
8.	10000000
9.	01110111
10.	01110110

This is, of course, incomprehensible to a human reader, especially since practical programs are many hundreds of times longer than this. For this reason, those bytes which are instructions and not data can be described by hu-

Figure 2	PROGRAM COUNTER	000000000000	000	
INSTRUCTION REGISTER	00111110			Here the status of the
			UTT CLOCK	8080 CPU is shown with the program counter ready to load the instruction that is
A	00000010	CONTROLLER		contained in address 8 into the instruction register. Note that the program counter con-
B 00000101		«xxxxxxx c		tains the address of the next instruction.
D XXXXXXX		XXXXXXXX E R	REGISTERS	the new mstruction.
н 00100000		10000000 L		

1	Figure 3 ASSEMBLER SOURCE LISTING			
ľ	Opcode	Operand	Comment	
1	LXI H	200 040	Put address in H & L	
The state of	MVIB	005	Put & in register B	
	MVIA	002	Put 2 in register	
	ADD B		Add B to A	
-	MOVM A		Put A into mem- ory location	
	HLT		Halt	

This is an assembler source code listing for our addition program. The assembler reads the letters and numbers and then translates them into binary numbers.

mans with short abbreviations called *mnemonics*. Mnemonics apply only to instructions in the instruction set and numeric data must be represented for humans by another form of notation than binary, usually octal (base 8) or hexadecimal (base 16). We won't discuss these here, however, and I will use decimal notation to indicate numbers the computer must deal with.

Remember that each 8-bit byte of code above resides in a separate location in memory and that each such location is specified by a unique address. For the 8080, addresses can be numbered from 0 to 65,535 decimal.

If we were to translate this program into readable form, we could see that it is telling the CPU to first load the H and L registers with the numbers in the next two memory locations. The first goes into the L register and the second into the H register (this reverse order is an 8080 convention and not true for all CPU's). This number will later be used by the computer to refer to an address elsewhere in memory.

The next instruction (not the next byte) is at address number 4 in our program. It tells the computer to put the following number (here, the number 5) into the B register. The next instruction similarly tells it to put the contents of the next memory location into the A register. At this point in the program, the computer registers look like figure 2. Note that the program counter contains the address of the next instruction to be put into the instruction register.

That instruction is the ADD B instruction that tells the CPU to add the contents of register B to the contents of register A. The result will be the new contents of register A, but the data in register B will not be destroyed.

Answers. The question now is what to do with the answer. In our case, we have chosen to store it in a location in (Continued on page 87)

## CC BASIC COURSE RECIPONCS ASPECTABLE COURSE ASPECTABLE COURSE ASPECTABLE ASPECTABLE ASSETTION OF THE ASSETTI

One of the keys to hobby construction fun is a firm understanding of transistor function and operation. This article will tell you all you need to know to use transistors in your latest brainstorm. The easy-learning format makes understanding transistors a snap even if you've had trouble with them before.

This article is based on material appearing in ELECTRONICS, A Self-Teaching Guide by Harry Kybett. John Wiley & Sons, Inc., Publishers.

### INTRODUCTION TO THE TRANSISTOR

sing transistors in your projects is easy once you understand how they work. This article will give you the basics of modern transistor theory enabling you to use these tiny dynamos in your construction projects.

#### THE TRANSISTOR AS A SWITCH

The transistor is undoubtedly the most important modern electronic component. It has made great and profound changes in electronics and in our daily lives since its discovery in 1948.

In this chapter the transistor will be introduced as an electronic component which acts similarly to a simple mechanical switch, since it is actually used as a switch in much modern electronic equipment. The transistor can be made to conduct or not conduct and electric current—which is exactly what a mechanical switch does.

"An experiment in this chapter will help you to build a simple one-transistor switching circuit. This circuit can be easily set up on a home workbench, and it will enhance your learning if you obtain the few components required and actually perform the experiment of building and operating the circuit.

From this basic idea we will progress to simple circuits which use several transistors to accomplish the same end. This affords an easy introduction to why the transistor is used, and to how it is used in computers and other modern circuits.


When you complete this chapter you will be able to:

- · describe the basic construction of a transistor;
- · specify what transistor switching action is;
- differentiate between the two most common types of transistors;
- tell which currents flow through a transistor;
- specify the relationship between base and collector current in a transistor;
- calculate the current gain for a transistor;
- explain how a transistor can be ON or OFF;
- compare the transistor to a simple mechanical switch:
- do simple transistor current calculation.

#### THE BASIC TRANSISTOR

The diagrams below show several common transistors

in use today. For each transistor, the lower diagram shows how the leads are designated and how to identify them in most cases.




#### QUESTIONS


- 1. How many leads are there on most transistors? ....
- 2. Where there are only two leads, what takes the place of the third lead?
- 3. What are the three leads or connections called? ....

#### **ANSWERS**

- 1. Three
- The case can be used instead, as the diagram on the right. (This is limited to power transistors.)
- 3. Emitter, base, and collector.



In its simplest form a transistor can be considered as two diodes, connected back to back, as in this drawing.



However, in the construction process one very important modification is made. Instead of two separate P regions as shown above only one very thin region is used.

Which has the thicker P region, the transistor shown above or two diodes connected back to back? Two diodes. The transistor has a very thin P region.


Two separate diodes wired back to back will not behave like a transistor. Why this difference in construction should make the transistor act like a transistor and not like two diodes will not be covered, as this is semiconductor physics and not electronics.



What is the main construction difference between two diodes connected back to back and a transistor?


the very thin P region used in the transistor

The three terminals of a transistor-the base, the emitter, and the collector-are connected as shown below.




The two diodes are usually called the base-emitter diode, and the base-collector diode.

The symbol used in circuit diagrams for the transistor is shown on the following diagram, with the two diodes and the junctions shown for comparison.



Because of the way the semiconductor materials are arranged, this is known as an NPN transistor. Which transistor terminal has the arrowhead? ...... the emitter

It is also possible to make transistors with a PNP configuration, as shown below.




Both types, NPN and PNP, are made from either silicon or germanium.

#### QUESTIONS

- 4. Draw a circuit symbol for both an NPN and a PNP transistor. (Use a separate sheet of paper for your diagrams.)
- 5. Which of these might be silicon?
- 6. Are silicon and germanium ever combined in a transistor? (Hint: What was said about diodes?) ......

#### **ANSWERS**






- 5. Either or both could be silicon. (Either or both could also be germanium.)
- 6. Silicon and germanium are never mixed in any semiconductor

#### HOW THE CURRENT FLOWS

If a battery is connected as shown below to an NPN transistor, then a current will flow as shown.

This current, flowing through the base-emitter diode, is called base current and is given the symbol Ib.




Would base current flow if the battery were reversed? Base current would not flow as the diode would be back

In the circuit below, the base current can be calculated using ohm's law, where

$$I = \frac{E}{R}$$
,  $E = IR$ , and  $R = \frac{E}{I}$ 


Find the base current in this circuit. (Hint: Do not ignore the 0.7 V drop across the base-emitter diode.)



Your calculations should look something like this.  $Ib = \frac{(Vs - 0.7 \text{ V})}{\text{R}} = \frac{(3 - 0.7)}{1 \text{ k}\Omega} = \frac{2.2 \text{ V}}{1 \text{ k}\Omega} = 2.3 \text{ mA}$ 

$$Ib = \frac{(Vs - 0.7 \text{ V})}{B} = \frac{(3 - 0.7)}{1 \text{ k}\Omega} = \frac{2.2 \text{ V}}{1 \text{ k}\Omega} = 2.3 \text{ mA}$$


In the circuit below, as the 10 V battery is much higher than the 0.7 V diode drop, we can consider the baseemitter diode to be a perfect diode, and thus assume the voltage drop is 0 V.




Calculate the base current.

$$Ib = \frac{(10-0)}{1 \text{ k}\Omega} = \frac{10}{1 \text{ k}\Omega} = 10 \text{ mA}$$

Look at the circuit below.




Will current flow in this circuit? Why or why not? It will not flow as the base-collector diode is reverse biased.



Now, we will put both of the circuits together. Note that we have two batteries, one in each of the base and collector circuits.


When both the base and the collector circuits, as in the diagram above, are connected, it demonstrates the outstanding characteristic of the transistor, which is sometimes called *transistor action:* If base current flows in a transistor, collector current will also flow.

Examine the current paths in the diagram below.



Base current (Ib) flows through the base-emitter diode and causes the collector current (Ic) to flow through the base-collector diode.


No current flows from the collector to the base, as shown by the dotted line below.



The reason why the collector current takes the path shown in the first of these two diagrams, rather than the dotted line path, is beyond the scope of this book. This is the domain of semiconductor physics and is not needed in electronic circuit design and analysis at this time.


Up to now we have been using the NPN transistor, solely for the purposes of illustration. A PNP transistor could have been used. There is no difference in how the two types work or behave. What is said about one is equally true for the other.

There is, however, one important circuit difference which is illustrated below. This is caused by the fact that the PNP is made with the diodes in the reverse direction from the NPN.




Note how the battery polarity is reversed and the current flows in the opposite directions through the diodes.

The two figures below show the battery connections to produce currents for both circuits. In both diagrams the current flow is counterclockwise.



As stated earlier, there is absolutely no difference between NPN and PNP transistors. Both are used equally in electronic circuits; one is not favored over the other. Base current causes collector current to flow in both. To avoid confusion, the rest of this discussion will be conducted using NPNs only as examples. And from now on, we will use the circuit symbols only.

Consider the action of the circuit below. It uses only one battery to provide the base and the collector current. The path of the base current only is shown in the diagram.



#### QUESTIONS

- 7. Name the components through which the base current flows.
- 8. Into which terminal of the transistor does the base current flow?
- 9. Out of which transistor terminal does the base current flow?
- 10. Through which terminals of the transistor does no base current flow?


#### **ANSWERS**

- 7. the battery, the resistor Rb, and the transistor
- 8. base
- 9. emitter
- 10. collector

Can you remember the outstanding physical characteristic of the transistor? When base current flows in the preceding circuit, what other current will flow, and which components will it flow through?

Collector current will flow. It will flow through the resistor Rc and the transistor.

The path of the collector current is shown in the diagram below.

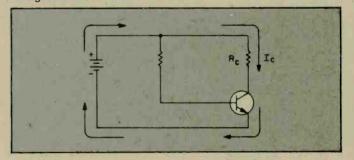

#### QUESTIONS

- 11. List the components through which the collector current flows.
- 12. What causes the collector current to flow? ...

#### **ANSWERS**

- 11. the resistor Rc, the transistor, and the battery
- 12. base current (Collector current cannot ever flow if



base current is not flowing first.)

It is a peculiar property of the transistor that the ratio of collector current to base current is constant. The collector current is always much larger than the base current. The constant ratio of the two currents is called the current gain of the transistor and it is a number much larger than 1.

Current gain is given the symbol  $\beta$ , called beta. Typical value's  $\beta$  range from 10 to 300. 100 is a good typical value from many transistors, and we will use this number for convenience in our calculations.

#### QUESTIONS

- 13. What is the ratio of collector current to base current called?
- 14. What is the symbol used for this?
- 15. Which is larger—base or collector current? .
- 16. Look back at the circuit before question 7. Will current be greater in Rb or in Rc?

#### **ANSWERS**

- 13. current gain
- 14. β
- 15. Collector current is larger.
- The current is greater in Rc, since it is the collector current.

The mathematical formula for current gain is as follows.

where:

Ib = base current Ic = collector current

From this you can see that if no base current flows, no collector current will flow. And if more base current flows more collector current will flow. This is what is meant when we say the "base current controls the collector current."

Suppose the base current is 1 mA and the collector current is 150 mA. What is the current gain of the transistor?

Current gain is a physical property of the transistor. Its value can be taken from the manufacturer's published data sheets or it can be determined experimentally by the user.

In general  $\beta$  is a different number from one transistor type to the next, but it remains constant for a given transistor. Transistors of the same type have  $\beta$  values within a narrow range of each other.

One of the most often performed calculations in transistor work is determining the values of either collector or base current, when  $\beta$  and the other current are known.

For example, suppose a transistor has 500 mA of collector current flowing and it is known to have a  $\beta$  value of 100. Find the base current. To do this, use the formula as shown below.

$$\beta = \frac{Ic}{Ib}$$

$$Ib = \frac{IC}{\beta} = \frac{500}{100} = 5 \text{ mA}$$

Now you do these simple examples.

#### QUESTIONS

18. $lb = 1$ mA, $\beta = 100$ . Find $lc$ .	 	 			 	
19. $lb = 10 \mu A$ , $\beta = 250$ . Find $lc$ .	 	 	 	1		
20.1b = 0.1  mA. $Ic = 7.5  mA$ . Fin						

#### **ANSWERS**

- 17. 0.1 A, or 100 mA
- 18. 100 mA
- **19.** 2500 μA, or 2.5 mA
- 20.75

This set of questions will serve as a summary of the first part of this chapter. You should be able to answer all the questions. Use a separate sheet of paper for your diagram and calculations.

#### QUESTIONS

- 21. Draw the circuit in frame 13, and show the paths of *Ib* and *Ic*.
- 22. Which current controls the other? .....
- 23. Which is the larger current, Ib or Ic? ......
- 24.  $lb = 6 \mu A$ ,  $\beta = 250$ . Find lc.
- 25.  $Ic = 300 \text{ mA}, \beta = 50. \text{ Find } Ib.$

#### **ANSWERS**

- 21. Refer to frame 13 to see if the figure is correct.
- 22. Ib (base current) controls Ic (collector current).
- 23. Ic
- 24. 1.5 mA
- 25. 6 mA

#### THE TRANSISTOR EXPERIMENT

The object of the following experiment is to find  $\beta$  of a particular transistor by measuring several values of base current with their corresponding values of collector current. These values of collector current will be divided by the values of the base current to obtain  $\beta$ . The value of  $\beta$  will be almost the same for all the measured values of current. This will show that  $\beta$  is a constant for a transistor.

As long as the circuit is set up, measure the collector voltage for each current value. This will demonstrate experimentally some points to be made in future frames. Observe how the collector voltage *Vc* drops toward 0 V as the currents are increased.


If you do not have the facilities for setting up the circuit and measuring the values, just read through the experiment to find out how it would be done. If you do have the facilities, you will need the following equipment and supplies.

- 1 9-V transistor radio battery (or a lab power supply)
- 1 current meter, maximum reading 100 uA
- 1 current meter (maximum reading 10 mA)
- 1 voltmeter, maximum reading 10 V
- 1 resistor substitution box, or a 1 MΩ potentiometer, or assorted resistors with values in the table
- 1 1-kΩ resistor
- 1 transistor, preferably NPN

Almost any small commercially available transistor will do for this experiment. The measurements given in this book/were obtained using a 2N3643. If only a PNP is available, then simply reverse the battery voltage and proceed as described.


Finally you will need several clip leads to join the components together. If you have adequate facilities, soldered joints can be used.

Set up the circuit shown in the figure below. Follow this procedure.



- (1) Set Rb to its highest value.
- (2) Measure and record lb (in the table on page 55)
- (3) Measure and record Ic.
- (4) Measure and record Vc.
- (5) Lower the value of Rb enough to produce a different reading of Ib.
- (6) Measuer and record Ib, Ic, and Vc.
- (7) Lower Rb again and get a new Ib.,
- (8) Measure and record all the values again.
- (9) Continue this until Vc = 0 V.
- (10) Further reductions in the value of R2 will increase Ib, but will not increase Ic or Vc.

Check the figures in your table to make sure you got a consistent pattern. Then compare your measurements with the ones given.




The figures in this table were obtained in an experiment conducted with considerable care. Precision resistors. were used, and a commercial 2N3643 transistor was used. With ordinary 10% or 20% tolerance resistors and a transistor chosen at random, different figures will obviously be obtained. So if your figures are not as precise as those here, do not worry.

Rb	lb	Ic	Vc
1 MΩ 680 kΩ 470 330 270 220 200 180 160	9 uA 13 19 27.3 33.3 40 45 50 56	0.9 mA 1.3 1.9 2.8 3.3 4.1 4.5 5	8.1 volts 7.7 7.1 6.2 5.7 5.0 4.5 4.0 3.4
150 120 110 100	60 75 82 90	6 7.5 8.0 9	3 1.5 1.0 0.3

In the experiment which produced this table,  $\beta = 100$ . You can see this by forming the ratio Ic/Ib for almost every pair of current values.

For each value of Ib and its corresponding value of Ic in the experiment, calculate the value of  $\beta$ . The values wil' vary slightly but will be close to an average. (Excessively low and high values of Ib may produce values of  $\beta$  which will be quite different. Ignore these for now.)

Did you get a consistent B? Was it close to the manufacturer's specifications for your transistor?



In the experiment you measured the voltage level at the collector-Vc-and recorded your measurements. Let's examine how to determine the voltage at the collector, when measurement isn't feasible. This will also show how the collector voltage can be determined without measurement.

Apply these steps to the circuit above.

- 26. Determine /c.
- 27. Determine the voltage drop across the collector resistor Rc. Call this Vr.
- 28. Subtract Vr from the supply voltage to get the collector voltage.

Let us go through the first step together.

26. To find 
$$Ic$$
, we must first find  $Ib$ .
$$Ib = \frac{10 \text{ V}}{100 \text{ k}\Omega} = 0.1 \text{ mA}$$

$$lc = \beta \times lb = 50 \times 0.1 \text{ mA} = 5 \text{ mA}$$

Now do the next two steps. Use a separate sheet of paper for your calculations.

27. To find Vr:

$$Vr = Rc \times Ic = 1 k\Omega \times 5 mA = 5 V$$

28. To find Vc:

$$Vc = Vs - Vr = 10 V - 5 V = 5 V$$

Use the same circuit, but use a value  $\beta = 75$ . Again

#### QUESTIONS

29. lc				 										1			
30. Vr																	

31. Vc

#### **ANSWERS**

29. 
$$lb = \frac{10 \text{ V}}{100 \text{ mA}} = 0.1 \text{ mA}; lc = 75 \times 0.1 \text{ mA} = 7.5 \text{ mA}$$

**30.**  $Vr = 1 \text{ k}\Omega \times 7.5 \text{ mA} = 7.5 \text{ V}$ 

31. 
$$Vc = 10 \text{ V} - 7.5 \text{ V} = 2.5 \text{ V}$$

Use the same circuit again, but with these values:  $Rb = 250 \text{ k}\Omega$  and  $\beta = 75$ . Again find:

#### QUESTIONS

32. lc	 	Silve.	.,	 	
33. Vr	 			 	
21 Vc					

#### **ANSWERS**

32. 
$$lb = \frac{10 \text{ V}}{250 \text{ k}\Omega} = \frac{1}{25} \text{ mA}; c = 75 \times \frac{1}{25} \text{ mA} = 3 \text{ mA}$$


33.  $Vr = 1 k\Omega \times 3 mA = 3 V$ 

34. 
$$Vc = 10 V - 3 V = 7 V$$

Write down your values for:

$35. Ib = \dots$	 	 × ×	 	 	 	 	 
Ic =							
36. Vr =	 	 	 	 	 	 	 
37 Vc =							





From the preceding problems you can see that Vc can be set to any desired value by choosing a transistor with an appropriate value of  $\beta$ , or by choosing the correct value of Rb.

Consider now this special example. The object is to find *Vc*. Go through the steps of the previous few examples.

#### You should have these values.

35. 
$$lb = \frac{10 \text{ V}}{100 \text{ k}\Omega} = 0.1 \text{ mA}$$


$$Ic = 100 \times 0.1 \text{ mA} = 10 \text{ mA}$$

**36.** 
$$Vr = 1 \text{ k}\Omega = 10 \text{ mA} \times 10 \text{ V}$$

37. 
$$Vc = 10 V - 10 V = 0 V$$
.

Here the base current is just sufficient to produce a collector voltage of 0 V. This is a very important condition with many practical applications.

Look at the two drawings below and compare their voltages at the point labeled Vc.

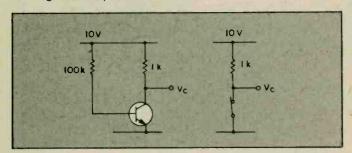

Consider a transistor which has sufficient base current and collector current to set its collector voltage to 0 V. Obviously it can be compared to a closed mechanical switch. As the switch is said to be ON, then the transistor is also said to be "turned on" or just ON.

#### QUESTIONS


- 38. From the above, what can a turned on transistor be compared to?
- 39. What is the collector voltage of an ON transistor?

#### **ANSWERS**

38. a closed mechanical switch

39.0 V

Now compare these two circuit drawings.



Since the base circuit is broken—that is, it is not complete—there is no base current flowing.

#### QUESTIONS

40. How much collector current is flowing? .....

41. What is the collector voltage? .....


42. What is the voltage at the point Vc in the mechanical switch circuit?

#### **ANSWERS**

40. None.

- 41. Since there is no current flowing through the 1 k $\Omega$  resistor, there is no voltage drop across it. So the collector will be at 10 V.
- **42.** 10 V, since there is no current flowing through the 1  $k\Omega$  resistor.

From the preceding section, it is obvious that a transistor with no collector current can be considered similar to an open mechanical switch. For this reason a transistor with no collector current and its collector voltage level at the supply voltage level is said to be "turned off" or just OFF.



Now work through this example and compare the results to the examples above. Again the object here is to find *Vc.* 

43.	lb	=		;		. 14		,								 					ž		٠.	
	IC	=			٠		 					:		×										
44.																								
45.	Vc	=					 															×		

#### **ANSWERS**

43. 
$$lb = \frac{10 \text{ V}}{100 \text{ k}\Omega} = 0.1 \text{ mA}$$
  
 $lC = 50 \times 0.1 \text{ mA} = 5 \text{ mA}$ 

44. 
$$V_r = 1 \text{ k}\Omega \times 5 \text{ mA} = 5 \text{ V}$$

45. 
$$V_c = 10 \text{ V} - 5 \text{ V} = 5 \text{ V}$$

Note the output voltage this time is exactly half the supply voltage. This condition is very important in AC electronics and will be returned to in the AC section.

#### SUMMARY

At this point it is useful to compare the properties of a mechanical switch and a transistor.

State	Tránsistor	Mechanical switch
Open or OFF	No current flow.  Full supply voltage across collector and emitter.	No current flow. Full supply voltage across terminals.
Closed or ON	Full circuit current flows as collector current.	Full circuit or load current flows through the switch.
	No voltage drop between collector and emitter	No voltage drop across the switch terminals.

The terms ON and OFF are used in digital electronics to describe the two transistor conditions just encoun(Continued on page 86)

# Lab Test Elementary Electronics For Yourself

In case you're not all that familiar with us, we're not a publication for electrical engineers and other wizards. No way. ELEMENTARY ELECTRONICS is expressly for people who like to build their own projects and gadgets—and maybe get a little knee-deep in tape, solder and wire clippings in the process.

In fact, we have a sneaking suspicion that our readers like us because they think we're just as bug-eyed and downright crazy over great new project ideas as they are. And I guess they're right!

E/E thinks of you who dig electronics as the last of a special breed. It's more than just the "do-it-yourself" angle—it's also the spirit of adventure. In this prepackaged, deodorized world, building your own stereo system, shortwave receiver, darkroom timer or CB outfit is like constructing a fine-tuned little universe all your own. And when it all works perfectly—it really takes you to another world.

ELEMENTARY ELECTRONICS knows the kinds of projects you like—and we bring 'em to you by the truckload!

Ever hanker to build a sharp-looking digital clock radio? Or to hook up an electronic game to your TV? Or an easy-to-build photometer that makes perfect picture enlargements? Or a space-age Lite-Com so you and the family can talk to each other on a light beam? We've got it all to get you started.

# WHEN IT COMES TO REPAIRS E/E can save you time, trouble and a pile of money!

Has your sound system gone blooey just when the party's going great? Do you shudder when your friendly neighborhood electrician hands you the bill? E/E can help.

Of course, we can't make you a master electrician overnight. But we can show you the fundamentals of repair plus maintenance tips.

IF YOU'RE NEW TO ELECTRONICS YOU GET A "BASIC COURSE"!

That's right! It's a regular feature. And

### Get switched on

it gives you the complete, ground-floor lowdown on a variety of important electronics subjects. For example—Understanding Transistors . . . How Radio Receivers Pull in Signals . . . Cathode Ray Tubes Explained . . . How Capacitors Work . . . Using Magnetism in Electronics. And more!

#### ENJOY GREAT ARTICLES LIKE THESE

- How to Build Your Own Transformer
- How to Select the Right Shortwave Receiver
- The Burgeoning World of Microcomputers
- Quickdraw Rickshaw—The Electric Car that Really Gets Around
- What's Really Wrong with FM Radio?
- How to Power-Up Your Antique Radio
- The Vanishing Vacuum Tube
- How to Customize Your CB Antenna • Those Incredible TV Sets of the
- Those Incredible TV Sets of the Future
- Listening in on the Forgotten
  Continent
- DXing Endangered Species
- Sandbagging—CB Fun Without a
- The World's Worst Hi-Fi Components

TRY A FEW ISSUES AND EVALUATE OUR...

► HOW-TO-DO-IT HELP. Tips and pointers that add up to money saved. For example—tuning up your tape player... all about radios... whys and hows of turntables... care and feeding of speakers.

► NO-NONSENSE TESTS. The scoop on Pioneer's TP-900 FM stereo car radio ... How well does GE's NiCad charger pep up your pooped batteries?...What's your best bet in video games? Plus help in making buying decisions.

elementary
Electronics

MICROCOMPUTER
PROJECTS

Microprossion made. page 39
Machine transmitter page 30
Conflicted computer, page 40
Electronics

William control super IX
Conflicted Happinsa

Action of Suppopularies
And Carround
Conformer
Half Ca

elementary

► EXCITING DISCOVERIES. Whatever your particular interest in electronics, you'll be entering a world of discovery in the pages of ELEMENTARY ELECTRONICS.

ELEMENTARY ELECTRONICS is regularly \$6.95 for 6 issues (one year).

But with this special introductory offer you can enjoy a full year for only \$3.98.

Cad charger ries? ... What's es? Plus risions.

The scoop of the rest of the r

#### Palomar Loop

(Continued from page 56)

ize the Palomar's nulling. But if you are limited for BCB DXing to a receiver's built-in loopstick antenna, or a piece of wire lying on the floor or stapled to the moulding, then the Palomar will pay off in almost unbelievable performance: you will actually dig out signals you never knew existed.

The Palomar loop antenna system works best in a frame house; brick and stucco will reduce maximum performance, and it might be necessary to po-

sition the antenna near a window facing the direction from which you want to receive signals. Aluminum siding generally acts as an almost total shield if the siding is grounded according to the electrical code, and the loop antenna might not offer any improvement in reception unless located in a window. Our tests in an aluminum sided home indicated poor reception when the siding totally surrounded the loop. When there was a discontinuity in the siding, such as a fiberglass or shingle front, good to excellent reception was attained, though nulling in some directions was not sufficiently deep. Further, reception in a basement which was partially below ground, with the siding starting above the basement ceiling—actually 3-feet above ground—was very good.

The equipment at the time this article was prepared—was available directly from Palomar Engineers, Box 455, Escondido, CA. 92025. The loop amplifier is priced at \$67.50 (less 2U6 type 9-volt battery). Plug-in loops are priced at \$47.50 each. Make certain you specify the BCB antenna for 550-1600 kHz coverage. (Add \$2 shipping and handling for U.S. and Canada to total order.) For additional information circle No. 52 on the reader's service coupon.

#### **Basic Course**


(Continued from page 84)

tered, and their similarity to a mechanical switch is made use of in many digital situations. We will not get into the details of digital electronics in this book, beyond examining the simple transistor switch in the next chapter.

#### SELF-TEST

The questions below will test your understanding of this chapter. Use a separate sheet of paper for your diagrams or calculations. Compare your answers with the answers provided following the test.

- 1. Draw the symbols for an NPN and PNP transistor. Label the terminals of each.
- 2. In the figure below, draw the paths taken by the base and collector currents.



3. What causes the collector current to flow? ......

#### **Simply Basic**

(Continued from page 71)

TCMMY DCRSEY LED ZEPPELIN STEVE MILLER STEVE MILLER BIG BAND

MARIE BLACK DOG

BCOK OF DREAMS

JET AIRLINER

CCMMAND? ARTIST NAME OF ARTIST? STEVE MILLER ALBUM: BCOK OF DREAMS SCNG: JET AIRLINER

COMMAND? ALBUM ALBUM NAME ? BCOK OF DREAMS ARTIST: STEVE MILLER

CCMMAND? ALBUM
ALBUM NAME ? BIG BAND
ARTIST: TCMMY DCRSEY
ARTIST: TCMMY DORSEY

C CMMAND? SONG SONG? MARIE ARTIST: TOMMY DORSEY ALBUM: BIG BAND


COMMAND? EXIT


READY

- 4. What is meant by the term current gain? What symbol is used for this?
  What is its algebraic formula?
- 5. In the figure in question 2,  $Rb = 27 \text{ k}\Omega$  and Vs = 3 V. Find Ib.
- 6. Repeat question 5 with  $Rb = 220 \text{ k}\Omega$  and Vs = 10 V. Find Ib.
- 7. Using the same figure, find Vo when  $Rb = 100 \text{ k}\Omega$ , Vs = 10 V,  $Rc = 1 \text{ k}\Omega$ , and  $\beta = 50$ .
- 8. Repeat question 7 with these values:  $Rb = 200 \text{ k}\Omega$ , Vs = 10 V,  $Rc = 1 \text{ k}\Omega$ , and  $\beta = 50$ . ...........
- 9. Now use these values:  $Rb = 47 \text{ k}\Omega$ , Vs = 10 V, Rc = 500 ohms, and  $\beta = 65$ .
- 10. Now use these values:  $Rb \cong 68 \text{ k}\Omega$ , Vs = 10 V, Rc = 820 ohms, and  $\beta = 75$ .

#### **Answers to Self-Test**

If your answers do not agree with those given below, go back and review the appropriate sections.





- 3. Base current.
- 4. Current gain is the ratio of collector current to base current. It is given the symbol  $\beta$ .  $\beta = Ic/Ib$ .

5. 
$$Ib = \frac{(Vs - 0.7)}{Rb} = \frac{(3 \text{ V} - 0.7 \text{ V})}{27 \text{ k}\Omega} = \frac{2.3 \text{ V}}{27 \text{ k}\Omega} = 85 \text{ uA}$$

6. 
$$Ib = \frac{10 \text{ V}}{220 \text{ k}\Omega} = 45.45 \text{ uA}$$

7.5 V

8. 7.73 V

9.3.1 V

10.1 V

#### SHOOTING AHEAD IN ELECTRONICS

If you want to go further in your exploration of transistors, you can order the book from which this article was excerpted, *ELECTRONICS*, by Harry Kybett. Write to Self-Teaching Guides Department, John Wiley & Sons, Inc., Publishers, 605 Third Avenue, New York, NY 10016. The price is \$7.25 postpaid. If you want more information about the popular Self-Teaching Guide series, just ask, and they'll send you some. Be sure to mention you saw it in Elementary Electronics.

#### **Computer Readout**

(Continued from page 78)

memory for future reference by the computer. The MOVM, A instruction, at position 9 in our program, causes the contents of the A register to be moved to that location in memory who address is stored in the H and L registers!

The final instruction is the halt instruction (HLT) which stops program execution. If it were not there, the program counter would merrily continue to step through all available memory—sometimes with intriguing results.

This program could be located anywhere in available memory that did not interfere with other machine operations. Our address designations merely reflect the sequential order of the program. To load it, we must first load the program counter with the starting address, then press RUN. The machine then

takes over, driven and timed by the system clock.

It should be noted that our example was an addition routine. This was because practically all the computer does is add, with binary subtraction being merely a modified form of addition.

For example, multiplication can be thought of as the successive addition of one number a certain number of times. One illustrative but inefficient way to do this in machine code for  $5 \times 8$  would be to clear the B register and put 5 into the A register. We then add 8 to the B register 5 times each time we add 8 to the B register, we subtract 1 from register A. There is an instruction that looks for a zero condition in the A register. When this is the case, we have added 8 five times, or multiplied  $5 \times 8$ .

For programmers wishing to use machine instructions, it is not necessary to memorize all the binary number associated with the machine instructions.

There are programs called assemblers which allow one to write a program using the written mnemonics and numbers. The assembler then reads this written program called a source listing, and translates the letters and numbers into the binary information for direct use by the computer. An assembler code source listing of our addition program would look like that in figure 3.

When this is read by the assembler, the comments are ignored and everything else is translated into the binary code as shown above at a starting address specified by the programmer.

The kind of machine programming we have discussed in this article is important to programmers wishing to write especially efficient or special-purpose programs. For the rest of us, it is perhaps interesting to realize that every time a BASIC program says A=7+2, something like that described above takes place in the machine . . . at 2 million cycles per second.

#### **Hi-Fi Reports**

(Continued from page 32)

perior to the bulk of the units available. While the KD-5070 is described as

While the KD-5070 is described as an automatic turntable it will not play a stack of L.P.s, but it will deal with individual albums at the touch of a button. The controls provide automatic indexing for 7-, 10-, and 12-inch records. At the end of each play the tone arm returns to the rest and power turns off, unless the repeat play button is used. The tonearm can be operated manually if desired.

The vertical tracking force is adjustable in 0.1-gram increments from 0 to 3 grams and there is a calibrated antiskate adjustment. The turntable speed is unaffected by line-voltage variations between 90 and 140 volts. The 33-RPM

pitch control could be varied +5.4 percent and -7 percent, and the 45-RPM pitch control could be adjusted +3 percent and -5 percent. Wow and flutter measured 0.05 percent with peaks to 0.12 percent. Output cable capacitance is a nominal 90-pF. The listening panel felt that the sound quality of first rate cartridges was noticeably improved with this turntable.

Everyone who has tried the KD-5070 has been impressed with its ease-of-operation. With the automatic features all you do is put a record on the spindle and push the start button. You never have to touch the tonearm. It's great if you need a turntable that can be used by children. The KD-5070 carries a suggested retail price of \$285.00.

Sony is giving everyone a chance (for \$4,400) to be the first on their block to have a pulse code modulation, digital audio processor. It is said to virtually eliminate tape hiss, distortion and wow and flutter, and to provide 85 dB of dynamic range with the peaks clearly recorded. For more information circle 61 on the reader service coupon.

Heath is offering a new 125-watt-perchannel rack-mounting power amplifier kit with a mail order price of \$359.95 (Model AA-1600). An optional oakfinished case is available for \$27.95. Circle number 1.

Sansui claims to have the fastest responding preamplifier (model CA-F1) in the west (and east), with a 50-V μSec slew rate and 0.06-μSec rise time. The aux, tuner and tape inputs are claimed to have a 5- to 600,000-Hz frequency response and a 100-dB signal-to-noise ratio. \$495. Circle number 57 for more information about the CA-F1.

#### Signal Snare

(Continued from page 47)

tween the drain of Q1 and ground. The station signal should diminsh. This indicates that the RF reflex portion of the circuit is operating correctly. The capacitor shunts the RF to ground, but does not affect the audio amplification as it has a high impedance to the audio frequencies.

Check the audio amplifier portion of the reflex circuit by tuning in a station and then removing the headphones from J2. Temporarily connect a 100-ohm, ½-watt resistor in place of the headphones to J2. Connect the headphones with a pair of clip leads across the output of D1 (across C6), and compare the signal level with the previous level at J2. The level at D1 should be lower than that of J2 to verify that the audio is being amplified by Q1.

#### **Images**

(Continued from page 64)

comes time to upgrade your present equipment, the first thing to consider is dual conversion. With this system two different IFs are used. A shortwave signal might, for example, be first converted to 3100 kHz. Thus a station's image would be a full 6200 kHz below

its real frequency.

If you can't afford a dual conversion receiver, at least one that doesn't overload, try for some amplification before the IF. Even one stage of amplification at the original frequency will reduce image problems. Two stages are even better, but more expensive than a quality synthesized frequency receiver.

#### Hey, Look Me Over

(Continued from page 18)



ON READER
SERVICE COUPON

teries are not included. Get all the specs direct from YAESU Electronics Corporation, 15954 Downey Avenue, P.O. Box 498, Paramount, CA 90723.

#### HOW TO ORDER MORE OF WHAT YOU'RE READING

# INCOME OPPORTUNITIES MAGAZINE

the greatest gold mine of money-making ideas in any one place!

Special Offer for Opportunity Prospectors

9 Big Monthly Issues for

Only \$2.98

a copy on the story issues ONLY 33 cents!					Zip H9D014
Regularly \$1.00 a copy on the newsstand, Directory issues \$1.35, YOU PAY ONLY 33 cents!	8 for 9 issues ITIES.	ck/money order)		2	State
INCOME OPPORTUNITIES P.O. Box 2610 Greenwich, Conn. 06835	Please bill me only \$2.98 for 9 issues of INCOME OPPORTUNITIES.	Enclosed is \$2.98 (check/money order) for 9 issues.	Name	Address	City

#### Kathi's CB Carousel

(Continued from page 75)

at any time. On the other hand, if you're just looking for action you could simply have the computer continuously scan all 40-channels searching for a busy or unused channel.

Since the computer also tunes the transmitter to the received channel, though it will not scan in the transmit mode, protection is provided against an invalid entry. Should you try to enter a channel number greater than 40, or a three digit number, the computer automatically reverts to channel 19.

Channel programming for both the memory and monitor modes is volatile, meaning it vanishes when the power is turned off. If you want to retain the programming simply turn the volume control down but not off. Once the memory is "lost" it has to be reprogrammed.

Performance. As far as the computer is concerned you get everything that's claimed. It works well, and certainly provides a convenient way to keep up with all 40-channel action. There are

a few operating or programming hangups that takes some practice to unravel, but they are just about what you'll find on an ordinary VHF scanner. Basically, there are no hang-ups once you get used to the programming procedure.

As for the receiver and transmitter, performance is what I've come to expect from the better quality transceivers. The receiver sensitivity measured 0.4  $\mu$ V for a 10-dB S+N/N (signal plus noise to noise ratio). Adjacent channel rejection measured 65 dB (considerably better than the factory claimed 50+ dB), while the AGC action was a superb 3 dB between the test limits of 2  $\mu$ V and 10,000  $\mu$ V.

The transmitter delivered exactly 4 watts output to a 50-ohm load. A -30-dB microphone sensitivity produced 100% modulation, which was limited to 100%. The S-meter was calibrated for an S9 indication with a 100 µV input.

All in all, an impressive package, which is probably representative of the way future computerized CB rigs are likely to go. The Pace 8117 sells for \$249.95. For additional information circle No. 64 on the reader service coupon.

#### Redco RFC-50

(Continued from page 50)

ample, the display indicates 27,9651 with the *resolution* selector at the "100" setting, meaning that you must multiply the reading by 100. 27.9651 times 100 becomes 27.965100, or 27.9651 MHz.

Now suppose that you require greater resolution. Using our last example, you would set the *resolution* to "10" (meaning kHz) and the reading might indicate 7.96515. You know the figure that vanished when displaced to the left was a 2, hence the frequency is 27.965150, or 27.96515 MHz. The error is again in the digits column; 9 Hz maximum plus the instrument's normal error, which is specified as 9 parts in  $10^{-6}$ 

Our tests indicated reliable readings to about 46 MHz; we would say the upper limit should be the specified 40 MHz. The minimum input signal for a reliable reading in the RF range of 50 kHz to 40 MHz feeding the direct front panel input was nominally 30 mV, somewhat more sensitive than the specified 100 mV. Because of normal component tolerances, we would assume the manufacturer's claim of 100 mV to be typical.

The input power rating of the sampling circuit is 100-watts P.E.P. Our tests were limited to the maximum rating of our test transmitter which is 250-watts P.E.P., and all worked well up to 250 watts. We must assume the REDCO 1000-P.E.P. rating is correct. At the low

end, we found flea power as low as 2-watts through the in-line connection gave reliable performance.

While the in-line connection has no effect at the lower frequencies, in the range of 27 to 30 MHz it produces an SWR of nominally 1.3:1. This has no real effect on the average antenna system or the associated transmitter's performance, but you should be aware of the fact your SWR indicator (meter) will read slightly higher than usual.

Is it Accurate? Accuracy is always a relative term, for it depends on what is used as the standard of reference. In this instance, we used a Hewlett-Packard frequency counter, which is generally employed for our transmitter tests. The REDCO RFC-50 indicated within 20 Hz of the HP's reading. Considering that the HP counter can indicate 0.001 Hz, the RFC-50's frequency reading was essentially accurate; certainly as accurate as the average hobbyist will ever need or be able to afford. As to long-term accuracy, that depends, as do all other counters without a TXO (temperature controlled oscillator), on the ambient environment, and the quality of the counter's crystal and com-

Summing Up. Overall, the REDCO RFC-50 performs well as an in-line Amateur or CB) frequency indicator.

The REDCO RFC-50 Communications Frequency Counter is priced at \$179.95 complete with AC and DC power cords. For additional information, circle number 68 on reader service coupon.

#### YOU'RE UNDER SURVEILLANCE!!

A HOST OF PEOPLE, AGENCIES, AND COMPUTERS ARE BUSY SPYING ON YOU AND YOUR BUSINESS EVERY DAY, OFTEN ILLEGALLY....

**HOW TO STOP IT OR DO IT BACK!** 



A Large Format (81/2" x 11") Quality Paperback, 240 Pages

BUGGING WIRETAPPING OPTICAL AND ELECTRONIC SURVEILLANCE SURREPTITIOUS ENTR DETECTIVE TECHNIQUES WEAPONS COUNTERMEASURES

"A VIRTUAL ENCYCLOPEDIA ON SURVEILLANCE
. . . EVERYTHING YOU'VE ALWAYS WANTED TO KNOW ABOUT SPYING."—

PLAYBOY MAGAZINE

With Each Order You Receive Free Other Material And Literature For Investigative Procedure...

**QUIMTRONIX** Postpaid—P.O. Box 548-EE Seattle, Washington 98111 CIRCLE 17 ON READER SERVICE COUPON

111((( PHASERS )))))

PPF-1 PHASER PAIN FIELD — This device recently developed and patented in our labs is being evaluated by law enforcement agencies for riot and crowd control. It is now available but soon will come under the jurisdiction of weapons and internal machine control making it unavailable to the public. The device is hand-held and looks like a BUCK ROGERS ray gun. It is hazardius if not used with discretion.

PPF-1 PSG-1 PLANS \$15,00 PFG-1 INVISIBLE PAIN FIELD GENERATOR — This amazing, simple hand-held device is about the size of a pack of cigarettes and generates a directional field of moderate to intensive pain in the lower part of the head up to a range of 50° Device is simple and economical to make IPG-1 PLANS \$6.00 IPG-1K ALL PARTS \$39.50 IPG-10 ASSEMBLED&TESTED FOR ANIMAL CONTROL \$49.50

#### ---- LASERS -

RUBY LASER RAY PISTOL — Produces highly intense red beam capable of burning A hazardous device PLANS PARTS SOURCES \$15.00

HIGH POWERED CARBON OLOXIDE BURNING AND CUTTING Complete plans and all parts sources \$10.00

SOLID STATE IR 12 WATTS with built in power supply plans \$6.00 Complete kil with collimator \$54.50

POCKET LASER pulsed, visible red plans \$6.00

Complete kit \$39.50 Also complete plans and parts sources for RUBY YAG NEODYNIUM, HeNe ARGON, OYE, NITROGEN and many more lasers


#### SECURITY -Z

SNP-2 SNOOPER PHONE — Dial home or office phone while on vacation activating sensitive mike without phone ringing Excellent property protection and intrusion device SNP2 PLANS \$7.00 SNP2K ALL PARTS \$49.50 SNP20 ASSEMBLED AND TESTED \$89.50 LONG RANGE XMTR PLANS \$6.00 SEE-IN-THE-DARK PLANS \$8.00 DIRECTIONAL SHOTGUN MIKE PLANS \$7.00 SUPER SENSITIVE PARABOLIC MIKE PLANS \$7.00 SOUND & TELEPHONE OPERATED TAPE RECORDER \$5.00 CATALOG ON PLANS, KITS & FINISHED UNITS \$1.00

Send check or money order to SCIENTIFIC SYSTEMS, Dept. A10, Box 716 AMHERST, N.H. 03031

CIRCLE 12 ON READER SERVICE COUPON

# EMENTA

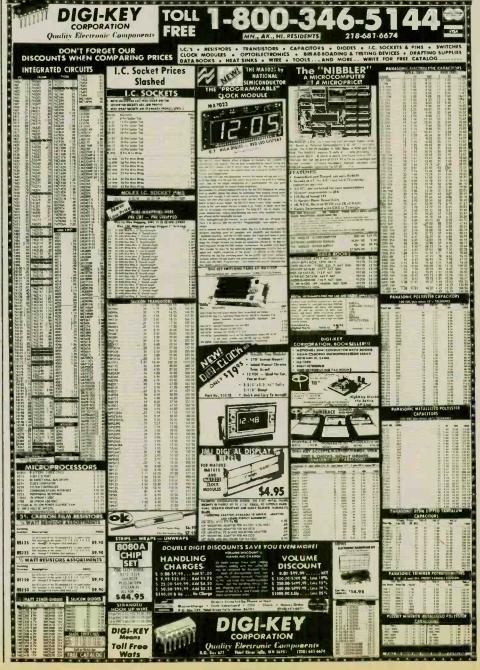

SRR RR/Pr



Big enought to utilize full size speakers: woofer, 5" middler & 4" super Big enough to handle 50 Watts/channel, small enough to fit your budget. Freq. Resp. 30 to 22,000 Hz. Damping. Cabinet size 20x11x9½"dp. Good things come in small packages a nice extra set for the other room ..? Sh. Wt. 60 Lbs. (allow for two 30 Lb parcels)

\$88.88/pair KIT Order No. 8Y0542



Neat assembled board contains all solid state components. Contains a DARL INGTON drive, push-pull output, all with complementary power tab transistors & mounted to lg. heat sinks. Accepts input from tape decks, magnetic or ceramic phono cartridges, mikes, etc. Requires a 48V xformer & 1 meg volume control. (not supplied) Output 8 into 8 ohms. (supplied with

Sh. Wt. 1 Lb. . . . . 8Y0513 . . . . \$5.78 \*Stereo Xformer . . . 8G0530 . . . \$2.88 \*Stereo Pkg. 16 watts W/xformer & Cont. Sh. Wt. 4 Lbs . . 8E0544 . . \$13.88

#### TOUCH SWITCH

ALARM



NEW packaged system. A super closeout item. Protects your valuables; gun's, CB's, stereo equipment, test equipment, etc . . . . List Price \$22.88 Sh. Wt 1 Lb . . . . 8MI0474 3 for \$22.88 . . . 8MI0474 .\$7.88 ASC-11 KEYBOARD CONSOLE



Honeywell No. 74100903-001 ASC11 encoded microswitch data entry format keyboard. Comes with fully populated I.C. boards. Some 100 I.C.'s, 7100 & 71400 series, or some are dot matrix I.C., LSI chips TMC 4907 - a 4 mhz crystal, a Mostek MK2002, plugs into a wire wrap board of 120 sockets. Also 2-large heat sinks, 4-2N3055 xistors, 2-2N3668, 4-jumper cables with dip plugs attached, 30 lamps No. 382 & other stuff. Power required for keyboard +5VDC, to 12VDC regulated. Pin out supplied for keyboard only. Keyboard in console is a complete assembly ASC11 encoded & is easily removed to fit or use as is. The additional circuitry was used to drive status indicators; Format, program level, check & display etc. Console size: 19" wd.x16"dp.x8" hg. rear, front slopes to Removed from equipment 2 3/4"hg. Good to excellent condition.

Sh. Wt. 16 Lbs . . . 8W0584 . . . 3 for \$188.88 . . . 8W0584 . . . \$188.88/



Neat new closed-circuit alarm board will latch a relay if the alarm circuit is opened. This unit operates on 12-VDC at such a low price, it makes a perfect compact alarm component. With Data. Qty Ltd.

Sh. Wt. 6 oz..... 5 for \$13.88.... ... 8K30267 ....\$2.88 . 8K30267 ... \$13.88/5 POWER SUPPLY KIT INPUT 115V - 60 HZ. SPRAGUE (iii)

We supply all electrical & electronic parts, you supply labor & mechanical parts, tools & case.

Battery Charger 12VDC, 20A, 20 Lbs 7C70005 (20A). \$19.1 Battery Charger 12VDC, 15A, 15 Lbs. \$19.50 9C0089 . . . (15A) . . . \$14.50 Ni-Cad Battery Charger Kit, Up to 35 VDC, 50 Ma. Sh. Wt. 5 Lbs. . .7670243 Price \$6.00 P.S. Kit, 5V, 1A Reg'ted 7070267 \$6.00 5 to 24 VDC Reg'ted & adjustable, 5 A. 6MI60301 . . \$14.88

SPECIAL OFFER! 



		1	
TTY.	MD33	ASR .	\$348.88
TTY	MD33	KSR .	\$288.88
TTY.	MD33	RO	\$248.88
TTY	MD35	ASR .	\$448.88
TTY	MD35	KSR .	\$388.88
		P8M	
*IBM	725 I/O-V	V/Keyboard	\$498.88
Singe	r MD70 W	ork Station	I/O, Yours
Singe	r Pertec	7-Track K	ey-To-Tape
Singe	r Line Print	er MD52	\$350.00
*Nov	a/IBM Desk	Top Term.	\$748.88
Nova	IBM Desk	Top Termin	al (ASC11)
Price			\$888.88
		21	
*IBN	A SELECTE	RIC (BALL)	PRINTER



3-Line, & 11 Line, call directors with dial. Reconditioned,

state choice! Sh. Wt. 10 Lbs. .3 Line . 8C0277. \$28.88 Sh. Wt. 15 Lbs.. 11 Line 8C0550 \$49.88 ALSO: TOUCH TONE PAY STATION TELEPHONES 8C30273



AD/2-WAY LOUDSPEAKER

This neat accustic suspension system with 8" woofer, 3 1/2" super horn, Piezo tweeter, Freq. Resp. 25. Hz. To 25. Khz. Walnut vinyl cabinets x 7½"Hg. x 11½"Dp. Max. power 60 watts, Imp. 9 ohms. Kit includes 2-en closures, 2-8" woofers, 2-Piezo tweeters, grill cloth, terminals, accoustic dampening, Inst. assembly.
DO-IT-YOURSELF & SAVE! This

system listed for \$81.00. Sh. Wt. 38Lbs. . . 9Y0005. \$68:88/Pr

POSTAGE: Please add postage, All material is F.O.B. Peabody, Ma. No C.O.D.'s please. Massochusetts Residents add 5% sales tax. PHONE ORDERS WELCOME!

Use your Bank Americard, Master Charge or American Express Credit Card!

\$10.00 min. on all charge orders.

**B&F ENTERPRISES** Dept. F-56 119 Foster Street Peabody, MA. 01960

URPLUS FREE JUMBO CATALOGI JAM-PACKEO WITH SURPLUS ELECTRONIC PARTS. GAOGETS, KITS AND MOREI CIRCLE READER SERVICE COUPONI



CIRCLE 5 ON READER SERVICE COUPON

# CALL TOLL FREE (800) 423-5387

2.00 1.25 . 50 . 25

CA, HI, AK, (213) 886-9200

\$22.88/3

#### TOP QUALITY, LO-COST SPECIALS Order by Cat No and description

Description

DATA CASSITIS, 10 min

DATA CASSITIS, 10 min

DESKITIS, 3" on sector, 183-80

SOUND ACTIVATED SWITCH was

20 of TANTALUM, 3DV said

22 of TANTALUM, 3DV said

320 of TANTALUM, 3DV said

321 TANTALUM, 3DV said

320 of TANTALUM, 3DV said

4 POS ROCKER

4 POS ROCKER

185-80 bis MEMORY ADD-ON NIT

185-322 PRIN 190 of TANTALUM

187-322 OF TANTALUM

187-322 OF TANTALUM

187-323 OF TANTALUM

187-324 OF TANTALUM

187-325 OF TANTALUM

197-325 OF TANTALUM

197-3 1142 1224 1225 1033 1033 1033 1047 1221 1021 1021 1021 1021 1123 11021 1125 11021 1156 1199 1020 1167 1160 1087 1160

#### COMPUCRUISE only \$165

"LIFT-IT" PC **DUPLICATING** 

IC MASTER 1979 \$45

#### TRS-80 SOFTWARE

CASSETTES Description

ARGON ONESS B.

STAR TREE B.

STAR TREE B.

TAROTI I/B.

TOTHER I/B. 1093 1041 1036 1042 1179 1192 1195 1186 1187 1047 1043 1051 1049 1038 1153

#### SEND FOR FREE SPRING CATALOG **FEATURING:**

FACTORY FRESH, PRIME IC'S, LED'S, READOUTS. RECTIFIERS. ZENERS. TRS-80 ADD-ONS, S-100 BOARDS. PC AIDS, TEST EQUIPMENT, BOOKS, SOFTWARE, AND MORE.

19355 BUSINESS CTR DR 6E5 **NORTHRIDGE, CA 91324** 

#### SUBSCRIBE TODAY TO

# Science Fiction Magazine

#### Now monthly!

To: ISAAC ASIMOV'S SF MAGAZINE Box 1855 GPO, NYC, NY 10001

<b>Enclosed</b>	is	\$5.95	for	6	issues	(outside	U.S.	۹	&	poss.
\$6.97).										

I enclose \$11.90 for 12 issues (1 yr.).

I prefer to use my MASTER CHARGE or VISA credit card -however, only these longer terms are available:

1 yr. (12 iss.) \$11.90 2 yrs. (24 iss.) \$22.90

<b>Credit Card</b>	No	
--------------------	----	--

Expiration date	Signature	4
Name		
Address		

City.

State. \_Zip\_

Please allow 6 to 8 weeks for delivery of first issue.

H9D071

CUSTOMERS THE WORLD OVER ARE CLAMORING FOR OUR GIANT

PENNY ARCADE

SUCCESSFUL? ... YOU BET IT IS!



"THE FAT" MALLORY AA MERCURY BATTERY Duracell by Mallory type RM-12. Same height as a AA but 5/ 8" DIA., giving excellent AA substitute with extra power. Factory Fresh Factory Fresh. Cot. No. 92CU5679 2 for \$1.50

BEEM 'O' LIGHT" LASER DIODES

-99

2 for \$6

LASD-59 style, N-type Designed in Hetero-junction Cosx structure, for PULSE mode operation, Rated & 5-9 Watts. Wavelength: 904 nm. (approx.i Typ. Forward V tpeak); L2V, Max. For. Cur. 40 A. SICE: 305 x 78. Cat. Mc. 920U3508

GIANT "INCHER" READOUT



To be exact 0.8" of an inch. COMMON CATHODE, direct replacement for Litronics 747, Left decimal. SV & 8 mils peasegment. Red. Cas. No. 92CU3327

daly \$2.99

2 for \$3

#### FANTASTIC? YOU BET IT IS! LOOK WHAT YOU GET FOR 1¢ MORE!

\$0 SHOCKLEY DIODES, most popular switching glode, hobby & untasted (#1072A)	or 1.3
\$0.5 MOCKLEY DIODES, most popular switching diode, hobby & untasted (#10724), 1.29 127  4 CHERTY MICRO SWITCH, 125 VAC, 15A, N. C., 1907 Marterial, U-test (#2628A), 1.29 127  4 CHERTY MICRO SWITCH, 125 VAC, 15A, N. C., 1907 L. 13, scraw traminals (*5251), 1.29 127  5 SPST PUBNISULTTON MOMENTARIES, *1.29 1.29 128  30 RADIO AND TY KNOBS, asst sfyles, alces (*217), 1.29 129  50 CADIO AND TY KNOBS, asst sfyles, alces (*217), 1.29 120  50 TUBULAR CAPACITORS, sest, volts and sizes (*219), 1.29 120  51.00 MOISE RESISTORS, 3, 7 vs. axia, pop sizes (*228), 1.29 120  52 SURPRISE, all kinds of parts ine pak (*284), 1.29 120  52 SURPRISE, all kinds of parts ine pak (*284), 1.29 120  52 SURPRISE, all kinds of parts ine pak (*284), 1.29 120  60 COLS AND CHOKS, *1, paresitic, if, etc (*297), 1.29 120  60 COLS AND CHOKS, *1, paresitic, if, etc (*297), 1.29 120  60 COLS AND CHOKS, *1, paresitic, if, etc (*297), 1.29 120  50 MICA CAPACITORS, asst values (*372), 1.29 120  50 MICA CAPACITORS, asst values (*372), 1.29 120  60 DISES RCA PLUGS AND LACKS, phono (*402), 1.29 120  50 CAPACITORS, asst values (*372), 1.29 120  50 CAPACITORS, asst values (*372), 1.29 120  50 CAPACITORS, asst values (*372), 1.29 120  50 CAPACITORS, sat values (*372), 1.29 120  50 CAPACITORS, sat values (*372), 1.29 120  50 CAPACITORS, sat values (*372), 1.29 120  50 COLSTANSISTORS, sat up and as (*453), 1.29 120  50 CAPACITORS, sat up and as (*453), 1.29 120  100 CAPACITORS, resistors, calor coded, asst (*454), 1.29 120  100 CAPACITORS, resistors, assist and (*453), 1.29 120  100 CAPACITORS, resistors, assist and (*453), 1.29 120  100 CAPACITORS, resistors, assist and (*453), 1.29 120  100 CAPACITORS, resistors, assist and and prop types (*654), 1.29 120  100 CAPACITORS, resistors, assist and and prop types (*654), 1.29 120  100 CAPACITORS, resistors, assist and and prop types (*654), 1.29 120  100 CAPACITORS, resistors, assist and and prop types (*654), 1.29 120  100 CAPACITORS, resistors, assist and prop types (*654), 1.29 120  100 CAPACITORS, resistors,	or 1.3
6 OPTO-COUPLER, ISOOY Isolation, hobby material, U-tast (#2629A).  4 CHERRY MIGRO SWITCH, 125 VAG, 15A, N. C. type E. 13, scraw terminals (#3528). 1.29  5 SPST PUSHBUTTON MOMENTARIES, rt. angla, pent, on-on' (*3635). 1.29  50 TAIL STILL, SWITCH MOMENTARIES, rt. angla, pent, on-on' (*3635). 1.29  50 TAIL SWITCH SWITC	or 1.3
### CHERRY MICRO SWITCH, 125 VAC, 15Å, N. C. type f. 13, scraw trammals (#3528), 1.29  25 TTL s, with 7400°s, U-tast, dips (#2415Å)  30 RADIO AND TV KNOBS, sast sfyles, sizes (#227)  30 RADIO AND TV KNOBS, sast sfyles, sizes (#227)  31 SUW MOISE #ESISTORS, 3, sizes (#2415Å)  31 SUW MOISE #ESISTORS, 3, 7 w. axial, pop sizes (*228)  32 SURPRISE, all kinds of parts in a pak (#284)  12 PAMEL SWITCHES, rotery, siles, toggles, etc (*295)  12 PAMEL SWITCHES, rotery, sast up and any (*453)  12 PAMEL SWITCHES, rotery, sast up and any (*453)  12 PAMEL SWITCHES, rotery, sast up and any (*453)  12 PAMEL SWITCHES, rotery, sast up and any (*453)  12 PAMEL SWITCHES, rotery, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sast up and any types (*654)  12 PAMEL SWITCHES, sa	or 1.3
\$ 5 PST PUBHBUTTON MOMENTARIES, rt. engla, pcmt, on-on' [=5635].  \$ 1.29	or 1.3
23 TTLs, with 7400's, U-test, dips (e2415A)	or 1.3
\$5 OUMULAR CAPACITORS, sest_volts and sizes (=220)	or 1.3
\$5.00 WOISE RESISTORS, \$3, 7 w. sala, pop sizes (<220)	or 1.3
SOPOWER RESISTORS, 3, S. T. w. axial, pop sizee (+228)   1.29	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
\$22 SURPRISE, all kinds of parts in a pask [= 284]	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
12 PAMEL SWITCHES, rotery, slide, loggle, etc. (#295)	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
60 COLLS AND CHORKS, rf, peresitic, rf, etc. (*297)	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
80 TERMINAL STRIPS, up 10.4 eolder lugs (=3.24)	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
60 PRECISION RESISTORS, WW, 13, asial (~363)	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
SOMICA CAPACITORS, asst values [-373]   1.29   1001   10 SETS RCA PLUGS AND JACKS, phono [-402]   1.29   200   10 SETS RCA PLUGS AND JACKS, phono [-402]   1.29   200   20 TRAMISSTOR ELECTRO'S, asst values long isads [-437]   1.29   120   200   20 TRAMISSTOR ELECTRO'S, asst up and as [-433]   1.28   120	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
10 SET'S RCA PLUGS AND JACKS, phono (=402) 1.29 201 60 DISC CAPACITORS, asst vasivales long issed (=437) 1.29 1201 20 TRANSISTOR ELECTRO'S, asst up and as (=453) 1.29 1201 20 TRANSISTOR ELECTRO'S, asst up and as (=453) 1.29 1501 23 SALVER MICAS, residency, color coded, asst (=454) 1.29 1501 23 SALVER MICAS, residency, color coded, asst (=455) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6427) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, asstal tasads, u test (=6651) 1.29 1501 20 CRMANNIUM DIDDICS, u test	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
80 DISC CAPACITORS, asst values long issets [#437]. 1.29 1201 207 TRANSISTOR ELECTRO'S, asst up and as [#433]. 1.29 400 TS-HALF WATTERS, resistors, asst up and as [#435]. 1.29 1501 33 SILVER MICKS, red backs, asst [#456]. 1.29 1501 33 SILVER MICKS, red backs, asst [#456]. 1.29 1501 33 SILVER MICKS, red backs, asst [#456]. 1.29 1501 33 SILVER MICKS, red backs, asst [#456]. 1.29 1601 1605 TRANSISTORS, Regulators, assaing and computer. Asial, as. yield [#3140]. 1.29 2001 100 PRINTED CIRCUIT Vs WATT RESISTORS, asst [#1060]. 1.29 1201 127 RAMSISTORS SOCKETS, asst npn and pmp types [#651]. 1.29 1201 127 RAMSISTORS SOCKETS, asst npn and pmp types [#651]. 1.29 1201 101 101 101 101 101 101 101 101 10	or 1.3 or 1.3 or 1.3 or 1.3
20 TRANSISTOR ELECTRO'S. asst up and ar (*453)	or 1.3 or 1.3 or 1.3
75-MALF WATTERS, realistors, color coded, sest [#454] 1.29 1501 35 SILVER MICKS, red backs, axial, sest, [#455] 1.29 701 4-PUSH BUTTON, SPST, PANEL, M.C. 125V 1 A   5289  1.29 81 100-GERMANIUM DIODES, saxial leads, ut est [#452] 1.29 200 100-STABISTORS, Ragulator, sansing and computer, Azial, ex, visid [#3140] 1.29 200 1100-STABISTORS, Ragulator, sansing and computer, Azial, ex, visid [#3140] 1.29 200 1107-MICKS (CHICHEN) 1.29 100 112 FRANSISTOR SOCKETS, assit name Visid [#551] 1.29 200 112 FRANSISTOR SOCKETS, assit name Visid [#551] 1.29 100 110 FRANSISTOR SOCKETS, assit name Visid [#551] 1.29 100 110 FL. 2010 150 FRANSISTOR SOCKETS, assit name Visid [#551] 1.29 100 110 FL. 2010 150 FRANSISTORS [#551] 1.29 100 110 FL. 2010 150 FRANSISTORS [#551] 1.29 100 110 FRANSISTORS [#551] 1.29 100	or 1.3 or 1.3
35 SILVER MICAS, rod backs, sxial, asst. (#455)	or 1.3
4-PUSH BUTTON, SPST, PAMEL, M.C. (128V 1 A   5289) 1, 29 100-GERMANIUM DIODES, satalisation, strett [642] 1, 129 100-STABISTORS, Regulator, sansing and computer, Asial, sa., yieid [73140] 1, 129 100-PRINTED CIRCUIT Y, WATT RESISTORS, assit (=5060) 1, 29 12 TRANSISTOR SOCKETS, assit one and pnp types [6551] 1, 29 10 TRANSISTOR SOCKETS, assit one and pnp types [6561] 1, 29 10 TRANSISTOR SOCKETS, assit one and pnp types [6561] 1, 29 10 TOR (= 2 bubs, for 1 10 Vac projects, hobby, at [7 1222] 1, 29 10 TOR (= 2 bubs, for 1 10 Vac projects, hobby, at [7 1222] 1, 29 10 TOR (= 2 bubs, for 1 10 Vac projects, hobby, at [7 1222] 1, 29 10 TOR (MITTY REED SWITCHES [61238] 1, 29 10 TOR (MITTY REED SWITCHES	
100 CERMANIUM DIDDES, astal leads, u test [=642]   1.29   2001	
100-STABISTORS, Ragulator, sansing and computer. Asial, st. yield [*3140].   1.29   2001   100 PRINTED CIRCUIT 'y MATT RESISTORS, sast [*1000]   1.29   2001   12 TRAMSISTOR SOCKETS, assit nps and pnp types [#654]   1.29   204   50 - 3 AMP SILICON RECTIFIERS, stall, assit (*#658)   1.29   100   10 NE. 2 bulbs, for 110 vac projects, hobby, at [**1232]   1.29   100   10 NE. 2 bulbs, for 110 vac projects, hobby, at [**1232]   1.29   201   10 PROXIMITY NEED SWITCHES [#1238]   1.29   201   10 PROXIMITY NEED SWITCHES [#1238]   1.29   12   10 SOOLEX CONNECTORS, nylon, asst. sizes [#5642]   1.29   12   10 SOONEX ORNECTORS, nylon, asst. sizes [#5642]   1.29   12   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   12   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX CONNECTORS, nylon, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP ZEMER BIODES, asst. stall, u test [**1864]   1.29   100   10 SOONEX MAP	or 1.3
100 PRINTED CIRCUIT 'N WATT RESISTORS, esst [+1060] 1.29 204 12 TRANSISTOR SOCKETS, asst nam and npp types [#651] 1.29 244 50-3 AMP SILICON RECTIFIERS, skial, asst V[+865] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, for 110 vac projects, hobby, stc [+122] 1.29 1001 50 FL. Zbulba, stc [+122] 1.29 1001 50	or 1.3
12 TRAMSISTOR SOCKETS, asst npn and pps types [654]   1.29   244   50 - 3 AM PSILICON RECTIFERS, stail, asst V[-865]   1.29   100   50 - POLYSTYREME CAPS, pisstic costed, prec. [e1052]   1.29   100   10 NE. 2 Dubs, for 110 vas projects, hobby, at 6 [e1222]   1.29   10 PROXIMITY NEED SWITCHES [e1258]   1.29   20   6 2 2915 LURF O-18 TRAMSISTORS [e1238]   1.29   20   6 2 2915 LURF O-18 TRAMSISTORS [e1238]   1.29   20   6 2 2016 LEX CONNECTORS, nylon, asst. sizes [e542]   1.29   20   6 3 CALCULATOR AC CAPATOR ACK, standard threads 3 terminals [e2316]   1.29   20   7 5 CALCULATOR AC CAPATOR ACK, standard threads 3 terminals [e2316]   1.29   100   7 5 CALCULATOR ACK ASTOR ACK, standard threads 3 terminals [e2316]   1.29   100   7 5 CALCULATOR ACK ASTOR ACK, standard threads 3 terminals [e2316]   1.29   100   7 5 CALCULATOR ACK ASTOR ACK, standard threads 3 terminals [e2316]   1.29   100   7 5 CALCULATOR ACK ASTOR AC	or 1.3
SO-3 AMP SILICON RECTIFIERS, stall, asst Vir865	or 1.3
\$0 POLYSTYREME CAPS, pisstic costed, prec. [=1052]. 1.29 1001 IONE. 2 bulbs, for 110 Vas projects, hobby, at 6 = 12322]. 1.29 201 IOP ROXIMITY NEED SWITCHES [#1258] 1.29 201 A 29915 UNIF O-18 TRANSSTORS [=1423] 1.29 121 30 MOLEX CONNECTORS, nylon, asst. sizes [=5642] 1.29 123 SO MOLEX CONNECTORS, nylon, asst. sizes [=5642] 1.29 123 SO MOLEX CONNECTORS, sixt, sixt, u test [=1564] 1.29 123 SO MILEX CONNECTORS, sixt, sixt, u test [=1564] 1.29 120 SO MILEX CONNECTORS, asst, sixt, u test [=1564] 1.29 120 SO MILEX CONNECTORS, asst, sixt, u test [=1564] 1.29 120 SO MILEX CONNECTORS, asst, sixt, u test [=1564] 1.29 120 SO MILEX CONNECTORS, asst, sixt, u test [=1564] 1.29 120 SO MILEX CONNECTORS, asst, sixt, u test [=1564] 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO UNPRICENT ELECTROS, asst'd values & concentrate, (=2256) 1.29 120 SO	or 1.3
10 NE - 2 butbs, for 11 Ovac projects, hobby, atc  s   1222	or 1.3
10 PROXIMITY FEED SWITCHES [# 1238]     1.29     201       8 29915 UNIF TO-18 TRANSISTORS [# 1423]     1.29     123       30 MOLEX CONNECTORS, nylon, asst. sizes [# 5642]     1.29     601       8 CALCULATOR AC CADATOR JACK, standard threads 3 terminals [# 2316]     1.29     123       50 ONE AMP TEMER DIODES, asst, sixis), u test [# 1964]     1.28     100       5 MINI MOTORS, 15 VIDC, for many hobby projects [# 2351]     1.28     10       6 MINI MOTORS, 15 VIDC, for many hobby projects [# 2355]     1.29     12       7 OL JPRIGHT LECTTOS, asst'd values & capacitance, [# 2356]     1.79     40       1 - UNF TUNKR, soild siste, standard type [# 2927]     1.29     20       6 175 A SNAP, 9 VDC BAT-Cip, red bisck/test/sed [# 2852]     1.29     22	or 1.3
8 2M915 UNFT O-18 TRANSISTORS [= 1423] . 1.29 604 . 1.2	or 1.3
30 MOLEX CONNECTORS, nylon, asst. sizez [#5642]   1.29 601	or 1.3
### CALCULATOR AC ADAPTOR IACK, standard threads 3 terminals (=2316) . 1.29 100   5-PA.281 THREE WAITI PC BOARDS, for smos (=2013) . 1.29 100   6-MINI MOTORS, 1½ VDC, for many hobby projects (=2551) . 1.29 120   50-INAGOO RECTIFIERS, sest to 800V, v test (=2594) . 1.29 1000   20-UPRIGHT LECTROS, sest to 800V, v test (=2594) . 1.29 1000   1.UPR TUNER, solid state, standard type (=2927) . 1.29 20   1.1575 ASNAP, 9 VDC BAT-Lip, red h bisck tose (=28522) . 1.29 20   215 SASNAP, 9 VDC BAT-Lip, red h bisck tose (=28522) . 1.29 20   215 SASNAP, 9 VDC BAT-Lip, red h bisck tose (=28522) . 1.29 20   22   23   24   25   26   27   28   29   20   20   20   20   21   22   23   24   25   26   27   28   29   20   20   20   20   21   22   23   24   25   26   27   28   29   20   20   20   20   20   20   20	or 1.3
S-PA-28 THREE WATT PC BOARDS, for smos (s 20(3) 1.29 10(6) 6 MINI MOTORS, 14' VDC, for many hobby projects (s 2551) 1.29 12' 50- INADOO RECTIFIERS, sest to 800', s test (s 2594) 1.29 100(1.20	or 1.3
6 MINI MQTORS, 15 VDC, for many hobby projects (= 2551) 1.29 120 50 IN4000 RECTIFIERS, sest to 800 y, v test (= 2594) 1.29 100 20 UPRICHT ELECTROS, sest'd values & capacitance (= 32268) 1.29 40 1.UHF TUNER, solid state, standard type (=2927), 1.29 20 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 20 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red h bisck thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, 9 VDC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SNAP, PVC BAT-Cip, red his key thesa (= 2852) 1.29 120 (5175 A SN	or 1.3
50. IMAGOOR RECTIFIERS, asset to 800V, u test [=2594]. 1.29 1001 20. UPRIGHT ELECTROS, asset d'avieus & capacitance, [=3226A] 1.29 1001 1.UNF TUNER, soild state, standard type [=2927]. 1.29 21 6.175 A SNAP, 9 VDC BAT-Cipi, red n'bisch less [=2852] 1.29 22	or 1.3
20.UPRIGHT ELECTROS, sest'd values & conscitance. (= 3226A)   1.29   40.	or 1.3
1-UNF TUNER, solid state, standard type (=2927). 1.29 21 6 ITS A SNAP, 9 VDC BAT-clip, red n bisck lead (=2852). 1.29 121	
6 ITS A SNAP, 9 VDC BAT-clip, red n bisck lead (#2852)	
	or 1.3
The state of the s	or 1.3 or 1.3
	or 1.3
5 MICRO SWITCHES, push, asst types [#3011]	or 1.3
40 SQUARE DISC STYLE CHOKES, color coded [#3203]	or 1.3
30 TRANSISTORS T092 2N4400 series, u tagt (* 3291)	or 1.3
& TRANSISTORS TRANSFORMERS, audia, Inter, etc mim (#3295)	or 1.3
15 PRINTED CKT TRIMMER POTS, sast values, etc [# 3346]	or 1.3
7-2N3055 HOBBY NPN TRANSISTORS, TO-3 - U3771)	or 1.3
10-PNP 30 WATT TO-3 TRANSISTORS, hobby (#3772)	or 1.3
SO TUBE SOCKETS, 4, 5, 6, 7 pin tubes, seet (# 3839)	or 1.3
1-10 AMP POWER TAB QUADRAC, 200 PRV, TO 220, 2/trigger (#1590)	or 1.3
10-BULLET RECTIFIERS, 1.5 amp, 200V, axial (#84)	or 1.3
	or 1.3
	or 1.3
	or 1.3 or 1.3
	or 1.3 or 1.3 or 1.3
	or 1.3 or 1.3 or 1.3 or 1.3
	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
60 CERAMIC CAPS, Incl. NPO's, neg. coef. N750's asst. values. #35B90)	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3 or 1.3
10-15V ZENERS, 400mw, saiat, glass case (#5404)	or 1.3 or 1.3 or 1.3 or 1.3 or 1.3

12-1.5V LAMP AND SOCKET SET, 200ms, T2 style (#3956)	24 for 1.30
12-1.59 LAMP AND SOCKET SET, 200ms, 12-tyle (#3930)	20 for 1.30
15-THERMISTORS, asat. types, styles, & values (# 2048)	30 for 1.30
4-5-DIGIT 7 - SEGMENT REACOUTS, in flet pak case (#5616)	8 for 1.30
	8 for 1.30
L"FOTO-FET" N CHANNEL, Crystalonics. J-Sealed Effect Translators (#1169)1.29	2 for 1.30
L-VOLTAGE REGULATOR, TO 202 case, 12V 600MA (#1900)	2 for 1.30
O 1 3 DICITE ON A DIP LED and DI 33 LEGET	2 for 1.30
1-3 DIGITS ON A DIP, LED, red, DL 33 #1887	6 for 1.30
□ 10-2N711 HIGH SPEED SWITCHING TRANSISTORS, TO18, npn (#3374)	20 for 1.30
2-18W HI POWER TRANSISTORS, 220V, npn, T066 (#2797)	4 for 1.30
3-24 PIN IC SOCKETS [#2168]	6 for 1.30
1. MMS212 DIGITAL CLOCK CHIP 1003 (#1625)	2 for 1.30
	4 for 1.30
1.MM5202ERASABLE PROM, 100X (#3459)	2 for 1.30
	6 for 1.30
□ 10.2M3565 RF TRANSISTORS, TO 106, 2N5133 (#3372)	20 for 1.30
10-283565 RF TRANSISTORS, TO 106, 2N5 133 (#3372)   1.29   8-LINEAR SWITCHING TRANSISTORS, 2N2905, pnp, TOS (#3375)   1.29	12 for 1.30
□ 50.2 AMP CYLINDRICAL RECT, up to 1K, u-test (#4006)	100 for 1.30
G OPEN-FACE READOUTS, LED, red, some segs missing mostly duals (# 3952) 1.29	12 for 1.30
6 OPEN-FACE READOUTS, LED, red, some segs missing mostly duels (#3952)	20 for 1.30
I D 10-DATA FRITRY SWITCHES, SPST, 1 amp, norm open 125V (#5321)	20 for 1.30
B-TRANSISTOR RADIO EARPHONES, 8 ohms imped (# 2946)	16 for 1.30
1 15-FLUORESCENT OVERFLOW READOUT TURES, w/leads # 3288	30 for 1.30
2-ALUMINUM HEAT 51NKS, for TO-220 (# 5339)	4 for 1.30
1.2N5001 BOV TRANSISTORS STUD (#2800)	2 for 1.30
3 MICROPROCESSOR/SUPPORT CHIPS, asst. MM5780-90 ser, 24-26pin (#5639A), 1.29	6 for 1.30
6 CLOCK/CALCULATOR CHIPS, seet. MM 5378. 75. 5737 etc. (=5638A)	12 for 1.30
2S DTL FAIRCHILD IC's, gates and flip flops, Dip, 100% (#3709)	50 for 1.30
1.24 VOLT 50 MIL TRANSFORMER, 115V input, open frame, 1"x 1"x 3/4" (* 5631)29 10.2N3704 TRANSISTORS, silicon, TO-92 case, hfa-300 1002 (* 5625)	2 for 1.30
10 203704 TRANSISTORS, sillcon, TO-92 case, hfs-300 1002 (#5625)	20 for 1.30
10-2N3705 TRANSISTORS, silicon, TO-92 case, hfe-150, 100% (#5826)	20 for 1.30
☐ 10 D33021 TRANSISTORS, low power, silicon, hfe-60, TO-92 (#5627)	20 for 4.30 2 for 1.30
1 ALLEN BRADLEY POT, 10K, 2-1 4 watts, type-J, 2" x 4" shaft (#1748)	100 for 1.30
50 ASST. RED LEDS, 20% or better, various styles and types = 5624	20 for 1.30
10 G.E. POWER TAB TRANSISTORS, D40N1, N2, some N5, T0-220 (#5629)	4 for 1.30
2.4" BLOCK TRIM POTS, 200K (#2535)	2 for 1.30
50 TEMP. COEFFICIENT VOLTAGE REF. DIODES. asst. volt. +503 (#5647)	100 for 1.30
12 SKINNY TRIM POTS, PRECISION, eset, styles, values 502 yield (#3389)	24 for 1.30
GODC-PRECUT, PRETINNED WIRE, various lengths and colors (#1871)	120 for 1.30
SO MINI RESISTORS for PC anni, vert \$/8W. color coded (#2235)	120 for 1.30
TO NYLON CEARS hi avalley asst sizes (# 3446)	40 for 1.30
10-5K POTS, audio taper, pisstic snap-in mounting (#5124)	20 for 1.30
I I IO IA2 MEC DUAL POTS, audio tener, "enan-in" mot (#5125)	20 for 1.30
SO-I AMP ZENERS, wide sest of values, untested (#1964)	100 for 1.30
TO 12 SCRIS & TRIACS 10 AMP cast values untested #2067	24 for 1.30
3-QUADRACS, 10 AMP, 100% prime, 50-100-200 V, TO-220 (#5048)	6 for 1.30
3-QUADRACS, 10 AMP, 100% prime, 50-100-200 V, 70-220 (#5048) 1.29 20-MINI RECTIFIERS, 1½ AMPS, 25V, apony, sais! (#5374) 1.29	40 for 1.30
	20 for 1.30
75 MOLEX CONNECTOR Type M1938 4, makes 14 to 40 pin sockets (#1609)	150 for 1.30
50 IF TRANSFORMERS, esst sizes (#35A9)	100 for 1.30
10-T.V. CHEATER CORD JACKS (#5519)	20 for 1.30 20 for 1.30
□ 10-1 AMP 200V MINI RECTIFIER, 1N4003, spoxy, sais! (#2379)	20 for 1.30
4.1.5V SILVER OXIDE WATCH BATTERIES, specify; RW-15, 18, 32 or 10L120 (# 5063) 1.29 3-LCD WATCH READOUTS, 3%" digits, 7 seg. dim 1½ x 1" (# 5066)	6 for 1.30
	40 for 1.30
	20 for 1.30
10-INSTRUMENT KNOBS, asst, styles and colors, '6" shaft (*5121)	8 for 1.30
5-TANTALUM ELECTROS, TEARDROP style, 2.2uf # 25V (#\$205)	10 for 1.30
2-INLINE FUSE HOLDERS, complete w/S amp fuse [#5213]	4 for 1.30
30-4" CABLE TIES, non-silp white plastic (# 5217)	60 for 1.30
30nc. HEAT SHRIME and sizes 50% shrinkage (#5248)	60 for 1.30
2-5.1V, SX, 10W, STUD ZENER. DO-4cape (#5287)	4 for 1.30
2 - A. A. I. SAI AVITI STOW SERVED. BY WEST SOUTH	

"CRIMP-ON" PL-259 **COAX PLUG** 

2 for \$1.29

4 for Quick, Easy plier crimping, No Soldering! Strip insulation-squeeze. Mates to SO.239. For RG58/U - 59/U. Cat. No. 92CU5696 \$1.30

LEDS: LELDS:
Order by Cst. No.
YOUR CNOICE 6 for \$1.29
IC \$ALE 12 for \$1.30
173a MICRO TOPMAT RED
1942 MED YELLOW \$TUB
2793 JUMBO RED
2135 JUMBO RED
2135 MICRO \$10MC EN
2137 MICRO \$10MC ELEAR **CAPEHART** AM/FM/PHONO

STEREO RECEIVER

Good sound and contemporary design highlight this HiFi bargain. Features incl. alide control for VOL/BAL, rocker awitch for Power-ON/OFF, Illum, Silde Rule Tuning, and top mounted ceramic Phono with dust cover and Saphire cartridge. 133 & 48 RPM. Also incl. Headphone jack and 45 spindle. SIZE: 14" a5" a

Cat. No. 92CU5640A

**PLUS SPEAKERS** 

99

MINI RECTIFIERS Famous IN4007 epoxy rec vifiers, marked (color coded) 100% Prime, with axial leads 1000's of hobby uses. Cat. No. 92CU2383

**1000 VOLT** 

1 AMP

**25 AMP** BRIDGE

20 for

\$2.49

40

\$2.50

RECTIFIERS

**40 CHANNEL** CB BOARD 2 for \$10

#### POLY PAKS®

2 for \$40

Terms: Add Postage Rated: Net 30 Phone: (617) 245-3828 Retall: 16-18 Del Carmine St. Wakefield,

MINIMUM ORDER: \$8 P.O. BOX 942-N6 SO. LYNNFIELD, MA 01940

Buy \$20 worth of merchandise Choose any two \$1,29 items FREE.



2 for \$60.00



Cat. No. 92CU5115B

Factory "lay-arounda" No time to test. A micro digital technican's bonanza' The complete guis are here in mens and indices arizes 5 Functions: HOLRS. MINUTES. SECONDS. MONTH and DATE. Sorry, no specs. Wi. 4 oz.







#### TO: ASIMOV'S SE ADVENTURE MAGAZINE 380 Lexington Avenue, New York, NY 10017

☐ Enclosed is \$1.75 plus 45¢ handling/shipping (total of \$2.20) for the Summer '79 issue (#3) of ASIMOV'S SF ADVENTURE Magazine.

Name	please print	-	
Address			Apt. No.
City		State	Zip
			EEMJ-79

#### **Antique Radio Corner**

(Continued from page 74)

Hot Tubes. This happening brings up several questions to be discussed. Number one, what would a thief do with more than 13,000 radio-TV tubes? One knowledgeable collector felt that they were smuggled into Mexico. Why would they do this? Since there are only a few known radio collectors in Mexico they would no doubt be sent to other countries where radio collecting is becoming popular.

Number two, why haven't more radio collectors installed burglar alarms? Anyone handy with tools can buy equipment from radio catalogs to protect his home, museum, or work shop. Very often insurance companies give lower rates to persons with approved alarm systems.

Number three, why haven't radio collectors made a list of every radio, tube speaker, etc. in their collection and put it into a safe (away from home) location? Using file cards list the name, manufacturer, year built, number of tubes, condition, amount paid, approximate present value, and any other fact that would help establish its value. Most insurance companies will cooperate by sending a representative to your location and will verify each item.

Fourth and last (for this discussion), why haven't radio collectors had the larger, more valuable items in their collections appraised? There are a large number of antique appraisers, but most know very little about old radio equipment. Radios are a special branch of the antiques field. What the antique radio collectors need is a "Blue Book" of antique radio values similar to the one used by used car dealers. A book of radio values would stabilize the radio collecting hobby. Everyone having such a book would know what his radios were worth as well as what other collectors radios, (that he might consider buying) are worth. The Antique Wireless Association has made a small beginning by listing prices for radios that have been sold or auctioned at their meetings.

To my knowledge there is only one appraiser for old radios now active. There are discussions going on at this time with the thought of establishing a nation wide "Antique Radio Appraisers Association." Well qualified collectors living in various parts of the United States would become members of the staff. This way any collector desiring an appraisal could find an appraiser within a few hundred miles.

Any reader who would like to comment on the insurance and appraisal discussion is welcome to write to me in care of ELEMENTARY ELECTRONICS magazine.



#### Features.....

#### **BRAND NEW!**

JUST RELEASED 1979 IC MASTER

2500 pages

Complete integrated circuit data selector. Master gulde to the latest I.C.'s including microprocessors and consumer circuits

Free Quarterly Updates



\$39.95

#### **Texas Instruments** Low Profile Sockets

Finest Quality Socket available in the world. Nobody can match Texas Instruments quality - a unique combination of I.C. technology and multimetal expertise.

Over one million pleces in stock.

1.7Million 1N4007 1000V .07

Contacts	Price	Contacts	Price
8 PIN	.08	22 PIN	.22
14 PIN	.12	24 PIN	.24
16 PIN	.14	28 PIN	.28
18 PIN	.18	40 PIN	.40
20 PIN	.20		

#### GENERAL INSTRUMENT

1 Amp Rectifiers (Epoxy)				np Single n Bridge Ae			
Stock level	Part No.		Price	Stock level	Part No.	Pri	ce
1.1Million .6Million 1.4Million 1.9Million .9Million	1N4001 1N4002 1N4003 1N4004 1N4005	50V 100V 200V 400V 600V	.029 .039 .045 .049 .055	320000 110000	W06M W08M	60CV 80GV	34

CHUTCHUNG	Part No.	Price
SWITCHING	1N914 (100V 4NS)	.027

			_	
7//	Zilog	Z80-CTC Z80A-CTC		\$10.90 \$13.10
	1000	Z80-DMA	4500	\$32.20
Z80-CPU Z80A-CPU	13.60 23.65 \$16.20	Z80-SIO/0 Z80A-SIO/0		\$45.00 \$50.00
Z80-PIO Z80A-PIO	\$10.90	Z80-SIO/1 Z80A-SIO/1	5300	\$45.00 \$50.00

#### CMOS's

#### LINEAR I.C.'S

LM324N LM339N LM555N-8 LM556N-14 LM723CN LM723CH LM741CH	.49 .49 .29 .59 .34 .39	Quad Op Amp Quad Comparator Timer Dual Timer Voltage Regulator Voltage Regulator Op Amp
LM741CH	.37	Op Amp
LM741CN-8 LM1458N-8	.39	Op Amp Dual Op Amp
FINI 142014-0	.55	Duai Op Amp

#### **VOLTAGE REGULATORS**

PART NO.	UNIT	DESCRIPTION
LM323K	\$5.50	3 Amp 5 Volt Regulator
78H05KC	\$5.75	5 Amp 5 Volt Positive Regulator TO3
7800UC Series TO-220 /LM340T	.79	Positive Voltage Regulators (Plastic) t Amp 5, 6, 8, 12, 15, 18, 24 Volts
78MOOHC Series TO-5/LM340H	\$1.50	Positive Voltage Regulator 1/2 Amp 5, 6, 8, 12, 15, 18, 24 Volts
7800KC Series TO-3/LM340K	\$1.60	Positive Voltage Regulator 1 Amp 5, 6, 8, 12, 15, 18, 24 Volts
78LOOAWC Series TO-92	.29	Positive Voltage Regulator 100 MA 2.6, 5, 6.2, 8.2, 12, 15 Volts
7900UC Series TO-220 / LM320T	\$1.10	Negative Voltage Regulator 1 Amp 5, 6, 8, 12, 15, 18, 24 Volts
79M00HC Series TO-5/LM320H	\$1.50	Negative Vollage Regulator 1/2 Amp 5.6, 8, 12, 15, 20, 24 Volts
7900KC Series TO-3/LM320K	\$1.95	Negative Vollage Regulator 1 Amp 5, 6, 8, 12, 15, 18, 24 Volts
78MGT2C	\$1.25	Oual In Line Adjustable 4 Terminal Positive Voltage Regulator
78GUI TO - 220	\$1.45	1 Amp Adjustable Positive Voltage Regulator
78S4OPC	\$2.50	Switching Regulator

All new major manufacturer production material offered. Largest variety of device types available anywhere.

#### MICROPROCESSOR

**CHIPS** CPU's

Stock level 8080A 5.95 5.50 4600 6800 8:95 7.95 16000

#### INTERFACE SUPPORT CIRCUITS

Stock level	Part No.	Price
4000	8212	1.98
1400	8214 4.95	3.95
2800	8216	1.98
1500	8224	2.75
4000	8226	1.98
1700	8228	4.75
700	8238	4.75
5800	8251 5.95	4.95
<b>5</b> 50	8253	14.95
11000	8255	5.95
400	8257	9.95
800	8259	14.95
0000	0040	
3300	6810 <b>3:95</b>	3.50
2200	6820 4.95	3.95
4200	6821 4:95	3.95
3000	6850 <b>5.95</b>	4.95
1200	6852 5.95	4.95

#### **MOS Static RAM's**

Part No. Price Stock level \$7.50 2114 11400 4K (1K x 4) 300NS 2102LFPC \$1.19 74000 1K 350NS (Low Power) 2114 \$6.95 19700

4K (1K x 4) 450NS **MOS Dynamic RAM's** 

Stock level Part No. Price 4K 4027 \$2.95 16000 4K (4K x 1) 300NS 16 PIN 416-3 \$9.95 21500 200NS \$7.95 416-5 93000 300NS

**UART's** 

Stock level Part No. Price 44000 AY5-1013A \$4.95 \$5.95 AY3-1015 3800 **1K CMOS RAM Price** 

Stock level Part No.

5101 21400

450NS (Low Power)



P.O. BOX 1035, EE-2, FRAMINGHAM, MASSACHUSETTS 01701

Over-the-counter sales. 12 Mercer Rd., Natick. Mass 01760 Behind Zayres on Rle. 9 Telephone Orders & Enquiries (617)879-0077

IN CANADA 3 LOCATIONS

5651 FERRIER ST. MONTREAL, QUEBEC H4P 2K5 Tel:(514)735-6425

4800 DUFFERIN ST. DOWNSVIEW, ONTARIO M3H 5S9 M3H 5S9 Tel: (416) 661-1115

MINIMUM ORDER \$10.00 • ADD \$2.00 TO COVER POSTAGE & HANDLING

K2C 3P2 Tel: (613) 820-9471



\$4.95



#### Solar Swinger

(Continued from page 67)

work cloth under the wooden base to protect the soft wood from scratches

Cut a 11/2" hole about 1/4" deep for the tube base. The 1/4" indentation will take a large pasteboard washer to bolt the tube socket into position. Finish drilling out the 1-inch hole for the tube prongs to fit comfortably inside. Depending upon the size of the tuning capacitor, lay it upon the bottom area and drill a large hole to enclose the whole body. Do not drill clear through the board but leave about 1/4" at the top side for the mounting area of the tuning capacitor.

The tuning capacitor and the headphones are the only components mounted outside of the tube envelope. A small 1/4" hole is drilled in the center and at the rear of the base towards the tube socket. The headphone and antenna wires will feed through this area to the tube socket pins. Cut a groove into the wood area between the capacitor and tube socket hole. The capacitor's two small connecting wires will lay flat in this groove.

If needed, sand down the top of the wooden base area with fine sandpaper. Stain, varnish or spray paint the top side. Choose a light color spray paint, such as white or yellow, to give the base and component parts a contrasting appearance. Spray on at least three coats of paint and let it dry between each coat to produce a slick, enamel appearance. Let the wood base dry overnight before mounting any parts.

Final Touchup. After the base appears dry mount the variable capacitor and connect two pieces of hookup wire from it to tie into the tube socket. Next, mount the small tube socket. Temporarily, place a piece of masking tape over the socket and wooden base plate. Lay the base upside down (over a shoebox) to wire up the remaining components. Feed the earphone cable through the rear hole and connect to terminals 4 and 6 of the tube socket. Feed a short piece of hookup wire through the same hole to serve as an external antenna connection. Solder this wire to terminal 2. Now solder the capacitor's two wires to terminals 2 and 1. Once again, check over the entire wiring procedure. Solar Swinger should be ready to roll (and rock).

Connect the antenna wire to the outside antenna-or you can try to pick up local stations with a 12-ft. piece of wire laying around the baseboard of a wall. You should be able to pick up local stations at each end of the broadcast band. If a ferrite, adjustable antenna coil is used, adjust the core until the stations are loudest at each end of the band. Turn Solar Swinger's solar cell toward the sunlight or operate under a table lamp.

After all adjustments are made, spread silicone cement over the tuning capacitor wires. Cut out a large pasteboard or plastic washer and place it over the tube pins. Use the 3/4-inch machine screw and bolt the tube socket into position. To keep the earphone wires from pulling out, apply silicone cement in the small hole. Place four rubber grommets or metal spacers on each corner for feet, and cement in place. Let the radio lay upside down until the silicone cement sets up.

The glass envelope should be mounted last and glued to the tube base with black silicone cement. Place a thin layer of rubber cement around the top, just inside the tube base. Hold the envelope in a straight upright position and set it down in the fresh cement. Now apply rubber silicone mement to the outside of the glass and base area. Wipe off all surplus with a paper towel and make a neat joint with your fingers. Let the envelope and the base dry overnight.

Many of our Solar Swinger's parts may be found in the junk box. In fact, low priced transistors are used in the directly coupled audio circuit. If you are starting out cold and purchasing all new parts, you may pick up a 2 transistor AM radio kit from Radio-Shack (#28-214) for \$6.95. Most all the parts needed for the Solar Swinger can

be robbed from this kit.

Solar Swinger-a great conversation piece, and a sunny savings over the high cost of batteries!

#### **CB Xcvr Checkout**

(Continued from page 76)

clock alert operation. Standard accessories include a microphone, and an AC power cord.

#### Receiver Section Test-

veceivet 260finit 162f:	
Input sensitivity	0.5 µV
Adjacent channel rejection	64 dB
AGC action	1.5 dB
SSB opposite sideband	
rejection	50+ dB
Input level for S6 meter	
indication	
(Reading compresses above	S6)
Transmitter Section Test:	
AM RF output	.3.8 watts
SSB RF output11 w	atts P.E.P.
Modulation to 85%	yes

Relative sensitivity for 85% ---25 dB Modulation limited to 100% .....yes Editorial Remarks: The CB555 has a relative reading S-meter, jacks for P.A. and remote speakers, L.E.D. digital channel indicator, S/RF/SWR meter, CLOCK "alert" which will automatically turn the unit on at a predesignated time, and shut it off one hour later.

#### SBE Key/Com 1000 \$259.95 (SBE, Inc.)

General Description: A 40-channel AM transceiver for mobile, P.A., marine operation. Delta tuning  $\pm 1.5$ kHz is provided. Power supply is 12 to 13.8 VDC with negative or positive ground. Overall dimensions are 2.1-in. H x 5.9-in, W x 8.8-in. D.

There are front panel controls for: volume, squelch, RF gain, variable



CIRCLE 69 ON READER SERVICE COUPON



noise limiter, and Delta tune. Switches for: CB/PA, noise blanker, panel dimmer. Eleven keyboard switches for channel selection and control. Standard accessories include a microphone, mobile mount, DC power cable.

#### **Receiver Section Test:**

Input sensitivity	0.3	μV
Adjacent channel rejection	56	dB
AGC action	13	dB
Input level for S9		
meter indication	80	μV

#### Transmitter Section Tost.

mansimited .	occion i	Cot.	
AM RF out	put	3.6	watts
Modulation	to 85%	*****************	yes
Relative se	nsitivity		
for 85%	mod.		-31 dB
Modulation	limited	to 100%	VPS

Editorial Remarks: The Key/Com 1000 has a 5 dB per unit S-meter, double conversion, jacks for P.A. and remote speakers, L.E.D. digital channel indicator, on-board microprocessor providing 40 channel SCAN, 10 channel memory SCAN, alternate channel operation and SCAN, 10-second check of priority channel, S/RF-output meter, and separate power connection for microprocessor memory.

# LITERATURE LIBRARY

322. A new 20-page, full-color TRS-80 Microcomputer Catalog has just been issued by Radio Shack. The catalog includes complete, current information on the TRS-80 Microcomputer, its peripherals and accessories with plain-language descriptions, application ideas and detailed specifications.

386. If you're looking for books on computers, calculators, and games, then get BITS, Vinc catalog. It includes novel items.

335. The latest edition of the *TAB BOOKS* catalog describes over 450 books on CB, electronics, broadcasting, do-it-yourself, hobby, radio, TV, hi-fi, and CB and TV servicing.

338. "Break Break," a booklet which came into existence at the request of hundreds of CBers, contains real life stories of incidents taking place on America's highways and byways. Compiled by the Shakespeare Company, it is available on a first come, first serve basis.

345. For CBers from Hy-Gain Electronics Corp. there is a 50-page, 4-color catalog (base, mobile and marine transceivers, antennas, and accessories). Colorful literature !flustrating two models of monitor-scanners is also available.

323. Lafayette Radio's 1979 catalog offers almost everything in hi-fi, CB, ham and many electronic parts. A product index will help you find anything from auto equipment accessorles to wire wrapping tools.

381. Fordham Radio's handy catalog covers test instruments, tools, parts, home and car audio products, scanners and lots more. Get your free copy today!

385. Amateur Radio buffs and beginners will want the latest *Ham Radio Communications Bookstore* catalog. It's packed with items you should be reading today!

373. 48-page "Electronic Things and Ideas Book" from ETCO has the gadgets and goodies not found in stores and eisewhere.

382. Buys by the dozens in Long's Electronics super "Ham Radio Buyer's Guide." Good reading if you're in the market for a complete station or spare

383. If you're a radio communicator, either ham, SWL, scanner buff or CBer, you'll want a copy of Harrlson Radio's "Communications Catalog 1979." Just what the shack book shelf needs.

372. Just what the experimenter needs can be found in Olson's bargain flyer-parts, assemblies, semiconductors, components, and more. Even more interesting are the prices.

379. There's everything in the area of musical synthesizers for drums, strings, other instruments and full orchestras, as well as audio gear, video display modules, and a computer in PAIA Electronics' catalog.

380. If your projects call for transistors and FETS, linear and digital ICs, or special solid-state parts, then look into Adva Electronics' mini-catalog for rock bottom prices.

384. The B&K-Precision test instruments are described in a new compact catalog all experimenters should have! Start stepping up your test bench

301. Get into the swing of microcomputer and microprocessor technology with CREI's new Program 680. New 56 page catalog describes all programs of electronics advancement.

302. Big catalogs are coming back. *Burstein-Applebee* will-send you theirs. It's a parts bonanza every experimenter would want to see. Latest catalog is over 200 pages.

303. Graymark's catalog reveals a host of products and kits every experimenter would like to have. Unusual binary clock is a winner. A must catalog for the beginner.

305. A new 4-page directional beam CB antenna brochure is available from Shakespeare. Gives complete specs and polarization radiation patterns for their new fiberolass directional antennas.

371. Your computer system needn't cost a fortune. Southwest Technical Products offers their 6800 computer complete at \$395 with features that cost you extra with many other systems. Peripheral bargains are included here.

374. Radatron's Catalog 1006 lists many projects from a self-contained portable lab station for an electricity-electronics course to many texts, lab manuals, and applied activities.

306. Antenna Specialists has a new 32-page CB and monitor antenna catalog, a new amateur antenna catalog, and a complete accessory catalog.

307. Atlas calls their 210X and 215X the perfect amateur mobile rigs. Their 6-page, full-color detailed spec sheet tells all. Yours for the asking.

330. There are nearly 400 electronics kits in *Heath's* new catalog. Virtually every do-it-yourself interest is included—TV, radios, stereo and 4-channel, hi-fi, hobby computers, etc.

308. Your guide to equipment for radio communication is an informative product booklet offered by R. L. Drake Co. Hams and SWLers alike should scan this 20-page shopper's guide.

310. New and used personal computer machines, and peripherals you never dreamed existed, or were available are in the Newman Computer Exchange catalog. Get yours today.

311. Midland Communications' line of base, mobile and hand-held CB equipment, marine transceivers, scanning monitors, plus a sampling of accessories are covered in a colorful 18-page brochure.

312. E.D.I. (Electronic Distributors, Inc.) carries everything from semi-conductors to transformer/relays to video cameras. In prices ranging from 19¢ to \$500, products appear from over 125 electronic parts manufacturers. The catalog is updated 3 times

313. Get all the facts on *Progressive Edu-Kits* Home Radio Course. Build 20 radios and electronic circuits; parts, tools, and instructions included.

314. Cover the Ham bands from 80 to 10-meters with one classy ,rig—Swan Electronics' 100-W 100 MX mobile transceiver. Get the details direct from Swan

316. Get the Hustler brochure illustrating their complete line of CB and monitor radio antennas.

318. GC Electronics offers an "Electronic Chemical Handbook" for engineers and technicians. It is a "problem solver" with detailed descriptions, uses and applications of 160 chemicals compiled for electronic production and packaging. They are used for all types of electronic equipment.

320. Edmund Scientific's new catalog contains over 4500 products that embrace many sciences and fields.

321. Cornell Electronics' "Imperial Thrift Tag Sale" Catalog features TV and radio tubes. You can also find almost anything in electronics.

327. Avanti's new brochure compares the quality difference between an Avanti Racer 27 base loaded mobile antenna and a typical imported base loaded antenna.

328. If you are into audio, ham radio, project building, telephones, CB or any electronics hobby you'll want McGee's latest catalog of parts and gadgets. Hard to find parts fill each page, so get a copy of the catalog from McGee today!

329. Semiconductor Supermart is a new 1979 catalog listing project builders' parts, popular CB gear, and test equipment. It features semiconductors—all from Circuit Specialists.

333. Get the new free catalog from Howard W. Sams. It describes 100's of books for hobbyists and technicians—books on projects, basic electronics and related subjects.

354. A government FCC License can help you qualify for a career in electronics. Send for Information from Cleveland Institute of Electronics.

355. New for CBers from *Anixter-Mark* is a colorful 4-page brochure detailing their line of base station and mobile antennas, including 6 models of the famous Mark Heliwhip.

356. Now you can get the "Break-through Book" with its 105 innovations in breadboarding and testing. Continental Specialties. The break-through is twofold-products and price!

359, Electronics Book Club has literature on how to get up to 3 electronics books (retailing at \$58.70) for only 99 cents each . . . plus a sample Club News

362. B&F Enterprises' Truckload Sale catalog offers 10% off all merchandise: (military or industrial surplus) speaker kits, TV games, computer terminals, tools, TV components, lenses, and more.

364. If you're a component buyer or specifier, you'll want this catalog of surplus bargains: industrial, military, and commercial electronic parts, all from Allled Action.

365. Electronic Supermarket has a new catalog of almost everything in the field—transformers, semi-conductors, tv parts, stereos, speakers, P.C. boards, phones, wire and cable, tools, motors.

366, How about a hybrid 13-watt audio module for \$8.88? Or ultrasonic transducer for \$1.49? You find these and other exotic parts and products aplenty in *Poly Paks* flyer. Get your copy now!

375. Compucolor Corp. has a personal computer system with an 8-color integral display, a type-writer-like keyboard, and a mass storage device. Programs are ideal for checkbook and income tax figuring.

377. We can't enumerate all the products in John Meshna, Jr.'s catalog of surplus electronic parts: power supplies; computer keyboards; klts for alarms, clocks, speakers; and more.

378. Delta Electronics is a complete parts source for electronics experimenters. Discrete parts, modules, boards, subassemblies and complete gadgets. Get Delta's 120-page catalog today.

#### ELEMENTARY ELECTRONICS Box 1849, G.P.O. New York, NY 10001

\_\_\_\_\_\_

MAY/JUNE 1979 Void After October 16, 1979

ZIP

Please arrange to have the literature whose numbers I have circled below sent to me as soon as possible. I am enclosing 50¢ for each group of 10 to cover handling. (No stamps, please.) Allow 4-6 weeks for delivery.

301	302	303	305	306	307	308	310	311	312	313	314
316	318	320	321	322	323	327	328	329	330	333	335
338	345	354	355	356	359	362	364	365	366	371	372
373	374	375	377	378	379	380	381	382	383	384	385
386											

300 ☐ Enter my subscription to ELEMENTARY ELECTRONICS for 9 issues at \$5.97.

Check enclosed. Add \$1.00 for Canada and all other countries.

H9E037

NAME (print clearly)

ADDRESS

STATE

#### Classified

## --- MARKET

ELEMENTARY ELECTRONICS—is published Bi-monthly. The rate per word for CLASSIFIED ADVERTISEMENTS is \$1,30 payable in advance—minimum ad \$15.00. Capitalized words 40¢ per word additional.

#### ADDITIONAL INCOME

\_\_\_\_\_

MECHANICALLY INCLINED INDIVIDUALS WANTED-ASSEMBLE ELECTRONIC DEVICES IN YOUR HOME. Get started in spare time. Experience, Knowledge or Investment Not Necessary. Expect big profits: \$300-\$600/Wk. Possible. Write for free literature telling how. Electronic Development Lab. Box 1560E, Pinellas Park, FL 33565.

\$200 WEEKLY: BECOME COMMISSION MAILER. FREE REPORT. GRAHAMS, DPBX 99371, TACOMA, WA 98499.

MAKE ONE MILLION DOLLARS the lazy way.
Mailing Circulars. Permanent Homework. Send
stamp. Laurenceau. Box, 1325A. Long Island, NY

#### AUTHOR'S SERVICE

PUBLISH YOUR BOOK! Join our successful authors. Publicity, advertising, beautiful books. All subjects invited. Send for fact-filled booklet and free manuscript report. Carlton Press, Dept. SMQ, 84 Fifth Avenue, NY 10011.

#### BIG MAIL

RECEIVE MONEYMAKING OPPORTUNITIES.
Your name placed with 2,000\* importers, wholesalers,
manufacturers, etc. Year listing-\$1.00 (SAVE \$160.00
Postagel) Advertising Agency, Box 123-YNA, Wenonah, NJ 08090.

#### BLUEPRINTS, PATTERNS & PLANS

LINEAR AMPLIFIERS. 100 or 200 watt, 2-30 MHz. Omnipolarized ANTENNA. 300 MHz COUNTER. Modulation BOOSTER-VOX. Plans \$3.00 each. \$10.00/ all. Catalog of others! PANAXIS. Box 130-GE5, Paradise, CA 95969.

ELECTRONIC Gas Detector Plans with IC amplifier included, \$2.50. JR Industries, 5834 Swancreek, Toledo, OH 43614.

NEW CRAFT PRINT CATALOG-Choose from over 100 great easy-to-build plans. Send \$1.50 (completely refunded with your first order). BOAT BUILDER, (CP Div.)-380 Lexington Ave., New York, NY 10017.

#### BOOKS & PERIODICALS

FREE! CATALOG SELF IMPROVEMENT BOOKS. The Mail Sack, Dept. 1379, 600 Welch Blvd., Flint, MI 48503.

BUSINESS ADVENTURES . . . FREE book catalogue. SIMTEK, Box 109-M, Cambridge, MA 02139.

BE A WINNER! Make fortunes winning contests, sweepstakes etc. Unique Books Show How. Free Catalog. A & W Enterprises, 14 Aufiga La., Sewell, NJ 08080.

INFORMATIVE HANDBOOK-For people with an interest in electronics and desire to know more. Covers basic electricity, resistors, capacitors, microwaves, facts on frequency, about fuses, circuit breakers. crystals and much more. Send \$1.50 for your copy (includes postage) to: Electronics Theory Handbook, 380 Lexington Ave., N.Y., NY 10017.

#### BUSINESS OPPORTUNITIES

BECOME our Mail Order Distributor with \$1.00 for supplies. Free Booklet. Audit Controls, Box D-35. Emerson, NJ 07630.

BORROW ANY AMOUNT. Enjoy A-1 credit. Keep money in bank, get 80% more. Send Stamp. Vernon. Box 75010-HH, Oklahoma City 73147.

MILLIONS in Mail! Free Secrets. Transworld-3, Box 6226, Toledo, OH 43614.

NEW Luxury Car Without Cost! Free details, CODEX-A, Box 6073, Toledo, OH 43614.

1000% PROFIT Bronzing Baby Shoes. Free Literature. NBC Box 1904-DG, Sebring, FL 33870.

#### BUSINESS OPPORTUNITIES-Cont'd

STAY HOME! EARN BIG MONEY addressing envelopes. Genuine offer 10c. Lindco, 3636-DA, Peterson, Chicago 60659.

WHOLESALE Rubber Stamp Outfits, Supplies. Catalog \$1.00. Martin, 1432D Major, Jefferson City, MO 65101.

\$500 Monthly Citpping Newspaper Items. Experience unnecessary. Free Details. American 1108 Colonial. Inkster, MI 48141.

BORROW \$25,000 interest free! indefinitely! Anyone! Free report: "Executive IO5, Box 368, Buford, GA 30518.

BUMPER STICKER PRINTING DEVICE. Cheap. Simple, Portable. Free Details. Bumper, POB 22791 (JT), Tampa, FL 33622

\$30.00 HUNDRED stuffing our circulars into stamped addressed envelopes. No limit. Beginners Kit \$2.00. Colossi, Box 318-DC, Brooklyn, NY 11204.

MAKE More Money In Mailorder. HACO, Box 846, Nashua, NH 03061.

ASSEMBLE products at home. Many opportunities paying high weekly profits presently available Without Investment. Businesses, 92-D2 Brighton 11th, Brooklyn, NY 11235.

\$1200.00 MONTHLY CORRECTING PUPIL'S LES-SONSI!! Start Immediately. Free Report, Send selfaddressed stamped envelope. Home, Box 9201-SBBL. San Diego, CA 92109.

HUGE PROFITS seiling gifts, novelties. Newberry, 1975A5 FM464, Seguin, TX 78155.

\$300.00 WEEKLY Mailing Circulars. Write: McGuire, Box 91054, Tacoma, WA 98491.

\$83,501.00 FREEBIES WAITING! GOVERNMENT DIRECTORY \$3.00. PALMER. B1244DG, Phenix City, AL 36867.

CABLE FM BROADCAST STATION. Investment/ experience unnecessary. Home operation possible. Excellent income reported! Free details. CAFM, Box 130 GE5, Paradise, CA 95969.

BUSINESS AND FINANCING CONSULTANTS NEEDED! Complete training. Large commissions. Pyramid Finance, 500 West Central-Suite 200, Mt. Prospect, IL 60056.

\$400 First Week with Ad Clocks or money back. Your own Advertising Business. Action Ad Clocks. Room AC-107-IE, 1512 Jarvis, Chicago. IL 60626.

BUY WHOLESALE! Hundreds of Items. \$2.00 brings glant catalog refundable on first order. McCord's, 2932 Cassell Dr., Anderson, IN 46012.

AMAZING Mailorder Profits Using Proven Methods. Free Details. Rasmussen DP59, 1747N. 450E.

BIG Profits Selling Books by Mail. Turnbull-D1. B-6701. Burbank, CA 91510.

\$50,000 ANNUALLY. Free Gift and Details. Taylor, Box 20008D, Columbus, OH 43220.

#### BUY IT WHOLESALE

400,000 BARGAINS Below Wholesale! Many Freel Liquidations . Closeouts . Job Lots Sinsle Samples. Free Details Worldwide Bargain-hunters, Box 730-IO. Holland, MI 49423.

PLANE rides for gas. Towels 191/2c, etc. Booklet, "Bargains By Mail," offers fantastic buys. \$3.00. Guaranteed. Saltz, 2370E-16Q. Brooklyn 11229.

#### DO IT YOURSELF

REPAIR TV'S, ANYONE CAN, Easy. Quaranteed Free Details. Publication, Box 517X, Brea. CA 92621.

#### DO IT YOURSELF-Cont'd

FREE Encyclopedia Winemaking, Beermaking Supplies, Equipment, Ingredients. Vynox Industries, Box E/E-7498, Rochester, NY 14615,

BUILD Stereo Speaker Cabinets, microphone mixer, mobile amplifier, 12 volt convertor. Specify plans desired. One dollar each, self-addressed, stamped envelope. SC Enterprises, Box 1059, Hamilton, OH 45012.

BUILD your own car stereo power booster! \$1.00 for plans, or sase for details. Perkins Company, Box 680, Rainier, Oregon 97048.

#### EDUCATION & INSTRUCTION

USED Courses! Books! Lists 25¢ SMITH'S, 124 Marlborough, Salem, MA 01970.

COLLEGE degree by mail, via resume. Education. 256D South Robertson, Beverly Hills, CA 90211.

BECOME ENGINEER, DJ. Start your own radio station, receive FCC license, equipment, records. Free details. "Broadcasting," Box 130-GE5, Paradise, CA 95969.

COMPUTER Programming (BASIC or FORTRAN), Electronics, FCC License, Mathematics. Correspondence study. Free information: Intermountain Technical Institute (Room 13), Box 258, Jerome, ID 83338.

HOW TO RETIRE AFTER WORKING 15 YEARS New letter. Sample \$1.00. Stonehenge, Box 386 Rexdale, Ontario, Canada M9W 5L3.

DO YOU KNOW "How to Write A Classified Ad That Pulls" includes a certificate worth \$2.00 toward a classified ad in any of our publications? For your cryp send \$1.50 (includes postage) to R. S. Wayner, Davis Publications, Inc., Dept. CL. 380 Lexington ave., New York, NY 10017.

#### FUND RAISING-SELF USE CATALOGS

GIANT! Gift-Gadget product catalog, Self Use-Fund Raising, etc. Satisfaction Guaranteed. \$1.00. NorPro Mail Order Dept. EE579, Castleton, New York 12033.

#### FOR THE HOME

PRACTICAL tips for home, garden and workshop can be found in "1001 How-To Ideas." Send \$1.50 for your copy (includes postage) to 1001 How-To Ideas, 380 Lexington Ave., New York, NY 10017.

#### GOVERNMENT SURPLUS

JEEPS-\$59.30-CARS-\$33.501 200,000 ITEMS-GOVERNMENT SURPLUS-MOST COMPREHENSIVE DIRECTORY AVAILABLE tells how, where to buy-YOUR AREA - \$2.00 - MONEYBACK GUARANTEE. Government information Services. Department E5. Box 99249, San Francisco, CA 94109 (433 California).

JEEPS1-\$49.30-475,000 Items! Buy In Your Area!
-How! Where! "GUARANTEED Government Surplus
Direcotry"-\$2.00. "Buy Government Lands Guide"\$2.00. "Government Oil-Gas Lottery Guide"-\$2.00.
"Government Benefits Report"-\$2.00 G SURPLUS,
Box 2009-EEP, Syracuse. New York 13220.

#### HOBBIES & COLLECTIONS

"NEW" Electronics Kits for the Hobbyist. \$1.00 for catalog and monthly kit news. Hobbi Shack. P.O. Box 235, Jersey City. NJ 07303.

#### HYPNOTISM

FREE Fascinating Hypnosis Information! Startling! DLMH, Box 487, Anaheim, California 92805.

# For Greater Classified Savings...Results...and Profits...

Place your ad in one of our SPECIAL COMBINATIONS: Combo #1, Combo #2, or Combo #3. Each combination is designed to give your ad the largest audience available. For further information write to R. S. Wayner, Classified Ad Manager, Davis Publicatons, Inc., 380 Lexington Ave., N.Y., N.Y. 10017.

## PLACE ---

To be included in the next issue, pelase send order and remittance to R. S. Wayner, ELEMENTARY ELECTRONICS, 380 Lexington Ave., New York, N.Y. 10017

#### INVENTIONS WANTED

INVENTIONS, patents, wanted cash, royalty. Auto, electro-mechanical, mechanical devices, Housewares, etc. We develop, finance, manufacture and market from an idea to perfected product. Free evaluation and brochure. Request Kit DP, Pixonic Corporation, 250 West 57th Street, New York, New York 10019.

#### LOANS BY MAIL

BORROW \$1,000-\$50,000 secretly—"overnight."
Anyone! Credit unimportant. Repay anytime. Incredibly low interest. No interviews, collateral, cosigners. Unique "Financier's Plan." Full information, \$2 (refundable). Spectrum, 79 Wall St.-16, New York 10005.

BORROW \$25,000 "Overnight." Any purpose Keep indefinitely! Write: Success Research, Box 29263-SR. Indianapolis, IN 46229.

#### MAGNETS

MAGNETS. All types. Specials-20 disc, or 10 bar, or 2 stick, or 8 assorted magnets, \$1.00. Magnets, Box 192-E, Randallstown, MD 21133.

#### MAIL-ORDER OPPORTUNITIES

GREATEST proven moneymaker—Sell First Settlers of North America Recipes and keep all proceeds. Special Offer. Send \$2.00 and SASE—Omega Mail Order, Box 243 Station A, Fredericton, New Brunswick, Canada E3B 4Y9.

#### MEMORY IMPROVEMENT

INSTANT MEMORY. NEW WAY TO REMEM BER. No memorization. Release your PHOTO-GRAPHIC memory. Stop forgetting! FREE information. Institute of Advanced Thinking, 859DP Via-Lapaz, Pacific Palisades, CA 90272.

#### MISCELLANEOUS

ENTER CANADA'S FABULOUS LOTTERY. Details: Joe Davis, 15-5763 Oak, Vancouver. Canada V6M 2V7.

HOME BREW is now legal. Complete instructions \$2.50. Lewis Recipes, Box 6156, Eureka, CA 95501.

"AMAZING!" Secret Compartments, Low Cost, Defy Detection, Hide Your Valuables, Many Types. Catalog \$1.00 (Refundable), Marietta Company, Dept. "EE," Box 465, Norwalk, Ohio 44857.

#### MONEYMAKING OPPORTUNITIES

\$250.00 profit/thousand possible-stuffing-mailing envelopes. Offer: Rush stamped addressed envelope: Universal-ADVS X16180 Fort Lauderdale, FL 33318.

\$180.00 WEEKLY Mailing Circulars. Start immediately. Everready, 422A Clermont Ave., Brooklyn, NY 11238.

MAKE YOUR CLASSIFIED AD PAY. Get "How to Write A Classified Ad That Pulls." Includes certificate worth \$2.00 towards a classified ad in this publication. Send \$1.50 (plus 25¢ for postage) to R. S. Wayner, Davis Publications. Inc., Dept. CL, 380 Lexington Ave., New York, NY 10017.

"WIN thousands! Thoroughbred, Harness, Dog! Guaranteed, Free report, Finish-A, Box 6226, Toledo, OH 43614."

\$300 WEEKLY! Home Mailing Program. Details: Thomas, Dept-D1, Box 11773, Charlotte, NC 28220.

\$500 WEEKLY! FANTASTIC HOME MAILORDER PROFITS! (DEALERS WANTED) GRAHAMCO DPBX, 99371 TACOMA, WA 98499.

AMAZING! \$265,000 Yearly with classified ads Free Proof. Moneycraft, 2316 Dale, Ceres. CA 95307

HOW to get paid in advance stuffing envelopes. make a fortune doing it. Details \$1.00. Martin, 3610 Toy. Wisconsin Rapids, WI 54494.

\$350 WEEKLY Mailing Letters. FREE Details. Karmchell, 628FD Cherry, Albany, GA 31701.

#### MONEYMAKING OPPORTUNITIES-Cont'd

EARN money addressing envelopes. K-G PUBLICATIONS, Box 1201, Wilmington, NC 28402.

HOW TO WRITE A BESTSELLER. Amazing new method! Free details. King Dept. M-C12, 236 Spencer. Wildwood, NJ 08260.

MILLIONS in Mail! Free Secrets. Transworld-3, Box 6226, Toledo. OH 43614.



MAKE YOUR CLASSIFIED AD PAY
Get "How to Write A Classified Ad That Pulls."
Includes Certificate worth \$2.00 towards a classified
ad in this publication. Send \$1.50 (plus 25e postage)
to R. S. Wayner, Davis Publications, Inc., Dept. CL,
380 Lexington Avenue, New York, NY 10017.

PLEASE Be sure to include your zip code when ordering merchandise from classified adventisements. You'll receive faster delivery.

GUARANTEED big money making program Abraxas Ent., P.O. Box 6072, Evansville, IN 47712.

EXCITING Second Income Working At Home. Free Details. Write: C. T. & S. Enterprises, Box 2442-D, Loves Park, IL 61132.

HOMEWORKERS Needed! \$600 weekly addressing, mailing, Ideal for students. Box 1874, Htfd., CT 06144

\$2500 Monthly Mailing Circulars, Dealers Wanted, Details 25c (refundable), Enterprises, Box 408-10, Erie, PA 16512.

"THREE Steps to Success." Send sase: Mailing Systems, G.P.O. Box 2420, N.Y., NY 10001.

REAL Estate Appraising. Fantastic profits! AAR, Box 6125-B, Hayward, CA 94544.

\$500 CASH ADVANCE; stuff 1000 envelopes. Information; self-addressed stamped envelope. Freedom 02-11. Box 1060, Orange Park, FL 32073.

#### PEN PALS

JOIN North America's leading penpal club. Details from Friends Worldwide CP-95/F Anjou, Montreal, H1K 4G5.

#### PERSONAL

BEAUTIFUL GIRLS from all continents want correspondence, friendship, marriage. Sample photos free. Hermes-Verlag, Box 110660/D, 1000 Berlin 11, Germany.

SINGLE? Widowed? Divorced? Nationwide introductions! Identity, Box 315-DC, Royal Oak, MI 48068.

STOP forgetting important dates. For complete information send \$1.00 (Refundable) to KAZ Enterprises, P.O. Box 19563, Indianapolis, IN 46219.

NEW Luxury Car Without Cost! Free Details. Codex-CC, Box 6073, Toledo, OH 43614.

#### PERSONAL-Cont'd

DATES GALORE! Meet singles-anywhere, Call DATELINE, toll-free (800) 451-3245.

RECORD Telephone conversations privately—automatically. Leave recorder Unattended. Robert's, 2618 Elmwood Blvd.. Wausau, WI 54401.

JAPANESE Girls Make Wonderful Wives. We have large number of listings. Many interested in marriage. Only \$1.00 brings application, photos, names, descriptions, questionaire, Etc. Japan International, Box 156 AA, Carnelian Bay, CA 95711.

BEAUTIFUL Mexican-Oriental girls Needing Amerlcan Boy-Friends. Free Details "actual" photos. World, Box 3876-DC, San Diego, CA 92103.

FREE: 1,000 LADIES PHOTOS. World's largest Matrimonial Catalog. Postage/Handling \$1.00. Intercontact, Box 12, Toronto, Canada M4A 2M8.

JAPANESE introductions! Girls' photographs, descriptions, brochure, details, \$1.00 INTER-PACIFIC, Box 304-SC, Birmingham, MI 48012.

BEAUTIFUL MEXICAN GIRLS! Correspondence. Photos, details freel "Latins," Box 1716-DE, Chula Vista, CA 92012.

BECOME ORDAINED MINISTER legally. Free Lifetime credentials. Use title "Reverend." Write: Church of the God Within, Box 015313A, Miami, FL 33101.

CANOE Camping on the Delaware. America's newest "Wild and Scenic River" Canoes, Rafts, Kayaks, Transport on 185 miles Portage-free. Family-safe adventure. Free Brochure. Point Pleasant Canoe Outfitters. Box 6, Point Pleasant, PA 18950.

TRADITIONAL, home-loving ladies seeking marriage. Rainbow, Box 62E, Stehekin, WA 98852.

#### RADIO & TELEVISION

TV TUBES 36¢ each. Send for Free 48 page color catalog. Cornell, 4217-W University, San Diego, California 92105.

TUBES Oldies, latest. Supplies, components, schematics. Catalog free. (Stamp appreciated). Steinmetz, 7519-EE Maplewood, Hammond, IN 46324.

SAVE 50% build your own speaker system. Write McGee Radio Electronics, 1901 McGee Street, Kansas City, MO 64108.

LINEAR Amplifiers 3.5-30 MHZ. Schematics, Detailed Instructions For Base BL-200, Mobils BL-100 and BL-200. All, \$6.00. Bomar's, Box 541, Pendleton, SC 29670.

BUILD Distance Crystal Sets. 10 plans-25e; Handbook "18 Different"-50e; "20 Different-50e. Kit catalog-50e. Laboratories, 1477-G, Garden Grove, CA 02642.

POLICE Scanners, Crystals, Antennas. Radar Detectors, CB's, HPR, Box 19224, Denver, CO 80219,

TOTTE entered made plane and entered diode: \$1.00

FOUR crystal radio plans and crystal diode; \$1.00. Henley, 502 No. Armstrong, Pleasant Hill, MO 64080.

#### SCIENCE & CHEMISTRY

FIREWORKS! Spectacular novelties. Simplified manufacturers textbook. \$5.00. Tropic, Box 95M. Palm Bay, FL 32905.

#### TREASURE FINDERS-PROSPECTING EQUIPMENT

GOLD-Silver. Where to find it. How to refine it. \$5. J. Trachtenberg, P.O. Box 671, Perth Amboy, NJ 08861.

#### WATCHES, WATCHMAKING & REPAIRING

WATCH and clock repairing books, tools, materials. Free Catalog. North American, Box 77, EE53, Fox River Grove. IL 60021.

#### WORK CLOTHES

WORK PANTS \$3. Coveralls \$6. Postpaid. Catalog \$1 (refundable with order). Workmen's Garment Co., 15205-DP Wyoming, Detroit, MI 48238.

YOU'LL MAKE

SAVE MONEY TOO —
BY READING and ANSWERING
THESE CLASSIFIED ADS



Never Stopped Publishing

#### Ask Hank le Knows!

Got a question or a problem with a project-ask Hank! Please remember that Hank's column is limited to answering specific electronic project questions that you send to him. Personal replies cannot be made. Sorry, he isn't offering a circuit design service. Write to:

Hank Scott, Workshop Editor ELEMENTARY ELECTRONICS 380 Lexington Avenue New York, NY 10017

B. R., Bracebridge, Ontario

Where is White's Radio Log?

Keep looking! White's Radio Log is a part of COMMUNICATIONS WORLD which is now published once a year. The 1979 edition hit the newsstands in late January. If you can't find a copy, send \$1.75 plus 25 cents for postage and handling to:

COMMUNICATIONS WORLD Single Copy Sales Dept. 380 Lexington Avenue New York, NY 10017 Don't hesitate, they sell out pretty quick.

#### Charter Reader

Your November-December 1978 issue announced the 15th anniversary of ELE-MENTARY ELECTRONICS. I still have your first 1963 issue and continue to find it very interesting. This premier edition gave me my first knowledge of electronics magazines. I would just like to mention that although I haven't written for information, I still find the answered questions very informative. Thanks for having this column in the magazine.

#### **ELEMENTARY ELECTRONICS** INDEX TO ADVERTISERS

RS#	ADVERTISER	PAGE
4	Active Electronics	9:
24	Antenna Incorporated	8.
26	A.P. Products	
	Avanti	1
5	B & F Enterprises	
22	B & K Precision Cleveland Institute of Electronics	34
_	Cleveland Institute of Electronics	4
6	Cobra Continental Specialties	CV2
/	Continental Specialties	CV3
39 21	Dak Industries	
	Dinnio, James	
30	Digi-Key Electra Co.	
	Eico	
	Extron Life Screen	1
	Finney	
	Gilfer	
	Gold Edge	9
1	Grantham College	1
1	Heath Co.	20-23
_	Howard Sams	19
16	Hobby World	90
2	Information Unlimited	Ro
.3	International Crystal	26
-	McGee National Technical School	32
	Non Linear	26
9	N.R.I. Schools	10-13
8	OK Machine & Tool	3.
	PAIAPercom Data	18
6	Poly Pake	01
4	Poly Paks Progressive "Edu-kits" Inc.	15
7	Quimtronix	RC
	Radio Shack	
-	Radio Shack	29
0	Shakespeare Southwest Technical	1
8	Cauth and Taskeland	

**Epilepsy** It's not what you think.

-P. D., Powell River, B.C.

are a charter reader as I am. We've come a good many years and saw the development of solid-state at the hobby level. I think you'll find the next five years to be more revolutionary than, the first 15 years.


And a happy anniversary to you! You

#### Watta Setup!

I'm enclosing a diagram of my DXing antenna layout. Can you give me your opinion of the antenna system I use?

-A. E., Milton, FL

Terrific! You should be able to hear Castro snore. I do believe that the 25foot length is not needed. I suggest that you should be able to switch out the dif-




ferent legs of the antenna to eliminate background noise while zeroing in on weak signals.

#### You'll Laugh Yourself to Death

I get an electric "tickle" from the metal cabinet of my receiver? Is this safe? -J. F., Cleveland, TN

I'd say "No," to that. But check it yourself to be absoultely sure. Use an AC voltmeter having 5000-ohms/volt or more sensitivity in the following manner: Connect a 1500-ohm, 10-watt resistor paralleled by a .15 µF disc capacitor between a known good earth ground (water pipe, conduit, etc.) and the exposed metal parts on the receiver, one at a time. Do this with the receiver plugged into an AC outlet and the receiver furned on. Measure the AC voltage across the combination 1500-ohm resistor and .15-µF capacitor. Reverse the AC plug and repeat the voltage measurements for each exposed metalic part. For receivers manufactured after January 1, 1973, the voltage must not exceed 0.75 VRMS. This corresponds to 0.5 mA AC "tickle" charge and is not excessive or dangerous. If your receiver exceeds this value, look for the fault or short. Sets built



prior to 1973 may test high as 7.5 VRMS. Legally, this is okay, but by "current" standards it is unsafe.

#### Parts Seeker

Hank, I picked up a copy of the magazine 99 IC PROJECTS and I want to get into them right away. Unfortunately, it's tough buying semiconductors in Columbia Falls, Montana. So give me a basic list of parts suppliers that I should contact.

-D. J., Columbia Falls, MT

Here are a few parts and equipment suppliers in alphabetical order:

- Aldelco, 228 E. Babylon Turnpike, Merrick, NY 11566.
- 2. AP Products, Box 110, 72 Corin Dr., Painesville, OH 44077
- 3. Continental Specialties Corp., 70 Fulton Terrace, Box 1942, New Haven, CT 06509.
- 4. Cornell, 4219 E. University Ave., San Diego, CA 92105.
- 5. Digi-Key Corp., P.O. Box 677, Thief River Falls, MN 56701.
- 6. ETCO Electronics, Dept. 024, North Country Shopping Center, Plattsburg, NY 12901.
- 7. Jamesco Electronics, 1021 Howard Ave., San Carlos, CA 94070:
- 8. Lafayette Radio, 111 Jericho Turnpike, Syosset, NY.
- Poly Paks, P.O. Box 942-N9, Lynn-field, MA 01940.
- 10. Radio Shack, One Tandy Center, Ft. Worth, TX 76102

You find many other good sources of parts and equipment in the Hobby Mart section of ELEMENTARY ELECTRONICS. Check the ads out and write for catalogs.


#### Lend a Hand

Here's another list of our friends who need your help. Lend a hand, boys!

△ Lafayette HE-30 receiver, operator's manual and schematic diagram; George Kopp, 3411 Woodbine Ave., Cincinnati, OH 45211.

Δ Viking Model 87 reel-to-reel tape deck, needs accompanying electronics; Charles D. Jennison, 48 Cocheco St., Dover, NH

Δ Hallicrafters S-40A receiver, needs operator's manual and service equipment; J.O. Bois, 407 Sumner St., Santa Cruz, CA 95062.

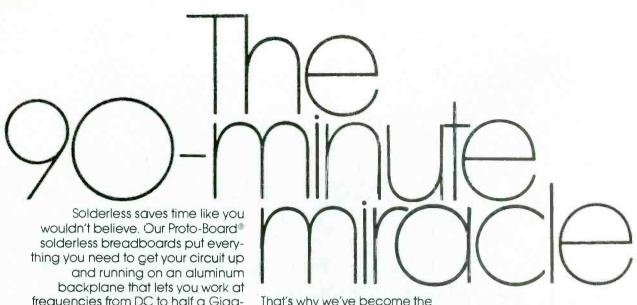

frequencies from DC to half a Giga-Hertz. Three Proto-Board® models feature built-in regulated power supplies—and one of them's a build-it-yourself kit!

CSC solderless breadboards save energy, too. Especially yours. Because circuit building becomes a simple plug-and-chug process, straight from an idea to a working circuit. That's why we've become the easiest-to-find solderless breadboards in the world-available at more stores than anybody else in the business. Because people who know solderless best insist on CSC

Save time and energy. Get a head star with CSC.

Proto-There are 9 Proto-Boards \* in all, manufacturer's suggested U.S. resale prices from \$15.95 to \$124.95. CONTINENTAL SPECIALTIES CORPORATION

70 Fulton Terrace, New Haven, CT 06509 (203) 624-3103, TWX 710-465-1227 OTHER OFFICES: San Francisco: (415) 421-8872, TWX 910-372-7992 Europe: CSC UK LTD. Phone Saffron-Walden 0799-21682, TLX 817477 Canada: Len Finkler Ltd., Ontario


1-800-243-6077

Call toll-free for details CIRCLE 7 ON READER SERVICE COUPON

Sugges ed U.S. esale. Available at selected local distributors.

Pices, specifications subject to change without notice.

Copyright 1979 Continental Specialties Corporation

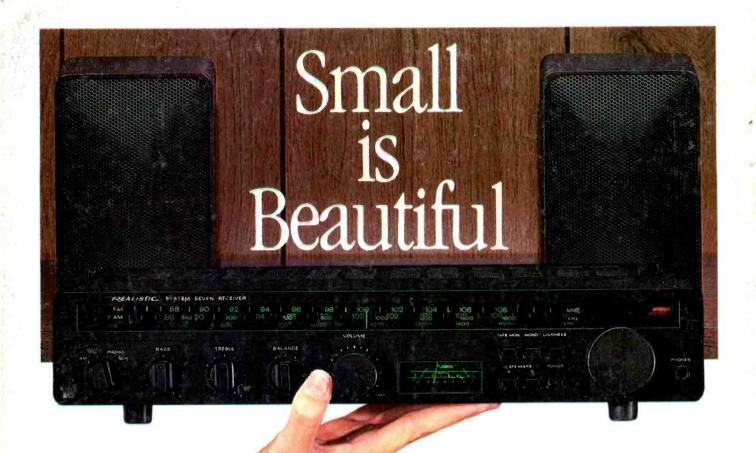

Realistic's System Seven... a new size and shape for stereo

Miniaturization breakthrough! Realistic's fabulous new System Seven combines beauty, elegant small size and a level of acoustical quality you've never heard, until now, in low-priced bookshelf stereo.

System Seven includes our new STA-7 AM/FM receiver (10 watts per channel, minimum RMS into 8 ohms, 20-20,000 Hz, with no more than 0.5%



At last - true hi-fi perfectly sized for a bookcase. The 4-1/2-lb. speakers can even be used for bookends!

total harmonic distortion) and a pair of our amazing Minimus®-7 speaker systems — featuring large-excursion woofers and soft-dome tweeters in diecast enclosures only 71/16" high.

Bass without bulk. Despite its small size, System Seven delivers rich, satisfying bass to 50 Hz and sound levels up to 90 dB for accurate reproduction of anything from classical to rock music.

What's the secret? The receiver has a unique equalization network engineered especially for the speakers. And it's switchable so you can use full-size speakers, if you wish.

Compact, but no compromises. You get "full-size" high-fidelity features with System Seven magnetic and aux inputs, tape monitor, A/B speaker switching, even 75 and 300-ohm FM inputs. U.L. listed, of course, and housed in a stunning jet-black metal cabinet with blackout dial.



Receiver is briefcase-sized, a little taller than a credit card — just 3-1/2" high. Each speaker is about the size of two average books.

The price for all this may be the surprise of your audio life—only 239.95\*, a savings of \$39.90 off the "each" price!

Audition System Seven. Small has never been so beautiful!

\*Price may vary at individual stores and dealers.

Sold only at

The nationwide supermarket of sound

A Division of Tandy Corporation Fort Worth, Texas 76102