

# Commercial Wallbox Dimmers

Full Range Dimming &  
On/Off Control



The new preset slide dimmer and rocker slide dimmers feature separate On/Off switching and smooth slide-action full-range dimming for dimmable LEDs, dimmable CFLs, incandescent/halogen fixtures, 0-10V LED drivers, and fluorescent and HID ballasts.

## Features:

- Separate On/Off switch that preserves the selected brightness setting
- Single pole (one location) or 3-way (two location) when paired with a 3-way switch
- Trim adjustments for fine tuning
- Slim, compact housing fits easily into standard wallbox
- Suitable for multi-gang installations
- No powerpack required for controlling loads
- Available in white, ivory, and light almond
- cULus, UL 1472, NEMA SSL 7A, Title 24
- 1-year warranty



# Ordering Information

## Preset Slide Dimmer

Example: PSD0108-UNV-WH

CATALOG #

### Model

**PSD0108-UNV** Preset Slide Dimmer for 0-10V LED drivers and fluorescent and HID ballasts, Single Pole or 3-Way, 10A@120VAC, 5A@277VAC

### Color

- WH** White
- IV** Ivory
- LA** Light Almond

## Rocker Slide Dimmers

Example: RSD0108-UNV-WH

CATALOG #

### Models

**RSD300-120** Rocker-Slide Dimmer for Dimmable LED, CFL and Incandescent, Locator Light, 600W@120VAC Incandescent, 300W@120VAC Dimmable LED and CFL, 60Hz, Single Pole or 3-Way.


**RSD0108-UNV** Rocker-Slide Dimmer for 0-10V LED Drivers and Fluorescent and HID Ballasts, 10A@120VAC, 5A@277VAC, 60Hz, Single Pole or 3-Way.

### Color

- WH** White
- IV** Ivory
- LA** Light Almond



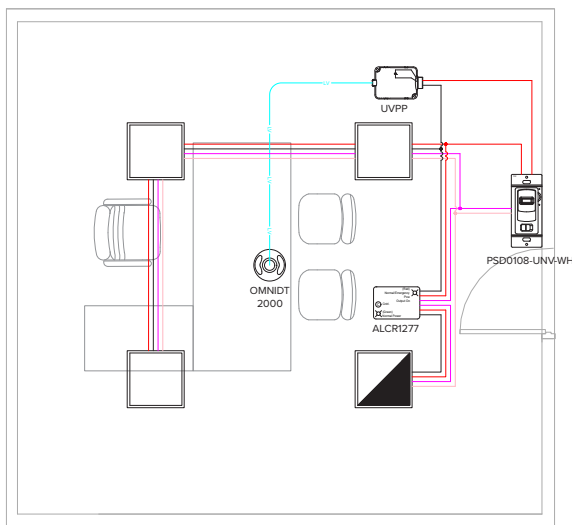

## Typical Room Deployment

Simple code compliance with only a few companion products



### Diagram Key

- Low Voltage
- Line Voltage
- 0-10V Dimming

| QTY | Material       |   |
|-----|----------------|---|
| 1   | PSD0108-UNV-WH |  |
| 1   | UVPP           |  |
| 1   | ALCR1277       |  |
| 1   | OMNIDT2000     |  |