STX660(P) STX660L



FEATURES

- Open wall plate design allows for total wall access, increasing electrical and cable management options
- Pre-tensioned universal tilt adapter brackets offer up to +15/-5° of One-Touch™ tilt adjustment in one easy motion
- Optional IncreLok™ feature offers fixed tilt lock in 5° increments
- Easy-Glide™ design ensures that the display is securely attached to the wall plate
- 5° of back tilt offers 3" of space for hands-free, behind the display access
- Up to 23" of horizontal adjustment for centering display on wall
- Up to 1" of vertical adjustment on each universal display adapter bracket for postinstallation leveling and height adjustment fine-tuning
- Increased security with included Master Lock 510KAD keyed-alike padlock on locking model
- Universal tilt adapter brackets easily hook onto wall plate for fast installation
- Low profile design holds display 1.69" (43mm) from
- Fits displays with mounting hole patterns from 100 x 100mm (3.94"W x 3.94"H) to 805 x 433mm (31.71"W x 17.04"H)

OSHPD Approval Pending













Universal Tilt Wall Mount


for 46" to 70" Flat Panel Displays

Limitless placement opportunities are delivered with speed and ease with both horizontal and vertical adjustment capability. Its slim, open wall plate architecture delivers flat panel display placement flexibility and enables hands-free behind-the-display access along with cable management. Quick and easy installation and optional IncreLok™ Tilt technology complete the ultimate secure, low profile flat panel installation.



Display size: 46"-70"



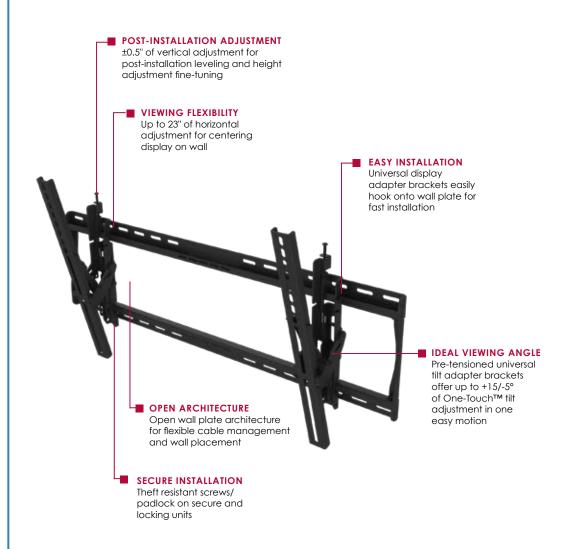



INTEGRATED PARTNER PROGRAM

Contact your Peerless-AV sales representative for more information



Model Numbers WARRANTY: Limited 5-year

STX660 SmartMountX™ Universal Tilt Wall Mount for 46" to 70" Flat Panel Displays - security model

STX660L SmartMountX™ Universal Tilt Wall Mount for 46" to 70" Flat Panel Displays - security locking model

STX660P SmartMountX™ Universal Tilt Wall Mount for 46" to 70" Flat Panel Displays - standard model

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
STX660(P) STX660L	34.12" x 18" x 1.69"-6.55" (867 x 457 x 43-166mm)	STX660(P): 8.63lb (3.91kg) STX660L: 9.13lb (4.14kg)	150lb (68kg)	Powder coat	Ravens Black

Package Specifications


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
STX660(P) STX660L	10.125" x 3.5" x 35.875" (257 x 89 x 991mm)	STX660(P): 11.7lb (5.31kg) STX660L: 12.2lb (5.53kg)	STX660: 735029278979 STX660L: 735029278986 STX660P: 735029279396	Universal Tilt Wall Mount, attachment hardware, installation instructions	1

Accessories

ACCXT302: SmartMountXT™ Video Conferncing Shelf accessory

ACCXT400: In-Wall Cable and Power Management Accessory with AC Surge Suppressor

All dimensions = inch (mm)

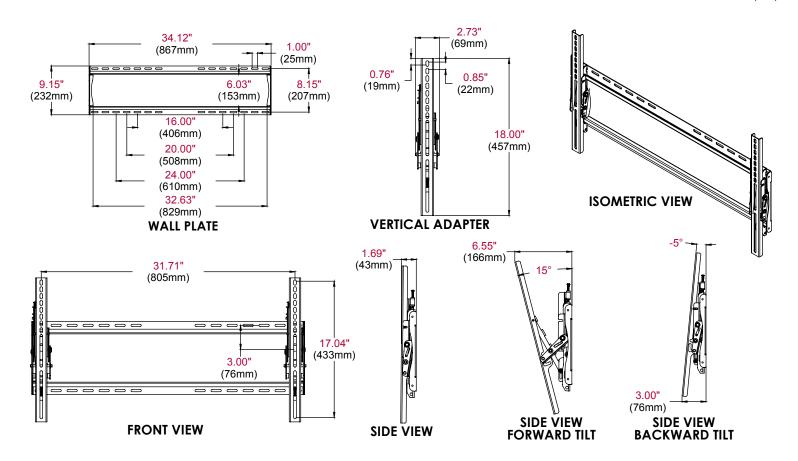

ARCHITECTS SPECIFICATIONS

The SmartmountXT^{IM} Universal Tilt Wall Mount shall be a Peerless-AV^{IM} model STX660, STX660L or STX660P and shall be located where indicated on the plans.

It shall be constructed of heavy gauge cold rolled steel and finished with scratch resistant Black Fused Epoxy.

Assembly and installation shall be done according to instructions provided by the manufacturer.

Peerless Industries, Inc. ■ 2300 White Oak Circle ■ Aurora, IL 60502 ■ (800) 865-2112 ■ (630) 375-5100 ■ Fax: (800) 359-6500 ■ www.peerless-av.com