


Quectel EC200A Series

IoT/M2M-optimized LTE Cat 4 Module

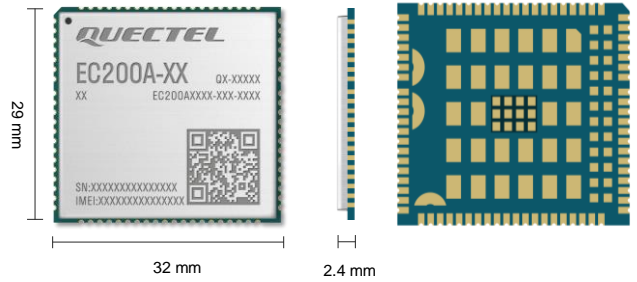

Quectel EC200A is a series of LTE Cat 4 module optimized specially for M2M and IoT applications. Adopting the 3GPP Rel. 9 LTE technology, it delivers maximum data rates up to 150 Mbps downlink and 50 Mbps uplink. Designed in the compact and unified form factor, EC200A series is compatible with Quectel multi-mode LTE Standard EC25 series, EC21 series, EC20-CE, EG25-G, EC200U series, EC200T series and UMTS/HSPA+ UC200T series modules, which allows for flexible migration among them in design and manufacturing.

EC200A series contains three variants: EC200A-CN, EC200A-EU and EC200A-AU, covering the frequency band of different countries and regions. It is backward compatible with existing GSM/GPRS/EDGE network, ensuring that it can work properly even in remote areas devoid of 4G or 3G coverage. EC200A series adopts the laser engraving process to ensure more good-looking appearance, strong metallic texture, better heat dissipation, durable label information, which makes it more suitable for automation requirements.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB serial drivers for Windows7/8/8.1/10, Linux, Android) extend the applicability of the module to a wide range of M2M and IoT applications such as industrial router, industrial PDA, rugged tablet PC, video surveillance, and digital signage.



Key Features

- ✓ LTE Cat 4 module optimized for M2M and IoT applications
- ✓ Worldwide LTE, UMTS/HSPA+ and GSM/GPRS/EDGE coverage
- ✓ Support Delta Firmware Upgrade Over-The-Air (DFOTA)
- ✓ MIMO technology meeting demands for data rate and link reliability in modem wireless communication systems
- ✓ Super cost-effective

 LTE Cat 4 Max. 150 Mbps (DL) Max. 50 Mbps (UL)	 Max. 21 Mbps (DL) Max. 5.76 Mbps (UL)	 LCC Package
 Embedded Abundant Protocols	 DFOTA	 VoLTE
 USB 2.0 High Speed Interface	 UDB Drivers	 Quectel Enhanced AT Commands

Quectel EC200A Series

LTE Cat 4	EC200A-CN	EC200A-EU	EC200A-AU
Region/Operator	China, India	Europe	Australia, New Zealand, Latin America
Dimensions (mm)	29.0 × 32.0 × 2.4	29.0 × 32.0 × 2.4	29.0 × 32.0 × 2.4
Temperature Range			
Operating Temperature Range	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C
Extended Temperature Range	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
Frequency Bands			
LTE-FDD	B1/B3/B5/B8	B1/B3/B5/B7/B8/B20/B28	B1/B2/B3/B4/B5/B7/B8/B28/B66
LTE-TDD	B34/B38/B39/B40/B41	B38/B40/B41	B40
WCDMA	B1/B5/B8	B1/B5/B8	B1/B2/B4/B5/B8
GSM/EDGE	B3/B8	B3/B8	B2/B3/B5/B8
GNSS*	GPS/GLONASS/BeiDou/Galileo(Optional)	-	-
Certifications			
Regulatory	China: SRRC*/NAL*/CCC*	Europe: CE*/UKCA*/RCM*	America: FCC* Brazil: Anatel*
Others	WHQL	WHQL	WHQL
Data Rates			
LTE-FDD (Mbps)	150 (DL)/50 (UL)	150 (DL)/50 (UL)	150 (DL)/50 (UL)
LTE-TDD (Mbps)	130 (DL)/30 (UL)	130 (DL)/30 (UL)	130 (DL)/30 (UL)
DC-HSPA+ (Mbps)	21 (DL)/5.76 (UL)	21 (DL)/5.76 (UL)	21 (DL)/5.76 (UL)
WCDMA (kbps)	384 (DL)/384 (UL)	384 (DL)/384 (UL)	384 (DL)/384 (UL)
EDGE (kbps)	236.8 (DL)/236.8 (UL)	236.8 (DL)/236.8 (UL)	236.8 (DL)/236.8 (UL)
GPRS (kbps)	85.6 (DL)/85.6 (UL)	85.6 (DL)/85.6 (UL)	85.6 (DL)/85.6 (UL)
Interfaces			
(U)SIM	× 1	× 1	× 1
UART ①	× 2	× 2	× 3
USB 2.0	× 1	× 1	× 1
Digital Audio (PCM)	× 1	× 1	× 1
NET_STATUS	× 1	× 1	× 1
NET_MODE	× 1	× 1	× 1
ADC	× 2	× 2	× 2
SDIO (for SD Card* and Wi-Fi* ①)	× 2	× 2	× 2
RESET_N	× 1	× 1	× 1
PWRKEY	× 1	× 1	× 1
RGMII/RMII*	× 1	× 1	× 1
Analog Audio	× 2 (Microphone and Loudspeaker)	× 2 (Microphone and Loudspeaker)	× 2 (Microphone and Loudspeaker)
SPI ①	-	-	× 1
I2C	× 1	× 1	× 1
Antennas	× 2 (Primary and Rx-diversity Antennas)	× 2 (Primary and Rx-diversity Antennas)	× 2 (Primary and Rx-diversity Antennas)
Voice			
Speech Codec Modes	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB
Echo Algorithm	Echo Cancellation/Noise Suppression	Echo Cancellation/Noise Suppression	Echo Cancellation/Noise Suppression
Voice	Digital Voice and VoLTE (Voice over LTE)	Digital Voice and VoLTE (Voice over LTE)	Digital Voice and VoLTE (Voice over LTE)
Enhanced Features			
DTMF	●	●	●
DFOTA	●	●	●
Audio Playback/ Audio Recording*	●	●	●
QuecLocator®	●	●	●
QuecFile®	●	●	●
(U)SIM Card Detection	●	●	●

NOTE:

- ①: only EC200A-AU supports QuecOpen® solution, with auxiliary UART, SPI interfaces and SDIO interface for Wi-Fi function supported additionally.
- *: under development.
- : supported.

Quectel EC200A Series

LTE Cat 4	EC200A-CN	EC200A-EU	EC200A-AU
Software Features			
Protocols	TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX/HTTPS/FTPS/SSL/FILE/MQTT/MMS/SMTP/SMTPS	TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX/HTTPS/FTPS/SSL/FILE/MQTT/MMS/SMTP/SMTPS	TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX/HTTPS/FTPS/SSL/FILE/MQTT/MMS/SMTP/SMTPS
Drivers			
USB Serial Driver	Windows 7/8/8.1/10 Linux 2.6-5.12 Android 4.x-11.x	Windows 7/8/8.1/10 Linux 2.6-5.12 Android 4.x-11.x	Windows 7/8/8.1/10 Linux 2.6-5.12 Android 4.x-11.x
RIL Driver*	Android 4.x-11.x	Android 4.x-11.x	Android 4.x-11.x
USB RNDIS Driver*	Windows 7/8/8.1/10 Linux 2.6-5.12	Windows 7/8/8.1/10 Linux 2.6-5.12	Windows 7/8/8.1/10 Linux 2.6-5.12
USB ECM Driver	Linux 2.6-5.12	Linux 2.6-5.12	Linux 2.6-5.12
Electrical Features			
Supply Voltage Range	3.4–4.5 V, typ. 3.8 V	3.4–4.5 V, typ. 3.8 V	3.4–4.5 V, typ. 3.8 V
Power Consumption (Typical)	11 uA @ Power off 1.20 mA @ LTE Sleep (PF = 128) 1.06 mA @ LTE Sleep (PF = 256) 33 mA @ Idle	10 uA @ Power off 1.47 mA @ LTE Sleep (PF = 128) 1.15 mA @ LTE Sleep (PF = 256) 33 mA @ Idle	10 uA @ Power off 1.10 mA @ LTE Sleep (PF = 128) 0.98 mA @ LTE Sleep (PF = 256) 34 mA @ Idle

NOTE:

*: under development.