

MS514H Digital Projector



Features

- High brightness 3,200 ANSI Lumens
- Up to 10,000 hours Long lamp life
- SmartEco Power Saving technology
- Blu-ray Full HD 3D support
- HDMI digital input

Box Contents

- Remote Control w/ Battery *I
- Power Cord (by region) *I
- UM Download Instruction and Regulatory Statements *I
- Quick Start Guide *I
- VGA(D-sub 15pin) Cable *I

Dimension




Optional Accessories

- Spare Lamp Kit 5J.J9R05.00I
- Ceiling Mount.....5J.JAM10.00I
- 3D Glasses..... 5J.J9H25.00I
- Carry bag..... 5J.J3T09.00I



Because it matters

Input and Output Terminals

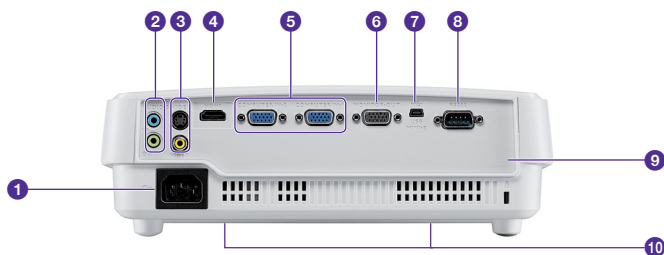

- ① AC power jack
- ② Audio input jack
- ③ Audio output jack
- ④ S-Video input jack
- ⑤ Video input jack
- ⑥ HDMI-input port
- ⑦ RGB (PC)/Component Video (YPbPr/YCbCr) signal input jacks
- ⑧ RGB signal output jack
- ⑨ USB port
- ⑩ RS232 control port
- ⑪ Kensington anti-theft lock slot
- ⑫ Ceiling mount holes

Product Specifications

Projection System	DLP	
Native Resolution	SVGA (800 x 600)	
Brightness	3200AL	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.56-2.8, f=21-23.1 mm	
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)	
Throw Ratio	1.86-2.04 (53" @ 2m)	
Image Size (Diagonal)	36"~300"	
Zoom Ratio	1.1:1	
Lamp Type	190W	
Lamp Mode (Normal/Eco/SmartEco/LampSave)*	4500/6000/6500/10000 hours	
Keystone Adjustment	1D, Vertical +/- 40 degrees	
Projection Offset	120% ±5%	
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)	
Horizontal Frequency	15~102KHz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility Video Compatibility 3D Compatibility (Please refer to User's Manual for detailed support timing.)	
Interface	Computer in (D-sub 15pin) Monitor out (D-sub 15pin) Composite Video in (RCA) S-Video in (Mini DIN 4pin) HDMI Audio in (Mini Jack) Audio out (Mini Jack) Speaker USB (Type mini B) RS232 (DB-9pin) IR Receiver	480i, 480p, 576i, 576p, 720p, 1080i, 1080p NTSC, PAL, SECAM Frame Sequential: Up to 720p Frame Packing: Up to 1080p Side by Side: Up to 1080i/p Top Bottom: Up to 1080p x 2 (Share with component) x 1 x 1 x 1 x 1 x 1 x 1 2W x 1 x 1 x 1 x 1 (Front)
Dimensions	Dimensions(W x H x D)	283 x 95 x 222 mm (with feet) 283 x 88.7 x 222 mm (without feet)
	Weight	1.9kg
Power	Power Supply	AC100 to 240V, 50 to 60 Hz
	Power Consumption	Normal 270W, Eco 220W, Standby<0.5W
Audible Noise	33/28 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	

* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Logistics information

Product Code	9HJCF77.14E
EAN Code	471 8755 05373 3
Dimensions Single Carton (cm)	35.1 x 14.50 x 29.50
Carton Weight (kg)	2,9
Pallet Qty	120



BenQ Europe B.V.
 Meerenakkerweg 1-17
 5652 AR Eindhoven
 The Netherlands
 Tel: +31 88 8889200
 Fax: +31 88 8889299

© 2014 BenQ Corp. Specification may vary by region, please visit your local stores for details.
 Actual product's features and specifications are subject to change without notice.
 This material may include corporate names and trademarks of third parties which are the
 properties of the third parties respectively. Doc.: PRJ HB BR EN 0301

