

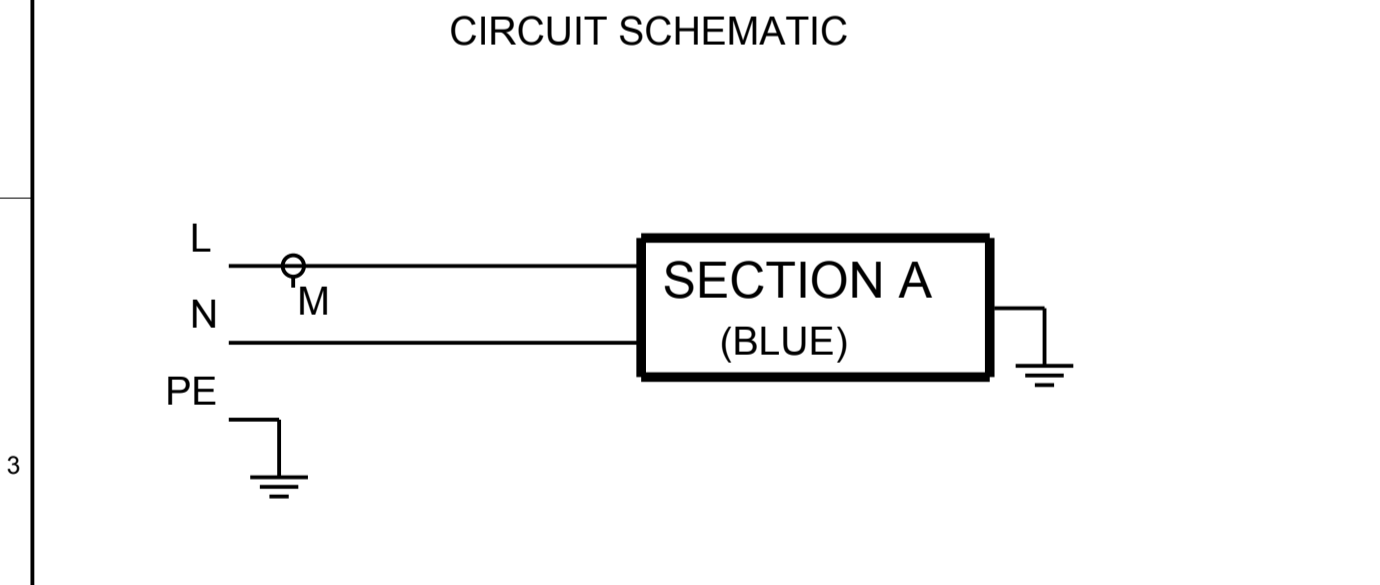


CABLE LENGTH SHOWN NOT TO SCALE

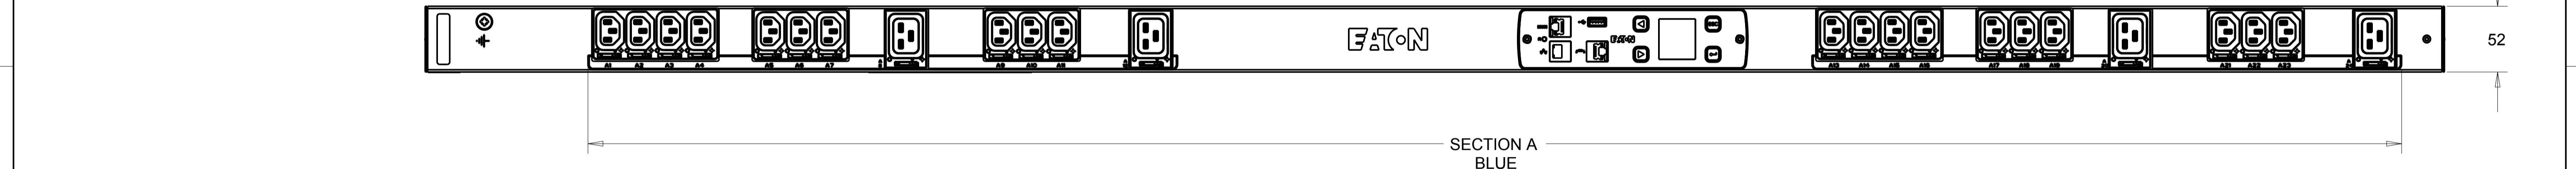

EMOB04		G3 METERED OUTLET	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH AND OUTLETS.	IEC 60309-2 16A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	(20) IEC 60320 C13 GRIP (4) IEC 60320 C19 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1604MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	1Ø; 200-240V~;W+N+PE 50/60HZ 16A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP015 - VERT INSTALL NETWORK PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMO6CE7FABH77AM

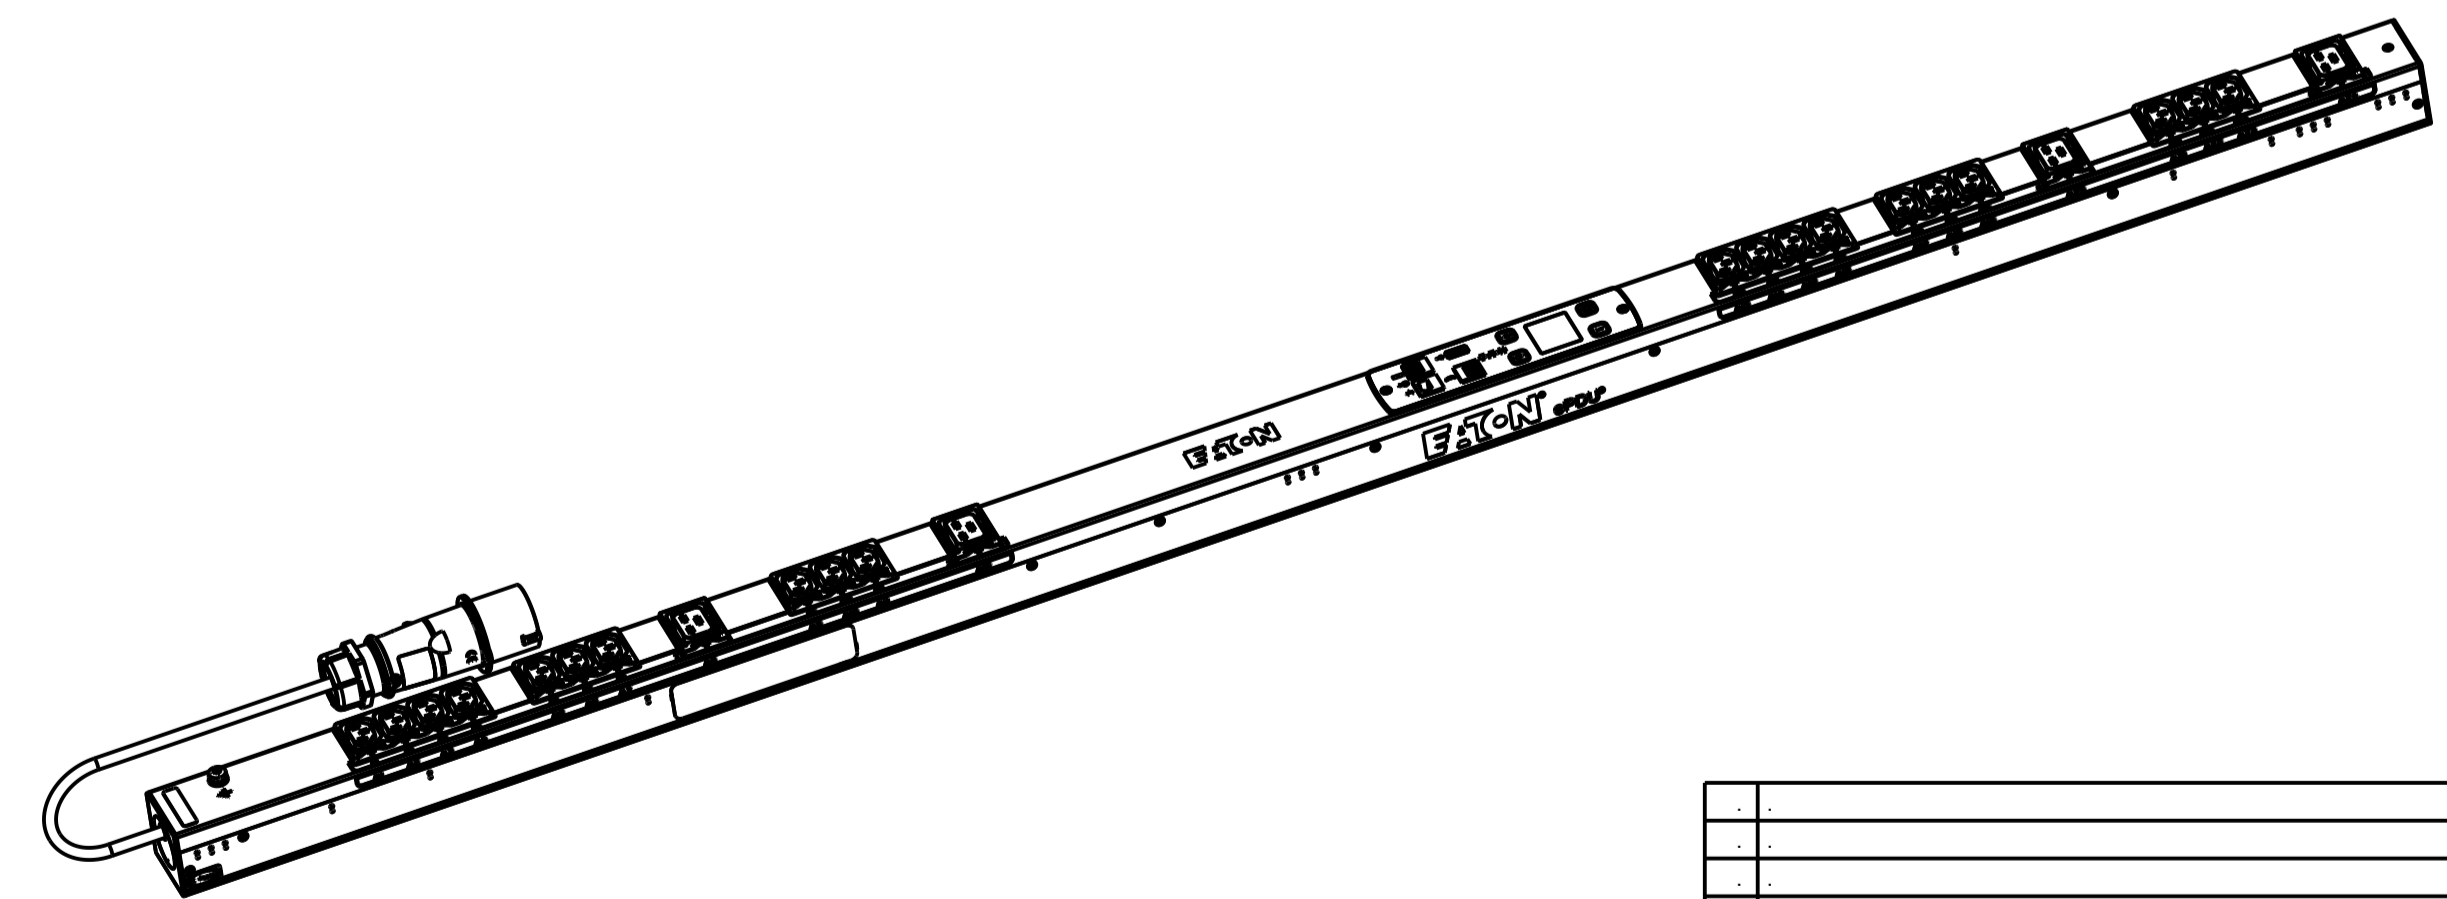

SCALE 0.200

REV. MODIFICATION		DATE		DRESS/DRAW		VERIF.	
EATON		HEINEMANN PRODUCTS		VUE/VIEW EUROPE: 4/10		N° MAG EMOB04	
CH-1345 LE LIEU SWITZERLAND		DESIGNEE LE / DRAWED THE		17.01.2015		PAR / BY G.McD.	
TOLEANCE GENERALE / GENERAL TOLERANCE		VERIFIE PAR / VERIFIED BY		M.B.			
TRAITEMENT / FINISH NA		MATERIE / MATERIAL NA		NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT X		DIMENSIONS AND TOLERANCES IN MILLIMETERS	
DESIGNATION EPDU MO 0U (309 16A 1P)20XC13:4XC19		SK-49819-Y1		00			
COTES A CONTROLER / INSPECTION DIMENSIONS XX.XX		COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS # XX.XX		NUMERO DU PLAN / PLAN NUMBER		REV.	
<small>Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.</small>							