

3G Enterprise Power Solutions - EPS2 Series



The **Eaton® 3G Enterprise Power Solutions** are the ideal solution for converged data networks and low power tele-communications applications requiring compact, efficient and flexible DC power supplies.

This EPS2 series is a 19" rack mounted system and is available with up to two of the Eaton 3G Enterprise or Access 48V rectifier modules providing a total output of up to 3600W.

The versatile SC200 system controller features a front access USB port for ease of system setup along with a RS232 rear port and a 10BaseT Ethernet port for remote networking and communications.

Communication features of the SC200 system controller include TCP/IP, SNMP and an onboard web server allowing access with standard web browsers. The SC200 also supports GSM cellular (including text messaging) and standard PSTN modems.

The Enterprise systems include an integral DC distribution panel with easy to fit push-in circuit breakers and low voltage disconnect contactor to prevent over discharging of the optional backup batteries.

Typical applications include providing secure power for customer premises equipment, roadside cabinets, converged VoIP/data networks, PoE, IP routers and small PABX's.

Features

- 19" rack mounting
- High power density
- Intelligent system controls
- Pre-configured software
- Onboard secure web server
- Push-in easy to fit circuit breakers
- Low Voltage Disconnect
- Fast on-line expansion of rectifiers (hot-swap)
- High efficiency and unity power factor
- Easy to use menu & full color display
- Optional batteries

Technical Specifications

Input

AC Supply	Nominal: 120V, 240V Operating Range: 90V – 275V
Power Factor †	>0.99 (50 – 100% Output Current)
Efficiency †	92% (50 – 100% Output Current)

Output

DC Output Voltage Range	43 – 57.5V	
DC Output Power (maximum*) †	240V AC:	APR48-3G: 3.6kW EPR48-3G: 1.8kW
	120V AC:	APR48-3G: 2.2kW EPR48-3G: 1.1kW

* Based on two rectifiers fitted, refer to rectifier data sheets.

Environmental

Operating Temperature Range	Rated:	-10°C to +50°C [-14°F to +122°F]
	Extended*:	-40°C to +70°C [-40°F to +158°F]

*Output current is derated above 50°C [122°F]

Mechanical

Dimensions H,W,D	2U , 19" mounting, 13.2" [335mm]*
------------------	-----------------------------------

* Additional clear depth space is required for exhaust air.

System

System Controller	SC200
DC Distribution Module	12-way circuit breakers (2 x Battery, 10 x Load) Circuit breaker type: Magnetic/Hydraulic, push fit Battery circuit breakers: Heinemann AC1R Series Typical ranges available: 30A, 40A, 50A, 60A, 70A Load circuit Breakers: Heinemann JC1S Series Typical ranges available: 6A, 10A, 15A, 20A, 25A, 30A
Communication Features	USB direct 10BaseT Ethernet, TCP/IP, SNMP, On board web server RS232 to external PSTN or GSM modem (modem not included)
Rectifier Blank Panels	For unused rectifier positions

Software

DCTools	Configuration software. Free download from: www.powerware.com/downloads
PowerManagerII	Remote control and monitoring software

† Power factor, efficiency and DC output power are dependant on rectifier model fitted. Refer to the rectifier data sheet for further details.

Options

Battery*	Eaton Extended Battery Module (EBM) PW5130 48V EBM RM P/N 103006587-6591
----------	--


Weight: 29.5kg [65lb]

Dimensions (H,W,D*): 85mm (2U), 432mm (19" mounting), 487mm

*Additional space is required at the rear for cables.

Typical Run time values* (see graph).

Battery Run Time (minutes)

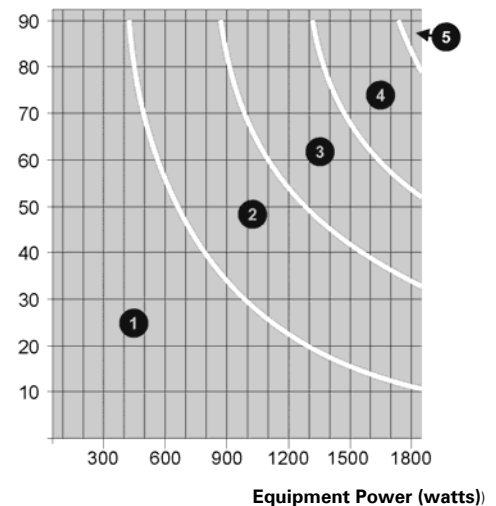

A = Required number of battery modules.

*Battery times are approximate and vary depending on factors such as:
- load configuration
- battery charge
- battery age and temperature.

* Other battery options available - consult your local Eaton agent.

Battery Cables	CKBATT-02 Eaton EBM 5130 connection cable, 2000mm long or CKBATT-01 'other batteries' connection cable, 2000mm long
Equipment Cable	Customer Equipment Connection Cable CKLOAD-00 10-way connection loom, 1000mm long
EBM Rack Mounting Kit	Included with EBM5130 as standard

Certifications

All products comply with International Standards.

North America	UL (Canada, USA), FCC Class B
Europe	CE
Australia and New Zealand	C-Tick

In the interests of continual product improvement all specifications are subject to change without notice.



New Zealand Distributor



7 Glover Street, Ngauranga, Wellington
59 Maurice Road, Penrose, Auckland
PO Box 13-432, Johnsonville, Wellington
0800 UPS POWER (0800 877 769)
sales@upspower.co.nz
www.upspower.co.nz



Eaton, CellSure, SiteSure, DCTools and PowerManager are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates. All other trademarks are property of their respective owners.

© 2009 Eaton Corporation
All Rights Reserved
EPS2 C

