

**PHASE I
WATERSHED ASSESSMENT FINAL REPORT
AND TMDL**

**OAKWOOD LAKES WATERSHED ASSESSMENT
BROOKINGS COUNTY
SOUTH DAKOTA**



**South Dakota Watershed Protection Program
Division of Financial and Technical Assistance
South Dakota Department of Environment and Natural Resources
Steven M. Pirner, Secretary**



December 2005

**PHASE I
WATERSHED ASSESSMENT FINAL REPORT
AND TMDL**

**OAKWOOD LAKES WATERSHED ASSESSMENT
BROOKINGS COUNTY
SOUTH DAKOTA**

**South Dakota Watershed Protection Program
Division of Financial and Technical Assistance
South Dakota Department of Environment and Natural Resources
Steven M. Pirner, Secretary**

Project Sponsor and Prepared By

East Dakota Water Development District



**State of South Dakota
Mike Rounds, Governor**

December 2005

This project was conducted in cooperation with the State of South Dakota and the United States Environmental Protection Agency, Region 8.

EPA Grants # C9998185-96 and # C9998185-00

EXECUTIVE SUMMARY

PROJECT TITLE: Oakwood Lakes Watershed Assessment

START DATE: April 01, 2001

COMPLETION DATE: 12/31/06

FUNDING: **TOTAL BUDGET:** \$330,576 (projected)

TOTAL EPA GRANT: \$150,243

TOTAL EXPENDITURES OF EPA FUNDS: \$150,243 (through 12/31/06)

TOTAL SECTION 319 MATCH ACCRUED: \$205,846.36 (through 12/31/06)

BUDGET REVISIONS:

Original EPA Grant: \$172,243

Grant Reductions: \$ 22,000

Revised EPA Grant: \$150,243

TOTAL EXPENDITURES: \$356,089.36 (through 12/31/06)

****Note:** these amounts represent the total cost for the North-Central Big Sioux River Watershed Assessment project
which also covered the assessment of Oakwood Lakes

SUMMARY ACCOMPLISHMENTS

The Oakwood Lakes watershed assessment project began in April of 2001 in conjunction with the North-Central Big Sioux River Watershed Assessment Project. This assessment continued through December of 2005 when data analysis and compilation into a final report was completed. The Oakwood Lake watershed assessment was conducted as a result of East Oakwood Lake being placed on the 1998 South Dakota 303(d) impaired waterbody list. Excess nutrients, siltation, and noxious aquatic plants were cited as the primary problems. Additionally, West Oakwood Lake was listed on the 2002 South Dakota 303(d) Waterbody List for not supporting its beneficial uses due to TSI impairment. Both East Oakwood Lake and West Oakwood Lake have been identified as impaired on subsequent impaired waterbody lists to include the most recent 2006 South Dakota Integrated Report for Surface Water Quality Assessment.

This watershed project met all of its milestones in a timely manner, with the exception of completing the final report. This was delayed due to an additional watershed assessment (Central Big Sioux River Watershed Assessment, South Dakota) being completed. An EPA section 319 grant provided a majority of the funding for this project. The Department of Environment and Natural Resources and East Dakota Water Development District provided matching funds for the project.

Water quality monitoring and watershed modeling resulted in the identification of nutrient impairment as related to TSI trend in both East Oakwood Lake and West Oakwood Lake. Additionally, there were a number of pH exceedences identified in East Oakwood Lake. The sources of these impairments may be addressed through best management practices (BMPs) such as shoreline buffers and riparian management, as well as in-lake management of rough fish biomass.

The long term goal for this project was to locate and document sources of non-point source pollution in the Oakwood Lakes watershed and provide feasible restoration alternatives for the improvement of water quality. Through identification of sources of impairment in the watershed, this goal was accomplished.

ACKNOWLEDGEMENTS

The cooperation of the following organizations and individuals is gratefully appreciated. The assessment of the Central Big Sioux River and its watershed could not have been completed without the cooperation of the landowners in the study area - their cooperation is greatly appreciated.

Brookings County Conservation District
Natural Resource Solutions
Sioux Falls Health Lab
South Dakota Department of Environment and Natural Resources
South Dakota Department of Game, Fish and Parks
South Dakota Geological Survey
South Dakota State University, Water Resource Institute
United States Department of Agriculture, Farm Service Agency, Brookings
United States Department of Agriculture, Natural Resource Conservation Service
United States Fish and Wildlife Service
United States Geological Survey

East Dakota Water Development staff that contributed to the development of this report:
Technical Staff: Deb Springman, Becky Banks, Mark Hanson, Craig Milewski,
Dray Walter
Summer Assistants: Sam Kezar, Kate VanDerWal

TABLE OF CONTENTS

EXECUTIVE SUMMARY	i
ACKNOWLEDGEMENTS	ii
TABLE OF CONTENTS	iii
LIST OF FIGURES	vi
LIST OF TABLES	ix
LIST OF APPENDICES	xii
ABBREVIATIONS	xiii
INTRODUCTION	1
PURPOSE	1
GENERAL WATERSHED DESCRIPTION	1
Geology and Soils	
Climate	
Land Use, Population, & History	
PROJECT DESCRIPTION	4
BENEFICIAL USES	6
RECREATIONAL USE	7
<u>THREATENED AND ENDANGERED SPECIES</u>	8
PROJECT GOALS, OBJECTIVES, AND MILESTONES	9
GOALS	9
OBJECTIVES	9
Objective 1. Water Quality Assessment	
Objective 2. Quality Assurance/ Quality Control (QA/QC)	
Objective 3. Watershed Modeling	
Objective 4. Information and Outreach	
Objective 5. Reporting/TMDL Determination	
MILESTONES	11
METHODS	12
ENVIRONMENTAL INDICATORS	12
Water Quality Monitoring	12
Description of Parameters	13
Water Quality Sampling	17
Biological Monitoring (Tributaries)	18
Macroinvertebrate Sampling.....	18
Biological Monitoring (Lakes).....	20
Algae Sampling.....	20
Chlorophyll- <i>a</i> Sampling.....	21
Aquatic Plant Sampling.....	21
Hydrologic Monitoring.....	25
TSI Computation.....	26

QUALITY ASSURANCE AND DATA MANAGEMENT	27
ASSESSMENT OF SOURCES	27
Point Sources	27
Non-point Sources	27
Modeling	28
FLUX Model	29
BATHTUB Model	29
AGNPS Feedlot Model.....	30
AnnAGNPS Landuse Model.....	30
Flow Duration Intervals.....	30
RESULTS	32
WATER QUALITY MONITORING	32
Tributary Seasonal Trends	32
Tributary Water Quality Results	34
Chemical Parameters	34
Field Parameters	38
In-Lake Seasonal Trends	40
In-Lake Water Quality Results	42
Chemical Parameters	42
Field Parameters	47
HYDROLOGIC MONITORING.....	51
Annual Hydrologic Loading Budget	51
Nutrient and Sediment Budgets	52
BIOLOGICAL MONITORING.....	53
Tributary Biological Results	53
Macroinvertebrate Sampling	53
In-Lake Biological Results	54
Algae Sampling	54
Chlorophyll- <i>a</i> Sampling	58
Aquatic Plant Sampling.....	59
TSI COMPUTATION.....	63
ASSESSMENT OF SOURCES	65
Point Sources	65
Non-point Sources	65
Modeling	66
FLUX Modeling	66
BATHTUB Modeling	67
AGNPS Feedlot Model	69
AnnAGNPS Model.....	69
Flow Duration Intervals.....	72
ANALYSIS AND SUMMARY	78
WEST OAKWOOD LAKE WATERSHED (Johnson Lake and Lake Tetonkaha)	78
Landuse Summary	78
Water Quality Summary	79
Hydrologic Budget	83

Sediment and Nutrient Budget.....	84
Biological and Physical Habitat Summary.....	87
Trophic State Index (TSI) Summary	89
Johnson Lake Segment	92
North Lake Tetonkaha Lake Segment	95
South Lake Tetonkaha Segment	98
Point Sources.....	100
Non-Point Sources.....	100
EAST OAKWOOD LAKE WATERSHED	101
Landuse Summary.....	101
Water Quality Summary	102
Hydrologic Budget	106
Sediment and Nutrient Budgets.....	107
Biological and Physical Habitat Summary.....	110
Trophic State Index (TSI) Summary	111
Point Sources.....	115
Non-Point Sources.....	115
 WATER QUALITY GOALS	 116
 MANAGEMENT OPTIONS AND RECOMMENDATIONS.....	 117
BEST MANAGEMENT PRACTICES	117
External Management of Sediment and Nutrient Sources.....	117
Internal (In-Lake) Management of Sediment and Nutrient Sources	120
HISTORICAL COMPARISON	122
 PUBLIC INVOLEVMENT AND COORDINATION.....	 127
 ASPECTS OF THE PROJECT THAT DID NOT WORK WELL.....	 128
 LITERATURE CITED	 129

LIST OF FIGURES

Figure 1.	Location of the Oakwood Lakes Watershed	2
Figure 2.	South Dakota Precipitation Normals in Inches From 1971-2000	3
Figure 3.	South Dakota Growing Season Precipitation in Inches from 1971-2000	3
Figure 4.	Landuse in the Oakwood Lakes Watershed	4
Figure 5.	Location of Monitoring Sites.	5
Figure 6.	Diagram of the East Oakwood Lake Vegetation Sampling Transects	22
Figure 7.	Diagram of the Johnson Lake Vegetation Sampling Transects.....	23
Figure 8.	Diagram of the Lake Tetonkaha Vegetation Sampling Transects.	24
Figure 9.	East Oakwood Lake Hydrologic Inputs	51
Figure 10.	West Oakwood Lake Hydrologic Inputs	52
Figure 11.	Total Algae Cells per Milliliter by Algae Type for East Oakwood Lake and West Oakwood Lake in June.....	56
Figure 12.	Total Algae Cells per Milliliter by Algae Type for East Oakwood Lake and West Oakwood Lakes in August.....	56
Figure 13.	Total Flagellated Algae Cells per Milliliter by Sampling Date for East Oakwood Lake and West Oakwood Lake.....	57
Figure 14.	Total Blue-Green Algae Cells per Milliliter by Sampling Date for East Oakwood Lake and West Oakwood Lake.....	57
Figure 15.	Total Diatoms Algae Cells per Milliliter by Sampling Date for East Oakwood Lake and West Oakwood Lake.....	58
Figure 16.	Total Non-Motile Algae Cells per Milliliter by Sampling Date for East Oakwood Lake and West Oakwood Lake.....	58
Figure 17.	Monthly In-Lake Chlorophyll- <i>a</i> Concentrations by Date and Sampling Site for East Oakwood Lake and West Oakwood Lake.....	59
Figure 18.	Location of Aquatic Plant Species in East Oakwood Lake.....	60
Figure 19.	Location of Aquatic Plant Species in Lake Tetonkaha	61
Figure 20.	Location of Aquatic Plant Species in Johnson Lake.	62
Figure 21.	East Oakwood Lake TSI Values by Beneficial Use Support.....	63
Figure 22.	West Oakwood Lake TSI Values by Beneficial Use Support.....	64
Figure 23.	BATHTUB Predicted Mean TSI Reductions and Use Support of East Oakwood Lake and West Oakwood Lake.....	68
Figure 24.	Fecal Coliform Bacteria Flow Duration Interval of Inlet (T43).....	72
Figure 25.	Fecal Coliform Bacteria Flow Duration Interval of Inlet (T44).....	73
Figure 26.	Fecal Coliform Bacteria Flow Duration Interval of Outlet (T45).....	73
Figure 27.	Fecal Coliform Bacteria Flow Duration Interval of Outlet (T46).....	74
Figure 28.	Fecal Coliform Bacteria Flow Duration Interval of Inlet (T48).....	74
Figure 29.	Total Suspended Solids Flow Duration Interval of Inlet (T43).....	75
Figure 30.	Total Suspended Solids Flow Duration Interval of Inlet (T44).....	75
Figure 31.	Total Suspended Solids Flow Duration Interval of Outlet (T45).....	76
Figure 32.	Total Suspended Solids Flow Duration Interval of Outlet (T46).....	76
Figure 33.	Total Suspended Solids Flow Duration Interval of Inlet (T48).....	77
Figure 34.	West Oakwood Lake Watershed Map.....	78
Figure 35.	Johnson Lake Total Phosphorus to Chlorophyll- <i>a</i> Relationship.....	79
Figure 36.	Lake Tetonkaha Total Phosphorus to Chlorophyll- <i>a</i> Relationship.....	80
Figure 37.	Johnson Lake Chlorophyll- <i>a</i> Concentrations.....	80

Figure 38.	Lake Tetonkaha Chlorophyll- <i>a</i> Concentrations.....	81
Figure 39.	Johnson Lake Chlorophyll- <i>a</i> to Secchi Depth Relationship.....	81
Figure 40.	Lake Tetonkaha Chlorophyll- <i>a</i> to Secchi Depth Relationship.....	81
Figure 41.	Johnson Lake Total Nitrogen to Total Phosphorus Ratio.....	82
Figure 42.	Lake Tetonkaha Total Nitrogen to Total Phosphorus Ratio.....	82
Figure 43.	2003 and 2004 Lake Level Readings of Lake Tetonkaha	83
Figure 44.	2004 Lake Level Readings of Johnson Lake	83
Figure 45.	West Oakwood Lake Total Nitrogen Load.....	85
Figure 46.	West Oakwood Lake Total Phosphorus Load.....	87
Figure 47.	Percentage of Major Algae Groups Collected in Johnson Lake.....	88
Figure 48.	Percentage of Major Algae Groups Collected in Lake Tetonkaha	88
Figure 49.	West Oakwood Lake Secchi, Chlorophyll- <i>a</i> , and Total Phosphorus TSI Values Plotted by Carlson Trophic Levels.....	90
Figure 50.	West Oakwood Lake Secchi and Chlorophyll- <i>a</i> TSI Values Plotted by Beneficial Use Support.....	91
Figure 51.	Johnson Lake Secchi, Chlorophyll- <i>a</i> , and Total Phosphorus TSI Values Plotted by Carlson Trophic Levels.....	92
Figure 52.	Johnson Lake Secchi and Chlorophyll- <i>a</i> TSI Values Plotted by Beneficial Use Support.....	93
Figure 53.	BATHTUB Predicted Mean TSI Reductions and Use Support of Johnson Lake.....	93
Figure 54.	North Lake Tetonkaha Secchi, Chlorophyll- <i>a</i> , and Total Phosphorus TSI Values Plotted by Carlson Trophic Levels.....	95
Figure 55.	North Lake Tetonkaha Secchi and Chlorophyll- <i>a</i> TSI Values Plotted by Beneficial Use Support.....	96
Figure 56.	North Tetonkaha Lake BATHTUB Predicted Mean TSI Reductions and Use Support	96
Figure 57.	South Lake Tetonkaha Secchi, Chlorophyll- <i>a</i> , and Total Phosphorus TSI Values Plotted by Carlson Trophic Level.....	98
Figure 58.	South Lake Tetonkaha Secchi and Chlorophyll- <i>a</i> TSI Values Plotted by Beneficial Use Support.....	99
Figure 59.	South Tetonkaha Lake BATHTUB Predicted Mean TSI Reductions and Use Support	99
Figure 60.	East Oakwood Lake Watershed Location Map.....	101
Figure 61.	East Oakwood Lake pH Grab Samples Based on Numeric Standard ≥ 6.5 to ≤ 9.0	102
Figure 62.	East Oakwood Lake pH to Water Temperature Comparison.....	103
Figure 63.	Sites L1 and L2 Phosphorus to Chlorophyll- <i>a</i> Relationship	104
Figure 64.	East Oakwood Lake Chlorophyll- <i>a</i> Concentrations.....	104
Figure 65.	Sites L1 and L2 Chlorophyll- <i>a</i> to Secchi Depth Relationship	105
Figure 66.	East Oakwood Lake Total Nitrogen to Total Phosphorus Ratio	105
Figure 67.	East Oakwood Lake 2003 and 2004 Lake Level Readings.....	106
Figure 68.	East Oakwood Lake Total Nitrogen Loads.....	107
Figure 69.	East Oakwood Lake Total Phosphorus Loads.....	109
Figure 70.	Percentage of Major Algae Groups Collected in East Oakwood Lake	110
Figure 71.	Type and Frequency of Aquatic Macrophytes at 32 Transects.....	111
Figure 72.	East Oakwood Lake Secchi and Chlorophyll- <i>a</i> TSI Plotted by Carlson Trophic Level.....	112
Figure 73.	East Oakwood Lake Secchi Depth and Chlorophyll- <i>a</i> TSI Values Plotted by Beneficial Use Support.....	113
Figure 74.	East Oakwood Lake BATHTUB Predicted Mean TSI Reductions and Use Support.....	114

Figure 75. Critical Nutrient Areas Based on a 10-Year Simulation at Current Conditions..... 119

Figure 76. Comparison of Historical TSI Values with Current TSI Values of East Oakwood
Lakes 123

Figure 77. Comparison of Historical TSI Values with Current TSI Values of West Oakwood
Lakes 124

Figure 78. Comparison of Historical and Current Overall TSI Values used to Determine
Beneficial Use Support of Oakwood Lakes 125

LIST OF TABLES

Table 1.	303(d) Listing of Locations Not Meeting Water Quality Criteria	1
Table 2.	Description of Northern Glaciated Plains Ecoregion	4
Table 3.	Location of the Monitoring Sites	5
Table 4.	Monitoring Sites and Their Beneficial Use Classification	6
Table 5.	Numeric Criteria Assigned to Beneficial Uses of Surface Waters in the Oakwood Lakes Watershed.....	7
Table 6.	Recreational Uses of Oakwood Lakes.....	7
Table 7.	Endangered, Threatened, and Candidate Species of the Oakwood Lakes Area	8
Table 8.	Milestones - Proposed and Actual Completion Dates	11
Table 9.	Project Sites Coinciding with DENR Monitoring Locations	12
Table 10.	Water Quality Parameters and Lab Detect Limits of the WRI Lab and the Sioux Falls Health Lab.....	13
Table 11.	Water Quality Parameters and Lab Detect Limits of the State Health Lab.....	13
Table 12.	Sampling Years and Laboratories that Processed the Samples	17
Table 13.	Deployment and Retrieval Dates for Rock Baskets by Site	18
Table 14.	Candidate Macroinvertebrate Metrics Calculated for the NCBSRWA	19
Table 15.	Core Macroinvertebrate Metrics Calculated for the BSR and Tributaries in the NCBSRW	20
Table 16.	Stage Recorder Start and End Dates.....	25
Table 17.	Oakwood Lakes Benchmark Locations	25
Table 18.	Modeling and Assessment Techniques and Outputs	29
Table 19.	Flow Duration Interval Graph Dates.....	30
Table 20.	Average Seasonal Concentrations (East Oakwood Lake Inlet)	33
Table 21.	Average Seasonal Concentrations (East Oakwood Lake Outlet)	33
Table 22.	Average Seasonal Concentrations (West Oakwood Lake Inlets)	33
Table 23.	Tributary Sites Fecal Coliform Bacteria Results	34
Table 24.	Tributary Sites Total Solids Results	35
Table 25.	Tributary Sites Total Suspended Solids Results	35
Table 26.	Tributary Sites Total Dissolved Solids Results	35
Table 27.	Tributary Sites Total Ammonia Nitrogen as N Results	36
Table 28.	Tributary Sites Nitrate-Nitrite Results	36
Table 29.	Tributary Sites Total Kjeldahl Nitrogen (TKN) Results	36
Table 30.	Tributary Sites Organic Nitrogen Results	37
Table 31.	Tributary Sites Total Phosphorus Results	37
Table 32.	Tributary Sites Total Dissolved Phosphorus Results	37
Table 33.	Tributary Sites Dissolved Oxygen Results	38
Table 34.	Tributary Sites pH Results	38
Table 35.	Tributary Sites Air Temperature Results	38
Table 36.	Tributary Sites Water Temperature Results	39
Table 37.	Tributary Sites Conductivity Results	39
Table 38.	Tributary Sites Specific Conductivity Results	39
Table 39.	Tributary Sites Salinity Results	40
Table 40.	Tributary Sites Turbidity (NTU) Results	40
Table 41.	Average Seasonal Concentrations from East Oakwood Lake	41

Table 42. Average Seasonal Concentrations from West Oakwood Lake	41
Table 43. Oakwood Lakes Fecal Coliform Bacteria Results	42
Table 44. Oakwood Lakes Total Solids Results	42
Table 45. Oakwood Lakes Total Suspended Solids Results	43
Table 46. Oakwood Lakes Total Dissolved Solids Results	43
Table 47. Oakwood Lakes Total Ammonia Nitrogen as N Results	44
Table 48. Oakwood Lakes Nitrate-Nitrite Results	44
Table 49. Oakwood Lakes Total Kjeldahl Nitrogen (TKN) Results	45
Table 50. Oakwood Lakes Organic Nitrogen Results	45
Table 51. Oakwood Lakes Total Phosphorus Results	46
Table 52. Oakwood Lakes Total Dissolved Phosphorus Results	46
Table 53. Oakwood Lakes Dissolved Oxygen Results	47
Table 54. Oakwood Lakes pH Results	47
Table 55. Oakwood Lakes Air Temperature Results	48
Table 56. Oakwood Lakes Water Temperature Results	48
Table 57. Oakwood Lakes Conductivity Results	49
Table 58. Oakwood Lakes Specific Conductivity Results	49
Table 59. Oakwood Lakes Salinity Results	50
Table 60. Oakwood Lakes Turbidity (NTU) Results	50
Table 61. Site T44 Macroinvertebrate Scoring	53
Table 62. Site T45 Macroinvertebrate Scoring	53
Table 63. Site T46 Macroinvertebrate Scoring	54
Table 64. Site T48 Macroinvertebrate Scoring	54
Table 65. Algal Density by Lake and Date Sampled	55
Table 66. Algal Biovolume by Lake and Date Sampled	55
Table 67. Submergent Plant Species Identified in East Oakwood Lake	59
Table 68. Wildlife Contributions of Fecal Coliform Bacteria	65
Table 69. Failing Septic System Contributions of Fecal Coliform Bacteria	66
Table 70. FLUX Yearly Loads and Concentrations by Water Quality Parameter and Site	66
Table 71. Observed and Predicted Mean Trophic State Index (TSI) Values Calculated Using the BATHTUB Model	67
Table 72. Oakwood Lakes Watershed AGNPS Ratings	69
Table 73. AGNPS Model Outputs for Feedlots in the Oakwood Lakes Watershed	69
Table 74. Critical Phosphorus and Nitrogen Cells in the Oakwood Lake Watershed	70
Table 75. Modeled Percent Reductions in Nutrients and Sediment After BMP Application	71
Table 76. Hydrologic Budget of West Oakwood Lake	84
Table 77. Bug, Fish, and Habitat Index Values for the West Oakwood Lake Watershed	89
Table 78. Carlson Trophic Levels and Numeric Ranges	89
Table 79. Observed Trophic State Index Values Collected in West Oakwood Lake	90
Table 80. Observed Trophic State Index Values Collected in Johnson Lake	92
Table 81. Johnson Lake Observed and Predicted Watershed Reductions of Nitrogen and Phosphorus Concentrations and Predicted In-lake Mean TSI Values Using the BATHTUB	94
Table 82. Observed Trophic State Index Values Collected in North Lake Tetonkaha	95
Table 83. North Lake Tetonkaha Observed and Predicted Watershed Reductions in Nitrogen and Phosphorus Concentrations and Prdicted In-Lake Mean TSI Values Using the BATHTUB Model	97

Table 84. Observed Trophic State Index Values Collected in South Lake Tetonkaha	98
Table 85. South Lake Tetonkaha Observed and Predicted Watershed Reductions in Nitrogen and Phosphorus Concentrations and Predicted In-Lake Mean TSI Values Using the BATHTUB Model	100
Table 86. East Oakwood Lake Water Quality Exceedences	102
Table 87. Hydrologic Budget for East Oakwood Lake	106
Table 88. East Oakwood Lake Aquatic Macrophytes	110
Table 89. Bug, Fish, and Habitat Index Values in the East Oakwood Lake Watershed	111
Table 90. Carlson Trophic Levels and Numeric Ranges	112
Table 91. Observed Trophic State Index Values Collected in East Oakwood Lake	112
Table 92. East Oakwood Lake Observed and Predicted Watershed Reductions in Nitrogen and Phosphorus Concentrations and Predicted In-lake Mean TSI Values Using BATHTUB	115
Table 93. Best Management Practices for Nutrient Reductions	117
Table 94. Percent Reduction Achievable by Best Management Practice	118
Table 95. Oakwood Lakes Recent Stocking Efforts	120
Table 96. Recent Rough Fish Removal by Commercial Fishing	121
Table 97. Historic Comparison of Total Suspended Solids	126
Table 98. Historic Comparison of Total Nitrogen	126
Table 99. Historic Comparison of Total Phosphorus	126

LIST OF APPENDICES

Appendix A. 2004 East Oakwood Lake Fisheries Survey.....	A-1
Appendix B. 2004 West Oakwood Lake Fisheries Survey.....	B-1
Appendix C. WQ Grab Sample Data	C-1
Appendix D. WQ Field Datasheet	D-1
Appendix E. Natural Resource Solutions Contract and Laboratory Procedures	E-1
Appendix F. WRI Lab Memo	F-1
Appendix G. QA/QC - WQ Duplicates and Blanks	G-1
Appendix H. Monthly Concentrations - FLUX	H-1
Appendix I. Monthly Loadings - FLUX	I-1
Appendix J. Stage Discharge Curves	J-1
Appendix K. Methodology of the AGNPS Feedlot Model	K-1
Appendix L. Bathymetric Map of Oakwood Lakes	L-1
Appendix M. Macroinvertebrate Core Metric Results.....	M-1
Appendix N. Algal Species by Lake	N-1
Appendix O. Modeled Percent Reductions in Nutrients After BMP Application.....	O-1
Appendix P. BATHTUB Variables and Descriptions	P-1
Appendix Q. TMDL - East Oakwood Lake (TSI).....	Q-1
Appendix R. TMDL - West Oakwood Lakes (TSI).....	R-1
Appendix S. Public Notice and EPA TMDL Comments and SDDENR Response	S-1

ABBREVIATIONS

AFOs	Animal Feeding Operations – <i>facility where animals are confined, fed, or maintained for a total of 45 days in any 12 month period, and where vegetation is not sustained in the normal growing season over any portion of the lot or facility</i>
AGNPS	Agricultural Non-Point Source – <i>an event-based, watershed-scale model developed to simulate runoff, sediment, chemical oxygen demand, and nutrient transport in surface runoff from ungaged agricultural watersheds</i>
BMP	Best Management Practice – <i>an agricultural practice that has been determined to be an effective, practical means of preventing or reducing nonpoint source pollution</i>
BSR	Big Sioux River
CFU	Colony Forming Units
CV	Coefficient of Variance – <i>a statistical term used to describe the amount of variation within a set of measurements for a particular test</i>
DO	Dissolved Oxygen
EDWDD	East Dakota Water Development District
IBI	Index of Biological Integrity
IPI	Index of Physical Integrity
MOS	Margin of Safety – <i>an index indicating the amount beyond the minimum necessary</i>
MPN	Most Probably Number
NGP	Northern Glaciated Plains
NPDES	National Pollution Discharge Elimination System
NPS	Nonpoint Source
NRCS	Natural Resources Conservation Service
NTU	Nephelometric Turbidity Units – <i>measure of the concentration of size of suspended particles (cloudiness) based on the scattering of light transmitted or reflected by the medium</i>
SD	South Dakota
SDDENR	South Dakota Department of Environment and Natural Resources
SDGFP	South Dakota Department of Game Fish & Parks
SDSU	South Dakota State University
TKN	Total Kjeldahl Nitrogen
TMDL	Total Maximum Daily Load – <i>a calculation of the maximum amount of a pollutant that a waterbody can receive and still meet water quality standards, and an allocation of the amount to the pollutant's sources</i>
TSS	Total Suspended Solids
µmhos/cm	microhmos/centimeter – <i>unit of measurement for conductivity</i>
USFWS	United States Fish and Wildlife Service
USGS	United States Geologic Survey
WQ	Water Quality – <i>term used to describe the chemical, physical, and biological characteristics of water, usually in respect to its suitability for a particular purpose</i>
WRI	Water Resource Institute

INTRODUCTION

PURPOSE

The purpose of this assessment is to determine the sources of impairment and develop restoration alternatives for East Oakwood Lake and West Oakwood Lake in northwestern Brookings County, South Dakota. Both lakes make up a chain of lakes called Oakwood Lakes. West Oakwood Lake is comprised of two interconnected lakes, Johnson Lake and Lake Tetonkaha. These lakes are connected to East Oakwood Lake by a series of culverts. The watershed of these lakes encompasses a small portion of the greater Big Sioux River Watershed. This assessment was completed in conjunction with the North-Central Big Sioux River Watershed Assessment Project.

Direct runoff into the lakes, as well as intermittent tributaries, contribute loadings of sediment and nutrients primarily related to seasonal snow melt or rainfall events. East Oakwood Lake was initially listed in the 1998 South Dakota 303(d) Waterbody List as hypereutrophic and not supporting of its designated uses and has subsequently been listed to include the most recent 2006 Integrated Report. Excessive nutrients, siltation, and noxious aquatic plants were identified as the problems in the original listing. High TSI value is the reason for its current listing. West Oakwood Lake was first listed in the 2002 303(d) Impaired Waterbody List as not supporting of its designated uses due to high TSI value (Table 1). This lake has also been listed subsequent years to include the most recent 2006 Integrated Report (SD DENR 2006). Through water quality monitoring (chemical and biological), stream gaging, and land use analysis, sources of impairment were determined and feasible alternatives for restoration efforts were developed.

The South Dakota 303(d) Waterbody List identifies this chain of lakes as a priority for the development of a Total Maximum Daily Load (TMDL) for the pollutants of concern. The final assessment report and associated TMDLs will serve as the foundation for restoration projects that can be developed and implemented to meet the designated uses and water quality standards of the Oakwood chain of lakes and its watershed. This project is intended to be the initial phase of a restoration implementation project.

Table 1. 303(d) Listing of Locations Not Meeting Water Quality Criteria

Years Listed	Lake	EDWDD Sites	Basis	Cause	Source
1998 2002 2004 2006	East Oakwood Lake	L1, L2	Lake Assessment	Nutrients Siltation Noxious Aquatic Plants Algal Growth TSI	Non-Point Sources
2002 2004 2006	West Oakwood Lake	L10, L11, L12	Lake Assessment	TSI	Non-Point Sources

GENERAL WATERSHED DESCRIPTION

The Oakwood Lakes watershed is approximately 55,040 acres (86 square miles) in size and is located in the northwest corner of Brookings County, South Dakota (Figure 1). This watershed lies within the North-Central Big Sioux River watershed and includes East Oakwood Lake, West Oakwood Lake (includes Johnson Lake and Lake Tetonkaha), and numerous intermittent tributaries which carry water during spring snowmelt or rainfall events. The Oakwood chain of

lakes drains into the Big Sioux River by way of Mill Creek. The Big Sioux River is a permanent, natural river that flows north to south along the eastern edge of South Dakota and drains into the Missouri River at Sioux City, Iowa.

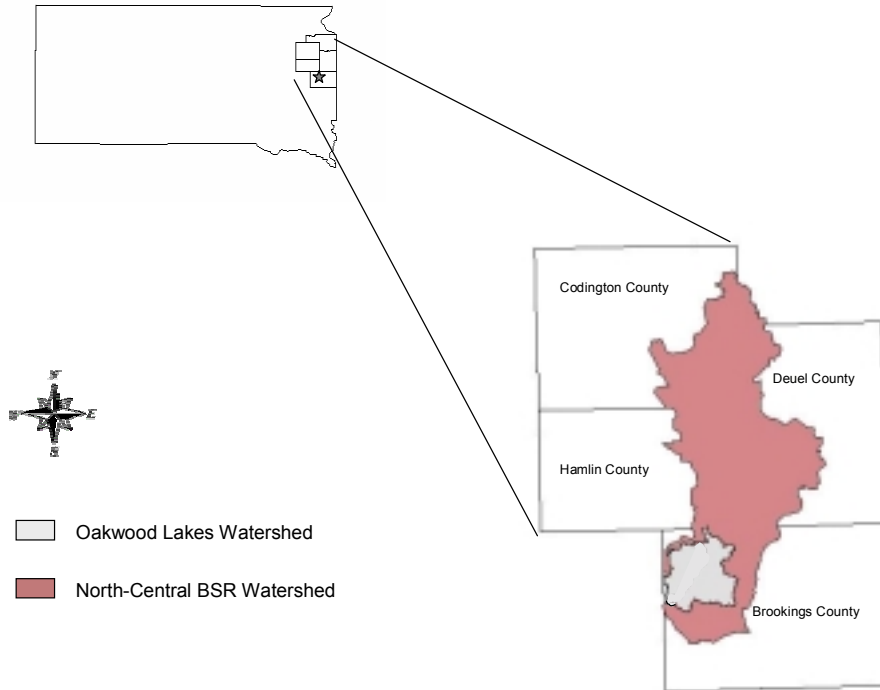


Figure 1. Location of the Oakwood Lakes Watershed

Geology and Soils

The drainage of the Oakwood Lakes watershed is poor with many potholes and sloughs. The relief in the area is minimal. The land elevation in the study area is approximately 1,600 feet above mean sea level.

The surficial materials and bedrock mainly consist of glacial till over Cretaceous shales. Soils within the watershed are derived from a variety of parent materials. Upland soils are relatively fine-grained and have developed over glacial till or eolian (loess) deposits. Coarse-grained soils are found along present or former water courses, and are derived from glacial outwash or alluvial sediments.

Climate

The average annual precipitation in the Oakwood Lakes watershed is 22.8 inches, of which 78 percent typically falls during the growing season of April through September (Figures 2 and 3). Tornadoes and severe thunderstorms strike occasionally. These storms are often of only local extent, short in duration, and occasionally produce heavy rainfall. The average seasonal snowfall is 30.2 inches per year (SDSU 2003).

Precipitation Normals 1971 to 2000 - Inches



Figure 2. South Dakota Precipitation Normals in Inches from 1971 to 2000

Growing Season Precipitation - Inches

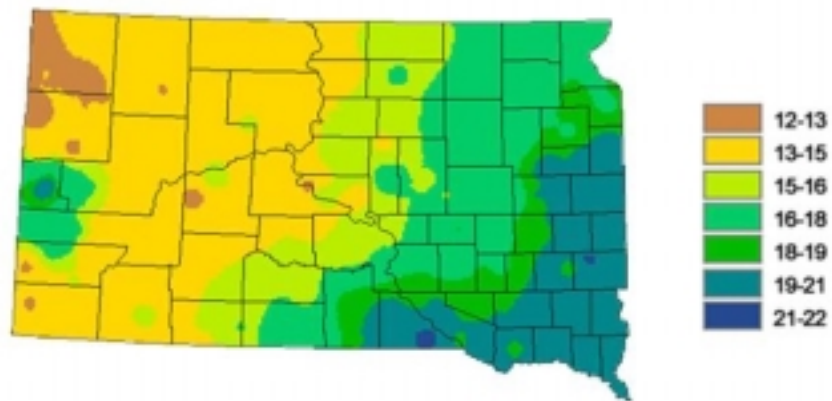


Figure 3. South Dakota Growing Season Precipitation in Inches from 1971 to 2000

Land Use, Population, & History

Land use in the watershed is predominantly agricultural (Figure 4). Approximately 73 percent of the area is cropland, such as corn, soybeans, and small grains, and 20 percent is rangeland. There are 51 animal feeding operations comprised of more than 8,600 animals with 80 percent cattle presence. There are no NPDES facilities located within this watershed. Residential development is limited to the area around the south end of Lake Tetonkaha and scattered farm dwellings throughout the watershed. Many of the residences located around Lake Tetonkaha are seasonal. The majority of the watershed lies within Oakwood Township, with a population of 189 people.

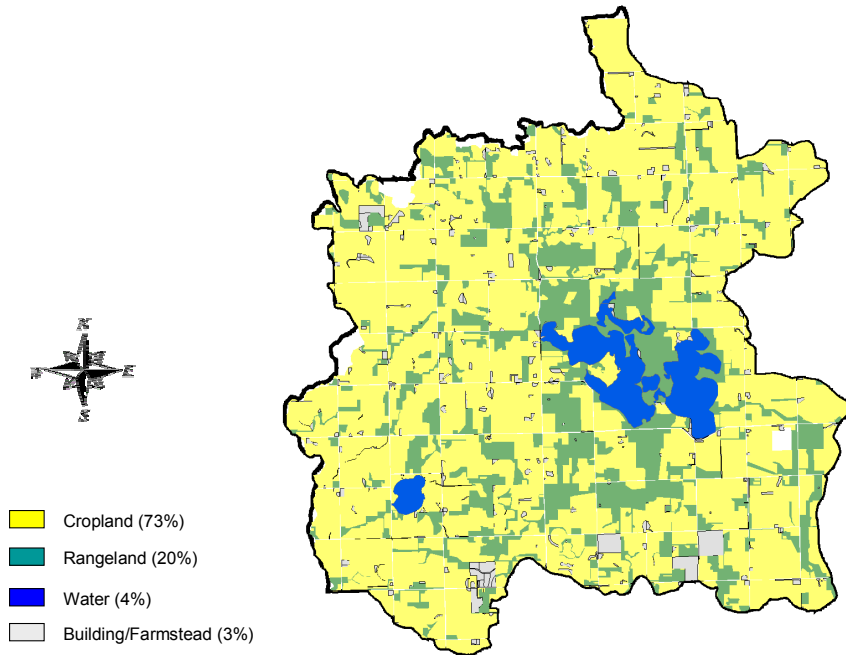


Figure 4. Landuse in the Oakwood Lakes Watershed

The area around the chain of lakes was once used as a summer camp and an annual gathering spot for Native Americans. In 1869, Samuel Mortimer built a log cabin that still stands today at the entrance of Oakwood Lakes State Park.

PROJECT DESCRIPTION

The naturally occurring Oakwood chain of lakes is located within the Northern Glaciated Plains (NGP) ecoregion (Omernik 1987). This chain includes East Oakwood Lake and a meander of two lakes, Johnson Lake and Lake Tetonkaha which are also known as West Oakwood Lake. A description of this region is provided in Table 2. Of the ten monitoring sites, five were setup as in-lake monitoring sites and the remaining five were setup to monitor the inlets and outlets of the three lakes (Figure 5 and Table 3).

Table 2. Description of the Northern Glaciated Plains Ecoregion

Ecoregion	Physiography	Potential Natural Vegetation	Land Use and Land Cover	Climate	Soil Order
Big Sioux Basin	Surficial geology of glacial till. Rolling landscape with defined stream network and few wetlands.	Tallgrass prairie: Big bluestem, little bluestem, switchgrass, indiangrass, sideoats gramma, and lead plant. Riparian areas: willows and cordgrass to the north and some woodland south.	Row crop agriculture of mostly corn and soybean. Some small grain and alfalfa.	Mean annual rainfall of 20-22 inches. Frost-free from 110-140 free days.	Mollisols

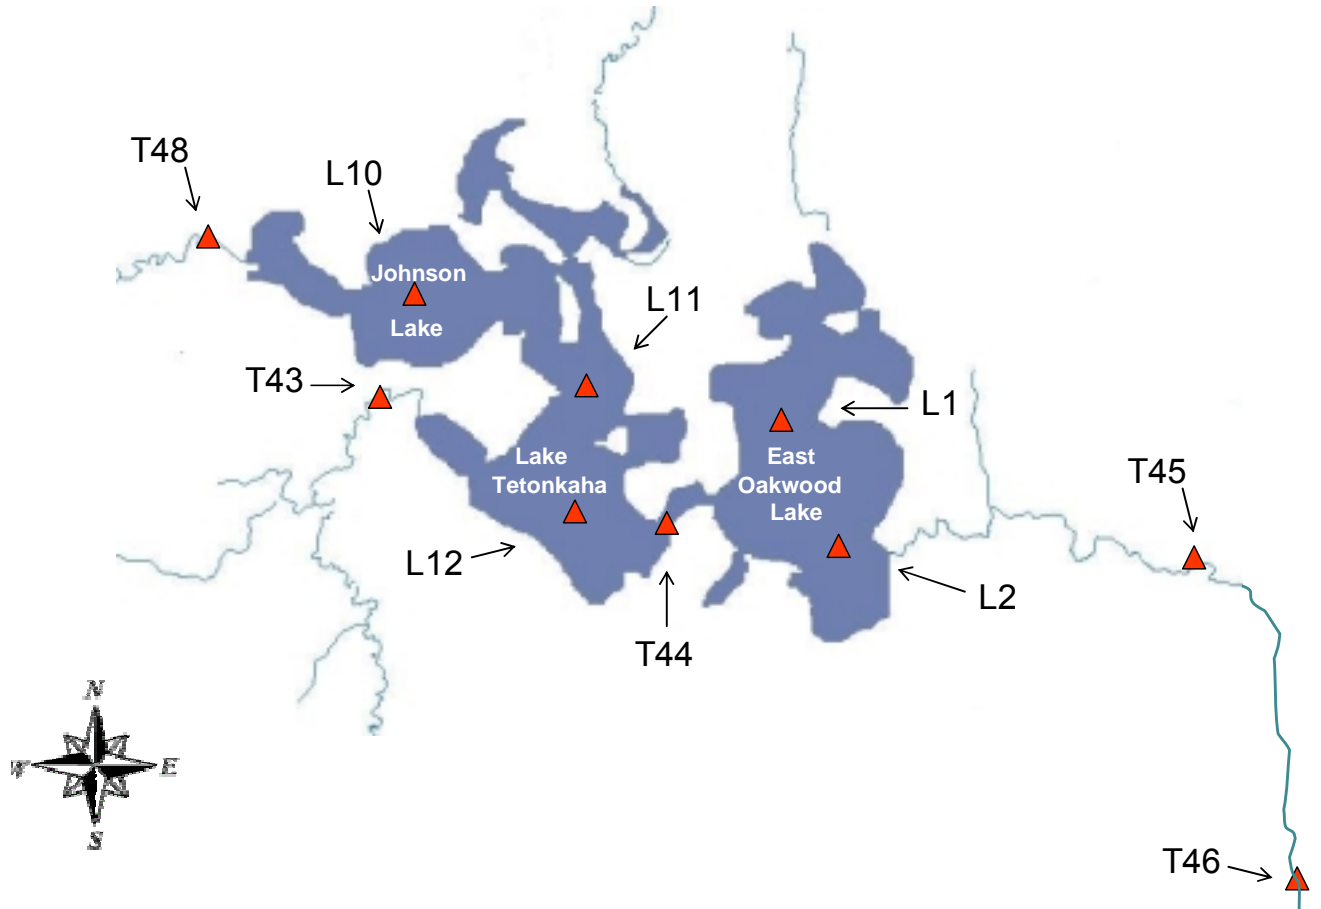


Figure 5. Location of Monitoring Sites

Table 3. Location of the Monitoring Sites

Oakwood Lake Watershed Assessment Project Water Quality Sampling/Stream Gaging Sites						
<i>Location Number</i>	<i>Descriptive Name</i>	<i>Latitude</i>	<i>Longitude</i>	<i>WQ Samples</i>	<i>Gaging Station</i>	<i>Miscellaneous Information</i>
T43	East Oakwood Lake tributary I	44 26 30	097 00 55	Yes	Yes	
T44	East Oakwood Lake tributary II	44 26 20	096 58 55	Yes	Yes	Connection to Lake Tetonkaha (W. Oakwood)
T45	East Oakwood Lake outlet creek I	44 26 00	096 56 50	Yes	Yes	Former DENR WQM site
T46	East Oakwood Lake outlet creek II	44 23 05	096 55 05	Yes	Yes	Former DENR WQM site
T48	East Oakwood Lake Inlet 3			Yes	Yes	
L1	East Oakwood Lake I	44 26 35	096 58 15	Yes	No	North basin site
L2	East Oakwood Lake II	44 26 10	096 58 05	Yes	No	South basin site
L10	Johnson Lake	44 27 08	097 00 27	Yes	No	
L11	North Tetonkaha Lake	44 26 41	096 59 26	Yes	No	
L12	South Tetonkaha Lake	44 26 08	096 59 40	Yes	No	

BENEFICIAL USES

The State of South Dakota has assigned all of the water bodies that are situated within its borders a set of beneficial uses. Beneficial use means the purpose or benefit to be derived from a water body. Under state and federal law, the beneficial use of water is to be protected from degradation. Of the eleven beneficial uses, two are assigned to all streams in the state ((9) fish and wildlife propagation, recreation and stock watering, and (10) irrigation) and one is assigned to all lakes in the state ((9) fish and wildlife propagation, recreation and stock watering). A set of standards is applied to the Oakwood chain of lakes and their tributaries. These standards must be met to maintain the beneficial uses for a particular water body. According to the 1998 South Dakota 305(b) water quality assessment, several designated beneficial uses assigned to East Oakwood Lake are impaired by excessive nutrients, siltation, and noxious aquatic plants. Probable sources of these problems are identified in the report as on-site wastewater systems and agricultural related activities. Assessment monitoring has show both East Oakwood Lake and West Oakwood Lake are not supporting of their beneficial uses due to exceeding the TSI values.

All lake sites are assigned beneficial uses five, seven, eight, and nine. The inlets/outlets are assigned beneficial uses nine and ten (Table 4). Designated beneficial uses and coinciding numeric water quality standards (not to be exceeded) for the Oakwood Lakes watershed are listed in Table 5.

- (5) Warmwater Semi-permanent Fish Life Propagation
- (7) Immersion Recreation
- (8) Limited Contact Recreation
- (9) Fish & Wildlife Propagation, Recreation, & Stock Watering
- (10) Irrigation

Table 4. Monitoring Sites and Their Beneficial Use Classification

Water Body	Site ID	Beneficial Use Classification							
		1	5	6	7	8	9	10	
East Oakwood Lake Trib 1	T43								
East Oakwood Lake Trib 2	T44								
East Oakwood Lake Outlet 1	T45								
East Oakwood Lake Outlet 2	T46								
East Oakwood Lake Inlet 3	T48								
East Oakwood Lake	L1, L2								
Tetonkaha Lake	L11, L12								
Johnson Lake	L10								

Table 5. Numeric Criteria Assigned to Beneficial Uses of Surface Waters in the Oakwood Lakes Watershed

Parameters (mg/L) except where noted	5 Warmwater semi permanent fish life propagation	7 Immersion recreation	8 Limited contact recreation	9 Fish & wildlife propagation, recreation & stock watering	10 Irrigation
Fecal Coliform (per 100 mL) May 1 - Sept. 30		≤ 200 (mean) ≤ 400 (single sample)	≤ 1,000 (mean) ≤ 2,000 (single sample)		
Specific Conductivity (umhos/cm @ 25° C)				≤ 4,000 ¹ / 7,000 ²	≤ 2,500 ¹ / 4,375 ²
Total Ammonia Nitrogen as N	≤ result of the Equation ³				
Nitrogen, Nitrates as N				≤ 50 ¹ / 88 ²	
Dissolved oxygen	≥ 5.0	≥ 5.0	≥ 5.0		
pH (standard units)	≥ 6.5 to ≤ 9.0			≥ 6.0 to ≤ 9.5	
Suspended solids	≤ 90 ¹ / 158 ²				
Total dissolved solids				≤ 2,500 ¹ / 4,375 ²	
Temperature (°F)	≤ 90				
Note: ¹ 30-day average ² daily maximum ³ $(0.411 \div (1 + 10^{7.204 - \text{pH}}) + (58.4 \div (1 + 10^{\text{pH} - 7.204})))$ in accordance with ARSD 74:51:01, Appendix A, Equation 2					

RECREATIONAL USE

Oakwood Lakes State Park is situated among the three lakes and provides recreational activities such as fishing, swimming, boating, picnicking, camping, and hiking (Table 6). During the winter of 2000-2001 both East Oakwood Lake and West Oakwood Lake experienced a winterkill of fish. Severe winter kills occur in this chain of lakes approximately every 8 to 10 years. The 2004 State Fisheries Survey for East Oakwood Lake is located in Appendix A and the 2004 survey for West Oakwood Lake is located in Appendix B.

Table 6. Recreational Uses of Oakwood Lakes

Lake	Boat Ramp	Public Dock	Shore Fishing	Public Toilets	Swimming
East Oakwood	X		X		X
West Oakwood	X	X	X	X	X

THREATENED AND ENDANGERED SPECIES

Information from the South Dakota Natural Heritage Program (2004) and the USFWS (2004) were used to construct the following table (Table 7) of rare, threatened, and endangered species that may occur within the Oakwood Lakes watershed. The Whooping crane, American burying beetle, Dakota skipper, and Western prairie fringed orchid have historically been found to occur in Brookings County and could possibly still be in the area. The Bald eagle, Topeka shiner, Central mudminnow, Northern redbelly dace, and Northern redbelly snake are listed species that are commonly found within the area. However, none of these species were encountered during the study.

Table 7. Endangered, Threatened, and Candidate Species of the Oakwood Lakes Area

<i>Name</i>	<i>Scientific Name</i>	<i>Category</i>	<i>Status</i>		<i>Occurrence</i>
			<i>Federal</i>	<i>State</i>	
Whooping crane	<i>Grus americana</i>	Bird	FE	SE	Rare
Bald eagle	<i>Haliaeetus leucocephalus</i>	Bird	FT	SE	Common
Topeka shiner	<i>Notropis topeka</i>	Fish	FE		Common
Central mudminnow	<i>Umbra limi</i>	Fish		SR	Common
Northern redbelly dace	<i>Phoxinus eos</i>	Fish		ST	Common
American burying beetle	<i>Nicrophorus americanus</i>	Insect	FE	SR	Rare
Dakota skipper	<i>Hesperia dacotae</i>	Insect	FC	SR	Rare
Northern redbelly Snake	<i>Storeria occipitomaculata</i>	Reptile		SR	Common
Western prairie fringed orchid	<i>Plantanthera praeclara</i>	Plant	FT		Rare
KEY TO CODES:	FT= Federal Threatened				
FE= Federal Endangered	ST=State Threatened				
SE=State Endangered	FC=Federal Candidate				
	SR=State Rare				

PROJECT GOALS, OBJECTIVES, AND MILESTONES

GOALS

The goals of this assessment project were to:

- 1) Determine and document sources of impairments of the Oakwood Lakes portion of the North-Central Big Sioux River watershed
- 2) Identify feasible restoration alternatives to support watershed implementation projects to improve water quality within the watershed
- 3) Develop TMDLs based on identified pollutant impairments

Impairments cited in the 1998 and the 2000 305(b) Water Quality Assessment Report and the 1998 and 2002 South Dakota 303(d) Waterbody List for this portion of the BSR watershed are excessive nutrients, siltation, and noxious aquatic plants. In the 2004 and 2006 Integrated Report, both East Oakwood Lake and West Oakwood Lake are cited as impaired due to high TSI values.

Goals were accomplished through the collection of tributary and lake data in combination with the completion of the FLUX, BATHTUB, AnnAGNPS, and the Agricultural Non-Point Source (AGNPS) watershed modeling tools. Through data analysis and modeling, the identification of impairment sources was possible. The identification of these impairment sources will aid the State's non-point source (NPS) program by allowing strategic targeting of funds to portions of the watershed that will provide the greatest benefit per expenditure.

OBJECTIVES

Objective 1. Water Quality Assessment

Water sampling of five in-lake sites and five tributary (inlet/outlet) sites began in June 2001. Water samples were collected from tributary sites from June 2001 to October 2001 and from April 2002 to October 2002. Sampling of East Oakwood Lake occurred from July 2001 to October 2001 and from April 2002 to September 2002. Because they were added onto the project in the fall of 2003, Johnson Lake and Lake Tetonkaha were sampled from April 2004 to October 2004 (Table 8).

Detailed level and flow data were entered into a database that was used to assess the nutrient and solids loadings. Thalimedes hydrometers (OTTs) were installed at pre-selected monitoring sites along the tributaries and lake levels were monitored using previously established benchmarks.

Objective 2. Quality Assurance/ Quality Control (QA/QC)

Duplicate and blank samples consisted of ten percent of all samples and were collected during the course of the project to provide defensible proof that sample data were collected in a scientific and reproducible manner. QA/QC data collection began in June of 2001 and was completed on schedule in October of 2004 (Table 8).

Objective 3. Watershed Modeling

Four models were incorporated into this project to analyze and predict loadings. The FLUX model was used to calculate loadings and concentrations in monthly, yearly, and daily increments for the tributaries

(inlet/outlet) from sample concentration data and continuous flow records. The BATHTUB model was used to predict changes in water quality parameters related to eutrophication (i.e. phosphorus, nitrogen, chlorophyll-*a*, and transparency). Reductions of phosphorus and nitrogen watershed loading were modeled to generate an in-lake reduction curve. AGNPS was used to model feedlot runoff loads and to help pinpoint areas of concern. This model assessed the pollution potential of feedlots in the area based on animal numbers, condition of feedlot, proximity to water, soils, rainfall events, and topography. Model outputs included feedlot rating, chemical oxygen demand, and phosphorus loadings. The AnnAGNPS model is a more extensive variation of the AGNPS model and was used to simulate the transport of surface water, sediment, and nutrients through the watershed. The current condition of the watershed was modeled and used to compare the effects of implementing various conservation alternatives over time (Table 8).

Objective 4. Information and Outreach

Project updates were provided monthly to the EDWDD Board of Directors. Assessments of the condition of the animal feeding operations located within the project area were conducted by contacting landowners individually (Table 8).

Objective 5. Reporting/TMDL Determination

When a waterbody is listed on a state's 303(d) list, TMDLs must be developed for that waterbody at levels that meet water quality standards that support the designated beneficial uses, shown previously on page 7. A TMDL is a tool or target value that is based on the linkages between water quality conditions and point and non-point sources of pollution. Based upon these linkages, maximum allowable levels of pollution are allocated to the different sources of pollution so that water quality standards are attainable. Sources that exceed maximum allowable levels (or loadings), as shown on Table 5, must be addressed in an implementation plan that calls for management actions that reduce loadings (1998, 2002 303(d) Waterbody List and the 2004, 2006 SD Integrated Report). Furthermore, an implementation plan can call for protection of areas that are below allowable levels. Identifying the causes and sources of water quality impairments is a continuation of the process that placed the waterbody on the 303(d) list. In the case of the Oakwood Lakes watershed, the hypereutrophic state of these lakes, which is linked to excess nutrients, siltation, and noxious aquatic plants from the probable non-point sources identified in the 305(b) water quality assessment, guided the strategy for this assessment.

MILESTONES

The Oakwood Lakes Assessment Project was scheduled to start in October 2000. However, due to monitoring equipment needing to be purchased and additional staff needing to be hired, water quality monitoring was delayed until June of 2001. The following table shows the proposed completion dates versus the actual completion dates of the project goals, objectives, and activities.

Table 8. Milestones - Proposed and Actual Completion Dates

	2000			2001												2002												2003												2004												2005											
	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D												
Objective 1	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■										
Water Quality Assessment															■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■									
Objective 2																																																															
QA/QC																																																															
Objective 3																																																															
Landuse Assessment																																																															
Objective 4																																																															
Information and Outreach																																																															
Objective 5																																																															
Reporting/TMDL																																																															
Proposed Completion Dates																																																															
Actual completion Dates																																																															

METHODS

ENVIRONMENTAL INDICATORS

Water Quality Monitoring

Water samples were collected from five in-lake sites and five tributary sites. The samples were scheduled for collection to coincide with spring runoff, storm events, and during base flow conditions. A total of 154 samples were collected from June 2001 through October 2004. This included 124 standard samples, 15 blank standard samples, and 15 duplicate standard samples. An additional 27 chlorophyll-*a* samples were also collected (includes TPO4 and TDPO4).

A regular schedule of sampling occurred April through October of 2001 and again April through October of 2002 at sites T43, T44, T45, T46, T48, L1, and L2. During the summer of 2003, algae and chlorophyll-*a* sampling were completed on East Oakwood Lake as it had not been scheduled for completion during the 2001-2002 sampling period. In the fall of 2003, two more lakes were added to the project, Johnson Lake (L10) and Lake Tetonkaha (L11 and L12). With this sampling, supplementary water samples of total phosphorus and total dissolved phosphorus were collected for the analysis of the macrophyte and phytoplankton surveys in 2003, on East Oakwood Lake. Standard water quality samples, as well as extra TPO4 and TDPO4, were collected during phytoplankton sampling on Johnson Lake and Lake Tetonkaha during the summer of 2004. Aquatic plant sampling was completed on Johnson Lake and Lake Tetonkaha in 2004.

Field measurements included dissolved oxygen, pH, turbidity, air temperature, water temperature, conductivity, salinity, stage, benchmarks, and general climatic information. A Hanna Instruments 9025 meter was used to measure pH. Salinity, dissolved oxygen, water temperature, and conductivity were measured using a YSI 85 meter. Turbidity was measured using a LaMotte 2020 turbidity meter and a mercury thermometer was used to measure air temperature. Benchmarks were documented using a stadia rod and survey equipment. A Secchi disk was used to survey the water clarity of the lakes.

The Water Resource Institute (WRI) at South Dakota State University (SDSU), performed analysis on all samples collected from July 2001 to September 2002. This included total solids, total suspended solids (TSS), ammonia, nitrate-N, total Kjeldahl nitrogen, organic nitrogen, total phosphorus, and total dissolved phosphorous. The Sioux Falls Health Laboratory analyzed all fecal coliform bacteria samples collected in 2001 and 2002. All water quality samples collected in 2003 and 2004 were analyzed by the State Health Lab in Pierre, South Dakota. Appendix C contains the grab sample data for each monitoring site.

Both East Oakwood Lake and West Oakwood Lake were also monitored by the State of South Dakota as part of the SD DENR lake assessment monitoring program. However, the water quality data collected by the SD DENR was minimal. This data was not included in the analysis portion of this project because different sampling techniques were used. Table 9 depicts the SD DENR sites that coincided with EDWDD monitoring sites.

Table 9. Project Sites Coinciding with DENR Monitoring Locations

EDWDD Site	DENR Site	Lake
L1, L2	SWLAZZZ 9613	East Oakwood
L10	SWLAZZZ 9616	Johnson
L11, L12	SWLAZZZ 9615	Tetonkaha

Description of Parameters

Water quality was sampled according to the SD DENR protocols (Stueven et al. 2000). Water quality analyses by the WRI Lab, the Sioux Falls Health Lab, and the State Health Lab provided concentrations for a standard suite of parameters (Tables 10 and 11). The detection limits are set by the specific lab based on lab equipment sensitivity.

Table 10. Water Quality Parameters and Lab Detect Limits of the WRI Lab and the Sioux Falls Health Lab

Parameter	Abbreviation	Units	Lower Detect Limit
Total suspended solids	TSS	mg/L	1
Total solids	TotSol	mg/L	1
Nitrates	NO2NO3	mg/L	0.01
Ammonia-nitrogen	NH3N	mg/L	0.01
Organic nitrogen	OrgNtr	mg/L	0.01
TKN	TKN	mg/L	0.01
Total phosphorus	TPO4	mg/L	0.01
Total dissolved phosphorus	TDPO4	mg/L	0.01
Fecal Coliform*	Fecal	cfu/100 mL	<1, <10, <100

* tested by Sioux Falls Health Lab

Table 11. Water Quality Parameters and Lab Detect Limits for the State Health Lab

Parameter	Abbreviation	Units	Lower Detect Limit
Alkalinity-M	Alk-M	mg/L	< 6.0
Alkalinity-P	Alk-P	mg/L	0
Total suspended solids	TSS	mg/L	< 1.0
Total solids	TotSol	mg/L	< 7.0
Volatile Total Suspended Solids	VTSS	mg/L	< 1.0
Nitrates	NO2NO3	mg/L	< 0.1
Ammonia-nitrogen	NH3N	mg/L	< 0.02
TKN	TKN	mg/L	< 0.11
Total phosphorus	TPO4	mg/L	< 0.002
Total dissolved phosphorus	TDPO4	mg/L	< 0.003
Fecal coliform bacteria	Fecal	count/100 mL	< 10.0
E coli	Ecoli	mpn/100 mL	< 1.0

Alkalinity

Alkalinity is a measure of the buffering capacity of water, or the capacity of water to neutralize acid. Alkalinity does not refer to pH, but instead refers to the ability of water to resist change in pH. Waters with low alkalinity are very susceptible to changes in pH. Waters with high alkalinity are able to resist major changes in pH. Lakes with high alkalinity have high pH values while lakes with low alkalinity have low pH values. The hardness of the water is usually determined by the amount of calcium and magnesium salts present in water and is associated with the presence of carbonates. Hard water lakes are generally more productive than soft water lakes and can accept more input of salts, nutrients, and acids to their system without change than can soft water lakes. The range of pH values associated with M-alkalinity (methyl orange indicator) is 4.2 to 4.5. The range of pH values associated with P-alkalinity (phenolphthalein indicator) is 8.2 to 8.5.

Total Suspended Solids

TSS is the portion of total solids that are suspended in solution, whereas dissolved solids make up the rest of the total. Suspended solids include silt and clay particles, plankton, algae, fine organic debris, and other particulate matter. Higher TSS can increase surface water temperature and decrease water clarity. Suspended solids are the materials that do not pass through a filter, e.g. sediment and algae. Subtracting suspended solids from total solids derives total dissolved solids concentrations. Suspended volatile solids are that portion of suspended solids that are organic (organic matter that burns in a 500° C muffle furnace).

Total Solids

Total Solids are materials, suspended or dissolved, present in natural water. Sources of total solids include industrial discharges, sewage, fertilizers, road runoff, and soil erosion.

Volatile Total Suspended Solids

Volatile solids are those solids lost on ignition (heating to 500 degrees C.) They are useful to the treatment plant operator because they give a rough approximation of the amount of organic matter present in the solid fraction of wastewater, activated sludge and industrial wastes. Volatile solids measure the sediments which are able to be burned off of a dried sediment sample. Volatile solids are those solids lost on ignition (heating to 500 degrees C.) They are useful because they give a rough approximation of the amount of organic matter present in the water sample. “Fixed solids” is the term applied to the residue of total, suspended, or dissolved solids after heating to dryness for a specified time at a specified temperature. The weight loss on ignition is called “volatile solids.”

Nitrate-Nitrite

Nitrate and nitrite are inorganic forms of nitrogen easily assimilated by algae and other macrophytes. Sources of nitrate and nitrite can be from agricultural practices and direct input from septic tanks, precipitation, groundwater, and from decaying organic matter. Nitrate-nitrite can also be converted from ammonia through denitrification by bacteria. The process increases with increasing temperature and decreasing pH.

Ammonia

Ammonia is the nitrogen product of bacterial decomposition of organic matter and is the form of nitrogen most readily available to plants for uptake and growth. Sources of ammonia in the watershed may come from animal feeding areas, decaying organic matter, bacterial conversion of other nitrogen compounds, or industrial and municipal surface water discharges.

Total Ammonia Nitrogen as N

Ammonia nitrogen is present in surface and ground water supplies. Ammonia nitrogen is a dissolved inorganic form of nitrogen. This nitrogen associated with ammonia is a nutrient for algae and macrophytes. High levels may indicate excessive algae growth, macrophyte growth, and/or presence of sanitary waste, and can be detrimental to aquatic life.

Total Kjeldahl Nitrogen

Total Kjeldahl Nitrogen (TKN) is used to calculate organic nitrogen. TKN minus ammonia derives organic nitrogen. Sources of organic nitrogen can include release from dead or decaying organic matter, septic systems or agricultural waste. Organic nitrogen is broken down to more usable ammonia and other forms of inorganic nitrogen by bacteria.

Total Nitrogen

Total nitrogen is the sum of nitrate-nitrite and TKN concentrations. Total nitrogen is used mostly in determining the limiting nutrient, either nitrogen or phosphorus. Nitrogen was analyzed in four forms: nitrate/ nitrite, ammonia, and Total Kjeldahl Nitrogen (TKN). From these four forms, total, organic, and inorganic nitrogen may be calculated. Nitrate and nitrite levels are usually caused from fertilizer application runoff. High ammonia concentrations are directly related to sewage and fecal runoff. Nitrogen is difficult to manage because it is highly soluble and very mobile in water.

Total Phosphorus

Phosphorus differs from nitrogen in that it is not as water-soluble and will attach to fine sediments and other substrates. Once attached, it is less available for uptake and utilization. Phosphorus can be natural from geology and soil, from decaying organic matter, waste from septic tanks or agricultural runoff. Nutrients such as phosphorus and nitrogen tend to accumulate during low flows because they are associated with fine particles whose transport is dependent upon discharge (Allan 1995). These nutrients are also retained and released on stream banks and floodplains within the watershed. Phosphorus will remain in the sediments unless released by increased stage, discharge, or current.

Total Dissolved Phosphorus

Total dissolved phosphorus is the fraction of total phosphorus that is readily available for use by algae. Dissolved phosphorus will attach to suspended materials if they are present in the water column and if they are not already saturated with phosphorus. Dissolved phosphorus is readily available to algae for uptake and growth.

Fecal Coliform Bacteria

Fecal coliform are bacteria that are found in the environment and are used as indicators of possible sewage contamination because they are commonly found in human and animal feces. They indicate the possible presence of pathogenic bacteria, viruses, and protozoans that also live in human and animal digestive systems. These bacteria can enter the river and tributaries by runoff from feedlots, pastures, sewage treatment plants, and seepage from septic tanks.

E. Coli

Escherichia coli is a type of fecal coliform bacteria that is found in the intestines of healthy humans and animals. The presence of *E. coli* in water is a strong indication of recent sewage or animal waste contamination, which may contain disease causing organisms.

Dissolved Oxygen

Dissolved oxygen is important for the growth and reproduction of fish and other aquatic life. Solubility of oxygen generally increases as temperature decreases, and decreases with lowering atmospheric pressure. Stream morphology, turbulence, and flow can also have an affect on oxygen concentrations. Dissolved oxygen concentrations are not uniform within or between stream reaches. A stream with running water will contain more dissolved oxygen than still water. Cold water holds more oxygen than warm water. Dissolved oxygen levels of at least 4-5 mg/L are needed to support a wide variety of aquatic life. Very few species can exist at levels below 3 mg/L.

pH

pH is based on a scale from 0 to 14. On this scale, 0 is the most acidic value, 14 is the most alkaline value, and 7 represents neutral. A change of 1 pH unit represents a 10-fold change in acidity or alkalinity. The range of freshwater is 2-12. pH is a measure of hydrogen ion activity, the more free hydrogen ions (more acidic), the lower the pH in water. Values outside the standard (pH 6.0 – 9.5) do not meet water quality standards.

Water Temperature

Water temperature affects aquatic productivity and water chemistry, including the levels of DO and un-ionized ammonia. Temperature extremes are especially important in determining productivity of aquatic life from algae to fish.

Conductivity

Conductivity is the measurement of the conductive material in the sample without regard to temperature. In streams and rivers, conductivity is affected primarily by the geology of the area through which the water flows. Streams that run through areas with granite bedrock tend to have lower conductivity, and areas with clay soils tend to have higher conductivity. In lakes, geology of the watershed establishes the ranges of conductivity. In general, a higher conductivity indicates that more material is dissolved material, which may contain more contaminants.

Specific Conductivity

Also known as temperature compensated conductivity which automatically adjusts the reading to a calculated value which would have been read if the sample had been at 25° C. The ability of water to conduct an electrical current, which is the measure of the quantity of ions in the water. It is determined by the presence of inorganic dissolved solids, such as salts. Specific conductivity is generally found to be a good measure of the concentration of total dissolved solids (TDS) and salinity.

Salinity

Salinity is the natural concentration of salts in water. This is influenced by the geologic formations underlying the area. Salinity is lower in areas underlain by igneous formations and higher in areas underlain by sedimentary formations.

Turbidity (NTU)

Turbidity or water clarity is a measure of how much the passage of light is restricted by suspended particles. Turbidity is measured in nephelometric turbidity units (NTUs). High NTU levels may increase temperatures; lower dissolved oxygen levels, and reduce photosynthesis. High NTU levels can clog fish gills, which lowers growth rate and resistance to disease; and it can smother fish eggs and macro invertebrates. Sources of turbidity include soil erosion, waste discharge, urban runoff, eroding stream banks, and excessive algae growth.

Secchi Disk

A Secchi disk is a flat, with black and white alternating quadrants that used to measure the transparency of water. The disk is lowered into water by a rope until the pattern on the disk is no longer visible. The deeper the measurement, the clearer the water.

Water Quality Sampling

Water quality was sampled in accordance with the SD DENR Water Resource Assistance Program protocols (Stueven et al. 2000). Samples were filtered and preserved as appropriate and then packed in ice for delivery to its destination for analysis. Stream, climatic, and weather conditions were also recorded at the time of sampling. See Appendix D for water quality field data sheet.

Tributary (inlet/outlet) Sampling

Water quality samples were collected between the spring of 2001 and the fall of 2002, during base flows and storm events. The Water Resource Institute at South Dakota State University in Brookings, South Dakota performed the analysis of total solids, total suspended solids, ammonia, nitrate-N, total Kjeldahl nitrogen, organic nitrogen, total phosphorus, and total dissolved phosphorus. The Sioux Falls Health Laboratory in Sioux Falls, South Dakota analyzed all fecal coliform bacteria samples.

In-Lake Sampling

East Oakwood Lake Samples were collected between the spring of 2001 and the fall of 2002. Samples were collected at the surface and one meter from the bottom using a Van Dorn sampler. Water samples were delivered to the WRI Lab at SDSU in Brookings, South Dakota for analysis. In 2003, a column sampler was used to collect total phosphorus and total dissolved phosphorus samples from East Oakwood Lake. These samples were delivered to the State Health Laboratory in Pierre, South Dakota for analysis. With the addition of West Oakwood Lake in the fall of 2003, water samples were collected from Johnson Lake and Lake Tetonkaha in 2004. These samples were collected using a column sampler and were also sent to the State Health Laboratory in Pierre, South Dakota for analysis (Table 12).

Table 12. Sampling Years and Laboratories that Processed the Samples

	2001*	2002*	2003**	2004**
Tributary	X	X		
East Oakwood Lake	X	X	TPO4 & TDPO4	
Tetonkaha Lake				X
Johnson Lake				X
Laboratory	WRI	WRI	SHL	SHL
WRI = Water Resource Institute		* Van Dorn Sampler used		
SHL = State Health Lab		** Column Sampler used		

Biological Monitoring (Tributaries)

Macroinvertebrate Sampling

Sampling of macroinvertebrates with cone and flat rock baskets occurred in the tributaries sites from late August to mid October of 2002. Four baskets were placed at each site for a period of 45 days \pm 3 days

(Table 13). Construction, deployment, and retrieval of rock baskets were conducted according to the SD DENR protocols (Stueven et al. 2000). Sorting, identification, and enumeration of macroinvertebrates occurred at the lowest practical taxonomic level (See Appendix E for outsource contracts and laboratory procedures). Three of the four baskets, at each site, were chosen for collection and were composited into a voucher jar. Candidate metrics were calculated for the entire North-Central Big Sioux River watershed and reduced to a set of core metrics for site by site scoring.

Table 13. Deployment and Retrieval Dates for Rock Baskets by Site

Site	Site Name	Method	Deployment	Retrieval	# Days
			Date	Date	Colonized
T43	East Oakwood Lake Trib 1		-----DRY-----		
T44	East Oakwood Lake Trib 2	Cone	8/28/2002	10/10/2002	44
T45	East Oakwood Lake Outlet 1	Flat	8/28/2002	10/10/2002	44
T46	East Oakwood Lake Outlet 2	Flat	8/29/2002	10/11/2002	44
T48	E. Oakwood Lake Inlet 3	Cone	8/29/2002	10/11/2002	44

Macroinvertebrate Index of Biological Integrity (IBI)

A macroinvertebrate IBI was previously established by EDWDD during the North-Central Big Sioux River Watershed Assessment Project. Those same methods were applied to this project as there are currently no established reference sites for data comparison. The following steps were taken in developing an index score for each site

Candidate metrics were chosen to represent the categories of abundance richness, composition, tolerance/intolerance, and feeding (Table 14). The EPA Rapid Bioassessment Protocols for Use in Streams and Rivers aided in developing these procedures (Barbour et al. 1999). Core metrics were then chosen in each category through a process of comparative descriptive analysis (Table 15). The basis of this selection was the ability of each metric to discriminate between sites least impacted and sites most impacted. Comparative descriptive analysis was done using box and whisker plots, analyzing all data from all the monitoring sites at the same time for each of the five categories (abundance, richness, composition, tolerance, and feeding). Box plots that yielded a good spread and differing means were chosen as metrics in each category. Coefficients of variation (CVs) were found by dividing the standard deviation (SD) by the mean. CVs also aided in the selection of the core metrics.

Table 14. Candidate Macroinvertebrate Metrics Calculated for the NCBSRWA

Category	#	Metric	Response to Disturbance
Abundance Measures	1	Abundance	Decrease
	2	Corrected Abundance	Variable
	3	EPT Abundance	Decrease
Richness Measures	4	Total No. Taxa	Decrease
	5	Number of EPT Taxa	Decrease
	6	Number of Ephemeroptera Taxa	Decrease
	7	Number of Trichoptera Taxa	Decrease
	8	Number of Plecoptera Taxa	Decrease
	9	Number of Diptera Taxa	Decrease
	10	Number of Chironomidae Taxa	Decrease
Composition Measures	11	Ratio EPT/Chironomidae Abundance	Decrease
	12	% EPT	Decrease
	13	% Ephemeroptera	Decrease
	14	% Plecoptera	Decrease
	15	% Trichoptera	Decrease
	16	% Coleoptera	Decrease
	17	% Diptera	Increase
	18	% Oligochaeta	Variable
	19	% Baetidae	Increase
	20	% Hydropsychidae	Increase
	21	% Chironomidae	Increase
	22	% Gastropoda	Decrease
	23	Shannon-Weiner Index	Decrease
Tolerance/Intolerance Measures	24	Number of Intolerant Taxa	Decrease
	25	% Intolerant Organisms	Decrease
	26	Number of Tolerant Taxa	Increase
	27	% Tolerant Organisms	Increase
	28	% Burrowers	Increase
	29	% Chironimidae + Olgochaeta	Increase
	30	Hilsenhoff Biotic Index	Increase
	31	% Dominant Taxon	Increase
	32	% Hydropsychidae to Trichoptera	Increase
	33	% Baetidae to Ephemeroptera	Increase
Feeding Measures	34	% individuals as Gatherers and filterers	Decrease
	35	% Gatherers	Decrease
	36	% Filterers	Increase
	37	% Shredders	Decrease
	38	% Scrapers	Decrease
	39	Ratio Scrapers/(Scrapers+Filterers)	Decrease
	40	Number of Gatherer Taxa	Decrease
	41	Number of Filterer Taxa	Decrease
	42	Number of Shredder Taxa	Decrease
	43	Number of Scraper Taxa	Decrease
	44	Individuals as Clingers	Decrease
	45	Number of Clinger Taxa	Decrease
	46	% Clingers	Decrease
	47	Number of Predator Organisms	Variable
	48	Number of Predator Taxa	Variable
	49	% Predators	Variable

Table 15. Core Macroinvertebrate Metrics Calculated for the BSR and Tributaries in the NCBSRW

Category	#	Metric	Response to Disturbance
Abundance Measures	1	Abundance	Decrease
Richness Measures	2	Total Number of Taxa	Decrease
	3	Number of EPT Taxa	Decrease
	4	Number of Diptera Taxa	Decrease
Composition Measures	5	% EPT	Decrease
	6	% Diptera	Increase
	7	% Chironomidae	Increase
Tolerance/Intolerance Measures	8	% Tolerant Organisms	Increase
	9	% Chironomidae + Oligochaeta	Increase
	10	% Hydropsychidae/Trichoptera	Increase
Feeding Measures	11	% Gatherers	Decrease
	12	% Filterers	Increase
	13	% Clingers	Decrease

Once the core metrics in Table 23 were chosen, best value percentiles were calculated. The 95th percentile was used as a basis for best value for those metrics that decreased with impairment. Those metrics that increased with impairment were given a 5th percentile as a basis for best value. Once either the 95th or 5th percentile standard was set for each metric, the actual measured metric value was compared to the standard best value to find the standardized metric score. Standardized metric scores range from 0 to 100, with 0 being very poor and 100 being excellent.

Decrease in response to impairment:

$$\text{measured metric value} \div (\text{standard best value} - 0) \times 100 = \text{standardized metric score}$$

Increase in response to impairment:

$$(100 - \text{measured metric value}) \div (100 - \text{standard best value}) \times 100 = \text{standardized metric score}$$

After each of the core metrics were scored, the standardized metric scores were averaged for each monitoring site and served as the final index value for that site.

Biological Monitoring (Lakes)

Algae Sampling

In-lake algae sampling occurred once in mid-June and once in mid-August during the regularly scheduled water quality sampling. Samples from East Oakwood Lake were collected during the summer of 2003 and samples from West Oakwood Lake (Johnson Lake and Lake Tetonkaha) were collected during the summer of 2004. A surface water sample was collected at a depth of approximately one meter at three different locations on each lake, to include the established monitoring sites. The three samples were equally combined into one overall sample and then preserved with Lugol's iodine. Samples from each of the three lakes were collected and shipped to the SD DENR for analysis. Algae sampling was conducted according to SD DENR protocols (Stueven et al. 2000).

Chlorophyll-*a* Sampling

Chlorophyll-*a* was sampled at each monitoring location on each lake. Sampling occurred once per month in April, May and September, and twice per month (every other week) in June, July, and August, during the regularly scheduled water quality sampling. However, in June, July, and August, when chlorophyll-*a* sampling did not correspond with regular water quality sampling, the sampling also included chlorophyll-*a*, total phosphorus, total dissolved phosphorus, water temperature, Secchi depth, turbidity, pH, dissolved oxygen, salinity, conductivity, specific conductivity, and air temperature. At each location, a column sampler was used to collect the sample which was stored in a light impenetrable brown bottle. The sample was filtered using a 1.0 micron glass fiber filter with the volume of sample annotated. The filter containing the chlorophyll-*a* sample was wrapped in aluminum foil, placed on ice, and shipped to the SD DENR in Pierre, South Dakota for analysis. Chlorophyll-*a* was sampled according to the SD DENR protocols (Stueven et al. 2000). Two of the three lakes (East Oakwood Lake and Lake Tetonkaha) were also monitored for chlorophyll-*a* by the state of South Dakota as part of the SD DENR assessment monitoring program. The SD DENR sampled East Oakwood Lake twice during the summer of 2002 and Lake Tetonkaha twice during the summers of 2000 and 2004.

Aquatic Plant Sampling

Aquatic plants were surveyed in East Oakwood Lake, Johnson Lake, and Lake Tetonkaha. East Oakwood Lake was surveyed from July 31 to August 8, 2003. The shoreline was divided into 29 transects (Figure 6). A survey was conducted on Lake Tetonkaha and Johnson Lake from July 28 to August 13, 2004. The shoreline of Johnson Lake was divided into 20 transects and the shoreline of Lake Tetonkaha was divided into 29 transects (Figures 7 and 8). A buoy attached to a 100 m floating rope, marked in 10 m increments, was used to sample each transect. One end of the rope was staked to the shoreline, and the other end was attached to an anchored buoy which was positioned perpendicular to the shoreline. Lake depth was annotated at the buoy and also at each 10 m increment that was sampled. Starting at the 10 m increment closest to the shoreline, a vegetation rake was cast from the boat in four directions (north, south, east, and west) and slowly retrieved. After each cast, vegetation caught in the tines was identified and recorded. This process was repeated at successive 10 m increments until no vegetation in any of the four directions was documented. A sample of each species was kept and later taken to Dr. Gary Larson at SDSU for verification. Other data recorded included GPS coordinates, identifying transect features on map, date, time, bank stability, shoreline vegetation, riparian zone width, and Secchi depth.

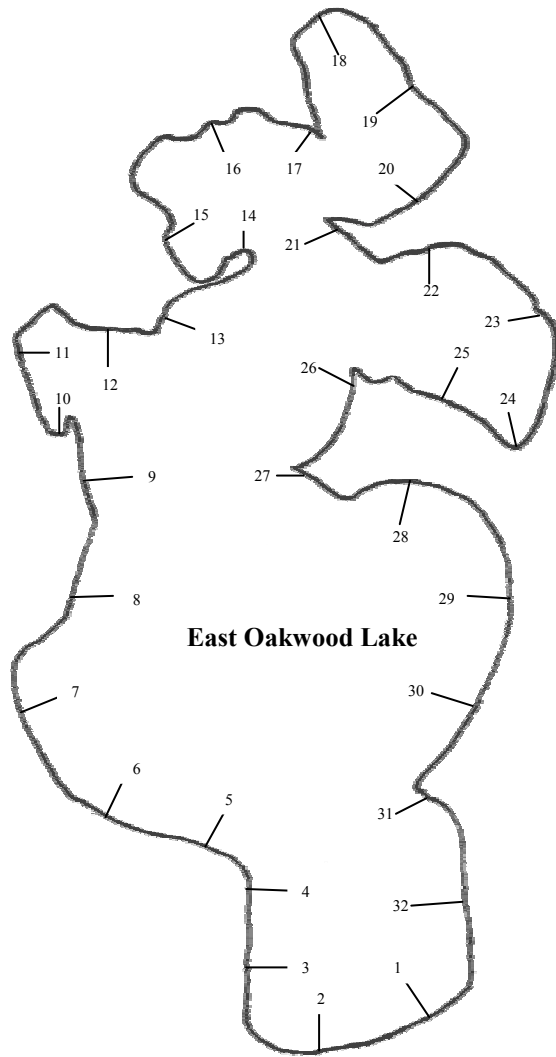


Figure 6. Diagram of the East Oakwood Lake Vegetation Sampling Transects

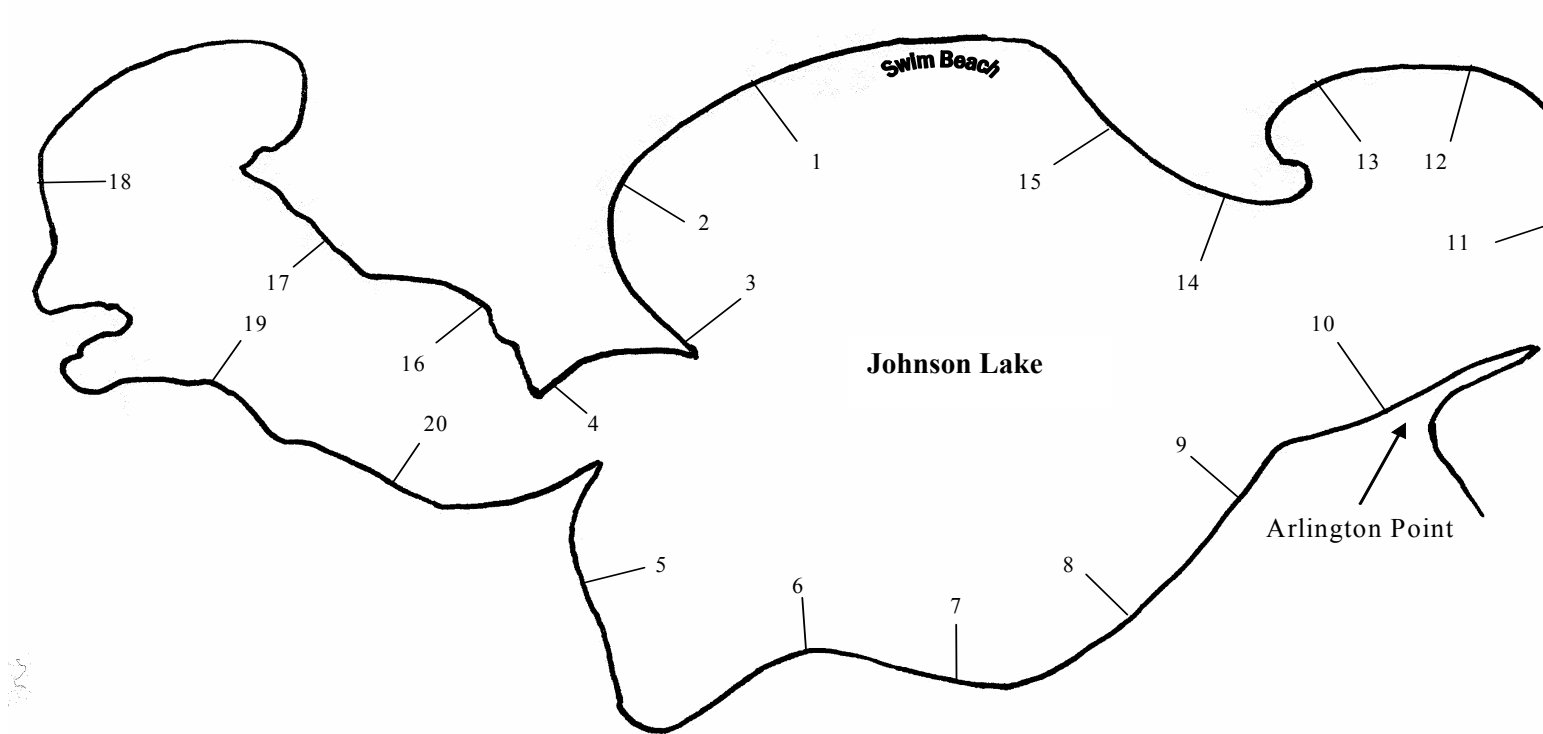


Figure 7. Diagram of the Johnson Lake Vegetation Sampling Transects

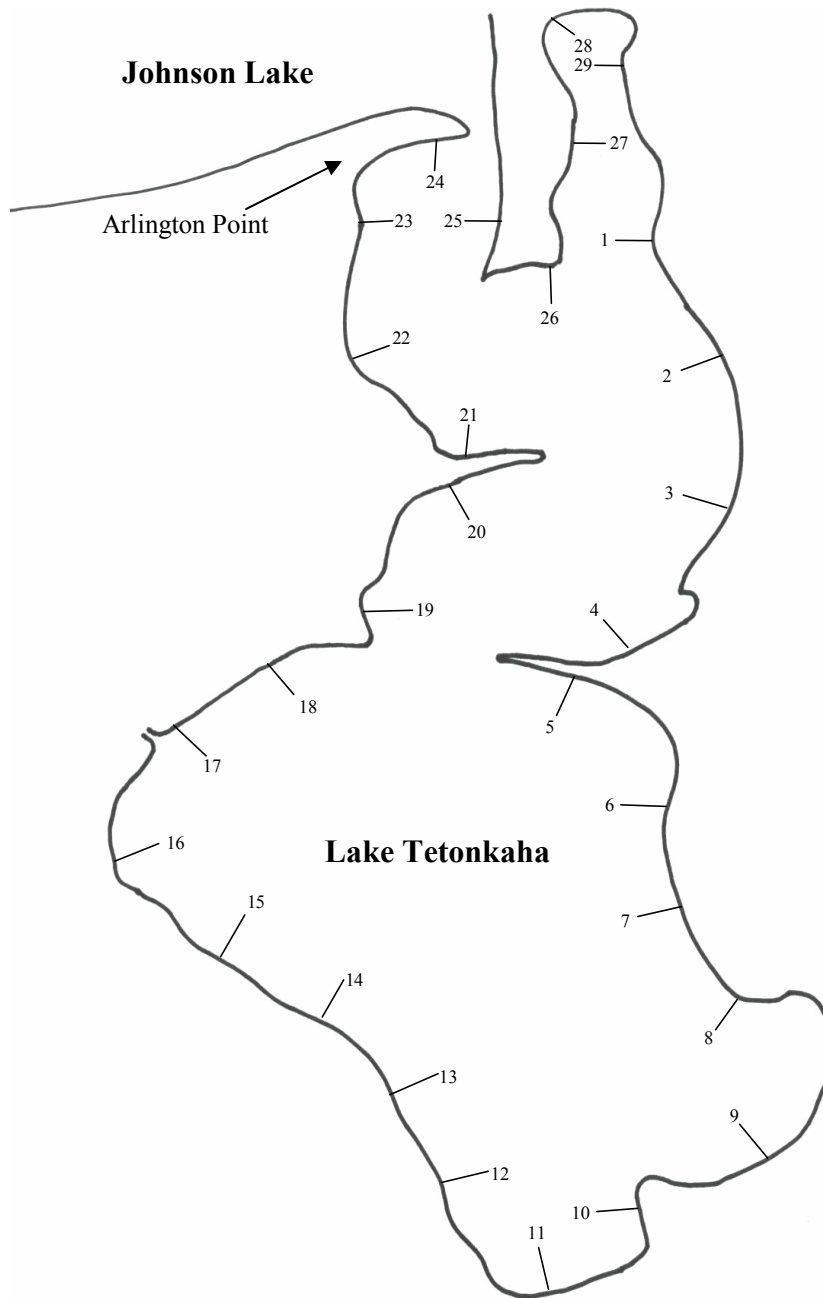


Figure 8. Diagram of Lake Tetonkaha Vegetation Sampling Transects

Hydrologic Monitoring

Tributary

Five tributary monitoring sites were selected among the inlets and outlets of the lakes in the watershed and continuous stream flow records were collected using flow meters. Two inlet sites (T48 and T43) and three outlet sites (T44, T45, and T46) were selected to determine which portions of the watershed were contributing the greatest amount of nutrient and sediment loads to the lakes. Each tributary site was equipped with a Thalimedes OTT hydrometer (Table 16) and water stages were monitored and recorded to the nearest 1/100th of a foot.

Table 16. Stage Recorder Start and End Dates

Site	Site Name	Start Date	End Date	Recorder Type
T43	East Oakwood Lake Trib 1	05/29/01	10/30/01	OTT Thalimedes Hydrometer
		04/05/01	10/31/02	OTT Thalimedes Hydrometer
T44	East Oakwood Lake Trib 2	06/01/01	10/30/01	OTT Thalimedes Hydrometer
		04/05/02	10/31/02	OTT Thalimedes Hydrometer
T45	East Oakwood Lake Outlet 1	05/29/01	10/30/01	OTT Thalimedes Hydrometer
		04/05/02	10/31/02	OTT Thalimedes Hydrometer
T46	East Oakwood Lake Outlet 2	05/29/01	10/30/01	OTT Thalimedes Hydrometer
		04/05/02	10/31/02	OTT Thalimedes Hydrometer
T48	E. Oakwood Lake Inlet #3	05/31/01	10/30/01	OTT Thalimedes Hydrometer
		04/05/02	10/31/02	OTT Thalimedes Hydrometer

A USGS top setting wading rod with a pygmy current meter and a CMD 9000 digimeter were used to determine flows at various stages. Each tributary site was also installed with a USGS Style C staff gauge as a quality control check for the installed meters. Recorded stages and flows were used to create stage-discharge tables and curves for each tributary (Gorden et al. 1992). Stage-discharge tables, curves, and equations can be found in the Results Section.

In-Lake

Hydrologic monitoring of each lake consisted of tracking lake levels using existing benchmarks established by the SD DENR, Water Rights Program. A location description of each benchmark is shown in Table 17.

Table 17. Oakwood Lakes Benchmark Locations

Waterbody	Location
East Oakwood Lake	Located in the NW Section 8 T111N-R51W, approximately 0.80 mile into the State Park, on the south side of the curve in the road, 1' east of the OHWM sign, a standard OHWM disk
Lake Tetonkaha	Located in the NW Section 8 T111N-R51W, approximately 0.80 mile into the State Park, on the south side of the curve in the road, 1' east of the OHWM sign, a standard OHWM disk
Johnson Lake	Located in the NE of Section 6 T111N-R51W, on road to the picnic grounds between Mortimer Slough and West Oakwood Lakes, in the northwest part of the park on the northeast side of the parking area, 1' west of the OHWM sign, standard OHWM disk

Hydrologic Budgets

The hydrologic budget estimates how much water entered and exited the lake during the study period. All inputs of water must equal all outputs of water in a hydrologic cycle. However monitoring all possible inputs of water to a lake is very difficult. Thus, an estimate of water load to the lake is necessary to balance the equation.

The hydrologic inputs to East Oakwood Lake and West Oakwood Lake come from sources to include precipitation, tributary runoff, and groundwater. Water quality data from tributary runoff was collected from July 2001 to September 2002. Estimates of tributary runoff were calculated using the results of the FLUX modeling. Rainfall for the year 2003 was collected from the Brookings, South Dakota field station and used to calculate precipitation inflows. The following equations were used to determine the inputs for the hydrologic budget:

Precipitation:

$$\text{amount of precipitation (feet)} \times \text{surface area of the lake} = \text{precipitation inflow}$$

Groundwater:

$$\text{outflows} - \text{inflows} = \text{groundwater inflow}$$

The hydrologic outputs come from sources such as evaporation, advective flow, and change in storage. East Oakwood Lake water quality data was collected from July 2001 to September 2003. Evaporation data was measured from the nearest weather station which is located two miles north of Brookings, South Dakota. The following equations were used to find the outputs of the hydrologic budget:

Evaporation:

$$\text{amount of evaporation (feet)} \times \text{surface area of the lake} = \text{evaporation volume}$$

Change In Storage:

$$\text{first benchmark reading} - \text{last benchmark reading} = \text{change in storage}$$

$$\text{change in storage} \times \text{surface area of the lake} = \text{change in storage}$$

TSI Computation

Carlson's (1977) Trophic State Index was used to quantify the trophic condition of each lake. In-lake data for chlorophyll-*a* and Secchi depth was applied to Carlson's equations. The formulas used are below:

$$\text{TSI (Chlorophyll-}a\text{)} = 10 \times (6 - ((2.04 - (0.68 (\text{LN} (\text{CHL})))) / (\text{LN} 2)))$$

$$\text{TSI (Secchi Disk)} = 10 \times (6 - (\text{LN} \text{SD}) / (\text{LN} 2))$$

CHL = Chlorophyll-*a* in mg/m³

SD = Secchi depth in meters

TSI values typically range from 0 to 100, indicating increasing productivity as the index score increases.

QUALITY ASSURANCE AND DATA MANAGEMENT

Approximately 10 percent of the water samples were collected for quality assurance/quality control purposes in accordance with South Dakota's EPA approved Non-point Source Quality Assurance/Quality Control Plan. A total of 154 water samples were collected from nine monitoring sites. There were a total of 30 QA/QC samples consisting of 15 duplicates and 15 blanks.

QA/QC results were entered into a computer database and screened for data errors. Overall, the duplicates produced very similar results to the sample itself, with the exception of fecal coliform counts, TSS, ammonia, and nitrate-nitrite. Variations among duplicate bacteria samples may have occurred because of bacteria variability. Differences in the results from 2001-2002 containing nitrogen (nitrate-nitrite, organic nitrogen, TKN) may be attributed to the use of reverse osmosis water for cleaning and filtering and also due to faulty lab equipment used by the WRI lab in the analysis. Unfortunately, the WRI lab director was unable to come up with a correction factor due to the randomness of the errors. A copy of WRI lab director's memo is located in Appendix F.

Field blanks did register a few detectable limits of nutrients and sediments. The sediment detects may be due to inadequate rinsing of bottles or the quality of rinsing water. Sources of the nitrogen problems may have been the quality of the rinsing water, but more likely due to faulty lab equipment used for the analysis. See Appendix G for field duplicates and blanks.

ASSESSMENT OF SOURCES

Point Sources

Wastewater Treatment Facilities (NPDES)

There were no NPDES facilities identified in this watershed.

Non Point Sources

Agricultural Runoff

Agricultural runoff was taken into account when the AnnAGNPS model calculated landuse scenarios for sediment and nutrient reductions, and also when AGNPS was used to perform ratings on the feedlots in the study area. This information was then incorporated as part of the process of prioritizing watershed areas for fecal reduction.

Background Wildlife Contribution

As part of the background contribution of fecal coliform bacteria, wildlife was taken into consideration. A general estimate of wildlife fecal coliform bacteria loading was derived from assessing total deer contributions. Deer are the largest of the wild animals occupying the study area and factual information was readily available about this animal. Using 2002 deer population numbers (Huxoll 2002) for Brookings County, estimates of deer per square mile were calculated. Two monitoring site locations were used to calculate this contribution. They were chosen because neither site was influenced by any other monitoring locations within the study area (See the Results Section).

The average deer per square mile was multiplied by the square miles of the township the monitoring sites (T43 and T45) were located in, giving number of deer per township.

$$\text{deer/square mile} \times \text{square miles/township} = \text{deer/township}$$

Then the number of deer per township was multiplied by the number of days monitored and then multiplied by the CFU/deer/day (MPCA 2002) to calculate total CFU's per township from deer.

$$\text{deer/township} \times \# \text{ monitoring days} \times \text{CFU/deer/day} = \text{CFU's per township (from deer)}$$

To determine the percent deer contribution of fecal coliform bacteria, CFU's per township per deer were divided by the total CFU's monitored, multiplied by 100.

$$[\text{CFU's per township} \div \text{CFU's monitored}] \times 100 = \% \text{ deer contribution of fecal coliform bacteria}$$

Failing Septic Systems Contribution

As part of the background contribution from fecal coliform bacteria, rural households were assessed for their contribution of the total fecal concentration in the watershed. The average number of people per household (MPCA 2002) was multiplied by the number of rural and seasonal households within the watershed. This provided an estimate of the number of people living in the watershed area. According to the US EPA (2002) failure rates of onsite septic systems range from 10 to 20 percent, with the majority of these failures occurring with systems 30 or more years old. Due to this fact, 20 percent of the households within the vicinity of each monitoring site were used to figure septic contribution. The average number of people per household (MPCA 2002) was multiplied by 20 percent of the total number of households within the watershed. This represented the number maximum number of people that may be contributing to the fecal coliform bacteria load.

$$\text{average number of people per household} \times \# \text{ of households (20\%)} = \text{total number of people}$$

Then the total number of people was multiplied by the number of days monitored and then multiplied by the CFU/person/day to calculate total CFU's per monitored site being contributed by failing septic.

$$\text{total number of people per area} \times \# \text{ monitoring days} \times \text{CFU/people/day} = \text{CFU's per area (from people)}$$

To determine the percent of fecal coliform bacteria contributed by failing septic, CFU's per area (from people) were divided by the total CFU's monitored in the stream and then multiplied by 100 to find a percent of septic contribution.

$$[\text{CFU's per area} \div \text{CFU's monitored}] \times 100 = \% \text{ septic system contribution of fecal coliform bacteria}$$

Modeling

Five basic modeling and assessment techniques (FLUX, BATHTUB, AGNPS, AnnAGNPS, and FDI) were used to analyze the data for this assessment project (Table 18). Each technique generates an independent set of information and is described below in further detail.

Table 18. Modeling and Assessment Techniques and Outputs

Modeling Techniques	Outputs
FLUX Model	Loadings for WQ Parameters Concentrations for WQ Parameters
BATHTUB Model	Trophic State Index (TSI) Values Reduction Response Model
AGNPS	Total Phosphorus and Nitrogen Chemical Oxygen Demand (COD) Feedlot Rating
AnnAGNPS	Phosphorus Yield (attached & soluble) Nitrogen Yield (attached & soluble) Sediment Yield
Flow Duration Interval	Hydrologic Condition Targets and Loads Load Reductions by Flow Regime

FLUX Model

Total nutrient and sediment loads were calculated using the Army Corps of Engineers Eutrophication Model known as FLUX (Walker 1999). FLUX uses individual sample data in correlation with daily discharges to develop six loading calculations. For each monitoring site, loads and concentrations of total suspended solids, as well as water quality parameters were calculated by the model. The FLUX model uses data obtained from 1) grab-sample water quality concentrations with an instantaneous flow and 2) continuous flow records. Loadings and concentrations were calculated by month and stratified into low and high flows. Coefficients of variation (CV) were used to determine what method of calculation was appropriate for each parameter at each site (Results Section). Each water quality parameter was computed by site as daily, monthly and yearly concentrations and loadings. See Appendix H for monthly concentrations by site, and Appendix I for monthly loadings by site.

Water quality, sampled according to Stueven et al. (2000), was analyzed at South Dakota State University, Water Quality Laboratory and the State Health Laboratory. Water quality analyses provided concentrations for a standard suite of parameters previously mentioned. Continuous streamflow records for tributary sites were derived using stage records and stage-discharge curves (Appendix J).

BATHTUB Model

The BATHTUB model was used to predict in-lake responses to tributary loadings. Input data for the model consisted of general lake morphology, tributary loading data, and current in-lake water quality. Tributary loading data was calculated for the inlets of the lake using average water quality results. The BATHTUB model is predictive in that it will assess impacts of changes in water and/or nutrient loadings. The model assumes if nutrient concentrations were reduced, the overall TSI values for total phosphorus, chlorophyll-*a*, and Secchi disk would be reduced, indicating improvement in water quality. Existing tributary nutrient concentrations were reduced by successive ten percent increments and modeled to create an in-lake reduction curve. This model was used to assess both East Oakwood Lake and West Oakwood Lake.

AGNPS Feedlot Model

The Agricultural Non-Point Source Pollution (AGNPS) model is a GIS-integrated water quality model that predicts non-point source pollutant loadings within agricultural watersheds. ArcView GIS software was used to spatially analyze feedlots and their pollution potential.

Watersheds dominated by agricultural land uses, pasturing cattle in stream drainages, runoff from manure application, and runoff from concentrated animal feeding operations can influence fecal coliform bacteria concentrations. The AGNPS feedlot assessment assumed the probable sources of fecal coliform bacteria loadings were related to agricultural land use (upland and riparian), use of streams for stock watering, and animal feeding operations.

The methods used to determine loadings and reductions of fecal coliform bacteria in the Oakwood Lakes watershed could serve as an integrated measure of runoff from feedlots and land uses. Pollutant frequency was measured using the density of feedlots located upstream of a monitoring site. A feedlot score, based on proximity to the receiving waters, provided an indicator of potential fecal coliform bacteria input to that water. Upland and riparian land uses provided an indicator of the availability of upland areas available for pastured livestock. A complete methodology report can be found in Appendix K.

AnnAGNPS Landuse Model

The AnnAGNPS model expands the capabilities of the AGNPS model described above. This model is intended to be used as a tool to evaluate non-point source pollution from agricultural watersheds ranging in size up to 740,000 acres. With this model the watershed is divided into homogenous land areas or cells based on soil type, land use, and land management. AnnAGNPS simulates the transport of surface water, sediment, nutrients, and pesticides through the watershed. The current condition of the watershed can be modeled and used to compare the effects of implementing various conservation alternatives over time within the watershed. The results of the AnnAGNPS model can be found in the Results Section.

Flow Duration Intervals

Flow duration intervals were constructed for fecal coliform bacteria and total suspended solids at all monitored tributary sites. This method calculates fecal coliform bacteria, (concentration) x (flow), except uses zones based on hydrologic conditions and the medians of the fecal coliform bacteria grab sample data. By defining hydrologic conditions, targeting specific restoration efforts is easier. The five hydrologic conditions are (1) High Flows (0-10%), (2) Moist Conditions (10-40%), (3) Mid-Range Flows (40-60%), (4) Dry Conditions (60-90%), and (5) Low Flows (90-100%).

Two major accumulations of data were used to calculate reductions: (1) discharge data and (2) water quality samples. Table 19 lists the years of record used for the construction of the flow duration interval graphs.

Table 19. Flow Duration Interval Graph Dates

Site	Grab Data (May-Sep) Years		Discharge Data Years	
	EDWDD	DENR	EDWDD	USGS
* T43	2001-2002	----	2001-2002	----
* T44	2001-2002	----	2001-2002	----
* T45	2001-2002	----	2001-2002	----
* T46	2001-2002	----	2001-2002	----
* T48	2001-2002	----	2001-2002	----

* Numeric Standard for Fecal Coliform Bacteria Does Not Apply

The target line was graphed along 21 points using percentiles of the target load at matching flows. Similarly, grab samples were plotted using the instantaneous flow at the time the sample was taken. Medians and 90th percentiles were calculated, per zone, for grab sample data. Samples collected during rain events are indicated with an 'X'. Those samples indicated with a red box are exceedences of the allowable load.

To find the percent reduction per hydrologic condition, the median of the allowable load within a hydrologic zone (target) was divided by the median of the sampled load at that particular hydrologic condition (site value) and then subtracted from 1.

$$1 - [(Target) \div (Site Value)] = \% \text{ reduction}$$

To find the reduction with a 10% margin of safety applied the following equation was used:

$$100 - [(Target \div 1.1) \div (Site Value)] \times 100 = \% \text{ reduction with MOS}$$

These curves are developed using an average daily, long-term record of stream flow. These flows are then ranked from highest to lowest. The percent of days each flow was exceeded was calculated by dividing each rank by the number of flow data points.

$$\text{rank} \div \text{number of data points} = \text{percent of days the flow was exceeded}$$

Next, a load needs to be calculated. This is done by multiplying each average daily flow by the water quality standard for the parameter and multiplying by the conversion factor.

$$\text{flow (cfs)} \times \text{standard (mg/L)} \times \text{conversion factor} = \text{load}$$

The conversion factor for converting the mg/L to pounds per day for TSS is 5.396, as shown by the following formula:

$$\frac{\text{mg}}{\text{L}} \times \frac{1 \text{ L}}{0.0353146667 \text{ ft}^3} \times \frac{86400 \text{ sec}}{1 \text{ day}} \times \frac{\text{ft}^3}{\text{sec}} \times \frac{1 \text{ lb}}{453592.37 \text{ mg}} = \text{lbs/day}$$

The conversion factor for converting cfu/100mL to colonies per day for fecal coliform bacteria is 24,468,480 as shown by the following formula:

$$\frac{\text{col}}{\text{day}} \times \frac{28320 \text{ mL}}{1 \text{ ft}^3} \times \frac{86400 \text{ sec}}{1 \text{ day}} \times \frac{\text{ft}^3}{\text{sec}} = \text{col/day}$$

RESULTS

WATER QUALITY MONITORING

The data was evaluated based on the specific criteria that the DENR developed for listing water bodies in the 1998 and 2002 South Dakota 303(d) Waterbody List, and in the 2004 and the 2006 Integrated Report. The EPA approved listing criteria used by the state of South Dakota during the assessment to determine if a waterbody is meeting its beneficial uses, is contained in the following paragraph. It should be noted that EPA guidance, in reference to TMDL targets, are based on the acute criteria of any one sample, which was used in establishing targets for the TMDLs of this assessment.

Use support was based on the frequency of exceedences of water quality standards (if applicable) for the following chemical and field parameters. A stream or lake with only a slight exceedence (10% or less violations for each parameter) is considered to meet water quality criteria for that parameter. The EPA established the following general criteria in the 1992 305(b) Report Guidelines (SD DENR 2000) suitable for determining use support of monitored streams.

Fully supporting	≤ 10 % of samples violate standards
Not supporting	> 10 % of samples violate standards

This general criteria is based on collecting 20 or more samples per monitoring location. Many of the monitoring sites were sampled less than 20 times. For those monitoring sites with less than 20 samples, the following criteria will apply:

Fully supporting	≤ 25 % samples violate standards
Not supporting	> 25 % of samples violate standards

Use support assessment for fishable use (fish life propagation) primarily involved monitoring levels of the following major parameters: dissolved oxygen, total ammonia nitrogen as N, water temperature, pH, and suspended solids. Use support for swimmable uses and limited contact recreation involved monitoring the levels fecal coliform bacteria (May 1 – September 30) and dissolved oxygen. If more than one beneficial use is assigned for the same parameter (i.e. fecal coliform bacteria) at a particular monitoring site, the more stringent criteria will apply. The use support for monitoring sites will be discussed further in the Assessment Section. The results for the following parameters are summarized below for all the assessed tributaries (T43, T44, T45, T46, and T48) and lakes in the watershed (L1, L2, L10, L11, and L12).

Tributary Seasonal Trends

Water quality parameters vary depending upon season due to changes in temperature, precipitation, and agricultural practices. Table 20 shows the average seasonal concentration for each parameter at Site T44, which is an inlet of East Oakwood Lake. Table 21 shows the average seasonal contribution for each parameter for Sites T45 and T46, which are located on an East Oakwood Lake outlet that drains into the Big Sioux River. Table 22 shows the average seasonal contribution for each parameter at Sites T43 and T48, which are inlets of West Oakwood Lake.

Table 20. Average Seasonal Concentrations (East Oakwood Lake Inlet)

East Oakwood Inlet (from West Oakwood Lk)						
Parameter (mg/L)	Spring (Apr-May)		Summer (Jun-Aug)		Fall (Sept-Oct)	
	T44	T44	T44	T44	T44	T44
Diss. Oxygen	16.3		9.5		7.3	
TSS	18		31		23	
TotSol	898		965		1006	
TDS	880		934		983	
Nitrates	0.057		0.068		0.049	
Ammonia	0.09		0.354		0.426	
TKN	1.667		3.265		3.481	
TPO4	0.117		0.281		0.265	
TDPO4	0.043		0.089		0.076	
Org Nitrogen	1.577		2.912		3.055	

Table 21. Average Seasonal Concentrations (East Oakwood Lake Outlet)

East Oakwood Outlet						
Parameter (mg/L)	Spring (Apr-May)		Summer (Jun-Aug)		Fall (Sept-Oct)	
	T45	T46	T45	T46	T45	T46
Diss. Oxygen	13.0	13.3	6.6	6.7	10.8	12
TSS	38	62	15	40	16	36.8
TotSol	832	823	979	989	1002	1147
TDS	795	761	964	949	986	1110
Nitrates	0.225	0.258	0.111	0.275	0.158	0.079
Ammonia	0.128	0.186	0.155	0.18	0.334	0.209
TKN	1.479	0.186	1.281	0.18	1.66	0.209
TPO4	0.182	0.261	0.164	0.298	0.192	0.195
TDPO4	0.101	0.135	0.134	0.167	0.133	0.067
Org Nitrogen	1.351	1.36	1.126	1.629	1.326	1.686

Table 22. Average Seasonal Concentrations (West Oakwood Lake Inlets)

West Oakwood Inlets						
Parameter (mg/L)	Spring (Apr-May)		Summer (Jun-Aug)		Fall (Sept-Oct)	
	T43	T48	T43	T48	T43	T48
Diss. Oxygen	13.5	18.4	11.2	6.8	14.1	10.1
TSS	52	23	71	24	24	20
TotSol	1117	1374	1071	1124	1328	1054
TDS	1065	1351	1012	1100	1312	1035
Nitrates	0.361	0.496	0.592	0.334	0.059	0.05
Ammonia	0.131	0.051	0.128	0.299	0.269	0.286
TKN	1.377	1.329	1.933	2.572	1.417	2.774
TPO4	0.316	0.21	0.579	0.22	0.261	0.133
TDPO4	0.194	0.14	0.455	0.128	0.14	0.032
Org Nitrogen	1.246	1.277	1.846	2.102	1.283	2.488

The tributaries exhibited the highest dissolved oxygen concentrations (averaged) in the spring. The cooler water temperatures and higher flows contributed to the higher dissolved oxygen concentrations. Throughout the sampling period, average dissolved oxygen levels for the tributaries did not fall below 6.6 mg/L.

Higher total and dissolved solids were observed during the fall at all of the tributaries except Site T48 (Site T48 had higher concentration during the spring). The higher concentrations can be attributed to rainfall events which cause erosion of soils and runoff from agricultural lands and harvested crops.

Higher nitrate-nitrite concentrations occurred during the summer season at all of the tributaries except T46 (the highest average concentration of nitrate-nitrite at Site T46 occurred during the spring season). The highest summer average concentration of nitrate-nitrite was 0.592 mg/L at Site T43. The highest average concentrations of total Kjeldahl nitrogen and of organic nitrogen occurred in the fall at all the tributaries.

Total phosphorus and total dissolved phosphorus concentrations were highest during the summer months. The highest average summer concentration of total phosphorus entering East Oakwood Lake was from Site T44 (an inlet of East Oakwood Lake) with concentrations of 0.281 mg/L. The highest average summer concentration of total phosphorus entering West Oakwood Lake was from Site T43 (an inlet of West Oakwood Lake) with concentrations of 0.579 mg/L. Phosphorus contributions can increase the amount of algae growing in a lake, which in-turn causes reduced water clarity.

Tributary Water Quality Results

Chemical Parameters

Fecal Coliform Bacteria

Fecal coliform bacteria ranged from a no detect at East Oakwood Lake Tributary (T44) and East Oakwood Lake Inlet (T48), to a maximum of 13,000 cfu/100mL at East Oakwood Lake Outlet (T46) (Table 23). There are no fecal coliform bacteria standards for these tributary sites.

Table 23. Tributary Sites Fecal Coliform Bacteria Results

Site	Stream	Fecal Coliform Bacteria cfu/100mL					Violations of WQS	Percent Violating	Use Support
		# of Samples	Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	6	2755	340	10000	1500	----**	----	----
T44	East Oakwood Lake Trib 2	11	120	nd	950	nd	----	----	----
T45	East Oakwood Lake Outlet 1	11	1541	40	7800	730	----**	----	----
T46	East Oakwood Lake Outlet 2	11	3476	20	13000	2200	----**	----	----
T48	East Oakwood Lake Inlet 3	10	891	nd	5000	35	----**	----	----

Use support was determined by season (May 1 to September 30)
 ---- denotes no standard or beneficial use assigned
 ----** denotes no standard or beneficial use assigned, but there are violations if a standard were applicable

Total Solids

Total solids ranged from a minimum of 572 mg/L at East Oakwood Lake Outlet 2 (T46), to a maximum of 1,995 mg/L at East Oakwood Lake Inlet (T48). There are no total solids standards assigned to these tributary sites (Table 24).

Table 24. Tributary Sites Total Solids Results

Site	Stream	# of Samples	Total Solids mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	1143	667	1710	1288	----	----	----
T44	East Oakwood Lake Trib 2	14	962	824	1089	953	----	----	----
T45	East Oakwood Lake Outlet 1	14	954	698	1356	955	----	----	----
T46	East Oakwood Lake Outlet 2	14	999	572	1370	997	----	----	----
T48	East Oakwood Lake Inlet 3	14	1157	830	1995	1118	----	----	----

---- denotes no standard or beneficial use assigned

Total Suspended Solids

Total suspended solids ranged from a minimum of 4 mg/L at several sites, to a maximum of 153 mg/L at East Oakwood Lake Tributary (T43). There are no total suspended solids standards assigned to these tributary sites (Table 25).

Table 25. Tributary Sites Total Suspended Solids Results

Site	Stream	# of Samples	Total Suspended Solids mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	47	8	153	31	----	----	----
T44	East Oakwood Lake Trib 2	14	26	4	93	15	----	----	----
T45	East Oakwood Lake Outlet 1	14	20	4	58	17	----	----	----
T46	East Oakwood Lake Outlet 2	14	44	4	148	33	----	----	----
T48	East Oakwood Lake Inlet 3	14	22	4	74	15	----	----	----

---- denotes no standard or beneficial use assigned

Total Dissolved Solids (TDS)

Total dissolved solids ranged from a minimum of 476 mg/L at East Oakwood Lake Outlet 2 (T46), to a maximum of 1,988 mg/L at East Oakwood Lake Inlet (T48). A single grab sample daily maximum of 4,375 mg/L was used to determine the percent violations and assess for the beneficial use support of (9) Fish and Wildlife, Propagation, Recreation and Stock Watering for all tributary sites. Using this criterion, all sites are fully supporting of this parameter (Table 26).

Table 26. Tributary Sites Total Dissolved Solids Results

Site	Stream	# of Samples	Total Dissolved Solids mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	1096	656	1696	1280	0	0	Full
T44	East Oakwood Lake Trib 2	14	937	820	1012	938	0	0	Full
T45	East Oakwood Lake Outlet 1	14	934	640	1340	928	0	0	Full
T46	East Oakwood Lake Outlet 2	14	955	476	1340	976	0	0	Full
T48	East Oakwood Lake Inlet 3	14	1135	820	1988	1103	0	0	Full

Note: The standard is $\leq 4,375$ mg/L for beneficial use (9)

Total Ammonia Nitrogen as N

Total ammonia nitrogen as N ranged from a minimum of 0.019 mg/L at East Oakwood Lake Outlet 2 (T46), to a maximum of 1.456 mg/L at East Oakwood Lake Tributary (T44). There are no ammonia standards assigned to these tributary sites (Table 27).

Table 27. Tributary Sites Total Ammonia Nitrogen as N Results

Ammonia Nitrogen as N mg/L									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
T43	East Oakwood Lake Trib 1	9	0.130	0.062	0.198	0.128	----	----	----
T44	East Oakwood Lake Trib 2	14	0.318	0.030	1.456	0.221	----	----	----
T45	East Oakwood Lake Outlet 1	14	0.201	0.068	0.456	0.143	----	----	----
T46	East Oakwood Lake Outlet 2	14	0.190	0.019	0.326	0.217	----	----	----
T48	East Oakwood Lake Inlet 3	14	0.242	0.032	0.738	0.192	----	----	----

---- denotes no standard or beneficial use assigned

Nitrate-Nitrite

Nitrate-nitrite ranged from a minimum of 0.024 mg/L at the East Oakwood Lake Outlet (T45), to a maximum of 2.462 mg/L at the East Oakwood Lake Inlet (T48). A single grab sample daily maximum of 88 mg/L was used to determine the percent violations and assess for the beneficial use support of (9) Fish and Wildlife Propagation, Recreation and Stock Watering for all tributary sites. Using this criterion, all sites are fully supporting of this parameter (Table 28).

Table 28. Tributary Sites Nitrate-Nitrite Results

Nitrate-Nitrite as Nitrogen mg/L									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
T43	East Oakwood Lake Trib 1	9	0.396	0.043	1.406	0.360	0	0	Full
T44	East Oakwood Lake Trib 2	14	0.060	0.042	0.129	0.057	0	0	Full
T45	East Oakwood Lake Outlet 1	14	0.124	0.024	0.556	0.065	0	0	Full
T46	East Oakwood Lake Outlet 2	14	0.216	0.043	0.642	0.090	0	0	Full
T48	East Oakwood Lake Inlet 3	14	0.329	0.037	2.462	0.059	0	0	Full

Note: standard is ≤ 88 mg/L for beneficial use (9)

Total Kjeldahl Nitrogen (TKN)

Total Kjeldahl nitrogen ranged from a minimum of 0.781 mg/L at East Oakwood Lake Outlet 1 (T45), to a maximum of 6.412 mg/L at East Oakwood Lake Tributary (T44). There are no total Kjeldahl nitrogen standards assigned to these tributary sites (Table 29).

Table 29. Tributary Sites Total Kjeldahl Nitrogen (TKN) Results

Total Kjeldahl Nitrogen									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
T43	East Oakwood Lake Trib 1	9	1.651	1.121	2.520	1.554	----	----	----
T44	East Oakwood Lake Trib 2	14	2.984	1.376	6.412	2.336	----	----	----
T45	East Oakwood Lake Outlet 1	14	1.432	0.781	2.271	1.365	----	----	----
T46	East Oakwood Lake Outlet 2	14	1.777	1.001	2.405	1.942	----	----	----
T48	East Oakwood Lake Inlet 3	14	2.363	1.022	4.314	2.184	----	----	----

---- denotes no standard or beneficial use assigned

Organic Nitrogen

Organic nitrogen ranged from a minimum of 0.514 mg/L at East Oakwood Lake Outlet 1 (T45), to a maximum of 6.106 mg/L at East Oakwood Lake Tributary (T44). There are no organic nitrogen standards assigned to these tributary sites (Table 30).

Table 30. Tributary Sites Organic Nitrogen Results

Site	Stream	# of Samples	Organic Nitrogen mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	1.521	1.051	2.330	1.356	----	----	----
T44	East Oakwood Lake Trib 2	14	2.666	1.222	6.106	2.056	----	----	----
T45	East Oakwood Lake Outlet 1	14	1.231	0.514	1.928	1.176	----	----	----
T46	East Oakwood Lake Outlet 2	14	1.588	0.982	2.188	1.701	----	----	----
T48	East Oakwood Lake Inlet 3	14	2.121	0.990	4.084	1.751	----	----	----

---- denotes no standard or beneficial use assigned

Total Phosphorus

Total phosphorus ranged from a minimum of 0.030 mg/L at East Oakwood Lake Inlet (T48), to a maximum of 0.787 mg/L at East Oakwood Lake Tributary (T43). There are no total phosphorus standards assigned to these tributary sites (Table 31).

Table 31. Tributary Sites Total Phosphorus Results

Site	Stream	# of Samples	Total Phosphorus mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	0.420	0.162	0.787	0.378	----	----	----
T44	East Oakwood Lake Trib 2	14	0.241	0.086	0.589	0.196	----	----	----
T45	East Oakwood Lake Outlet 1	14	0.176	0.073	0.377	0.153	----	----	----
T46	East Oakwood Lake Outlet 2	14	0.261	0.066	0.596	0.227	----	----	----
T48	East Oakwood Lake Inlet 3	14	0.193	0.030	0.337	0.192	----	----	----

---- denotes no standard or beneficial use assigned

Total Dissolved Phosphorus

Total dissolved phosphorus ranged from a minimum of 0.003 mg/L at East Oakwood Lake Tributary (T44), to a maximum of 0.732 mg/L at East Oakwood Lake Tributary (T43). There are no total dissolved phosphorus standards assigned to these tributary sites (Table 32).

Table 32. Tributary Sites Total Dissolved Phosphorus Results

Site	Stream	# of Samples	Total Dissolved Phosphorous mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	0.298	0.119	0.732	0.255	----	----	----
T44	East Oakwood Lake Trib 2	14	0.076	0.003	0.170	0.060	----	----	----
T45	East Oakwood Lake Outlet 1	14	0.123	0.017	0.220	0.119	----	----	----
T46	East Oakwood Lake Outlet 2	14	0.132	0.022	0.413	0.095	----	----	----
T48	East Oakwood Lake Inlet 3	14	0.103	0.004	0.326	0.051	----	----	----

---- denotes no standard or beneficial use assigned

Field Parameters

Dissolved Oxygen

Dissolved oxygen ranged from a minimum of 2.1 mg/L at East Oakwood Lake Outlet (T45), to a maximum of 20.0 mg/L at East Oakwood Lake Tributary (T44) and East Oakwood Lake Inlet (T48). There are no dissolved oxygen standards assigned to these tributary sites (Table 33).

Table 33. Tributary Sites Dissolved Oxygen Results

Dissolved Oxygen mg/L									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
T43	East Oakwood Lake Trib 1	9	12.6	5.9	17.3	12.5	----	----	----
T44	East Oakwood Lake Trib 2	13	10.6	3.3	20.0	9.4	----**	----	----
T45	East Oakwood Lake Outlet 1	13	9.0	2.1	17.4	9.7	----**	----	----
T46	East Oakwood Lake Outlet 2	13	9.5	3.0	17.4	9.9	----**	----	----
T48	East Oakwood Lake Inlet 3	14	10.2	3.6	20.0	8.1	----**	----	----

---- denotes no standard or beneficial use assigned for dissolved oxygen, and no violations if they were applicable
 ----** denotes no standard or beneficial use assigned for dissolved oxygen, but there are violations if a standard were applicable

pH

pH ranged from a minimum of 7.4 units at East Oakwood Lake Outlet 2 (T46), to a maximum of 9.3 units at East Oakwood Lake Tributary (T44) and East Oakwood Lake Inlet (T48). A single grab sample daily maximum of the most restrictive standard of ≥ 6.0 to ≤ 9.5 was used to determine the percent violations at and assess for the beneficial use support of (9) Fish and Wildlife Propagation, Recreation and Stock Watering. Using this criterion, all tributary sites are fully supporting of this parameter (Table 34).

Table 34. Tributary Sites pH Results

pH units									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
T43	East Oakwood Lake Trib 1	9	8.1	7.8	8.4	8.2	0	0	Full
T44	East Oakwood Lake Trib 2	13	8.5	7.7	9.3	8.5	0	0	Full
T45	East Oakwood Lake Outlet 1	13	8.0	7.5	8.5	8.1	0	0	Full
T46	East Oakwood Lake Outlet 2	13	7.8	7.4	8.2	7.9	0	0	Full
T48	East Oakwood Lake Inlet 3	13	8.3	7.6	9.3	8.3	0	0	Full

Note: The standard is ≥ 6.0 to ≤ 9.5 for beneficial use (9)

Air Temperature

Air temperature ranged from a minimum of 0.5° C at the East Oakwood Lake Inlet (T48) to a maximum of 34.0° C Site T43 and Site T45. There are no air temperatures standards assigned to these tributary sites (Table 35).

Table 35. Tributary Sites Air Temperature Results

Air Temperature C°									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
T43	East Oakwood Lake Trib 1	9	19.7	9.5	34.0	16.0	----	----	----
T44	East Oakwood Lake Trib 2	14	18.5	1.0	35.5	19.5	----	----	----
T45	East Oakwood Lake Outlet 1	14	19.4	9.0	34.0	19.3	----	----	----
T46	East Oakwood Lake Outlet 2	14	21.0	8.0	36.5	21.1	----	----	----
T48	East Oakwood Lake Inlet 3	14	18.9	0.5	37.0	17.5	----	----	----

---- denotes no standard or beneficial use assigned

Water Temperature

Water temperature ranged from a minimum of 4.0° C at East Oakwood Lake Inlet (T48), to a maximum of 27.0° C at East Oakwood Lake Tributary (T44). There are no water temperatures standards assigned to these tributary sites (Table 36).

Table 36. Tributary Sites Water Temperature Results

Site	Stream	# of Samples	Water Temperature C°				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	14.5	6.0	25.4	11.9	----	----	----
T44	East Oakwood Lake Trib 2	14	17.1	6.1	27.0	19.9	----	----	----
T45	East Oakwood Lake Outlet 1	14	15.8	6.4	24.5	17.0	----	----	----
T46	East Oakwood Lake Outlet 2	14	16.7	5.8	25.3	20.4	----	----	----
T48	East Oakwood Lake Inlet 3	14	16.2	4.0	25.9	20.2	----	----	----

---- denotes no standard or beneficial use assigned

Conductivity

Conductivity ranged from a minimum of 446 µmhos/cm at the East Oakwood Lake Outlet 2 (T46), to a maximum of 1,540 µmhos/cm at the East Oakwood Lake Inlet (T48). There are no conductivity standards assigned to these tributary sites (Table 37).

Table 37. Tributary Sites Conductivity Results

Site	Stream	# of Samples	Conductivity µS/cm				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	1036	651	1432	1079	----	----	----
T44	East Oakwood Lake Trib 2	14	1005	761	1229	1044	----	----	----
T45	East Oakwood Lake Outlet 1	14	1006	608	1445	1002	----	----	----
T46	East Oakwood Lake Outlet 2	14	1020	446	1388	1056	----	----	----
T48	East Oakwood Lake Inlet 3	14	1162	656	1540	1209	----	----	----

---- denotes no standard or beneficial use assigned

Specific Conductivity

Specific conductivity ranged from a minimum of 878 µmhos/cm at East Oakwood Lake Outlet (T45), to a maximum of 2,255 µmhos/cm at East Oakwood Lake Inlet (T48). A single grab sample daily maximum of 4,375 µmhos/cm (most stringent) was used to determine the percent violations and assess for the beneficial use support of beneficial use (9) Fish and Wildlife Propagation, Recreation and Stock Watering and (10) Irrigation. Using this criterion all tributary sites are fully supporting of this parameter (Table 38).

Table 38. Tributary Sites Specific Conductivity Results

Site	Stream	# of Samples	Specific Conductivity µS/cm				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	1325	890	2020	1127	0	0	Full
T44	East Oakwood Lake Trib 2	14	1186	1113	1263	1192	0	0	Full
T45	East Oakwood Lake Outlet 1	14	1220	878	1586	1210	0	0	Full
T46	East Oakwood Lake Outlet 2	14	1216	660	1607	1281	0	0	Full
T48	East Oakwood Lake Inlet 3	14	1406	1026	2255	1365	0	0	Full

NOTE: The more restrictive standard of ≤ 4,375 umhos/cm is applied for beneficial uses of (9) and (10)

Salinity

Salinity ranged from a minimum of 0.3 ppt at East Oakwood Lake Outlet 2 (T46), to a maximum of 1.4 ppt at East Oakwood Lake Outlet (T45). There are no salinity standards assigned to these tributary sites (Table 39).

Table 39. Tributary Sites Salinity Results

Site	Stream	# of Samples	Salinity ppt				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	0.7	0.4	1.0	0.6	----	----	----
T44	East Oakwood Lake Trib 2	14	0.6	0.6	0.6	0.6	----	----	----
T45	East Oakwood Lake Outlet 1	14	0.7	0.5	1.4	0.6	----	----	----
T46	East Oakwood Lake Outlet 2	14	0.6	0.3	0.8	0.7	----	----	----
T48	East Oakwood Lake Inlet 3	14	0.7	0.5	1.2	0.7	----	----	----

---- denotes no standard or beneficial use assigned

Turbidity – NTU

Turbidity ranged from a minimum of 1.3 NTU at East Oakwood Lake Tributary (T44), to a maximum of 65.1 NTU at East Oakwood Lake Outlet 2 (T46). There are no turbidity standards assigned to these tributary sites (Table 40).

Table 40. Tributary Sites Turbidity (NTU) Results

Site	Stream	# of Samples	NTU				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
T43	East Oakwood Lake Trib 1	9	17.9	5.3	57.1	13.1	----	----	----
T44	East Oakwood Lake Trib 2	14	19.6	1.3	65.0	9.2	----	----	----
T45	East Oakwood Lake Outlet 1	14	10.7	2.4	35.5	7.1	----	----	----
T46	East Oakwood Lake Outlet 2	14	25.2	3.1	65.1	24.7	----	----	----
T48	East Oakwood Lake Inlet 3	14	16.8	2.6	60.0	9.2	----	----	----

---- denotes no standard or beneficial use assigned

In-Lake Seasonal Trends

Typically water quality parameters will vary with season due to changes in temperature, precipitation, and agricultural practices. Table 41 shows the average seasonal concentration for each parameter at East Oakwood Lake. Table 42 shows the average seasonal concentration for each parameter at West Oakwood Lakes.

East Oakwood Lake

Overall, average concentrations show an increase from the spring season to the fall season. All parameters, except nitrates, have the highest concentrations during the fall season (Sept-Oct). Ammonia concentrations doubled from the spring season to the summer season. Sources of in-lake ammonia concentrations could be tributary loading, livestock wading in the lake, animal feeding areas, decomposition of organic matter, or runoff from applied manure (fertilizer). Average total phosphorus and total dissolved phosphorus concentrations were highest in the fall season. Phosphorus levels can contribute to algae density and in some cases algal blooms. Total solids and total dissolved solids were also higher in the fall, causing higher turbidity.

Table 41. Average Seasonal Concentrations from East Oakwood Lake

Parameter (mg/L)	East Oakwood Lake		
	Spring (Apr-May)	Summer (Jun-Aug)	Fall (Sept-Oct)
Diss. Oxygen	15.4	8.5	9.4
TSS	3	15	20
TotSol	868	951	957
TDS	865	936	937
Nitrates	0.039	0.06	0.049
Ammonia	0.057	0.165	0.185
TKN	1.074	1.954	2.814
TPO4	0.059	0.188	0.19
TDPO4	0.035	0.058	0.067
Org Nitrogen	1.014	1.831	2.629

West Oakwood Lake

Average concentrations of total solids and total dissolved solids were highest in the summer season and continued to stay high into the fall season. Ammonia and TKN concentrations were the highest during the fall season. Average concentrations of organic nitrogen were highest during the summer season. Possible sources of organic nitrogen in stream samples may include vegetation from the watershed, algae growth, and animal waste.

Total phosphorus and total dissolved phosphorus average concentrations were highest during the summer season. Phosphorus is present in all aquatic systems. Phosphorus-bearing rocks and organic matter decomposition are natural sources. Other potential sources include manmade fertilizers, domestic sewage, and agricultural sources (SD DENR 2000).

Table 42. Average Seasonal Concentrations from West Oakwood Lake

Parameter (mg/L)	West Oakwood Lake		
	Spring (Apr-May)	Summer (Jun-Aug)	Fall (Sept-Oct)
Diss. Oxygen	7.49	8.94	12.22
TSS	22	44	37
TotSol	1161	1248	1240
TDS	1139	1196	1203
Nitrates	0	0	0
Ammonia	0.197	0.06	0.502
TKN	3.253	4.34	4.773
TPO4	0.135	0.26	0.217
TDPO4	0.025	0.039	0.025
Org Nitrogen	3.057	4.28	4.272

In-Lake Water Quality Results

Chemical Parameters

Fecal Coliform Bacteria

East Oakwood Lake fecal coliform bacteria ranged from no detect (several sites) to a maximum of 230 cfu/100mL (L1-S). West Oakwood Lake fecal coliform bacteria ranged from no detect (several sites) to a maximum of 30 cfu/100ml (L11-North Lake Tetonkaha).

A single grab sample daily maximum of 400 cfu/100mL (most stringent) was used to determine the percent violations and assess for the beneficial use support of (7) Immersion Recreation for all sites on both East Oakwood Lake and West Oakwood Lake. Based on this criterion, both lakes are fully supporting of this parameter (Table 43).

Table 43. Oakwood Lakes Fecal Coliform Bacteria Results

Fecal Coliform Bacteria cfu/100mL									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
L1-S	East Oakwood Lake 1-Surface	9	27	nd	230	nd	0	0	Full
L1-B	East Oakwood Lake 1-Bottom	8	28	nd	100	nd	0	0	Full
L2-S	East Oakwood Lake 2-Surface	9	19	nd	100	nd	0	0	Full
L2-B	East Oakwood Lake 2-Bottom	9	28	nd	100	10	0	0	Full
L10	Johnson Lake	5	nd	nd	nd	nd	0	0	Full
L11	North Tetonkaha Lake	5	8	nd	30	nd	0	0	Full
L12	South Tetonkaha Lake	5	6	nd	20	nd	0	0	Full

Use support was determined by season (May 1 to September 30)

Note: The more restrictive standard of 400 cfu/100mL is applied for beneficial uses (7) and (8)

Total Solids

East Oakwood Lake total solids ranged from a minimum of 786 mg/L (L1-S-East Oakwood Lake 1 Surface) to a maximum of 1,034 mg/L at the same site. West Oakwood Lake total solids ranged from a minimum of 1,139 mg/L (L10-Johnson Lake and L11-North Tetonkaha) to a maximum of 1,290 mg/L at site L10. There is no standard or assigned beneficial use for this parameter (Table 44).

Table 44. Oakwood Lakes Total Solids Results

Total Solids mg/L									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
L1-S	East Oakwood Lake 1-Surface	11	930	786	1034	964	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	945	830	1028	963	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	925	794	1017	929	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	938	838	1016	938	----	----	----
L10	Johnson Lake	7	1238	1139	1290	1258	----	----	----
L11	North Tetonkaha Lake	7	1215	1139	1269	1226	----	----	----
L12	South Tetonkaha Lake	7	1210	1144	1264	1206	----	----	----

---- denotes no standard or beneficial use assigned

Total Suspended Solids

East Oakwood Lake total suspended solids ranged from a minimum of 1 mg/L (L1-B-East Oakwood Lake 1 Bottom and L2-S-East Oakwood Lake 2 Surface) to a maximum of 46 mg/L (L1-B and L2-B). West Oakwood Lake total suspended solids ranged from a minimum of 15 mg/L (L10-Johnson Lake) to a maximum of 64 mg/L at site L10.

A single grab sample daily maximum of 158 mg/L (most stringent) was used to determine the percent violations and assess for the beneficial use support of (5) Warm Water Semi-permanent Fish Life Propagation for all East Oakwood Lake and West Oakwood Lake sites. Based on this criterion, both lakes are fully supporting of this parameter (Table 45).

Table 45. Oakwood Lakes Total Suspended Solids Results

Total Suspended Solids mg/L									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
L1-S	East Oakwood Lake 1-Surface	11	13	2	45	9	0	0	Full
L1-B	East Oakwood Lake 1-Bottom	9	13	1	46	13	0	0	Full
L2-S	East Oakwood Lake 2-Surface	11	12	1	41	9	0	0	Full
L2-B	East Oakwood Lake 2-Bottom	10	15	2	46	9	0	0	Full
L10	Johnson Lake	7	41	15	64	39	0	0	Full
L11	North Tetonkaha Lake	7	42	25	62	37	0	0	Full
L12	South Tetonkaha Lake	7	35	17	58	35	0	0	Full

Note: The standard is 158 mg/L For beneficial use (5)

Total Dissolved Solids (TDS)

East Oakwood Lake TDS ranged from a minimum of 784 mg/L (L1-S-East Oakwood Lake 1 Surface) to a maximum of 1,020 mg/L at sites L1-S and L1-B. West Oakwood TDS ranged from a minimum of 1,114 mg/L (L11-North Lake Tetonkaha) to a maximum of 1,239 mg/L at Site L10.

A single grab sample daily maximum of 4,375 mg/L was used to determine the percent violations and assess for the beneficial use support of (9) Fish and Wildlife, Propagation, Recreation and Stock Watering for all sites on East Oakwood Lake and West Oakwood Lake. Using this criterion, both lakes are fully supporting of this parameter (Table 46).

Table 46. Oakwood Lakes Total Dissolved Solids Results

Total Dissolved Solids mg/L									
Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
L1-S	East Oakwood Lake 1-Surface	11	917	784	1020	932	0	0	Full
L1-B	East Oakwood Lake 1-Bottom	9	932	828	1020	948	0	0	Full
L2-S	East Oakwood Lake 2-Surface	11	913	792	1008	912	0	0	Full
L2-B	East Oakwood Lake 2-Bottom	10	923	836	1008	910	0	0	Full
L10	Johnson Lake	7	1197	1124	1239	1208	0	0	Full
L11	North Tetonkaha Lake	7	1173	1114	1224	1176	0	0	Full
L12	South Tetonkaha Lake	7	1175	1127	1220	1171	0	0	Full

Note: The standard is 4375 mg/L for beneficial use (9)

Total Ammonia Nitrogen as N

East Oakwood Lake total ammonia nitrogen as N ranged from a minimum of 0.030 (L2-S-East Oakwood Lake 2 Surface) to a maximum of 0.390 mg/L (L1-S-East Oakwood Lake 1 Surface). West Oakwood Lake total ammonia nitrogen as N ranged from a no detect (several sites) to a maximum of 1.010 mg/L at site L12.

A single grab sample daily maximum of ammonia nitrogen as N \leq result of equation $(0.411 \div (1+10^{7.204-pH})) + (58.4 \div (1+10^{pH-7.204}))$ was used to determine the percent violations and assess for the beneficial use support of (5) Warmwater Semi-permanent Fish Life Propagation. Using this criterion, both East Oakwood Lake and West Oakwood Lake are fully supporting of this parameter (Table 47).

Table 47. Oakwood Lakes Total Ammonia Nitrogen as N Results

Ammonia Nitrogen as N mg/L									
Site	Stream	# of					Violations of WQS	Percent Violating	Use Support
		Samples	Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	0.177	0.037	0.390	0.176	0	0	Full
L1-B	East Oakwood Lake 1-Bottom	9	0.152	0.045	0.344	0.129	0	0	Full
L2-S	East Oakwood Lake 2-Surface	11	0.139	0.030	0.262	0.124	0	0	Full
L2-B	East Oakwood Lake 2-Bottom	10	0.120	0.031	0.214	0.101	0	0	Full
L10	Johnson Lake	7	0.190	nd	0.670	nd	0	0	Full
L11	North Tetonkaha Lake	7	0.227	nd	0.940	0.140	0	0	Full
L12	South Tetonkaha Lake	7	0.259	nd	1.010	0.180	0	0	Full

Note: The standard is Ammonia N \leq result of $(0.411 \div (1+10^{7.204-pH})) + (58.4 \div (1+10^{pH-7.204}))$ for beneficial use (5)

Nitrate-Nitrite

East Oakwood Lake nitrate-nitrite ranged from a minimum of 0.014 mg/L (L2-S-East Oakwood Lake 2 Surface) to a maximum of 0.078 mg/L at site L1-B. West Oakwood Lake nitrate-nitrite was undetectable at all sites. All samples collected were below the State Health Laboratory detection limit of 0.1 mg/L nitrate-nitrite concentration.

A single grab sample daily maximum of 88 mg/L was used to determine the percent violations and assess for the beneficial use support of (9) Fish and Wildlife Propagation, Recreation and Stock Watering for all East Oakwood Lake and West Oakwood Lake monitoring sites. Using this criterion, both lakes are fully supporting of this parameter (Table 48).

Table 48. Oakwood Lakes Nitrate-Nitrite Results

Nitrate-Nitrite as Nitrogen mg/L									
Site	Stream	# of					Violations of WQS	Percent Violating	Use Support
		Samples	Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	0.049	0.018	0.075	0.050	0	0	Full
L1-B	East Oakwood Lake 1-Bottom	9	0.052	0.016	0.078	0.051	0	0	Full
L2-S	East Oakwood Lake 2-Surface	11	0.053	0.014	0.076	0.056	0	0	Full
L2-B	East Oakwood Lake 2-Bottom	10	0.050	0.015	0.074	0.052	0	0	Full
L10	Johnson Lake	7	nd	nd	nd	nd	0	0	Full
L11	North Tetonkaha Lake	7	nd	nd	nd	nd	0	0	Full
L12	South Tetonkaha Lake	7	nd	nd	nd	nd	0	0	Full

Note: The standard is ≤ 88 mg/L for beneficial use (9)

Total Kjeldahl Nitrogen (TKN)

East Oakwood Lake TKN ranged from a minimum of 0.945 mg/L (L2-S East Oakwood Lake 2 Surface) to a maximum of 4.015 mg/L (L1-B East Oakwood Lake 1 Bottom). West Oakwood Lake TKN ranged from a minimum of 2.720 mg/L (L12-South Lake Tetonkaha) to a maximum 5.030 mg/L at site L11. There is no standard or assigned beneficial use for this parameter (Table 49).

Table 49. Oakwood Lakes Total Kjeldahl Nitrogen (TKN) Results

		Total Kjeldahl Nitrogen					Violations	Percent	Use
Site	Stream	# of Samples	Mean	Min	Max	Median	of WQS	Violating	Support
L1-S	East Oakwood Lake 1-Surface	11	1.979	0.949	3.971	1.674	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	2.111	0.959	4.015	1.616	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	1.941	0.945	3.820	1.712	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	2.040	0.963	3.723	1.560	----	----	----
L10	Johnson Lake	7	4.219	2.830	4.990	4.630	----	----	----
L11	North Tetonkaha Lake	7	4.203	2.750	5.030	4.340	----	----	----
L12	South Tetonkaha Lake	7	4.039	2.720	4.700	4.290	----	----	----

---- denotes no standard or beneficial use assigned

Organic Nitrogen

East Oakwood Lake organic nitrogen ranged from a minimum of 0.912 mg/L (L1-S-East Oakwood Lake 1 Surface and L2-S-East Oakwood Lake 2 Surface) to a maximum of 3.969 mg/L at site L1-B. West Oakwood Lake organic nitrogen ranged from a minimum of 2.720 mg/L (L12-South Lake Tetonkaha) to a maximum 4.920 mg/L at site L10. There is no standard or assigned beneficial use for this parameter (Table 50).

Table 50. Oakwood Lakes Organic Nitrogen Results

		Organic Nitrogen mg/L					Violations	Percent	Use
Site	Stream	# of Samples	Mean	Min	Max	Median	of WQS	Violating	Support
L1-S	East Oakwood Lake 1-Surface	11	1.803	0.912	3.816	1.478	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	1.959	0.914	3.969	1.506	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	1.802	0.912	3.675	1.450	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	1.920	0.920	3.665	1.416	----	----	----
L10	Johnson Lake	7	4.029	2.830	4.920	4.320	----	----	----
L11	North Tetonkaha Lake	7	3.976	2.750	4.590	4.090	----	----	----
L12	South Tetonkaha Lake	7	3.780	2.720	4.480	3.810	----	----	----

---- denotes no standard or beneficial use assigned

Total Phosphorus

East Oakwood Lake total phosphorus ranged from a minimum of 0.032 mg/L (L1-B East Oakwood Lake 1 Bottom) to a maximum of 0.261 mg/L (L2-B-East Oakwood Lake 2 Bottom). West Oakwood total phosphorus ranged from a minimum of 0.088 mg/L (L12-South Lake Tetonkaha) to a maximum 0.694 mg/L at Site L10.

There is no standard or assigned beneficial use for this parameter. Phosphorous is an essential nutrient for the production of crops and comes from commercial fertilizers and livestock waste. It is also the primary nutrient for algae growth in lakes and streams. Since a standard for total phosphorous has not been established, data was compared to the total phosphorus range found in lakes located in the same ecoregion in Minnesota (MPCA 2004). The recommended range for total phosphorus in the Northern Glaciated Plains ecoregion is 0.122 mg/L to 0.160 mg/L (Table 51).

Table 51. Oakwood Lakes Total Phosphorus Results

Site	Stream	# of Samples	Total Phosphorus mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	0.158	0.042	0.236	0.153	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	0.166	0.032	0.222	0.187	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	0.155	0.034	0.234	0.182	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	0.156	0.037	0.261	0.139	----	----	----
*L1	East Oakwood Lake 1	9	0.169	0.093	0.246	0.155	----	----	----
*L2	East Oakwood Lake 2	9	0.168	0.086	0.250	0.166	----	----	----
L10	Johnson Lake	10	0.303	0.133	0.694	0.267	----	----	----
L11	North Tetonkaha Lake	10	0.191	0.093	0.278	0.196	----	----	----
L12	South Tetonkaha Lake	10	0.184	0.088	0.252	0.200	----	----	----

---- denotes no standard or beneficial use assigned
 * denotes data collected during the summer of 2003

Total Dissolved Phosphorus

East Oakwood Lake total dissolved phosphorus ranged from a minimum of 0.014 mg/L (L1-East Oakwood Lake 1 Integrated and L2-East Oakwood Lake 2 Integrated) to a maximum of 0.163 mg/L (L2-S-East Oakwood Lake 2 Surface). West Oakwood Lake total dissolved phosphorus ranged from a minimum of 0.018 mg/L (L10-Johnson Lake and L11-Lake Tetonkaha) to a maximum 0.091 mg/L at site L10. There is no standard or assigned beneficial use for this parameter (Table 52).

Table 52. Oakwood Lakes Total Dissolved Phosphorus Results

Site	Stream	# of Samples	Total Dissolved Phosphorous mg/L				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	0.077	0.023	0.139	0.076	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	0.082	0.018	0.138	0.080	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	0.070	0.021	0.163	0.069	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	0.073	0.023	0.135	0.084	----	----	----
*L1	East Oakwood Lake 1	9	0.028	0.014	0.051	0.021	----	----	----
*L2	East Oakwood Lake 2	9	0.025	0.014	0.050	0.021	----	----	----
L10	Johnson Lake	10	0.042	0.018	0.091	0.034	----	----	----
L11	North Tetonkaha Lake	10	0.031	0.018	0.065	0.029	----	----	----
L12	South Tetonkaha Lake	10	0.028	0.019	0.046	0.026	----	----	----

---- denotes no standard or beneficial use assigned
 * denotes data collected during the summer of 2003

Field Parameters

Dissolved Oxygen

East Oakwood Lake dissolved oxygen ranged from a minimum of 2.9 mg/L (L2-B) to > 20 mg/L (L1 and L2). West Oakwood Lake dissolved oxygen ranged from a minimum of 5.9 mg/L (L11-North Lake Tetonkaha) to > 20 mg/L (L10-Johnson Lake).

A single grab sample daily maximum of ≥ 5 mg/L (most stringent) was used to determine the percent violations and assess for the beneficial use support of (5), (7), and (8) for all in-lake sites. Using the 2006 Integrated Report listing criterion for lakes, both East Oakwood Lake and West Oakwood Lake are fully supporting of this parameter (Table 53). Note that only surface samples are used to identify impairments (SDDENR 2006). Forty surface samples were collected from East Oakwood with three surface exceedances for a violation rate of 7.5%.

Table 53. Oakwood Lakes Dissolved Oxygen Results (units are mg/L)

Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
L1-S	East Oakwood Lake 1-Surface	11	11.2	3.9	19.0	10.8	1	9	Full
L1-B	East Oakwood Lake 1-Bottom	9	9.9	3.5	19.1	8.1	2	22	Full
L2-S	East Oakwood Lake 2-Surface	11	11.0	3.0	18.7	10.2	2	18	Full
L2-B	East Oakwood Lake 2-Bottom	10	10.3	2.9	19.0	9.0	2	20	Full
*L1	East Oakwood Lake 1	9	10.0	5.2	>20	8.4	0	0	Full
*L2	East Oakwood Lake 2	9	10.2	6.0	>20	8.9	0	0	Full
L10	Johnson Lake	10	9.5	6.3	>20	7.7	0	0	Full
L11	North Tetonkaha Lake	10	9.3	5.9	12.1	9.7	0	0	Full
L12	South Tetonkaha Lake	10	9.0	7.1	11.9	8.6	0	0	Full

Note: The standard is ≥ 5.0 mg/L for beneficial uses (5), (7), and (8). Surface samples are used to determine impairment.

* denotes data collected during the summer of 2003

pH

East Oakwood Lake pH ranged from a minimum of 7.7 (L1-S-East Oakwood Lake 1 Surface and L1-B-East Oakwood Lake 1 Bottom) to a maximum of 9.5 (L1-East Oakwood Lake 1 and L2-East Oakwood Lake 2). West Oakwood Lake pH ranged from a minimum of 6.9 (L10-Johnson Lake) to a maximum of 9.3 (L11-North Lake Tetonkaha and L12-South Lake Tetonkaha).

A single grab sample daily maximum of the most restrictive standard of ≥ 6.5 to ≤ 9.0 was used to determine the percent violations at and assess for the beneficial use support of (5) Warmwater Semi-permanent Fish Life Propagation for all sites on East Oakwood Lake and West Oakwood Lake. Using this criterion, West Oakwood Lake is fully supporting of this parameter. However, East Oakwood Lake (combined surface and bottom samples from 2001, 2002, and 2003) had a 17 percent violation rate (out of 59 samples) which means this lake is not supporting of this parameter (Table 54).

Table 54. Oakwood Lakes pH Results

Site	Stream	# of Samples	Mean	Min	Max	Median	Violations of WQS	Percent Violating	Use Support
L1-S	East Oakwood Lake 1-Surface	11	8.6	7.7	9.2	8.6	3	27	Not
L1-B	East Oakwood Lake 1-Bottom	9	8.6	7.7	9.2	8.6	1	11	Full
L2-S	East Oakwood Lake 2-Surface	11	8.6	7.9	9.2	8.5	1	9	Full
L2-B	East Oakwood Lake 2-Bottom	10	8.6	7.9	9.2	8.6	1	10	Full
*L1	East Oakwood Lake 1	9	8.8	8.4	9.5	8.7	2	22	Full
*L2	East Oakwood Lake 2	9	8.8	8.3	9.5	8.8	2	22	Full
L10	Johnson Lake	10	8.2	6.9	9.2	8.2	1	10	Full
L11	North Tetonkaha Lake	10	8.3	7.7	9.3	8.3	1	10	Full
L12	South Tetonkaha Lake	10	8.3	7.4	9.3	8.3	2	20	Full

Note: The more restrictive standard of ≥ 6.5 to ≤ 9.0 units is applied for beneficial uses (5) and (9)

* denotes data collected during the summer of 2003

Air Temperature

East Oakwood Lake air temperature ranged from a minimum of 7.0° C (at several sites) to a maximum of 33.0° C at Site L2. West Oakwood Lake air temperature ranged from a minimum of 4.3° C (L10-Johnson Lake) to a maximum 28.0° C at Sites L11 and L12. There is no standard or assigned beneficial use for this parameter (Table 55).

Table 55. Oakwood Lakes Air Temperature Results

		Air Temperature C°					Violations of WQS	Percent Violating	Use Support
Site	Stream	# of Samples	Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	18.1	7.0	25.0	22.0	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	18.5	7.0	25.0	22.0	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	18.6	7.0	25.0	21.0	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	18.2	7.0	25.0	19.5	----	----	----
*L1	East Oakwood Lake 1	9	20.6	10.0	30.0	20.0	----	----	----
*L2	East Oakwood Lake 2	9	21.1	9.6	33.0	20.0	----	----	----
L10	Johnson Lake	9	17.0	4.3	26.0	19.0	----	----	----
L11	North Tetonkaha Lake	9	18.0	4.7	28.0	19.5	----	----	----
L12	South Tetonkaha Lake	9	19.3	4.7	28.0	21.0	----	----	----

---- denotes no standard or beneficial use assigned

* denotes data collected during the summer of 2003

Water Temperature

East Oakwood Lake water temperature ranged from a minimum of 4.1° C (L2-S and L2-B) to a maximum of 26.5° C (several sites). West Oakwood Lake water temperature ranged from a minimum of 6.9° C (L10 Johnson Lake and L11 North Lake Tetonkaha) to a maximum of 25.9° C at Site L10.

A single grab sample daily maximum temperature of 32.2° C was used to determine the percent violations and assess for the beneficial use support of (5) for all in-lake sites. Both East Oakwood Lake and West Oakwood Lake are fully supporting of this parameter when this criteria is applied (Table 56).

Table 56. Oakwood Lakes Water Temperature Results

		Water Temperature C°					Violations of WQS	Percent Violating	Use Support
Site	Stream	# of Samples	Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	17.6	4.2	26.5	21.5	0	0	Full
L1-B	East Oakwood Lake 1-Bottom	9	19.1	4.2	26.4	21.5	0	0	Full
L2-S	East Oakwood Lake 2-Surface	11	17.7	4.1	26.5	21.9	0	0	Full
L2-B	East Oakwood Lake 2-Bottom	10	18.1	4.1	26.5	21.7	0	0	Full
*L1	East Oakwood Lake 1	9	19.1	10.8	24.9	20.4	0	0	Full
*L2	East Oakwood Lake 2	9	18.8	10.2	25.1	20.2	0	0	Full
L10	Johnson Lake	10	17.0	6.9	25.9	18.2	0	0	Full
L11	North Tetonkaha Lake	10	17.0	6.9	25.7	18.2	0	0	Full
L12	South Tetonkaha Lake	10	17.3	7.2	25.4	18.5	0	0	Full

Note: The standard is $\leq 32.2^{\circ}$ C for beneficial use (5)

* denotes data collected during the summer of 2003

Conductivity

East Oakwood Lake conductivity ranged from a minimum of 747 $\mu\text{mhos/cm}$ (L2-S-East Oakwood Lake 2 Surface and L2-B-East Oakwood Lake 2 Bottom) to a maximum of 1,283 $\mu\text{mhos/cm}$ (L2-S and L2-B). West Oakwood Lake conductivity ranged from a minimum of 881 $\mu\text{mhos/cm}$ (L10-Johnson Lake) to a maximum 1,432 $\mu\text{mhos/cm}$ at site L10. There is no standard or assigned beneficial use for this parameter (Table 57).

Table 57. Oakwood Lakes Conductivity Results

Site	Stream	# of Samples	Conductivity $\mu\text{S/cm}$				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	996	750	1238	1041	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	1037	749	1238	1086	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	1003	747	1229	1064	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	1015	747	1229	1073	----	----	----
*L1	East Oakwood Lake 1	9	1093	841	1279	1125	----	----	----
*L2	East Oakwood Lake 2	9	1089	839	1283	1120	----	----	----
L10	Johnson Lake	10	1173	881	1432	1216	----	----	----
L11	North Tetonkaha Lake	10	1170	936	1383	1207	----	----	----
L12	South Tetonkaha Lake	10	1161	938	1370	1190	----	----	----

---- denotes no standard or beneficial use assigned
 * denotes data collected during the summer of 2003

Specific Conductivity

East Oakwood Lake specific conductivity ranged from a minimum of 1,051 $\mu\text{mhos/cm}$ (L1-S-East Oakwood Lake 1 Surface) to a maximum of 1,284 $\mu\text{mhos/cm}$ at site L2. West Oakwood Lake specific conductivity ranged from a minimum of 1,320 $\mu\text{mhos/cm}$ (L12-South Tetonkaha) to a maximum of 1,429 $\mu\text{mhos/cm}$ at site L11.

A single grab sample daily maximum of 7,000 $\mu\text{mhos/cm}$ was used to determine the percent violations and assess for the beneficial use support of (9) Fish and Wildlife Propagation, Recreation, and Stock Watering. Using this criterion, both East Oakwood Lake and West Oakwood Lake are fully supporting this parameter (Table 58).

Table 58. Oakwood Lakes Specific Conductivity Results

Site	Stream	# of Samples	Specific Conductivity $\mu\text{S/cm}$				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	1159	1051	1246	1154	0	0	Full
L1-B	East Oakwood Lake 1-Bottom	9	1173	1117	1247	1182	0	0	Full
L2-S	East Oakwood Lake 2-Surface	11	1171	1113	1247	1168	0	0	Full
L2-B	East Oakwood Lake 2-Bottom	10	1172	1112	1247	1176	0	0	Full
*L1	East Oakwood Lake 1	9	1231	1162	1281	1234	0	0	Full
*L2	East Oakwood Lake 2	9	1232	1165	1284	1232	0	0	Full
L10	Johnson Lake	10	1382	1340	1420	1392	0	0	Full
L11	North Tetonkaha Lake	10	1376	1340	1429	1369	0	0	Full
L12	South Tetonkaha Lake	10	1364	1320	1424	1362	0	0	Full

NOTE: The more restrictive standard of $\leq 4,375$ $\mu\text{mhos/cm}$ is applied for beneficial uses of (9) and (10)
 * denotes data collected during the summer of 2003

Salinity

East Oakwood Lake salinity ranged from a minimum of 0.5 ppt (L1-S-East Oakwood Lake 1 Surface) to a maximum of 0.6 ppt (several sites). All salinity measurements of West Oakwood Lake were 0.7 ppt. There is no standard or assigned beneficial use for this parameter (Table 59).

Table 59. Oakwood Lakes Salinity Results

Site	Stream	# of Samples	Salinity ppt				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	0.6	0.5	0.6	0.6	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	0.6	0.6	0.6	0.6	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	0.6	0.6	0.6	0.6	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	0.6	0.6	0.6	0.6	----	----	----
*L1	East Oakwood Lake 1	9	0.6	0.6	0.6	0.6	----	----	----
*L2	East Oakwood Lake 2	8	0.6	0.6	0.6	0.6	----	----	----
L10	Johnson Lake	10	0.7	0.7	0.7	0.7	----	----	----
L11	North Tetonkaha Lake	10	0.7	0.7	0.7	0.7	----	----	----
L12	South Tetonkaha Lake	10	0.7	0.7	0.7	0.7	----	----	----

---- denotes no standard or beneficial use assigned

* denotes data collected during the summer of 2003

Turbidity – NTU

East Oakwood Lake turbidity ranged from a minimum of 0.3 NTU (L1-S-East Oakwood Lake 1 Surface and L1-B-East Oakwood Lake 1 Bottom) to a maximum of 45.0 NTU (L1-S and L1-B). West Oakwood Lake turbidity ranged from a minimum of 5.9 NTU (L12-South Lake Tetonkaha) to a maximum 56.1 NTU (L10-Johnson Lake) for all in-lake sites. There is no standard or assigned beneficial use for this parameter (Table 60).

Table 60. Oakwood Lakes Turbidity (NTU) Results

Site	Stream	# of Samples	NTU				Violations of WQS	Percent Violating	Use Support
			Mean	Min	Max	Median			
L1-S	East Oakwood Lake 1-Surface	11	13.3	0.3	45.0	9.4	----	----	----
L1-B	East Oakwood Lake 1-Bottom	9	15.9	0.3	45.0	13.7	----	----	----
L2-S	East Oakwood Lake 2-Surface	11	11.7	0.5	36.0	6.8	----	----	----
L2-B	East Oakwood Lake 2-Bottom	10	12.6	0.6	34.0	11.3	----	----	----
*L1	East Oakwood Lake 1	9	21.9	7.8	40.0	25.0	----	----	----
*L2	East Oakwood Lake 2	9	21.3	8.0	37.0	23.0	----	----	----
L10	Johnson Lake	10	32.0	7.7	56.1	37.0	----	----	----
L11	North Tetonkaha Lake	10	31.0	7.8	50.0	32.5	----	----	----
L12	South Tetonkaha Lake	10	26.7	5.9	40.0	33.3	----	----	----

---- denotes no standard or beneficial use assigned

* denotes data collected during the summer of 2003

HYDROLOGIC MONITORING

Bathymetric maps of Oakwood Lakes were created by SD Department of Game, Fish, and Parks. This map (Appendix L) shows the depths of West Oakwood Lake and East Oakwood Lake.

Annual Hydrologic Loading Budget

As mentioned in the Methods Section of the report, inflow and outflow sources were monitored from 2001 through 2002. Two inflows and one outflow were monitored at West Oakwood Lake. One inflow and one outflow were monitored at East Oakwood Lake.

East Oakwood Lake

Inflow sources of East Oakwood Lake included precipitation, tributary, and groundwater (Figure 9). Tributary (T44) inflow contributed 10,746 acre-ft (41 percent). Precipitation contributed 841 acre-ft (3 percent). Groundwater contributed an estimated 14,332 acre-ft (56 percent).

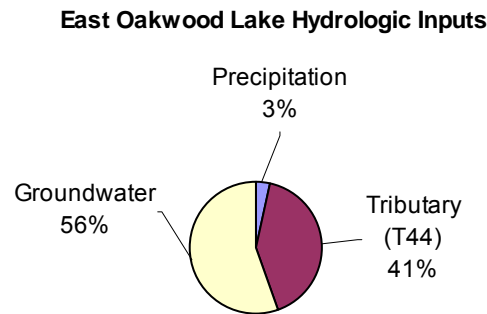


Figure 9. East Oakwood Lake Hydrologic Inputs

West Oakwood Lake

Inflow sources of West Oakwood Lake included precipitation, tributaries, and groundwater (Figure 10). Tributary flow (T43 and T48) contributed the largest portion with 9,153 acre-ft (74 percent). Groundwater was estimated at 1,755 acre-ft (14 percent) and precipitation with 1,439 acre-ft (12 percent).

Outflow sources of West Oakwood Lake included evaporation, tributary, and change in storage. Tributary (T44) outflow was 10,746 acre-ft. Other outflows included evaporation (1,404 acre-ft) and change in storage (197 acre-ft).

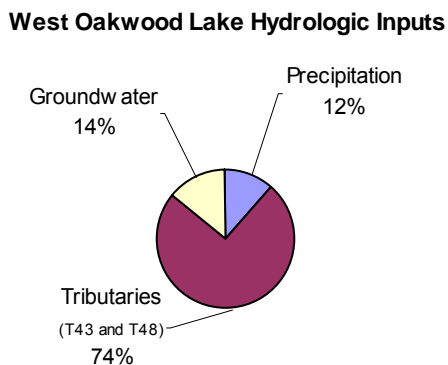


Figure 10. West Oakwood Lake Hydrologic Inputs

Nutrient and Sediment Budgets

Suspended Solids Budget

The loading of total suspended solids into East Oakwood Lake was derived from Site T44. It is estimated that Site T44 contributed 272,804 kg of total suspended solids to East Oakwood Lake. At the outflow (T45) total suspended solids measured 512,776 kg. This leaves a difference of 239,972 kg of total suspended solids which is attributed to an un-monitored source.

The total suspended solids loading into West Oakwood Lake was derived from Sites T43 and T48. The total contribution from these tributaries was 910,716 kg. After subtracting the outflow load from the inflow load, an estimated 637,912 kg/yr of TSS remained within West Oakwood Lake.

Nitrogen Budget

Sources contributing to the nitrogen load of East Oakwood Lake included tributary inflow and groundwater. The total contribution from tributary (T44) inflow was 39,732 kg of nitrogen. Groundwater contributed an estimated 20,870 kg of total nitrogen to the lake. Nitrogen leaving the lake through the outflow (T45) measured 49,786 kg. After the outflow was subtracted from the inflow, an estimated 10,816 kg of total nitrogen was retained within East Oakwood Lake.

Sources of nitrogen load to West Oakwood Lake included tributary inflow and groundwater. The total contribution of total nitrogen from the tributaries (T43 and T48) was 37,270 kg. After the outflow was subtracted from the inflow, an estimated 95 kg of total nitrogen remained within West Oakwood Lake.

Phosphorus Budget

Sources of phosphorus loads into East Oakwood Lake included tributary inflow, groundwater, and precipitation. The total contribution from tributary (T44) inflow was 3,019 kg of phosphorus. Groundwater contributed 459 kg of phosphorus and precipitation was estimated to contribute 31 kg of phosphorus to the lake. Phosphorus leaving the lake through the outflow (T45) measured 6,898 kg. This leaves a difference of 3,388 kg of phosphorus which is attributed to an un-monitored source.

Sources of phosphorus load into West Oakwood Lake included tributary inflow, groundwater, and precipitation. The total contribution from tributary (T43 and T48) inflow was 5,427 kg of phosphorus. Groundwater contributed 56 kg of phosphorus and precipitation was estimated to contribute 53 kg of phosphorus to the lake. After outflow was subtracted from inflow, an estimated 491 kg of total phosphorus remained within West Oakwood Lake.

BIOLOGICAL MONITORING

Tributary Biological Results

Macroinvertebrate Sampling

Macroinvertebrate sampling occurred at four of the five tributary sites. The exception was Site T43, which went dry before the macroinvertebrates could be collected. Laboratory work and compilation of the results for each metric were outsourced to the researchers at Natural Resource Solutions. Table 61, 62, 63, and 64 are the results of the macroinvertebrate scoring. Appendix M contains more details about the findings at each location.

Table 61. Site T44 Macroinvertebrate Scoring

Site T44					
Metric	Response to Impairment	Percentile for "best" value	Standard (best value)	Measured metric value	Standardized Metric score
Abundance	Decrease	95th	324	299	93
Taxa Richness	Decrease	95th	26	15	45
EPT Richness	Decrease	95th	5	3	27
Diptera Richness	Decrease	95th	10	5	45
% EPT	Decrease	95th	37.4	5.4	8
% Diptera	Increase	5th	16.4	88.0	17
% Chironomidae	Increase	5th	15.1	87.6	17
% Tolerant	Increase	5th	70.6	97.7	3
% Chironomidae + Oligochaeta	Increase	5th	35.5	88.6	16
% Hydropsychidae/Trichoptera	Increase	5th	0	100.0	0
% Gatherers	Decrease	95th	74.4	20.4	29
% Filterers	Increase	5th	5.1	72.9	28
% Clingers	Decrease	95th	17.9	0.7	2
Final index value for this site:					25

Table 62. Site T45 Macroinvertebrate Scoring

Site T45					
Metric	Response to Impairment	Percentile for "best" value	Standard (best value)	Measured metric value	Standardized Metric score
Abundance	Decrease	95th	324	276	85
Taxa Richness	Decrease	95th	26	15	45
EPT Richness	Decrease	95th	5	2	18
Diptera Richness	Decrease	95th	10	6	55
% EPT	Decrease	95th	37.4	3.3	5
% Diptera	Increase	5th	16.4	55.4	62
% Chironomidae	Increase	5th	15.1	54.3	62
% Tolerant	Increase	5th	70.6	98.2	2
% Chironomidae + Oligochaeta	Increase	5th	35.5	55.4	62
% Hydropsychidae/Trichoptera	Increase	5th	0	100.0	0
% Gatherers	Decrease	95th	74.4	71.0	100
% Filterers	Increase	5th	5.1	5.8	97
% Clingers	Decrease	95th	17.9	0.4	1
Final index value for this site:					46

Table 63. Site T46 Macroinvertebrate Scoring

Site T46					
Metric	Response to Impairment	Percentile for "best" value	Standard (best value)	Measured metric value	Standardized Metric score
Abundance	Decrease	95th	324	280	87
Taxa Richness	Decrease	95th	26	16	48
EPT Richness	Decrease	95th	5	2	18
Diptera Richness	Decrease	95th	10	5	45
% EPT	Decrease	95th	37.4	1.4	2
% Diptera	Increase	5th	16.4	40.4	83
% Chironomidae	Increase	5th	15.1	33.9	90
% Tolerant	Increase	5th	70.6	87.9	13
% Chironomidae + Oligochaeta	Increase	5th	35.5	84.6	21
% Hydropsychidae/Trichoptera	Increase	5th	0	0.0	100
% Gatherers	Decrease	95th	74.4	56.8	81
% Filterers	Decrease	5th	5.1	20.4	82
% Clingers	Decrease	95th	17.9	3.6	9
Final index value for this site:					52

Table 64. Site T48 Macroinvertebrate Scoring

Site T48					
Metric	Response to Impairment	Percentile for "best" value	Standard (best value)	Measured metric value	Standardized Metric score
Abundance	Decrease	95th	324	314	97
Taxa Richness	Decrease	95th	26	15	45
EPT Richness	Decrease	95th	5	3	27
Diptera Richness	Decrease	95th	10	4	36
% EPT	Decrease	95th	37.4	7.6	11
% Diptera	Increase	5th	16.4	44.9	77
% Chironomidae	Increase	5th	15.1	44.3	76
% Tolerant	Increase	5th	70.6	98.4	2
% Chironomidae + Oligochaeta	Increase	5th	35.5	44.6	77
% Hydropsychidae/Trichoptera	Increase	5th	0	16.7	83
% Gatherers	Decrease	95th	74.4	50.3	71
% Filterers	Increase	5th	5.1	41.7	60
% Clingers	Decrease	95th	17.9	1.9	5
Final index value for this site:					51

In-Lake Biological Results

Algae Sampling

Algae were sampled once in June and once in August at each lake (East Oakwood, Johnson, and Tetonkaha) by the East Dakota Water Development District. East Oakwood Lake was sampled in the summer of 2003. Johnson Lake and Lake Tetonkaha were sampled during the summer of 2004. Table 65 represents the algal density by date and by lake. Table 66 represents the algal biovolume by date and by lake. A complete list of algal species identified in each lake can be found in Appendix N.

Table 65. Algal Density by Lake and Date Sampled

Algal Density (cells/mL)						
	16-Jun-03		10-Jun-04			
	East Oakwood	Percent	Johnson	Percent	Tetonkaha	Percent
Flagellated Algae	4,609	0.67	7,649	1.87	9,311	1.15
Blue-Green Algae	672,794	97.26	392,217	95.66	793,842	97.62
Diatoms	6,976	1.01	3,630	0.89	1,536	0.19
Non Motile Green Algae	6,051	0.87	5,598	1.37	8,070	0.99
Unidentified Algae	1,320	0.19	930	0.23	420	0.05
Total Algal Density	691,750		410,024		813,179	

	11-Aug-03		12-Aug-04			
	East Oakwood	Percent	Johnson	Percent	Tetonkaha	Percent
Flagellated Algae	3,848	0.15	3,355	0.11	1,244	0.03
Blue-Green Algae	2,468,430	99.21	3,152,837	99.58	3,900,560	99.86
Diatoms	3,782	0.15	7,980	0.25	3,326	0.09
Non Motile Green Algae	9,348	0.38	1,300	0.04	524	0.01
Unidentified Algae	2,720	0.11	800	0.03	350	0.01
Total Algal Density	2,488,128		3,166,272		3,906,004	

East Oakwood Lake total phytoplankton density ranged from 691,750 cells/mL (June) to 2,488,128 cells/mL (August). Total phytoplankton density in Johnson Lake ranged from 410,024 cells/mL (June) to 3,166,272 cells/mL (August). Lake Tetonkaha total phytoplankton density ranged from 813,179 cells/mL (June) to 3,906,004 cells/mL (August). In all lakes, blue-green algae showed the highest density with the *Oscillatoria agardhii* species being the most dense. This species persisted with the highest density throughout the summer in all lakes, except for Lake Tetonkaha where the *Phormidium* species became the most dominant in August. This species, however, was also present in the other three lakes.

Table 66. Algal Biovolume by Lake and Date Sampled

Algal Biovolume ($\mu\text{m}^3/\text{mL}$)						
	16-Jun-03		10-Jun-04			
	East Oakwood	Percent	Johnson	Percent	Tetonkaha	Percent
Flagellated Algae	479,314	1.68	406,320	2.97	606,069	3.95
Blue-Green Algae	26,643,381	93.16	11,935,344	87.11	14,005,562	91.39
Diatoms	975,710	3.41	827,550	6.04	332,350	2.17
Non Motile Green Algae	460,552	1.61	503,792	3.68	368,160	2.40
Unidentified Algae	39,600	0.14	27,900	0.20	12,600	0.08
Total Algal Density	28,598,557		13,700,906		15,324,741	

	11-Aug-03		12-Aug-04			
	East Oakwood	Percent	Johnson	Percent	Tetonkaha	Percent
Flagellated Algae	428,650	0.45	266,403	0.23	140,365	0.10
Blue-Green Algae	93,386,947	98.13	115,644,362	98.29	143,680,069	99.46
Diatoms	476,420	0.50	1,431,074	1.22	487,100	0.34
Non Motile Green Algae	794,010	0.83	286,118	0.24	144,443	0.10
Unidentified Algae	81,600	0.09	24,000	0.02	10,500	0.01
Total Algal Density	95,167,627		117,651,957		144,462,477	

East Oakwood Lake total phytoplankton biovolume ranged from 39,600 $\mu\text{m}^3/\text{mL}$ in June to 93,386,947 $\mu\text{m}^3/\text{mL}$ in August. Johnson Lake total phytoplankton biovolume ranged from 24,000 $\mu\text{m}^3/\text{mL}$ in August to 115,644,362 $\mu\text{m}^3/\text{mL}$ in August. Lake Tetonkaha total phytoplankton biovolume ranged from 10,500 $\mu\text{m}^3/\text{mL}$ in August and 143,680,069 $\mu\text{m}^3/\text{mL}$ in August.

Throughout the summer blue-green algae dominated the biovolume in all lakes. The species of blue-green algae with the most biovolume in all of the lakes was *Oscillatoria agarhii*, a nuisance species. Other nuisance species found in all of the lakes included *Anabaena* and *Microcystis*.

All algae samples were incorporated into the following graphs (Figures 11 through 16). All of the lakes were sampled in June and August. By far, blue-green algae dominated. Flagellated algae, blue-green algae, non-motile green algae, diatoms, and unidentified algae were compared among the lakes. More detailed graphs of each lake can be found in the Analysis Section of this report.

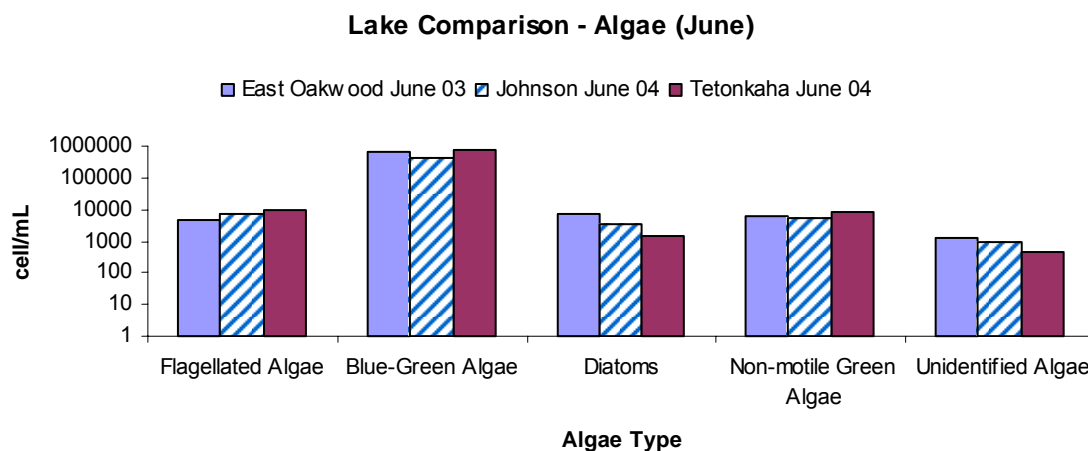


Figure 11. Total Algae Cells per Milliliter by Algae Type for East Oakwood Lake and West Oakwood Lake (Johnson and Tetonkaha) in June

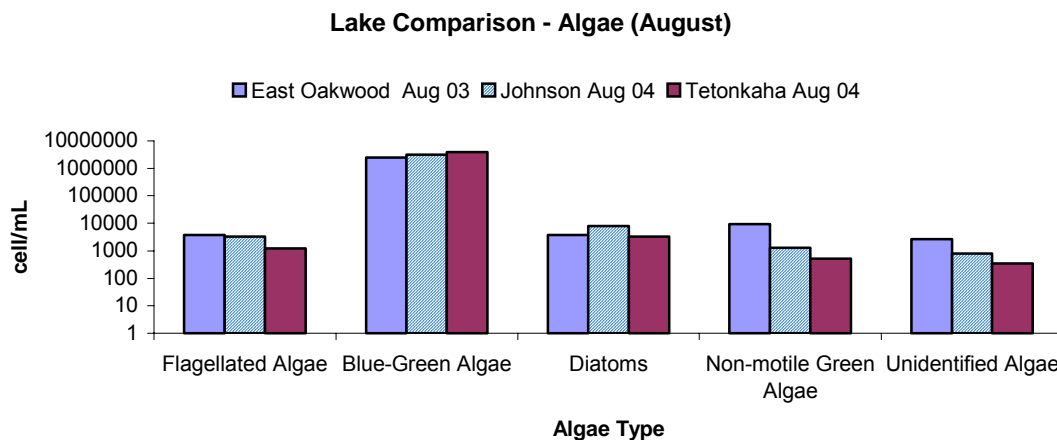


Figure 12. Total Algae Cells per Milliliter by Algae Type for East Oakwood Lake and West Oakwood Lake (Johnson and Tetonkaha) in August

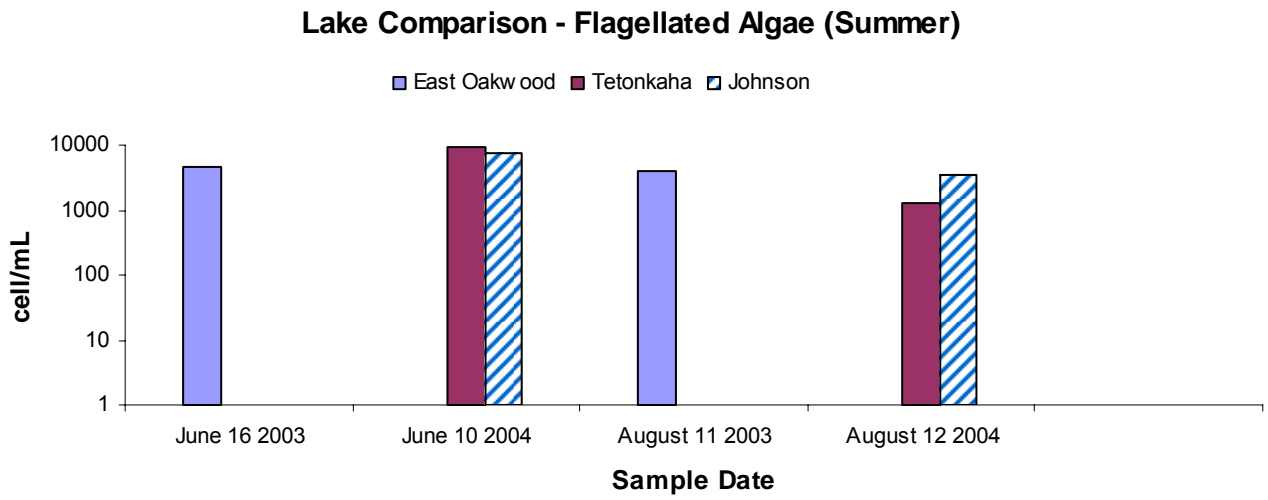


Figure 13. Total Flagellated Algae Cells per Milliliter by Sample Date for East Oakwood Lake and West Oakwood Lake (Johnson and Tetonkaha)

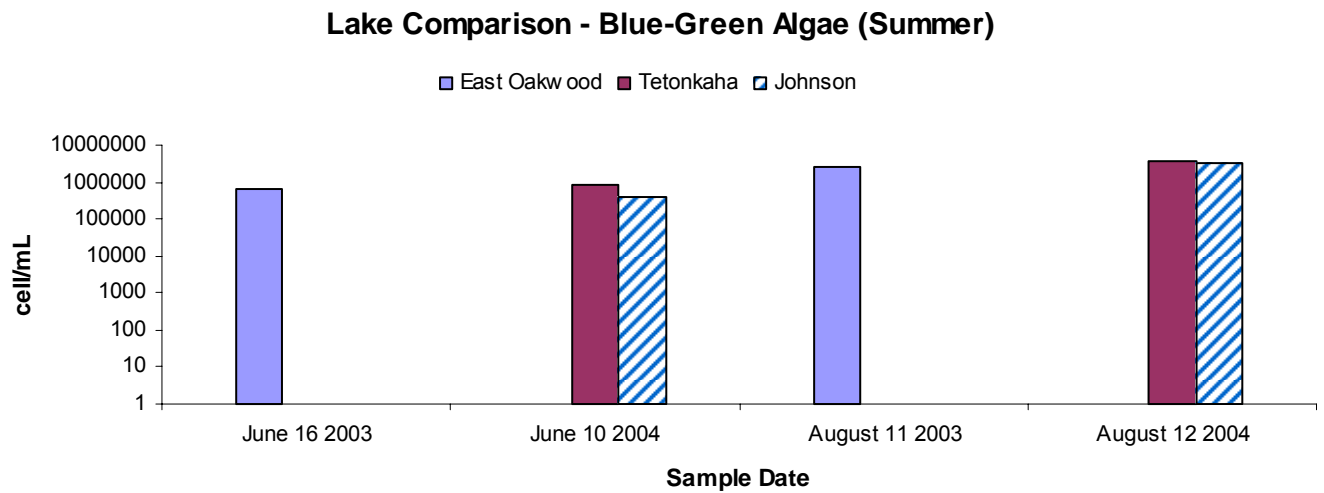


Figure 14. Total Blue-Green Algae Cells per Milliliter by Sample Date for East Oakwood Lake and West Oakwood Lake (Johnson and Tetonkaha)

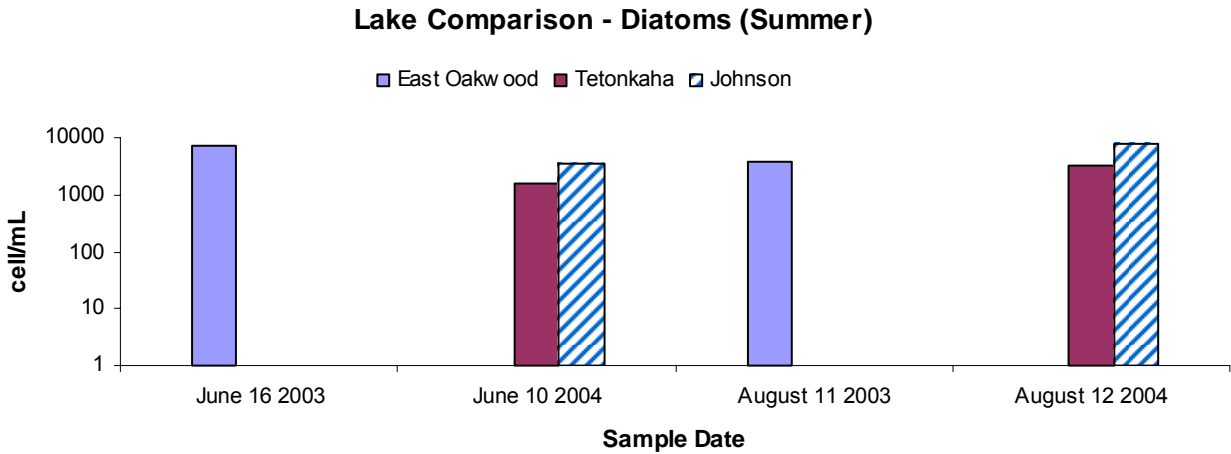


Figure 15. Total Diatoms Algae Cells per Milliliter by Sample Date for East Oakwood Lake and West Oakwood Lake (Johnson and Tetonkaha)

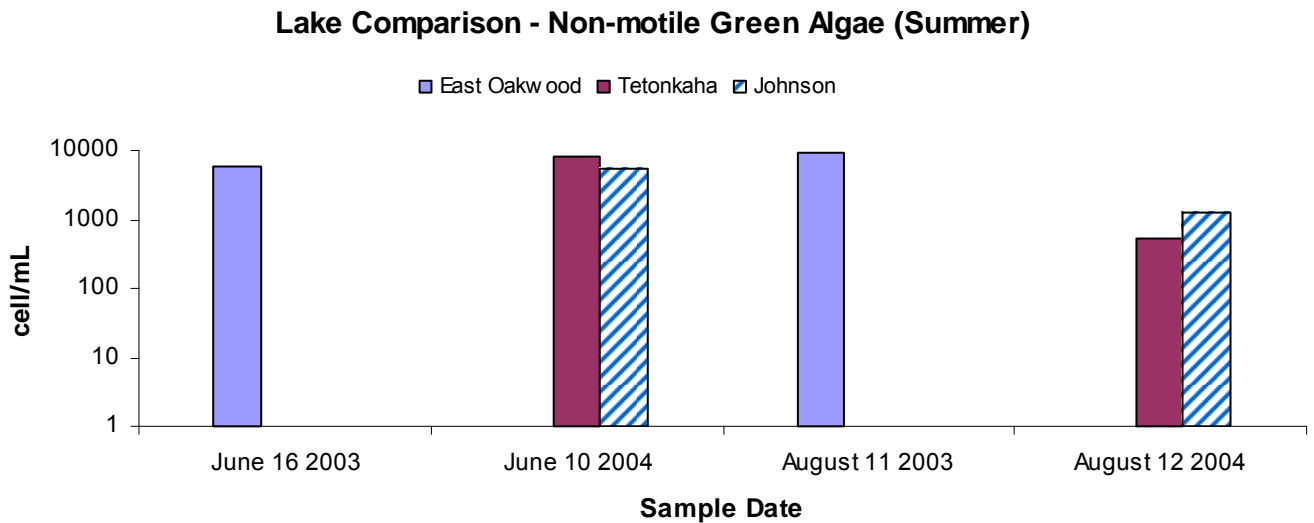


Figure 16. Total Non-Motile Green Algae Cells per Milliliter by Sample Date for East Oakwood Lake and West Oakwood Lake (Johnson and Tetonkaha)

Chlorophyll-*a* Sampling

Chlorophyll-*a* samples were collected at all in-lake sampling sites during the project (Figure 17). Overall, the chlorophyll-*a* concentration for all lakes were relatively high. The maximum chlorophyll-*a* concentration (258.23 mg/m³) sampled in West Oakwood Lake was collected at Site L11 on August 12, 2004. The maximum chlorophyll-*a* concentration (179.85 mg/m³) sampled in East Oakwood Lake was collected at Site L1 on August 11, 2003.

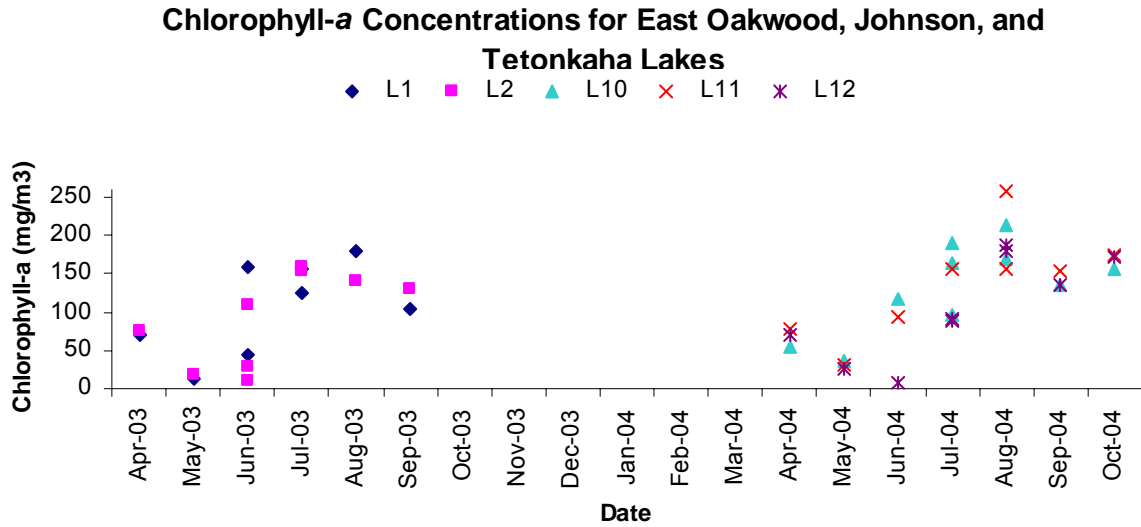



Figure 17. Monthly In-Lake Chlorophyll-a Concentrations by Date and Sampling Site for East Oakwood Lake and West Oakwood Lake (Johnson and Tetonkaha)

Aquatic Plant Sampling

An aquatic macrophyte survey was conducted on East Oakwood Lake and West Oakwood Lake (includes Johnson Lake and Lake Tetonkaha). A shoreline survey of East Oakwood Lake, along 32 transects, identified only one emergent aquatic plant (cattails). Poor emergent plant diversity is typical of lakes within this ecoregion (SD DENR 2000a). Leafy pondweed (*Potamogeton foliosus*), clasping leaf pondweed (*Potamogeton richardsonii*), and sago pondweed (*Potamogeton pectinatus*) were identified at 14 transect sampling locations (Table 67 and Figure 18). Additionally *Chara* sp. (a type of algae) was also identified during the aquatic plant survey.

Table 67. Submergent Plant Species Identified in East Oakwood Lake

Common Name	Genus	Species	Habitat
Leafy Pondweed	<i>Potamogeton</i>	<i>foliosus</i>	Submergent
Claspingleaf Pondweed	<i>Potamogeton</i>	<i>richardsonii</i>	Submergent
Sago Pondweed	<i>Potamogeton</i>	<i>pectinatus</i>	Submergent
Cattails	<i>Typha</i>	<i>spp.</i>	Emergent

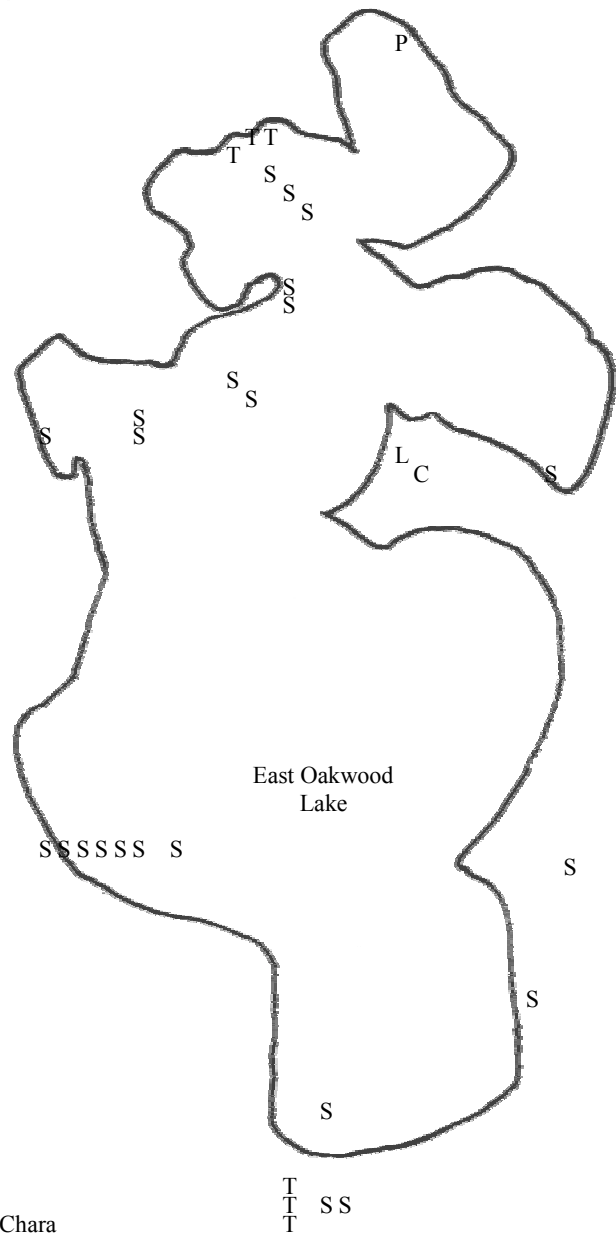

C= Chara
 L= Leafy Pondweed
 P= Claspingleaf Pondweed
 S= Sago Pondweed
 T= Cattails

Figure 18. Location of Aquatic Plant Species in East Oakwood Lake

Lake Tetonkaha was divided into 29 transects. Cattails (*Typha spp*), sago pondweed (*Potamogeton pectinatus*), and bulrushes (*Scirpus spp*) were identified during the shoreline survey. Of the three shoreline species, sago pondweed (*Potamogeton pectinatus*) was identified at four transect sampling locations. Only six transect sampling locations yielded submergent vegetation (Figure 19).

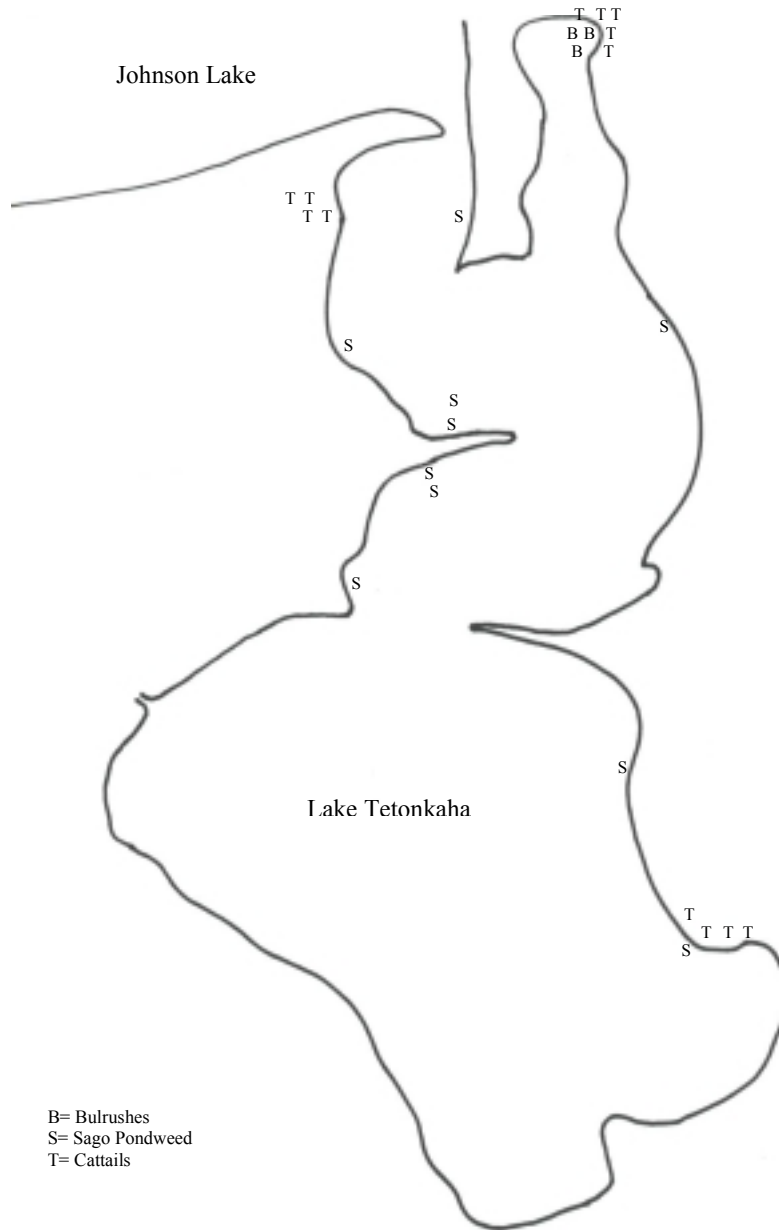


Figure 19. Location of Aquatic Plant Species in Lake Tetonkaha

Cattails (*Typha spp*) and sago pondweed (*Potamogeton pectinatus*) were identified during the shoreline survey of Johnson Lake. Submergent macrophyte species were sampled using 20 transects throughout the lake. One of the three shoreline species, sago pondweed (*Potamogeton pectinatus*) was identified at six of the 20 transect sampling locations (Figure 20).

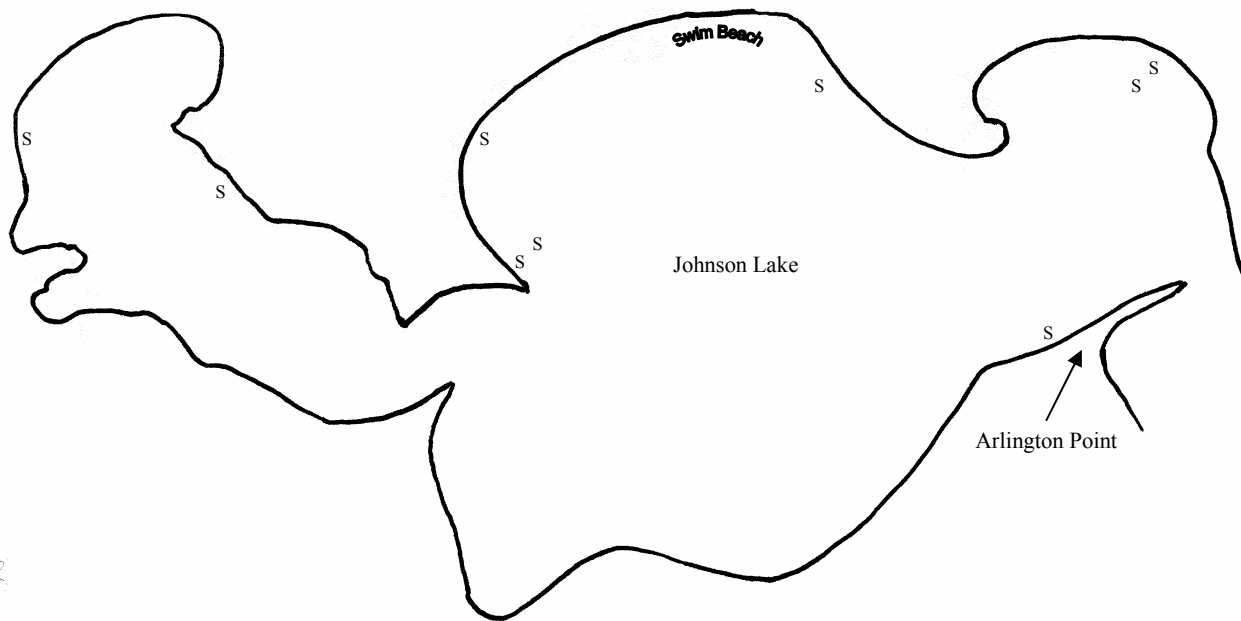


Figure 20. Location of Aquatic Plant Species in Johnson Lake

TSI COMPUTATION

Carlson's (1977) Trophic State Index (TSI) for chlorophyll-*a* and Secchi depth was calculated for both East Oakwood and West Oakwood Lake. TSI values for East Oakwood Lake are plotted by sampling date in Figure 21 and TSI values for West Oakwood Lake are plotted by sampling date in Figure 22. Beneficial use categories show that the majority of the samples do not meet the TSI criteria to support a warmwater semi-permanent fishery. In 2003, East Oakwood Lake median TSI values (Secchi depth plus chlorophyll-*a* TSI daily values) ranged from 60.8 to 83.8 with an overall median value of 75.7. Secchi depth TSI values ranged from 65.1 to 93.2 and chlorophyll-*a* TSI values ranged from 56.5 to 81.5.

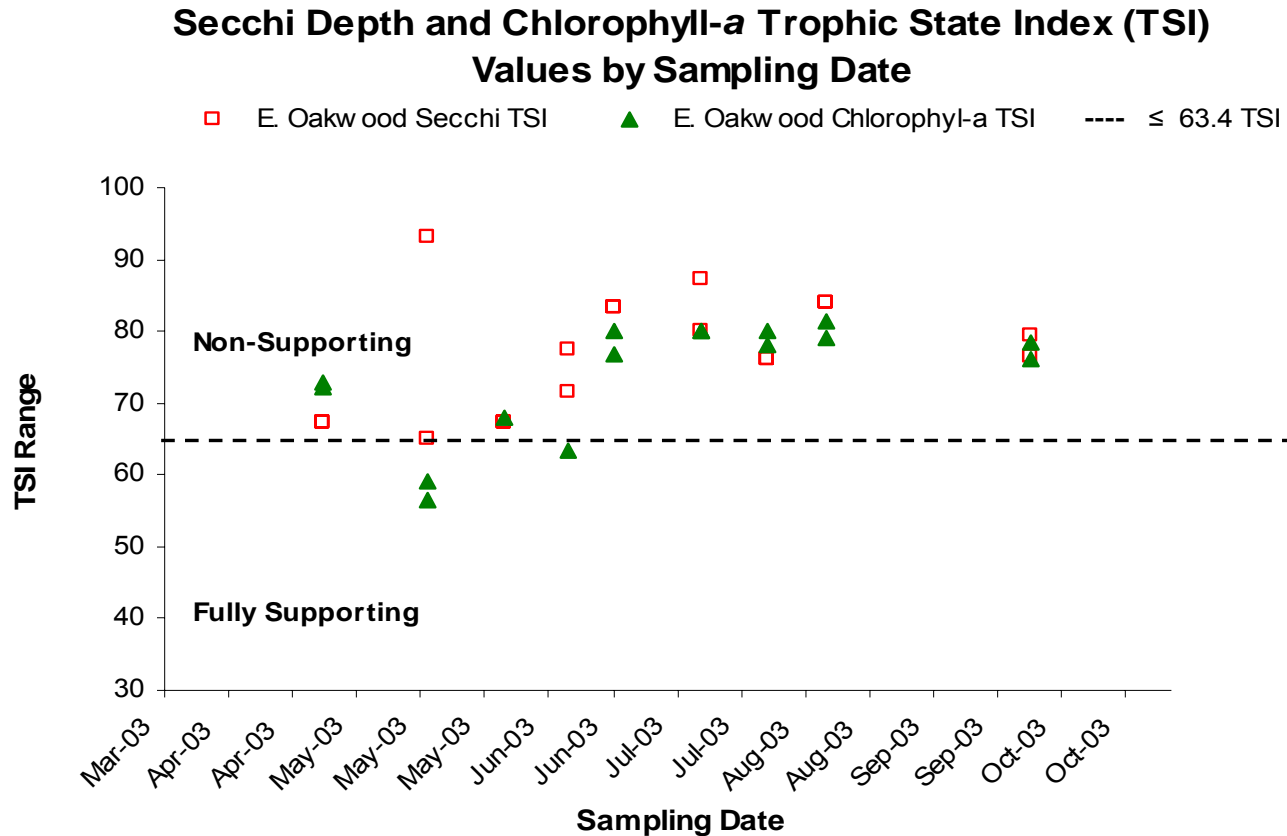


Figure 21. East Oakwood Lake TSI Values by Beneficial Use Support

In 2004, West Oakwood Lake median observed TSI values (Secchi depth plus chlorophyll-*a* TSI daily values) ranged from 59.9 to 84.1 with and overall median TSI value of 76.7. Secchi depth TSI values ranged from 66.8 to 83.2 and chlorophyll-*a* TSI values ranged from 50.1 to 85.1.

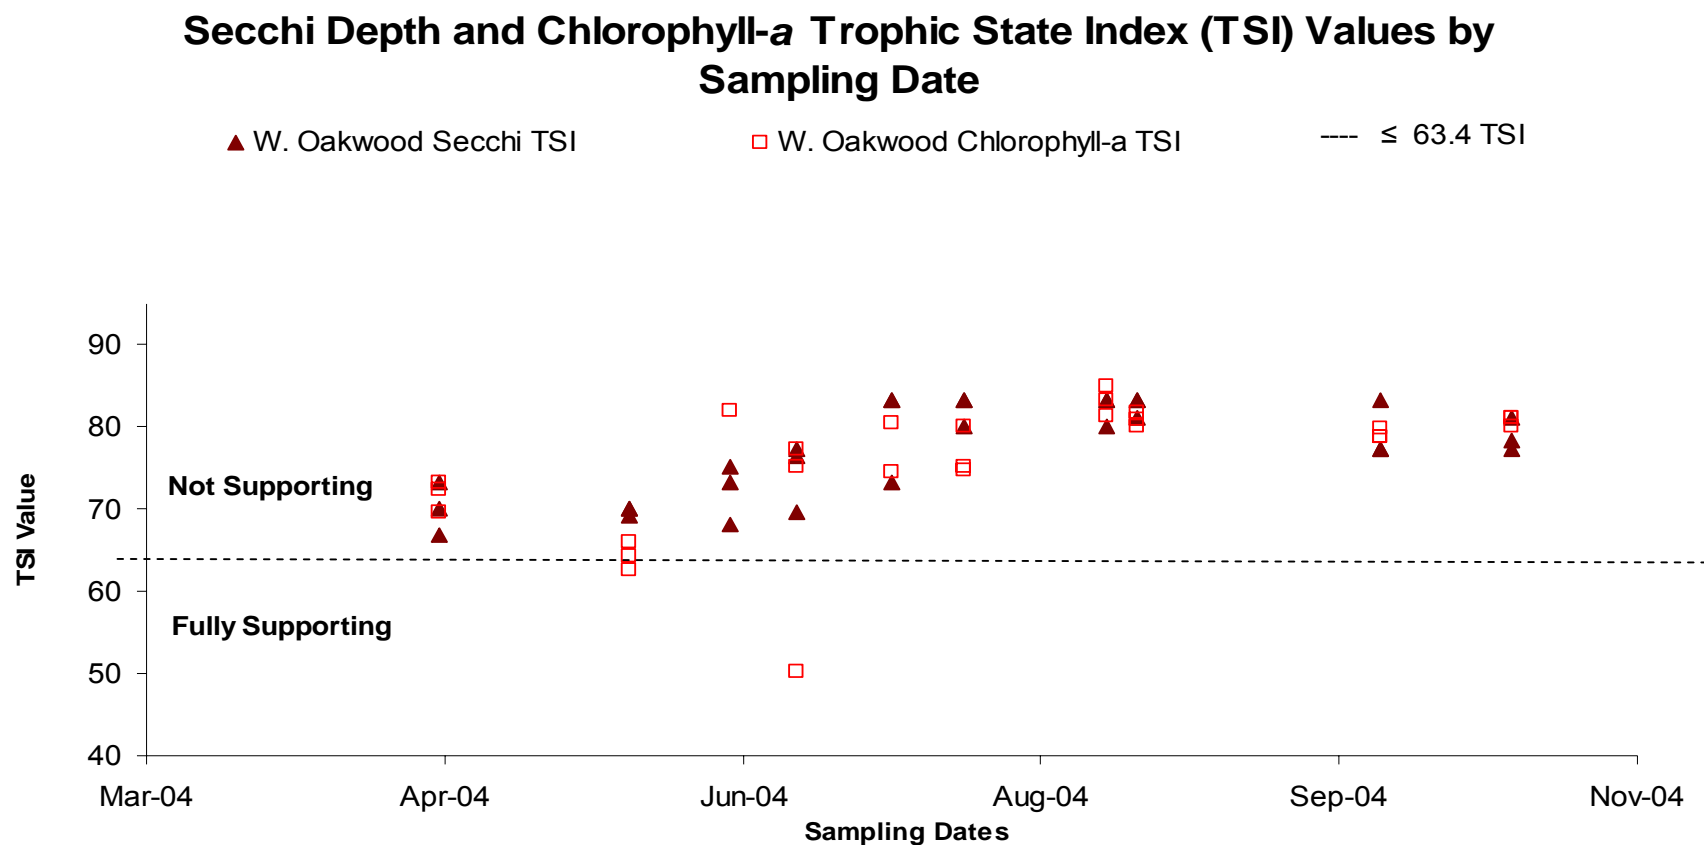


Figure 22. West Oakwood Lake TSI Values by Beneficial Use Support

ASSESSMENT OF SOURCES

Point Sources

There are no municipalities or known point sources located within this watershed.

Non-Point Sources

Agricultural Runoff

Agricultural runoff was taken into account when the AnnAGNPS model calculated sediment and nutrient loadings using different landuse scenarios. Agricultural runoff was also taken into account when AGNPS was used to perform ratings of the feedlots in the study area. This information was then incorporated in the process of prioritizing watershed areas for fecal coliform bacteria reduction.

Background Wildlife Contribution

The average contribution of fecal coliform bacteria from deer is estimated at 8.4 percent watershed wide (Table 68). This number assumes 100 percent of the fecal coliform bacteria from deer is delivered into the receiving waters. Therefore, due to its unrealistic 100 percent delivery only for deer, it will represent all wildlife contributions in this watershed for this project.

Table 68. Wildlife Contributions of Fecal Coliform Bacteria

Site	Deer/Sq. Mile	Sq. Miles	Wildlife Background CFU's					
			Deer	Days	CFU's/deer/day	CFU's	Total CFU's	% deer
T43	3.41	35.1	120	306	5.00E+08	1.83E+13	2.04E+14	9.0
T45	3.41	35.1	120	210	5.00E+08	1.26E+13	1.60E+14	7.9
Average								8.4

Failing Septic Systems Contribution

The calculated average contribution of fecal coliform bacteria from failing rural septic systems is 1.1 percent watershed wide (Table 69). This table takes into account rural households (not on a lake) and residential households (on a lake). According to the US EPA (2002) failure rates of onsite septic systems range from 10 to 20 percent, with a majority of these failures occurring with systems 30 or more years old. This percentage assumes 20 percent of the estimated rural septic systems are failing and reaching the receiving waters. The exact number of onsite septic systems in the study area is unknown. There are several seasonal homes located along the shoreline of Lake Tetonkaha. There are approximately 75 developed lots that are mainly (about 70 %) summer homes. A resort and trailer park are also located along the southern shoreline of Lake Tetonkaha (personal comm. John Gustafson, Century 21 Real Estate). Further investigation of the shoreline residences is recommended. Until there is better factual data on the conditions of the rural septic systems in this area, the 1.1 percent average will be used.

Table 69. Failing Septic System Contribution of Fecal Coliform Bacteria

Area	People/ Household	Number of Households	Failing Septic Contribution						
			20%	People	Days	CFU's/person/ day	CFU's	Total CFUs	Percent People
Rural	2.5	24	4.8	12	153	2.00E+09	3.67E+12	3.04E+14	1.2
Residential	2.5	85	17	43	153	2.00E+09	1.30E+13	1.28E+15	1.0
Average								1.1	

Modeling

FLUX Modeling

The FLUX Model (Army Corps of Engineers Loading Model) was used to estimate the nutrient loadings for each site. These loads and their standard errors (CV) were calculated (Table 70). Sample data (discharge and water quality) collected during this project were utilized in the calculation of the loads and concentrations. For each tributary site sampled, monthly loadings and concentrations for each sampled parameter is detailed in Appendices H and I.

Table 70. FLUX Yearly Loads and Concentrations by Water Quality Parameter and Site

T43				T44			
Parameter	Concentration (ppb)	FLUX Load Kg/Yr	CV	Parameter	Concentration (ppb)	FLUX Load Kg/Yr	CV
SuspSol	81908	809695	0.321	SuspSol	20346	272804	0.242
TotSol	946485	9356424	0.055	TotSol	933774	12520360	0.021
DisSol	833295	8237498	0.035	DisSol	911815	12225910	0.017
NO2NO3	763	7542	0.339	NO2NO3	69	929	0.104
NH3N	132	1303	0.200	NH3N	500	6698	0.463
Orgntr	1589	15706	0.186	Orgntr	2333	31287	0.125
TKN	1719	16994	0.187	TKN	2894	38803	0.125
TotPO4	448	4425	0.168	TotPO4	225	3019	0.147
TotDisPO4	341	3372	0.126	TotDisPO4	81	1088	0.220
Fecal	4139000	40915800	0.516	Fecal	255518	3426077	0.739
DO	9973	98588	0.186	DO	9270	124299	0.170

T45				T46			
Parameter	Concentration (ppb)	FLUX Load Kg/Yr	CV	Parameter	Concentration (ppb)	FLUX Load Kg/Yr	CV
SuspSol	16668	512776	0.451	SuspSol	51535	1012483	0.541
TotSol	841838	25898320	0.037	TotSol	780717	15338260	0.018
DisSol	822683	25309020	0.042	DisSol	765524	15039770	0.023
NO2NO3	186	5733	0.294	NO2NO3	438	8605	0.067
NH3N	182	5606	0.210	NH3N	228	4477	0.089
Orgntr	1246	38344	0.089	Orgntr	1567	30791	0.077
TKN	1432	44054	0.081	TKN	1782	35020	0.074
TotPO4	227	6991	0.109	TotPO4	374	7343	0.164
TotDisPO4	173	5327	0.056	TotDisPO4	248	4878	0.119
Fecal	1080120	33320100	0.320	Fecal	4068350	79928300	0.231
DO	6441	198706	0.195	DO	9224	181219	0.229

T48			
Parameter	Concentration (ppb)	FLUX Load Kg/Yr	CV
SuspSol	21111	101021	0.236
TotSol	1154362	5523810	0.057
DisSol	1133251	5422789	0.060
NO2NO3	460	2201	0.166
NH3N	224	1070	0.189
Orgntr	1950	9333	0.064
TKN	2201	10533	0.052
TotPO4	209	1002	0.110
TotDisPO4	126	603	0.175
Fecal	1034105	4948359	0.416
DO	10266	49123	0.145

BATHTUB Modeling

The BATHTUB model calculated the median observed and predicted TSI values (chlorophyll-*a* and Secchi depth) for East Oakwood Lake and West Oakwood Lake (Table 71). West Oakwood Lake was modeled as three segments: 1) Johnson Lake, 2) North Lake Tetonkaha, and 3) South Lake Tetonkaha. The observed TSI values are based on in-lake data. The predicted TSI values are based on in-lake data and watershed nutrient loading calculating the interaction between the lake and watershed area. North Lake Tetonkaha had the highest observed TSI value at 78.0 and a predicted TSI value of 77.3. South

Lake Tetonkaha observed TSI value was 77.4 with a predicted TSI value of 77.5. Johnson Lake observed TSI value was 77.4 with a predicted TSI value of 76.8. East Oakwood Lake observed TSI value was 67.4 with a predicted TSI value of 72.5.

Table 71. Observed and Predicted Median Trophic State Index (TSI) Values Calculated Using the BATHTUB Model

	Observed TSI	Predicted TSI
East Oakwood Lake	67.4	72.5
Johnson Lake	77.4	76.8
North Lake Tetonkaha	78.0	77.3
South Lake Tetonkaha	77.4	77.5

The BATHTUB model also calculated the response of each lake to reductions in watershed loading. Watershed nutrient loading concentrations were reduced by 10 percent increments and modeled to create an in-lake reduction curve (Figure 23).

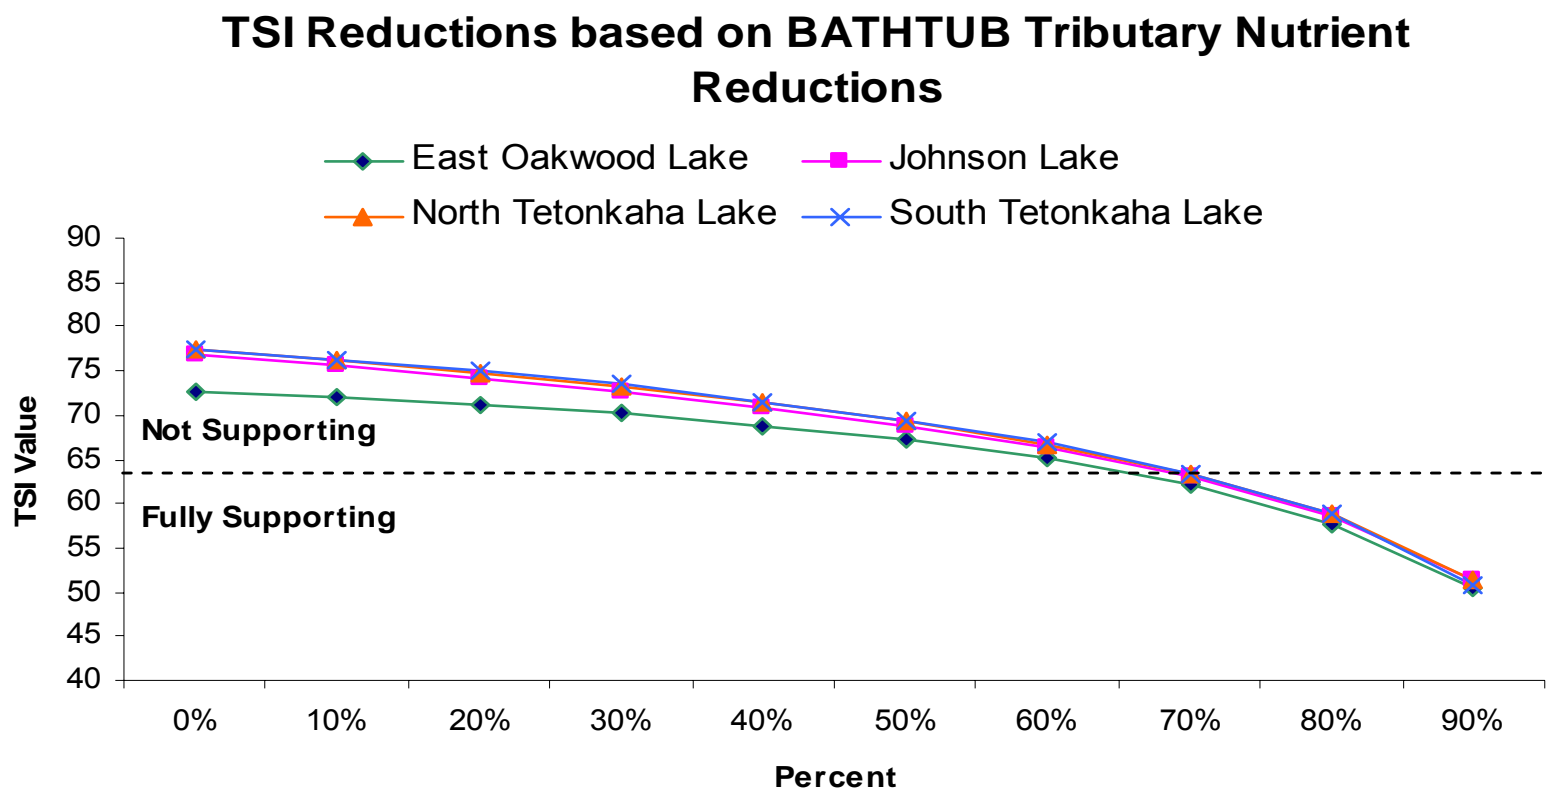


Figure 23. BATHTUB Predicted Mean TSI Reductions and Use Support of East Oakwood Lake and West Oakwood Lake

AGNPS Feedlot Model

The Brookings County Conservation District evaluated 51 feedlots within the East Oakwood Lake watershed. Seventeen of the 51 operations were rated 50 or greater (Table 72). The AGNPS feedlot model ranks the feedlots on a scale from 0 to 100 with larger numbers indicating a greater release of pollutants.

Table 72. Oakwood Lakes Watershed AGNPS Ratings

Feedlot	Watershed	Rating
1005	East Oakwood	53
1062	East Oakwood	53
1013	West Oakwood	53
1075	West Oakwood	54
1021	West Oakwood	55
1067	West Oakwood	55
1074	West Oakwood	55
1068	West Oakwood	56
1069	West Oakwood	57
1073	West Oakwood	57
1004	East Oakwood	58
1014	West Oakwood	60
1045	East Oakwood	63
1017	West Oakwood	63
1070	West Oakwood	67
1057	West Oakwood	80
1012	West Oakwood	82

The AGNPS model simulated 25 year 24 hour rainstorm events which is a model of the current requirement for the general permitting of waste storage facility construction. The model calculated the loading potential of phosphorus and chemical oxygen demand of each animal feeding operation (Table 73). The AGNPS phosphorus loading potentials ranged from 0.0 lbs. to 176 lbs. in the East Oakwood Lake watershed and from 0.0 lbs. to 713 lbs in the West Oakwood Lake watershed, for any single animal feeding operation.

Table 73. AGNPS Model Outputs for Feedlots in the Oakwood Lakes Watershed

Site	Density	Mean PO4 (ppm)	Mean COD (ppm)	Mean PO4 (lbs)	Mean COD (lbs)	Sum Phos (ppm)	Sum COD (ppm)	Sum Phos (lbs)	Sum COD (lbs)
BSR	1	13	634	98	4864	13	634	98	4864
T43	11	24	1280	83	4345	268	14083	911	47790
T44	9	39	1920	134	6808	354	17277	1210	61269
T45	6	4	215	25	1209	23	1291	152	7253
T46	11	13	827	46	2936	142	9094	511	32291
T48	13	18	1305	66	4523	239	16964	852	58793

AnnAGNPS Modeling

The AnnAGNPS Model was used to compare sediment, nitrogen, and phosphorus loadings within the watershed during 1-year, 10-year, and 25-year simulated periods. Several landuse scenarios were modeled including 1) present watershed condition, 2) changing cropland (corn and soybeans) to grass, 3) removing the feedlots, 4) removing any impoundments, and 5) changing cropping practices to no-tillage.

Critical phosphorus cells (> 2 lbs/acre/year) and critical nitrogen cells (> 3 lbs/acre/year) during a 10-year simulated period were identified (Table 74). Best management practices (BMPs) were applied to determine the amount of reduction that would be possible. Appendix O lists the top five percent AnnAGNPS cells where BMPs were the most effective.

Table 74. Critical Phosphorus and Nitrogen Cells in the Oakwood Lake Watershed

Phosphorus - - Critical Cells			Nitrogen Critical Cells		
Cell	Watershed	lb/acre/yr	Cell	Watershed	lb/acre/yr
3333	WOL	28.469	3333	WOL	115.34
3332	WOL	6.928	2603	EOL	18.816
3842	WOL	6.298	5492	WOL	8.696
3793	WOL	6.098	2622	EOL	7.849
3323	EOL	6.037	3793	WOL	7.258
4413	WOL	5.519	3282	EOL	7.239
3233	EOL	5.205	4413	WOL	7.149
4032	WOL	5.131	3842	WOL	7.054
5633	WOL	5.103	5633	WOL	6.744
5391	WOL	5.084	5632	WOL	6.335
5632	WOL	5.014	5643	WOL	5.995
5643	WOL	4.882	3053	EOL	5.479
5032	WOL	4.782	3332	WOL	5.453
4912	WOL	4.629	5391	WOL	4.893
2603	EOL	4.591	2683	EOL	4.86
3223	EOL	4.427	4643	WOL	4.607
3592	WOL	4.397	5032	WOL	4.532
5663	WOL	4.361	4032	WOL	4.445
4992	WOL	4.327	2743	EOL	4.386
5362	WOL	4.309	4043	WOL	4.343
4043	WOL	4.291	3273	EOL	4.313
3843	WOL	4.286	5663	WOL	4.198
3992	WOL	4.257	2713	EOL	4.18
3802	WOL	4.25	3323	EOL	3.943
3832	WOL	4.25	6173	EOL	3.868
3803	WOL	4.218	5182	WOL	3.801
5182	WOL	3.424	3233	EOL	3.554
2792	EOL	3.237	4692	WOL	3.461
2782	EOL	3.234	4912	WOL	3.451
5492	WOL	2.802	5362	WOL	3.418
2743	EOL	2.536	4992	WOL	3.397
4431	WOL	2.197	4503	WOL	3.388
2523	EOL	2.081	3592	WOL	3.383
			2642	EOL	3.323
			2562	EOL	3.298
			3241	EOL	3.214
			2733	EOL	3.211
			3843	WOL	3.194
			5783	WOL	3.11
			3553	WOL	3.089
			3992	WOL	3.082
			3003	EOL	3.079
			3802	WOL	3.054
			3803	WOL	3.046
			3832	WOL	3.046

** Bolded Cells contain a Feedlot

Table 75 shows overall watershed results of sediment, nitrogen, and phosphorus for a 10-year simulation period. Feedlot removal and no-tillage application were scenarios applied watershed-wide. As indicated, feedlots in the watershed are not contributing as much to nutrient problems as compared to agricultural practices.

Table 75. Modeled Percent Reductions in Nutrients and Sediment After BMP Application

West Oakwood Lake Watershed - 10 Year Simulation Period							
Scenario	Sediment Load (tons/acre/year)	Nitrogen Load (mass) (lb/ac/year)	Attached Nitrogen Load (lb/ac/yr)	Dissolved Nitrogen Load (lb/ac/yr)	Total Phosphorus Load (mass) (lb/ac/yr)	Attached Phosphorus Load (lb/ac/yr)	Dissolved Phosphorus Load (lb/ac/yr)
Present Condition	0.0000	427	201	226	249	46	203
No Feedlots	0.0000	414	193	221	247	45	202
No Tillage	0.0000	344	106	263	233	36	197
Percent Difference from Present Condition							
No Feedlots	0	3 ↓	4 ↓	2 ↓	1 ↓	2 ↓	1 ↓
No Tillage	0	19 ↓	47 ↓	14 ↑	7 ↓	23 ↓	3 ↓
** based on 39,578 watershed acres							


East Oakwood Lake Watershed - 10 Year Simulation Period							
Scenario	Sediment Load (tons/acre/year)	Nitrogen Load (mass) (lb/ac/year)	Attached Nitrogen Load (lb/ac/yr)	Dissolved Nitrogen Load (lb/ac/yr)	Total Phosphorus Load (mass) (lb/ac/yr)	Attached Phosphorus Load (lb/ac/yr)	Dissolved Phosphorus Load (lb/ac/yr)
Present Condition	0.0000	166	85	81	84	20	64
No Feedlots	0.0000	159	79	79	84	20	64
No Tillage	0.0000	179	78	91	72	13	58
Percent Difference from Present Condition							
No Feedlots	0	5 ↓	7 ↓	2 ↓	1 ↑	2 ↓	1 ↓
No Tillage	0	7 ↑	8 ↓	11 ↑	15 ↓	33 ↓	10 ↓
** based on 13,397 watershed acres							

Flow Duration Intervals

Flow duration intervals were constructed for each of the tributary sites to assess that status of fecal coliform bacteria and total suspended solids. However, none of the tributaries are assigned numeric standards for these parameters. But each lake is assigned beneficial uses which are associated with numeric standards for fecal coliform bacteria and total suspended solids. These flow duration intervals could be used to assess the amount of bacteria and sediment load the inlets and outlets are carrying in comparison to the numeric standard that is applicable for the lakes. Sample data collected during this project, as well as by the SD DENR were utilized in the calculation of the loadings.

Although none of the inlets are assigned water quality standards for fecal coliform bacteria or for total suspended solids, the target line is based on the numeric criteria related to the lakes or the Big Sioux River. The outlet of East Oakwood Lake (Sites T45 and T46) was graphed based on the numeric standard related to the Big Sioux River, because this stream eventually drains into the river. The target line on the fecal coliform bacteria graphs for the inlet sites T43, T44, and T48 reflect the 400 cfu/100mL numeric standard associated with beneficial uses (7) Immersion Recreation and (8) Limited Contact Recreation (Figures 24, 25, and 26). The target line on the fecal coliform bacteria graphs for sites T45 and T46 reflect the 2000 cfu/100mL numeric standard associated with beneficial use (8) Limited Contact Recreation assigned to the Big Sioux River (Figures 27 and 28). The target line on the total suspended solids graphs reflect the 158 mg/L numeric standard associated with beneficial use (5) Warmwater Semi-permanent Fish Life Propagation assigned to both the Big Sioux River and the lakes (Figures 29, 30, 31, 32, and 33).


T43* – East Oakwood Lake Trib 1
(Target set at 400 cfu/100mL)

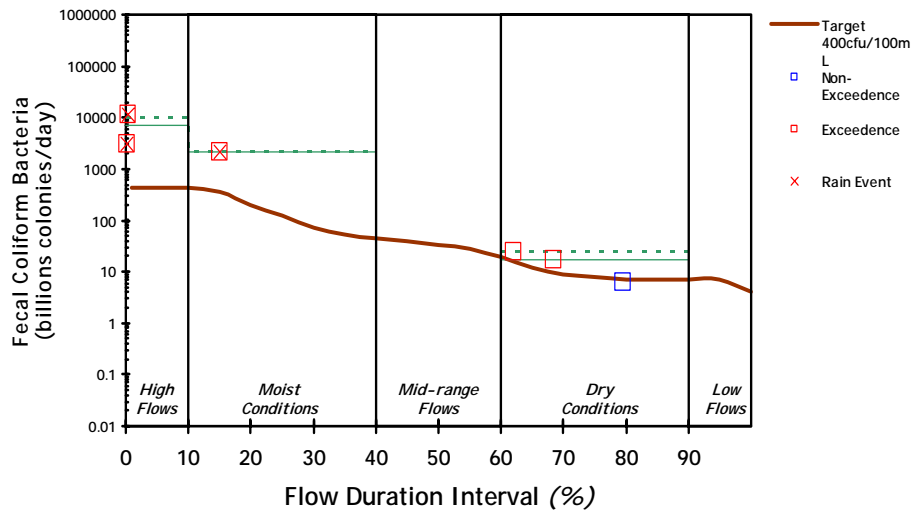

* numeric standard does not apply

Figure 24. Fecal Coliform Bacteria Flow Duration Interval of Inlet (T43)


T44* – East Oakwood Lake Trib 2
(Target set at 400 cfu/100mL)

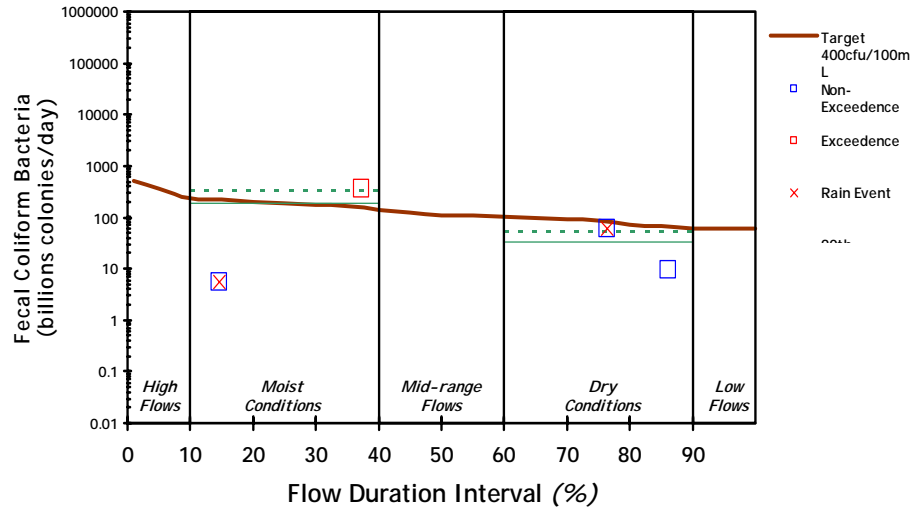

* numeric standard does not apply

Figure 25. Fecal Coliform Bacteria Flow Duration Interval of Inlet (T44)


T45* – East Oakwood Lake Outlet 1
(Target set at 2000 cfu/100mL)

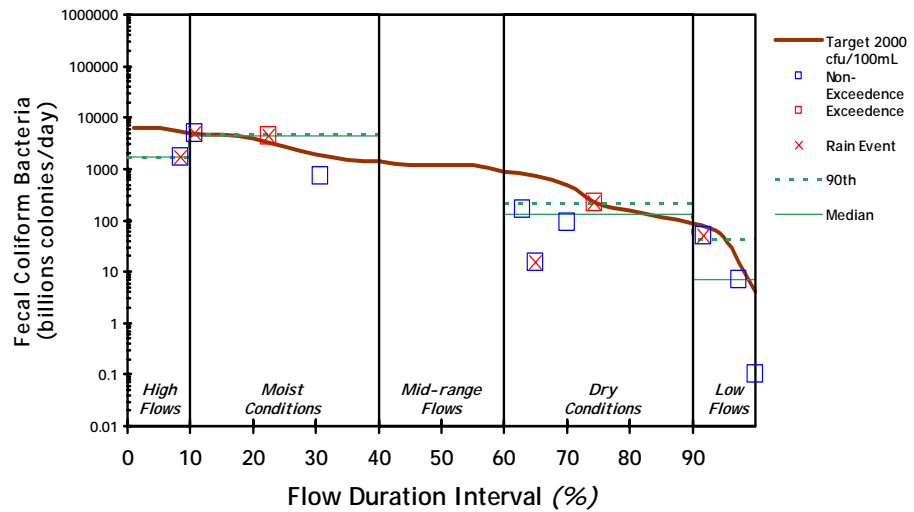

* numeric standard does not apply

Figure 26. Fecal Coliform Bacteria Flow Duration Interval of Outlet (T45)


T46* – East Oakwood Lake Outlet 2
(Target set at 2000 cfu/100mL)

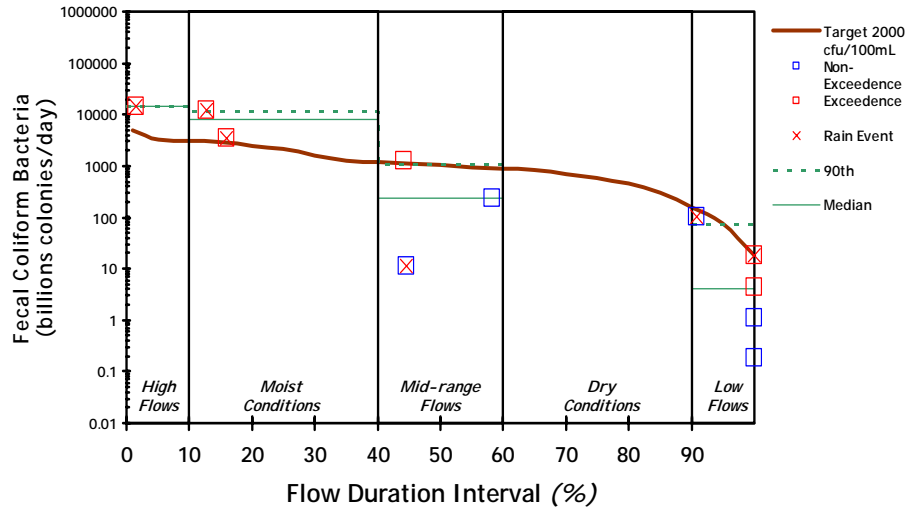

* numeric standard does not apply

Figure 27. Fecal Coliform Bacteria Flow Duration Interval of Outlet (T46)

T48* – East Oakwood Lake Inlet 3
(Target set at 400 cfu/100mL)

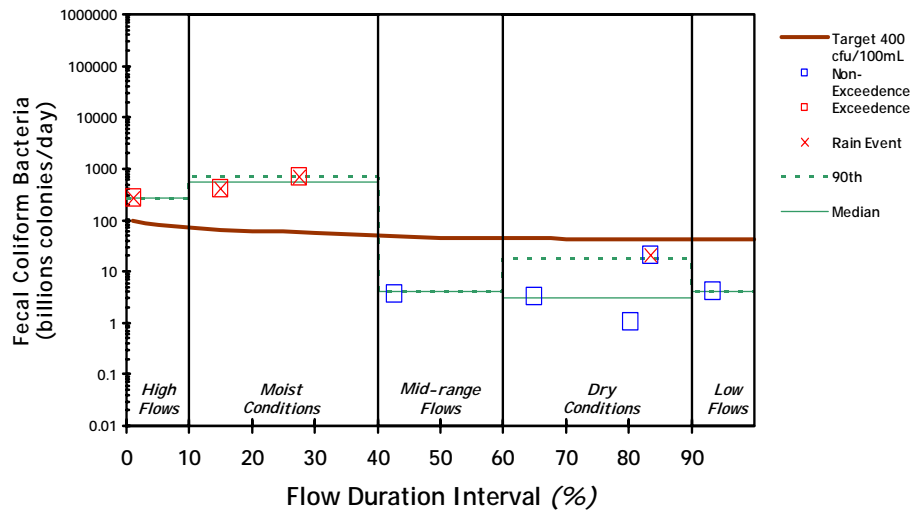

* numeric standard does not apply

Figure 28. Fecal Coliform Bacteria Flow Duration Interval of Inlet (T48)

Oakwood Lake Inlet (T43)
 2001-2002 EDWDD Monitoring Data
 Total Suspended Solids

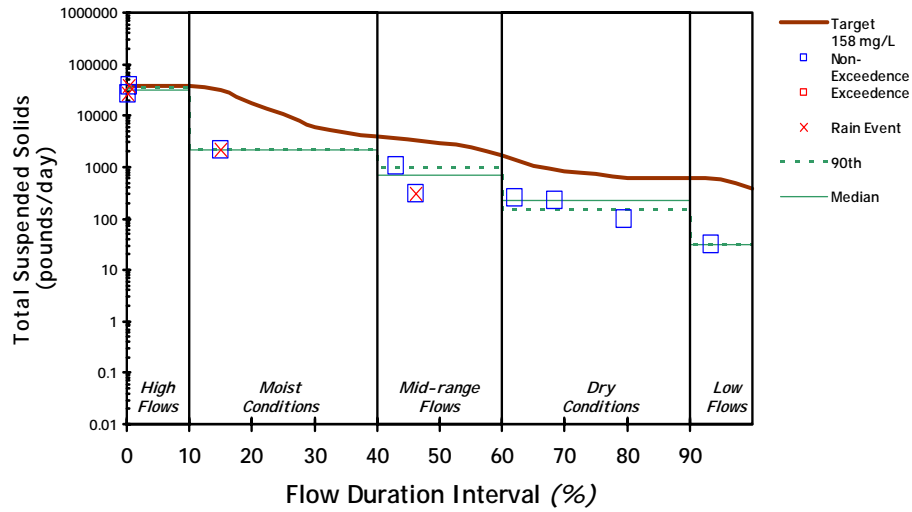


Figure 29. Total Suspended Solids Flow Duration Interval of Inlet (T43)

Oakwood Lake Inlet (T44)
 2001-2002 EDWDD Monitoring Data
 Total Suspended Solids

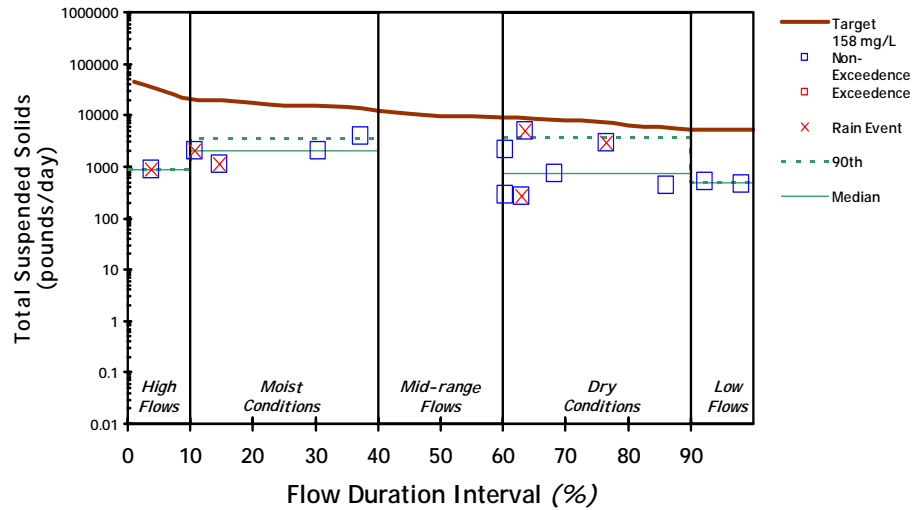


Figure 30. Total Suspended Solids Flow Duration Interval of Inlet (T44)

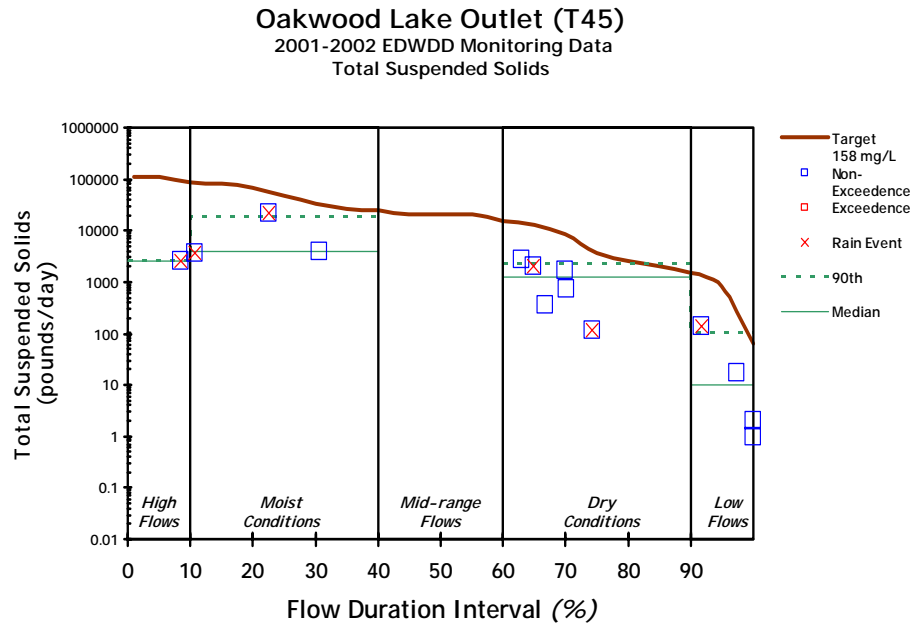


Figure 31. Total Suspended Solids Flow Duration Interval of Outlet (T45)

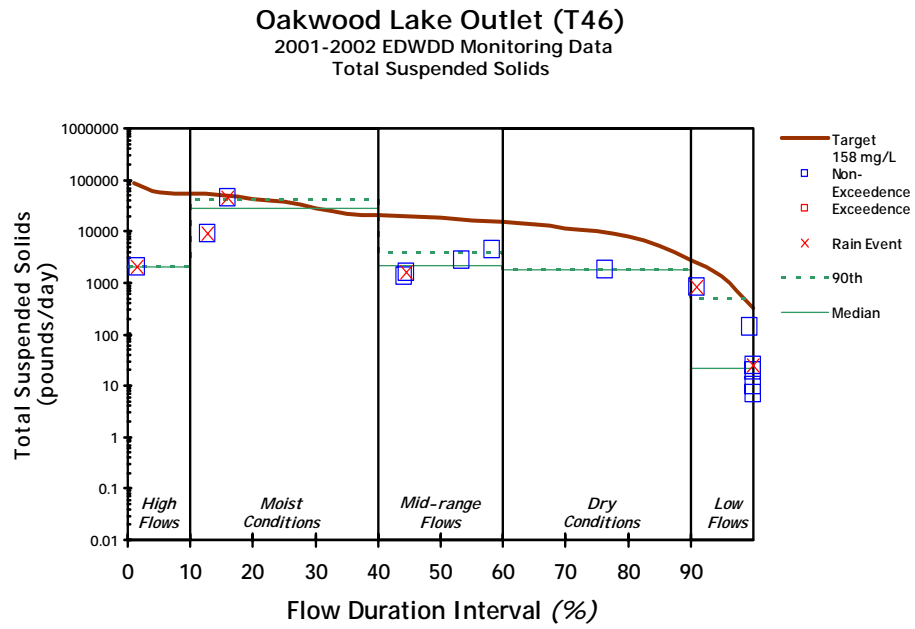


Figure 32. Total Suspended Solids Flow Duration Interval of Outlet (T46)

Oakwood Lake Inlet (T48)
 2001-2002 EDWDD Monitoring Data
 Total Suspended Solids

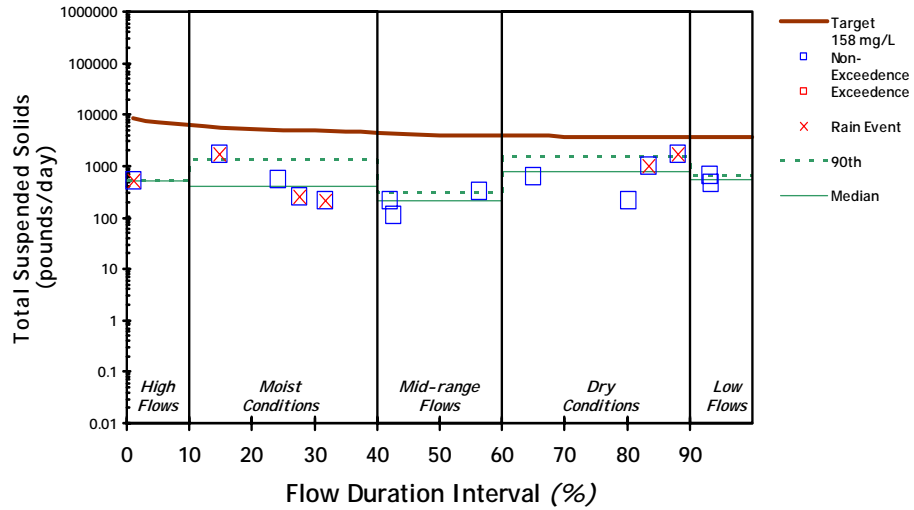


Figure 33. Total Suspended Solids Flow Duration Interval of Inlet (T48)

Site T43 and Site T48 are inlets to West Oakwood Lake. The fecal flow duration intervals for these two sites show they are receiving fecal matter during rain events. This could indicate feedlot runoff problems. There are also high fecal coliform amounts at Site T46 which is a site on the outlet of East Oakwood Lake near the Big Sioux River.

ANALYSIS AND SUMMARY

WEST OAKWOOD LAKE WATERSHED (Johnson Lake and Lake Tetonkaha)

This map (Figure 34) shows the location of the area designated as the West Oakwood Lake watershed. The watershed consists of the three connected lake segments Johnson Lake, North Lake Tetonkaha, and South Lake Tetonkaha. This area encompasses approximately 40,912 acres, with West Oakwood Lake itself covering approximately 702 surface acres.

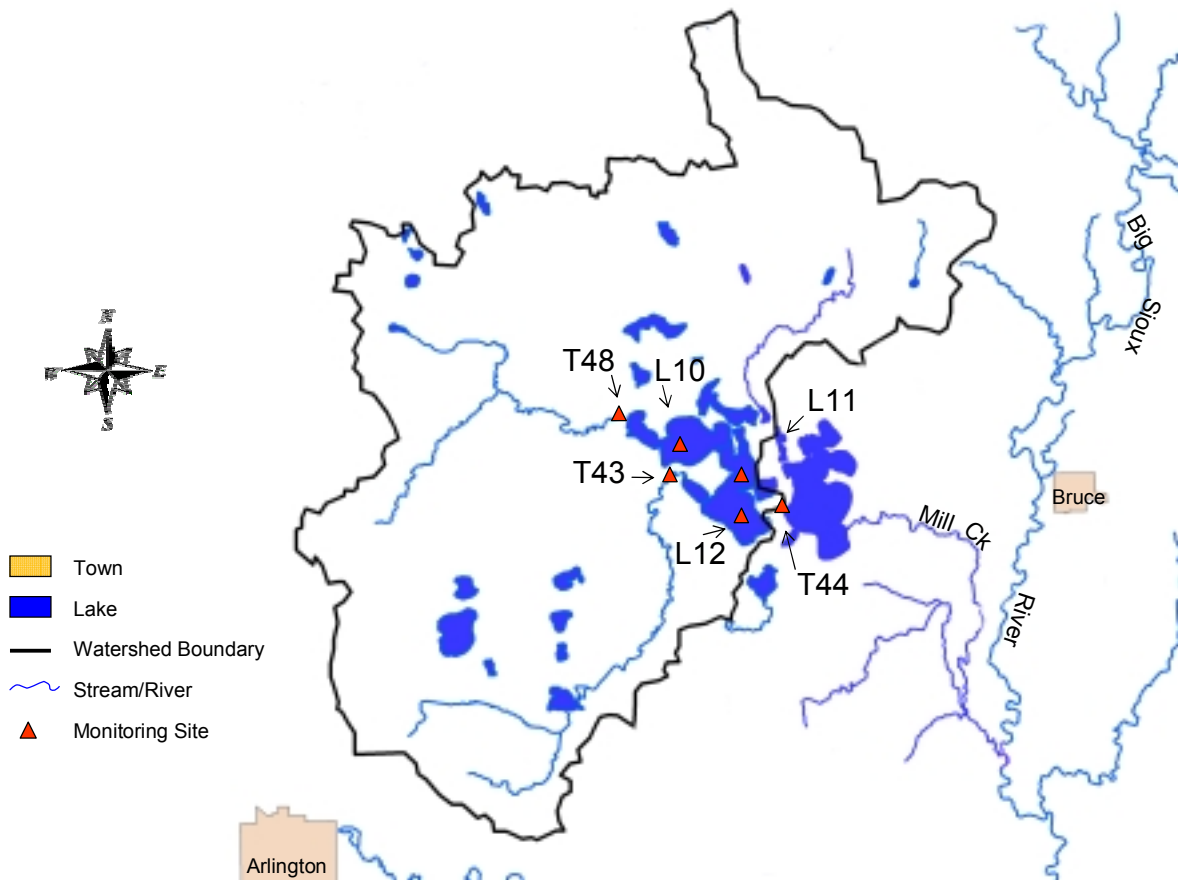


Figure 34. West Oakwood Lake Watershed Map

Landuse Summary

The West Oakwood Lake watershed is located within the Northern Glaciated Plains level III ecoregion and characterized by the level IV ecoregion of the Big Sioux Basin. This is an area of rolling terrain and an incised stream drainage network. The rolling areas are extensively tilled for small grains, corn, sunflowers, and soybeans. Most of the area is cropland, such as corn and soybeans, and some areas are grassland and pastureland. There were 34 animal feeding operations consisting of 4,336 animals assessed in the West Oakwood Lake watershed. The majority were cattle operations (94 percent) and the remaining were hog operations. Several seasonal homes are located around the southern end of Lake Tetonkaha.

Water Quality Summary

Beneficial uses assigned to the three in-lake sites (Site L10 -Johnson Lake and Sites L11 and L12 - Lake Tetonkaha) are 5, 7, 8, and 9.

- (5) Warmwater Semi-permanent Fish Life Propagation
- (7) Immersion Recreation
- (8) Limited Contact Recreation
- (9) Fish and Wildlife Propagation, Recreation and Stock Watering

Beneficial uses assigned to the two inlets and the one outlet of West Oakwood Lake are 9 and 10.

- (9) Fish and Wildlife Propagation, Recreation and Stock Watering
- (10) Irrigation

Based on the results from the water quality criteria established by the SD DENR as described in Results Section under Water Quality Monitoring, all the in-lake sites and the inlets/outlet are meeting the water quality criteria to support their beneficial uses.

Chlorophyll is the photosynthetic pigment in all green plants and can be a measure of the amount of algae present in a lake. Phosphorus is the primary nutrient algae use for growth. Phosphorus is usually the limiting nutrient in the growth of algae. Therefore, increases in phosphorus should yield increases in algae mass. In-lake monitoring indicates a correlation ($R^2=0.4888$ at Site L10, $R^2=0.4967$ at Site L11 and $R^2=0.2716$ at Site L12) between chlorophyll-*a* and total phosphorus at all three in-lake sites (Figures 35 and 36).

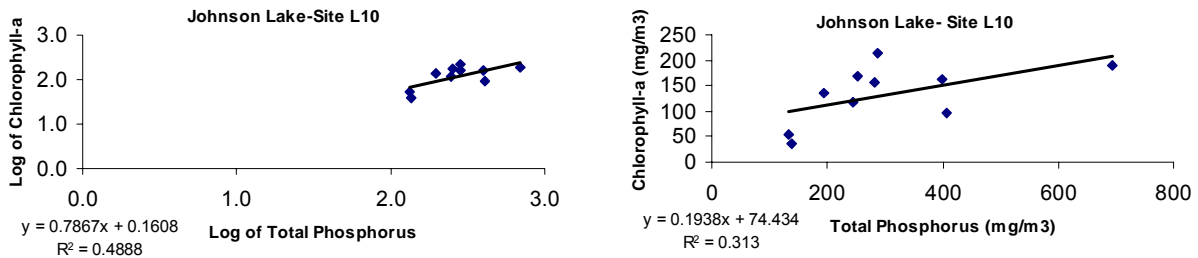


Figure 35. Johnson Lake Total Phosphorus to Chlorophyll-*a* Relationship

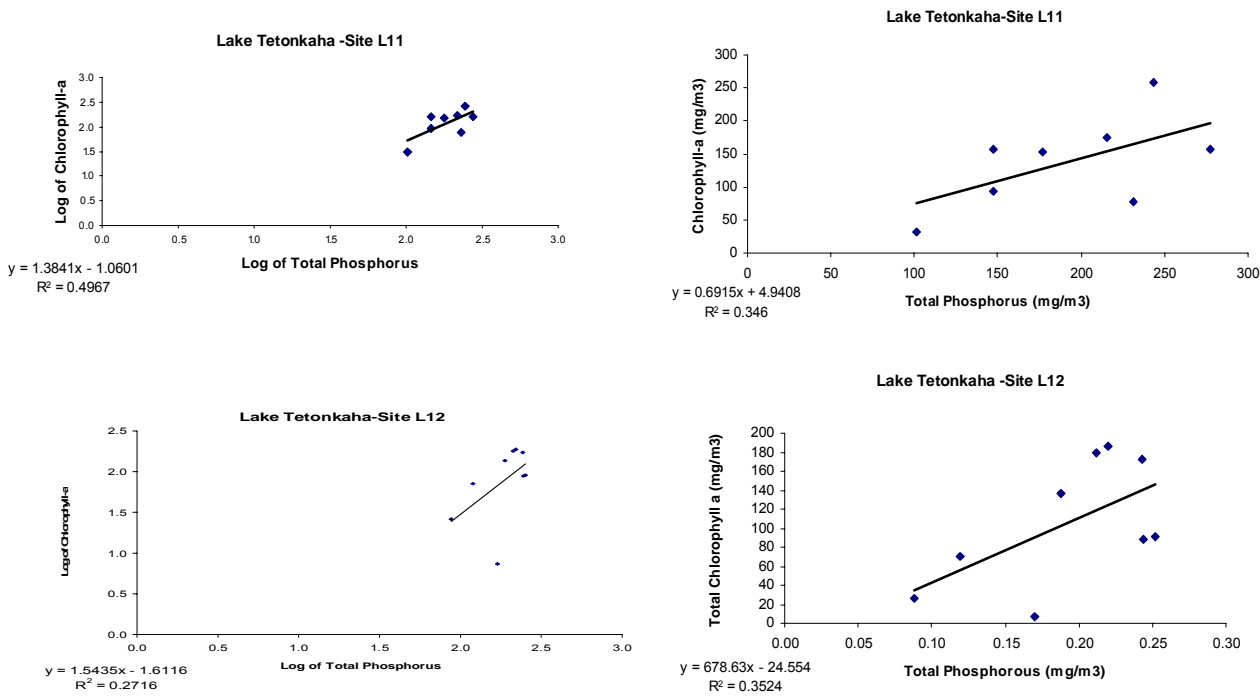


Figure 36. Lake Tetonkaha Total Phosphorus to Chlorophyll-a Relationship

The maximum in-lake chlorophyll-a concentration for Johnson Lake was 213.35 mg/m³ collected at Site L10 on August 12, 2004 (Figure 37). The average chlorophyll-a concentration was 126.7 mg/m³ and the median concentration was 135.88 mg/m³. Lake Tetonkaha maximum in-lake chlorophyll-a concentration was 258.23 mg/m³ collected at Site L11 on August 12, 2004 (Figure 38). The average chlorophyll-a concentration was 121.18 mg/m³ and the median concentration was 136.33 mg/m³.

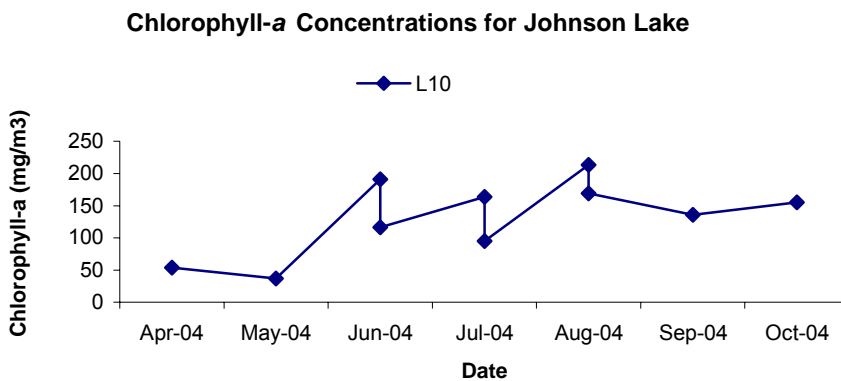


Figure 37. Johnson Lake Chlorophyll-a Concentrations (mg/m³)

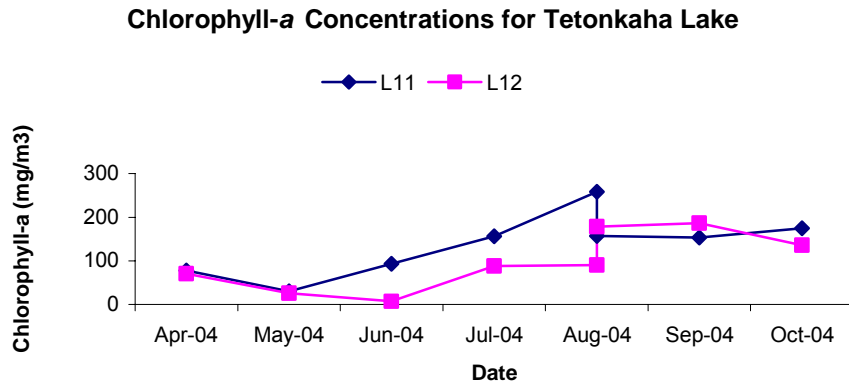


Figure 38. Lake Tetonkaha Chlorophyll-*a* Concentrations (mg/m³)

Water clarity is measured using a Secchi disk. The deeper the Secchi disk can be seen, the clearer the water. Indicatively, water clarity decreases as the amount of chlorophyll-*a* increases, as shown by Figures 39 and 40. Secchi depth in Johnson Lake ranged from 0.20 meters to 0.63 meters ($\bar{x} = 0.31$ meters) and Secchi depth in Lake Tetonkaha ranged 0.20 meters to 0.57 meters ($\bar{x} = 0.32$ meters).

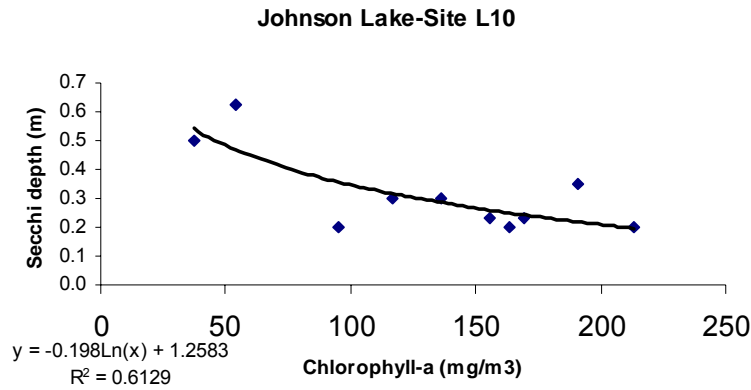


Figure 39. Johnson Lake Chlorophyll-*a* to Secchi Depth Relationship

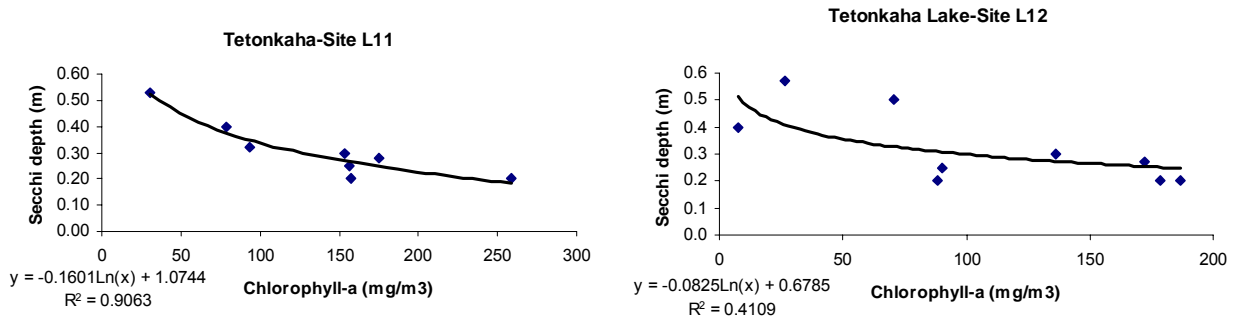


Figure 40. Lake Tetonkaha Chlorophyll-*a* to Secchi Depth Relationship

For an organism such as algae to survive in a given environment, it must have the necessary nutrients and environment to maintain life and successfully reproduce. If an essential life component approaches a critical minimum, this component will become the limiting factor (Odum 1959). Nutrients such as phosphorus and nitrogen are most often the limiting factors in highly eutrophic lakes. Typically, phosphorus is the limiting nutrient for algal growth. However, in many highly eutrophic lakes with an overabundance of phosphorus, nitrogen can become the limiting factor. Both Johnson Lake and Lake Tetonkaha are phosphorus-limited lakes as shown in Figures 41 and 42.

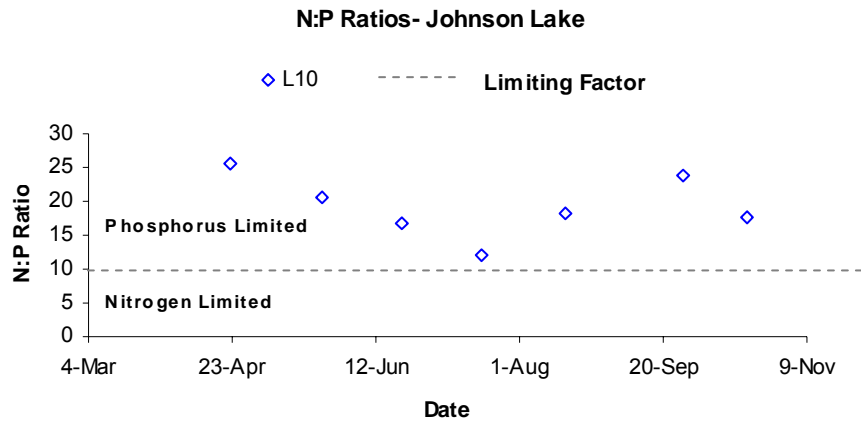


Figure 41. Johnson Lake Total Nitrogen to Total Phosphorus Ratio

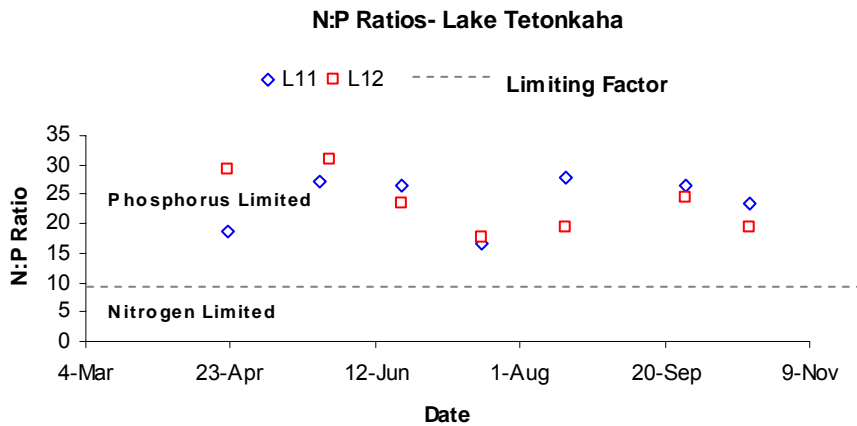


Figure 42. Lake Tetonkaha Total Nitrogen to Total Phosphorus Ratio

In 2003, lake levels in Lake Tetonkaha dropped approximately 1.1 ft between the months of May and October. In 2004, the lake levels between May and October rose approximately 0.75 ft (Figure 43). As shown by Figure 44, lake levels in Johnson Lake rose approximately 0.45 ft in 2004.

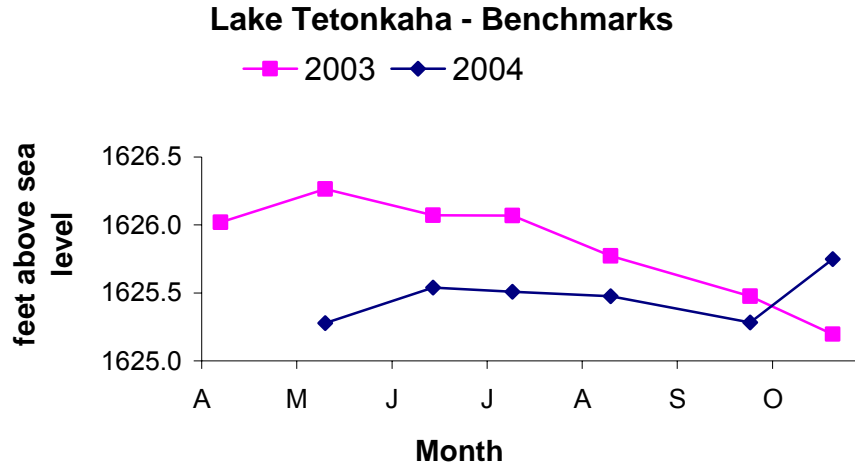


Figure 43. 2003 and 2004 Lake Level Readings of Lake Tetonkaha

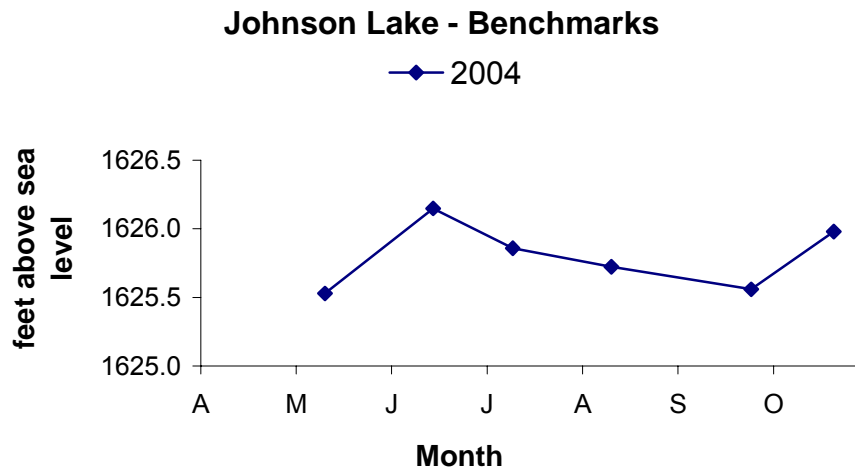


Figure 44. 2004 Lake Level Readings of Johnson Lake

Hydrologic Budget

Hydrologic Budget

A hydrologic budget explains the amount of water entering and leaving a lake. In theory, all inflow of water must equal all outflow during the course of the hydrologic cycle (Table 76). The inflow sources

during our study period include precipitation, groundwater, and tributary flow. For the purpose of this study, groundwater was estimated to help balance this equation.

Table 76. Hydrologic Budget for West Oakwood Lake

Inflow Sources	Load (acre-ft)	Outflow Sources	Load (acre-ft)
Surface Area = 691.95 acres			
Precipitation	1,439.26	Evaporation	1,404.66
Tributaries (T43 and T48)	9,153.42	Tributary (T44)	10,746.15
Groundwater	1,755.34	Change in Storage	197.21
Totals	12,348.02		12,348.02

In order to calculate the precipitation inputs, 2003 rainfall data were taken from the weather station located in Brookings County. The amount of precipitation in inches was converted to feet and multiplied by the surface area of West Oakwood Lake (2.08 ft × 691.95 acres). The tributaries (T43 and T48) flows were estimated using the FLUX model from water quality data collected in 2001 and 2002.

The outflow of West Oakwood Lake included evaporation, tributary flow, and change in storage. West Oakwood Lake flows into East Oakwood Lake through a series of culverts. A Thalimedes OTT hydrometer was setup on a culvert at Site T44 where the majority of the outflow from West Oakwood Lake occurred. The phosphorus loading at Site T44 was estimated using the FLUX model. Land evaporation data was collected from a weather station located two miles northeast of Brookings (SDSU 2003). In order to change the land evaporation data into surface water evaporation, monthly evaporation amounts were multiplied by the Class A monthly land pan coefficient (0.8) for the Midwestern United States (Fetter 1998). The monthly evaporation amounts were added, converted to feet, and multiplied by the surface area of West Oakwood Lake.

After all of the hydrologic outflows were subtracted from the inputs, 1,755.34 acre-ft were unaccounted for. Since groundwater is difficult to estimate and was not yet included as a source, this amount was assumed to be from groundwater contribution.

Sediment and Nutrient Budgets

Suspended Solids Budget

The estimated total suspended solids loading from West Oakwood Lake watershed runoff was derived using the FLUX model. TSS runoff loading from West Oakwood Lake tributaries is estimated as 910,716 kg. After outflow was subtracted from inflows, total yearly load of sediment remaining in the lake was estimated at 637,911.7 kg.

Nitrogen Budget

The sources of total nitrogen entering West Oakwood Lake included tributaries and groundwater. Atmospheric nitrogen was not included in the inflow estimates. As atmospheric nitrogen enters a lake, it is utilized by different species of algae; therefore, making it impossible to calculate. Total nitrogen concentrations are derived from adding TKN concentrations to nitrate-nitrite concentrations. The amount of total nitrogen loading into West Oakwood Lake was 39,826.29 kg (Figure 45). Of the 39,826.29 kg, the tributaries contributed 94 percent. The contribution from each tributary was derived from the FLUX

model. After the outflow was subtracted from the inflow, the remainder became the estimated total yearly nitrogen load (93.99 kg) retained within the lake.

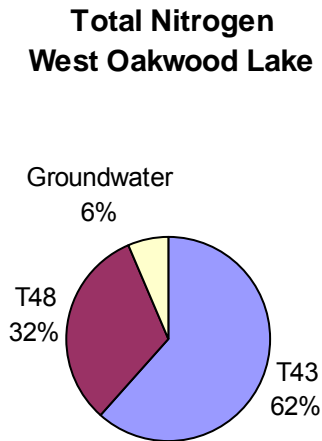


Figure 45. West Oakwood Lake Total Nitrogen Load

Since nitrogen is water soluble it is very difficult to estimate its contribution from groundwater. For the purpose of this study, a total nitrogen concentration of 1.18 mg/L was used for groundwater inflow. The concentration was averaged from South Dakota Geological Survey (SDGS) monitored wells. Groundwater contribution was estimated to be six percent of the nitrogen loading. The following calculations were used to find the groundwater contribution.

Hydrologic load converted to m³:

$$1,755 \text{ acre-ft} \times 1,234 = 2,166,089.6 \text{ m}^3$$

Convert m³ to liters:

$$2,166,089.6 \text{ m}^3 \times 1,000 = 2,166,089,560 \text{ L}$$

Groundwater nitrogen average concentration multiplied by hydrologic load (L):

$$1.18 \text{ mg/L} \times 2,166,089,560 \text{ L} = 2,555,985,680.8 \text{ mg}$$

Total groundwater nitrogen load converted to kg:

$$2,555,985,680.8 \text{ mg} \div 1,000,000 = 521.3 \text{ kg}$$

Phosphorus Loadings

Total phosphorus inflow to West Oakwood Lake during the sampling seasons was approximately 5,536.1 kg. Inflow to West Oakwood Lake included tributaries, precipitation, and groundwater (Figure 46). Of the 5,536.1 kg, tributaries contributed 98 percent of the total loading with 4,425 kg coming from Site T43 and 1,002 kg coming from Site T48. Tributary loadings were derived using the FLUX model. After the

outflow was subtracted from the inflow, the remainder became the estimated total yearly phosphorus load (491 kg) retained within the lake.

Groundwater was responsible for less than one percent of the total phosphorus delivered to the lake. Groundwater contribution was estimated by multiplying the mean total phosphorus concentration (0.026 mg/L) from groundwater samples collected (from SDGS), by the amount of groundwater discharged into the lake (1,755.34 acre-ft). The following calculations were used to find the groundwater contribution:

Hydrologic load converted to m³:

$$1,755.34 \text{ acre-ft} \times 1,234 = 2,166,089.56 \text{ m}^3$$

Converted to m³ to liters:

$$2,166,089.56 \text{ m}^3 \times 1,000 = 2,166,089,560 \text{ L}$$

Groundwater phosphorus average concentration multiplied by hydrologic load (L):

$$0.026 \text{ mg/L} \times 2,166,089,560 \text{ L} = 56,318,328.56 \text{ mg}$$

Total groundwater phosphorus load converted to kg:

$$56,318,328.56 \text{ mg} \div 1,000,000 = 56.32 \text{ kg}$$

The phosphorus load from precipitation (1,439.3 acre-ft) was multiplied by 0.03 mg/L (the average phosphorus content often found in non-populated regions) to determine the phosphorus contribution from precipitation (Wetzel 1975). Estimated concentrations of phosphorus from precipitation were estimated to be less than one percent of the total phosphorus load. The following calculations were used to find total precipitation phosphorus load:

Hydrologic load converted to m³:

$$1,439.3 \text{ acre-ft} \times 1,234 = 1,776,046.84 \text{ m}^3$$

Converted m³ to liters:

$$1,776,046.84 \text{ m}^3 \times 1,000 = 1,776,046,840 \text{ L}$$

Precipitation phosphorus average concentration multiplied to hydrologic load (L):

$$0.03 \text{ mg/L} \times 1,776,046,840 \text{ L} = 53,281,405.2 \text{ mg}$$

Total precipitation phosphorus load converted to kg:

$$53,281,405.2 \text{ mg} \div 1,000,000 = 53.28 \text{ kg}$$

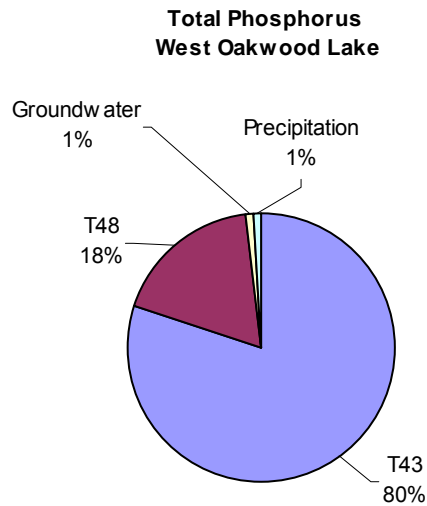


Figure 46. West Oakwood Lake Total Phosphorus Load

Total Dissolved Phosphorus

The estimated total dissolved phosphorus loading from West Oakwood Lake watershed runoff was derived using the FLUX model. The total dissolved phosphorus loading from both inlets is 3,975.3 kg. After all the inputs were subtracted from the output, the remainder became the estimated total yearly load of total dissolved phosphorus (2,887.6 kg) retained within the lake.

Biological and Physical Habitat Summary

Phytoplankton (Algae) Data Summary

Planktonic algae were collected once in June and once in August at both Johnson Lake and Lake Tetonkaha. Johnson Lake consisted of 52 species and 41 genera. Lake Tetonkaha consisted of 46 species and 39 genera. Algae were divided into four separate divisions – flagellated algae, blue-green algae, diatoms, and non-motile green algae. The most diverse group in both lakes was the non-motile green algae with 20 species in Johnson Lake and 15 species in Lake Tetonkaha. However, the blue-green algae exhibited the most abundance in both lakes, with *Oscillatoria agardhii* being the most dense (Figures 47 and 48). An oversupply of nutrients, especially phosphorus, will result in the excessive growth of these species. In June, three noxious species were identified in Johnson Lake and Lake Tetonkaha, *Oscillatoria agardhii*, *Anabaena subcylindrica*, and *Microcystis* sp, and in August these same noxious species were found, with the exception of *Microcystis* sp.

Johnson Lake - 2004 Algae Assessment

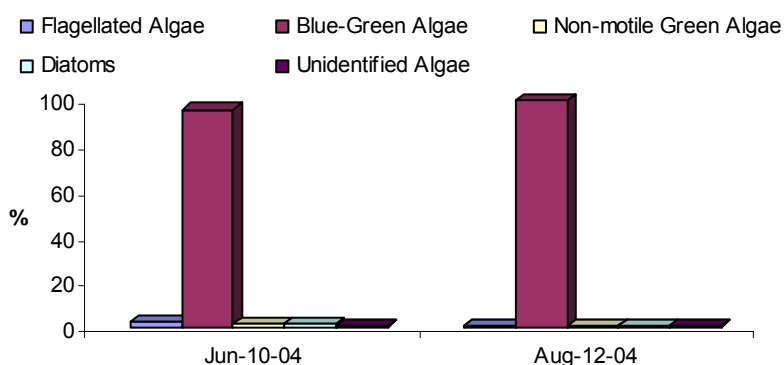


Figure 47. Percentage of Major Algae Groups Collected in Johnson Lake

Lake Tetonkaha - 2004 Algae Assessment

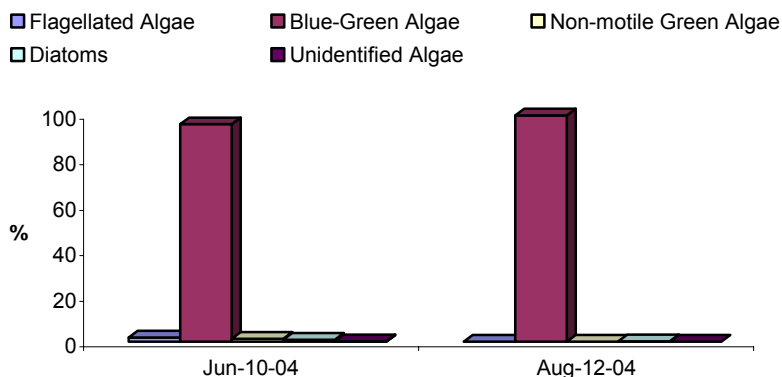


Figure 48. Percentage of Major Algae Groups Collected in Lake Tetonkaha

Aquatic Macrophyte (Plants) Survey

In August 2003, aquatic plants were surveyed in Johnson Lake along 20 transects at 63 sampling locations. Aquatic plants were also surveyed in Lake Tetonkaha in July and August 2004, along 29 transects at 92 sampling locations. Sago Pondweed, a submergent species, was the only species of aquatic macrophytes found during both surveys. Sago Pondweed was found at seven of the 20 transects in Johnson Lake, and at five of the 29 transects in Lake Tetonkaha (Figures 7 and 8 in the Methods Section of this report and Figures 19 and 20 in the Results Section).

Fish, Macroinvertebrate, and Physical Habitat Survey

Fish and physical habitat measurements were not completed at any of the tributaries. The South Dakota Game, Fish, and Parks completed a fisheries survey of West Oakwood Lake during August of 2004 (Appendices A and B). A visual survey of the shoreline habitat was completed at the time of the aquatic plant survey.

Macroinvertebrates were collected at each tributary site in this watershed, except for Site T43. The following table (Table 77) summarizes the scores for each sampling site based on the macroinvertebrate data and the scoring system setup for tributaries during the North-Central Big Sioux River Assessment Project. Score sheets for each site can be found in the Results Section. Tributary sites T44 and T48 had HBI scores of 9.6 and 8.8, respectively. T44 with a HBI of 9.6, had one Ephemeropteran and two Trichoptera found. Tolerant Chironomidae dominated this community, with 88 percent of the total assemblage being Chironomidae. Site T48 with a HBI of 8.8, was dominated by the amphipod *Hyaella* sp. and the highly tolerant Chironomidae *Glyptotendipes* sp. It should be noted that these streams serve as either an inlet or an outlet to a lake, therefore typical stream species are likely not present.

Table 77. Bug, Fish, and Habitat Index Values for the West Oakwood Lake Watershed

Site	Macroinverts	Fish	Habitat
T43	---	---	---
T44	25	---	---
T48	51	---	---

Trophic State Index (TSI) Summary

The trophic state of a lake is a numerical value that ranks its relative productivity. Developed by Carlson (1977), the Trophic State Index (TSI), allows a lake's productivity to be easily quantified and compared to other lakes. Low TSI values correlate with small nutrient concentrations, while higher TSI values correlate with higher levels of nutrient concentrations. TSI values range from 0 (oligotrophic) to 100 (hypereutrophic). Table 78 describes the TSI trophic levels and numeric ranges applicable to West Oakwood Lake. In this index, each increase of 10 units represents a doubling of algal biomass.

Table 78. Carlson Trophic Levels and Numeric Ranges

Trophic Level	Numeric Range
Oligotrophic	0-35
Mesotrophic	36-50
Eutrophic	51-65
Hypereutrophic	66-100

Trophic levels in West Oakwood Lake were calculated by segment (i.e. Johnson Lake, North Lake Tetonkaha, South Lake Tetonkaha). The median of chlorophyll-*a* and Secchi depth TSI values was calculated to provide a single index score for each lake. (Table 79). The calculated TSI value of West Oakwood Lake is 77.6 indicating a hypereutrophic condition (Figure 49). Each segment of West Oakwood Lake (Johnson Lake, North Lake Tetonkaha, and South Lake Tetonkaha) is individually described further in the following paragraphs.

Table 79. Observed Trophic State Index Values Collected in West Oakwood Lake

	Total Phosphorus	Secchi Depth	Chlorophyll-a	Median TSI (Secchi & chl-a)
Johnson	86.5	76.7	78.1	77.4
N. Tetonkaha	79.9	77.0	78.9	78.0
S. Tetonkaha	73.0	75.5	79.3	77.4
Overall W. Oakwood	79.8	76.4	78.8	77.6

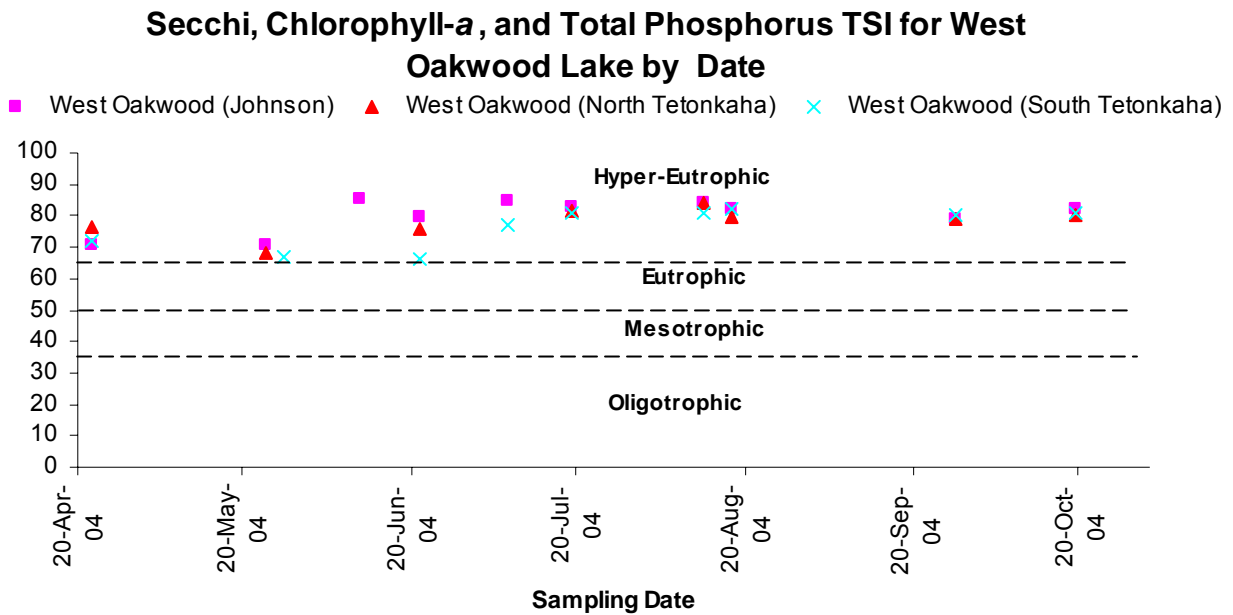


Figure 49. West Oakwood Lake Secchi, Chlorophyll-a, and Total Phosphorus TSI Values Plotted by Carlson Trophic Levels in

In order to determine impairment of a lake the SD DENR assesses the trophic status of a lake, using the median TSI value of chlorophyll-*a* concentrations and Secchi depth measurements. The SD DENR has developed an EPA approved protocol that establishes desired TSI levels of lakes based on their fishery classification. West Oakwood Lake is classified as a warmwater semi-permanent fishery and is currently not supporting the desired TSI level (SDDENR 2005). The full support target for lakes within the warmwater semi-permanent fishery classification is set at an overall median (of chlorophyll-*a* and Secchi depth TSI) TSI value ≤ 63.4 .

Trophic State Index values are plotted using beneficial use support categories as shown in Figure 50. TSI values steadily increased from May through October. Results show all parameters are not supporting of the beneficial uses throughout the sampling season.

Secchi, Chlorophyll-a, and Phosphorus Trophic State Index (TSI) Values by Sampling Site and Date

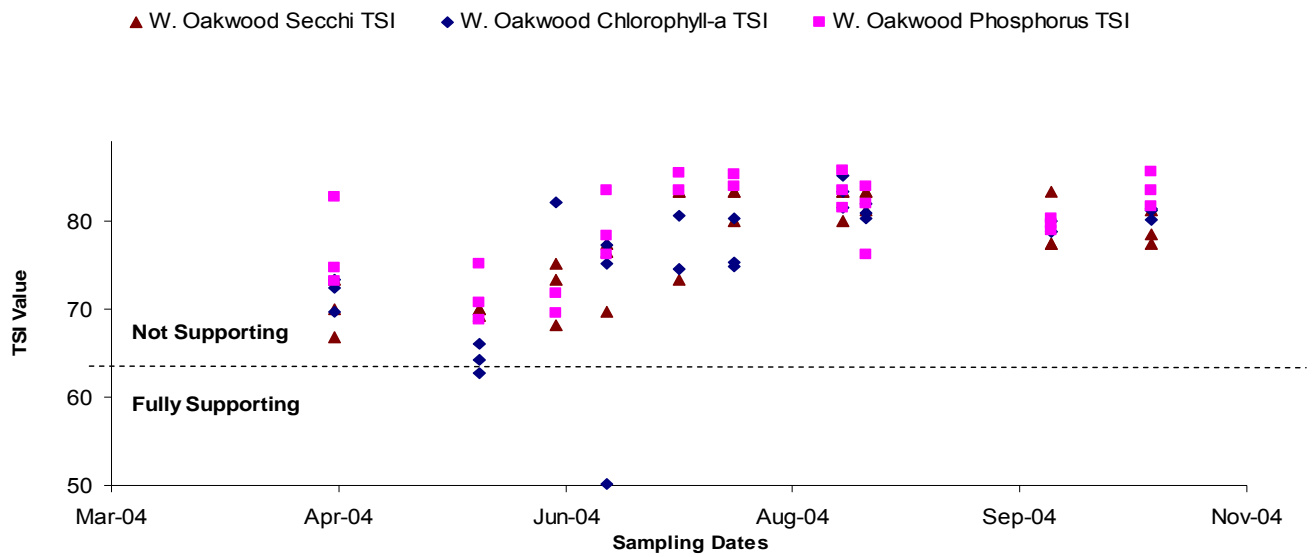


Figure 50. West Oakwood Lake Secchi and Chlorophyll-a TSI Values Plotted by Beneficial Uses Support

Johnson Lake Segment

Average values for the trophic levels in the Johnson Lake segment of West Oakwood Lake are shown in Table 80. The median of the chlorophyll-*a* TSI value and the Secchi depth TSI values was calculated to provide a single index score for Johnson Lake. A median overall observed TSI value of 77.4 indicates Johnson Lake is in a hypereutrophic condition (Figure 51).

Table 80. Observed Trophic State Index Values Collected in Johnson Lake

Parameter	Total Phosphorus	Secchi Depth	Chlorophyll- <i>a</i>	Median TSI (Secchi & chl _a)
Mean TSI	86.5	76.7	78.1	77.4

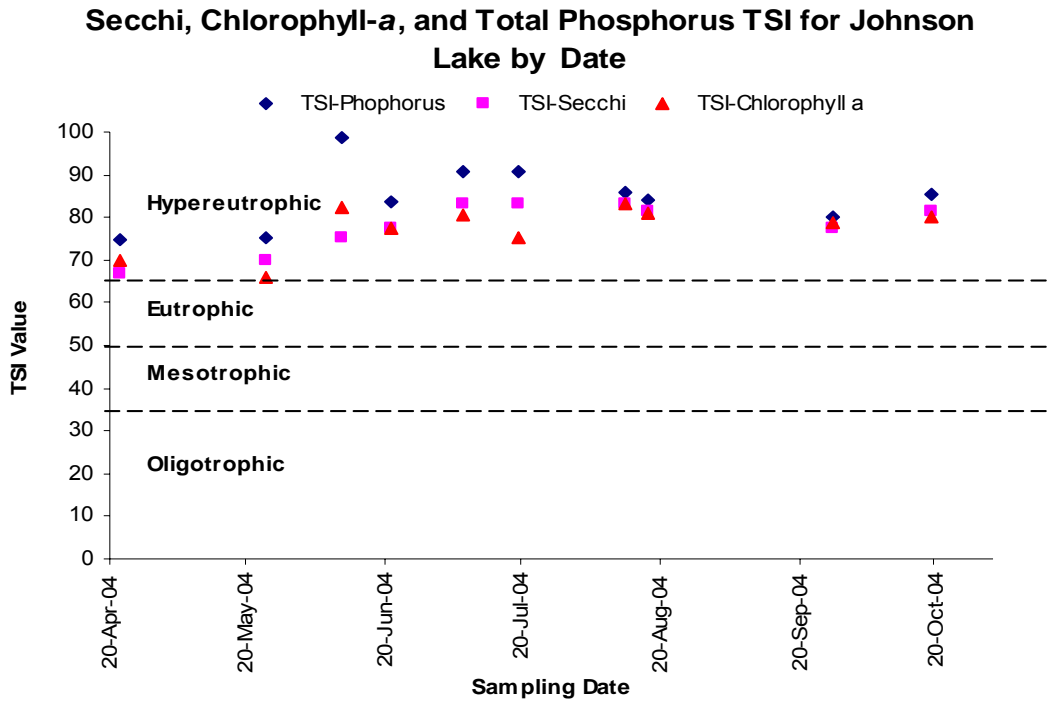


Figure 51. Johnson Lake Secchi, Chlorophyll-*a*, and Total Phosphorus TSI Values Plotted by Carlson Trophic Levels

Trophic State Index values are plotted using beneficial use support categories in Figure 52. Numeric ranges for these beneficial use categories are shown in Table 81. Using these numeric ranges, all parameters are not supporting the assigned beneficial uses from May through October.

Secchi, Chlorophyll-a, and Total Phosphorus TSI for Johnson Lake by Date

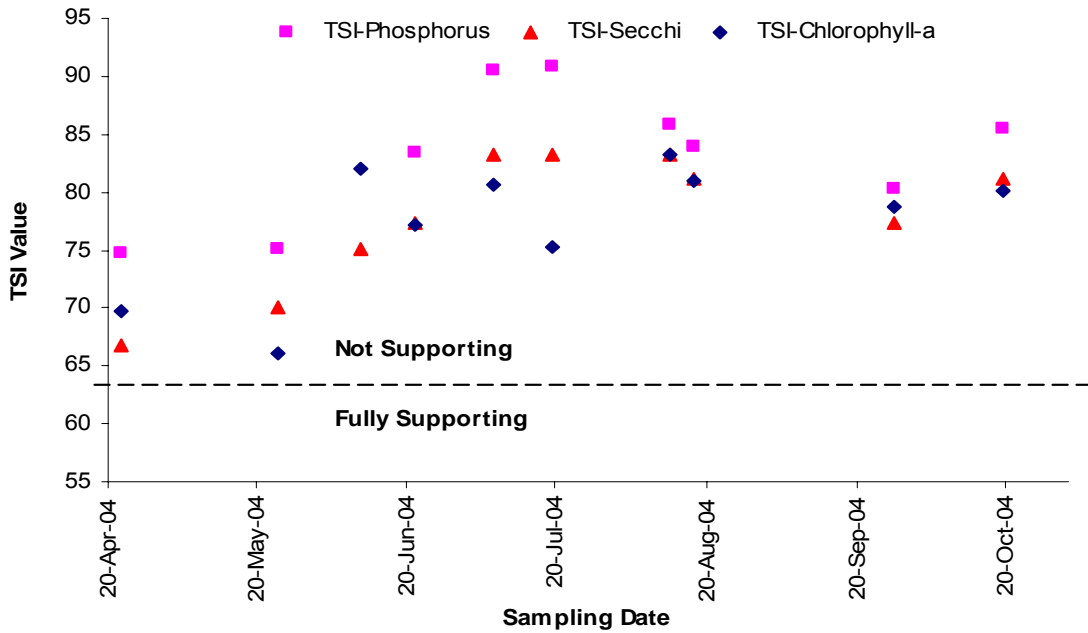


Figure 52. Johnson Lake Secchi and Chlorophyll-a TSI Values Plotted by Beneficial Use Support

Reduction Prediction based on BATHTUB Model

In-lake responses to watershed nutrient loading reductions were calculated for each segment of West Oakwood Lake using the BATHTUB Model. Each variable was modeled for each lake. The results for Johnson Lake are shown in Figure 53 and Table 81. See Appendix P for a description of each variable based on the BATHTUB calculations. The reduction of phosphorus from watershed contribution would improve Johnson Lake from a non-supporting TSI value of 76.8 to a supporting TSI value ≤ 63.4 .

Johnson Lake TSI Reductions based on BATHTUB Tributary Nutrient Reductions

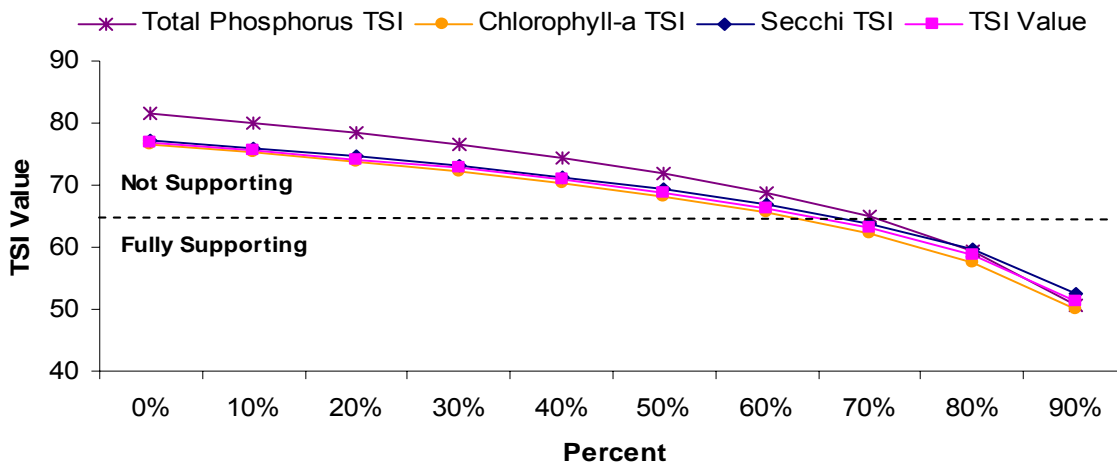


Figure 53. BATHTUB Predicted Mean TSI Reductions and Use Support of Johnson Lake

Table 81. Johnson Lake Observed and Predicted Watershed Reductions of Nitrogen and Phosphorus Concentrations and Predicted In-lake Mean TSI Values Using BATHTUB

Johnson Lake Variable	Observed Values calculated using BATHTUB OBSERVED	Condition of the Lake based on current loadings PREDICTED	Percent reductions for total lake load based on predicted model								
			10% Est	20% Est	30% Est	40% Est	50% Est	60% Est	70% Est	80% Est	90% Est
Total P	302.8	215.1	194	172.8	151.8	130.7	109.6	88.5	67.4	46.3	25.2
Total N	4219	2751.1	2495.3	2239.5	1983.7	1727.9	1472.2	1216.2	960.4	704.6	448.7
CHL-A	126.7	107.3	94.3	81.6	69.4	57.5	46.1	35.3	25.1	15.6	7.3
SECCHI	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.8	1	1.7
ORGANIC N	4029	2605.2	2308.5	2019.7	1740	1469.5	1210	962.7	729.8	514.8	323.8
ANTILOG PC-1	11747.4	7393.2	5968.8	4703.2	3595.7	2642.1	1841.9	1191	686.9	325.2	100.1
ANTILOG PC-2	16.2	14.3	13.9	13.4	12.9	12.3	11.7	10.9	10.1	9.1	7.9
(N-150)/P	13.4	12.1	12.1	12.1	12.1	12.1	12.1	12	12	12	11.9
INORGANIC N/P	4.5	5.3	6.3	7	7.6	8.1	8.4	8.6	8.7	8.5	7.8
FREQ (CHL-a>10)%	100	100	100	99.9	99.8	99.4	98.4	95.8	88	66	20.5
FREQ (CHL-a>20)%	99.6	99.2	98.6	97.5	95.5	91.8	85	72.8	52.2	24	2.6
FREQ (CHL-a>30)%	97.8	96	93.8	90.4	85.1	77	65	48.1	27.4	8.7	0.5
FREQ (CHL-a>40)%	93.9	90	85.9	80	71.8	60.9	46.8	30.4	14.4	3.4	0.1
FREQ (CHL-a>50)%	88.3	82.2	76.2	68.5	58.6	46.6	33	19.2	7.7	1.4	0
FREQ (CHL-a>60)%	81.5	73.5	66.3	57.4	47	35.3	23.1	12.2	4.3	0.7	0
TSI-P	86.5	81.6	80.1	78.4	76.6	74.4	71.9	68.8	64.9	59.5	50.7
TSI-CHLA	78.1	76.5	75.2	73.8	72.2	70.4	68.2	65.6	62.2	57.6	50.1
TSI-SEC	76.7	77.1	75.9	74.6	73.1	71.4	69.4	67	63.9	59.6	52.6
Median TSI (chla & Secchi)	77.4	76.8	75.6	74.2	72.7	70.9	68.8	66.3	63.1	58.6	51.4

North Lake Tetonkaha Segment

Average values for the trophic levels in the North Lake Tetonkaha segment of West Oakwood Lake are shown in Table 82. The median of the chlorophyll-*a* TSI value and the Secchi depth TSI value was calculated to provide a single index score for North Lake Tetonkaha. An overall median observed TSI of 78.0 indicates North Lake Tetonkaha is in a hypereutrophic condition (Figure 54).

Table 82. Observed Trophic State Index Values Collected in North Lake Tetonkaha

Parameter	Total Phosphorus	Secchi Depth	Chlorophyll- <i>a</i>	Median TSI (Secchi & chl _a)
Mean TSI	79.9	77.0	78.9	78.0

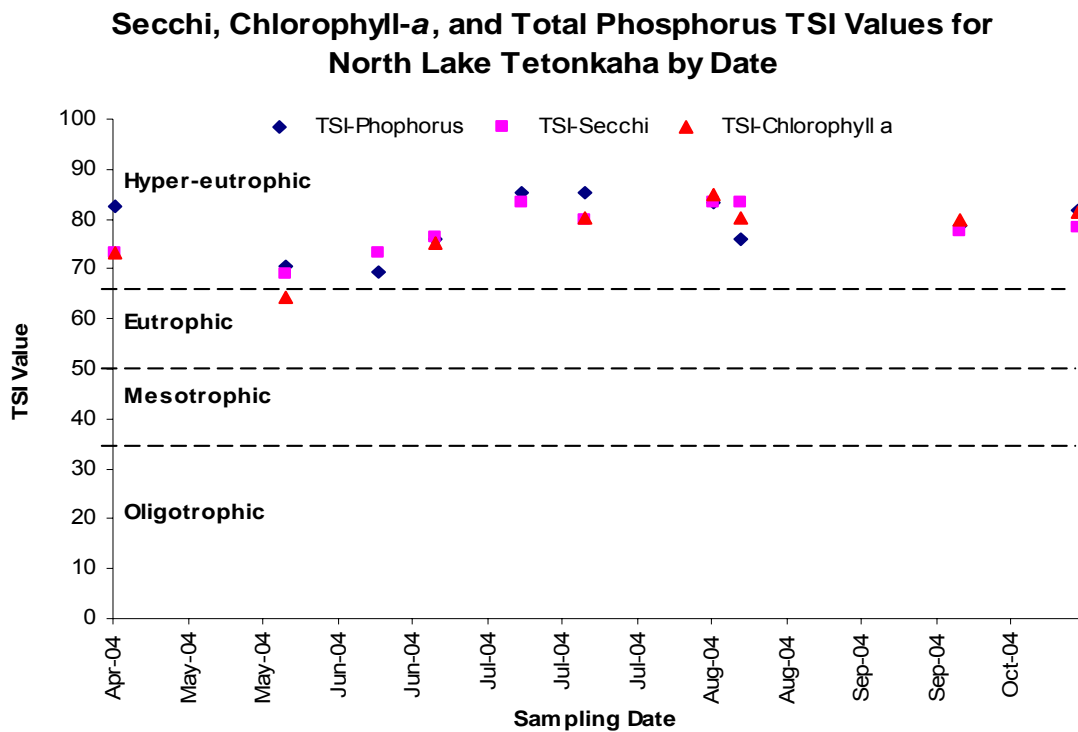


Figure 54. North Lake Tetonkaha Secchi, Chlorophyll-*a*, and Total Phosphorus TSI Values Plotted by Carlson Trophic Levels

Trophic State Index values are plotted using the beneficial use support category in Figure 55. Numeric ranges for beneficial use support are shown in Table 78. Using these numeric ranges, all parameters are not supporting the assigned beneficial uses from June through October.

Secchi, Chlorophyll-a, and Total Phosphorus TSI Values for North Lake Tetonkaha by Date

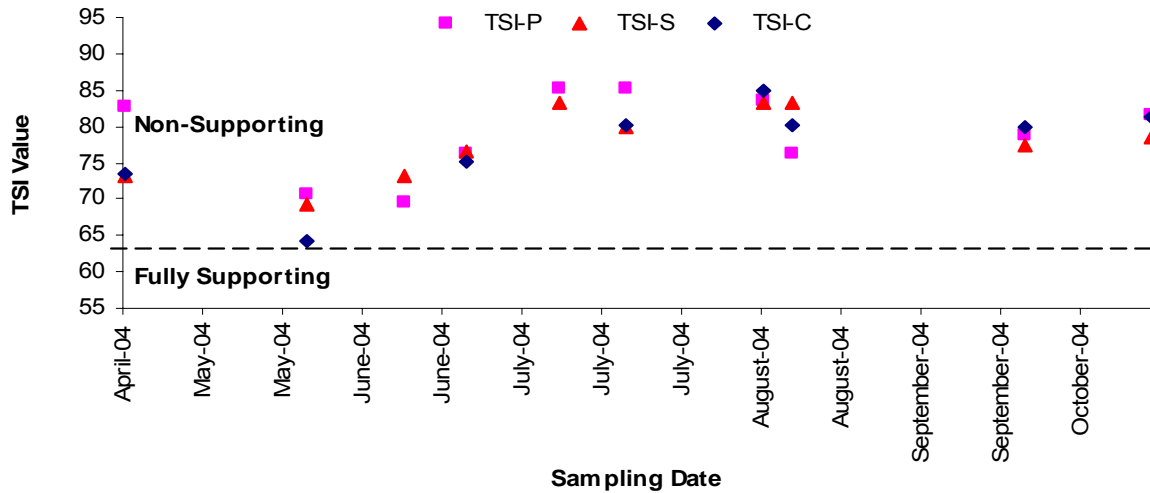


Figure 55. North Lake Tetonkaha Secchi and Chlorophyll-a TSI Values Plotted by Beneficial Use Support

Reduction Prediction based on BATHTUB Model

In-lake responses to watershed nutrient loading reductions were calculated for each segment of West Oakwood Lake using the BATHTUB Model. Each variable was modeled for each lake. The results for the North Lake Tetonkaha segment are shown in Figure 56 and Table 83. See Appendix P for a description of each variable based on the BATHTUB calculations. A reduction of phosphorus from the watershed would improve the North Lake Tetonkaha segment from a non-supporting TSI value of 77.3 to a supporting TSI value ≤ 63.4 .

North Lake Tetonkaha TSI Reductions based on BATHTUB Tributary Nutrient Reductions

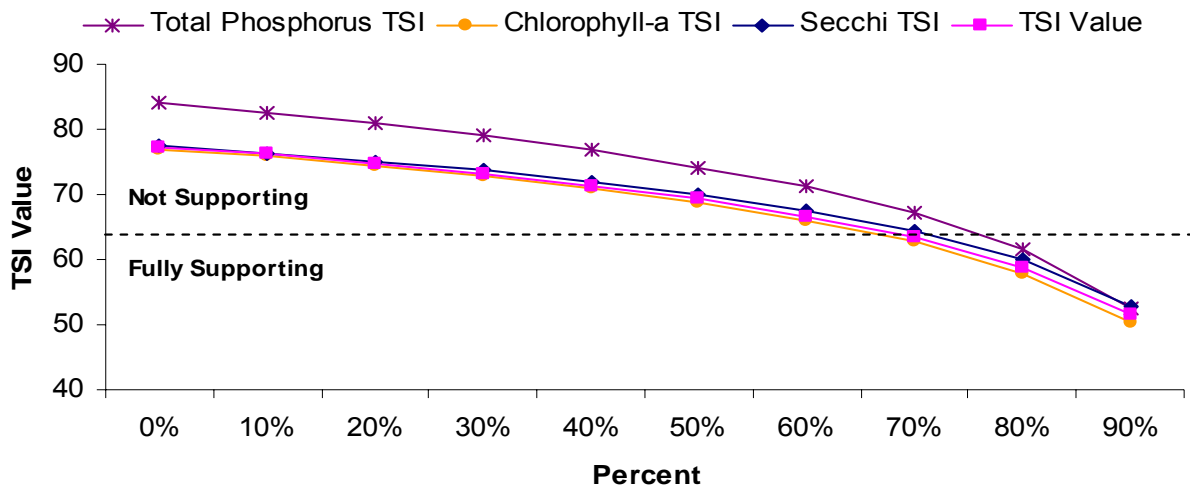


Figure 56. North Lake Tetonkaha BATHTUB Predicted Mean TSI Reductions and Use Support

Table 83. North Lake Tetonkaha Observed and Predicted Watershed Reductions in Nitrogen and Phosphorus Concentrations and Predicted In-lake Mean TSI Values Using the BATHTUB model

North Tetonkaha Variable	Observed Values calculated using BATHTUB OBSERVED	Condition of the Lake based on current loadings PREDICTED	Percent reductions for total lake load based on predicted model								
			10% Est	20% Est	30% Est	40% Est	50% Est	60% Est	70% Est	80% Est	90% Est
Total P	191	254.1	229.1	204	179	154	129	104	78.9	53.9	28.9
Total N	2942	2616	2372.6	2129.1	1885.6	1642.1	1398.8	1155.2	911.7	668.2	424.7
CHL-A	137.9	113.6	99.8	86.3	73.3	60.7	48.6	37.1	26.2	16.2	7.4
SECCHI	0.3	0.3	0.3	0.4	0.4	0.4	0.5	0.6	0.7	1	1.7
ORGANIC N	3976	2753.6	2438.2	2131.3	1833.9	1546.5	1271	1008.2	761.2	533.3	331.4
ANTILOG PC-1	9651	8131.1	6558	5161	3939	2888.2	2007.7	1292.5	740.3	346	103
ANTILOG PC-2	18.5	14.5	14.1	13.6	13	12.5	11.8	11.1	10.2	9.2	7.9
(N-150)/P	14.6	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.6	9.5
INORGANIC N/P	0	0	0	0	1	2	2.9	3.7	4.4	5	5.2
FREQ (CHL-a>10)%	100	100	100	99.9	99.8	99.5	98.7	96.4	89.4	68.2	21.2
FREQ (CHL-a>20)%	99.7	99.4	98.9	98	96.3	93.1	86.9	75.3	55.1	25.9	2.8
FREQ (CHL-a>30)%	98.4	96.7	94.8	91.8	87.1	79.6	68	51.3	29.9	9.7	0.5
FREQ (CHL-a>40)%	95.4	91.5	87.8	82.4	74.8	64.1	50.2	33.3	16.1	3.9	0.1
FREQ (CHL-a>50)%	90.8	84.5	79	71.6	62.1	50.1	36.1	21.4	8.8	1.7	0
FREQ (CHL-a>60)%	84.9	76.4	69.5	60.9	50.5	38.5	25.8	13.9	5	0.8	0
TSI-P	79.9	84	82.5	80.8	79	76.8	74.2	71.1	67.1	61.6	52.6
TSI-CHLA	78.9	77	75.8	74.3	72.7	70.9	68.7	66	62.7	57.9	50.2
TSI-SEC	77	77.6	76.4	75.1	73.6	71.9	69.9	67.4	64.3	59.9	52.7
Median TSI (chla & Secchi)	78.0	77.3	76.1	74.7	73.2	71.4	69.3	66.7	63.5	58.9	51.5

South Lake Tetonkaha Segment

Average values for the trophic levels in the South Lake Tetonkaha segment of West Oakwood Lake are shown in Table 84. The median of the chlorophyll-*a* TSI value and the Secchi depth TSI value was calculated to provide a single index score for South Lake Tetonkaha. An overall median observed TSI of 77.4 indicates South Lake Tetonkaha is in a hypereutrophic condition (Figure 57).

Table 84. Observed Trophic State Index Values Collected in South Lake Tetonkaha

Parameter	Total Phosphorus	Secchi Depth	Chlorophyll- <i>a</i>	Median TSI (Secchi & chl _a)
Mean TSI	73.0	75.5	79.3	77.4

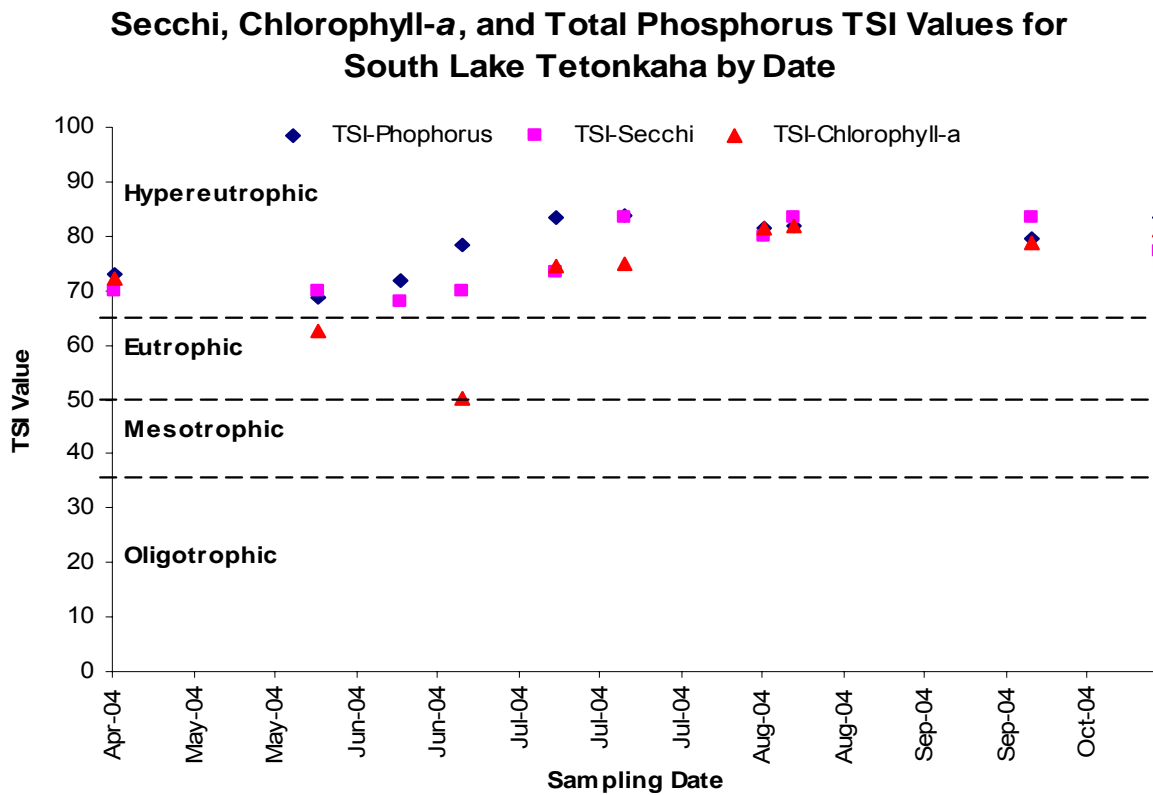


Figure 57. South Lake Tetonkaha Secchi, Chlorophyll-*a*, and Total Phosphorus TSI Values Plotted by Carlson Trophic Levels

Trophic State Index values are plotted based on beneficial use support categories in Figure 58. Numeric ranges for beneficial use support are shown in Table 78. Using these numeric ranges, all parameters are not supporting the assigned beneficial uses from June through October.

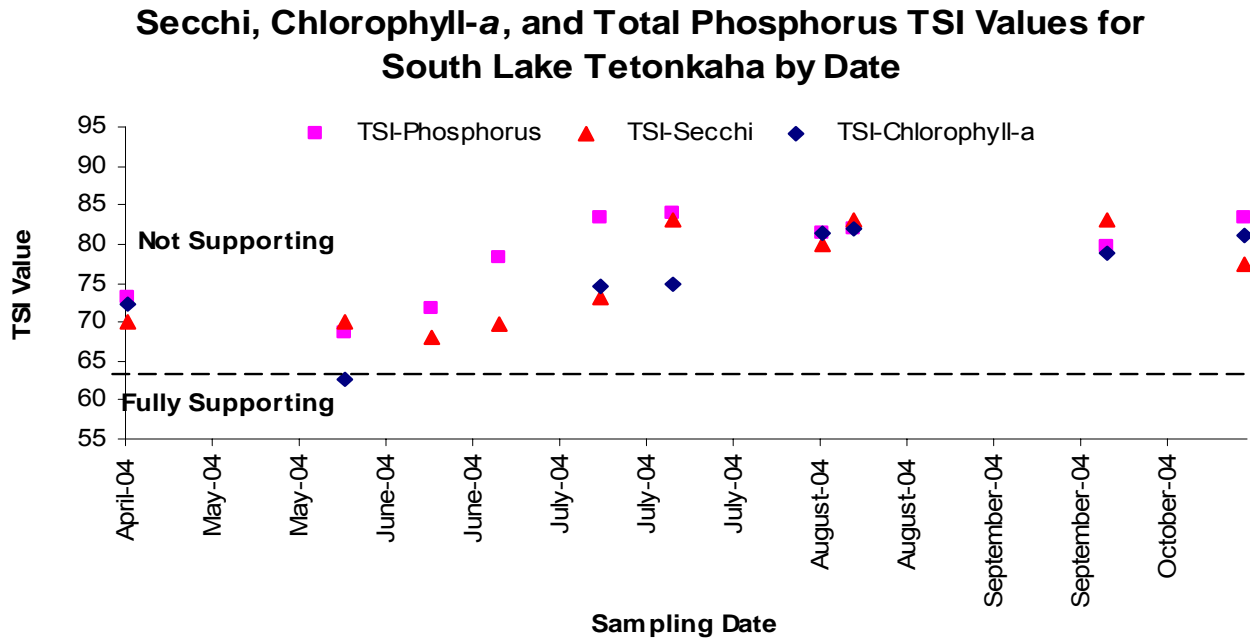


Figure 58. South Lake Tetonkaha Secchi and Chlorophyll-a TSI Values Plotted by Beneficial Use Support

Reduction Prediction based on BATHTUB Model

In-lake responses to watershed nutrient loading reductions were calculated for each segment of West Oakwood Lake using the BATHTUB Model. Each variable was modeled for each lake. The results for the South Lake Tetonkaha segment are shown in Figure 59 and Table 85. See Appendix P for a description of each variable based on the BATHTUB calculations. The reduction of phosphorus from watershed contribution would improve the South Lake Tetonkaha segment from a non-supporting TSI value of 76.5 to a supporting TSI value ≤ 63.4 .

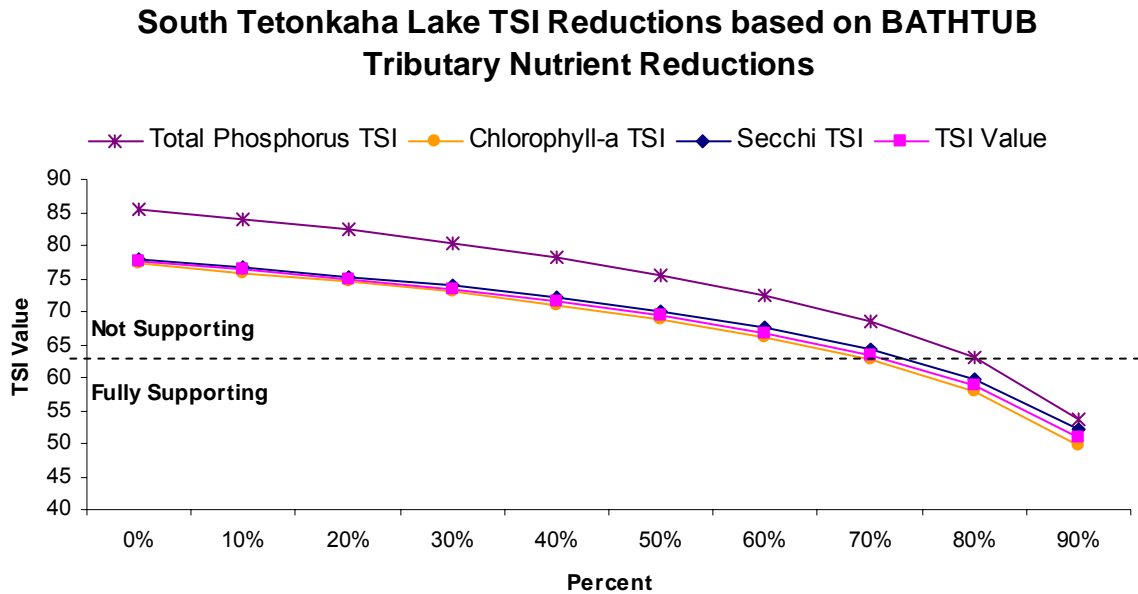


Figure 59. South Lake Tetonkaha BATHTUB Predicted Mean TSI Reductions and Use Support

Table 85. South Lake Tetonkaha Observed and Predicted Watershed Reductions in Nitrogen and Phosphorus Concentrations and Predicted In-lake Mean TSI Values Using the BATHTUB Model

South Tetonkaha Variable	Observed Values calculated using BATHTUB OBSERVED	Condition of the Lake based on current loadings PREDICTED	Percent reductions for total lake load based on predicted model								
			10% Est	20% Est	30% Est	40% Est	50% Est	60% Est	70% Est	80% Est	90% Est
Total P	184	281.2	253.4	225.6	197.9	170	142.3	114.5	86.7	59	31.2
Total N	4039	2527	2290.2	2053.3	1816.5	1579.7	1343	1106	869.1	632.3	395.5
CHL-A	106.3	115.5	101.4	87.6	74.2	61.3	49	37.2	26.1	15.9	17.1
SECCHI	0.3	0.3	0.3	0.3	0.4	0.4	0.5	0.6	0.7	1	1.7
ORGANIC N	3780	2812.3	2489.3	2175.1	1870.6	1576.5	1294.7	1026.2	773.9	541.7	336.7
ANTILOG PC-1	8205.7	8375.2	6745.1	5298.7	4034.8	2949.5	2041.8	1306.4	740.8	339.5	95.8
ANTILOG PC-2 (N-150)/P	16.1	14.6	14.1	13.6	13.1	12.5	11.9	11.1	10.3	9.2	7.9
INORGANIC N/P	21.2	8.5	8.4	8.4	8.4	8.4	8.4	8.3	8.3	8.2	7.9
FREQ (CHL-a>10)%	9.4	0	0	0	0	0.1	0.9	1.7	2.5	3.2	3.6
FREQ (CHL-a>20)%	100	100	100	99.9	99.8	99.6	98.8	96.5	89.2	67.1	18.5
FREQ (CHL-a>30)%	99.1	99.4	98.9	98.1	96.4	93.3	87.2	75.5	54.8	25	2.2
FREQ (CHL-a>40)%	95.8	96.9	95.1	92.2	87.5	80.1	68.5	51.5	29.7	9.2	0.4
FREQ (CHL-a>50)%	89.7	91.9	88.3	83	75.4	64.8	50.7	33.5	15.9	3.6	0.1
FREQ (CHL-a>60)%	81.8	85.1	79.7	72.4	62.8	50.8	36.6	21.6	8.7	1.6	0
TSI-P	73	77.2	70.4	61.8	51.3	39.2	26.2	14	4.9	0.7	0
TSI-CHLA	73	85.5	84	82.3	80.4	78.2	75.6	72.5	68.5	62.9	53.7
TSI-SEC	79.3	77.2	75.9	74.5	72.9	71	68.8	66.1	62.6	57.8	49.6
Median TSI (chla & Secchi)	75.5	77.8	76.6	75.3	73.8	72	70	67.5	64.2	59.7	52.2
	77.4	77.5	76.25	74.9	73.35	71.5	69.4	66.8	63.4	58.75	50.9

Point Sources

This watershed is predominately agricultural. There are no municipalities or known point sources located in this watershed.

Non-Point Sources

Non-point sources of concern are those that contribute TSS and nutrients. Since non-point sources can be difficult to pinpoint, the following are the possible sources of sediment and nutrients within this watershed. Possible sediment sources of pollution include agricultural runoff and eroding stream bed and banks. Possible sources of phosphorus include human and animal waste, soil erosion, fertilizer runoff, and detergents. Possible sources of nitrogen are fertilizers, animal wastes, and septic systems.

EAST OAKWOOD LAKE WATERSHED

This map (Figure 60) shows the area and location designated as the East Oakwood Lake watershed. This area encompasses approximately 14,128 acres, with the lake itself covering approximately 1,000 acres.

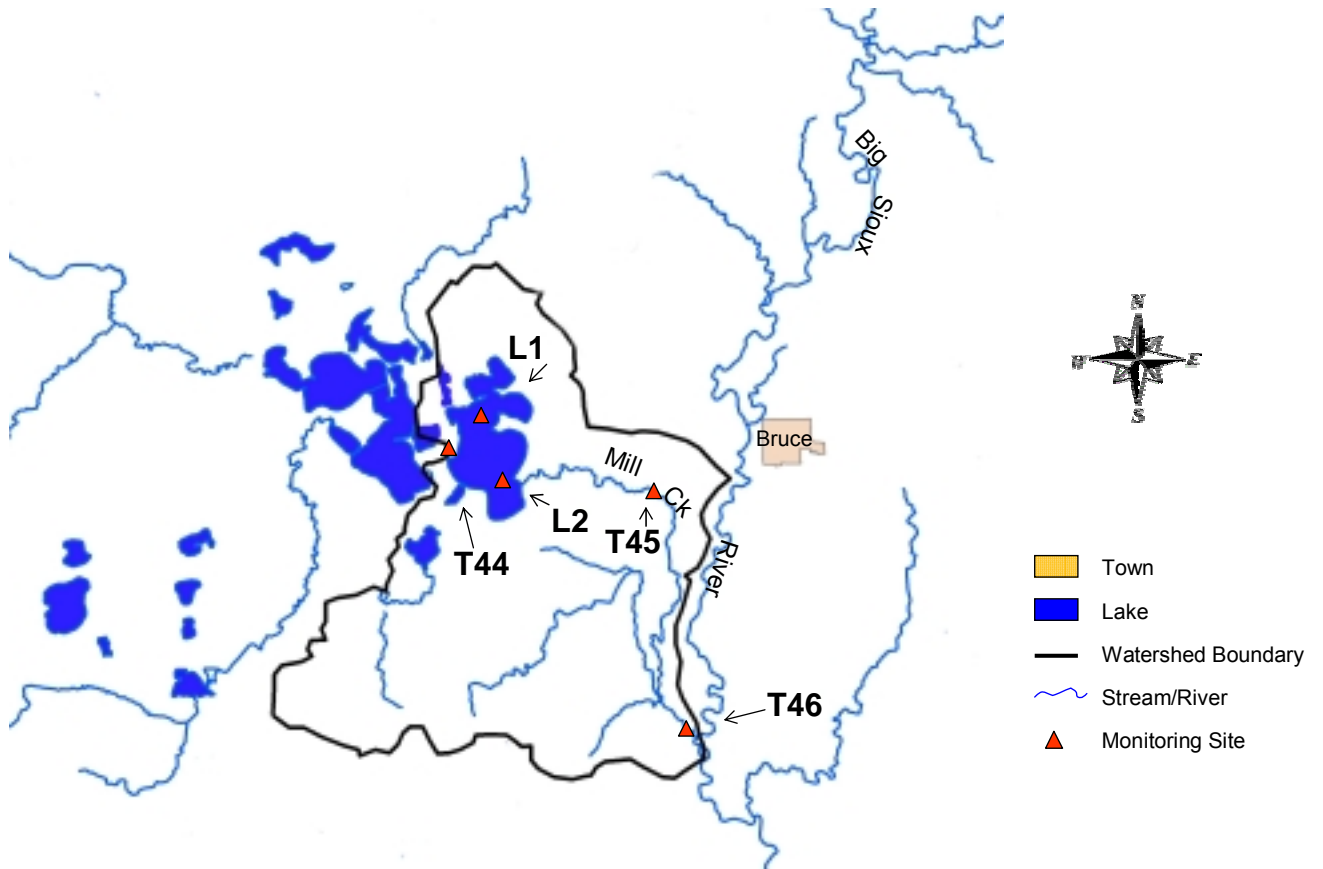


Figure 60. East Oakwood Lake Watershed Location Map

Landuse Summary

The East Oakwood Lake watershed area is located within the Northern Glaciated Plains level III ecoregion and characterized by the level IV ecoregion of the Big Sioux Basin. This is an area of rolling terrain and a drainage area consisting of incised streams. The rolling areas are extensively tilled for small grains, corn, sunflowers, and soybeans. Most of the area is cropland, such as corn and soybeans, with some areas in grassland and pastureland. Twenty-three feedlots comprised of 5,601 animals were assessed. Of this number, 70 percent were cows, 18 percent were sheep, and 12 percent were pigs.

Water Quality Summary

Beneficial uses for the two in-lake sites (L1 and L2) of East Oakwood Lake are 5, 7, 8, and 9.

- (5) Warmwater Semi-permanent Fish Life Propagation
- (7) Immersion Recreation
- (8) Limited Contact Recreation
- (9) Fish and Wildlife Propagation, Recreation and Stock Watering

Beneficial uses for the one inlet (T44) and two outlet sites (T45 and T46) for East Oakwood Lake are 9 and 10.

- (9) Fish and Wildlife Propagation, Recreation and Stock Watering
- (10) Irrigation

Based on the results from the water quality criteria established by the SD DENR as described in the Results Section under Water Quality Monitoring, the tributary sites are meeting the water quality criteria and supporting assigned beneficial uses. The two in-lake sites are meeting the water quality criteria for beneficial use (7) Immersion Recreation, (8) Limited Contact Recreation, and (9) Fish and Wildlife Propagation, Recreation and Stock Watering. In regards to beneficial use (5) Warm Water Semi-permanent Fish Life Propagation, the in-lake sites are meeting the criteria for water temperature, dissolved oxygen, total suspended solids, and ammonia nitrogen as N, but not pH. The combined surface and bottom sample from both in-lake monitoring sites show East Oakwood Lake is not meeting the water quality criteria for pH (Table 86 and Figure 61).

Table 86. East Oakwood Lake Water Quality Exceedences

Date	Site	Parameter	Standard	Sampled Value
9/28/2001	L1-S	pH	≥ 6.5 - ≤ 9.0	9.1
8/8/2002	L1-S	pH	≥ 6.5 - ≤ 9.0	9.2
9/12/2002	L1-S	pH	≥ 6.5 - ≤ 9.0	9.1
8/8/2002	L1-B	pH	≥ 6.5 - ≤ 9.0	9.2
8/8/2002	L2-S	pH	≥ 6.5 - ≤ 9.0	9.2
8/8/2002	L2-B	pH	≥ 6.5 - ≤ 9.0	9.2
4/23/2003	L1	pH	≥ 6.5 - ≤ 9.0	9.5
6/2/2003	L1	pH	≥ 6.5 - ≤ 9.0	9.1
4/23/2003	L2	pH	≥ 6.5 - ≤ 9.0	9.5
7/15/2003	L2	pH	≥ 6.5 - ≤ 9.0	9.1

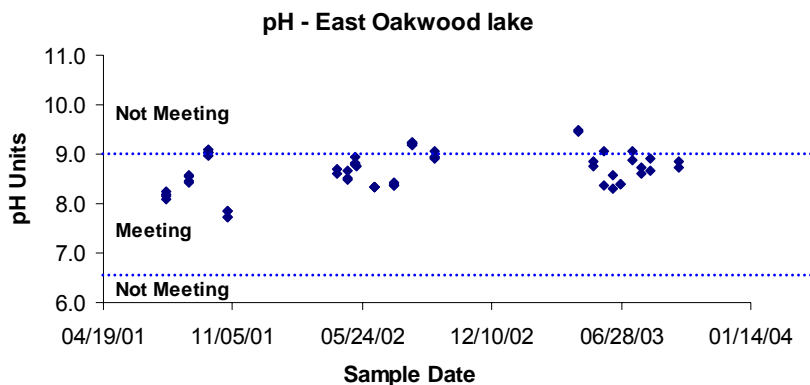


Figure 61. East Oakwood Lake pH Grab Samples based on Numeric Standard ≥ 6.5 to ≤ 9.0

Water temperatures and pH levels tend to increase in highly productive lakes. This higher productivity is likely caused by excessive nutrients. Thus, these higher pH levels may indicate elevated levels of nutrients in this lake, causing excessive algal and macrophyte growth. Figure 62 shows the pH levels in comparison to the water temperature in East Oakwood Lake.

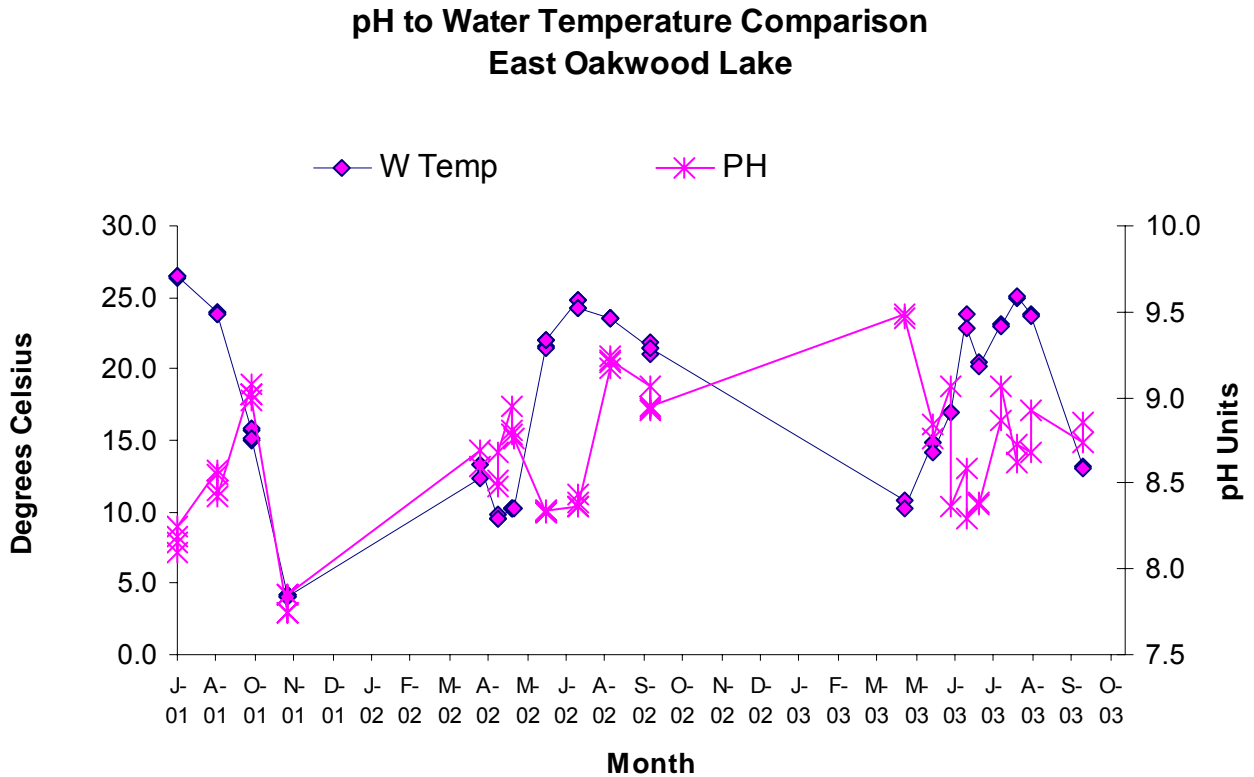


Figure 62. East Oakwood Lake pH to Water Temperature Comparison

Chlorophyll is the photosynthetic pigment in all green plants and can be a measure of the amount of algae present in a lake. Phosphorus is the primary nutrient algae use for growth. Plots of total phosphorus and chlorophyll-*a* were constructed (Figure 63) to show the relationship between the amount of phosphorus present versus the amount of algal growth. Phosphorus is usually the limiting nutrient in the growth of algae. Therefore, increases in phosphorus should yield increases in algae mass. Figure 63 indicates there is a correlation between chlorophyll-*a* and total phosphorus at Site L1 ($R^2=0.89$), as well as at Site L2 ($R^2=0.84$).

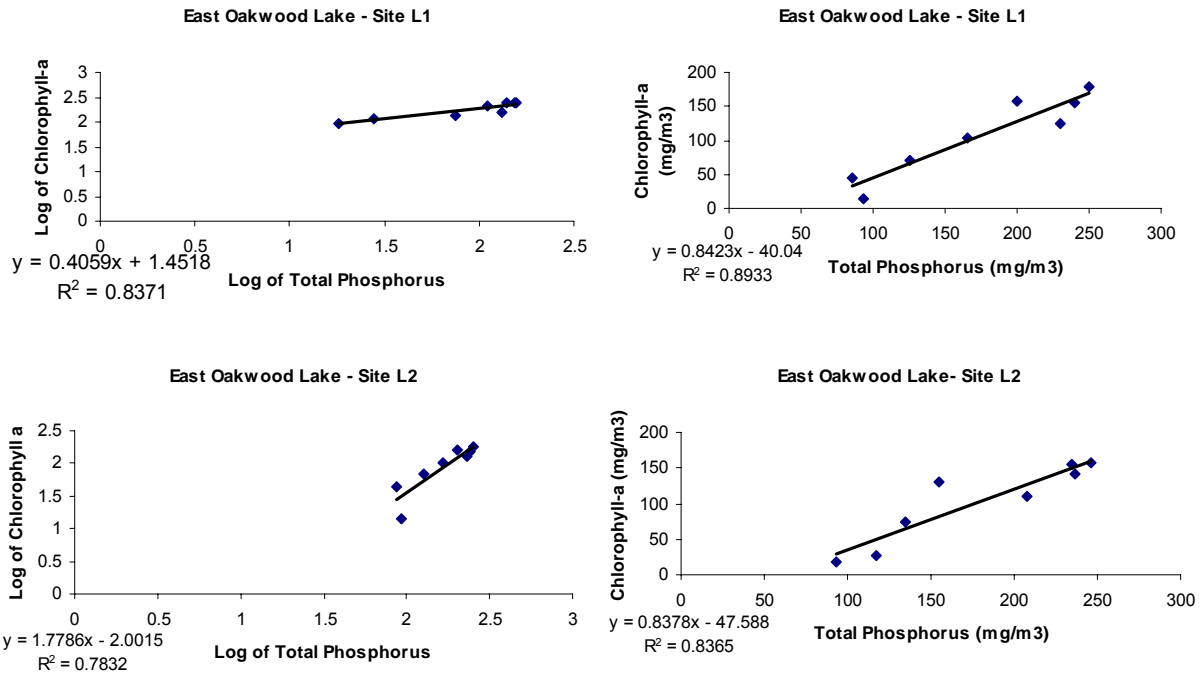


Figure 63. Sites L1 and L2 Phosphorus to Chlorophyll-a Relationship

The maximum in-lake chlorophyll-a concentration of 179.9 mg/m³ was collected at Site L1 on August 11, 2003 (Figure 64). The average chlorophyll-a concentration was 104.1 mg/m³ and the median concentration was 117.6 mg/m³.

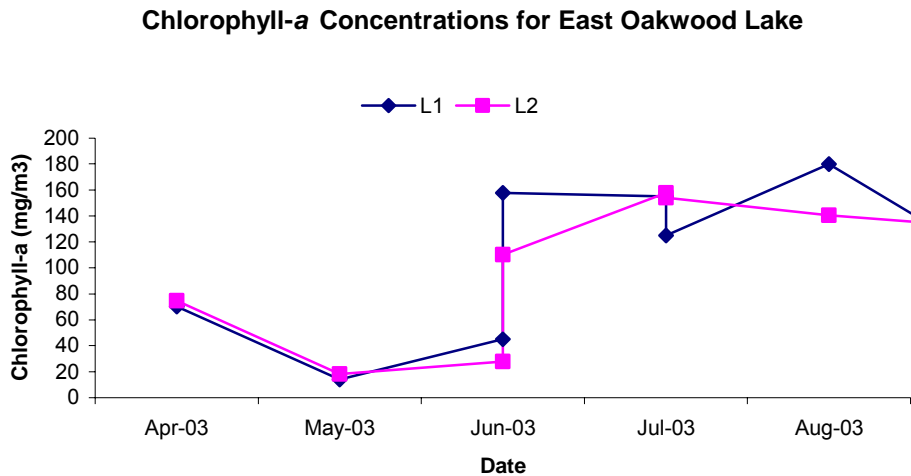


Figure 64. East Oakwood Lake Chlorophyll-a Concentrations (mg/m³)

Water clarity is measured using a Secchi disk. The deeper the Secchi disk can be seen, the clearer the water. Indicatively, water clarity decreases as the amount of chlorophyll-*a* increases, as shown by Figure 65. Secchi depth ranged from 0.10 meters to 0.70 meters (\bar{x} = 0.35 meters).

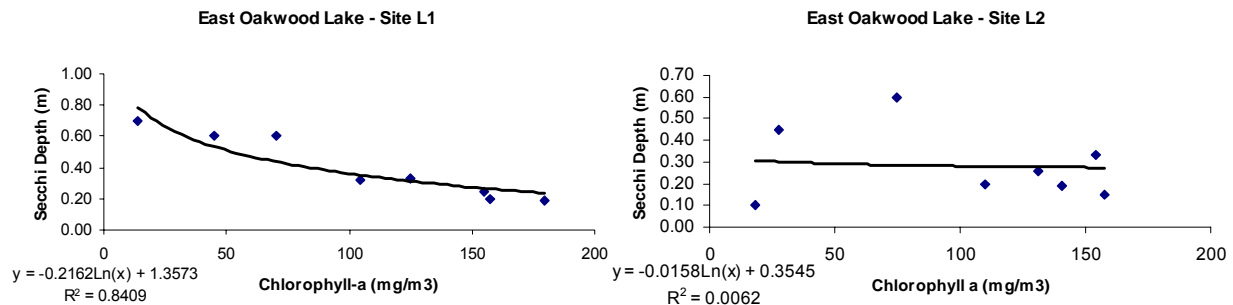


Figure 65. Sites L1 and L2 Chlorophyll-*a* to Secchi Depth Relationship

For an organism, such as algae, to survive in a given environment, it must have the necessary nutrients and environment to maintain life and successfully reproduce. If an essential life component approaches a critical minimum, this component will become the limiting factor (Odum 1959). Nutrients such as phosphorus and nitrogen are most often the limiting factors in highly eutrophic lakes. Typically, phosphorus is the limiting nutrient for algal growth. However, nitrogen can become the limiting factor in many highly eutrophic lakes with an overabundance of phosphorus. East Oakwood Lake is a phosphorus-limited lake as shown by Figure 66.

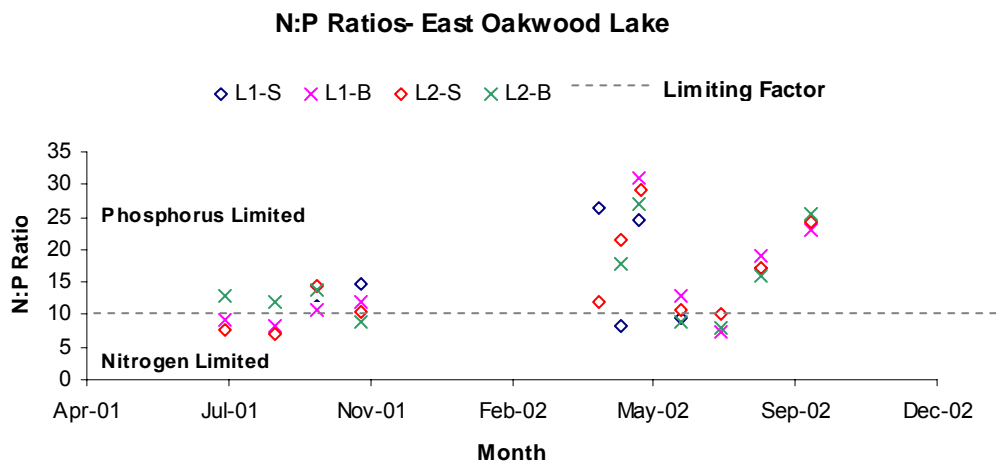


Figure 66. East Oakwood Lake Total Nitrogen to Total Phosphorus Ratio

In 2003, lake levels in East Oakwood Lake dropped approximately 0.7 ft between the months of April and October. In 2004 the difference in lake levels between May and October was an increase of approximately 0.36 ft. As shown by Figure 67, lake levels rose in June and October of 2004 due to heavy rains.

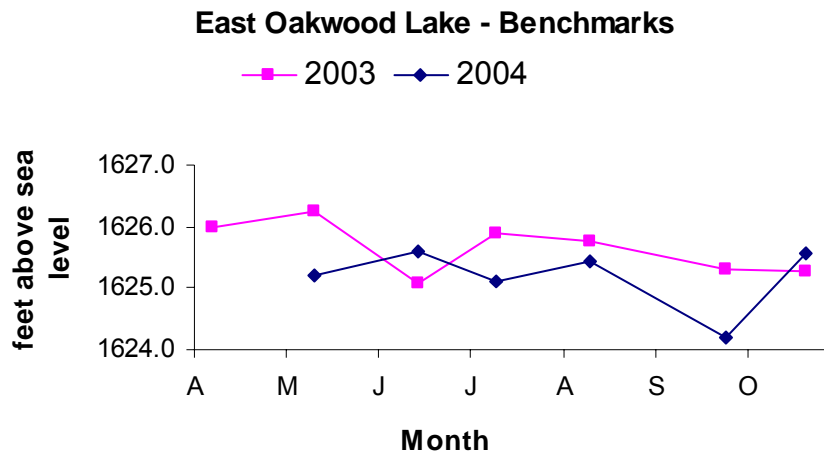


Figure 67. East Oakwood Lake 2003 and 2004 Lake Level Readings

Hydrologic Budget

Hydrologic Budget

A hydrologic budget explains the amount of water entering and leaving a lake. In theory, all inflows of water must equal all outflows during the course of the hydrologic cycle (Table 87). The inflow sources during the study period included precipitation, groundwater, and tributary flow. For the purpose of this study, groundwater was estimated to help balance the equation.

Table 87. Hydrologic Budget of East Oakwood Lake

Inflow Sources	Load (acre-ft)	Outflow Sources	Load (acre-ft)
Surface Area = 404.56 acres			
Precipitation	841.48	Evaporation	821.26
Tributary (T44)	10,746.44	Tributary (T45)	24,931.06
Groundwater	14,332.70	Change in Storage	168.30
Totals	25,920.62		25,920.62

In order to calculate the precipitation inflow, 2003 rainfall data were taken from the weather station located in Brookings County. The amount of precipitation in inches was converted to feet and multiplied by the surface area of East Oakwood Lake (2.08 ft × 404.56 acres). Inflow loading from Site T44 was estimated using the FLUX model and water quality data collected in 2001-2002.

The outflow of East Oakwood Lake included evaporation, tributary flow, and change in storage. Outflow was monitored at Sites T45 and T46. Outflow loading from these sites was estimated using the FLUX model and water quality data collected in 2001-2002. Land evaporation data was collected from the weather station located two miles northeast of Brookings (SDSU 2003). In order to change the land evaporation data into surface water evaporation, monthly evaporation amounts were multiplied by the Class A monthly land pan coefficient (0.8) for the Midwestern United States (Fetter 1998). The monthly evaporation amounts were added, converted to feet, and multiplied by the surface area of East Oakwood Lake.

After all of the hydrologic outflows were subtracted from the inflows, 14,332.7 acre-ft were unaccounted for. Groundwater was one of the possible sources of unaccounted inflow. However, this amount is much larger than what would be expected as groundwater contribution. Therefore, it was possible that part of the unaccounted 14,332.7 acre-ft was attributed to an inlet that was not monitored during the study period.

Sediment and Nutrient Budgets

Suspended Solids Budget

The estimated total suspended solids loading to East Oakwood Lake from watershed runoff was derived using the FLUX model. Loading from the inlet (Site T44) was estimated at 272,804.3 kg. Monitored outflow at Site T45 showed a total suspended solids load of 512,776.1 kg. After the outflow was subtracted from the inflow, an estimated 239,971.8 kg was unaccounted for and was presumed to be loading from un-monitored inflow.

Nitrogen Budget

Sources of total nitrogen load entering East Oakwood Lake are attributed to groundwater and the inlet. Atmospheric nitrogen was not included in the inflow estimates. As atmospheric nitrogen enters the lake, it is utilized by different species of algae making it impossible to calculate. Total nitrogen concentrations are derived from adding TKN concentrations to nitrate-nitrite concentrations. Total nitrogen load into East Oakwood Lake was 60,602.4 kg, with 66 percent being attributed to inflow from the inlet (Figure 68). After outflow was subtracted from the inflow, an estimated 10,815.5 kg of nitrogen was retained within East Oakwood Lake.

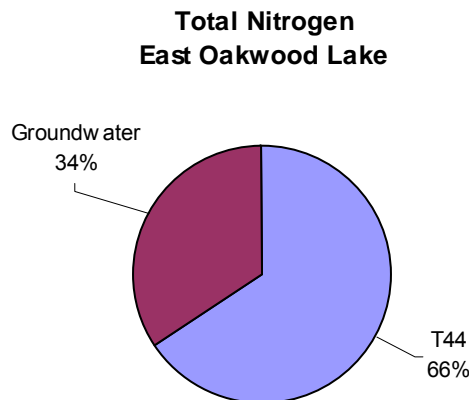


Figure 68. East Oakwood Lake Total Nitrogen Loads

Nitrogen contribution from groundwater is difficult to estimate because of its solubility in water. Therefore, a total nitrogen concentration of 1.18 mg/L was used to represent groundwater inflow. This concentration was derived by averaging samples from the SDGS monitored wells in the area. Results show groundwater contributed 34 percent of the nitrogen loading to East Oakwood Lake. The following calculations were used to find the groundwater contribution of nitrogen:

Hydrologic load converted to m³:

$$14,332.7 \text{ acre-ft} \times 1,234 = 17,686,551.8 \text{ m}^3$$

Convert m³ to liters:

$$17,686,551.8 \text{ m}^3 \times 1,000 = 17,686,551,800 \text{ L}$$

Groundwater nitrogen average concentration multiplied by hydrologic load (L):

$$1.18 \text{ mg/L} \times 17,686,551,800 \text{ L} = 20,870,131,124 \text{ mg}$$

Total groundwater nitrogen load converted to kg:

$$20,870,131,124 \text{ mg} \div 1,000,000 = 20,870.1 \text{ kg}$$

Phosphorus Budget

Total phosphorus loading from inflow to East Oakwood Lake during the sampling period was estimated at 3,510.2 kg. Inflows to East Oakwood Lake included tributaries, precipitation, and groundwater (Figure 69). Site T44 contributed 86 percent of the 3,510.2 kg of total phosphorus. Tributary loading was derived using the FLUX model. Monitored outflow at Site T45 showed a phosphorus load of 6,897.6 kg. After the outflow was subtracted from the inflow, an estimated 3,387.4 kg of phosphorus was unaccounted for and was presumed to be loading from un-monitored inflow.

Groundwater was responsible for 13 percent of the total phosphorus delivered to the lake. Groundwater contribution of total phosphorus was estimated by multiplying the mean total phosphorus concentration (0.026 mg/L) from groundwater samples collected by the SDGS by the amount of groundwater discharged into the lake (459.85 acre-ft). The following calculations were used to find the phosphorus contribution from groundwater:

Hydrologic load converted to m³:

$$14,332.7 \text{ acre-ft} \times 1,234 = 17,686,551.8 \text{ m}^3$$

Converted to m³ to liters:

$$17,686,551.8 \text{ m}^3 \times 1,000 = 17,686,551,800 \text{ L}$$

Groundwater phosphorus average concentration multiplied by hydrologic load (L):

$$0.026 \text{ mg/L} \times 17,686,551,800 \text{ L} = 459,850,346.8 \text{ mg}$$

Total groundwater phosphorus load converted to kg:

$$459,850,346.8 \text{ mg} \div 1,000,000 = 459.85 \text{ kg}$$

Total phosphorus load from precipitation (841.48 acre-ft) was multiplied by 0.03 mg/L (an average phosphorus content often found in non-populated regions) to determine phosphorus load from precipitation (Wetzel 1975). It was estimated that total phosphorus concentration from precipitation was responsible for one percent of the total phosphorus load to the lake. The following calculations were used to find the phosphorus contribution from precipitation:

Hydrologic load converted to m³:

$$841.48 \text{ acre-ft} \times 1,234 = 1,038,386.32 \text{ m}^3$$

Converted to m³ to liters:

$$1,038,386.32 \text{ m}^3 \times 1,000 = 1,320,386,320 \text{ L}$$

Precipitation phosphorus average concentration multiplied to hydrologic load (L):

$$0.03 \text{ mg/L} \times 1,320,386,320 \text{ L} = 31,151,589.6 \text{ mg}$$

Total precipitation phosphorus load converted to kg:

$$31,151,589.6 \text{ mg} \div 1,000,000 = 31.15 \text{ kg}$$

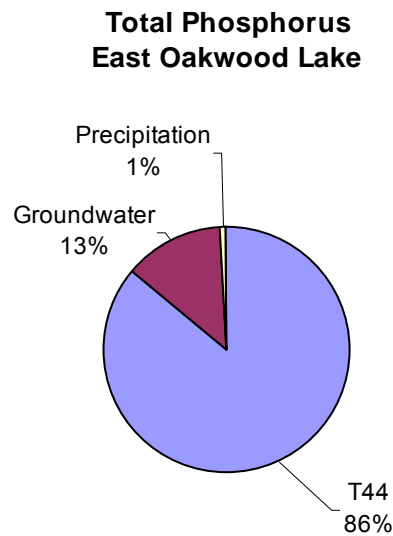


Figure 69. East Oakwood Lake Total Phosphorus Loads

Total Dissolved Phosphorus

The estimated total dissolved phosphorus loading from East Oakwood Lake watershed runoff was derived using the FLUX model. The total dissolved phosphorus loading from Site T44 is estimated at 1,087.7 kg. Monitored outflow at Site T45 showed a total dissolved phosphorus load of 5,593.1 kg. After the outflow was subtracted from the inflow, an estimated 4,505.4 kg of total dissolved phosphorus was unaccounted for and was presumed to be loading from un-monitored inflow.

Biological and Physical Habitat Summary

Phytoplankton (Algae) Data Summary

Planktonic algae were collected once in June and once in August in East Oakwood Lake and consisted of 57 species which represented 45 genera. They were divided into four separate algal divisions – flagellated algae, blue-green algae, diatoms, and non-motile green algae. The most diverse group was the non-motile green algae with 19 species. However, the blue-green algae exhibited the most abundance (Figure 70), with the *Oscillatoria agardhii* species being the most dense. Most noxious/nuisance conditions in lakes are produced by just three algae *Anabaena flos-aquae*, *Aphanizomenon flos-aquae*, and *Microcystis aeruginosa*. An oversupply of nutrients, especially phosphorus, will result in the excessive growth of these species. In June, four noxious species were identified in East Oakwood Lake, *Anabaena circinalis*, *Oscillatoria agardhii*, *Anabaena subcylindrica*, and *Microcystis aeruginosa*. In August, the same four species were present in addition to *Oscillatoria limnetica*, another noxious species.

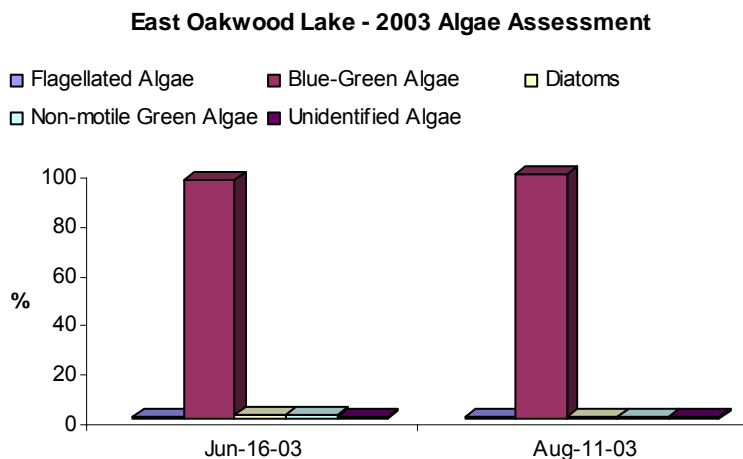


Figure 70. Percentage of Major Algae Groups Collected in East Oakwood Lake

Aquatic Macrophyte Survey (Aquatic Plants)

Between July 31st and August 11th, 2003, aquatic plants were surveyed in East Oakwood Lake along 32 transects at 130 sampling locations. Table 88 lists species identified during the survey. Sago Pondweed was the most abundant of the submergent macrophytes and cattail was the most abundant of the emergent species. Aquatic plants were absent at 19 of the 32 transects. See Figures 6, 7, and 8 in Methods Section for the number and location transects and see Figures 18, 19, and 20 in the Results Section for exact location of these species. Figure 71 shows the frequency of occurrence of each species using data from the 32 transects.

Table 88. East Oakwood Lake Aquatic Macrophytes

Common Name	Genus	Species	Habitat
Leafy Pondweed	<i>Potamogeton</i>	<i>foliosus</i>	Submergent
Claspingleaf Pondweed	<i>Potamogeton</i>	<i>richardsonii</i>	Submergent
Sago Pondweed	<i>Potamogeton</i>	<i>pectinatus</i>	Submergent
Cattails	<i>Typha</i>	<i>spp.</i>	Emergent

Transect Frequency of Occurrence

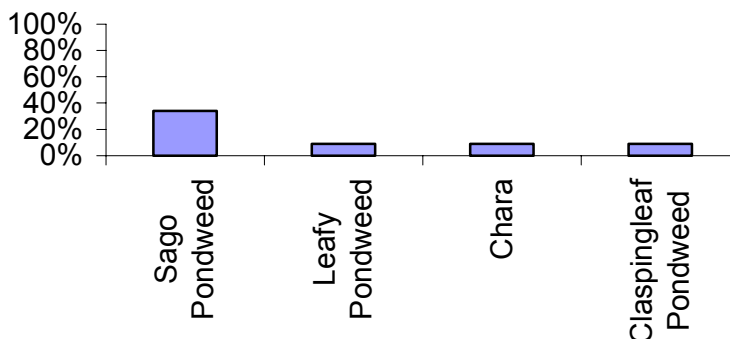


Figure 71. Type and Frequency of Aquatic Macrophytes at 32 Transects

Fish, Macroinvertebrate, and Habitat Summary

Fish and physical habitat measurements were not sampled on the outlet of East Oakwood Lake. However, the South Dakota Game, Fish, and Parks completed a fisheries survey of East Oakwood Lake during August and September of 2004 (Appendices A and B) and a visual shoreline habitat survey was completed during the aquatic plant survey.

Macroinvertebrates were collected at tributary Sites T44, T45, and T46. The following table (Table 89) summarizes the scores for each sampling site based on the macroinvertebrate data and the scoring system setup for tributaries during the North-Central Big Sioux River Assessment Project. Score sheets for each site can be found in the Results Section. HBI scores ranged from 9.0 to 9.6. Site T44 with a HBI of 9.6, had one Ephemeropteran and two Trichoptera found. Tolerant Chironomidae dominated this community, with 88 percent of the total assemblage being Chronomidae. T45 with a HBI of 9.0, was dominated by the amphipod *Hyaella* sp. and the highly tolerant Chironomidae *Glyptotendipes* sp. Site T46 with a HBI of 9.3, was dominated by the communities of Oligochaeta (Tubificidae) and Diptera (primarily Chironomidae). It should be noted that these streams serve as either an inlet or an outlet to a lake and the typical stream species are likely not present.

Table 89. Bug, Fish, and Habitat Index Values in the East Oakwood Lake Watershed

Site	Macroinverts	Fish	Habitat
T44	25	---	---
T45	46	---	---
T46	52	---	---

Trophic State Index (TSI) Summary

The trophic state of a lake is a numerical value that ranks its relative productivity. Developed by Carlson (1977), the Trophic State Index (TSI) allows a lake's productivity to be easily quantified and compared to other lakes. TSI values range from 0 (oligotrophic) to 100 (hypereutrophic). Low TSI values correlate with small nutrient concentrations, while higher TSI values correlate with higher levels of nutrient concentrations. Table 90 describes the TSI trophic levels and numeric ranges applicable to East Oakwood Lake.

Table 90. Carlson Trophic Levels and Numeric Ranges

Trophic Level	Numeric Range
Oligotrophic	0-35
Mesotrophic	36-50
Eutrophic	51-65
Hyper-eutrophic	66-100

The median of the chlorophyll-*a* TSI value and the Secchi depth TSI value was calculated to provide a single trophic state index score for East Oakwood Lake (Table 91). An overall median observed TSI of 67.4 indicates East Oakwood Lake is exhibiting a hyper-eutrophic condition (Figure 72).

Table 91. Observed Trophic State Index Values Collected in East Oakwood Lake

Parameter	Total Phosphorus	Secchi Depth	Chlorophyll- <i>a</i>	Median TSI (Secchi & chl _a)
Mean TSI	77.5	60.0	74.7	67.4

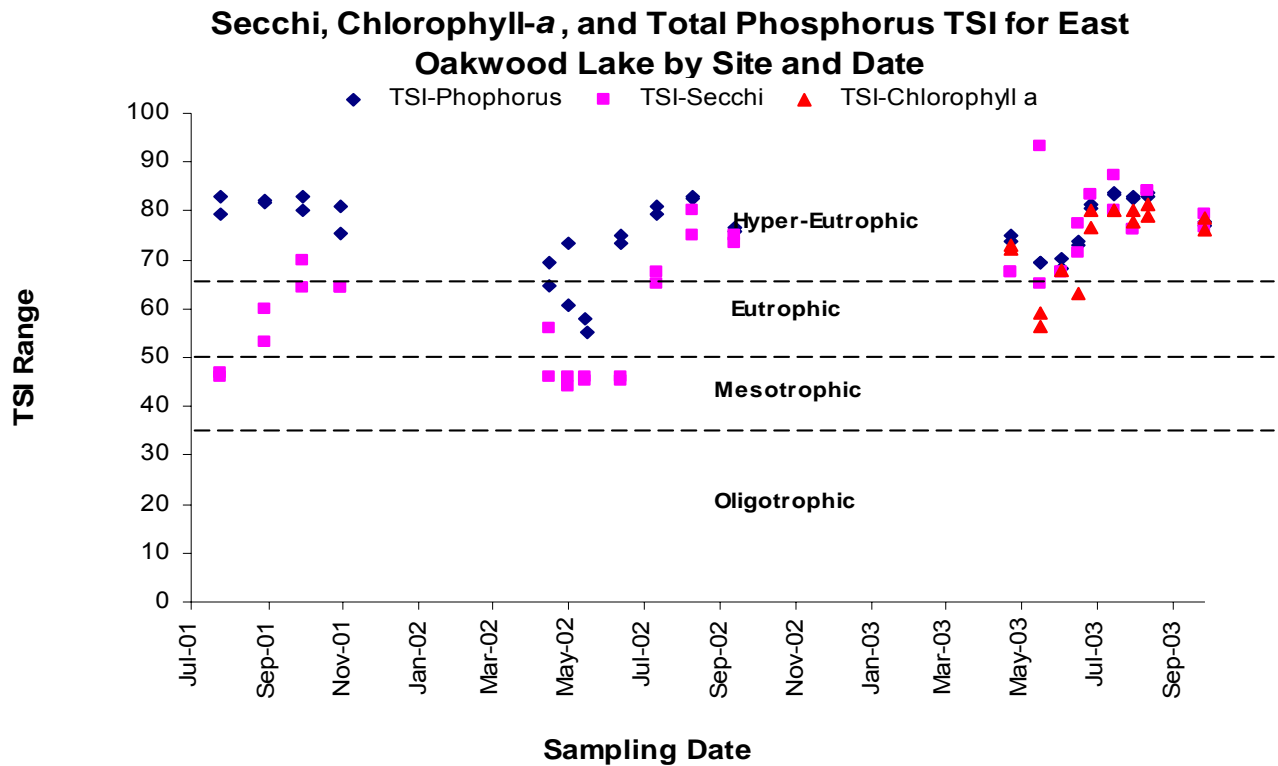


Figure 72. East Oakwood Lake Secchi and Chlorophyll-*a* TSI Plotted by Carlson Trophic Levels

In order to determine impairment of a lake the SD DENR assesses the trophic status of a lake, using the median TSI value of chlorophyll-*a* concentrations and Secchi depth measurements. The SD DENR has developed an EPA approved protocol that establishes desired TSI levels of lakes based on their fishery classification. East Oakwood Lake is classified as a warmwater semi-permanent fishery and is currently not supporting the desired TSI level (SDDENR 2005). The full support target for lakes within the

warmwater semi-permanent fishery classification is set at an overall median (of chlorophyll-*a* and Secchi depth TSI) TSI value ≤ 63.4 .

Trophic State Index values are plotted using beneficial use support categories as shown in Figure 73. TSI values steadily increased from May through October. All parameters are not supporting of the beneficial uses from July through October. Secchi depth was sampled in 2001 and 2002. Results show the TSI values of each are scattered throughout the sampling season. In 2003, both Secchi depth and chlorophyll-*a* were sampled and TSI values of both increase throughout the season.

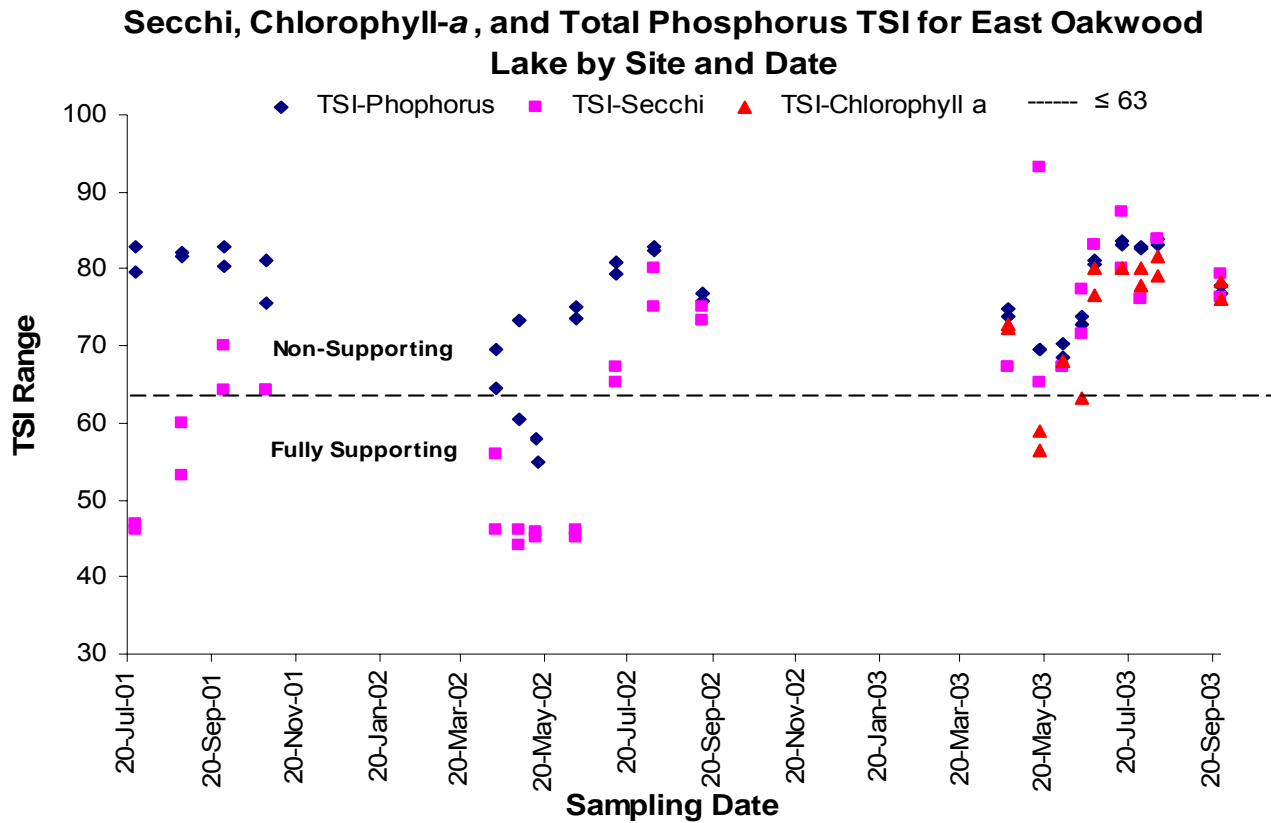


Figure 73. East Oakwood Lake Secchi Depth and Chlorophyll-*a* TSI Values Plotted by Beneficial Use Support

Reduction Prediction based on BATHTUB Model

In-lake responses to reductions in watershed nutrient loading were calculated using the BATHTUB model. Each sampled variable was modeled (Figure 74 and Table 92). See Appendix P for a description of each BATHTUB variable. The reduction of watershed phosphorus contribution would improve the lake from a non-supporting predicted TSI value of 72.5 to a supporting TSI value ≤ 63.4 . The phosphorus loading can be attributed to watershed runoff and internal sediment loading from previous watershed runoff.

East Oakwood Lake TSI Reductions based on BATHTUB Tributary Nutrient Reductions

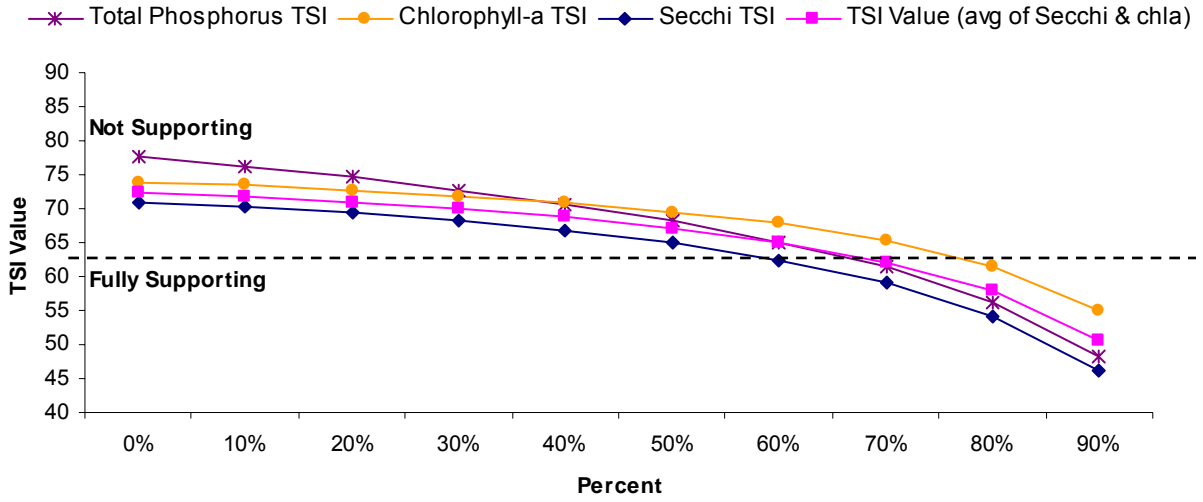


Figure 74. East Oakwood Lake BATHTUB Predicted Mean TSI Reductions and Use Support

Table 92. East Oakwood Lake Observed and Predicted Watershed Reductions in Nitrogen and Phosphorus Concentrations and Predicted In-lake Mean TSI Values Using the BATHTUB Model

East Oakwood Lake Variable	Observed Values calculated using BATHTUB	Condition of the Lake based on current loadings	Percent reductions for total lake load based on predicted model								
			10%	20%	30%	40%	50%	60%	70%	80%	90%
	OBSERVED	PREDICTED	Est	Est	Est	Est	Est	Est	Est	Est	Est
Total P	162	163.5	147.7	131.9	116.1	100.3	84.6	68.7	52.9	37.1	21.3
Total N	2063.5	2454.9	2230	2005.2	1780.4	1555.5	1330.7	1105.8	881	656.2	431.3
CHL-A	89.3	82.8	78.3	73.2	67.3	60.6	53	44.2	34.3	23.4	12
SECCHI	1	0.5	0.5	0.5	0.6	0.6	0.7	0.8	1.1	1.5	2.6
ORGANIC N	1865	2050.5	1948.3	1831.7	1698.1	1545.1	1370.5	1170.1	944.4	696	437.7
ANTILOG PC-1	2839.3	4271.4	3735.3	3193.9	2651.7	2116.8	1601.6	1117.6	689.7	344.4	111.4
ANTILOG PC-2	28.3	16	16.2	16.3	16.5	16.7	16.8	16.9	17	16.9	16.2
(N-150)/P	11.8	14.1	14.1	14.1	14	14	14	13.9	13.8	13.6	13.2
INORGANIC N/P	3.3	22	26.7	44.9	82.3	10.5	1	1	1	1	0.5
FREQ (CHL-a>10)%	99.9	99.9	99.9	99.8	99.7	99.5	99.1	98.1	95.3	85.5	49.6
FREQ (CHL-a>20)%	98.2	97.6	97.1	96.3	95	93	89.6	83.3	71.2	47.7	13
FREQ (CHL-a>30)%	92.6	90.8	89.2	87	84	79.5	72.8	62.3	46.2	23.8	3.7
FREQ (CHL-a>40)%	83.8	80.6	78	74.7	70.2	64.1	55.7	44	28.8	12	1.2
FREQ (CHL-a>50)%	73.4	69.3	66	62	56.8	50	41.4	30.5	17.9	6.2	0.5
FREQ (CHL-a>60)%	63	58.3	54.8	50.4	45.1	38.4	30.5	21.1	11.2	3.4	0.2
TSI-P	77.5	77.6	76.2	74.6	72.7	70.6	68.1	65.1	61.4	56.3	48.3
TSI-CHLA	74.7	73.9	73.4	72.7	71.9	70.9	69.5	67.8	65.3	61.5	55
TSI-SEC	60	71	70.3	69.3	68.2	66.7	64.9	62.4	59.1	54.1	46.1
Median TSI (chla & Secchi)	67.4	72.5	71.9	71.0	70.1	68.8	67.2	65.1	62.2	57.8	50.6

Point Sources

This watershed is predominately agricultural. There are no municipalities or known point sources located in this watershed.

Non-Point Sources

Non-point sources of concern are those that contribute TSS and nutrients. Since non-point sources can be difficult to pinpoint, the following are the possible sources of sediment and nutrients within this watershed. Possible sediment sources of pollution include agricultural runoff, and eroding stream bed and banks. Possible sources of phosphorus include human and animal waste, soil erosion, fertilizer runoff, and detergents. Possible sources of nitrogen are fertilizers, animal wastes, and septic systems.

WATER QUALITY GOALS

Water quality goals are based on beneficial uses and standards to meet those uses. This assessment was initiated due to East Oakwood Lake being listed on the 303 (d) Waterbody List because of excessive nutrients, siltation, and noxious aquatic plants, all of which do not have applicable numeric water quality standards. However, lakes are also assessed based on Trophic State Index (TSI). TSI takes into account the water clarity, nutrient levels, and quality of water. Based on the monitoring results all lakes in the Oakwood chain of lakes are impaired and do not meet TSI requirements. Water quality results also show East Oakwood Lake is not supporting its beneficial uses based on the numeric standard for pH (Figure 75).

Goals were established to reduce nutrient loadings to acceptable levels in order to meet the beneficial uses of these lakes. Decreasing nutrient loads will improve TSI levels in these lakes as well as improve the pH levels. To meet the TSI criteria, all lakes must maintain at a mean TSI of ≤ 63.4 . As for pH in East Oakwood Lake, pH levels must be maintained at greater than or equal to 6.5 and less than or equal to 9.0 to support the lake's beneficial uses.

Excessive Nutrients

Phosphorus is the main nutrient that contributes to excessive algae and weed growth in lakes. Each of the lakes showed high phosphorus TSI levels. Possible sources of phosphorus include human and animal waste, soil erosion, fertilizer runoff, and detergents. It is recommended that phosphorus levels be maintained below 0.3 mg/L to help prevent algal blooms. Algal blooms can also produce higher levels of pH, similar to what is being seen in East Oakwood Lake. Phosphorus levels will need to be reduced in order to improve pH to levels that will support the beneficial uses assigned to East Oakwood Lake.

Assessment results show that all three lakes are in a hypereutrophic condition. Characteristics of a hypereutrophic lake include very high levels of nutrients, excessive plant growth, and excessive algae growth. East Oakwood Lake and West Oakwood Lake are extremely biologically productive. This productivity will continue to increase, speeding up the natural lake processes and eventually becoming detrimental to aquatic life. Therefore, it is important to slow down productivity in order to improve water quality and fully support beneficial uses.

Siltation

Excessive siltation can cause an over abundance of phosphorus because during periods of anoxia the sediment can release phosphorus. Phosphorus can also be released after sediment is re-suspended due to wave action or foraging of fish such as carp.

Noxious Aquatic Plants

Noxious aquatic plants were documented in both East Oakwood Lake and West Oakwood Lake. West Oakwood Lake lacked diversity of aquatic plants. Chlorophyll-*a* levels were high, 40 ug/L to 93 ug/L, in each of the lakes. These levels are known to produce nuisance algae blooms. Concentrations in excess of 55 ug/L signify hypereutrophic conditions.

MANAGEMENT OPTIONS AND RECOMMENDATIONS

Before considering in-lake management options, sources of external loadings must be dealt with first. If external sources are not reduced before implementing in-lake alternatives, the management plan will likely fail. If it is determined that external sources are not contributing to the water body problems, then in-lake restoration would be the next step.

At this time two TMDLs are proposed due to TSI impairment (Appendix Q and R). These reports will address the impairments identified for East Oakwood Lake and West Oakwood Lake. Both lakes were identified for TMDL development in the 303 (d) list of impaired water and assessment results show that both are not currently supporting their beneficial uses. The TMDL reports can be found in Appendices Q and R.

BEST MANAGEMENT PRACTICES

External Management of Nutrient Sources

Best management practices (BMPs) proposed to control external nutrient transport from agricultural non-point sources are shown in Table 93. This table lists optional BMP practices that can be used to reduce or eliminate external sources of nutrients. As indicated by the AnnAGNPS model, agricultural practices are contributing to the nutrient load in this watershed (See Results Section).

Table 93. Best Management Practices for Nutrient Reductions

BMP	Potential Reduction
(1) Feedlot Runoff Containment	High
(2) Manure Management	High
(3) Grazing Management	Moderate
(4) Alternative Livestock Watering	Moderate
(5) Conservation Tillage (30% residue)	Moderate
(6) No Till	High
(7) Grassed Waterways	Moderate
(8) Buffer/Filter Strips	Moderate
(9) Commercial Fertilizer Management	Moderate
(10) Wetland Restoration or Creation	High
(11) Riparian Vegetation Restoration	High
(12) Conservation Easements	High
(13) Livestock Exclusion	High

Note: approximate range of reductions:
 Low = 0-25% Moderate = 25-75% High = 75-100%

Agricultural animals need to be pastured at least 30 meters away from the shoreline of these lakes and excluded from directly accessing the lakes.

At a minimum, it is recommended the first 30 meters of bank along the shoreline of all the lakes should have vegetated buffers; although, > 30 meters is preferred. Establishing buffer zones greater than 30 meters around shallow agricultural lakes have shown to increase numbers of zooplankton (Dodson et. al 2004). Zooplankton has shown to suppress phytoplankton and increase macrophyte abundance.

Most of these BMPs are further explained in Table 94. An explanation of the benefits of using a particular BMP and the reduction that can be achieved when put to use. This table was adapted from MPCA (1990) sources.

Table 94. Percent Reduction Achievable by Best Management Practice

BMP	Benefits	Achievable Reduction
Manure Management	<ul style="list-style-type: none"> • Reduces Nutrient Runoff • Significant Source of Fertilizer 	50-100% reduction of nutrient runoff
Buffer/Filter Strips	<ul style="list-style-type: none"> • Controls sediment, phosphorus, nitrogen, organic matter, and pathogens 	50% sediment and nutrient delivery reduction
Conservation Tillage	<ul style="list-style-type: none"> • Reduces runoff • Reduces wind erosion • More efficient in use of labor, time, fuel, and equipment 	30-70% pollutant reduction 50% nutrient loss reduction (depends on residue and direction of rows and contours)
Fencing	<ul style="list-style-type: none"> • Reduces erosion • Increases vegetation • Stabilized banks • Improves aquatic habitat 	Up to 70% erosion reduction
Grassed Waterways	<ul style="list-style-type: none"> • Reduces gulleys and channel erosion • Reduces sediment associated nutrient runoff • Increases wildlife habitat 	10-50% sediment delivery reduction (broad) 0-10% sediment deliver reduction (narrow)
Strip Cropping	<ul style="list-style-type: none"> • Reduces erosion and sediment loss • Reduces field loss of sediment associated nutrients 	High quality sod strips filter out 75% of eroded soil from cultivated strips

Improved landuse practices can greatly reduce the amount of nutrients entering East Oakwood Lake and West Oakwood Lake. In addition to the affects of the watershed on water quality, there are also affects from shoreline development. Much of West Oakwood Lake’s southwest shoreline is developed. Lakeshore homeowners can also help reduce lake pollution and protect water quality by preventing nutrients and sediment from entering the lake. The following lakeshore BMPs should be implemented by lakeshore owners:

- Maintaining appropriate landscaping
- Reducing the use of fertilizers on lawns/gardens
- Reduce the use of pesticides
- Use lawn fertilizers free of phosphorus
- Consider planting native vegetation near shoreline
- Use organic fertilizers and pesticides

Fertilizers and weed killers contribute greatly to nutrients in the lake as it runs off lakeshore property during heavy rains. Additionally, a septic survey of shoreline homes should be conducted to ensure these systems are not contributing to the excess nutrients in the lake. Currently, there is not a centralized sewer system in place for these developments.

Figure 75 is a priority management map showing the areas of the watershed that may be contributing the most to external nutrient loadings. The red shaded areas are the AnnAGNPS cells found to be contributing more than one pound per acre of phosphorus and more than three pounds per acre of nitrogen. These results are based on a 10-year simulation using the AnnAGNPS model. The complete listing of phosphorus and nitrogen loadings for each cell can be found in Appendix O.

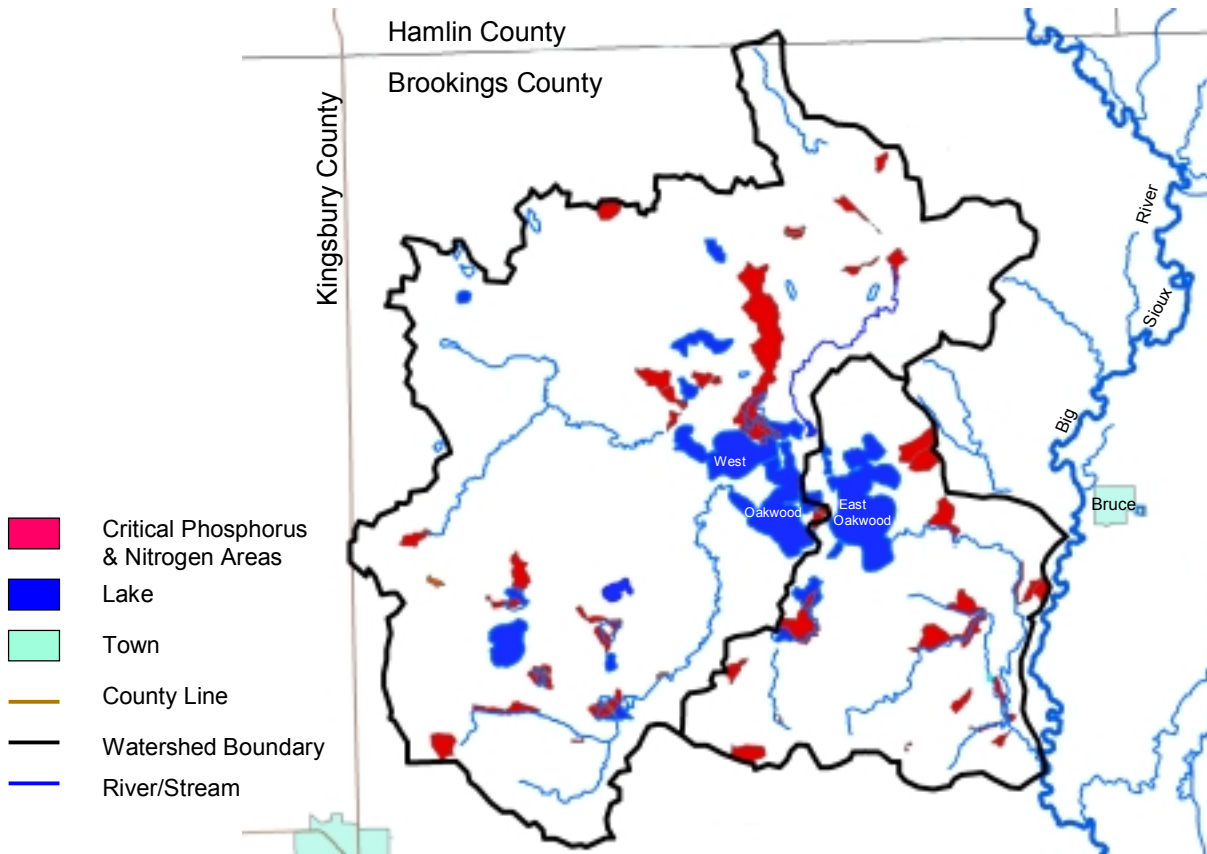


Figure 75. Critical Nutrient Areas Based on a 10-Year Simulation at Current Conditions

Internal (In-Lake) Management of Nutrients

West Oakwood Lake is currently outfitted with an in-lake aerator at the southeast end of Lake Tetonkaha. It is operational from late fall and into early spring. Although the aerator is present, this lake will still winter kill occasionally. It is situated near the southeast end of Tetonkaha Lake. During the study period several large carp were observed within this lake system. Carp can devastate aquatic vegetation, which reduces aquatic invertebrates, and ultimately reduces the necessary habitat to sustain a good population of game fish. Since the fish kill during the winter of 2000-2001, Game, Fish and Parks has restocked both lakes.

The following are five in-lake management alternatives to consider for improving water quality in Oakwood Lakes:

- 1) Effective fish barrier between Big Sioux River and East Oakwood Lake
- 2) Septic system survey of South Lake Tetonkaha
- 3) Aggressive removal of rough fish biomass in both East and West Oakwood Lakes
- 4) Dredge Mortimer Slough
- 5) Aquatic plant re-establishment in West Oakwood Lake

Sediment sealing and sediment removal are probably the most highly effective means of reducing nutrients and sediment in many lake systems. However, aluminum sulfate treatment would not work effectively with these shallow lakes and is not recommended. Wave action alone would likely break the seal this chemical makes with the bottom sediments. Dredging may be an option for the area known as Mortimer's Slough. This slough is presently being used as a walleye rearing pond by S.D. Game, Fish and Parks. Making this slough deeper would improve filtering of nutrients from agricultural runoff, as well as act as a settling pond for sediment before it enters West Oakwood Lake from the north. It would also enhance the current walleye rearing activities. An evaluation of the bottom sediments of this slough would need to be accomplished before considering dredging.

These lakes are frequently stocked with walleye fingerlings and adult yellow perch. Table 95 shows the most recent stocking efforts. According to the West Oakwood Lake Fisheries Survey (2004), this lake would be capable of sustaining a walleye population if it did not winterkill. It is unlikely that efforts to improve the water quality will prevent occasional winterkills. SD Game, Fish and Parks also recommended commercial fishing for common carp, bigmouth buffalo, and black bullhead. A severe algae bloom was documented during the survey and Secchi depth measured 0.28 meters. The fisheries survey of East Oakwood Lake (2004) also noted a "dense algae bloom" and a Secchi depth measurement of 0.23 meters. This report also recommended commercial fishing for common carp and black bullhead.

Table 95. Oakwood Lakes Recent Stocking Efforts

2001	Lake	# Stocked	Species	Size
	East Oakwood	100,000	Walleye	Fingerling
	East Oakwood	10,159	Yellow Perch	Adult
	West Oakwood	79,300	Walleye	Fingerling
	West Oakwood	12,221	Yellow Perch	Adult
2004				
	East Oakwood	100,700	Walleye	Fingerling
	West Oakwood	119,100	Walleye	Fingerling

It is recommended that rough fish be harvested from these lakes as they keep phosphorus recycled and re-suspended through their feeding activities. Commercial fishing has taken place in the past, but has not

been as aggressive as it should be. According to the SD Game, Fish and Parks Department, the most recent commercial fishing activity has been on West Oakwood Lake. In the past year several thousand pounds of rough fish have been removed (Table 96). However, without an effective fish barrier in place to prevent these species from entering this lake system, commercial fishing will not make a significant impact on fish biomass removal.

Table 96. Recent Rough Fish Removal by Commercial Fishing

Lake	Date	Type	Pounds
West Oakwood	Feb 2003	Bullheads	2,100
West Oakwood	Oct 2005	Bullheads	6,600
West Oakwood	Apr-Jun 2006	Bullheads	19,700
West Oakwood	Apr-Jun 2006	Carp	9,000
West Oakwood	Apr-Jun 2006	Bigmouth Buffalo	3,000

Economics and monetary limitations have prevented a more aggressive approach to removing the rough fish biomass from these lakes. According to GFP (Todd St Sauver, Fisheries Manager, Southeast Region, pers. comm), after winterkills (which heavily reduces the rough fish biomass) they have seen stocking efforts of walleye flourish and water quality improve. It is believed water quality improvement could be seen after removing much of the rough fish biomass. In addition, it would be imperative to install an effective fish barrier at the outlet of East Oakwood Lake *before* removal of the rough fish biomass. As the area between the Big Sioux River and the outlet of East Oakwood Lake floods or receives high waters, rough fish (i.e. common carp) find their way from the Big Sioux River into the Oakwood Lakes system. These fish can have a devastating effect on a lake system, from rooting up vegetation, stirring up bottom sediments, to adding to the amount of nutrients from their waste and carcasses. Other methods to control nutrients may be ineffective due to the shallowness of the lakes and the findings from the Oakwood-Poinsett (1991) assessment indicating that these lakes are acting as nutrient sinks.

Due to the development of the southeast shoreline of Lake Tetonkaha, it is recommended septic systems be checked to ensure they are in compliance with regulations and ensure any pipes emitting discharge directly to the lake do not contain detergents or other harmful chemicals.

Increased nutrient levels have shown to decrease plant community diversity with an increase in dominance of species such as sago pondweed (Moss et. al 1996). Sago pondweed was the only species of aquatic plant found in West Oakwood Lake. The presence of rough fish as well as deteriorated water quality has limited the diversity of plant growth in this lake. The shoreline of this lake is varied with some sheltered bays. It is recommended that aquatic plants be re-established in these areas, but only *after* an effective fish barrier is in place to prevent any more rough fish from entering the lakes and *after* a large portion of the rough fish biomass has been removed. It will be imperative to work in conjunction with the South Dakota Game, Fish and Parks Department in determining the best approaches to these management alternatives. It is recommended data such as population estimates of the nuisance fish species (common carp, bigmouth buffalo, and black bullhead) be collected to determine the amount of biomass that should effectively be removed. The SD Game, Fish and Parks Department (Todd St Sauver, Fisheries Manager, Southeast Region, pers. comm) suggested fish composting as an alternative to disposing of the unwanted fish. This would be a viable alternative if commercial fishermen have no interest in them. Establishment of composting areas would require landowner cooperation. The land owner would benefit from the compost by using it to enrich their cropland soils.

The reduction of nutrients to these lakes will likely reduce noxious the blue-green algae problems and summer algae blooms. To facilitate the growth of macrophytes and prevent the blue-green algae from dominating, experimental fish free enclosures could be placed in vulnerable areas to try to re-colonize beneficial aquatic plants.

HISTORICAL COMPARISON

Water Quality Comparisons

The Oakwood chain of lakes was assessed over a ten year period during the South Dakota Oakwood Lakes-Poinsett Rural Clean Water Program project (USDA-ASCS 1991). This project was conducted between 1981 and 1991. Between the years of 1987 and 1989, water quality was collected from the Oakwood Lakes watershed. Several monitoring locations during that study coincide with the monitoring locations used for this assessment.

According to the 1991 report, surface water monitoring indicated that all tributaries to the Oakwood Lakes supply excess amounts of nitrogen and phosphorus to the system. The lakes can sustain large algal blooms even in low flow years because much of the bottom sediments are saturated with phosphorus. This report concluded that the Oakwood Lakes system is operating as phosphorus sink with a 70 to 100 percent trapping efficiency.

The report recommended any future goals to improve water quality in these lakes would need to include in-lake restoration measures due their nutrient saturated in-lake sediments.

Best Management Practices were applied to some areas of the watershed. However the report stated that during the project waste managements systems were not well accepted due to their high costs. Some producers were not eligible for cost-sharing because they were already using conservation measures. Not all BMPs were implemented because of economic reasons or landowner changes. Other federal programs prohibited this project's program to offer incentives in some cases. For these reasons, there is still room for improvement throughout this watershed. In fact, this assessment showed that there are seventeen feedlots that rated > 50 on their AGNPS ratings.

The lakes were found to be hypereutrophic in 1991. The tributaries were carrying nutrient levels high enough to keep the lake in its hypereutrophic condition. The report didn't feel that BMPs alone would result in noticeable water quality improvements to the lake, only that they could reduce sedimentation. Because the lakes occasionally winterkill, the chemical and biological components of the system become altered. The report also stated nutrients seem to be released from lake sediments in the late summer as indicated by chlorophyll-a numbers and Secchi depth measurements. It was recommended assessing internal nutrient loadings from sediment. It is believed improvements to water quality may not be seen with watershed BMPs, if internal loads are the problem.

A comparison of the historic TSI values for phosphorus, Secchi depth, and chlorophyll-*a* are compared with the most recent assessment TSI values for East Oakwood Lake (Figure 76) and West Oakwood Lake (Figure 77). Both graphs indicate little if any change in trophic state of these lakes.

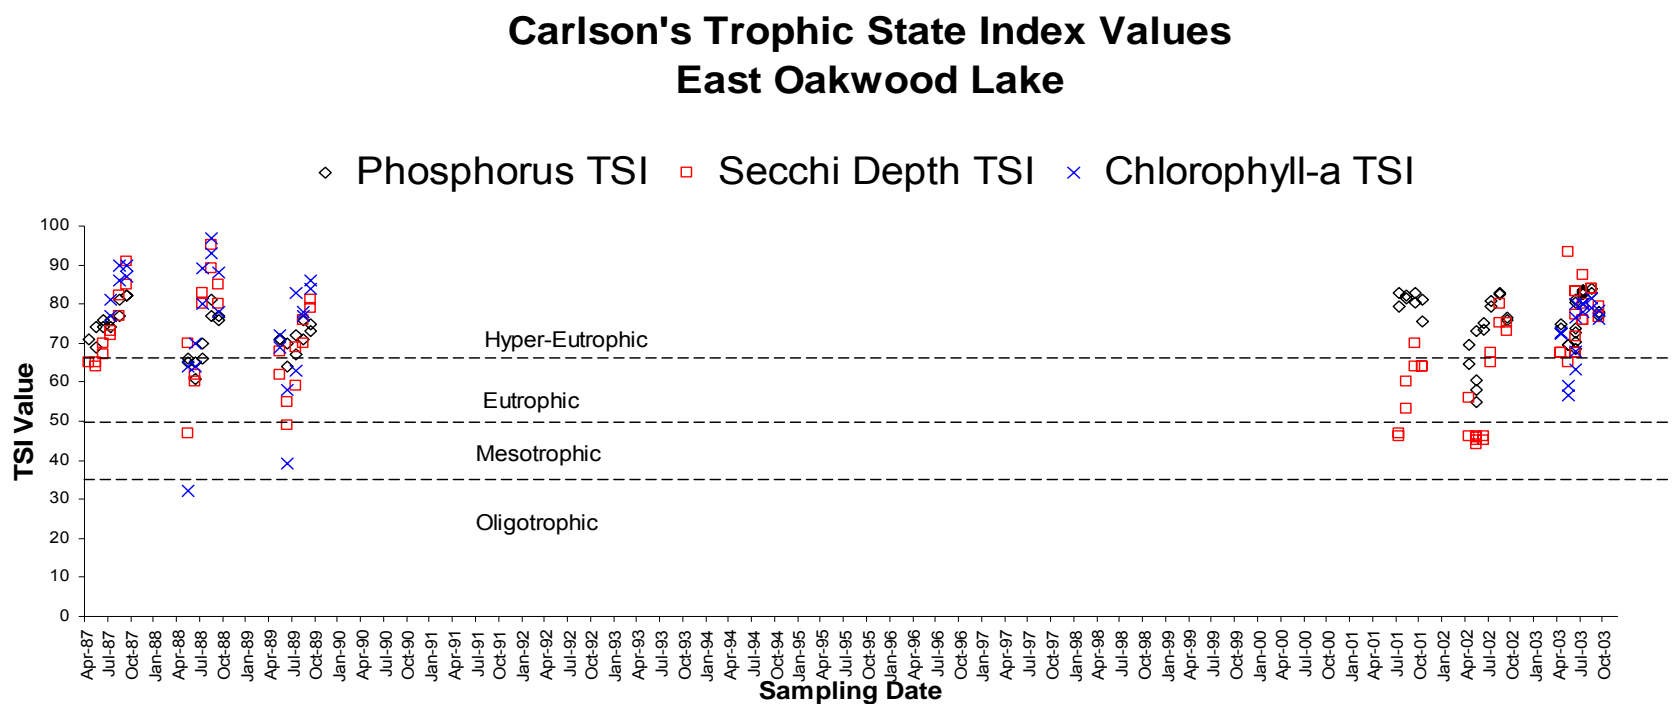


Figure 76. Comparison of Historical TSI Values with Current TSI Values of East Oakwood Lake

Carlson's Trophic State Index Values West Oakwood Lake

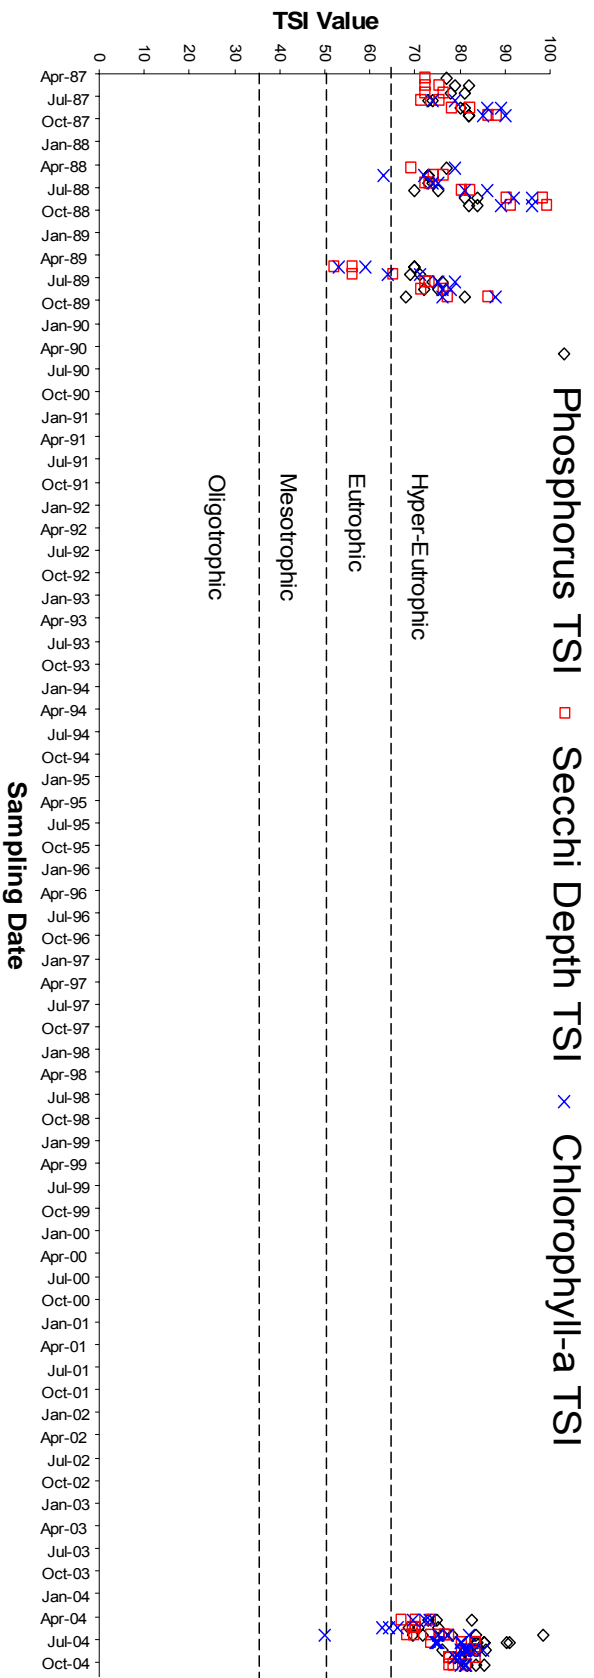


Figure 77. Comparison of Historical TSI Values with Current TSI Values of West Oakwood Lake

Overall, TSI value (combined average of Secchi depth measurement and chlorophyll-a) used to determine support or non-support of a lakes beneficial uses was plotted for both East Oakwood Lake and West Oakwood Lake. A historical comparison with current TSI measurements is shown in Figure 78. Both lakes are not currently supporting their beneficial uses based on TSI value.

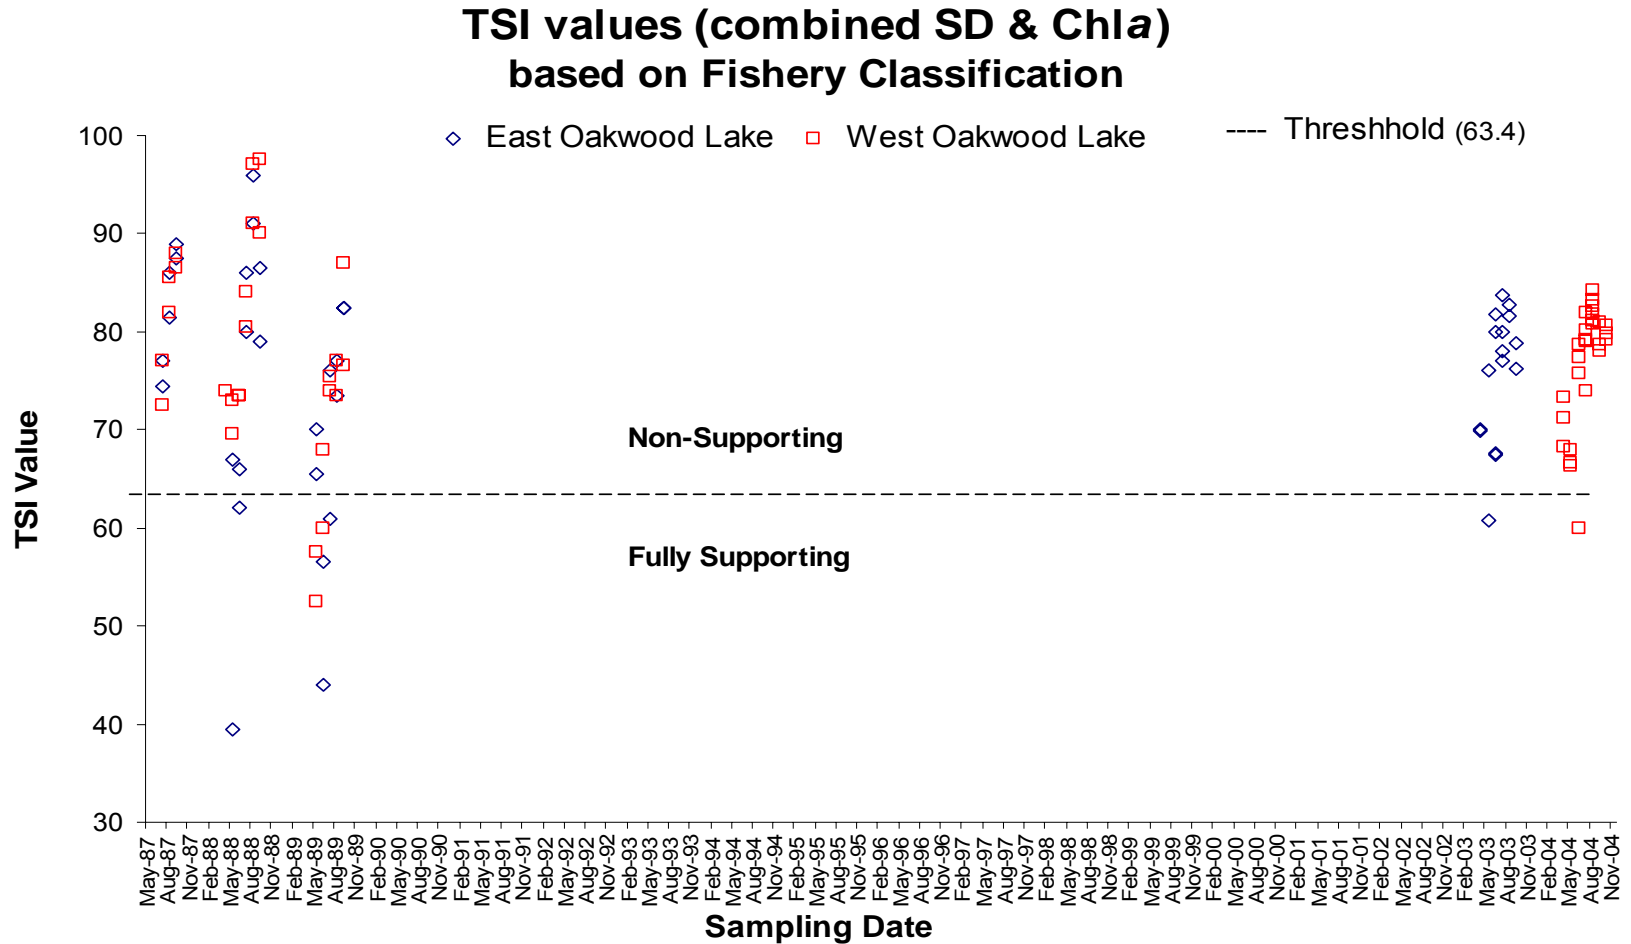


Figure 78. Comparison of Historical and Current Overall TSI Values used to Determine Beneficial Use Support of Oakwood Lakes

Historic monitoring sites and coinciding monitoring sites from the current assessment were used to compare water quality averages of total suspended solids, total nitrogen, and total phosphorus. Table 97 shows increased solids within West Oakwood Lake and at the inlet (Site T43) of West Oakwood Lake. Table 98 shows increases in total nitrogen in West Oakwood Lake and at the inlet (Site T48) of West Oakwood Lake. Phosphorus is showing to have increased in both lakes with a decrease at the inlet (Site T48) of West Oakwood Lake (Table 99).

Table 97. Historic Comparison of Total Suspended Solids

Total Suspended Solids (mg/L)			1987-1989	2001-2002
Site (1987-1989)	Site (2001-2002)		Mean	Mean
T-1	T48	Inlet to Johnson Lake	29	22
L-2	L10	*Johnson Lake	32	41
L-3	L11	*North Lake Tetonkaha	32	42
T-2	T43	Inlet to South Lake Tetonkaha	20	47
L-4	L12	*South Lake Tetonkaha	27	35
IL-1	T44	Connection between South Tetonkaha and East Oakwood	22	26
L-7	L1	North East Oakwood Lake	27	13
T-0	T45	Outlet of East Oakwood Lake	18	20

* samples were collected from 1987-1989 and in 2004

Table 98. Historic Comparison of Total Nitrogen

Total Nitrogen (mg/L)			1987-1989	2001-2002
Site (1987-1989)	Site (2001-2002)		Mean	Mean
T-1	T48	Inlet to Johnson Lake	2.45	2.69
L-2	L10	*Johnson Lake	2.93	4.22
L-3	L11	*North Lake Tetonkaha	3.09	2.94
T-2	T43	Inlet to South Lake Tetonkaha	2.45	2.05
L-4	L12	*South Lake Tetonkaha	3.01	4.04
IL-1	T44	Connection between South Tetonkaha and East Oakwood	2.62	3.04
L-7	L1	North East Oakwood Lake	2.71	2.06
T-0	T45	Outlet of East Oakwood Lake	1.62	1.56

* samples were collected from 1987-1989 and in 2004

Table 99. Historic Comparison of Total Phosphorus

Total Phosphorus (mg/L)			1987-1989	2001-2002
Site (1987-1989)	Site (2001-2002)		Mean	Mean
T-1	T48	Inlet to Johnson Lake	0.393	0.193
L-2	L10	*Johnson Lake	0.153	0.303
L-3	L11	*North Lake Tetonkaha	0.146	0.191
T-2	T43	Inlet to South Lake Tetonkaha	0.490	0.420
L-4	L12	*South Lake Tetonkaha	0.136	0.184
IL-1	T44	Connection between South Tetonkaha and East Oakwood	0.213	0.241
L-7	L1	North East Oakwood Lake	0.121	0.162
T-0	T45	Outlet of East Oakwood Lake	0.112	0.176

* samples were collected from 1987-1989 and in 2004

PUBLIC INVOLVEMENT AND COORDINATION

STATE AGENCIES

The SD DENR was the primary state agency involved in the completion of this assessment. They provided equipment as well as technical assistance throughout the project. They also provided ambient water quality data for the lakes.

FEDERAL AGENCIES

The Environmental Protection Agency (EPA) provided the primary source of funds for the completion of the assessment of the Big Sioux River watershed.

LOCAL GOVERNMENTS, OTHER GROUPS, AND GENERAL PUBLIC

The EDWDD provided the sponsorship that made this project possible on a local basis. In addition to providing administrative sponsorship, EDWDD also provided local matching funds and personnel to complete the assessment.

Public involvement consisted of individual meetings with landowners that provided information on feedlots in the area. Other information about housing developments were collected from a local real estate agency.

OTHER SOURCES OF FUNDS

In addition to funds supplied by the East Dakota Water Development District (EDWDD) and the Environmental Protection Agency (EPA), additional financial support was provided by the Brookings County Conservation District (BCCD) and the South Dakota Conservation Commission (through a grant to BCCD). The inventory of the animal feeding operations and assessment of the potential environmental risk posed by each was work completed by BCCD using these funds in support of the overall project. The inventory and assessment of the AFOs was funded by EPA 319, EDWDD, and the SDCC grant.

ASPECTS OF THE PROJECT THAT DID NOT WORK WELL

Most of the objectives proposed for the project were met in an acceptable fashion and in a reasonable time frame. Due to delays in obtaining a properly working AnnAGNPS program and delays in receiving water quality results from the WRI lab, the related tasks of this project fell behind schedule. Additionally, another sizeable 319 funded watershed assessment project was being completed at the same time this project was beginning. Three years into this project, two additional lakes were added and needed to be sufficiently assessed.

The sampling of macroinvertebrates near or at a lake inlet and lake outlets may not have provided information sufficient enough to indicate the status of the overall stream. With the sampling locations so close to the lake, species may not have been typical to the small stream environment because of influence from macroinvertebrates from the lake. The use of rock baskets may have been misleading due to the types of macroinvertebrates inhabiting a stream at a particular site. It would only be valuable if the substrate of that stream also included rocks. A rock basket within a silt-bottom stream may collect bugs that are not typically seen or inhabit a particular area of the stream due to rocks not ordinarily being in the area. Another method of sampling macroinvertebrates in these heavily silted streams may have been more effective (i.e. D-net sampler).

This assessment should have included sediment sampling to determine the quantity of nutrients trapped in the sediment as well as the depth of accumulated sediment within these lakes.

Sampling and analysis methods could be improved in future projects by

- winter sampling the lakes for water quality through the ice
- require sediment samples of the lakes (especially if there is suspected phosphorus problem)
- yearly ambient water quality monitoring so future studies have a good base of data

Overall, data gathered during this project was sufficient enough to make a reasonable determination on the condition of these two lakes and to make realistic suggestions for management options. The ultimate goal is to reduce nutrient levels in the lakes and improve water quality.

LITERATURE CITED

- Allan, J. D. 1995. Stream Ecology Structure and Function of Running Waters. Chapman & Hall Publishers. London. 388 pp.
- Barbour, M. T., J. Gerritsen, B. D. Snyder, and J. B. Stribling. 1999. Rapid Bioassessment Protocols for Use in Wadeable Streams and Rivers: Periphyton, Benthic Macroinvertebrates, and Fish. United States Environmental Protection Agency. EPA 841-B-99-002.
- Carlson, R. E. 1977. A trophic state index for lakes. Limnology Research Center. Minneapolis, Minnesota. Pp 361-369.
- Dodson, S., R. Lillie, and S. Will-Wolf. 2004. Land use, water chemistry, aquatic vegetation, and zooplankton community structure of shallow lakes. Ecological Applications: Vol. 15, No. 4. Pp 1191-1198.
- Fetter, C. W. 1988. Applied Hydrogeology, 2nd Edition. Merrill Publishing Company. New York, New York. 592 pp.
- Gordon, N. D., T. A. McMahon, and B. L. Finlayson. 1992. Stream hydrology: an introduction for ecologists. John Wiley and Sons. New York, New York.
- Huxoll, C. 2002. County Wildlife Assessment with a Summary of the 1991-2002 Assessments. South Dakota Department of Game, Fish, and Parks.
- Moss, B., J. Madgwick, and G. Phillips. 1996. A guide to the restoration of nutrient-enriched shallow lakes. Broads Authority, Norwich, United Kingdom. 180 pp.
- MPCA. 1990. Protecting Minnesota's Waters....The Land-Use Connection. MPCA Public Information Office and Water Quality Division, Minnesota. 28 pp.
- MPCA. 2002. Regional Total Maximum Daily Load Evaluation of Fecal Coliform Bacteria Impairments in the Lower Mississippi River Basin in Minnesota. 230 pp.
- MPCA. 2004. Minnesota Lake Water Quality Assessment Data: 2004. Environmental Outcomes Division, Environmental Standards and Analysis Section, MPCA, St Paul, Minnesota. 29 pp.
- Odum, E. P. 1959. Fundamentals of Ecology. 2nd Edition. W. B. Saunders Company. Philadelphia, Pennsylvania. 545 pp.
- Omernik, J. M. 1987. Ecoregions of the Conterminous United States. Map (scale 1:7,500,000). Annals of the Association of American Geographers 77(1):118-125.

- SD DENR. 1998. The 1998 South Dakota Report to Congress 305(b) Water Quality Assessment. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota. 235 pp.
- SD DENR. 1998a. The 1998 South Dakota 303 (d) Waterbody List and Supporting Documentation. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota. 94 pp.
- SDDENR. 2000. The 2000 South Dakota Report to Congress 305(b) Water Quality Assessment. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota. 262 pp.
- SD DENR. 2000a. Ecoregion Targeting for Impaired Lakes in South Dakota. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota.
- SD DENR. 2002. The 2002 South Dakota 303 (d) Waterbody List and Supporting Documentation. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota. 58 pp.
- SD DENR. 2004. The 2004 South Dakota Integrated Report for Surface Water Quality Assessment. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota. 230 pp.
- SD DENR. 2005. Targeting Impaired Lakes in South Dakota. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota. 15 pp.
- SD DENR. 2006. The 2006 South Dakota Integrated Report for Surface Water Quality Assessment. South Dakota Department of Environment and Natural Resources, Pierre, South Dakota. 211 pp.
- SDSU. 2003. South Dakota State University Climate and Weather Web Page. http://climate.sdstate.edu/climate_site/climate_page.htm
- South Dakota Natural Heritage Database. 2005. Department of Game, Fish and Parks, Pierre, South Dakota. <http://www.sdgfp.info/wildlife/diversity/Index.htm>
- Stueven, E., A. Wittmuss, and R. L. Smith. 2000. Standard operating procedures for Field samplers. South Dakota Department of Environment and Natural Resources, Water Resources Assistant Program, Pierre, South Dakota.
- US Census Bureau. 2000. U. S. Census Bureau. Retrieved from <http://quickfacts.census.gov/hunits/states/46pl.html>. Washington, D. C.

- USDA-ASCS. 1991. Oakwood Lakes-Poinsett Project 20 Rural Clean Water Program Ten Year Report. U.S. Department of Agriculture, Agricultural Stabilization and Conservation Service, Brookings, SD.
- US EPA. 2002. U.S. Environmental Protection Agency. Office of Water. Onsite Wastewater Treatment Systems Manual. EPA-600-R-00-008. Pp 20-23.
- USFWS. 2004. Mountain-Prairie Region: Endangered species by county list. South Dakota Ecological Services Field Office. Accessed December 12, 2004. <http://southdakotafieldoffice.fws.gov/endsppbycounty.htm>
- Walker, W. W. 1999. Simplified procedures for eutrophication assessment and prediction: user manual. United States Army Corps of Engineers. Instruction Report W-96-2.
- Wetzel, R. G. 1975. Limnology. W.B. Saunders Company. Philadelphia, Pennsylvania. Pp 186-245.

Appendix A.
2004 East Oakwood Lake Fisheries Survey

SOUTH DAKOTA STATEWIDE FISHERIES SURVEY

2102-F-21-R-37

Name: East Oakwood Lake **County (ies):** Brookings

Legal Description: T111- R51-Sec. 4-5, 8-9, 16-17

Location from nearest town: 3 miles west of Bruce, SD

Dates of present survey: August 2-5, 2004 (netting); Sept. 16, 2004 (electrofishing)

Date last surveyed: August 5-7, 2002 (netting); September 30, 2002 (electrofishing)

Most recent lake management plan: F-21-R-31 (January 1, 1999-December 31, 2003)

Management classification: Warmwater Marginal

Primary Game and Forage Species	Secondary and Other Species
Walleye	Northern Pike
Yellow Perch	Common Carp
	Bigmouth Buffalo
	White Sucker
	Black Bullhead
	Tadpole Madtom
	Common Shiner
	Green Sunfish

PHYSICAL DATA

Surface Area: 1,000 acres

Watershed: 43,392 acres

Maximum depth: 9 feet

Mean depth: 5 feet

Lake elevation at time of survey (from field observations): 3 feet low

Date the latest contour map was prepared: 1964

Ownership of Lake and Adjacent Lakeshore Properties

East Oakwood Lake is listed as a meandered lake in the State of South Dakota Listing of Meandered Lakes and the fishery is managed by the South Dakota Department of Game, Fish and Parks (GFP). The north, west, and south shorelines are owned and managed by GFP while the east shoreline is privately owned.

Fishing Access

There is a single lane, concrete plank boat ramp located on the north shore of the lake. Another, barely usable, ramp exists on the south end. Shore fishing opportunities are available on the south shore and at various locations on the north and west shores.

Field Observations of Water Quality and Aquatic Vegetation

The Secchi depth measurement in East Oakwood during the survey was only 23 cm (9 in) due to a dense algae bloom. Due to low water levels, submerged vegetation was observed throughout the lake. Common cattail was present in the western bays.

BIOLOGICAL DATA

Methods:

East Oakwood Lake was sampled on August 2-5, 2004 with three overnight gill net sets and 10 overnight trap net sets. The trap nets are constructed with 19-mm-bar-mesh ($\frac{3}{4}$ in) netting, 0.9 m high x 1.5 m wide (3 ft high x 5 ft wide) frames and 18.3 m (60 ft) long leads. The gill nets are 45.7 m long x 1.8 m deep (150 ft long x 6 ft deep) with one 7.6 m (25 ft) panel each of 13, 19, 25, 32, 38 and 51-mm-bar-mesh ($\frac{1}{2}$, $\frac{3}{4}$, 1, $1\frac{1}{4}$, $1\frac{1}{2}$, and 2 in) monofilament netting. 1 hour of nighttime electrofishing was done on September 16, 2004 to evaluate walleye recruitment. Sampling locations are displayed in Figure 4.

Results and Discussion:

Gill Net Catch

Walleye (69.1%), yellow perch (14.8%), bigmouth buffalo (6.3%) and black bullhead (4.8%) were the most common species sampled in the gill nets (Table 1). Northern pike, white sucker, orange-spotted sunfish, and common carp were also sampled.

Table 1. Total catch from three overnight gill net sets at East Oakwood Lake, Brookings County, August 2-5, 2004.

Species	Number	Percent	CPUE ¹	80% C.I.	Mean CPUE*	PSD	RSD- P	Mean Wr
Walleye	201	69.1	67.0	+42.4	9.2	100	0	103
Yellow Perch	43	14.8	14.3	+5.7	64.9	79	67	102
Bigmouth Buffalo	19	6.5	6.3	+2.8	1.7	0	0	100
Black Bullhead	14	4.8	4.7	+1.1	33.9	14	7	101
Northern Pike	5	1.7	1.7	+0.4	1.3	--	--	--
White Sucker	4	1.4	1.3	+0.4	2.1	--	--	--
O.S. Sunfish	4	1.4	1.3	+1.7	0.4	--	--	--
Common Carp	1	0.3	0.3	+0.4	22.7	--	--	--

* 5 years (1994, 1996, 1998, 2000, 2002)

¹ See Appendix A for definitions of CPUE, PSD, and mean Wr.

Trap Net Catch

White sucker, common carp, and black bullheads comprised 77.2% of the trap net sample (Table 2). East Oakwood is one of the few lakes where we sample tadpole madtoms. Other species sampled included yellow perch, bigmouth buffalo, walleye, northern pike, green sunfish and orange-spotted sunfish.

Table 2. Total catch from nine overnight trap net sets at East Oakwood Lake, Brookings County, August 2-5, 2004.

Species	Number	Percent	CPUE	80% C.I.	Mean CPUE*	PSD	RSD-P	Mean Wr
White Sucker	112	29.3	11.2	+6.8	8.7	100	100	98
Common Carp	104	27.2	10.4	+3.7	34.7	87	40	101
Black Bullhead	79	20.7	7.9	+3.0	201.8	3	3	82
Tadpole Madtom	27	7.1	2.7	+1.1	1.3	--	--	--
Yellow Perch	19	5.0	1.9	+0.9	17.4	63	53	96
Bigmouth Buffalo	19	5.0	1.9	+1.3	2.8	44	28	92
Walleye	13	3.4	1.3	+0.6	2.9	100	0	100
Northern Pike	3	0.8	0.3	+0.2	1.3	--	--	--
Green Sunfish	3	0.8	0.3	+0.2	0.04	--	--	--
O.S. Sunfish	3	0.8	0.3	+0.2	0.0	--	--	--

* 7 years (1991, 1992, 1994, 1996, 1998, 2000, 2002)

Walleye

In spring 2004, East Oakwood was stocked with 100,700 unmarked walleye fingerlings (Table 9). During the fall 2004 electrofishing survey, we caught 180 age-0 walleyes per hour. We believe these are probably stocked fish because East Oakwood has a history of poor natural reproduction and fingerling stockings have produced large year classes in the past. Age-0 walleye gill-net CPUE was 57.3 and their growth and condition was excellent. The remaining walleyes in the sample were probably from the 2001 year-class (Figure 1). They are also in excellent condition and growing fast.

Table 3. Walleye gill-net CPUE, PSD, RSD-P, and mean Wr for East Oakwood Lake, Brookings County, 1995-2004.

	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
CPUE		1.0		23.5		12.0		6.3		67.0
PSD		--		0		88		0		100
RSD-P		--		0		8		0		0
Mean Wr		--		93		78		99		103

Table 4. Age-0 and age-1 walleyes sampled during 1 hours of nighttime electrofishing on East Oakwood Lake, Brookings County, September 30, 2004.

Year	Stocking	Age-0 CPH	80% C.I.	Mean length (range; mm)	Wr	Age-1 CPH	80% C.I.	Mean length (range; mm)	Wr
2004	fingerling	180	0-442	199 (157-222)	97	0			
2002	none	1	0-3	246 (235-256)	110	16	0-36	366 (346-384)	102
2001	fingerling	197	79-314	209 (182-237)	100	0			

Yellow Perch

Yellow perch gill-net CPUE was the lowest measured since 1996 (Table 5) and most of the fish sampled were 26-31 cm (10-12 in) long (Figure 2). Yellow perch growth in East Oakwood Lake is far better than statewide and regional averages (Table 6).

Table 5. Yellow perch gill-net CPUE, PSD, RSD-P, and mean Wr for East Oakwood Lake, Brookings County, 1995-2004.

	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
CPUE		109.0		96.0		32.0		66.0		14.3
PSD		1		39		81		17		79
RSD-P		1		1		6		1		67
Mean Wr		90		97		101		108		102

Table 6. Average back-calculated lengths (mm) for each age class of yellow perch in East Oakwood Lake, Brookings County, 2004.

Year Class	Age	N	Back-calculation Age							
			1	2	3	4	5	6	7	8
2003	1	12	130							
2002	2	1	137	233						
2001	3	21	126	228	272					
2000	4	8	134	219	256	283				
All Classes		42	132	227	264	283				
Statewide Mean			86	145	190	220	242			
Region III Mean			94	159	208	242	281			
LLI Mean			86	146	192	225	249			

Black Bullhead

Black bullhead trap-net CPUE decreased dramatically since 2002, probably due to poor recruitment. A mean length of 177 mm (7 in) (Figure 3) and PSD of only 3 indicates a population comprised of small fish.

Table 7. Black bullhead trap-net CPUE and PSD for West Oakwood Lake, Brookings County, 1995-2004.

	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
CPUE		178.9		28.2		432.7		545.8		7.9
PSD		4		40		0		5		3
RSD-P		--		--		--		--		3
Mean Wr		--		--		--		--		82

All Species

The fish community in East Oakwood Lake appears to be in good shape (Table 8). The black bullhead population is low and rough fish abundance is not a concern. Yellow perch abundance is low and stocking may be needed to rebuild the population. The large 2004 walleye year class should provide good fishing by 2006.

Table 8. Gill-net (GN) and trap-net (TN) CPUE for all fish species sampled in East Oakwood Lake, Brookings County, 1995-2004.

Species	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
NOP (GN)		1.0		2.0		0.7		1.0		1.7
NOP (TN)		1.1		1.8		2.2		0.4		0.3
WAE (GN)		1.0		23.5		12.0		6.3		67.0
WAE (TN)		--		14.0		3.1		0.9		1.3
GSF (GN)		--		--		--		--		--
GSF (TN)		--		--		--		0.3		0.3
OSF (GN)		2.0		--		--		--		1.3
OSF (TN)		--		--		--		--		0.3
YEP (GN)		109.0		96.0		32.0		66.0		14.3
YEP (TN)		14.2		41.4		4.1		2.1		1.9
BLB (GN)		2.5		4.0		141.3		21.0		4.7
BLB (TN)		178.9		28.2		432.7		545.8		7.9
TMT (GN)		--		--		--		--		--
TMT (TN)		--		0.8		--		7.7		2.7
BIB (GN)		--		0.5		3.3		0.7		6.3
BIB (TN)		0.9		4.4		4.5		1.6		1.9
COC (GN)		1.0		28.0		2.3		48.0		0.3
COC (TN)		5.1		75.3		5.7		51.4		10.4
COS (GN)		--		--		--		0.3		--
COS (TN)		--		--		--		--		--
WHS (GN)		1.5		2.5		4.0		0.7		1.3
WHS (TN)		7.0		23.2		4.1		22.6		11.2

NOP (Northern Pike), WAE (Walleye), GSF (Green Sunfish), OSF (Orange-spotted Sunfish), YEP (Yellow Perch), BLB (Black Bullhead), TMT (Tadpole Madtom), BIB (Bighmouth Buffalo), COC (Common Carp), COS (Common Shiner), WHS (White Sucker)

RECOMMENDATIONS

1. Stock walleye fry following a winterkill at the rate of 1000/acre (1,000,000) or walleye fingerlings into an existing population at the rate of 100/acre (100,000) to achieve and/or maintain a gill-net CPUE of at least 15 and a PSD of 30-60.
2. Stock pre-spawn adult yellow perch following a winterkill or into an existing population at the rate of 10/acre to establish and/or maintain a gill-net CPUE of at least 50 and a PSD of 30-60.
3. Encourage commercial fishing for common carp and black bullheads.

Table 9. Stocking record for East Oakwood Lake, Brookings County, 1991-2004.

Year	Number	Species	Size
1991	27,780	Yellow Perch	Fingerling
	7,330	Walleye	Lrg. Fingerling
	4,176	Walleye	Sml. Fingerling
	209	Walleye	Adult
1992	300,000	Northern Pike	Fry
	30,000	Northern Pike	Fingerling
	51,850	Yellow Perch	Fingerling
1994	36,610	Yellow Perch	Lrg. Fingerling
	8,620	Yellow Perch	Adult
1995	41,000	Fathead Minnow	Adult
	135,000	Walleye	Sml. Fingerling
1996	2,707,000	Walleye	Fry
	136,840	Yellow Perch	Fingerling
1997	1,000,000	Walleye	Fry
1999	1,000,000	Walleye	Fry
2001	100,000	Walleye	Fingerling
	10,159	Yellow Perch	Adult
2004	100,700	Walleye	Fingerling

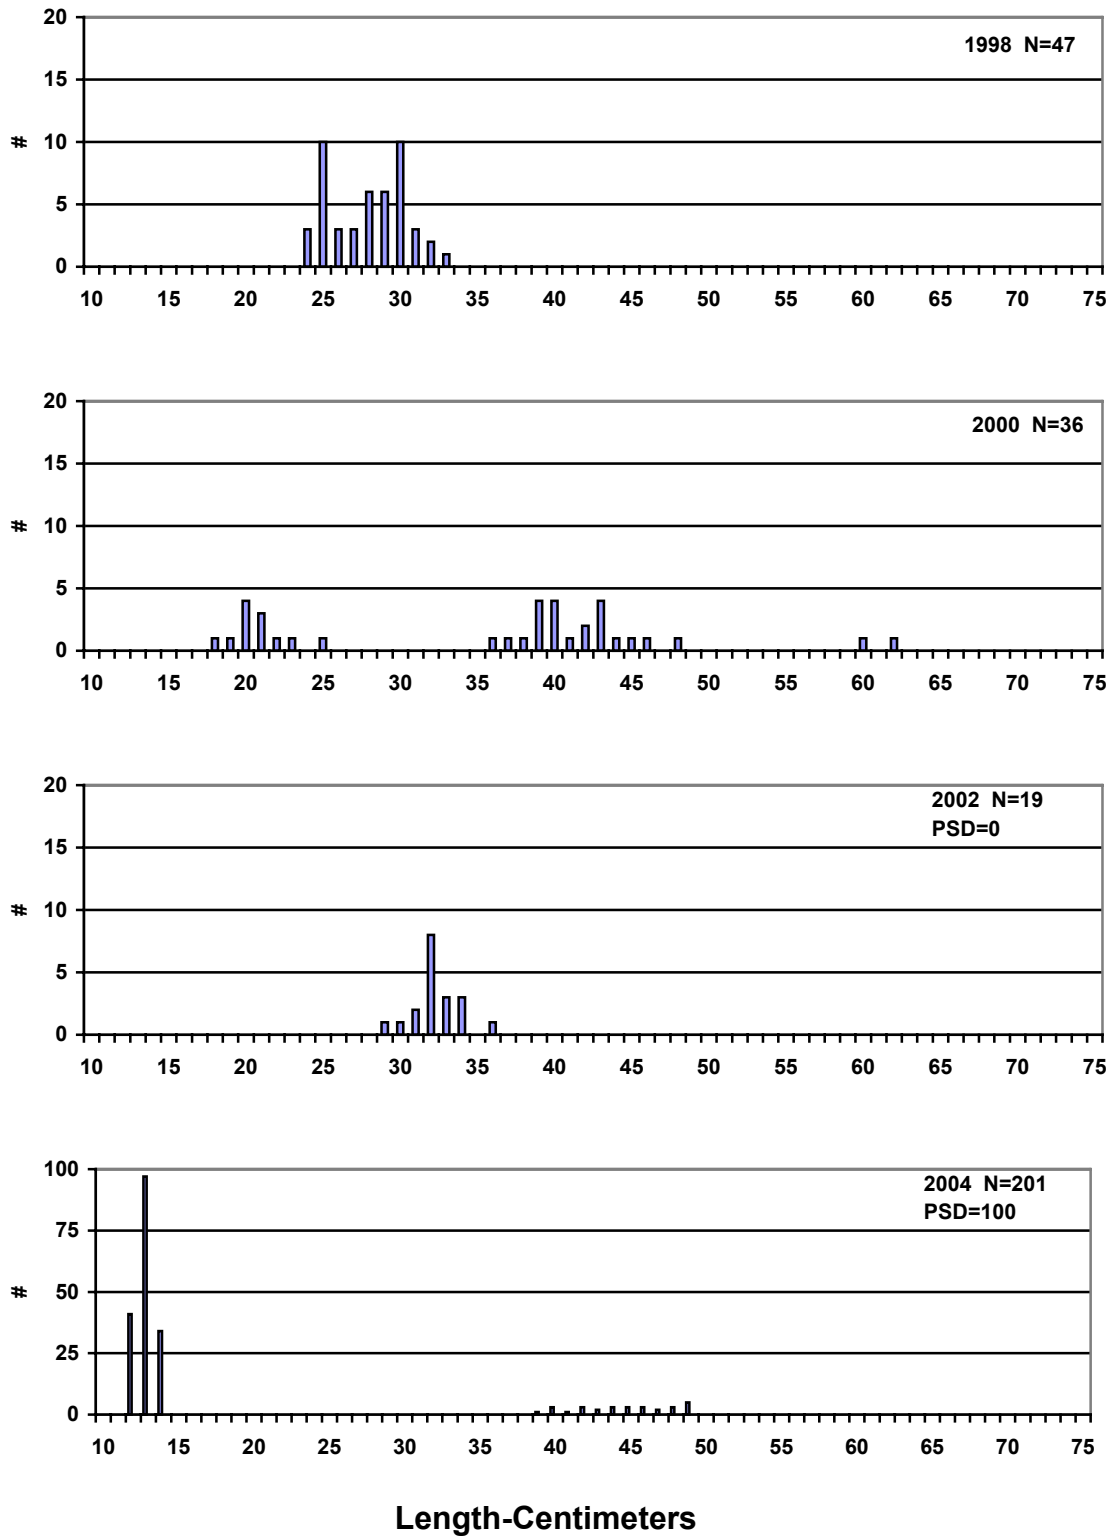


Figure 1. Length frequency histograms for walleye sampled with gill nets in East Oakwood Lake, Brookings County, 1998, 2000, 2002, and 2004.

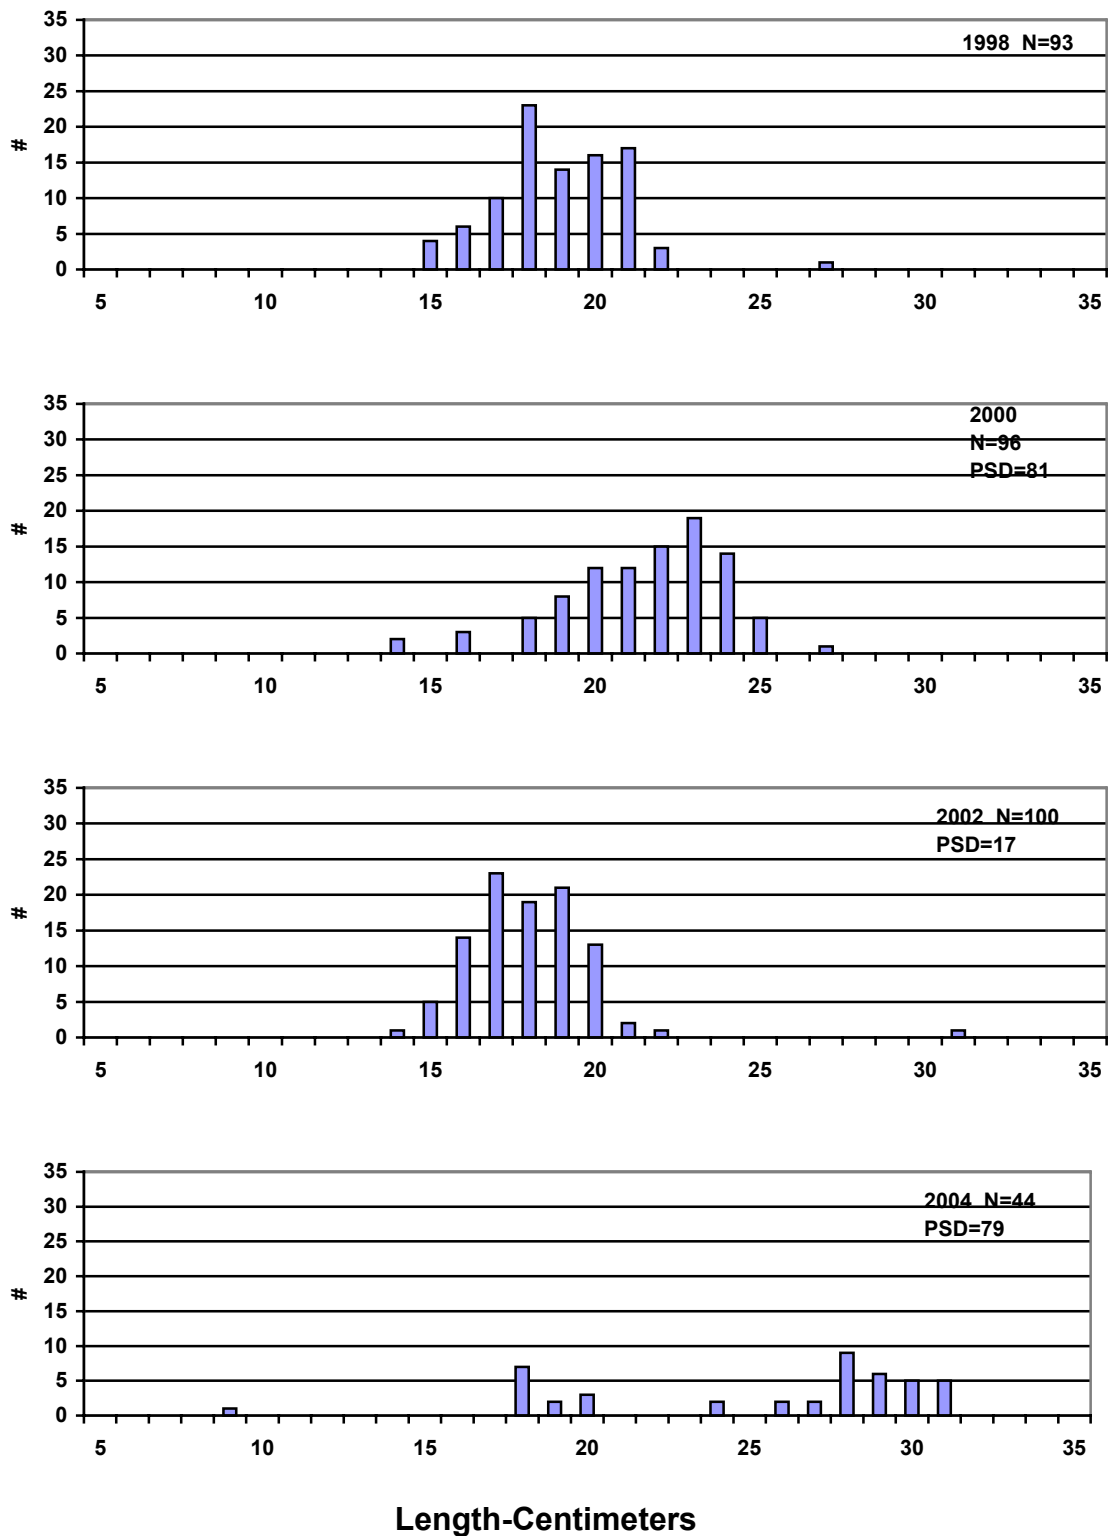


Figure 2. Length frequency histograms for yellow perch sampled with gill nets in East Oakwood Lake, Brookings County, 1998, 2000, 2002, and 2004.

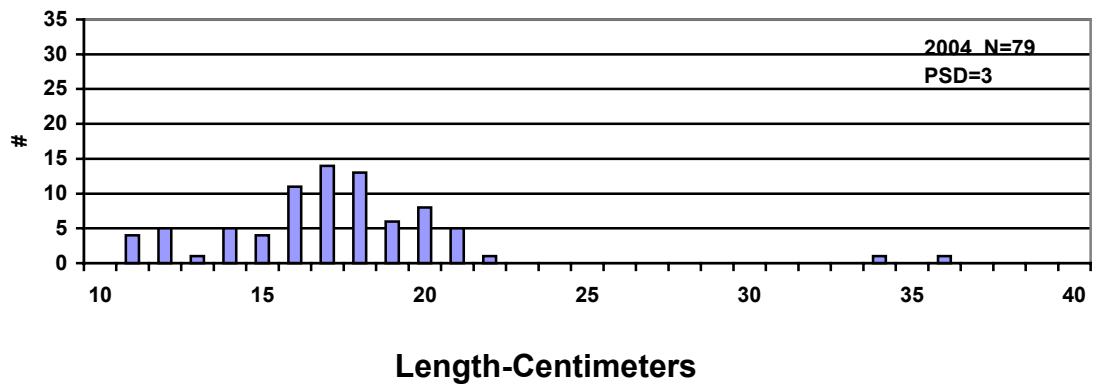


Figure 3. Length frequency histograms for black bullhead sampled with trap nets in East Oakwood Lake, Brookings County, 2004.

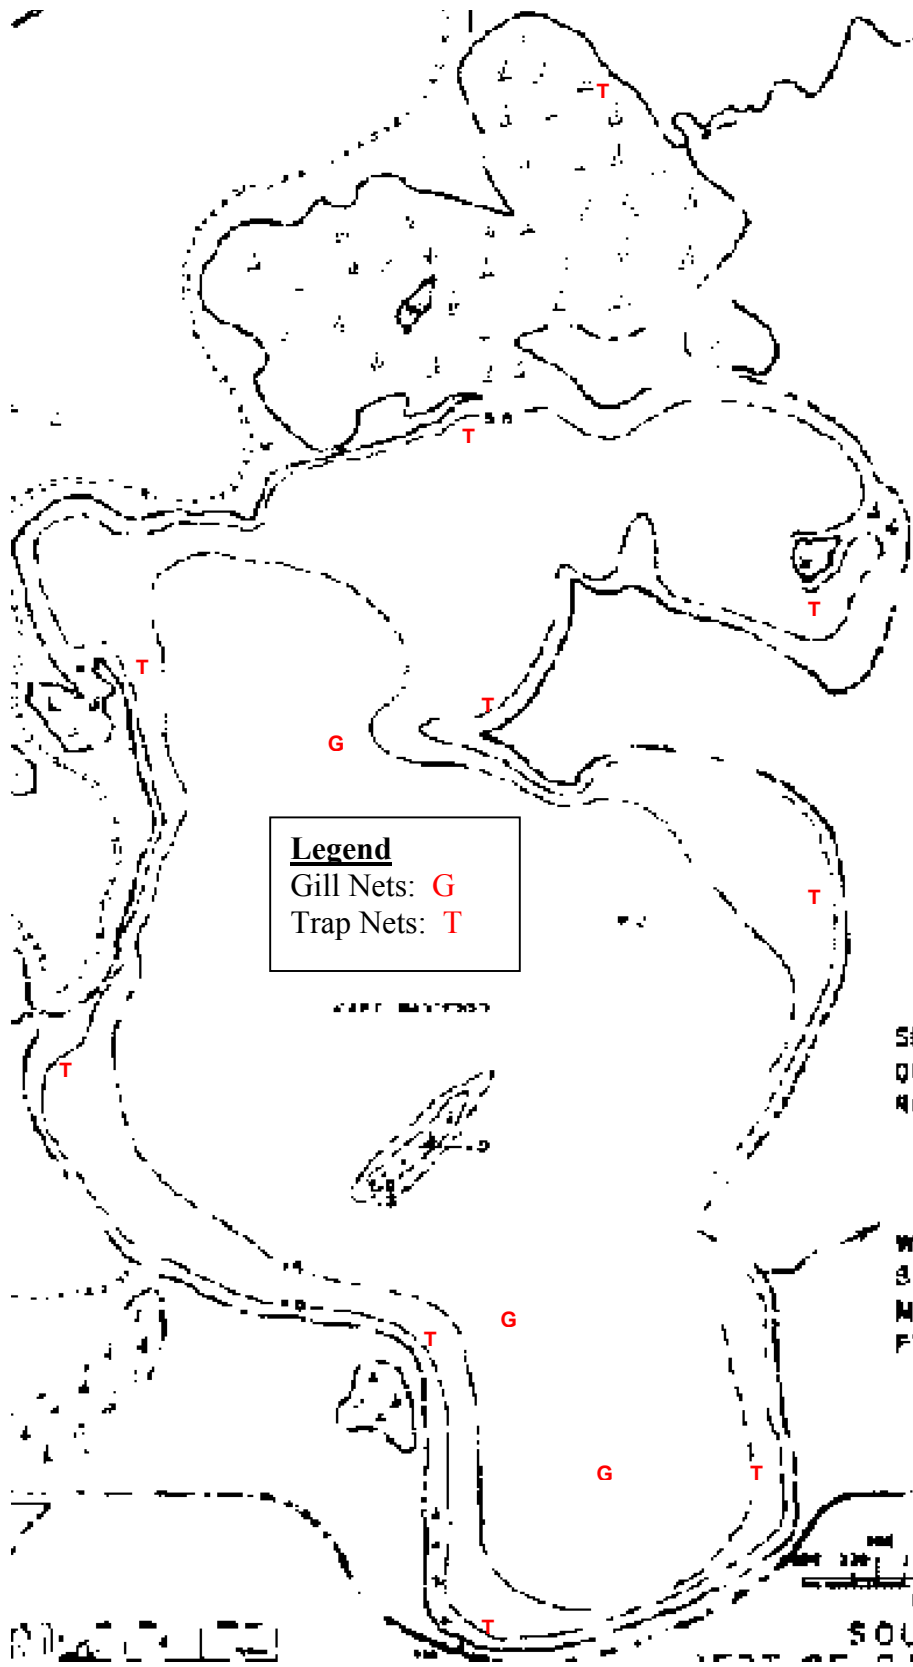


Figure 4. Sampling locations on East Oakwood, Brookings County, 2004.

Appendix A. A brief explanation of catch per unit effort (CPUE), proportional stock density (PSD), relative stock density (RSD) and relative weight (Wr).

Catch Per Unit Effort (CPUE) is the catch of animals in numbers or in weight taken by a defined period of effort. Can refer to trap-net nights of effort, gill-net nights of effort, catch per hour of electrofishing, etc.

Proportional Stock Density (PSD) is calculated by the following formula:

$$\text{PSD} = \frac{\text{Number of fish} > \text{quality length}}{\text{Number of fish} \geq \text{stock length}} \times 100$$

Relative Stock Density (RSD-P) is calculated by the following formula:

$$\text{RSD-P} = \frac{\text{Number of fish} > \text{preferred length}}{\text{Number of fish} \geq \text{stock length}} \times 100$$

PSD and RSD-P are unitless and usually calculated to the nearest whole digit.

Size categories for selected species found in Region 3 lake surveys, in centimeters.

Species	Stock	Quality	Preferred	Memorable	Trophy
Walleye	25	38	51	63	76
Sauger	20	30	38	51	63
Yellow perch	13	20	25	30	38
Black crappie	13	20	25	30	38
White crappie	13	20	25	30	38
Bluegill	8	15	20	25	30
Largemouth bass	20	30	38	51	63
Smallmouth bass	18	28	35	43	51
Northern pike	35	53	71	86	112
Channel catfish	28	41	61	71	91
Black bullhead	15	23	30	38	46
Common carp	28	41	53	66	84
Bigmouth buffalo	28	41	53	66	84
Smallmouth buffalo	28	41	53	66	84

For most fish, 30-60 or 40-70 are typical objective ranges for “balanced” populations. Values less than the objective range indicate a population dominated by small fish while values greater than the objective range indicate a population comprised mainly of large fish.

Relative weight (Wr) is a condition index that quantifies fish condition (i.e., how much does a fish weigh for its length). A Wr range of 90-100 is a typical objective for most fish species. When mean Wr values are well below 100 for a size group, problems may exist in food and feeding relationships. When mean Wr values are well above 100 for a size group, fish may not be making the best use of available prey.

Appendix B.
2004 West Oakwood Lake Fisheries Survey

SOUTH DAKOTA STATEWIDE FISHERIES SURVEY

2102-F-21-R-37

Name: West Oakwood Lake **County(ies):** Brookings

Legal Description: T111- R51-Sec. 1, 3, 5-8, 12, 32, 36

Location from nearest town: 5 miles west of Bruce, SD.

Dates of present survey: August 2-5, 2004

Date last surveyed: August 5-7, 2002; September 30, 2002 (electrofishing)

Most recent lake management plan: F-21-R-27 (January 1, 1994-December 31, 1998)

Management classification: Warmwater Marginal

Primary Game and Forage Species	Secondary and Other Species
Walleye	Northern Pike
Yellow Perch	Bigmouth Buffalo
.	Carp
	White Sucker
	Black Bullhead

PHYSICAL DATA

Surface Area: 1,200 acres **Watershed:** 43,363 acres

Maximum depth: 10 feet **Mean depth:** 6 feet

Lake elevation at time of survey (from field observations): Full

Date the latest contour map was prepared: 1964

Ownership of Lake and Adjacent Lakeshore Property

West Oakwood is listed as a meandered lake in the State of South Dakota Listing of Meandered Lakes and the South Dakota Department of Game, Fish and Parks (GFP) manages the fishery. Much of the north and east shoreline is owned and managed by GFP as a Game Production Area and the Oakwood Lake State Recreation Area. The remainder of the shoreline is privately owned.

Fishing Access

Oakwood Lake State Recreation Area contains a two-lane boat ramp, dock, parking lot, public toilets, modern campground, and a handicapped-accessible fishing dock. Shore fishing sites are easily found throughout the area.

Field Observations of Water Quality and Aquatic Vegetation

Water clarity during the survey was significantly reduced by a severe algae bloom. The Secchi depth measurement was only 28 cm (11 in). Scattered stands of sago pondweed and common cattail were observed throughout the lake.

BIOLOGICAL DATA

Methods:

West Oakwood Lake was sampled on August 2-5, 2004 with two overnight gill net sets and 10 overnight trap net sets. The trap nets are constructed with 19-mm-bar-mesh ($\frac{3}{4}$ in) netting, 0.9 m high x 1.5 m wide (3 ft high x 5 ft wide) frames and 18.3 m (60 ft) long leads. The gill nets are 45.7 m long x 1.8 m deep (150 ft long x 6 ft deep) with one 7.6 m (25 ft) panel each of 13, 19, 25, 32, 38 and 51-mm-bar-mesh ($\frac{1}{2}$, $\frac{3}{4}$, 1, $1\frac{1}{4}$, $1\frac{1}{2}$, and 2 in) monofilament netting. One hour of nighttime electrofishing was done on September 27, 2004 to evaluate walleye recruitment. Gill-net and trap-net sites are displayed in Figure 4.

Results and Discussion:

Gill Net Catch

Black bullhead (59.7%), yellow perch (26.4%), and common carp (5.6%) were the most abundant species sampled in the gill nets (Table 1). Lesser numbers of walleyes, white suckers, northern pike, bigmouth buffalo, and orange-spotted sunfish were also caught.

Table 1. Total catch from two overnight gill net sets at West Oakwood Lake, Brookings County, August 2-5, 2004.

Species	Number	Percent	CPUE ¹	80% C.I.	Mean CPUE*	PSD	RSD-P	Mean Wr
Black Bullhead	319	59.7	159.5	<u>+4.5</u>	54.2	6	0	84
Yellow Perch	141	26.4	70.5	<u>+1.9</u>	76.0	38	34	95
Common Carp	30	5.6	15.0	<u>+7.7</u>	24.3	61	0	96
Walleye	18	3.4	9.0	<u>+6.4</u>	26.5	100	0	91
White Sucker	14	2.6	7.0	<u>+9.0</u>	3.8	86	14	89
Northern Pike	9	7.7	4.5	<u>+1.9</u>	3.1	--	--	--
Bigmouth Buffalo	2	0.4	1.0	<u>+0.0</u>	14.5	--	--	--
O. S. Sunfish	1	0.2	0.5	<u>+0.6</u>	0.0	--	--	--

* 5 years (1994, 1996, 1998, 2000, 2002)

¹ See Appendix A for definitions of CPUE, PSD, and mean Wr.

Trap Net Catch

Black bullheads comprised 96.2% of the trap net sample (Table 2). The remainder of the catch consisted of white sucker, common carp, walleye, yellow perch, bigmouth buffalo, northern pike, yellow bullhead, and white bass.

Table 2. Total catch from 10 overnight trap net sets at West Oakwood Lake, Brookings County, August 2-5, 2004.

Species	Number	Percent	CPUE	80% C.I.	Mean CPUE*	PSD	RSD-P	Mean Wr
Black Bullhead	9,353	96.2	935.3	+187.0	560.5	1	0	75
White Sucker	108	1.1	10.8	+4.1	5.7	91	31	90
Common Carp	96	1.0	9.6	+2.3	30.9	92	23	94
Walleye	76	0.8	7.6	+5.4	2.6	100	3	92
Yellow Perch	44	0.5	4.4	+2.0	4.0	98	98	95
Bigmouth Buffalo	35	0.4	3.5	+2.4	5.6	97	23	92
Northern Pike	7	0.1	0.7	+0.5	1.8	--	--	--
Yellow Bullhead	2	0.0	0.2	+0.3	0.0	--	--	--
White Bass	1	0.0	0.1	+0.1	0.0	--	--	--

* 6 years (1990, 1994, 1996, 1998, 2000, 2002)

Walleye

The adult walleyes sampled in 2004 ranged in length from 41-51 cm (16-20 in) and probably came from the 2001 year-class. Fall electrofishing indicated that a strong year class was produced in 2004 (Table 4). Walleye fingerlings were stocked in 2004 (Table 9), and although these fish were not marked, we're confident the strong 2004 year class was produced by this stocking because little natural reproduction has been documented on West Oakwood and fingerling stocking has produced large year classes in the past. Young walleyes in West Oakwood are healthy and grow fast.

Table 3. Walleye gill-net CPUE, PSD, RSD-P and mean Wr for West Oakwood Lake, Brookings County, 1995-2004.

	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
CPUE		38.5		39.0		9.7		5.0		9.0
PSD		29		10		63		0		100
RSD-P		0		4		22		0		0
Mean Wr		97		94		90		102		91

Table 4. Age-0 and age-1 walleyes sampled during 2 hours of nighttime electrofishing on West Oakwood Lake, Brookings County, September 27, 2004.

Year	Stocking	Age-0 CPH	80% C.I.	Mean length (range; mm)	Wr	Age-1 CPH	80% C.I.	Mean length (range; mm)	Wr
2004	Fingerling	416	125-707	159 (117-222)	97	0			
2002	None	0				7	0-14	351 (339-366)	102
2001	Fingerling	318	0-674	217 (193-244)	99				

Yellow Perch

Yellow perch gill-net CPUE remains high and PSD and RSD-P are at desirable levels (Table 5). Two distinct peaks are visible in the length frequency histogram (Figure 2). The first peak consists of perch produced in 2001 that range in length from 24-30 cm (9.4-11.8 in) (Figure 2). The second peak consists of yellow perch produced in 2002 and 2003 and range in length from 14-19 cm (5.5-7.5 in). Yellow perch growth is above statewide, regional and large lakes means (Table 6) with fish reaching 20 cm (8 in) at age-2 and 25 cm (10 in) at age-3.

Table 5. Yellow perch gill-net CPUE, PSD, and mean Wr for West Oakwood Lake, Brookings County, 1995-2004.

	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
CPUE		164.0		80.0		10.7		75.0		70.5
PSD		27		12		12		6		38
RSD-P		24		1		0		1		34
Mean Wr		103		95		95		108		95

Table 6. Average back-calculated lengths (mm) for each age class of yellow perch in West Oakwood Lake, Brookings County, 2004.

Year Class	Age	N	Back-calculation Age							
			1	2	3	4	5	6	7	8
2003	1	44	82							
2002	2	46	98	162						
2001	3	47	120	221	264					
2000	4	5	116	208	238	270				
All Classes		142	103	197	251	270				
Statewide Mean			86	145	190	220	242			
Region III Mean			94	159	208	242	281			
LLI* Mean			86	146	192	225	249			

*Large Lakes and Impoundments (>150 acres)

Black Bullhead

Black bullhead trap net CPUE has been slowly decreasing since 2000 but PSD has also decreased (Table 7). The length frequency histograms in Figure 1 explain why this occurs. Large bullhead year classes are produced, grow to a maximum length of about 25 cm (10 in), then disappear, but not before another year class is produced. PSD is low because another large year class is dominating the population at this time.

Table 7. Black bullhead trap-net CPUE and PSD for West Oakwood Lake, Brookings County, 1995-2004.

	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
CPUE		10.9		497.2		1345.4		1170.0		935.3
PSD		25		69		2		54		1

All Species

A white bass was sampled in West Oakwood Lake for the first time in 2004. No major changes in CPUE for all other species has been observed (Table 8).

Table 8. Gill-net (GN) and trap-net (TN) CPUE for all fish species sampled in West Oakwood Lake, Brookings County, 1995-2004.

Species	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004
NOP (GN)		3.5		1.5		2.3		2.0		4.5
NOP (TN)		2.5		2.0		1.1		1.5		0.7
SXW (GN)		--		--		--		--		--
SXW (TN)		0.7		--		--		--		--
WAE (GN)		38.5		39.0		9.7		8.3		9.0
WAE (TN)		4.3		3.4		3.6		0.3		7.6
OSF (GN)		--		--		--		--		0.5
OSF (TN)		0.4		--		--		--		--
YEP (GN)		164.0		80.0		10.7		75.0		70.5
YEP (TN)		10.6		8.8		0.4		0.1		4.4
WHB (GN)		--		--		--		--		--
WHB (TN)		--		--		--		--		0.1
YEB (GN)		--		--		--		--		--
YEB (TN)		--		--		--		--		0.2
BLB (GN)		1.0		60.5		136.7		72.0		159.5
BLB (TN)		10.9		497.2		1,345.4		1,170.0		935.3
BIB (GN)		12.5		--		4.3		0.3		1.0
BIB (TN)		3.7		1.6		3.2		0.4		3.5
COC (GN)		2.0		36.0		10.7		36.7		15.0
COC (TN)		3.9		122.8		10.3		24.9		9.6
WHS (GN)		--		6.0		3.0		10.0		7.0
WHS (TN)		6.4		6.4		4.1		11.5		10.8

NOP (Northern Pike), SXW (Saugeye), WAE (Walleye), OSF (Orange-spotted Sunfish), YEP (Yellow Perch), WHB (White Bass), YEB (Yellow Bullhead), BLB (Black Bullhead), BIB (Bismouth Buffalo), COC (Common Carp), WHS (White Sucker).

RECOMMENDATIONS

1. West Oakwood is capable of sustaining a fast-growing walleye population as long as it does not winterkill. Walleyes may help control the black bullhead population. Walleyes should be stocked after a winterkill or when gill-net CPUE drops below 15.
2. Stock yellow perch adults following winterkills or whenever gill-net CPUE drops below 50.
3. Continue to monitor the fishery by conducting lake surveys every other year.
4. Encourage commercial fishing for carp, buffalo and bullheads.

Table 9. Stocking record for West Oakwood Lake, Brookings County, 1990-2004.

Year	Number	Species	Size
1990	38,016	Yellow Perch	Fingerling
1991	21,370	Yellow Perch	Fingerling
	2,030	Walleye	Lrg. Fingerling
	788	Walleye	Fingerling
1992	60,000	Northern Pike	Fingerling
	29,900	Largemouth Bass	Med. Fingerling
1993	1,200,000	Walleye	Fry
1994	132,700	Saugeye	Sml. Fingerling
	17,020	Yellow Perch	Juvenile
	4,082	Yellow Perch	Adult
1997	220,000	Walleye	Fingerling
1999	1,200,000	Walleye	Fry
2001	79,300	Walleye	Fingerling
	12,221	Yellow Perch	Adult
2004	119,100	Walleye	Fingerling

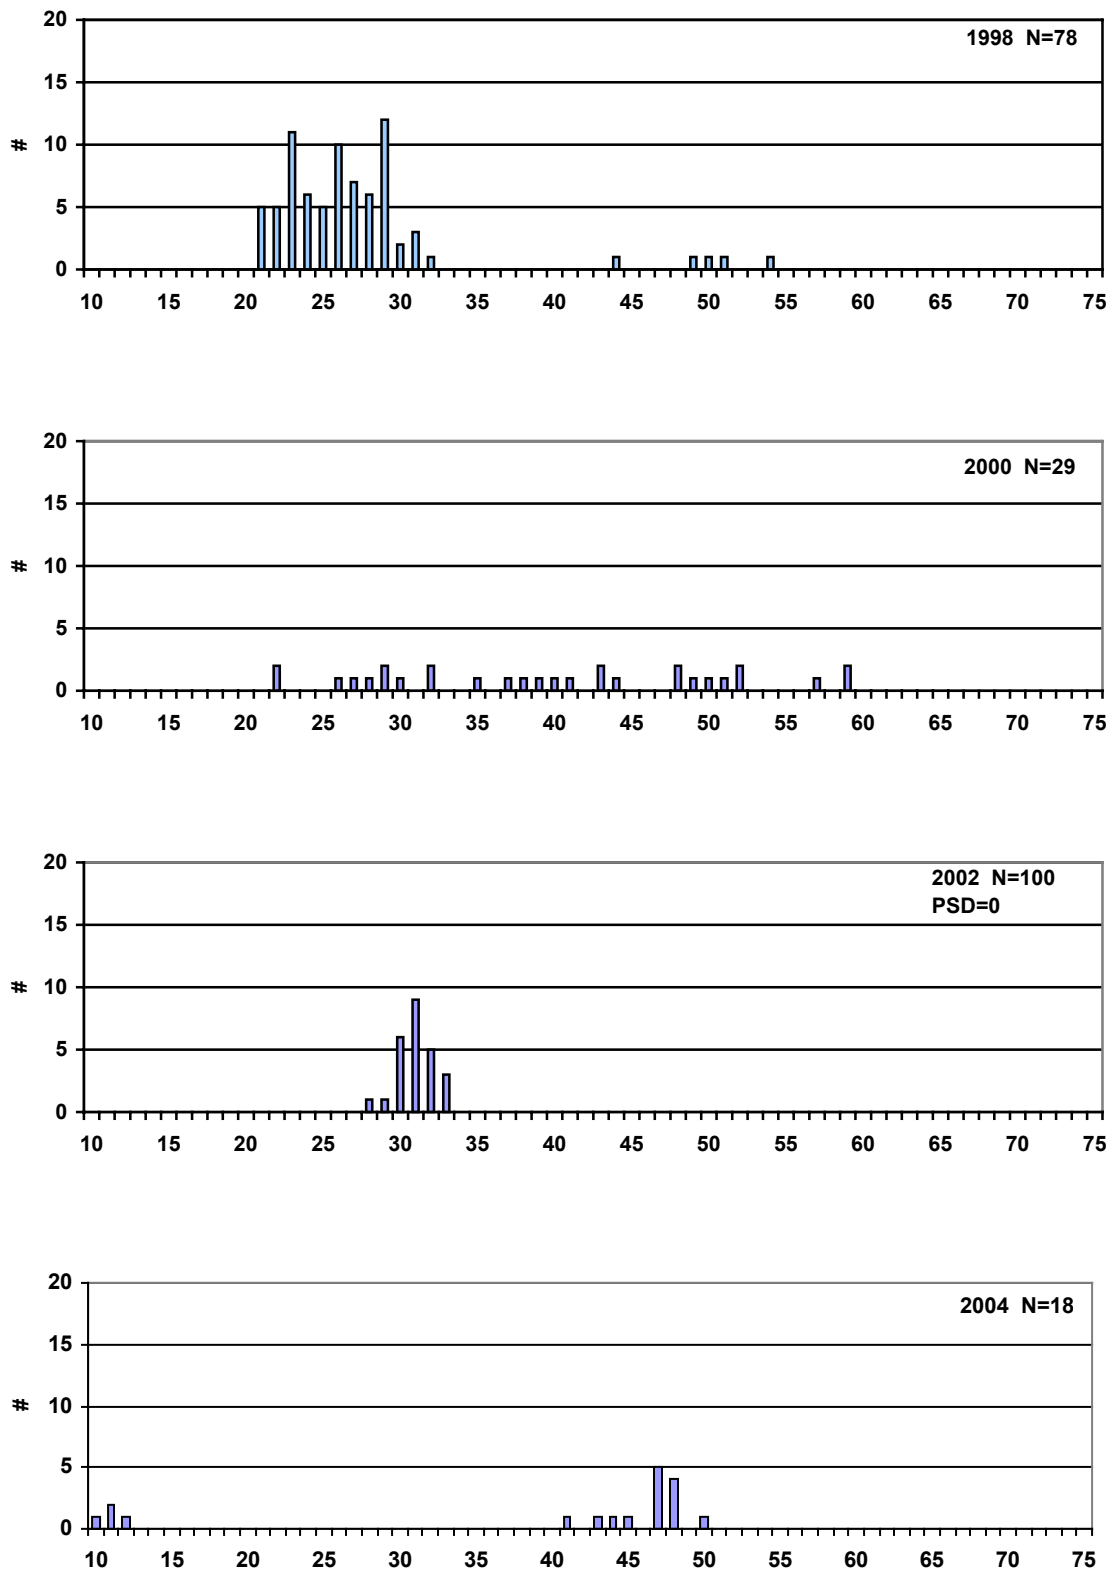


Figure 1. Length frequency histograms for walleyes sampled with gill nets in West Oakwood Lake, Brookings County, 1998, 2000, 2002 and 2004.

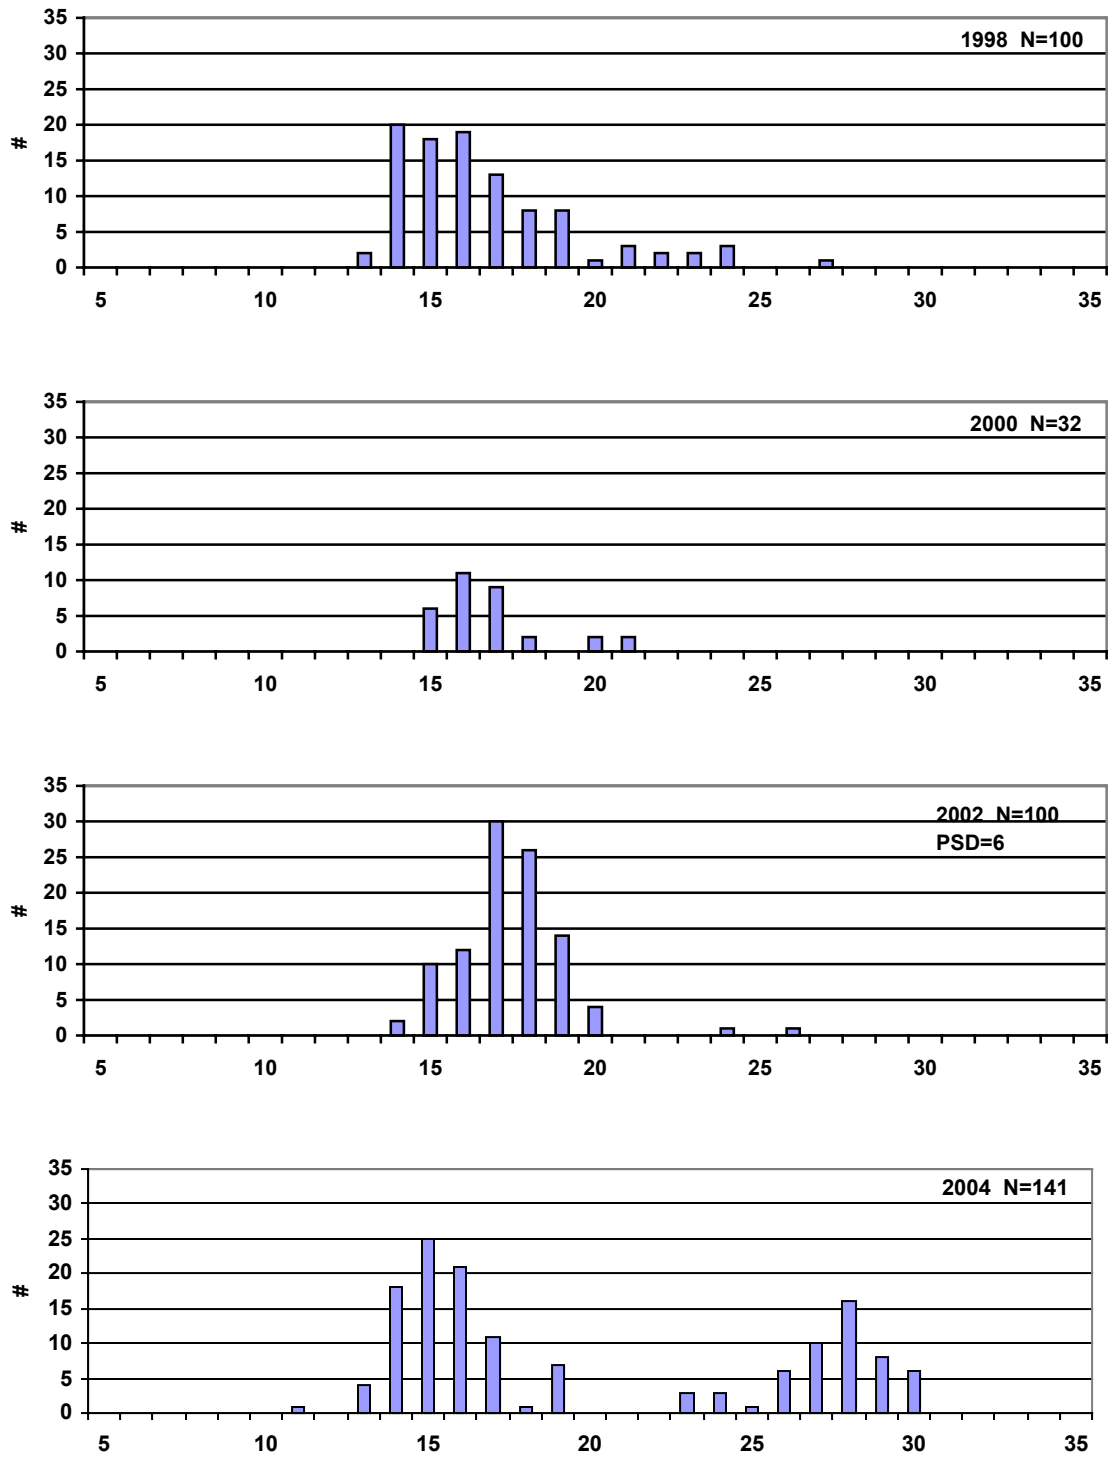


Figure 2. Length frequency histograms for yellow perch sampled with gill nets in West Oakwood Lake, Brookings County, 1998, 2000, 2002 and 2004.

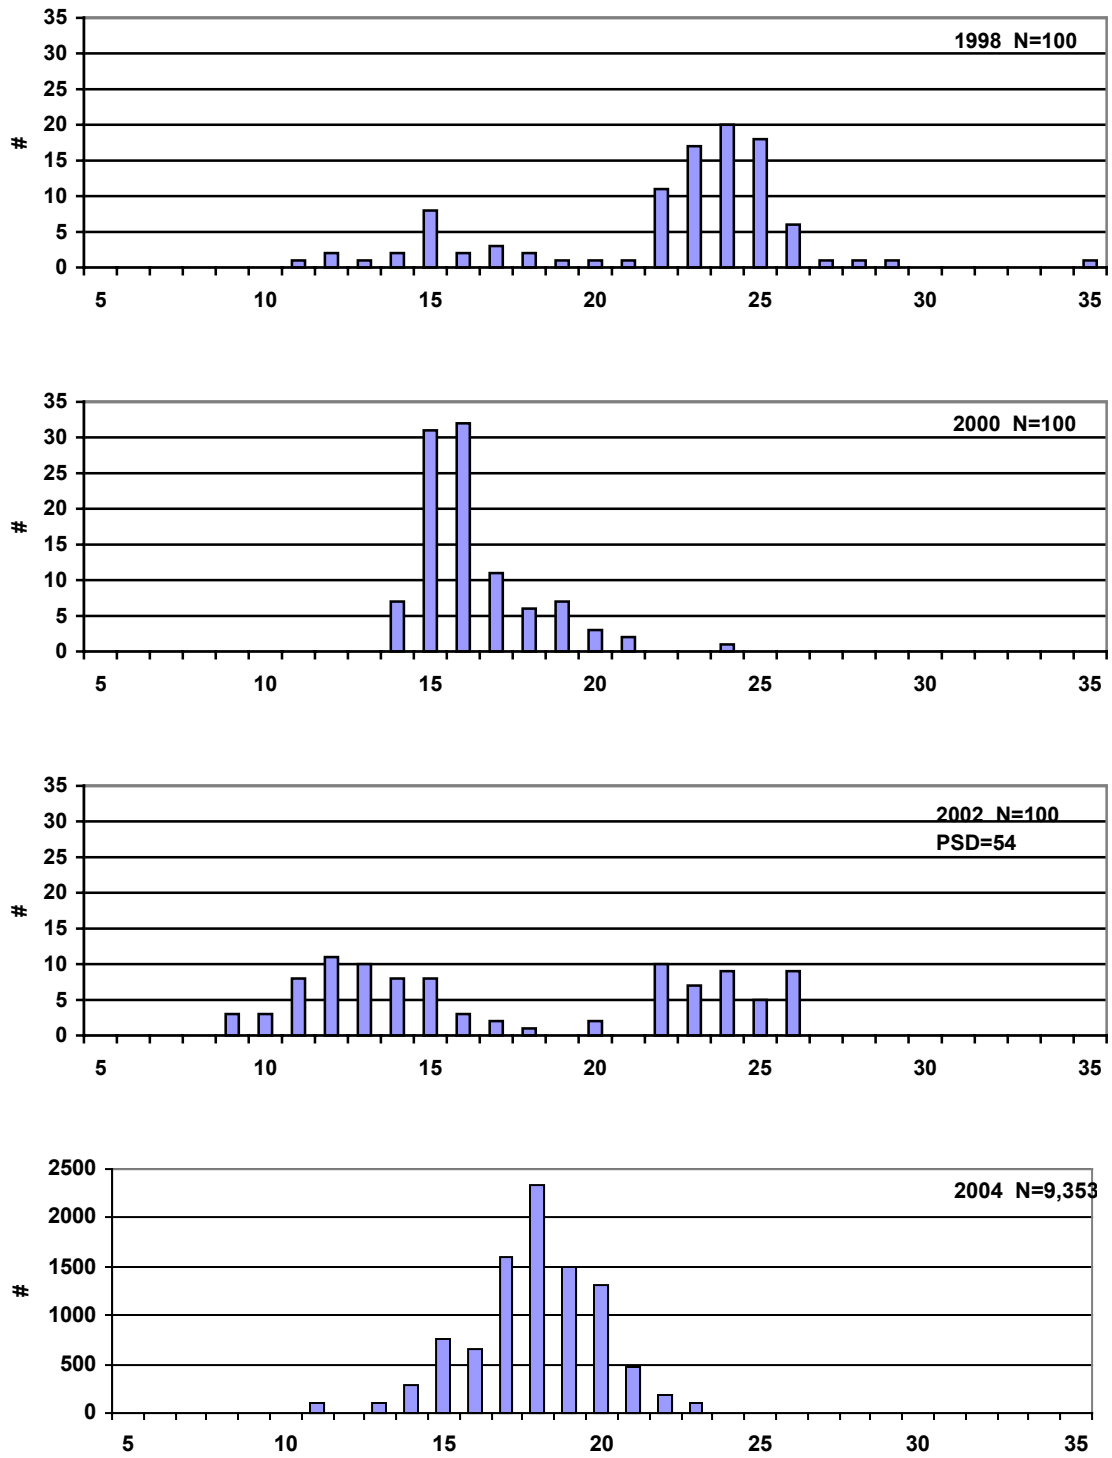


Figure 3. Length frequency histograms for black bullheads sampled with trap nets in West Oakwood Lake, Brookings County, 1998, 2000, 2002 and 2004.

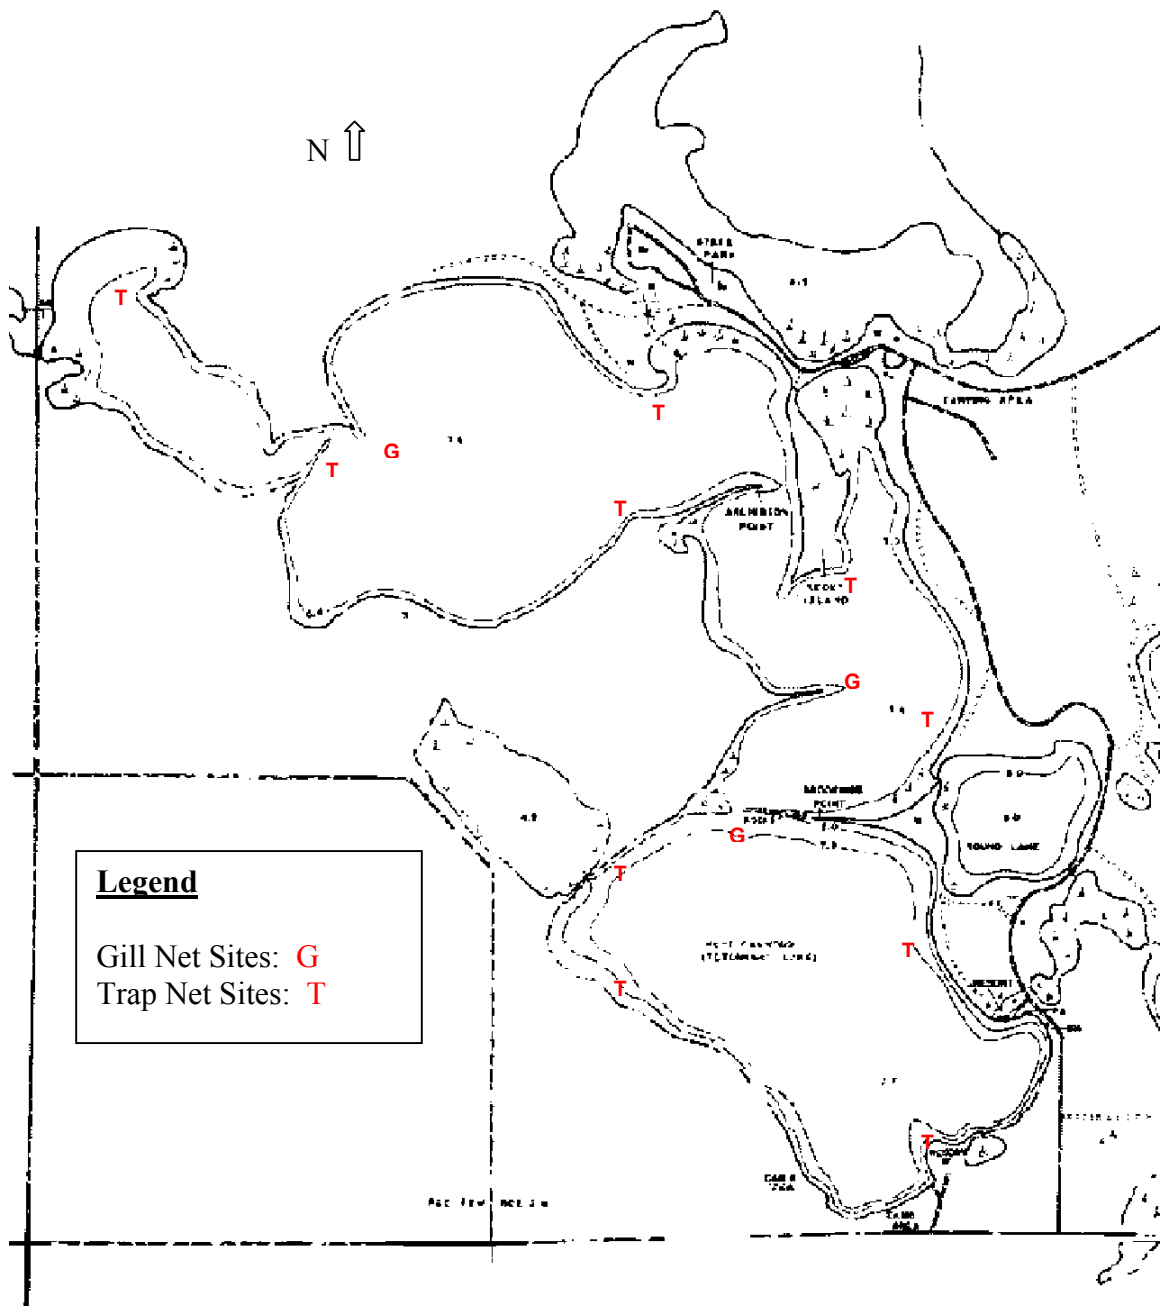


Figure 4. Sampling locations on West Oakwood Lake, Brookings County, 2004.

Appendix A. A brief explanation of catch per unit effort (CPUE), proportional stock density (PSD), relative stock density (RSD) and relative weight (Wr).

Catch Per Unit Effort (CPUE) is the catch of animals in numbers or in weight taken by a defined period of effort. Can refer to trap-net nights of effort, gill-net nights of effort, catch per hour of electrofishing, etc.

Proportional Stock Density (PSD) is calculated by the following formula:

$$\text{PSD} = \frac{\text{Number of fish} > \text{quality length}}{\text{Number of fish} \geq \text{stock length}} \times 100$$

Relative Stock Density (RSD-P) is calculated by the following formula:

$$\text{RSD-P} = \frac{\text{Number of fish} > \text{preferred length}}{\text{Number of fish} \geq \text{stock length}} \times 100$$

PSD and RSD-P are unitless and usually calculated to the nearest whole digit.

Size categories for selected species found in Region 3 lake surveys, in centimeters.

Species	Stock	Quality	Preferred	Memorable	Trophy
Walleye	25	38	51	63	76
Sauger	20	30	38	51	63
Yellow perch	13	20	25	30	38
Black crappie	13	20	25	30	38
White crappie	13	20	25	30	38
Bluegill	8	15	20	25	30
Largemouth bass	20	30	38	51	63
Smallmouth bass	18	28	35	43	51
Northern pike	35	53	71	86	112
Channel catfish	28	41	61	71	91
Black bullhead	15	23	30	38	46
Common carp	28	41	53	66	84
Bigmouth buffalo	28	41	53	66	84
Smallmouth buffalo	28	41	53	66	84

For most fish, 30-60 or 40-70 are typical objective ranges for “balanced” populations. Values less than the objective range indicate a population dominated by small fish while values greater than the objective range indicate a population comprised mainly of large fish.

Relative weight (Wr) is a condition index that quantifies fish condition (i.e., how much does a fish weigh for its length). A Wr range of 90-100 is a typical objective for most fish species. When mean Wr values are well below 100 for a size group, problems may exist in food and feeding relationships. When mean Wr values are well above 100 for a size group, fish may not be making the best use of available prey.

**Appendix C.
WQ Grab Sample Data**

Oakwood Lakes Watershed Water Quality - - 2001 through 2002

Site	Site Name	Date	Time	Lab#	Runoff?	Water Temp C°	Air Temp C°	Conductivity µs/cm	Specific Conductivity µs/cm	Salinity ppt	Dissolved Oxygen mg/L	pH units	Turbidity NTU	Fecal Coliform cfu/100mL	TSS mg/L	Tot Solids mg/L	Dissolved Solids mg/L	Nitrates mg/L	Ammonia mg/L	Organic Nitrogen mg/L	TKN mg/L	Tot PO4 mg/L	TotDis PO4 mg/L
T43	East Oakwood Lake Trib 1	06/14/01	1315	01-6917	Y	19.0	23.0	787	890	0.4	8.0	7.8	9	2300	11	667	656	1.406	0.062	1.201	1.263	0.337	0.318
T43	East Oakwood Lake Trib 1	07/20/01	1400	01-6289	Y	23.0	29.0	894	930	0.5	5.9	7.8	57	10000	153	865	712	0.464	0.190	2.330	2.520	0.643	0.360
T43	East Oakwood Lake Trib 1	08/27/01	1330	01-6330	N	25.4	34.0	1135	1127	0.6	17.3	8.4	17	690	31	1407	1376	0.448	0.124	2.219	2.343	0.787	0.732
T43	East Oakwood Lake Trib 1	09/27/01	1120	01-6401	N	11.9	16.0	1252	1689	0.9	11.0	8.2	9	340	24	1368	1344	0.056	0.140	1.506	1.646	0.314	0.151
T43	East Oakwood Lake Trib 1	10/23/01	1115	01-6454	N	6.0	15.5	1079	1695	0.9	17.1	8.3	7	150	8	1288	1280	0.062	0.128	1.060	1.188	0.208	0.128
T43	East Oakwood Lake Trib 1	04/08/02	1250	02-6008	N	7.5	12.0	664	998	0.5	16.8	7.9	13	10	47	787	740	0.681	0.198	1.356	1.554	0.378	0.255
T43	East Oakwood Lake Trib 1	04/29/02	1215	02-6034	Y	10.3	16.0	1430	2020	1.0	11.2	8.2	5	10	14	1710	1696	0.043	0.070	1.051	1.121	0.162	0.119
T43	East Oakwood Lake Trib 1	05/08/02	1100	02-6065	Y	8.2	9.5	651	957	0.5	12.5	8.0	28	>2500	94	854	760	0.360	0.125	1.332	1.457	0.408	0.209
T43	East Oakwood Lake Trib 1	06/11/02	1040	02-6111	N	18.8	22.7	1432	1623	0.8	13.6	8.3	16	700	41	1343	1302	0.048	0.134	1.632	1.766	0.547	0.410
T43	East Oakwood Lake Trib 1	08/07/02	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY	DRY
T44	East Oakwood Lake Trib 2	06/14/01	1230	01-6914	Y	21.5	19.0	1038	1113	0.6	4.7	7.7	4	<1	4	824	820	0.078	1.456	1.332	2.788	0.188	0.134
T44	East Oakwood Lake Trib 2	07/24/01	1330	01-6308	Y	25.8	22.0	1173	1156	0.6	7.0	8.4	8	<100	16	968	952	0.129	0.244	2.032	2.276	0.203	0.113
T44	East Oakwood Lake Trib 2	08/27/01	1320	01-6329	N	26.0	35.5	1229	1206	0.6	16.2	8.8	13	<1	14	910	896	0.046	0.046	1.906	1.952	0.265	0.170
T44	East Oakwood Lake Trib 2	09/27/01	1140	01-6402	N	15.1	22.0	979	1207	0.6	8.0	8.7	13	60	12	1000	988	0.046	0.222	2.248	2.470	0.204	0.099
T44	East Oakwood Lake Trib 2	10/23/01	1100	01-6453	N	8.8	13.0	839	1222	0.6	10.7	8.4	10	<10	14	938	924	0.042	0.335	2.052	2.387	0.185	0.116
T44	East Oakwood Lake Trib 2	04/08/02	1230	02-6007	N	6.1	9.0	761	1187	0.6	20.0	8.7	9	<10	39	923	884	0.042	0.045	2.060	2.105	0.152	0.051
T44	East Oakwood Lake Trib 2	05/01/02	1230	02-6051	Y	9.8	12.5	835	1175	0.6	14.8	8.5	2	<10	5	921	916	0.056	0.154	1.222	1.376	0.089	0.042
T44	East Oakwood Lake Trib 2	05/08/02	1045	02-6064	Y	10.3	9.0	821	1143	0.6	14.2	8.5	2	10	9	849	840	0.074	0.072	1.448	1.520	0.110	0.035
T44	East Oakwood Lake Trib 2	06/11/02	1030	02-6110	N	20.8	24.0	1126	1226	0.6	9.4	8.4	1	<10	5	889	884	0.042	0.220	1.458	1.678	0.086	0.069
T44	East Oakwood Lake Trib 2	07/11/02	1010	02-6151	N	20.8	17.0	1133	1231	0.6	4.8	7.9	20	<10	15	1019	1004	0.058	0.174	2.110	2.284	0.151	0.041
T44	East Oakwood Lake Trib 2	08/08/02	1200	02-6180	Y	27.0	30.0	1203	1160	0.6	19.8	9.3	60	<100	93	1089	996	0.063	0.306	6.106	6.412	0.589	0.049
T44	East Oakwood Lake Trib 2	08/22/02	945	02-6199	Y	21.7	20.0	1050	1120	0.6	4.8	8.8	65	300	68	1056	988	0.062	0.030	5.437	5.467	0.482	0.048
T44	East Oakwood Lake Trib 2	09/11/02	1045	02-6222	N	19.0	24.8	1120	1263	0.6	-----	8.2	60	950	46	1054	1008	0.063	0.552	4.670	5.222	0.434	0.087
T44	East Oakwood Lake Trib 2	10/16/02	915	02-6239	N	6.3	1.0	769	1196	0.6	3.3	-----	9	60	21	1033	1012	0.045	0.596	3.248	3.844	0.235	0.003
T45	East Oakwood Lake Outlet 1	06/14/01	1200	01-6913	Y	20.7	19.0	990	1079	0.5	2.1	7.5	5	600	4	776	772	0.167	0.272	1.106	1.378	0.228	0.215
T45	East Oakwood Lake Outlet 1	07/24/01	1345	01-6309	Y	24.5	25.0	1106	1117	0.6	3.9	7.7	3	2000	7	863	856	0.163	0.125	1.008	1.133	0.241	0.220
T45	East Oakwood Lake Outlet 1	08/27/01	1315	01-6328	N	22.9	34.0	1163	1213	0.6	12.1	8.1	5	800	19	1043	1024	0.244	0.157	1.214	1.371	0.205	0.159
T45	East Oakwood Lake Outlet 1	09/27/01	1130	01-6399	N	13.8	23.0	960	1226	0.6	9.7	8.3	15	370	14	974	960	0.056	0.078	1.928	2.006	0.236	0.158
T45	East Oakwood Lake Outlet 1	10/23/01	1045	01-6452	N	6.4	11.5	834	1294	0.6	14.3	8.1	25	200	38	962	924	0.090	0.445	1.826	2.271	0.231	0.157
T45	East Oakwood Lake Outlet 1	04/08/02	1220	02-6006	N	6.9	11.0	785	1199	0.6	17.4	8.3	6	<10	31	883	852	0.067	0.128	1.172	1.300	0.096	0.090
T45	East Oakwood Lake Outlet 1	05/01/02	1230	02-6056	Y	10.7	14.0	869	1197	0.6	10.3	8.4	5	40	24	916	892	0.052	0.080	1.164	1.244	0.073	0.034
T45	East Oakwood Lake Outlet 1	05/08/02	1015	02-6063	Y	9.0	9.0	608	878	1.4	11.3	8.4	36	>2500	58	698	640	0.556	0.175	1.718	1.893	0.377	0.179
T45	East Oakwood Lake Outlet 1	06/11/02	1015	02-6109	N	20.1	23.2	1076	1186	0.6	10.5	8.2	3	400	30	906	876	0.046	0.286	1.386	1.672	0.156	0.087
T45	East Oakwood Lake Outlet 1	07/09/02	900	02-6136	N	23.1	24.0	1162	1206	0.6	4.1	7.9	8	410	14	960	946	0.050	0.082	1.276	1.358	0.120	0.119
T45	East Oakwood Lake Outlet 1	08/06/02	1100	02-6159	Y	21.0	22.8	1120	1214	0.6	8.8	8.1	10	7800	18	950	932	0.043	0.068	0.713	0.781	0.079	0.017
T45	East Oakwood Lake Outlet 1	08/22/02	930	02-6198	Y	20.4	19.5	1445	1586	0.8	4.6	7.7	11	1300	16	1356	1340	0.063	0.098	1.179	1.277	0.116	0.070
T45	East Oakwood Lake Outlet 1	09/11/02	915	02-6220	N	13.9	17.0	1014	1287	0.6	-----	7.6	16	730	8	986	978	0.117	0.358	1.036	1.394	0.150	0.098
T45	East Oakwood Lake Outlet 1	10/15/02	1400	02-6236	N	8.4	18.0	952	1398	0.7	8.4	-----	2	40	5	1085	1080	0.024	0.456	0.514	0.970	0.149	0.118
T46	East Oakwood Lake Outlet 2	06/14/01	1130	01-6912	Y	20.4	20.0	683	749	0.4	3.0	7.5	8	6000	4	572	568	0.506	0.230	1.711	1.941	0.328	0.294
T46	East Oakwood Lake Outlet 2	07/20/01	1415	01-6290	Y	24.3	29.0	818	828	0.4	3.5	7.4	8	8000	28	638	610	0.541	0.222	1.282	1.504	0.474	0.413
T46	East Oakwood Lake Outlet 2	08/27/01	1400	01-6332	N	25.3	36.5	1248	1240	0.6	7.9	7.6	45	2200	11	991	980	0.343	0.200	1.992	2.192	0.326	0.166
T46	East Oakwood Lake Outlet 2	09/27/01	1215	01-6403	N	14.8	28.0	1011	1263	0.6	9.7	8.2	30	1300	52	1036	984	0.089	0.158	2.181	2.339	0.215	0.091
T46	East Oakwood Lake Outlet 2	10/23/01	1150	01-6456	N	9.1	16.5	918	1316	0.7	15.1	8.2	25	90	31	1003	972	0.074	0.227	1.716	1.943	0.235	0.098
T46	East Oakwood Lake Outlet 2	04/08/02	1200	02-6005	N	5.8	8.0	758	1197	0.6	17.4	7.9	5	<10	25	921	896	0.090	0.234	1.052	1.286	0.121	0.113
T46	East Oakwood Lake Outlet 2	05/01/02	1230	02-6057	Y	9.9	14.0	913	1299	0.7	12.0	8.0	3	20	13	925	912	0.043	0.019	0.982	1.001	0.066	0.029

Site	Site Name	Date	Time	Lab#	Runoff?	Water Temp C°	Air Temp C°	Conductivity µs/cm	Specific Conductivity µs/cm	Salinity ppt	Dissolved Oxygen mg/L	pH units	Turbidity NTU	Fecal Coliform cfu/100mL	TSS mg/L	Tot Solids mg/L	Dissolved Solids mg/L	Nitrates mg/L	Ammonia mg/L	Organic Nitrogen mg/L	TKN mg/L	Tot PO4 mg/L	TotDis PO4 mg/L
T46	East Oakwood Lake Outlet 2	06/14/01	1130	01-6912	Y	20.4	20.0	683	749	0.4	3.0	7.5	8	6000	4	572	568	0.506	0.230	1.711	1.941	0.328	0.294
T46	East Oakwood Lake Outlet 2	07/20/01	1415	01-6290	Y	24.3	29.0	818	828	0.4	3.5	7.4	8	8000	28	638	610	0.541	0.222	1.282	1.504	0.474	0.413
T46	East Oakwood Lake Outlet 2	08/27/01	1400	01-6332	N	25.3	36.5	1248	1240	0.6	7.9	7.6	45	2200	11	991	980	0.343	0.200	1.992	2.192	0.326	0.166
T46	East Oakwood Lake Outlet 2	09/27/01	1215	01-6403	N	14.8	28.0	1011	1263	0.6	9.7	8.2	30	1300	52	1036	984	0.089	0.158	2.181	2.339	0.215	0.091
T46	East Oakwood Lake Outlet 2	10/23/01	1150	01-6456	N	9.1	16.5	918	1316	0.7	15.1	8.2	25	90	31	1003	972	0.074	0.227	1.716	1.943	0.235	0.098
T46	East Oakwood Lake Outlet 2	04/08/02	1200	02-6005	N	5.8	8.0	758	1197	0.6	17.4	7.9	5	<10	25	921	896	0.090	0.234	1.052	1.286	0.121	0.113
T46	East Oakwood Lake Outlet 2	05/01/02	1230	02-6057	Y	9.9	14.0	913	1299	0.7	12.0	8.0	3	20	13	925	912	0.043	0.019	0.982	1.001	0.066	0.029
T46	East Oakwood Lake Outlet 2	05/08/02	930	02-6062	Y	8.0	10.0	446	660	0.3	10.6	7.8	65	>2500	148	624	476	0.642	0.306	2.046	2.352	0.596	0.264
T46	East Oakwood Lake Outlet 2	06/11/02	1200	02-6114	N	21.0	24.0	1101	1193	0.6	12.7	8.2	9	520	45	941	896	0.067	0.076	1.236	1.312	0.159	0.094
T46	East Oakwood Lake Outlet 2	07/09/02	830	02-6135	N	22.3	25.0	1256	1327	0.7	4.0	7.9	40	3000	58	1098	1040	0.063	0.216	1.910	2.126	0.219	0.096
T46	East Oakwood Lake Outlet 2	08/06/02	1120	02-6160	Y	21.4	21.2	1388	1492	0.8	9.9	8.1	55	13000	80	1332	1252	0.344	0.217	2.188	2.405	0.418	0.054
T46	East Oakwood Lake Outlet 2	08/22/02	900	02-6197	Y	20.3	21.0	1345	1480	0.7	6.0	7.7	24	1500	54	1350	1296	0.064	0.100	1.082	1.182	0.160	0.053
T46	East Oakwood Lake Outlet 2	09/11/02	1200	02-6224	N	21.0	29.0	1260	1366	0.7	-----	7.6	32	190	34	1178	1144	0.109	0.326	1.690	2.016	0.236	0.055
T46	East Oakwood Lake Outlet 2	10/15/02	1345	02-6235	N	9.7	11.5	1136	1607	0.8	11.1	-----	3	240	30	1370	1340	0.044	0.125	1.157	1.282	0.095	0.022
T48	East Oakwood Lakes Inlet #3	06/14/01	1430	01-6224	Y	20.1	18.0	960	1056	0.5	4.1	7.6	8	1100	10	830	820	2.462	0.738	1.576	2.314	0.337	0.326
T48	East Oakwood Lakes Inlet #3	07/20/01	1345	01-6288	Y	24.3	29.0	1474	1490	0.7	6.3	7.9	5	5000	8	1228	1220	0.189	0.182	1.256	1.438	0.327	0.283
T48	East Oakwood Lakes Inlet #3	08/27/01	1345	01-6331	N	25.9	37.0	1456	1442	0.7	8.0	8.4	3	30	4	1156	1152	0.048	0.152	1.636	1.788	0.030	0.025
T48	East Oakwood Lakes Inlet #3	09/27/01	1115	01-6400	N	13.8	15.0	1177	1499	0.8	8.8	8.4	10	10	9	1101	1092	0.045	0.189	1.865	2.054	0.117	0.042
T48	East Oakwood Lakes Inlet #3	10/23/01	1130	01-6455	N	9.0	16.0	874	1258	0.6	13.5	8.5	20	<10	29	953	924	0.044	0.192	2.588	2.780	0.204	0.054
T48	East Oakwood Lakes Inlet #3	04/08/02	1310	02-6009	N	6.3	13.0	656	1026	0.5	17.2	8.5	5	<10	17	881	864	0.172	0.037	1.340	1.377	0.191	0.102
T48	East Oakwood Lakes Inlet #3	04/29/02	1245	02-6035	Y	8.8	15.0	1540	2255	1.2	20.0	8.2	4	10	7	1995	1988	0.083	0.032	0.990	1.022	0.136	0.103
T48	East Oakwood Lakes Inlet #3	05/09/02	830	02-6073	Y	4.0	4.5	882	1479	0.7	18.0	8.1	11	>2500	46	1246	1200	1.234	0.085	1.502	1.587	0.304	0.214
T48	East Oakwood Lakes Inlet #3	06/11/02	1045	02-6112	N	20.6	26.0	1406	1539	0.8	4.0	8.3	3	<10	8	1242	1234	0.037	0.191	1.491	1.682	0.238	0.160
T48	East Oakwood Lakes Inlet #3	07/11/02	945	02-6150	N	21.9	17.0	1288	1369	0.7	6.5	8.3	30	40	20	1134	1114	0.060	0.260	2.832	3.092	0.173	0.027
T48	East Oakwood Lakes Inlet #3	08/07/02	1230	02-6173	Y	24.1	30.0	1180	1197	0.6	14.8	9.3	60	<100	74	1094	1020	0.052	0.230	4.084	4.314	0.246	0.025
T48	East Oakwood Lakes Inlet #3	08/22/02	1030	02-6200	Y	22.2	20.2	1278	1348	0.7	3.6	8.3	40	200	42	1182	1140	0.064	0.340	3.036	3.376	0.192	0.048
T48	East Oakwood Lakes Inlet #3	09/11/02	1115	02-6223	N	20.3	24.0	1237	1361	0.7	-----	8.8	28	30	25	1065	1040	0.054	0.404	3.158	3.562	0.142	0.029
T48	East Oakwood Lakes Inlet #3	10/16/02	945	02-6240	N	5.7	0.5	858	1359	0.7	8.1	-----	8	<10	13	1097	1084	0.057	0.358	2.340	2.698	0.069	0.004

Site	Site Name	Date	Time	Lab#	Runoff?	Secchi Depth m	Water Temp C'	Air Temp C'	Conductivity µs/cm	Specific Conductivity µs/cm	Salinity ppt	Dissolved Oxygen mg/L	pH units	Turbidity NTU	Fecal Coliform cfu/100mL	TSS mg/L	Tot Solids mg/L	Dissolved Solids mg/L	Nitrates mg/L	Ammonia mg/L	Organic Nitrogen mg/L	TKN mg/L	Tot PO4 mg/L	TotDis PO4 mg/L
L1-S	East Oakwood Lake 1	07/25/01	1230	01-6317	N	2.50	26.5	25.0	1158	1128	0.6	3.9	8.2	4	<100	5	965	960	0.050	0.390	1.155	1.545	0.186	0.116
L1-S	East Oakwood Lake 1	08/29/01	1130	01-6349	N	1.00	24.0	25.0	1173	1198	0.6	10.8	8.6	9	<10	14	964	950	0.059	0.196	1.478	1.674	0.223	0.139
L1-S	East Oakwood Lake 1	09/28/01	1030	01-6406	N	0.50	15.7	15.0	976	1186	0.6	6.5	9.1	21	10	16	948	932	0.050	0.176	2.458	2.634	0.236	0.095
L1-S	East Oakwood Lake 1	10/29/01	1000	01-6467	N	0.75	4.2	7.0	750	1245	0.6	19.0	7.7	13	60	14	1034	1020	0.075	0.201	1.786	1.987	0.141	0.116
L1-S	East Oakwood Lake 1	04/15/02	1520	02-6027	N	1.33	12.3	22.0	874	1154	0.6	17.0	8.7	2	<1	9	869	860	0.045	0.164	1.531	1.695	0.066	0.037
L1-S	East Oakwood Lake 1	05/01/02	1115	02-6048	Y	2.60	9.6	11.5	798	1131	0.6	16.5	8.5	1	<10	2	978	976	0.036	0.037	0.912	0.949	0.120	0.064
L1-S	East Oakwood Lake 1	05/14/02	820	02-6084	Y	2.65	10.2	8.5	754	1051	0.5	16.9	9.0	0	<1	3	819	816	0.040	0.045	0.946	0.991	0.042	0.023
L1-S	East Oakwood Lake 1	06/12/02	850	02-6118	N	2.60	21.6	22.0	1105	1182	0.6	8.6	8.3	1	<10	2	786	784	0.070	0.264	0.958	1.222	0.137	0.076
L1-S	East Oakwood Lake 1	07/11/02	830	02-6146	N	0.60	24.8	17.5	1238	1246	0.6	8.2	8.4	14	<10	9	1005	996	0.036	0.051	1.398	1.449	0.203	0.101
L1-S	East Oakwood Lake 1	08/08/02	930	2-6176	Y	0.25	23.5	23.5	1084	1116	0.6	11.0	9.2	45	<100	45	965	920	0.057	0.155	3.816	3.971	0.234	0.047
L1-S	East Oakwood Lake 1	09/12/02	1100	2-6230	N	0.40	21.5	22.2	1041	1117	0.6	5.2	9.1	35	230	21	895	874	0.018	0.264	3.390	3.654	0.153	0.037
L1-B	East Oakwood Lake 1	07/25/01	1240	01-6318	N	2.50	26.4	25.0	1157	1128	0.6	3.5	8.1	4	<100	3	991	988	0.051	0.344	1.154	1.498	0.167	0.123
L1-B	East Oakwood Lake 1	08/29/01	1115	01-6348	N	1.00	24.0	25.0	1173	1198	0.6	10.8	8.6	14	100	15	963	948	0.060	0.110	1.506	1.616	0.199	0.138
L1-B	East Oakwood Lake 1	09/28/01	1000	01-6405	N	0.50	15.9	15.0	975	1191	0.6	8.0	9.0	18	100	16	996	980	0.047	0.129	2.204	2.333	0.222	0.111
L1-B	East Oakwood Lake 1	10/29/01	1030	01-6468	N	0.75	4.2	7.0	749	1243	0.6	19.1	7.7	13	50	13	1013	1000	0.078	0.172	2.014	2.186	0.187	0.080
L1-B	East Oakwood Lake 1	05/14/02	830	02-6087	Y	2.65	10.2	9.0	803	1117	0.6	17.3	8.8	0	<1	2	830	828	0.036	0.045	0.914	0.959	0.032	0.018
L1-B	East Oakwood Lake 1	06/12/02	900	02-6119	N	2.60	21.5	22.0	1103	1182	0.6	7.5	8.3	1	<10	1	853	852	0.076	0.224	0.978	1.202	0.099	0.073
L1-B	East Oakwood Lake 1	07/11/02	845	02-6147	N	0.60	24.8	17.5	1238	1247	0.6	8.1	8.4	14	<10	8	1028	1020	0.038	0.084	1.412	1.496	0.209	0.127
L1-B	East Oakwood Lake 1	08/08/02	945	02-6177	Y	0.25	23.5	23.5	1086	1117	0.6	11.3	9.2	45	<100	46	930	884	0.069	0.046	3.969	4.015	0.213	0.033
L1-B	East Oakwood Lake 1	09/12/02	1115	02-6231	N	0.40	21.0	22.5	1046	1132	0.6	3.6	8.9	34	20	16	904	888	0.016	0.217	3.478	3.695	0.162	0.034
L2-S	East Oakwood Lake 2	07/25/01	1130	01-6315	N	2.60	26.5	25.0	1160	1128	0.6	5.1	8.2	5	100	4	976	972	0.056	0.262	1.450	1.712	0.234	0.126
L2-S	East Oakwood Lake 2	08/29/01	1030	01-6345	N	1.60	23.8	25.0	1167	1194	0.6	10.2	8.5	7	20	10	942	932	0.060	0.095	1.350	1.445	0.214	0.163
L2-S	East Oakwood Lake 2	09/28/01	1115	01-6408	N	0.75	15.0	16.0	961	1187	0.6	3.0	9.0	16	40	15	939	924	0.076	0.124	2.610	2.734	0.196	0.091
L2-S	East Oakwood Lake 2	10/29/01	1100	01-6469	N	0.75	4.1	7.0	747	1244	0.6	18.7	7.9	15	50	19	1011	992	0.074	0.221	1.866	2.087	0.207	0.069
L2-S	East Oakwood Lake 2	04/15/02	1600	02-6028	N	2.60	13.3	23.0	864	1168	0.6	15.7	8.6	1	<1	4	878	874	0.049	0.030	1.039	1.069	0.093	0.025
L2-S	East Oakwood Lake 2	05/01/02	1145	02-6049	Y	3.00	9.8	12.0	828	1165	0.6	17.7	8.5	1	<10	1	913	912	0.030	0.046	0.996	1.042	0.050	0.032
L2-S	East Oakwood Lake 2	05/15/02	915	02-6088	Y	2.80	10.2	11.0	799	1113	0.6	17.5	8.8	1	<1	2	794	792	0.042	0.033	0.912	0.945	0.034	0.021
L2-S	East Oakwood Lake 2	06/12/02	925	02-6120	N	2.80	22.0	21.0	1116	1183	0.6	9.2	8.3	1	<10	3	867	864	0.060	0.245	0.988	1.233	0.122	0.090
L2-S	East Oakwood Lake 2	07/11/02	915	02-6148	N	0.70	24.2	17.0	1229	1247	0.6	8.0	8.4	14	<10	9	1017	1008	0.051	0.088	1.682	1.770	0.182	0.083
L2-S	East Oakwood Lake 2	08/08/02	1000	02-6178	Y	0.35	23.6	23.2	1092	1122	0.6	12.0	9.2	36	<100	41	929	888	0.068	0.145	3.675	3.820	0.228	0.036
L2-S	East Oakwood Lake 2	09/12/02	1145	02-6232	N	0.35	21.9	24.0	1064	1130	0.6	3.8	8.9	33	10	22	906	884	0.014	0.236	3.254	3.490	0.144	0.035
L2-B	East Oakwood Lake 2	07/25/01	1140	01-6316	N	2.60	26.5	25.0	1161	1128	0.6	5.2	8.3	4	<100	3	1011	1008	0.054	0.206	1.464	1.670	0.134	0.079
L2-B	East Oakwood Lake 2	08/29/01	1015	01-6344	N	1.60	23.8	25.0	1167	1194	0.6	10.2	8.4	9	60	10	914	904	0.061	0.096	1.354	1.450	0.127	0.135
L2-B	East Oakwood Lake 2	09/28/01	1100	01-6407	N	0.75	15.1	16.0	965	1186	0.6	2.9	9.0	15	60	46	962	916	0.046	0.105	3.080	3.185	0.234	0.105
L2-B	East Oakwood Lake 2	10/29/01	1130	01-6470	N	0.75	4.1	7.0	747	1244	0.6	19.0	7.9	15	40	13	961	948	0.074	0.198	2.015	2.213	0.261	0.088
L2-B	East Oakwood Lake 2	05/01/02	1150	02-6050	Y	3.00	9.6	12.0	824	1166	0.6	17.6	8.7	2	<10	3	895	892	0.038	0.068	0.983	1.051	0.061	0.034
L2-B	East Oakwood Lake 2	05/14/02	915	02-6089	Y	2.80	10.2	11.0	797	1112	0.6	17.6	8.8	1	<1	2	838	836	0.037	0.043	0.920	0.963	0.037	0.026
L2-B	East Oakwood Lake 2	06/12/02	930	02-6121	N	2.80	22.0	21.0	1118	1187	0.6	7.7	8.3	1	<10	3	895	892	0.066	0.214	0.961	1.175	0.138	0.111
L2-B	East Oakwood Lake 2	07/11/02	930	02-6149	N	0.70	24.2	18.0	1229	1247	0.6	7.8	8.4	14	10	8	1016	1008	0.050	0.031	1.368	1.399	0.180	0.099
L2-B	East Oakwood Lake 2	08/08/02	1030	02-6179	Y	0.35	23.6	23.2	1092	1123	0.6	11.7	9.2	33	100	40	976	936	0.060	0.058	3.665	3.723	0.238	0.023
L2-B	East Oakwood Lake 2	09/12/02	1130	02-6229	N	0.35	21.4	24.0	1054	1129	0.6	3.6	9.0	34	20	23	913	890	0.015	0.176	3.393	3.569	0.140	0.037

East Oakwood Lake 2003 WQ Samples collected during Chlorophyll-*a* and Algae Sampling

Site ID	Lake Site	DATE	TIME	Depth m	Water Temp C°	Air Temp C°	Conductivity µs/cm	Specific Conductivity µs/cm	Salinity ppt	Dissolved Oxygen mg/L	pH units	Turbidity NTU	Secchi Depth m	Total PO4 mg/L	Total Dissolved PO4 mg/L
L1	E. Oakwood Lk 1	04/23/03	945	2.70	10.8	16.0	841	1162	0.6	13.64	9.49	13	0.60	0.135	0.045
L1	E. Oakwood Lk 1	05/16/03	1300	2.70	14.9	18.5	932	1166	0.6	9.61	8.84	8	0.70	0.093	0.051
L1	E. Oakwood Lk 1	06/02/03	1000	2.50	17.0	16.0	1023	1207	-----	7.05	9.06	8	0.60	0.098	0.036
L1	E. Oakwood Lk 1	06/16/03	1000	2.50	23.9	30.0	1179	1213	0.6	10.49	8.59	11	0.30	0.117	0.014
L1	E. Oakwood Lk 1	06/26/03	1330	2.50	20.4	20.0	1125	1234	0.6	7.94	8.39	26	0.20	0.208	0.021
L1	E. Oakwood Lk 1	07/15/03	930	2.50	23.1	23.0	1224	1268	0.6	5.22	8.87	33	0.25	0.246	0.021
L1	E. Oakwood Lk 1	07/29/03	930	-----	24.9	25.5	1279	1281	0.6	8.37	8.62	33	0.33	0.235	0.020
L1	E. Oakwood Lk 1	08/11/03	930	2.30	23.8	26.0	1244	1272	0.6	20+	8.68	40	0.19	0.237	0.018
L1	E. Oakwood Lk 1	09/25/03	1000	2.23	13.2	10.0	988	1275	0.6	8.03	8.74	25	0.32	0.155	0.022
L2	E. Oakwood Lk 2	04/23/03	1015	2.70	10.2	16.5	839	1172	0.6	13.21	9.46	12	0.60	0.126	0.050
L2	E. Oakwood Lk 2	05/16/03	1530	2.70	14.1	18.0	922	1165	0.6	9.46	8.76	8	0.10	0.093	0.042
L2	E. Oakwood Lk 2	06/02/03	1030	2.75	17.0	16.0	1017	1207	-----	6.00	8.37	10	0.60	0.086	0.021
L2	E. Oakwood Lk 2	06/16/03	1030	2.50	22.8	30.0	1168	1224	0.6	8.92	8.30	11	0.45	0.124	0.016
L2	E. Oakwood Lk 2	06/26/03	1330	2.40	20.2	20.0	1120	1232	0.6	8.65	8.38	23	0.20	0.200	0.023
L2	E. Oakwood Lk 2	07/15/03	945	2.40	23.0	33.0	1230	1263	0.6	7.01	9.07	33	0.15	0.240	0.021
L2	E. Oakwood Lk 2	07/29/03	1000	-----	25.1	25.5	1283	1284	0.6	8.54	8.73	32	0.33	0.230	0.021
L2	E. Oakwood Lk 2	08/11/03	1030	2.20	23.7	21.5	1234	1264	0.6	20+	8.92	37	0.19	0.250	0.014
L2	E. Oakwood Lk 2	09/25/03	1030	2.32	13.0	9.6	985	1278	0.6	9.60	8.85	26	0.26	0.166	0.019

Note: These sites were sampled for Chlorophyll-*a* and Algae in 2003, therefore TPO4 and TDPO4 were collected at that time

Lake Samples Collected in 2004 from Johnson Lake and Lake Tetonkaha

Site ID	Lake Name	Date	Time	Comments	Water Depth m	Water Temp C	Air Temp C	Conductivity µs/cm	Specific Conductivity µs/cm	Salinity ppt	Dissolved Oxygen mg/L	pH	Turbidity NTU	Secchi Depth m	Fecal Coliform cfu/100mL	E-Coli mpn/100m	Alkalinity-M mg/L	Alkalinity-P mg/L	TSS mg/L	Total Solids mg/L	Dissolved Solids mg/L	VTSS mg/L	Nitrate mg/L	Ammonia mg/L	TKN mg/L	Total PO4 mg/L	Total Dissolved PO4 mg/L
L10	Johnson Lake	4/22/04	800	Millipore Filters	2.05	11.0	4.3	989	1349	0.7	6.36	8.84	8	0.63	<10	3.0	114	0	15	1139	1124	9	<0.1	0.51	3.41	0.133	0.035
L10	Johnson Lake	5/24/04	1115	Millipore Filters	2.10	13.8	12.0	1102	1400	0.7	6.80	7.69	9	0.50	<10	<1	118	0	26	1200	1174	14	<0.1	<0.02	2.83	0.137	0.018
L10	Johnson Lake	6/10/04	1000	Millipore Filters	2.00	18.5	17.0	1228	1403	0.7	6.30	7.96	22	0.35											0.694	0.041	
L10	Johnson Lake	6/21/04	910	Millipore Filters	2.10	19.0	19.0	1258	1420	0.7	8.61	8.55	38	0.30	<10	2.0	145	5	56	1283	1227	31	<0.1	0.15	4.10	0.244	0.023
L10	Johnson Lake	7/7/04	1435	Millipore Filters	2.10	20.0	25.0	1235	1368	0.7	6.44	7.91	56	0.20											0.398	0.035	
L10	Johnson Lake	7/19/04	920	Millipore Filters	2.20	25.9	26.0	1432	1410	0.7	6.40	8.87	39	0.20	<10	1.0	135	10	50	1258	1208	42	<0.1	<0.02	4.94	0.407	0.089
L10	Johnson Lake	8/12/04	817	Pall Filters	2.00	17.8	----	1204	1396	0.7	9.72	8.40	37	0.20											0.286	0.091	
L10	Johnson Lake	8/17/04	1000	Pall Filters	1.97	20.8	21.0	1275	1387	0.7	12.97	9.22	40	0.23	<10	1.0	122	17	64	1290	1226	36	<0.1	<0.02	4.63	0.252	0.033
L10	Johnson Lake	9/27/04	930	Pall Filters	2.10	16.6	19.5	1124	1340	0.7	20+	6.93	34	0.30	<10	7.4	110	0	38	1217	1179	27	<0.1	<0.02	4.63	0.195	0.030
L10	Johnson Lake	10/19/04	1010	Pall Filters	2.12	6.9	9.2	881	1346	0.7	11.80	7.18	37	0.23	<10	<1	131	0	39	1278	1239	34	<0.1	0.67	4.99	0.282	0.026
L11	Lake Tetonkaha (north)	4/22/04	900	Millipore Filters	1.75	10.9	4.7	978	1340	0.7	9.70	8.90	13	0.40	<10	<1	119	2	25	1139	1114	14	<0.1	0.30	4.34	0.231	0.031
L11	Lake Tetonkaha (north)	5/24/04	1145	Millipore Filters	1.78	13.7	12.0	1066	1359	0.7	7.34	7.68	8	0.53	<10	2.0	111	0	26	1163	1137	16	<0.1	<0.02	2.75	0.101	0.018
L11	Lake Tetonkaha (north)	6/10/04	1030	Millipore Filters	1.60	18.6	18.0	1197	1364	0.7	5.86	7.97	16	0.40											0.093	0.029	
L11	Lake Tetonkaha (north)	6/21/04	935	Millipore Filters	1.90	19.0	20.0	1223	1382	0.7	8.19	8.16	32	0.32	<10	2.0	141	0	51	1234	1183	28	<0.1	0.21	3.92	0.147	0.022
L11	Lake Tetonkaha (north)	7/7/04	1455	Millipore Filters	1.90	20.0	27.0	1290	1373	0.7	12.13	8.36	43	0.20											0.278	0.029	
L11	Lake Tetonkaha (north)	7/19/04	945	Millipore Filters	2.15	25.7	28.0	1383	1366	0.7	7.14	8.98	50	0.25	<10	6.1	125	9	53	1226	1173	39	<0.1	<0.02	4.59	0.277	0.035
L11	Lake Tetonkaha (north)	8/12/04	901	Pall Filters	1.80	17.7	----	1217	1412	0.7	10.19	8.39	40	0.20											0.243	0.065	
L11	Lake Tetonkaha (north)	8/17/04	1020	Pall Filters	2.62	20.4	24.0	1253	1372	0.7	11.35	9.30	45	0.20	10	10.6	117	18	62	1269	1207	40	<0.1	<0.02	4.12	0.147	0.029
L11	Lake Tetonkaha (north)	9/27/04	1000	Pall Filters	1.90	16.6	19.5	1160	1361	0.7	9.68	7.74	33	0.30	30	10.9	118	0	37	1213	1176	29	<0.1	0.14	4.67	0.177	0.022
L11	Lake Tetonkaha (north)	10/19/04	1035	Pall Filters	1.80	6.9	8.9	936	1429	0.7	11.85	7.87	30	0.28	<10	<1	136	0	37	1261	1224	31	<0.1	0.94	5.03	0.215	0.026
L12	Lake Tetonkaha (south)	4/22/04	830	Millipore Filters	2.60	11.3	4.7	996	1349	0.7	7.30	8.90	7	0.50	<10	<1	122	4	17	1144	1127	10	<0.1	0.37	3.47	0.119	0.026
L12	Lake Tetonkaha (south)	5/27/04	1000	Millipore Filters	2.78	14.8	26.0	1048	1320	0.7	7.45	7.43	6	0.57	<10	2.0	111	0	24	1180	1156	13	<0.1	<0.02	2.72	0.088	0.022
L12	Lake Tetonkaha (south)	6/10/04	1100	Millipore Filters	2.78	18.6	18.0	1182	1346	0.7	7.05	8.05	13	0.51											0.108	0.019	
L12	Lake Tetonkaha (south)	6/21/04	950	Millipore Filters	2.80	19.2	21.0	1202	1352	0.7	8.41	8.31	22	0.40	<10	1.0	131	1	35	1206	1171	24	<0.1	0.18	3.99	0.170	0.021
L12	Lake Tetonkaha (south)	7/7/04	1505	Millipore Filters	3.50	21.7	24.0	1273	1366	0.7	11.11	8.53	35	0.20											0.244	0.028	
L12	Lake Tetonkaha (south)	7/19/04	1005	Millipore Filters	2.80	25.4	28.0	1370	1358	0.7	7.72	9.04	40	0.25	<10	2.0	122	17	40	1205	1165	36	<0.1	<0.02	4.48	0.252	0.033
L12	Lake Tetonkaha (south)	8/12/04	848	Pall Filters	2.60	18.4	----	1198	1372	0.7	9.41	8.37	37	0.20											0.212	0.046	
L12	Lake Tetonkaha (south)	8/17/04	1055	Pall Filters	2.62	19.9	23.5	1234	1370	0.7	11.88	9.29	39	0.20	20	2.0	125	21	58	1264	1206	44	<0.1	<0.02	4.29	0.220	0.041
L12	Lake Tetonkaha (south)	9/27/04	1015	Pall Filters	2.80	16.7	19.5	1166	1385	0.7	8.84	7.54	32	0.30	10	7.4	120	0	37	1216	1179	29	<0.1	0.25	4.62	0.188	0.020
L12	Lake Tetonkaha (south)	10/19/04	1050	Pall Filters	2.70	7.2	8.9	938	1424	0.7	11.12	7.99	36	0.27	<10	<1	135	0	33	1253	1220	28	<0.1	1.01	4.70	0.243	0.025

Note: Samples that are highlighted were collected during Chlorophyll-a only sampling

Appendix D.
WQ Field Data Sheets

Water Resource Institute Water Quality Data Sheet
East Dakota Water Development District
Water Quality Data

Lab No.
 Site Location Code:
 Samples Collected By:
 Staff Gage Reading:
 Type of Sample: Grab / Time Comp / Depth Integrated

Source: Tributary / River
 Site Name:
 Date: Time:
 Sample Depth:

Visual Observations
Precipitation – none light moderate heavy
Wind (&direction) – calm moderate strong
Odor – yes no
Septic - yes no
Dead Fish - yes no
Film - yes no
Color -
Width -
Depth -
Ice Cover - yes no

Field Analysis	
Parameter	Measure
Water Temperature	
Air Temperature	
Conductivity	
Salintiy	
Dissolved Oxygen	
pH	
Secchi	
Turbidity	

Lab Analysis	Field Preparation				
Parameter	Cool to 4°C	2mL conc H ₂ SO ₄ Cool to 4°C	2mL conc H ₂ SO ₄ Cool to 4°C	Filtered, 2mL conc H ₂ SO ₄ Cool to 4°C	Na ₂ S ₂ O ₃
	Bottle A	Bottle B	Bottle C	Bottle D	Bottle E
Total Solids	XXX				
Total Suspended Solids	XXX				
Ammonia-N		XXX			
Total Kjeldahl-N		XXX			
Nitrate-N		XXX			
Total Phosphorus			XXX		
Total Dissolved Phosphorus				XXX	
Fecal Coliform					XXX

Field Observations:

SD DENR Water Quality Data Sheet

Project	School/Bullhead Lakes Watershed Assessment	Agency Code	5387	Storet Number	
Waterbody	School Lake I (east)	Lake ID		Station ID	L6
Site Location		Nearest Town			
Latitude		Longitude			

Sample Date		Sample Time		Samplers		Phone #	
-------------	--	-------------	--	----------	--	---------	--

- Grab
 Integrated
 Composite
 Duplicate
 Blank

Type of Sample

Field Analyses	Water Temp (C)	Air Temp (C)	Conductivity (uohm)	Flow (cfs)	Sample Depth	Secchi Disk (m)	Dissolved Oxygen (mg/L)	pH (su)	Turbidity (NTU)	Surface	Bottom	Composite

Visual Observations	Precip	N	L	M	H	Wind	C	M	S	Odor	Y	N
	Septic	Y	N			Dead Fish	Y	N		Film	Y	N
	Channel Width					Total Water Depth						
	Ice Cover					Water Color						

Lab Analyses	Bottle A	Bottle B	Bottle C	Bottle D	Bottle E	Metals
	1 Liter No Preservative	1 Liter 2 mL H2SO4	Na2SO3	100 mL .25 mL H2SO4	Amber glass bottle	Plastic qt. cube or Pb/Cu bottle
Alkalinity (mg/L)	<input checked="" type="checkbox"/>	Ammonia (mg/L) <input checked="" type="checkbox"/>	Note: 250 mL of sample required if requesting more than one of the following: E Coli* <input checked="" type="checkbox"/> Enterococci* <input type="checkbox"/> Fecal Coliform* <input checked="" type="checkbox"/> * count/100 mL	TDPO4 (mg/L) <input checked="" type="checkbox"/>	Caffeine <input type="checkbox"/>	<input type="checkbox"/> Total <input type="checkbox"/> Total Dissolved <input type="checkbox"/> Total Recoverable
TSOL (mg/L)	<input checked="" type="checkbox"/>	NO3-NO2-N (mg/L) <input checked="" type="checkbox"/>		Al (ug/L) <input type="checkbox"/>	Pb (ug/L) <input type="checkbox"/>	
TSSOL (mg/L)	<input checked="" type="checkbox"/>	TKN (mg/L) <input checked="" type="checkbox"/>		Sb (ug/L) <input type="checkbox"/>	Ni (ug/L) <input type="checkbox"/>	
VTSS (mg/L)	<input checked="" type="checkbox"/>	Total P (mg/L) <input checked="" type="checkbox"/>		As (ug/L) <input type="checkbox"/>	Se (mg/L) <input type="checkbox"/>	
TDSOL (mg/L)	<input type="checkbox"/>	COD (mg/L) <input type="checkbox"/>		Ba (ug/L) <input type="checkbox"/>	Ag (mg/L) <input type="checkbox"/>	
Na (mg/L)	<input type="checkbox"/>			Be (ug/L) <input type="checkbox"/>	Ti (mg/L) <input type="checkbox"/>	
K (mg/L)	<input type="checkbox"/>			B (ug/L) <input type="checkbox"/>	U (mg/L) <input type="checkbox"/>	
Cl (mg/L)	<input type="checkbox"/>			Cr (ug/L) <input type="checkbox"/>	Vn (mg/L) <input type="checkbox"/>	
SO4 (mg/L)	<input type="checkbox"/>			Cu (ug/L) <input type="checkbox"/>	Zn (mg/L) <input type="checkbox"/>	
BOD (mg/L)	<input type="checkbox"/>			Hg (ug/L) <input type="checkbox"/>		
CBOD(mg/L)	<input type="checkbox"/>					
Nitrate (mg/L)	<input type="checkbox"/>					
Fluoride (mg/L)	<input type="checkbox"/>					
pH (su)	<input type="checkbox"/>					
Cond (umohs)	<input type="checkbox"/>					
HCO3 (mg/L)	<input type="checkbox"/>					
CO3 (mg/L)	<input type="checkbox"/>					
Hardness (mg/L)	<input type="checkbox"/>					
Ca (mg/L)	<input type="checkbox"/>					
Mg (mg/L)	<input type="checkbox"/>					
Other:						
		Lab Comments				1 Liter NaOH <input checked="" type="checkbox"/> Cn (mg/L)

Sample Temp (C)

Date / Time Received

Lab #

**Appendix E.
Natural Resource Solutions Contract
and
Laboratory Procedures**

Contract No. 2, Natural Resource Solutions, Inc. and East Dakota Water Development District

Contract for Services

This agreement, made the 28th day of October 2002 is between Natural Resource Solutions and East Dakota Water Development District, referred to in this document as the District.

- A. Scope of Services:** Natural Resource Solutions agrees to provide macroinvertebrate identifications and metric calculations for samples collected from sites in the North-Central Big Sioux River Watershed Assessment by the District. The level of taxonomic resolution will be equivalent to or below the taxonomic level (generally species) previously identified by the South Dakota Department of Environment and Natural Resources (SDDENR). Results will include the following:
1. Macroinvertebrate will be identified and enumerated for 31 rock basket samples collected at 19 sites in 2002. Thirteen of these samples are composite samples of 3 rock baskets per site for 13 sites. Eighteen of these samples comprise 3 individually preserved rock baskets per site for 6 sites.
 2. Calculation of the 39 metrics in Table 1 will be completed for the 31 samples. These metrics will be subject to review for appropriateness for assessment and monitoring of the Big Sioux River. The District Manager at EDWDD and Natural Resource Solutions must agree upon any changes.
 3. A report will be prepared that includes a description of the major taxonomic groups and water quality conditions they are usually associated with.
 4. Hard and electronic copies (Electronic Data Deliverables-EDD) will be required for the data. The data will be entered into the EDAS database.
 5. The functional feeding group assignments, i.e. gatherer, shredder, piercer etc., will be included for each genus/species in the EDD.
 6. The biotic index value (tolerance values) will be included for each genus species in the EDD.
 7. Standard laboratory protocols for the SDDENR will be followed in the analysis (Appendix A).

8. Standard QA/QC protocols be followed in the future if deemed necessary (Appendix A).
9. The voucher collection described in the standard laboratory protocols (Appendix A) will include a set of permanent slides of the head capsules and/or whole mounts of the identified chironomidae genus/species.
10. A summary of the methods, equipment and keys used to identify macroinvertebrate samples will be provided.

Results for all samples submitted to Natural Resource Solutions by November 15, 2002 will be provided to the District by September 1, 2003. A five-percent reduction in per sample price will be deducted for every week delay in receipt of results.

A summary of cost is presented in Table 2.

- B. Responsibilities of the District:** The District agrees to provide general direction and necessary District coordination and contracts relating to the Scope of Services outlined in paragraph A. The District will provide macroinvertebrate samples collected during the 2002 North-Central Big Sioux River Watershed Assessment in one group.
- C. Compensation:** The District agrees to pay Natural Resource Solutions \$220.⁰⁰/sample for professional services rendered. This covers four items: \$40.⁰⁰/sample for sorting, \$50.⁰⁰/sample for benthic identification, \$80.⁰⁰/sample for chironomid and oligochaete identification, \$15.⁰⁰/sample electronic data compilation and \$35.⁰⁰/sample for metric calculation, compilation, and analysis. A detailed report for \$450.⁰⁰ will be prepared. In addition, for macroinvertebrates that would be new additions to the District's collection a reference/voucher collection for \$25.⁰⁰, and a slide-mounted reference collection of Chironomidaes and Oligochaetas for \$25.⁰⁰ will also be provided. The total contract will not exceed \$7320.⁰⁰. Natural Resource Solutions will send a monthly invoice to the District for services completed by the end of each month of the contract with a description of sample items completed. The District will pay Natural Resource Solutions within 30 days of receipt of each monthly invoice.
- D. Other Conditions:** The District will be reimbursed for these costs through Environmental Protection Agency 319 funds for the Central Big Sioux River Watershed assessment.

- E. Federal Aid Requirements:** Natural Resource Solutions agrees with the following federal aid requirements:
1. To comply with Executive order 11246, concerning Equal Employment Opportunity.
 2. Complete, sign and return the MBE/WBE forms (attached).
- F. Amendments:** This contract may be amended with written approval of both parties.
- G. Terms:** This contract shall run from Novemeber 15, 2002 to September 1, 2003.
- H. Additional Work:** For additional services other than those listed in Section A, a separate contract will be negotiated between the District and Natural Resource Solutions on a per sample basis.
- I. Hold Harmless:** The Natural Resource Solutions agrees to hold harmless and indemnify the East Dakota Water Development District, its officers, agents and employees, from and against any and all actions, suits, damages, liability or other proceedings which may arise as a result of performing services hereunder. This section does not require the Natural Resource Solutions to be responsible for or defend against claims or damages arising solely from acts or omissions of the East Dakota Water Development District, its officers or employees.
- J. Insurance Provision:** Does the State agency require an insurance provision?
YES NO

If YES, does the Natural Resource Solutions agree, at its sole cost and expense, to maintain adequate general liability, worker's compensation, professional liability and automobile liability insurance during the period of this Agreement? YES NO

K. Termination: The District can terminate this agreement if the District determines that adequate progress is not being made. The District shall give a two week written notice of any such termination, and shall pay for all services performed and expenses incurred up through the effective date of such termination.

All parties find this contract in order and agree to comply with the responsibilities and conditions outlined.

Rebecca L. Spawn-Stroup, Owner
Natural Resource Solutions

Date

Natural Resource Solutions - Tax ID #

Jay Gilbertson, Manager
East Dakota Water Development District

Date

I certify that I am a ...
(sign and check all that apply)

Minority Business Enterprise

Woman Business Enterprise

FOR AGENCY USE

-State Agency Coding (MSA Center) _____

-State Agency MSA company from which contract is to be paid

-Object/subject MSA Account to which voucher(s) will be coded

Table 1. The following metrics will be calculated for the rock basket samples collected in 2002.		
Category	Number	Metric
Abundance Measures	1	Corrected abundance
	2	EPT abundance
Richness Measures	3	Total number of taxa
	4	Number of EPT taxa
	5	Number of Ephemeroptera taxa
	6	Number of Trichoptera taxa
	7	Number of Plecoptera taxa
	8	Number of Diptera taxa
	9	Number of Chironomidae taxa
Composition Measures	10	Ratio EPT/Chironomidae Abundance
	11	%EPT
	12	%Ephemeroptera
	13	%Plecoptera
	14	%Trichoptera
	15	% Coleoptera
	16	% Diptera
	17	% Oligochaeta
	18	% Baetidae
	19	% Hydropsychidae
	20	% Chironomidae
	21	% Simuliidae
22	Shannon-Wiener Index	
Tolerance/Intolerance Measures	23	No. of Intolerant Taxa
	24	% Tolerant Organisms
	25	% Sediment Tolerant Organisms
	26	Hilsenhoff Biotic Index
	27	% Dominant Taxon
	28	% Hydropsychidae to Trichoptera
	29	% Baetidae to Ephemeroptera
Feeding Measures	30	% individuals as gatherers and filterers
	31	% gatherers
	32	% filterers
	33	% shredders
	34	% grazers and scrapers
	35	Ratio scrapers/(scrapers+filterers)
	36	Number of gatherer taxa
	37	Number of filterer taxa
	38	Number of shredder taxa
	39	Number of grazer/scrapper taxa

Table 2. Summary of cost for contract work.

Activity	Quantity	Cost	Total
Sample Processing	31 samples	\$220.00/sample	\$6820.00
Report Preparation	1	\$450.00	\$450.00
General Reference Collection ¹	1	\$25.00	\$25.00
Slide-mounted Reference Collection ¹	1	\$25.00	\$25.00
Grand Total			\$7320.00

¹Only macroinvertebrates that would be new additions to the District's collection.

APPENDIX A.

MACROINVERTEBRATE ENUMERATION AND IDENTIFICATION

Laboratory Procedures for Macroinvertebrate Enumeration

1. Prior to processing any samples in a lot (i.e., samples within a collection date, specific watershed, or project), complete the sample log-in sheet to verify that all samples have arrived at the laboratory, and are in proper condition for processing.
2. Thoroughly rinse sample in a 500 μm -mesh sieve to remove preservative and fine sediment. Large organic material (whole leaves, twigs, algal or macrophyte mats, etc.) not removed in the field should be rinsed, visually inspected, and discarded. If the samples have been preserved in alcohol, it will be necessary to soak the sample contents in water for about 15 minutes to hydrate the benthic organisms, which will prevent them from floating on the water surface during sorting. If the sample was stored in more than one container, the contents of all containers for given sample should be combined at this time. Gently mix the sample by hand while rinsing to make homogeneous.
3. Floating and picking the sample can be completed if there is an inordinate amount of organic debris within the sample. This can be completed by various methods as long as visible degradation on the organisms within the sample does not occur. There are a variety of flotation methods available and any one can be used, i.e. sugar or epsom salts. Other methodologies may be employed so long as the individual organisms within the samples are not significantly damaged which may hinder the identification process.
4. After washing, spread the sample evenly across a pan marked with grids approximately 6 cm x 6 cm. On the laboratory bench sheet, note the presence of large or obviously abundant organisms; do not remove them from the pan. However, Vinson and Hawkins (1996) present an argument for including these large organisms in the count, because of the high probability that these organisms will be excluded from the targeted grids.
5. Use a random numbers table to select 4 numbers corresponding to squares (grids) within the gridded pan. Remove all material (organisms and debris) from the four grid squares, and place the material into a shallow white pan and add a small amount of water to facilitate sorting. If there appear (through a cursory count or observation) to be 100 organisms \pm 20% (cumulative of 4 grids), then subsampling is complete.

Any organism that is lying over a line separating two grids is considered to be on the grid containing its head. In those instances where it may not be possible to determine the location of the head (worms for instance), the organisms is considered to be in the grid containing most of its body.

If the density of organisms is high enough that many more than 100/200/300 organisms are contained in the 4 grids, transfer the contents of the 4 grids to a second gridded pan. Randomly select grids for this second level of sorting as was done for the first, sorting grids one at a time until 100/200/300 organisms \pm 20% are found. If picking through the entire next grid is likely to result in a subsample of greater than 120/240/360 organisms, then that grid may be subsampled in the sample manner as before to decrease the likelihood of exceeding 120/240/360 organisms. That is, spread the contents of the last grid into another

gridded pan. Pick grids one at a time until the desired number is reached. The total number of grids for each subsorting level should be noted on the laboratory bench sheet.

6. Save the sorted debris residue in a separate container. Add a label that includes the words “sorted residue” in addition to all prior sample label information and preserve in 95% ethanol. Save the remaining unsorted sample debris residue in a separate container labeled “sample residue”; this container should include the original sample label. Length of storage and archival is determined by the laboratory or benthic section supervisor.
7. Place the sorted 100/200/300-organism ($\pm 20\%$) subsample into glass vials, and preserve in 70% ethanol. Label the vials inside with the sample identifier or lot number, date, stream name, sampling location and taxonomic group. If more than one vial is needed, each should be labeled separately and numbered (e.g., 1 of 2, 2 of 2). For convenience in reading the labels inside the vials, insert the labels left-edge first. If identification is to occur immediately after sorting, a petri dish or watch glass can be used instead of vials.
8. Midges (Chironomidae) should be mounted on slides in an appropriate medium (e.g., Euperal, CMC-10); slides should be labeled with the site identifier, date collected, and the first initial and last name of the collector. As with midges, worms (Oligochaeta) must also be mounted on slides and should be appropriately labeled.
9. Fill out header information on Laboratory Bench Sheet as in field sheets. Also check subsample target number. Complete back of sheet for subsampling/sorting information. Note number of grids picked, time expenditure, and number of organisms. If on the back of the laboratory Bench Sheet. Calculate sorting efficiency to determine whether sorting effort passes or fails.
10. Record date of sorting and slide monitoring, if applicable, on Log-In Sheet as documentation of progress and status of sample lot.

Quality Control (QC) for Sorting

1. Ten Percent of the sorted samples in each lot should be examined by laboratory QC personnel or a qualified co-worker. (A lot is defined as a special study, basin study, entire index period, or individual sorter.) The QC worker will examine the grids chosen and tray used for sorting and will look for organisms missed by the sorter. Organisms found will be added to the sample vials. If the QC worker finds less than 10 organisms (or 10% in larger subsamples) remaining in the grids or sorting tray, the sample passes; if more than 10 (or 10%) are found, the sample fails. If the first 10% of the sample lot fails, a second 10% of the sample lot will be checked by the QC worker. Sorter in-training will have their samples 100% checked until the trainer decides that training is complete.
2. After laboratory processing is complete for a given sample, all sieves, pans, trays, etc., that have come in contact with sample will be rinsed thoroughly, examined carefully, and picked free of organisms or debris; organisms found will be added to the sample residue.

Identification of Macroinvertebrates

Taxonomy can be at any level, but should be consistent among samples. In the original RBPs, two levels of identification were suggested – family (RBP II) and genus/species (RBP

III) level (Plafkin et al. 1989). Genus/species will provide more accurate information on ecological/environmental relationships and sensitivity to impairment. Family level will provide a higher degree of precision among samples and taxonomists, requires less expertise to perform, and accelerates assessment results. In either case, only those taxonomic keys that have been peer reviewed and are published in some way to be available to other taxonomists should be used. Unnamed species (i.e., species A, B, 1 or 2) may be ecologically informative, but will contribute to variability and inconsistency when a statewide database is being developed.

1. Most organisms are identified to the lowest practical level (generally genus or species) by a qualified taxonomist using a dissecting microscope. Midges (Diptera: Chironomidae) are mounted on slides in an appropriate medium and identified using a compound microscope. Each taxon found in a sample is recorded and enumerated in a laboratory bench notebook and then transcribed to the laboratory bench sheet for subsequent reports. Any difficulties encountered during identification (e.g., missing gills) are noted on these sheets.
2. Labels with specific taxa names (and taxonomist's initials) are added to the vials of specimens by the taxonomist. Individual specimens may be extracted from the sample to be included in a reference collection or to be verified by a 2nd taxonomist. Slides are initialed by the identifying taxonomist. A separate label may be added to slides to include the taxon (taxa) name(s) for use in a voucher or reference collection.
3. Record the identity and number of organisms on the Laboratory Bench Sheet. Either a tally counter or "slash" marks on the bench sheet can be done to keep track of the cumulative count. Also, record the life stage of the organisms, taxonomist's initials and taxonomic certainty rating (TCR) as a measure of confidence.
4. Complete the back of the bench sheet to explain certain TCR ratings or condition of organisms. Other comments can be included to provide additional insights for data interpretation. If QC was performed, record on back of sheet.
5. For archiving samples, specimen vials, grouped by station and date, are placed in jars with a small amount of denatured 70% ethanol and tightly capped. The ethanol level in these jars must be examined periodically and replenished as needed, before ethanol loss from the specimen vials takes place. A stick-on label is placed on the outside of the jar indicating sample identifier, date, and preservative (denatured 70% ethanol).

Identification QA/QC Procedures of Macroinvertebrates

1. A voucher collection of all samples and subsamples should be maintained. These specimens should be properly labeled, preserved, and stored in the laboratory for future reference. A taxonomist (the reviewer) not responsible for the original identifications should spot check samples corresponding to the identifications on the bench sheet.
2. The reference collection of each identified taxon should also be maintained and verified by a second taxonomist. The word "val." and the 1st initial and last name of the person validating the identification should be added to the vial label. Specimens sent out for taxonomic validations should be recorded in a "Taxonomy Validation Notebook" showing the label information and the date sent out. Upon return of the specimens, the date received and the

finding should also be recorded in the notebook along with the name of the person who performed the validation.

3. Information on samples completed (through the identification process) will be recorded in the “sample log” notebook to track the progress of each sample within the sample lot. Tracking of each sample will be updated as each step is completed (i.e., subsampling and sorting, mounting of midges and worms, taxonomy).

Appendix F.
WRI Lab Memo

To: East Dakota Water Development District project staff

1/17/03

From: David German

Re: QA/QC problems with the Kjeldahl Unit

A malfunction of the Kjeldahl unit in the Water Resources Institute's Water Quality Laboratory (WQL) was identified in October 2002. The decision has been made to replace the unit. A call for bids is going out next week. The new unit should be on-line by mid-March 2003.

The Kingsbury Lakes project staff first reported hits on blanks they had submitted to the lab in 2001. Water Quality Lab staff ran additional blanks on the instrument to check for errors at that time. Results were good and the hits were assumed to be due to sample preparation and handling. Source water, acid preservative, and bottles are all possible sources of nitrogen in blanks.

For example, source water was a problem for East Dakota Water Development District (EDWDD) blanks submitted in July and August 2002, which had small but detectable concentrations of dissolved solids. The reverse osmosis (R.O.) unit in the WQL had reduced efficiency during this period until the membrane was replaced. The best source water for blanks is water produced by the Nanopure system. This unit produces small quantities of very high quality water, which should be used for all blanks and preparation of known additions to blanks. R.O. water is adequate for washing and rinsing but may contain small amounts of nitrate and other constituents.

It is my understanding that the Kingsbury Lakes project staff took a series of steps to identify the problem causing detections in the blanks. In September 2002 project leaders became convinced the problem was in the WQL rather than in sample preparation. A series of test runs were completed to diagnose the problem. The results of those test runs are included in Tables 1 and 2. The results of these tests indicated a malfunction of the Kendal unit.

Table 1 includes the results of samples mostly submitted by the Kingsbury Lakes project. Results of analysis from blanks and knowns ran by the WQL are presented in Table 2. I met with the Kingsbury Lakes project staff to discuss a plan to determine the source of the malfunction. Two lab blanks were analyzed on 9-23-02 (Table 2). A significant hit (.424 ppm) was observed on burner #5. A set of samples submitted by Kingsbury Lakes project staff as actual lake samples were also analyzed on 9-24-02 and 9-25-02. Hits were observed on burners 5 and 6 (Table 1) but results were inconsistent. For example, a hit was observed on burner 5 on 9-25-02, but not on 9-24-02 (Table 1).

The intermittent nature of the problem was evident in the QA/QC samples submitted by the Kingsbury Lake project earlier in the year also (Table 1). For example, a hit was observed on burner 3 on 7-30-02 but not on 7-29-02.

Analysis of the QA/QC data in Table 1 indicated intermittent problems with burners 3, 5, 6, and 11. Most of the blanks analyzed in 2002 for both the Kingsbury Lakes project and the EDWDD were analyzed on these four burners.

Following the set of blanks submitted as samples by the Kingsbury Lakes project staff a series of test runs were conducted by the WQL. The additional blanks were analyzed by the WQL to determine if a pattern could be established that would allow for correction of the data. The results are presented in Table 2. Burners 5 and 6 appear to be the most likely to produce hits, although not consistently. Burner 3 was also suspect based on hits in July (Table 1) but was not included in the test phase because it went out of service on September 17th and the parts needed for repair were out of stock.

The lack of consistency of hits on a particular burner may be due to the amount of ammonia in the air in the lab. According to the manufacturer, the distillation unit consists of a stacked apparatus with seals between the parts. A failure in these seals may allow distillation of ammonia from the air in the lab into a blank sample. This may account for the lack of hits in the ammonia analysis (the first distillation of the day) when compared to the organic ammonia distillation (the second distillation of the day). More ammonia in the air around the instrument in the afternoon is available to leak into the distillation unit on the second distillation. This may also explain why lower hits were observed when full sets of blanks were run (Table 2).

After reviewing the results from the series of runs using lab blanks I still had some questions about how the problem affects actual sample values. Blanks seem to have an error of approximately .4 ppm increase in concentration when run with actual samples. The concentration seems to be less when a full set of blanks is run even on #6 (Table 2). Over the Christmas break I started to wonder if having samples on the other burners could cause a blank to cause higher blanks so I talked to Shirley about doing a blank and a dup in a sample run. On 12/31/02 she ran a dup on #4 (3.13 ppm) and #6 (3.21 ppm) and a blank on #5 (.03ppm) (Table 1). These results show a slight increase in concentration on 5 & 6 but the magnitude is less than we see in blanks submitted by both projects.

A full set of samples of known concentration were analyzed on 1-2-03. The knowns were handled exactly like a set of samples. Results were acceptable (table 2). The actual value was 1.13 ppm and the test results ranged from 1.03 to 1.15 from burners 4 through 11.

Blanks were also included with runs of samples on 1-6-03, 1-7-03, and 1-8-03 on burners 5 and 6. Hits were observed but were an order of magnitude below what had been observed in some blanks in earlier QA/QC runs (Table 2) and in project blanks. It seems difficult to reproduce the concentrations observed in blanks submitted by the project staff in test runs of lab blanks that have been analyzed so far by the WQL. This has been troubling me for a while now and has caused me to wonder what is missing. As I studied the most recent data I realized we had not completed a test run with actual samples and blanks combined that included both the distillation for ammonia and organic nitrogen.

When a separate result for ammonia is not required, a digestion step is followed by a distillation step (the first of the day) which produces a result for TKN. Analyses that were conducted this way are labeled TKN only in the comments column (Table 2). It seems that fewer problems were observed when the separate distillation to determine ammonia was not done prior to the digestion of the organic nitrogen. A test run using actual samples and blanks combined that included both the distillation for ammonia and organic nitrogen may be helpful to recreate the type of hits observed in the project blanks.

The question is “can any of this information help determine correction factors for the data produced during the time the instrument exhibited intermittent problems?”

1. The problem is probably caused by leaky seals in the distillation apparatus which allows ammonia from the air to be condensed into the sample so quantity in the blank may be a function of the amount in the lab air.
2. The problems with blanks seemed to occur most often at the beginning of runs (burners # 3,5 or 6) where the blanks were often placed but there were exceptions.
3. A correction factor is unlikely to increase the accuracy of the data because of the intermittent nature of the problem and the difficulty of determining the burner position of a given sample.
4. A higher than normal error rate in the data occurred for samples submitted in 2001 and 2002.

I am not confident enough about the specific location of the problem on the instrument to identify correction factors that could be applied to specific samples. I think the best course of action at this point is to report the data as is, with the qualification that an error of approximately .4 ppm may be present in some TKN results due to instrument malfunctions.

Appendix G.
QAQC for Oakwood Lakes WQ
2001-2002

QA/QC Duplicates for the Oakwood Lakes WQ - - 2001 through 2002

StreamName	Time	Sample	Depth	Date	Site	Lab#	Water Temp C'	Air Temp C'	DO mg/L	Field pH su	Fecal Coliform cfu/100mL	Total Suspended Solids mg/L	Total Solids mg/L	Total Dissolved Solids mg/L	NO2/NO3 mg/L	NH3N mg/L	OrgNtr mg/L	TKN mg/L	Tot PO4 mg/L	TotDis PO4 mg/L
East Oakwood Lake Trib 2	1230	Grab	Surface	06/14/01	T44	01-6914	21.5	19	4.7	7.7	<1	4	824	820	0.078	1.46	1.33	2.79	0.188	0.134
Duplicate		Grab	Surface			01-6915					100	2	850	848	0.078	1.55	1.25	2.80	0.198	0.137
Absolute Difference											100	2	26	28	0	0.10	0.08	0.02	0.010	0.003
Percent Difference											100	50	3	3	0	6.2	6.2	0.5	5.1	2.2
E. Oakwood Lk 2 - Surface	1030	DI	Surface	08/29/01	L2-S	01-6345	23.8	25	10.2	8.46	20	10	942	932	0.060	0.10	1.35	1.45	0.214	0.163
Duplicate		DI	Surface			01-6346					<10	7	923	916	0.058	0.12	1.35	1.47	0.186	0.157
Absolute Difference											20	3	19	16	0.002	0.03	0.00	0.02	0.028	0.006
Percent Difference											100	30	2	2	3.3	20.8	0.3	1.4	13.1	3.7
E. Oakwood Lake 1-Surface	820	DI	Surface	5/14/2002	L1-S	2-6084	10.2	8.5	16.9	8.95	<1	3	819	816	0.040	0.05	0.95	0.99	0.042	0.023
Duplicate		DI	Surface			2-6085					<1	1	813	812	0.039	0.02	0.88	0.90	0.029	0.028
Absolute Difference											0	2	6	4	0.001	0.03	0.07	0.10	0.013	0.005
Percent Difference											0	67	1	0	2.5	66.7	7.0	9.7	31.0	17.9
E. Oakwood Lake 1-Surface	850	DI	Surface	06/12/02	L1-S	2-6118	21.6	22	8.6	8.33	<10	2	786	784	0.070	0.26	0.96	1.22	0.137	0.076
Duplicate		DI	Surface			2-6116					<10	2	874	872	0.064	0.24	1.05	1.30	0.113	0.096
Absolute Difference											0	0	88	88	0.006	0.02	0.09	0.07	0.024	0.020
Percent Difference											0	0	10	10	8.6	7.6	8.8	5.6	17.5	20.8
E. Oakwood Lake 1-Surface	830	DI	Surface	07/11/02	L1-S	2-6146	24.8	17.5	8.2	8.37	<10	9	1005	996	0.036	0.05	1.40	1.45	0.203	0.101
Duplicate		DI	Surface			2-6145					<10	11	995	984	0.073	0.06	1.47	1.53	0.193	0.102
Absolute Difference											0	2	10	12	0.037	0.01	0.07	0.08	0.010	0.001
Percent Difference											0	18	1	1	50.7	15.0	5.0	5.4	4.9	1.0
E. Oakwood Lake 1-Surface	930	DI	Surface	08/08/02	L1-S	2-6176	23.5	23.5	11	9.17	<100	45	965	920	0.057	0.16	3.82	3.97	0.234	0.047
Duplicate		DI	Surface			2-6175					<100	43	931	888	0.059	0.19	4.05	4.24	0.293	0.042
Absolute Difference											0	2	34	32	0.002	0.04	0.23	0.27	0.059	0.005
Percent Difference											0	4	4	3	3.4	20.1	5.7	6.4	20.1	10.6
E. Oakwood Lake 1-Surface	1100	DI	Surface	09/12/02	L1-S	2-6230	21.5	22.2	5.2	9.07	230	21	895	874	0.018	0.2640	3.3900	3.6540	0.153	0.037
Duplicate		DI	Surface			2-6228					190	24	884	860	0.025	0.2870	3.7580	4.0450	0.193	0.045
Absolute Difference											40	3	11	14	0.007	0.02	0.37	0.39	0.040	0.008
Percent Difference											17	13	1	2	28.0	8.0	9.8	9.7	20.7	17.8
E. Oakwood Lake Trib2	915	Grab	Surface	10/16/02	T44	2-6239	6.3	1	3.31	4.3	60	21	1033	1012	0.045	0.5960	3.2480	3.8440	0.235	0.003
Duplicate		Grab	Surface			2-6238					20	16	940	924	0.046	0.6080	3.2840	3.8920	0.249	0.070
Absolute Difference											40	5	93	88	0.001	0.01	0.04	0.05	0.014	0.067
Percent Difference											67	24	9	9	2.2	2.0	1.1	1.2	5.6	95.7

QA/QC Blanks for the Oakwood Lakes WQ - - 2001 through 2002

Name	Date	Lab #	Fecal Coliform cfu/100mL	Total Suspended Solids mg/L	Total Solids mg/L	Total Dissolved Solids mg/L	NO2NO3 mg/L	NH3N mg/L	OrgNtr mg/L	TKN mg/L	Tot PO4 mg/L	TotDis PO4 mg/L
BLANK	06/14/01	01-6916	<10	<1	<1	<1	0.06	<0.01	<0.01	<0.01	<0.01	<0.01
BLANK	08/29/01	01-6347	<10	<1	<1	<1	0.04	0.03	0.38	0.41	<0.01	<0.01
BLANK	05/14/02	2-6086	<1	<1	<1	<1	0.03	0.03	0.43	0.46	<0.01	<0.01
BLANK	06/12/02	2-6117	<10	<1	<1	<1	0.07	<0.01	0.27	0.27	0.016	<0.01
BLANK	07/11/02	2-6144	<10	<1	14	14	0.07	<0.01	0.23	0.23	<0.01	<0.01
BLANK	08/08/02	2-6174	<100	<1	<1	<1	0.05	<0.01	0.36	0.36	0.011	0.012
BLANK	09/12/02	2-6227	<10	<1	<1	<1	0.04	<0.01	0.29	0.29	<0.01	0.013
BLANK	10/16/02	2-6237	<10	<1	<1	<1	0.03	0.02	<0.01	0.02	0.034	0.022

QA/QC Duplicates and Blanks for Lakes Sampled in 2004

LakeName	Time	Sample	Depth	Date	SiteID	Water Temp C°	Air Temp C°	Dissolved Oxygen mg/L	Field pH su	Fecal Coliform cfu/100mL	E-Coli mpn/100mL	Alk-M mg/L	Alk-P mg/L	Total Suspended Solids mg/L	Total Solids mg/L	Total Dissolved Solids mg/L	VTSS mg/L	Nitrate mg/L	Ammonia mg/L	TKN mg/L	TotPO4 mg/L	TotDis PO4 mg/L
Lake Tetonkaha (south)	1000	Column	Integrated	05/27/04	L12	14.8	26.0	7.45	7.43	<10	2.0	111	0	24	1180	1156	13	<0.1	<0.02	2.72	0.088	0.022
Duplicate		Column	Integrated							<10	8.5	111	0	22	1173	1151	13	<0.1	<0.02	2.74	0.092	0.033
Absolute Difference								0		0	6.5	0	0	2	7	5	0	0	0	0.02	0.004	0.011
Percent Difference								0		0	76.5	0	0	8.3	0.6	0.4	0	0	0	0.7	4.3	33.3
Lake Tetonkaha (north)	935	Column	Integrated	06/21/04	L11	19.0	20.0	8.19	8.16	<10	2.0	141	0	51	1234	1183	28	<0.1	0.21	3.92	0.147	0.022
Duplicate		Column	Integrated							<10	<1	140	0	50	1235	1185	27	<0.1	0.24	3.77	0.109	0.023
Absolute Difference								0		0	2	1	0	1	1	2	1	0	0.03	0.15	0.038	0.001
Percent Difference								0		0	200	0.7	0	2	0.1	0.2	3.6	0	12.5	3.8	25.9	4.3
Lake Tetonkaha (north)	945	Column	Integrated	07/19/04	L11	25.7	28.0	7.14	8.98	<10	6.1	125	9	53	1226	1173	39	<0.1	<0.02	4.59	0.277	0.035
Duplicate		Column	Integrated							<10	4.1	124	11	51	1213	1162	39	<0.1	<0.02	4.40	0.274	0.038
Absolute Difference								0		0	2	1	2	2	13	11	0	0	0	0.19	0.003	0.003
Percent Difference								0		0	32.8	0.8	18.2	3.8	1.1	0.9	0	0	0	4.1	1.1	7.9
Lake Tetonkaha (north)	1020	Column	Integrated	08/17/04	L11	20.4	24.0	11.35	9.30	10	10.6	117	18	62	1269	1207	40	<0.1	<0.02	4.12	0.147	0.029
Duplicate		Column	Integrated							30	6.2	117	19	60	1274	1214	40	<0.1	<0.02	5.05	0.220	0.039
Absolute Difference								20		0	4.4	0	1	2	5	7	0	0	0	0.93	0.073	0.010
Percent Difference								66.7		0	41.5	0	5.3	3.2	0.4	0.6	0	0	0	18.4	33.2	25.6
Lake Tetonkaha (north)	1000	Column	Integrated	09/27/04	L11	16.6	19.5	9.68	7.74	30	10.9	118	0	37	1213	1176	29	<0.1	0.14	4.67	0.177	0.022
Duplicate		Column	Integrated							30	6.3	118	0	44	1212	1168	31	<0.1	0.14	4.54	0.166	0.024
Absolute Difference								0		0	4.6	0	0	7	1	8	2	0	0	0.13	0.011	0.002
Percent Difference								0		0	42.2	0	0	15.9	0.1	0.7	6.5	0	0	2.8	6.2	8.3
Lake Tetonkaha (north)	1035	Column	Integrated	10/19/04	L11	6.9	8.9	11.85	7.87	<10	<1	136	0	37	1261	1224	31	<0.1	0.94	5.03	0.215	0.026
Duplicate		Column	Integrated							<10	<1	135	0	35	1257	1222	32	<0.1	0.95	4.88	0.236	0.024
Absolute Difference								0		0	0	1	0	2	4	2	1	0	0.01	0.15	0.021	0.002
Percent Difference								0		0	0	0.7	0	5.4	0.3	0.2	3.1	0	1.1	3.0	8.9	7.7

Name	Date	Fecal Coliform cfu/100mL	E-Coli counts/100 mL	Alk-M mg/L	Alk-P mg/L	Total Suspended Solids mg/L	Total Solids mg/L	VTSS mg/L	Nitrate mg/L	Ammonia mg/L	TKN mg/L	TotPO4 mg/L	TotDisPO4 mg/L
Blank	5/27/04	<10	<1	<6	0.0	<1	<7	<1	<0.1	<0.02	<0.23	0.002	0.004
Blank	6/21/04	<10	<1	<6	0.0	<1	<7	<1	<0.1	<0.02	<0.23	<0.002	<0.002
Blank	7/19/04	<10	<1	<6	0.0	<1	<7	<1	<0.1	<0.02	<0.23	<0.002	<0.002
Blank	8/17/04	<10	<1	<6	0.0	<1	<7	<1	<0.1	<0.02	<0.23	<0.002	<0.002
Blank	9/27/04	<10	<1	17	0.0	<1	35	<1	<0.1	<0.02	<0.23	0.002	<0.002
Blank	10/19/04	<2	<1	17	0.0	<1	34	<1	0.20	<0.02	<0.23	0.015	0.018

Appendix H.
Monthly Concentrations - FLUX

Site	Stream	Year	Month	SuspSol	TotSol	DisSol	NO2NO3	NH3N	OrgNtr	TKN	Tot PO4	TotDis		DO
												PO4	Fecal	
T43	East Oakwood Lake Trib 1	2001	5	30268	1574742	1640049	104	134	1374	1508	343	88	176950	14410
T43	East Oakwood Lake Trib 1	2001	6	80105	968424	861468	964	132	1581	1712	444	418	4000640	10128
T43	East Oakwood Lake Trib 1	2001	7	84718	912294	789391	788	132	1600	1731	453	339	4354610	9732
T43	East Oakwood Lake Trib 1	2001	8	92609	816287	666107	711	131	1633	1763	469	303	4960070	9054
T43	East Oakwood Lake Trib 1	2001	9	30268	1574742	1640049	772	134	1374	1508	343	652	176950	14410
T43	East Oakwood Lake Trib 1	2001	10	30268	1574743	1640050	860	134	1374	1508	343	727	176950	14410
T43	East Oakwood Lake Trib 1	2002	4	30268	1574742	1640049	166	134	1374	1508	343	141	176950	14410
T43	East Oakwood Lake Trib 1	2002	5	75604	1023175	931775	827	132	1563	1693	435	370	3655350	10515
T43	East Oakwood Lake Trib 1	2002	6	30268	1574743	1640049	607	134	1374	1508	343	513	176950	14410
T44	East Oakwood Lake Trib 2	2001	6	10084	917399	902198	81	711	1455	2888	212	87	104197	7025
T44	East Oakwood Lake Trib 2	2001	7	14859	918177	902655	80	701	2125	2888	213	86	154963	7132
T44	East Oakwood Lake Trib 2	2001	8	21226	939879	915400	65	421	2363	2896	230	79	271947	10107
T44	East Oakwood Lake Trib 2	2001	9	37303	959836	927120	51	163	3333	2904	246	72	539554	12844
T44	East Oakwood Lake Trib 2	2001	10	42760	959836	927120	51	163	3821	2904	246	72	618482	12844
T44	East Oakwood Lake Trib 2	2002	4	25048	959837	927120	51	163	2238	2904	246	72	362298	12844
T44	East Oakwood Lake Trib 2	2002	5	20488	936154	913212	68	469	2433	2895	227	80	251023	9597
T44	East Oakwood Lake Trib 2	2002	6	26467	959837	927120	51	163	2365	2904	246	72	382826	12844
T44	East Oakwood Lake Trib 2	2002	7	36425	959836	927120	51	163	3255	2904	246	72	526860	12844
T44	East Oakwood Lake Trib 2	2002	8	23994	959837	927120	51	163	2144	2904	246	72	347048	12844
T44	East Oakwood Lake Trib 2	2002	9	19223	924664	906464	76	617	2585	2891	218	84	212814	8021
T44	East Oakwood Lake Trib 2	2002	10	20163	917399	902198	81	711	2909	2888	212	87	208345	7025

Site	Stream	Year	Month	SuspSol	TotSol	DisSol	NO2NO3	NH3N	OrgNtr	TKN	Tot PO4	TotDis		DO
												PO4	Fecal	
T45	East Oakwood Lake Outlet 1	2001	5	15532	811590	794533	219	193	1207	1403	260	204	1236960	5663
T45	East Oakwood Lake Outlet 1	2001	6	13811	811590	794533	195	193	1207	1403	260	204	1099890	5036
T45	East Oakwood Lake Outlet 1	2001	7	13875	811589	794533	196	193	1207	1403	260	204	1104960	5059
T45	East Oakwood Lake Outlet 1	2001	8	22470	817612	800138	313	191	1215	1409	253	198	1770690	8221
T45	East Oakwood Lake Outlet 1	2001	9	6970	927508	902408	15	152	1358	1514	133	83	132850	3175
T45	East Oakwood Lake Outlet 1	2001	10	7999	927508	902408	18	152	1358	1514	133	83	152470	3644
T45	East Oakwood Lake Outlet 1	2002	4	14515	927508	902408	32	152	1358	1514	133	83	276690	6613
T45	East Oakwood Lake Outlet 1	2002	5	24512	859797	839395	301	176	1270	1449	207	154	1724430	9279
T45	East Oakwood Lake Outlet 1	2002	6	9149	927508	902408	20	152	1358	1514	133	83	174400	4168
T45	East Oakwood Lake Outlet 1	2002	7	400193	927508	902408	875	152	1358	1514	133	83	7390070	176631
T45	East Oakwood Lake Outlet 1	2002	8	92303	927508	902408	202	152	1358	1514	133	83	1759470	42053
T45	East Oakwood Lake Outlet 1	2002	9	125565	927508	902408	275	152	1358	1514	133	83	2393510	57208
T45	East Oakwood Lake Outlet 1	2002	10	82081	927508	902408	180	152	1358	1514	133	83	1564620	37396
T46	East Oakwood Lake Outlet 2	2001	5	32828	700885	692287	533	243	1653	1881	430	287	5028130	7791
T46	East Oakwood Lake Outlet 2	2001	6	30313	700885	692287	533	243	1653	1881	430	287	5028130	7791
T46	East Oakwood Lake Outlet 2	2001	7	41107	700885	692287	533	243	1653	1881	430	287	5028130	7791
T46	East Oakwood Lake Outlet 2	2001	8	67386	700885	692287	533	243	1653	1881	430	287	5028130	7791
T46	East Oakwood Lake Outlet 2	2001	9	29108	1082423	1042306	78	169	1243	1412	161	101	441030	14641
T46	East Oakwood Lake Outlet 2	2001	10	49962	1082424	1042306	78	169	1243	1412	161	101	441030	14641
T46	East Oakwood Lake Outlet 2	2002	4	64464	864133	842049	338	212	1478	1680	315	208	3065460	10722
T46	East Oakwood Lake Outlet 2	2002	5	66533	751095	738349	473	234	1599	1819	395	263	4424480	8692
T46	East Oakwood Lake Outlet 2	2002	6	39338	1014517	980009	159	182	1316	1495	209	134	1257450	13421
T46	East Oakwood Lake Outlet 2	2002	7	433023	1082423	1042306	78	169	1243	1412	161	101	441030	14641
T46	East Oakwood Lake Outlet 2	2002	8	472265	1082423	1042306	78	169	1243	1412	161	101	441030	14641
T46	East Oakwood Lake Outlet 2	2002	9	0	0	0	0	0	0	0	0	0	0	0
T46	East Oakwood Lake Outlet 2	2002	10	197862	1082424	1042306	78	169	1243	1412	161	101	441030	14641

Appendix I.
Monthly Loadings - FLUX

Site	Stream	Year	Month	SuspSol	TotSol	DisSol	NO2NO3	NH3N	Orgntr	TKN	Tot PO4	TotDis PO4	Fecal	DO
T43	East Oakwood Lake Trib 1	2001	5	1371	71337	74295	5	6	62	68	16	4	8000	653
T43	East Oakwood Lake Trib 1	2001	6	89203	1078415	959311	1073	147	1761	1906	494	465	4455000	11278
T43	East Oakwood Lake Trib 1	2001	7	139239	1499408	1297409	1295	216	2630	2844	745	558	7157100	15994
T43	East Oakwood Lake Trib 1	2001	8	235320	2074183	1692576	1808	334	4150	4479	1192	770	12603500	23005
T43	East Oakwood Lake Trib 1	2001	9	1844	95945	99924	47	8	84	92	21	40	10800	878
T43	East Oakwood Lake Trib 1	2001	10	1656	86133	89705	47	7	75	83	19	40	9700	788
T43	East Oakwood Lake Trib 1	2002	4	7416	385826	401826	41	33	337	369	84	35	43400	3531
T43	East Oakwood Lake Trib 1	2002	5	58079	786005	715791	635	102	1200	1301	334	284	2808000	8077
T43	East Oakwood Lake Trib 1	2002	6	2344	121940	126997	47	10	106	117	27	40	13700	1116
T44	East Oakwood Lake Trib 2	2001	6	27233	2477607	2436555	219	1919	3929	7799	572	234	281403	18972
T44	East Oakwood Lake Trib 2	2001	7	27882	1722934	1693808	151	1315	3987	5419	399	162	290783	13382
T44	East Oakwood Lake Trib 2	2001	8	22696	1004978	978803	69	450	2527	3097	246	85	290783	10807
T44	East Oakwood Lake Trib 2	2001	9	19455	500599	483536	26	85	1738	1515	129	38	281403	6699
T44	East Oakwood Lake Trib 2	2001	10	19455	436715	421830	23	74	1738	1321	112	33	281403	5844
T44	East Oakwood Lake Trib 2	2002	4	16861	646117	624094	34	110	1507	1955	166	49	243882	8646
T44	East Oakwood Lake Trib 2	2002	5	23733	1084433	1057857	78	543	2819	3353	263	93	290783	11117
T44	East Oakwood Lake Trib 2	2002	6	19455	705544	681495	37	120	1738	2135	181	53	281403	9441
T44	East Oakwood Lake Trib 2	2002	7	20104	529749	511693	28	90	1796	1603	136	40	290783	7089
T44	East Oakwood Lake Trib 2	2002	8	20104	804223	776810	43	137	1796	2433	206	61	290783	10762
T44	East Oakwood Lake Trib 2	2002	9	25418	1222678	1198613	100	816	3418	3822	288	111	281403	10606
T44	East Oakwood Lake Trib 2	2002	10	27233	1239094	1218564	109	960	3929	3900	286	117	281403	9488

** flux runs done for T48 but not displayed here due to data reliability (T48 very poor stage discharge relationship)


Site	Stream	Year	Month	SuspSol	TotSol	DisSol	NO2NO3	NH3N	Orgntr	TKN	Tot PO4	TotDis		
												PO4	Fecal	DO
T45	East Oakwood Lake Outlet 1	2001	5	11059	577865	565721	156	137	859	999	185	146	880700	4032
T45	East Oakwood Lake Outlet 1	2001	6	110593	6498820	6362242	1558	1543	9665	11235	2080	1637	8807400	40324
T45	East Oakwood Lake Outlet 1	2001	7	114279	6684622	6544139	1610	1587	9941	11557	2140	1684	9101000	41668
T45	East Oakwood Lake Outlet 1	2001	8	104666	3808391	3726997	1458	888	5658	6562	1179	923	8247800	38295
T45	East Oakwood Lake Outlet 1	2001	9	14464	1924806	1872717	32	316	2819	3142	276	172	275700	6590
T45	East Oakwood Lake Outlet 1	2001	10	14464	1677202	1631813	32	276	2456	2738	240	150	275700	6590
T45	East Oakwood Lake Outlet 1	2002	4	12535	800987	779310	27	132	1173	1307	115	72	238900	5711
T45	East Oakwood Lake Outlet 1	2002	5	56602	1985392	1938281	694	406	2932	3346	478	355	3982000	21428
T45	East Oakwood Lake Outlet 1	2002	6	14464	1466292	1426611	32	241	2147	2393	210	131	275700	6590
T45	East Oakwood Lake Outlet 1	2002	7	15428	35756	34789	34	6	52	58	5	3	284900	6809
T45	East Oakwood Lake Outlet 1	2002	8	14946	150183	146118	33	25	220	245	22	13	284900	6809
T45	East Oakwood Lake Outlet 1	2002	9	14464	106838	103947	32	18	156	174	15	10	275700	6590
T45	East Oakwood Lake Outlet 1	2002	10	14464	163438	159015	32	27	239	267	23	15	275700	6590
T46	East Oakwood Lake Outlet 2	2001	5	16438	350958	346653	267	122	828	942	215	144	2517800	3901
T46	East Oakwood Lake Outlet 2	2001	6	164379	3800671	3754047	2892	1320	8964	10198	2333	1558	27265900	42247
T46	East Oakwood Lake Outlet 2	2001	7	169858	2896103	2860575	2204	1006	6831	7771	1777	1187	20776600	32192
T46	East Oakwood Lake Outlet 2	2001	8	169858	1766716	1745044	1344	614	4167	4740	1084	724	12674400	19638
T46	East Oakwood Lake Outlet 2	2001	9	33568	1248241	1201978	90	195	1433	1628	185	117	508600	16883
T46	East Oakwood Lake Outlet 2	2001	10	33568	727244	700290	52	114	835	949	108	68	296300	9837
T46	East Oakwood Lake Outlet 2	2002	4	90137	1208288	1177409	473	296	2066	2349	440	290	4286300	14992
T46	East Oakwood Lake Outlet 2	2002	5	143696	1622196	1594668	1022	505	3454	3928	852	568	9555900	18773
T46	East Oakwood Lake Outlet 2	2002	6	51009	1315516	1270770	206	236	1706	1939	270	174	1630500	17403
T46	East Oakwood Lake Outlet 2	2002	7	34687	86706	83492	6	14	100	113	13	8	35300	1173
T46	East Oakwood Lake Outlet 2	2002	8	34687	79501	76554	6	12	91	104	12	7	32400	1075
T46	East Oakwood Lake Outlet 2	2002	9	33568	0	0	0	0	0	0	0	0	0	0
T46	East Oakwood Lake Outlet 2	2002	10	33568	183634	176828	13	29	211	240	27	17	74800	2484

Appendix J.
Stage-Discharge Curves

Stage – Discharge Curves


T43

Stage	Discharge
0.12	0.278
0.2	0.627
0.31	0.855
0.52	2.21
0.75	1.283
0.75	4.764
1.12	9.966
1.23	6.983
1.34	7.961
1.9	19.818

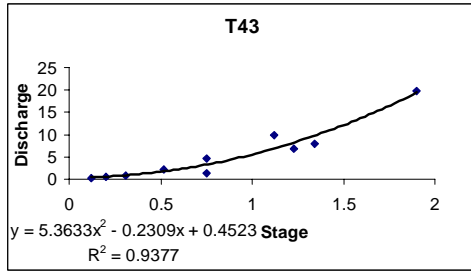


T44

Stage	Discharge
1.4	3.902
1.42	12.383
1.44	5.063
1.5	6.823
1.55	16.287
1.65	7.562
1.78	24.868
1.78	17.475
1.89	27.896
2.06	40.093

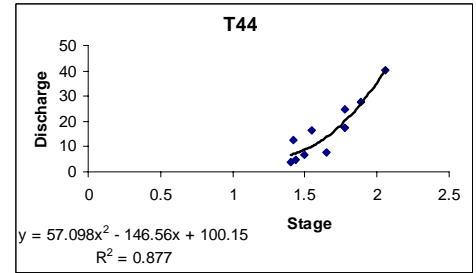


T45

Stage	Discharge
0.34	0.034
0.37	0.162
0.4488	0.305
0.78	9.952
0.82	18.765
0.93	23.014
1.22	36.128
1.38	39.065

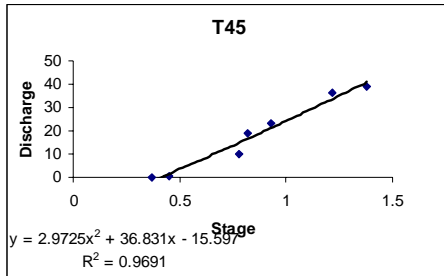


T46

Stage	Discharge
0.92	0.057
1.65	7.409
1.66	8.306
1.8	12.645
2.02	26.928
2.18	30.493
2.42	42.651
4.17	51.993
4.2	63.595
4.8	87.183

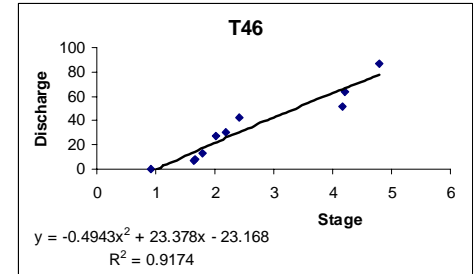

T48

Stage	Discharge
4.34	3.614
4.40	4.011
4.89	7.091
5.01	8.973
5.04	3.388
5.12	1.885
5.31	4.555
5.35	3.396
5.76	8.564

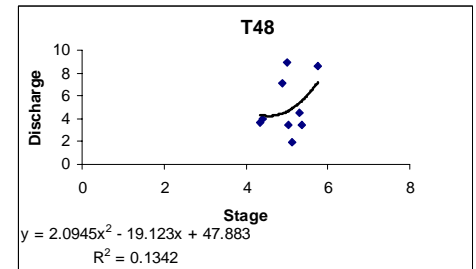

Equations used to Calculate Discharges

Stream Flow - Stage Relationships		
SiteID	Equation	R²
T43	$y = 5.3633x^2 - 0.2309x + 0.4523$	0.938
T44	$y = 57.098x^2 - 146.56x + 100.15$	0.877
T45	$y = 2.975x^2 + 36.831x - 15.597$	0.969
T46	$y = -0.4943x^2 + 23.378x - 23.168$	0.917
T48	$y = 2.0945x^2 - 19.123x + 47.883$	0.134

Appendix K.
Methodology of the AGNPS Feedlot Model

Feedlot Inventory for the North-Central Big Sioux River Watershed Assessment Project

** Note: The Oakwood Lakes Watershed is encompassed within the North-Central BSR Watershed Project and the feedlot inventory for both were done at the same time

1. Methodology

1.1. Introduction

Objectives outlined in the project summary were to document sources of non-point source pollution in the North-Central Big Sioux River Watershed to drive a watershed implementation project directed towards improving water quality. Preliminary water quality sampling suggested that impairments to the watershed were in the form of fecal coliform bacteria. Based on this information, the Brookings County Conservation District drove all township, county, state and interstate roads within the watershed boundaries to locate Animal Feeding Operations (AFO's) and other potential sources of impairments. Since the landuse was largely agricultural, efforts were focused towards un-regulated (AFO's) which could be a potential source of organic material and fecal coliform bacteria loading during runoff events.

During large rainfall events, (> 2 inches/24 hours), which is a common occurrence for the area, organic material and fecal coliform bacteria found in the water samples was thought to be the result of all three: confined operations, pastured livestock along stream corridors and manure application. During dry periods, loading from confined operations would be minimal as compared to the potential input from pastured livestock with access to streams and poorly placed manure applications. With this in mind, a key to distinguish between the loading potential of livestock confinement operations vs. pastured livestock and land based manure applications lay in the water quality samples with their respective rainfall data.

1.2. Watershed Delineation

The watershed map was formulated with a starting point of the watershed located North West of Watertown at the outlet of Lake Kampeska and an endpoint where the Big Sioux River intersected highway 14 between Brookings and Volga at the start of the Central Big Sioux River Watershed. Watershed boundaries were delineated using 1:42,000 topographic maps and ground truthing. East Dakota Water Development District further broke the watershed down into major watersheds for later analysis. Boundary lines were transferred to Arc-View, a computer based software program, to enable future compilation and manipulation of database information spatially (Figure 1). Other layers for the Arc-View database included: Digital Ortho-Quadrangles (DOQ's), Streams, Roads, Soils, Township Boundaries and Section lines. The watershed encompassed approximately 473,985 acres of predominantly agricultural land in Eastern South Dakota (See Figure 2).

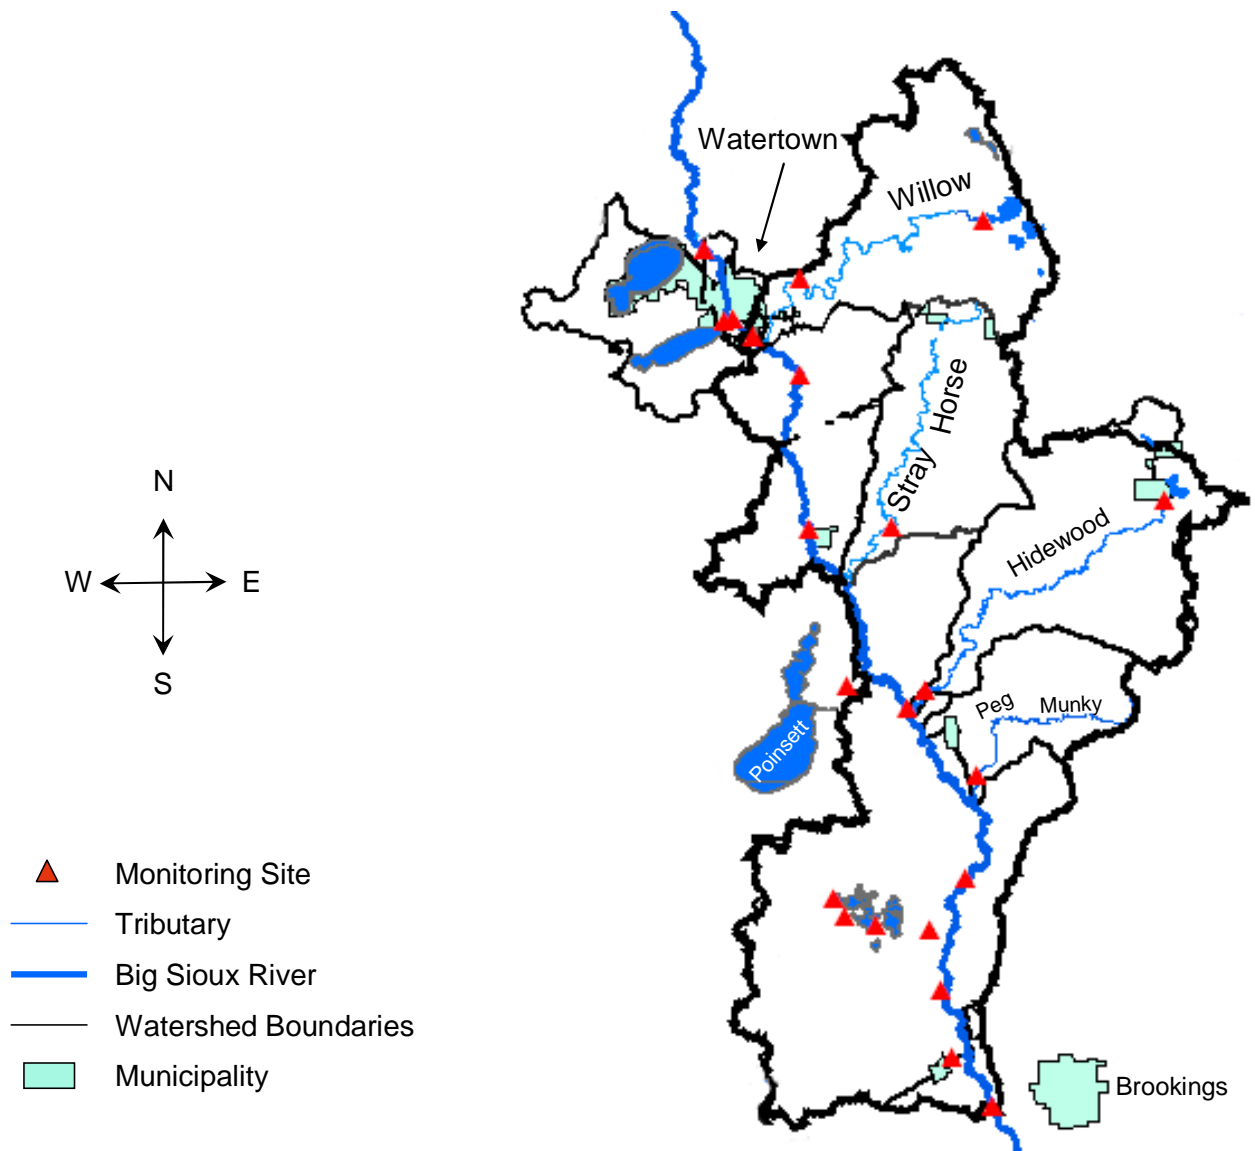


Figure 1. North-Central Big Sioux River Watershed Separated into Sub-watersheds

North Central and Central Big Sioux River Watershed Project Areas

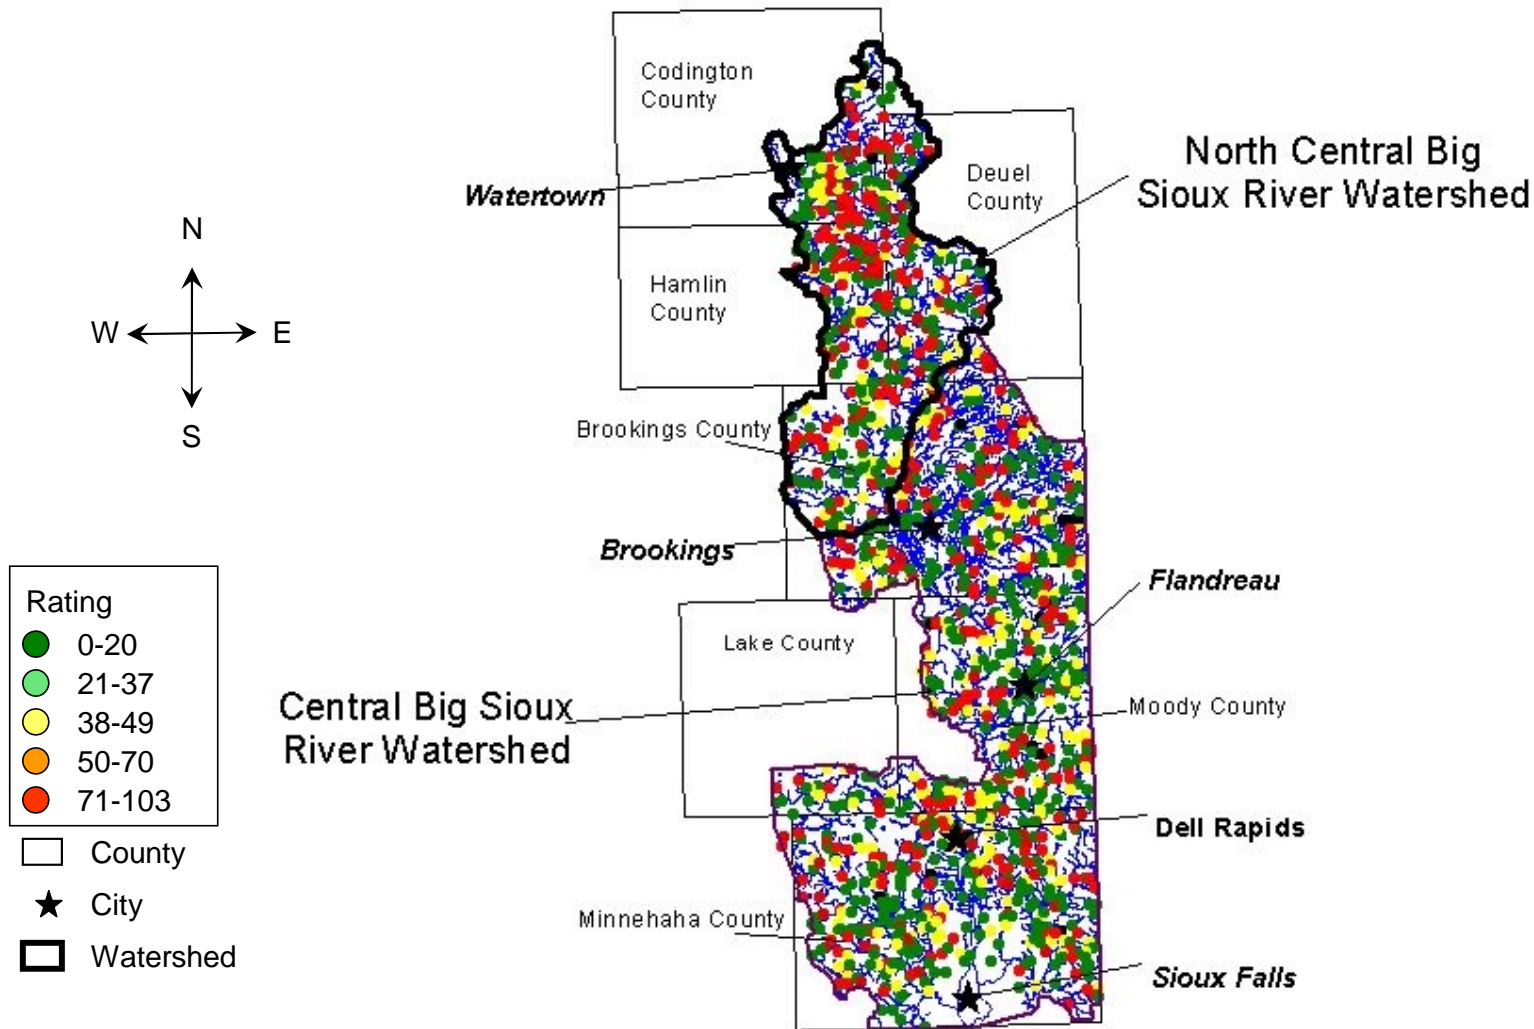


Figure 2. North-Central Big Sioux River Watershed Location Map

1.3. Feedlot Model

All livestock operations within watershed boundaries were highlighted on copies of the latest plat book directories for future contacts. Arc-View was then used to produce an enlarged image (usually on a 1:1,400 scale) of all highlighted operations from 2003 DOQ's that were donated to the project from the Natural Resource Conservation Service (NRCS). These enlarged photos would later serve as templates and data sheets for collection of the operations' information (Figure 3). Each producer was given a chance to volunteer information about their operation through direct visits, phone calls or letters left in their doors. If a producer was willing to volunteer information for the assessment, they were shown the DOQ printout and asked for data to satisfy inputs for Agricultural Non-Point Source (AGNPS) pollution model's feedlot module. Information collected from each producer is shown in (Table 1).



Figure 3. Digital Ortho-Quadrangles used for Operator Surveys

Feeding operations with potential for runoff were assessed using the AGNPS feedlot module. Operations confining <40 animal units (AU's) and exhibiting no potential for runoff were excluded from the model and simply marked on Arc-View as a green dot. There were a few operations confining <40 AU's that were included in the investigation only because they were located within a short distance from a major tributary or the Big Sioux River itself and exhibited a potential to have runoff occur. Any feeding operation with >40 AU's was modeled using AGNPS. Extra effort was made to contact and interview every producer with a livestock operation personally in the watershed in order to collect good

quality information. Gaining trust with producers and access to their operations made this possible. 371 operations were evaluated in the watershed for potential to contribute runoff to surface waters. Of the 371 operations, 297 animal feeding operations were assessed using AGNPS Feedlot Module. The remaining 74 operations did not rate high enough during a preliminary investigation to warrant an assessment. During our investigation, several of the operations visited fit the criteria for a Concentrated Animal Feeding Operation (CAFO). Large CAFO's that were permitted or had a waste system in place were inventoried, and labeled in the database, but were not subjected to the feedlot model itself. Most of the CAFO's had some type of waste storage system in place, and some had obtained coverage under the general permit. A portion of the operations believed to be CAFO's though did not have any waste storage or coverage under the general permit. A few of the operations assessed fit the definition of either small or medium CAFO's according to the South Dakota Department of Environment and Natural Resources Web site describing conditions.

Table 1. Information Collected From Each Producer

ID	Area	Acres	Animal	Number	Animal2	Number2	Code	Waste System	Months	Buffer	Buffer
1	10544.9	2.6	BEEF CATTLE	40		0	T1NDCK	NONE	0	0	
3	13461.9	3.3	BEEF CATTLE	180		0	T1NDCK	NONE	0	0	
4	8563.8	2.1	BEEF CATTLE	150		0	T1NDCK	NONE	0	0	
6	10335.7	2.6	BEEF CATTLE	100	DAIRY	50	T1NDCK	NONE	0	300	
7	3923.6	1.0	SOWS	120		0	T1NDCK	NONE	0	0	
9	8941.7	2.2	BEEF CATTLE	100		0	T1NDCK	NONE	0	0	
12	11324.7	2.8	BEEF CATTLE	80		0	T1NDCK	NONE	0	0	
16	24571.4	6.1	BEEF CATTLE	150		0	T1NDCK	NONE	0	0	
20	28591.4	7.1	BEEF CATTLE	200		0	T4SXMCK	NONE	12	50	PASTURE
21	22427.3	5.5	BEEF CATTLE	400		0	T3SXMCK	NONE	0	0	
21	18234.2	4.5	BEEF CATTLE	250		0	T3SXMCK	NONE	0	0	
22	16959.6	4.2	BEEF CATTLE	300		0	T3SXMCK	NONE	0	0	
26	12447.3	3.1	BUFFALO	50		0	T3SXMCK	NONE	0	450	
1000	10850.9	2.7	DAIRY CATTLE	120		0	T1NDCK	NONE	0	0	

1.4. Arc-View Model

Geographic Information Systems (GIS) ARC-View was then used to create a watershed distribution map of all operations with their respective information. Four shape files were created to handle the data from the assessments for each of the operations. The first shape file created was the Operator theme (Table 2). It contained location information as well as summary information that were added back to the theme table after the AGNPS feedlot module was run for all of the operations. The second shape file created was the Feedlot theme. It was used to capture the size and number of head each lot contained for each operation. The third shape file was the roof theme. It allowed us to measure the area of roof involved in adding water to the feedlot that AGNPS required as an input. The last shape file was the Watershed theme. This theme was used to digitize the area and landuse type that comprised the 2a and 3a areas that were also inputs needed in the AGNPS module (Figure 4).

Table 2. Table Used to Create the Operator Theme in ArcView

ID	Distance	LMU	Code	PO4 (ppm)	COD (ppm)	PO4 (lbs)	COD (lbs)	SURFACER	GROUNDNR	CAFO
1	16295.4	1	T1NDCK	13.0	689.7	37.5	1987.5	39	1	NO
2	15896.2	1	T1NDCK	18.4	974.0	153.3	8113.1	60	1	NO
3	15656.0	1	T1NDCK	46.0	2432.4	187.2	9909.4	61	1	NO
4	14799.1	1	T1NDCK	60.1	3184.0	140.5	7436.1	56	1	NO
5	11833.9	1	T1NDCK	85.0	4500.0	135.8	7189.3	54	1	NO
6	9110.4	1	T1NDCK	19.2	1214.6	57.0	3609.4	47	1	NO
7	8315.9	1	T1NDCK	28.4	946.4	31.8	1061.2	29	2	NO
8	10646.6	3	T3SXMK	11.4	590.0	123.9	6436.9	58	1	NO
9	4404.9	1	T1NDCK	57.7	3054.3	131.5	6959.7	55	1	NO
10	21366.8	2	T2NDCK	8.9	1412.8	11.2	1786.0	36	3	NO
11	21896.0	2	T2NDCK	85.0	4500.0	248.7	13163.7	264	2	NO
12	20032.4	2	T2NDCK	36.4	1928.6	132.2	7000.0	56	2	NO
13	19321.8	2	T2NDCK	2.7	430.4	15.3	2429.0	43	2	NO
14	18128.7	2	T2NDCK	54.8	2900.7	209.4	11077.1	62	2	NO
15	18175.1	2	T2NDCK	51.2	2692.8	194.1	10210.1	61	2	NO
16	22194.9	2	T2NDCK	9.9	463.9	55.1	2571.3	44	1	NO

ArcView Image of Digitized Feedlots



Figure 4. ArcView Image of Digitized Feedlots

Figure 5 shows a simple drawing that illustrates the basic interactions that needed to be taken in consideration when gathering information for the AGNPS feedlot module (USDA AGNPS Feedlot

Manual). After digitizing each operation for the operator location; feedlot locations and size; roof area; watershed landuse and size; all required inputs were satisfied for the AGNPS feedlot module.

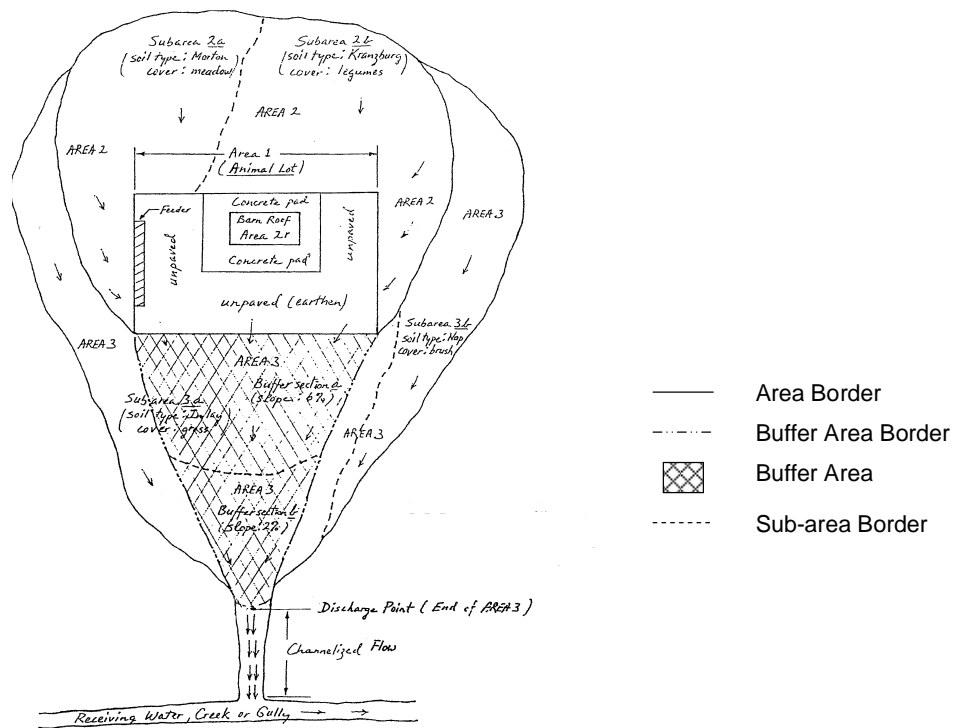


Figure 5. Example of an Animal Lot with Surrounding Watershed


1.5. Combining Arc-View and the AGNPS Feedlot Module

Data was then entered separately for each operation from the Arc-View themes into the AGNPS feedlot module. The module was run to simulate a 25 year 24 hour rainstorm event that was currently a requirement of the general permit for construction of waste storage facilities. Some of the inputs were indexes, so they were standardized to simplify data entry with the thinking that differences in the output would be caused by interactions taking place for each operation's unique situation. After all of the operations were run through AGNPS, the output data was entered back into the operator theme to allow a means of differentiating between feeding operations with a high potential to have runoff from those with little or no potential. AGNPS surface ratings for runoff potential ranged from 0 – 103 for the facilities assessed. AGNPS Phosphorus loading potentials ranged from 0.0 lbs. – 1,513 lbs. for any single animal feeding operation. By using Arc-View, a watershed map could easily be made with feedlots geo-referenced and categorized by a graduated color scheme representing various potential to have runoff occurring. Operations exhibiting low potential were color coded green while intermediate potential sites were given a light green or yellow color. Medium high to high potential operations were color coded orange and red (Figure 2). By coding each operation with a unique value representative of the monitoring site that it eventually flowed to allowed us to count the number of feedlots in a particular sub-watershed and compare it to water quality data from that point. Depending on runoff potentials of the feedlots affecting any monitoring site, we were able to make a prediction of which sites should exhibit good or poor water quality downstream.

The joining of the AGNPS feedlot module and GIS feedlot databases created a comprehensive watershed model that could simulate various scenarios in order to better predict interactions taking place in the watershed. Managers could use the model as a tool to test “what if” circumstances and make changes to get more desirable outcomes. While working with producers during the implementation phase, simulations could be run to see what effects one might achieve by planning for certain practices (e.g. filters, sediment basins or complete waste management systems). Implementation of best management practices in high pollution potential areas could be the key to improving water quality in the North Central Big Sioux River Watershed.

Appendix L.
Bathymetric Map of Lakes

L-1

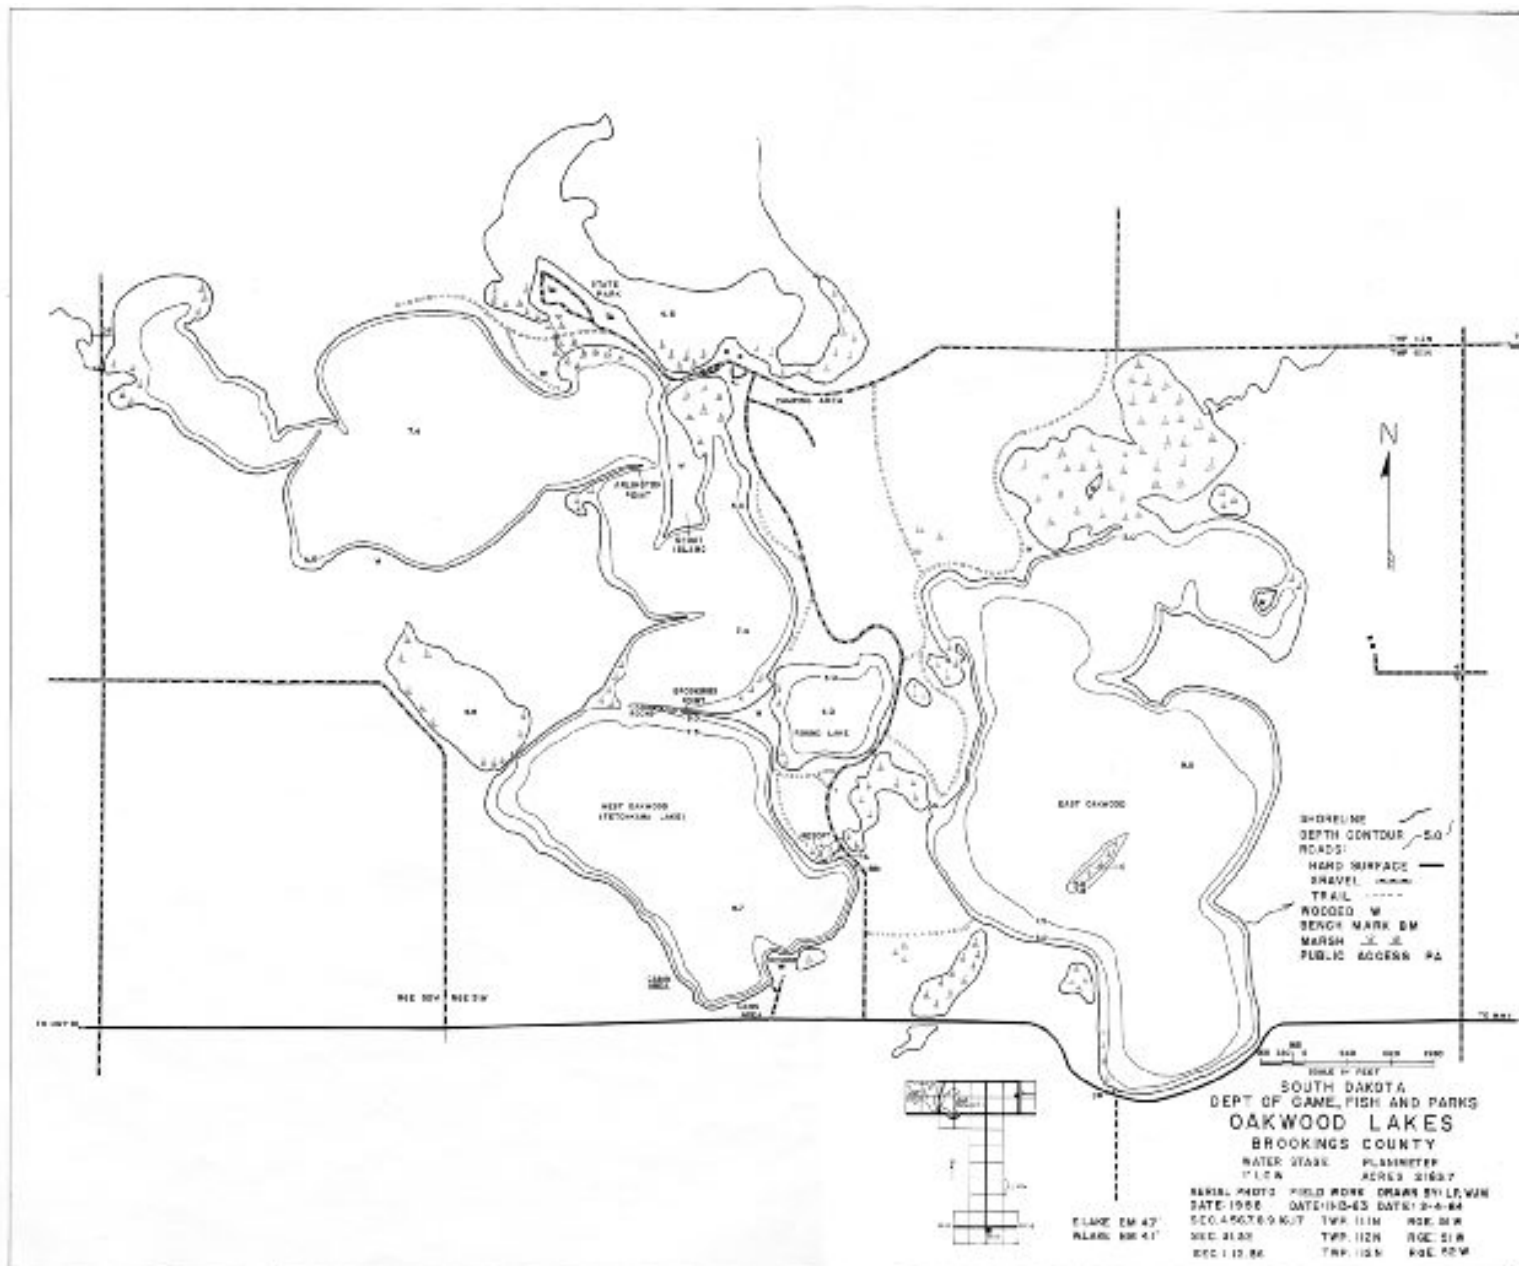

**Appendix M.
Macroinvertebrate Core Metric
Results**

Metric 1			Metric 2		Metric 3		Metric 4		Metric 5	
StationID	c.f.	Abundance	StationID	Taxa Richness	StationID	EPT Taxa	StationID	Diptera Taxa	StationID	% EPT
T44	3.43	299	T44	15	T44	3	T44	5	T44	5.35
T45	7.2	276	T45	15	T45	2	T45	6	T45	3.26
T46	1.24	280	T46	16	T46	2	T46	5	T46	1.43
T48	6.86	314	T48	15	T48	3	T48	4	T48	7.64

Metric 6		Metric 7		Metric 8		Metric 9 (% Sediment Tolerant - Partial)			
StationID	% Diptera	StationID	% Chironomidae	StationID	% Tolerant Organisms	StationID	% Chiro	% Oligo	% Chironomidae + Oligochaeta
T44	87.96	T44	87.63	T44	97.66	T44	87.6	1.0	88.6
T45	55.43	T45	54.35	T45	98.19	T45	54.3	1.1	55.4
T46	40.36	T46	33.93	T46	87.86	T46	33.9	50.7	84.6
T48	44.90	T48	44.27	T48	98.41	T48	44.3	0.3	44.6

Metric 10		Metric 11		Metric 12		Metric 13	
StationID	% Hydropsychidae / Trichoptera	StationID	% Gatherers	StationID	% Filterers	StationID	% Clingers
T44	100.00	T44	20.40	T44	72.91	T44	0.67
T45	100.00	T45	71.01	T45	5.80	T45	0.36
T46	0.00	T46	56.79	T46	20.36	T46	3.57
T48	16.67	T48	50.32	T48	41.72	T48	1.91

**Appendix N.
Algae Species by Lake**

Johnson Lake

Flagellated	Blue-Green	Diatoms	Non-Motile Green Algae	Unidentified
<i>Ceratium hirundinella</i>	<i>Anabaena subcylindrica</i>	<i>Cyclotella meneghiniana</i>	<i>Actinastrum hantzschii</i>	Unidentified algae
<i>Chrysochromulina parva</i>	<i>Aphanocapsa</i> sp.	<i>Melosira granulata</i>	<i>Ankistrodesmus</i> sp.	
<i>Cryptomonas</i> sp.	<i>Cylindrospermum</i> sp.	<i>Nitzschia acicularis</i>	<i>Chlorella ellipsoidea</i>	
<i>Euglena</i> sp.	<i>Cylindrospermum minutissimum</i>	<i>Nitzschia paleacea</i>	<i>Closteriopsis</i> sp.	
<i>Glenodinium gymnodinium</i>	<i>Dactylococcopsis</i>	<i>Nitzschia reversa</i>	<i>Closterium aciculare</i>	
<i>Peridinium divergens</i>	<i>Gomphosphaeria</i> sp.	<i>Nitzschia</i> sp.	<i>Closterium</i> sp.	
<i>Phacotus lenticularis</i>	<i>Lyngbya contorta</i>	<i>Rhizosolenia eriensis</i>	<i>Coelastrum</i> sp.	
<i>Rhodomonas minuta</i>	<i>Lyngbya limnetica</i>	<i>Stephanodiscus hantzschii</i>	<i>Dictyosphaerium pulchellum</i>	
<i>Trachelomonas</i> sp.	<i>Marssoniella elegans</i>	<i>Stephanodiscus minutus</i>	<i>Golenkinia radiata</i>	
Unidentified flagellates	<i>Merismopedia tenuissima</i>	<i>Synedra acus</i>	<i>Kirchneriella</i>	
	<i>Microcystis</i> sp.		<i>Oocystis</i> sp.	
	<i>Oscillatoria agardhii</i>		<i>Pediastrum duplex</i>	
	<i>Phormidium</i>		<i>Quadrigula</i> sp.	
			<i>Scenedesmus</i> sp.	
			<i>Scenedesmus acuminatus</i>	
			<i>Scenedesmus dimorphus</i>	
			<i>Scenedesmus quadricauda</i>	
			<i>Selenastrum</i> sp.	
			<i>Selenastrum minutum</i>	
			<i>Sphaerocystis Schroeteri</i>	

Note: shaded species are considered noxious/nuisance

Lake Tetonkaha

Flagellated	Blue-Green	Diatoms	Non-Motile Green Algae	Unidentified
<i>Carteria</i> sp.	<i>Anabaena subcylindrica</i>	<i>Cyclotella meneghiniana</i>	<i>Actinastrum hantzschii</i>	Unidentified algae
<i>Ceratium hirundinella</i>	<i>Aphanocapsa</i> sp.	<i>Melosira granulata</i>	<i>Ankistrodesmus</i> sp.	
<i>Chlamydomonas</i> sp.	<i>Cylindrospermum minutissimum</i>	<i>Nitzschia reversa</i>	<i>Closteriopsis</i> sp.	
<i>Chrysochromulina parva</i>	<i>Dactylococcopsis</i>	<i>Nitzschia</i>	<i>Closterium</i>	
<i>Cryptomonas</i> sp.	<i>Gomphosphaeria</i>	<i>Rhizosolenia eriensis</i>	<i>Dictyosphaerium pulchellum</i>	
<i>Euglena</i> sp.	<i>Lyngbya contorta</i>	<i>Stephanodiscus hantzschii</i>	<i>Kirchneriella</i> sp.	
<i>Glenodinium gymnodinium</i>	<i>Lyngbya limnetica</i>	<i>Stephanodiscus minutus</i>	<i>Nephrocytium</i> sp.	
<i>Glenodinium</i> sp.	<i>Marssoniella elegans</i>	<i>Synedra acus</i>	<i>Oocystis</i> sp.	
<i>Phacotus lenticularis</i>	<i>Merismopedia tenuissima</i>		<i>Oocystis parva</i>	
<i>Rhodomonas minuta</i>	<i>Microcystis</i> sp.		<i>Pediastrum duplex</i>	
<i>Trachelomonas</i> sp.	<i>Oscillatoria agardhii</i>		<i>Quadrigula</i> sp.	
Unidentified flagellates	<i>Phormidium</i> sp.		<i>Scenedesmus acuminatus</i>	
			<i>Scenedesmus dimorphus</i>	
			<i>Scenedesmus quadricauda</i>	
			<i>Sphaerocystis schroeteri</i>	

Note: shaded species are considered noxious/nuisance

East Oakwood Lake

Flagellated	Blue-Green	Diatoms	Non-Motile Green Algae	Unidentified
<i>Carteria</i> sp.	<i>Anabaena circinalis</i>	<i>Cyclotella meneghiniana</i>	<i>Actinastrum hantzschii</i>	Unidentified algae
<i>Chlamydomonas</i> sp.	<i>Anabaena subcylindrica</i>	<i>Melosira granulata</i>	<i>Ankistrodesmus</i> sp.	
<i>Chrysochromulina parva</i>	<i>Anabaenopsis</i> sp.	<i>Nitzschia</i> sp.	<i>Coelastrum</i> sp.	
<i>Cryptomonas</i> sp.	<i>Aphanocapsa</i> sp.	<i>Nitzschia acicularis</i>	<i>Dichotomococcus</i> sp.	
<i>Dinobryon sociale</i>	<i>Cylindrospermum minutissimum</i>	<i>Nitzschia paleacea</i>	<i>Dictyosphaerium pulchellum</i>	
<i>Euglena</i> sp.	<i>Dactylococcopsis</i> sp.	<i>Nitzschia</i> #2	<i>Elakatothrix</i> sp.	
<i>Glenodinium gymnodinium</i>	<i>Gomphosphaeria</i> sp.	<i>Rhizosolenia eriensis</i>	<i>Golenkinia</i> sp.	
<i>Mallomonas</i> sp.	<i>Lyngbya contorta</i>	<i>Stephanodiscus minutus</i>	<i>Kirchneriella</i> sp.	
<i>Phacus pseudonordstedtii</i>	<i>Lyngbya limnetica</i>	<i>Synedra radians</i>	<i>Lagerheimia</i> sp.	
<i>Rhodomonas minuta</i>	<i>Marssoniella elegans</i>		<i>Oocystis</i> sp.	
<i>Trachelomonas</i> sp.	<i>Merismopedia</i> sp.		<i>Pediastrum boryanum</i>	
Unidentified flagellates	<i>Merismopedia tenuissima</i>		<i>Pediastrum duplex</i>	
	<i>Microcystis</i> sp.		<i>Quadrigula</i> sp.	
	<i>Microcystis aeruginosa</i>		<i>Scenedesmus acuminatus</i>	
	<i>Oscillatoria agardhii</i>		<i>Scenedesmus dimorphus</i>	
	<i>Oscillatoria angusta</i>		<i>Scenedesmus quadricauda</i>	
	<i>Oscillatoria limnetica</i>		<i>Selenastrum gracile</i>	
	<i>Phormidium</i> sp.		<i>Tetraedron</i> sp.	
			<i>Treubaria</i> sp.	

Note: shaded species are considered noxious/nuisance

**Appendix O.
Modeled Percent Reductions in Nutrients
After BMP Application**

Oakwood Area Cells (top 5%) Achievable Reductions With No Tillage and Feedlot Removal

Cell	Reach	Area	% of total	Original P04 (lb/ac/yr)	BMP Scenarios				Difference between Present P04 and applied BMPs			
					No Till	No Feedlot	No Impound	All Grass	no till difference	no feedlot difference	no impound difference	all grass difference
2622	262	14.01	0.45	1.92	0.75	1.90	2.50	0.09	1.17	0.02	-0.58	1.83
3053	305	87.62	0.37	1.60	0.68	1.58	2.14	0.76	0.92	0.02	-0.54	0.84
2743	274	4.67	0.59	2.54	1.63	2.52	3.02	2.12	0.91	0.02	-0.48	0.42
2583	258	16.01	0.36	1.52	0.96	1.52	1.80	0.58	0.57	0.00	-0.28	0.95
2642	264	2.67	0.26	1.11	0.56	1.10	1.42	0.07	0.55	0.01	-0.32	1.03
6111	611	74.95	0.32	1.39	0.85	1.38	1.66	0.57	0.54	0.01	-0.28	0.82
3842	384	25.80	1.47	6.30	5.76	6.28	8.25	5.17	0.54	0.01	-1.95	1.13
3793	379	28.91	1.42	6.10	5.57	6.08	8.17	5.16	0.53	0.02	-2.07	0.94
3763	376	56.71	0.24	1.04	0.54	1.03	1.75	0.06	0.50	0.02	-0.71	0.98
2733	273	90.29	0.25	1.07	0.59	1.05	1.48	0.42	0.48	0.02	-0.41	0.65
2523	252	2.89	0.49	2.08	1.62	2.08	2.19	1.96	0.46	0.00	-0.11	0.13
2613	261	3.11	0.21	0.91	0.46	0.90	1.16	0.07	0.46	0.01	-0.25	0.84
6222	622	101.63	0.22	0.94	0.49	0.93	1.13	0.21	0.45	0.00	-0.19	0.73
3553	355	8.01	0.20	0.85	0.40	0.84	1.04	0.08	0.45	0.02	-0.18	0.77
3052	305	46.93	0.19	0.83	0.38	0.82	1.10	0.04	0.45	0.01	-0.26	0.79
2953	295	39.14	0.22	0.93	0.49	0.88	1.26	0.08	0.44	0.05	-0.33	0.85
2683	268	28.69	0.34	1.45	1.03	1.45	1.69	0.85	0.42	0.00	-0.24	0.60
6213	621	80.95	0.22	0.92	0.52	0.92	1.10	0.21	0.40	0.01	-0.18	0.72
2712	271	35.14	0.40	1.70	1.32	1.69	2.09	1.76	0.38	0.01	-0.39	-0.05
3062	306	134.33	0.20	0.86	0.49	0.86	1.09	0.07	0.37	0.01	-0.23	0.79
5633	563	11.34	1.19	5.10	4.75	5.09	8.16	4.05	0.36	0.02	-3.06	1.05
3663	366	21.79	0.19	0.80	0.45	0.79	1.38	0.06	0.35	0.01	-0.58	0.75
4613	461	21.57	0.18	0.77	0.43	0.75	1.37	0.06	0.35	0.02	-0.60	0.71
3273	327	34.25	0.37	1.60	1.26	1.59	3.13	0.85	0.34	0.02	-1.53	0.76
6071	607	101.86	0.22	0.96	0.63	0.96	1.42	0.44	0.33	0.01	-0.46	0.53
5613	561	23.13	0.42	1.80	1.48	1.79	2.77	0.98	0.33	0.01	-0.97	0.82
6113	611	148.56	0.18	0.76	0.44	0.75	0.98	0.07	0.32	0.01	-0.22	0.69
2862	286	10.90	0.17	0.72	0.40	0.71	0.89	0.17	0.32	0.01	-0.17	0.55
4692	469	4.23	0.25	1.05	0.74	1.04	1.56	0.62	0.32	0.01	-0.51	0.44
2491	249	76.50	0.18	0.79	0.47	0.78	0.83	0.07	0.31	0.00	-0.04	0.72
6013	601	85.62	0.21	0.92	0.61	0.91	1.36	0.41	0.31	0.01	-0.44	0.51
5632	563	15.57	1.17	5.01	4.71	5.00	7.94	4.05	0.30	0.02	-2.93	0.97
3773	377	50.04	0.16	0.70	0.40	0.69	1.21	0.07	0.30	0.01	-0.50	0.64
5563	556	49.82	0.19	0.82	0.52	0.81	1.20	0.09	0.30	0.01	-0.37	0.73
5943	594	20.91	0.20	0.85	0.55	0.84	1.34	0.36	0.30	0.01	-0.49	0.49
2863	286	10.90	0.16	0.70	0.40	0.69	0.86	0.17	0.30	0.01	-0.16	0.53
5643	564	1.11	1.14	4.88	4.58	4.87	7.66	4.04	0.30	0.01	-2.78	0.84
5582	558	72.95	0.20	0.85	0.56	0.85	1.35	0.36	0.30	0.01	-0.50	0.50
2522	252	3.56	0.18	0.75	0.46	0.75	0.79	0.15	0.30	0.00	-0.04	0.60
2952	295	178.80	0.14	0.59	0.29	0.57	0.78	0.29	0.29	0.02	-0.19	0.29
3662	366	31.58	0.16	0.70	0.40	0.68	1.19	0.06	0.29	0.01	-0.50	0.64
2612	261	19.13	0.16	0.68	0.39	0.67	0.84	0.07	0.29	0.00	-0.16	0.61
2551	255	80.06	0.17	0.74	0.46	0.74	0.78	0.07	0.29	0.00	-0.04	0.67
4603	460	96.74	0.15	0.65	0.37	0.64	1.18	0.06	0.28	0.02	-0.53	0.60
3173	317	138.33	0.30	1.30	1.03	1.30	1.85	1.28	0.28	0.00	-0.54	0.02
4191	419	78.73	0.15	0.639	0.366	0.633	0.778	0.059	0.27	0.01	-0.14	0.58
3703	370	125.21	0.22	0.927	0.656	0.919	1.502	0.528	0.27	0.01	-0.58	0.40
4623	462	6	0.19	0.805	0.54	0.798	1.217	0.417	0.27	0.01	-0.41	0.39
4653	465	23.13	0.18	0.783	0.53	0.777	1.179	0.433	0.2530	0.01	-0.40	0.35
4732	473	40.25	0.18	0.77	0.51	0.74	1.46	0.05	0.25	0.02	-0.70	0.72
4902	490	4.45	0.13	0.541	0.32	0.529	0.952	0.052	0.22	0.012	-0.41	0.49
5432	543	83.4	0.16	0.672	0.466	0.66	1.264	0.048	0.21	0.012	-0.59	0.62
5103	510	2.45	0.13	0.56	0.38	0.54	1.48	0.04	0.18	0.02	-0.92	0.53
2951	295	79.17	0.11	0.45	0.27	0.44	0.58	0.20	0.18	0.01	-0.13	0.25
4742	474	31.36	0.14	0.61	0.44	0.60	1.17	0.05	0.17	0.02	-0.55	0.57
4332	433	181.47	0.14	0.59	0.431	0.578	1.013	0.048	0.16	0.012	-0.42	0.54
4643	464	38.70	0.31	1.31	1.17	1.29	2.17	0.34	0.14	0.02	-0.86	0.97
5583	558	42.92	0.39	1.65	1.53	1.64	2.61	1.18	0.13	0.01	-0.96	0.47
2961	296	90.07	0.11	0.46	0.35	0.45	0.59	0.06	0.12	0.01	-0.12	0.41
4873	487	226.4	0.11	0.492	0.384	0.48	0.919	0.045	0.11	0.012	-0.43	0.45
2963	296	97.41	0.11	0.48	0.53	0.46	0.60	0.06	-0.06	0.01	-0.12	0.42
2713	271	18.24	0.27	1.14	1.28	1.12	1.52	0.07	-0.14	0.02	-0.38	1.07
5391	539	75.17	1.19	5.08	5.25	5.07	7.66	5.79	-0.17	0.02	-2.57	-0.71
3323	332	5.78	1.41	6.04	6.21	6.02	7.07	6.83	-0.18	0.02	-1.03	-0.80
3332	333	15.57	1.62	6.93	7.11	6.91	7.94	7.77	-0.18	0.02	-1.01	-0.84
5362	536	13.34	1.01	4.31	4.52	4.29	6.55	5.25	-0.21	0.02	-2.24	-0.94

5032	503	33.58	1.12	4.78	4.99	4.76	7.13	5.77	-0.21	0.02	-2.35	-0.98
4992	499	9.12	1.01	4.33	4.54	4.30	6.68	5.28	-0.21	0.02	-2.36	-0.96
4043	404	44.48	1.00	4.29	4.51	4.28	6.98	4.82	-0.22	0.01	-2.69	-0.53
4912	491	21.13	1.08	4.63	4.86	4.61	6.68	5.59	-0.23	0.02	-2.05	-0.96
5182	518	54.93	0.80	3.42	3.66	3.40	6.66	4.27	-0.24	0.02	-3.24	-0.85
4032	403	37.36	1.20	5.13	5.39	5.12	7.38	5.76	-0.26	0.02	-2.25	-0.63
4413	441	29.80	1.29	5.52	5.79	5.50	8.33	3.91	-0.27	0.02	-2.81	1.61
3832	383	17.12	0.99	4.25	4.53	4.24	6.36	4.61	-0.28	0.01	-2.11	-0.36
3843	384	11.56	1.00	4.29	4.56	4.27	6.42	4.65	-0.28	0.01	-2.13	-0.37
3992	399	8.67	0.99	4.26	4.54	4.24	6.38	4.62	-0.28	0.01	-2.12	-0.37
3802	380	16.68	0.99	4.25	4.53	4.24	6.36	4.62	-0.28	0.01	-2.11	-0.37
3803	380	28.02	0.99	4.22	4.50	4.20	6.30	4.58	-0.28	0.02	-2.08	-0.36
3592	359	0.89	1.03	4.40	4.69	4.38	6.58	4.81	-0.30	0.02	-2.18	-0.41
5663	566	34.03	1.02	4.36	4.76	4.34	6.78	5.00	-0.40	0.02	-2.42	-0.64
2603	260	1.11	1.07	4.59	5.06	4.52	6.41	5.94	-0.47	0.07	-1.82	-1.35
5492	549	0.89	0.65	2.80	3.33	2.73	5.18	3.69	-0.52	0.07	-2.37	-0.89
3333	333	11.79	6.65	28.47	30.31	28.20	35.90	33.22	-1.84	0.27	-7.43	-4.75

Note: Red Bolded Cells Contain Feedlots

Blue highlight - top 5% (PO4 load) cells in that category
units are lbs/acre/year

Appendix P.
BATHTUB Variables and Description

Variable	Units	Explanation
Total P (ppb)	mg/m ³	Pool Mean Phosphorus Concentration
Total N (ppb)	mg/m ³	Pool Mean Nitrogen Concentration
Chl-A (ppb)	mg/m ³	Pool Mean Chlorophyll a Concentration
Secchi (m)	m	Pool Mean Chlorophyll a Concentration
Organic N (ppb)	mg/m ³	Pool Mean Organic Nitrogen Concentration
Antilog PC-1	----	First principal component of reservoir response. Measure of nutrient supply. < 50 = Low Nutrient Supply and Low Eutrophication potential > 500 = High nutrient supply and High Eutrophication potential
Antilog PC-2	----	Second principal component of reservoir response variables. Nutrient association with organic vs. inorganic forms; related to light-limited areal productivity. Low: PC-2 < 4 = Turbidity dominated, light-limited, low nutrient response. High: PC-2 > 10 = Algae-dominated, light unimportant, high nutrient response.
(N-150)/P	----	(Total N - 150)/ Total P ratio. Indicator of limiting nutrient. Low: (N-150)/P < 10-12 nitrogen limited High: (N-150)/P > 12-15 phosphorus limited
Inorganic N/P	---	Inorganic nitrogen / Ortho-phosphorus ratio. Indicator of limiting nutrient Low : N/P < 7-10 Nitrogen limited High: N/P > 7-10 Phosphorus limited
Freq (Chl-a >10) %	---	Algal nuisance frequencies or bloom frequencies. Estimated from mean chlorophyll a. Percent of time during growing season that Chl a exceeds 10, 20, 30, 40, 50, or 60 ppb Related to risk or frequency of use impairment.
TSI	----	Trophic State Indices (Carlson 1977) Calculated from Phosphorus, Chlorophyll a, and Secchi Depths TSI < 40 Oligotrophic 41 < TSI < 50 Mesotrophic 51 < TSI < 70 Eutrophic TSI > 70 Hypereutrophic

**Appendix Q.
TMDL – East Oakwood Lake
(Trophic State Index)**

**TOTAL MAXIMUM DAILY LOAD EVALUATION
TSI Impairment**

for

East Oakwood Lake

(HUC 10170202)

Brookings County, South Dakota

**East Dakota Water Development District
Brookings, South Dakota**

December 2005

East Oakwood Lake Total Maximum Daily Load

Waterbody Type:	Lake
Assessment Unit ID:	SD-BS-L-E_Oakwood_01
303(d) Listing Parameter:	TSI Impairment
Designated Uses:	Warmwater Semi-permanent Fish Life Propagation Immersion Recreation Limited Contact Recreation Fish and Wildlife Propagation, Recreation and Stock Watering
Size of Waterbody:	1,000 acres
Size of Watershed:	14,128 acres
Water Quality Standards:	Narrative and Numeric
Indicators:	Water Chemistry
Analytical Approach:	Models including AnnAGNPS and BATHTUB
Location:	HUC Code: 10170202
Goal (BATHTUB based):	67 percent reduction in Total Phosphorus (2,164 kg/yr) By reducing total phosphorus, pH levels will improve
Target (BATHTUB based):	≤ 63.4 (median of Secchi depth and chlorophyll-a TSI) 1,178.6 kg/yr Total Phosphorus ≥ 6.5 to ≤ 9.0 pH units per grab sample

Objective

The intent of this summary is to clearly identify the components of the TMDL submittal to support adequate public participation and facilitate the US Environmental Protection Agency (EPA) review and approval. The TMDL was developed in accordance with Section 303(d) of the federal Clean Water Act and guidance developed by EPA.

Introduction

East Oakwood Lake is a 1,000-acre natural lake with a watershed of approximately 14,128 acres. This lake is located within the Big Sioux River Basin (HUC 10170202) in northwestern Brookings County, South Dakota.

This lake is included as part of the North-Central Big Sioux River Watershed Assessment Project. The entire study area for this project is outlined in Figure 1. The watershed of this lake lies within Brookings County as shown by the shaded region in Figure 2.

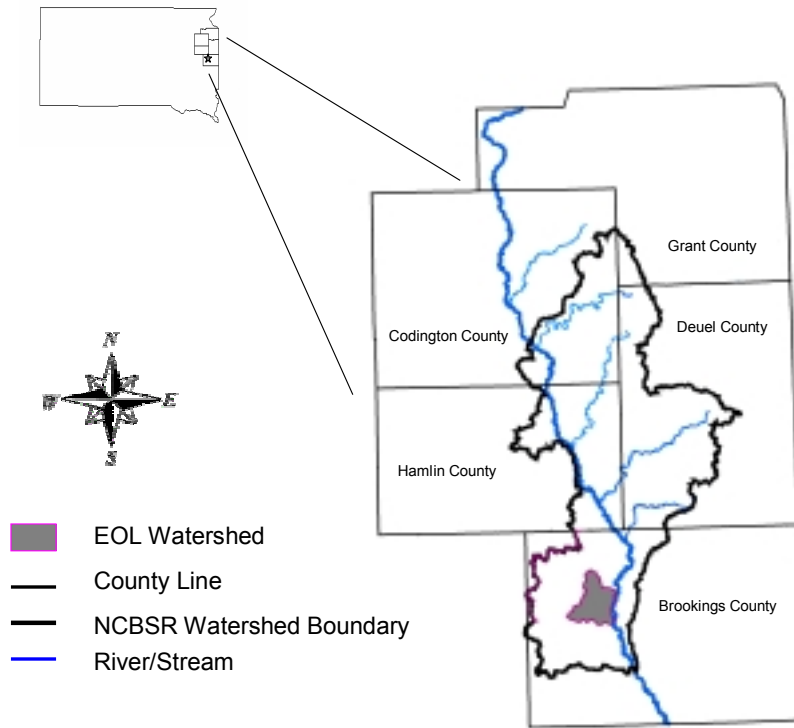


Figure 1. Location of the East Oakwood Lake Watershed

This lake was first identified in the 1998 South Dakota 303(d) Waterbody List for TMDL development due to excessive nutrients, siltation, and noxious aquatic plants. This lake was most recently identified in the 2006 Integrated Report for TMDL development due to TSI impairment and not supporting of its Warmwater Semi-permanent Fish Life beneficial use.

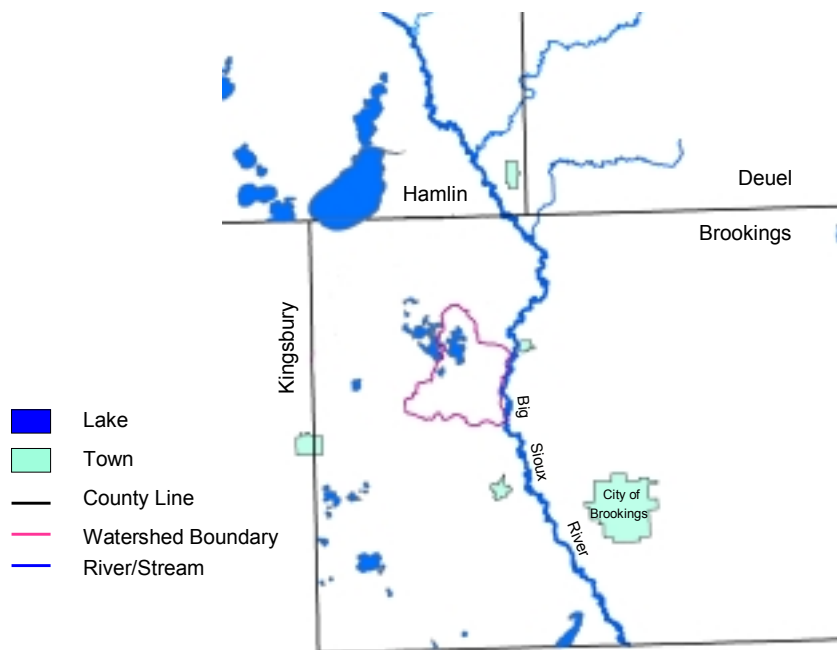


Figure 2. Location of the East Oakwood Lake Watershed

Information supporting this listing was derived from statewide ambient monitoring data and the 1996 305(b) Water Quality Assessment report. Furthermore, the North-Central Big Sioux River Watershed Assessment Project identified East Oakwood Lake for TMDL development due to not meeting the median Trophic State Index (TSI) value for a semi-permanent warmwater fishery and not meeting water quality criteria for pH. In addition, an aquatic plant survey was conducted on this lake and found vegetation to be scarce. Algae was also sampled which showed excessive growth and the presence of several nuisance blue-green algae species.

Problem Identification

Two in-lake monitoring sites were setup on East Oakwood Lake, Site L1 to the north and Site L2 to the south (Figure 3). Water quality samples at these sites indicated excessive phosphorus and high pH levels. Algae sampling found a presence of noxious species in both June and August with chlorophyll-a samples averaging 104.1 ppb.

The watershed area shown in Figure 2 drains approximately 81 percent grass/grazing land and cropland acres. No municipalities are located in the area.

One monitoring site (Site T44) was setup on the inlet to East Oakwood Lake was assessed for water quality. This inlet was found to be meeting the numeric water quality criteria and to be supporting assigned beneficial uses.

Two monitoring sites (T45 and T46) were setup on the outlet of East Oakwood Lake. This outlet was found to be meeting numeric water quality criteria and to be supporting its assigned beneficial uses.

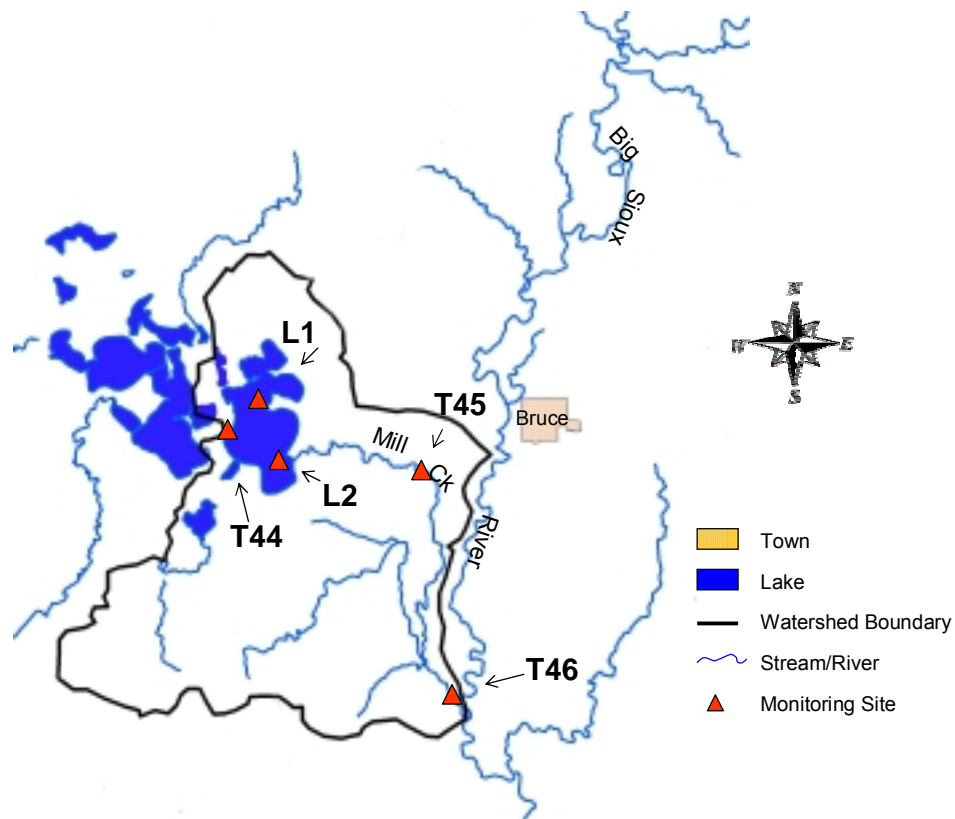


Figure 3. East Oakwood Lake Monitoring Sites

Total phosphorus load to East Oakwood Lake is 3,343 kg/yr annually. Of the total load, precipitation contribution is 112.5 kg/yr and non-point source contribution is 3,230.5 kg/yr. The non-point source contribution was calculated using Site T44 (inlet to East Oakwood Lake) phosphorus loadings. Non-point sources (such as unmonitored inlets and sediment loading) or point sources (such as drainage pipes) may also be contributing to the overall phosphorus load.

A 67 percent reduction in phosphorus load is required to improve TSI and lower pH levels. This reduction was calculated using data from the inlet (Site T44). A reduction of 2,164 kg/yr (approximately 67 percent of the monitored non-point source contribution) of phosphorus is needed to meet the median Trophic State Index (TSI) of ≤ 63.4 in order for the lake to fully support its assigned beneficial uses.

A total of 59 phosphorus samples and 59 pH samples were collected at two in-lake monitoring locations (L1 and L2). Of the 59 pH samples, 10 of the samples (or 17 percent) were violating the water quality standards (Table 1 and Figure 4). This 17 percent indicates that this lake is not meeting the water quality criteria to support its beneficial uses.

Table 1. pH Exceedences

Date	Site	Parameter	Standard	Sampled Value
9/28/2001	L1-S	pH	$\geq 6.5 - \leq 9.0$	9.1
8/8/2002	L1-S	pH	$\geq 6.5 - \leq 9.0$	9.2
9/12/2002	L1-S	pH	$\geq 6.5 - \leq 9.0$	9.1
8/8/2002	L1-B	pH	$\geq 6.5 - \leq 9.0$	9.2
8/8/2002	L2-S	pH	$\geq 6.5 - \leq 9.0$	9.2
8/8/2002	L2-B	pH	$\geq 6.5 - \leq 9.0$	9.2
4/23/2003	L1	pH	$\geq 6.5 - \leq 9.0$	9.5
6/2/2003	L1	pH	$\geq 6.5 - \leq 9.0$	9.1
4/23/2003	L2	pH	$\geq 6.5 - \leq 9.0$	9.5
7/15/2003	L2	pH	$\geq 6.5 - \leq 9.0$	9.1

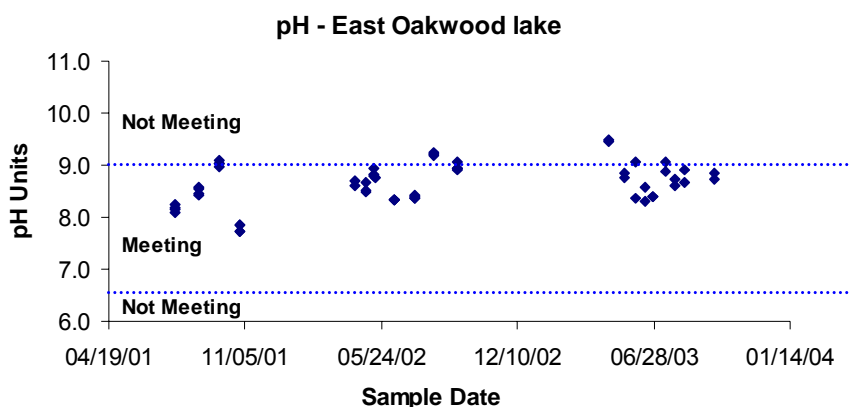


Figure 4. Scatterplot of pH Grab Samples

The exceedences in pH levels is believed to be attributed to excessive algae growth which uses the acidic dissolved carbon dioxide in the water for its life processes and in-turn causes the pH of the water to rise. Water temperatures and pH levels tend to increase in highly productive lakes. In this lake the higher productivity is likely caused by excessive nutrients. Figure 5

indicates excessive pH levels are occurring during time when the total suspended solids are higher. Because this lake is shallow, the water can become turbid from heavy rainfall, high winds and wave action, as well as from recreational activities (Figure 6). These activities can stir up nutrients from the bottom sediments, releasing phosphorus, which in-turn accelerates algal growth, causing the pH of the water to rise.

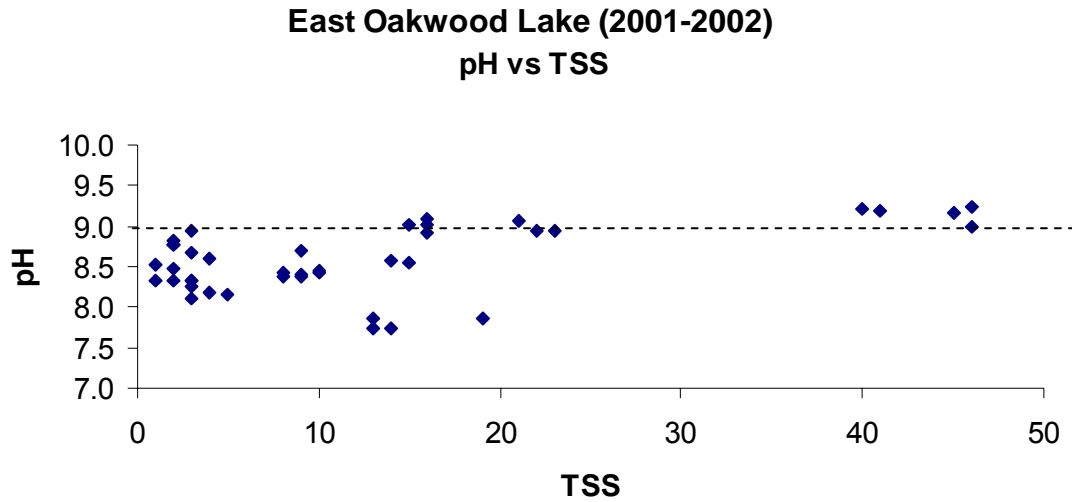


Figure 5. pH Plotted Against Total Suspended Solids

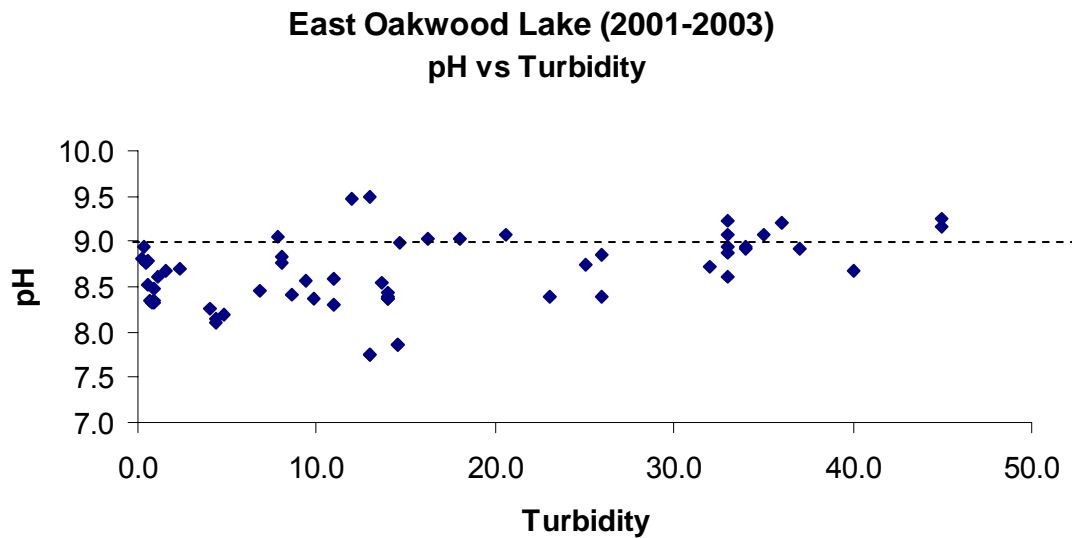


Figure 6. pH Plotted Against Turbidity

Figures 7 and 8 show how nutrients and phytoplankton growth relates to pH. Chlorophyll-a concentrations are relatively high in this lake at an average of 104 mg/m³ and a maximum sampled concentration of 180 mg/m³. The maximum lake depth is nine feet deep, with an average depth of six feet. It is possible that quick spikes in productivity are increasing pH for short periods of time. Because the pH exceedences are sporadic and have been documented to occur at any given time in April, June, July, August, or September, it is believed that surges in productivity are the cause of the elevated pH. Productivity is directly related to nutrient availability. Therefore, a reduction in nutrients would stabilize the system thereby decreasing the number of pH violations.

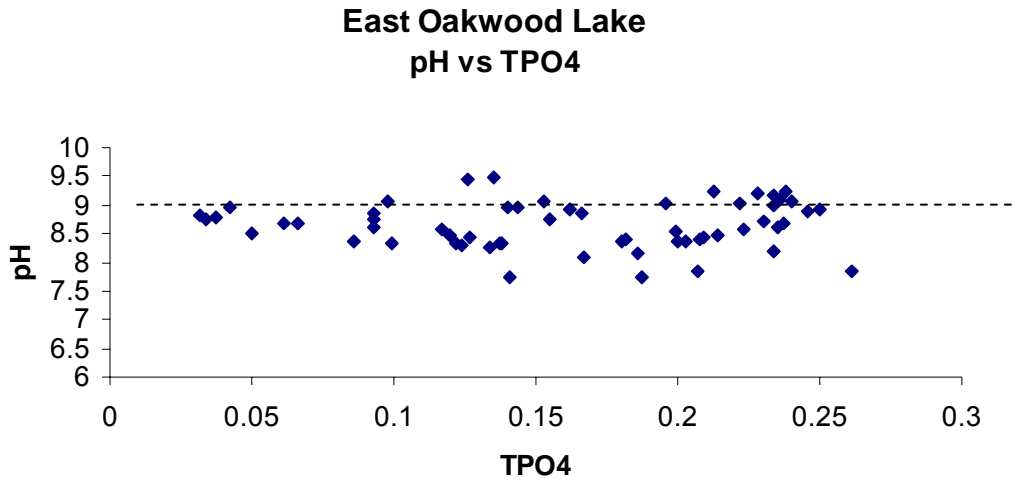


Figure 7. pH Plotted Against Total Phosphorus

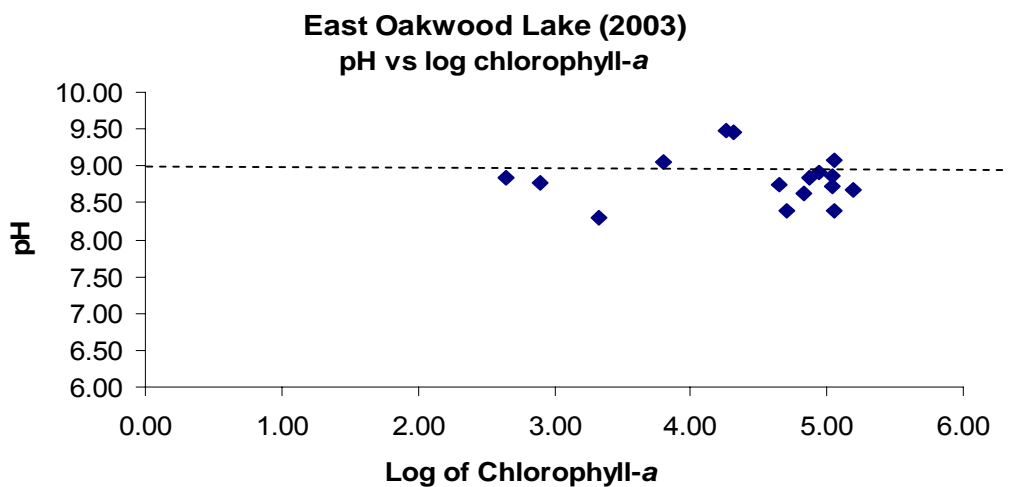


Figure 8. pH Plotted Against Chlorophyll-a

Additionally, excessive algae growth is likely being caused by the high levels of nutrients within the lake and from watershed runoff. East Oakwood Lake is a phosphorus limited lake, indicating algal growth is likely caused by excessive phosphorus in the water (Table 2). If the phosphorus concentrations can be controlled, then the excessive algae growth will be suppressed.

Table 2. Total Phosphorus and Chlorophyll-a Means for East Oakwood Lake

	Total Phosphorus (ppb)	Chlorophyll-a (ppb)
April-May	112	44
June-August	205	125
September-October	161	117

Description of Applicable Water Quality Standards & Numeric Water Quality Targets

East Oakwood Lake has been assigned beneficial uses by the state of South Dakota Surface Water Quality Standards regulations (See page 7 of the Assessment Report). There are also narrative and numeric criteria that define the desired water quality for this lake. These criteria must be maintained for the lake to satisfy its assigned beneficial uses, which are listed below:

- Warmwater semi-permanent fish life propagation
- Limited contact recreation
- Immersion recreation
- Fish and wildlife propagation, recreation and stock watering

Individual parameters, including the median TSI value of Secchi depth and chlorophyll-a, determine the support of this lake's beneficial uses and compliance with water quality standards. East Oakwood Lake experiences nutrient enrichment and nuisance algal blooms which are typical signs of the eutrophication process.

Administrative Rules of South Dakota Article 74:51 contains numeric and narrative standards applicable to the surface waters (i.e. streams, lakes) of the state. It contains language that prohibits 1) the existence of materials causing pollutants to form, 2) visible pollutants, 3) taste and odor producing materials, and 4) nuisance aquatic life.

If adequate numeric criteria are not available, alternate measures to assess the trophic status of a lake are used. This alternate method is based on the Trophic State Index (Carlson 1977). The SD DENR has developed an EPA-approved protocol that establishes desired TSI levels for lakes based on their fishery classification (SD DENR 2005). Using this protocol, the median of the TSI results of Secchi depth and chlorophyll-a are used in the determination of impairment. For a lake with a warmwater semi-permanent fishery to support its beneficial uses based on TSI, the median TSI value must be ≤ 63.4 . If the TSI results are higher than this, then the lake would not be supporting of its assigned beneficial uses.

East Oakwood Lake currently has a BATHTUB modeled predicted total phosphorus TSI of 77.6, a chlorophyll-a TSI of 73.9, and a Secchi depth TSI of 71.0. The BATHTUB observed value for total phosphorus TSI is 77.5, for chlorophyll-a TSI is 74.7, and for Secchi depth TSI is 60.0 (Attachment 1). Using SD DENR protocol for a warmwater semi-permanent fishery, the

BATHTUB predicted median TSI value (of chlorophyll-a and Secchi depth) is 72.5, which is indicative of increased levels of primary productivity.

Water samples were collected and the results were compared to the applicable water quality criteria. Twelve of the 59 pH samples were higher than the numeric standard (≥ 6.5 to ≤ 9.0 pH units) allowed per grab sample.

Recommended specific TSI parameters for East Oakwood Lake are 62.6 for total phosphorus, 66.1 for chlorophyll-a, and 60.2 for Secchi depth. The TMDL numeric target will reduce the total phosphorus loading of East Oakwood Lake, consequently lowering the median TSI (using chlorophyll-a and Secchi depth) to 63.4. A phosphorus reduction will reduce algal blooms and consequently lower pH levels.

Pollutant Assessment

Point Sources

There are no known point source pollutants of concern in this watershed.

Non-point Sources

Non-point and background sources of pollution in the East Oakwood Lake watershed were estimated using BATHTUB and AnnAGNPS modeling.

Under current conditions, monitored non-point source loadings of total phosphorus from the watershed into East Oakwood Lake was estimated to be 3,230.5 kg/yr, and were attributed to inlet Site T44. Reductions were based only on phosphorus contributions from inlet Site T44 since background contributions can not be reduced. The required reduction of total phosphorus (2,164 kg/yr) was determined by the BATHTUB modeling a 67 percent reduction. Precipitation (background) contribution of phosphorus was estimated at 112.5 kg/yr.

Linkage Analysis

Water quality data was collected at two in-lake monitoring sites, one inlet site, and two outlet sites. Samples were collected according to South Dakota's EPA approved Standard Operating Procedures for Field Samplers. Water samples were sent to the Water Resource Institute at South Dakota State University, South Dakota, for analysis. Quality assurance/quality control samples were collected on 10% of the samples according to South Dakota's EPA approved Non-point Source Quality Assurance/Quality Control Plan. Details concerning water sampling techniques, analysis, and quality control are addressed in the assessment final report.

In addition to water quality monitoring, data was collected to complete a watershed landuse model. The AnnAGNPS model was used to identify areas contributing potential nutrient and sediment loads. More information about AnnAGNPS results can be found in the Results Section of the Assessment Report. The areas shaded in Figure 9 represent AnnAGNPS cells contributing the most to external nutrient loadings. These areas are contributing more than one pound per acre per year of phosphorus and more than three pounds per acre per year of nitrogen. These results are based on a 10-year simulation using current conditions.

By comparing the AnnAGNPS results from three 10-year simulation scenarios (present condition, applying no-tillage practices, and removal of feedlots) the cells showing the most reductions (top five percent of cells) in nutrients after applied BMPs were identified and listed in Appendix O of the Assessment Report.

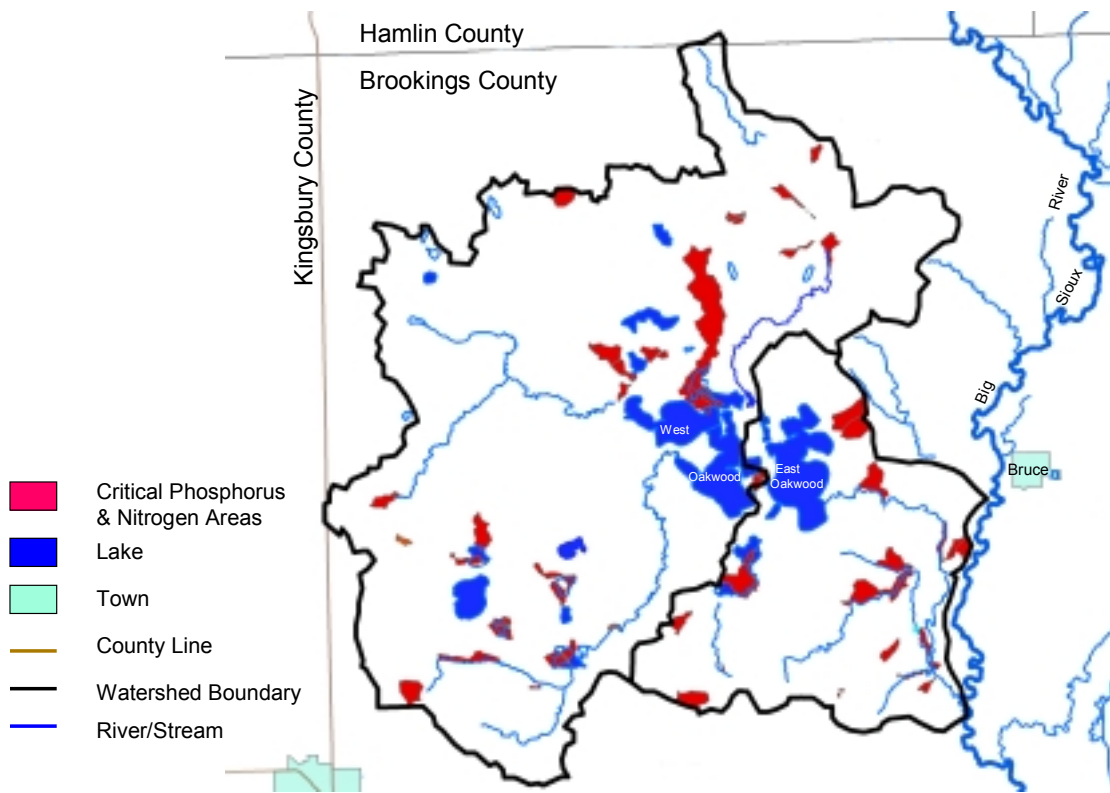


Figure 9. Areas Contributing the Most Nutrients in the Oakwood Lakes Watershed

The AnnAGNPS model predicted a one percent reduction in phosphorus after the removal of all feedlots. A 15 percent reduction was predicted when no-tillage practices were applied to all the crops.

The impacts of phosphorus reductions on the condition of East Oakwood Lake were calculated using the BATHTUB model. The BATHTUB model predicted a reduction of 67 percent (2,164 kg/yr) of the current total phosphorus non-point source load (3,230.5 kg/yr) to reduce the median TSI value (chlorophyll-a and Secchi depth) from 72.5 to 63.2. The AnnAGNPS model shows a maximum reduction of 16 percent by implementing BMPs related to feedlots and cropping practices. Another external BMP that should be considered is riparian vegetation management to ensure an adequate buffer zone between the lake and shoreline activities. Applying the external BMPs would maintain the current water quality conditions. The goal should be to improve the water quality conditions of this lake. In order to achieve improvement in water quality, the remaining 51 percent reduction in phosphorus would need to come from internal lake sources. An aggressive removal of rough fish species and the placement of a rough fish barrier between the Big Sioux River and East Oakwood Lake could greatly improve water quality conditions.

TMDL and Allocations

TMDL

Total phosphorus (kg) = 67 % reduction

	0 kg/yr	(WLA)
+	1,066.1 kg/yr	(LA)
+	112.5 kg/yr	(Background)
+	Implicit	(MOS)
<hr/>		
	1,178.6 kg/yr	(TMDL)

Wasteload Allocations (WLAs)

There are no known point source pollutants of concern in this watershed. Therefore, the “wasteload allocation” component of this TMDL is considered a zero value. The TMDL is considered wholly included within the “load allocation” component.

Load Allocations (LAs)

Load allocations account for the portion of the TMDL assigned to non-point sources. Natural background constitutes 112.5 kg/yr of the total. The remainder of the LA is assigned to the inlet contribution that is likely contributing phosphorus at rates above the natural background. A total phosphorus load reduction from external sources, as well as in-lake reductions of phosphorus would be needed to attain water quality standards for pH and control algal biomass. A 67 percent reduction in phosphorus load could be achieved with a combination of external and internal BMP application. For more specific information see the Management Options and Recommendations section of the Assessment Report.

Seasonal Variation

Different seasons of the year can yield differences in water quality due to changes in temperature, precipitation and agricultural practices. To determine seasonal differences, East Oakwood Lake phosphorus and chlorophyll-a samples were separated into spring (April to May), summer (June to August), and fall (September to October). This TMDL targets the most productive part of the year (June to August). Not only is this the period of peak recreational use, but it is also the period during which most impairments are occurring.

Margin of Safety

The margin of safety (MOS) is a portion of the loading capacity that is set aside to prevent the exceedence of a water quality standard as a means of accounting for the uncertainty involved in developing a TMDL. The MOS for this TMDL is implicit, meaning total phosphorus reductions were calculated based on extremely conservative estimations already built into the models, to include conservative model inputs using best professional judgment.

Critical Conditions

Based upon the assessment data, nutrient loading to East Oakwood Lake is most severe during mid to late summer (July-August) because of warmer water temperatures and increased algal growth.

Follow-Up Monitoring

East Oakwood Lake should continue to be monitored through the statewide lake assessment project and the South Dakota Game, Fish and Parks lake survey in order to observe and evaluate long-term trophic status, biological communities, and ecological trends.

Periodically during the implementation project and then once complete, monitoring will be necessary to ensure TSI values improve and the goals of this TMDL are met. Periodic water quality sampling at the original monitoring sites is suggested.

Public Participation

Efforts taken to gain public education, review, and comment during development of the TMDL involved:

1. East Dakota Water Development District monthly public board meetings
2. Individual contact with people knowledgeable about the watershed
3. Public meetings involving presentations about the watershed

Comments from these public forums have been taken into consideration in the development of the East Oakwood Lake TMDL.

Implementation Plan

The East Dakota Water Development District is working with the South Dakota DENR and various stakeholders to initiate an implementation project, which is estimated to begin in 2007.

East Oakwood Lake BATHTUB Modeling at Current Conditions

East Oakwood

File: C:\BATHTUB oakwood avgs_School\Oakwood lakes Oct 2005\East Oakwood\east oakgrab3.btb

Predicted & Observed Values Ranked Against CE Model Development Dataset

Segment: <u>Variable</u>	1 East Oakwood Predicted Values-->			Observed Values-->		
	<u>Mean</u>	<u>CV</u>	<u>Rank</u>	<u>Mean</u>	<u>CV</u>	<u>Rank</u>
TOTAL P MG/M3	163.5	0.24	91.4%	162.0	0.40	91.2%
TOTAL N MG/M3	2454.9	0.23	91.9%	2063.5	0.49	87.1%
C.NUTRIENT MG/M3	124.5	0.18	94.1%	113.6	0.44	92.6%
CHL-A MG/M3	82.8	0.29	99.8%	89.3	0.65	99.8%
SECCHI M	0.5	0.29	13.4%	1.0	0.96	46.0%
ORGANIC N MG/M3	2050.5	0.29	99.8%	1865.0	0.53	99.6%
TP-ORTHO-P MG/M3	145.2	0.33	95.2%	102.0	0.68	90.1%
ANTILOG PC-1	4271.4	0.44	98.5%	2839.3	0.65	96.9%
ANTILOG PC-2	16.0	0.09	95.8%	28.3	0.79	99.8%
(N - 150) / P	14.1	0.32	39.2%	11.8	0.65	29.6%
INORGANIC N / P	22.0	2.90	38.1%	3.3	7.27	1.4%
TURBIDITY 1/M	0.1		1.1%	0.1		1.1%
ZMIX * TURBIDITY	0.1		0.0%	0.1		0.0%
ZMIX / SECCHI	3.1	0.29	23.6%	1.5	0.93	2.1%
CHL-A * SECCHI	38.5	0.10	97.0%	89.3	1.16	99.9%
CHL-A / TOTAL P	0.5	0.28	93.2%	0.6	0.76	94.8%
FREQ(CHL-a>10) %	99.9	0.00	99.8%	99.9	0.00	99.8%
FREQ(CHL-a>20) %	97.6	0.03	99.8%	98.2	0.04	99.8%
FREQ(CHL-a>30) %	90.8	0.08	99.8%	92.6	0.15	99.8%
FREQ(CHL-a>40) %	80.6	0.15	99.8%	83.8	0.30	99.8%
FREQ(CHL-a>50) %	69.3	0.23	99.8%	73.4	0.46	99.8%
FREQ(CHL-a>60) %	58.3	0.31	99.8%	63.0	0.62	99.8%
CARLSON TSI-P	77.6	0.04	91.4%	77.5	0.07	91.2%
CARLSON TSI-CHLA	73.9	0.04	99.8%	74.7	0.08	99.8%
CARLSON TSI-SEC	71.0	0.06	86.6%	60.0	0.23	54.0%

East Oakwood

File: C:\BATHTUB oakwood avgs_School\Oakwood lakes Oct 2005\East Oakwood\east oakgrab3.btb

Overall Water & Nutrient Balances

Overall Water Balance

Averaging Period = 1.00 years

<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Area</u> <u>km²</u>	<u>Flow</u> <u>hm³/yr</u>	<u>Variance</u> <u>(hm³/yr)²</u>	<u>CV</u> <u>-</u>	<u>Runoff</u> <u>m/yr</u>
1	1	1	T44	113.4	13.4	0.00E+00	0.00	0.12
2	4	1	T45	172.5	30.9	0.00E+00	0.00	0.18
PRECIPITATION				3.8	2.2	0.00E+00	0.00	0.58
TRIBUTARY INFLOW				113.4	13.4	0.00E+00	0.00	0.12
***TOTAL INFLOW				117.2	15.6	0.00E+00	0.00	0.13
GAUGED OUTFLOW				172.5	30.9	0.00E+00	0.00	0.18
ADVECTIVE OUTFLOW					-18.6	1.00E+00	0.05	0.34
***TOTAL OUTFLOW				117.2	12.3	1.00E+00	0.08	0.10
***EVAPORATION					3.3	1.00E+00	0.30	

Overall Mass Balance Based Upon Component:

Predicted TOTAL P

Outflow & Reservoir Concentrations

<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Load</u> <u>kg/yr</u>	<u>%Total</u>	<u>Load Variance</u> <u>(kg/yr)²</u>	<u>%Total</u>	<u>CV</u>	<u>Conc</u> <u>mg/m³</u>	<u>Export</u> <u>kg/km²/yr</u>
1	1	1	T44	3230.5	96.6%	2.26E+05	98.6%	0.15	240.9	28.5
2	4	1	T45	5045.2		1.44E+06		0.24	163.5	29.3
PRECIPITATION				112.5	3.4%	3.16E+03	1.4%	0.50	51.7	30.0
TRIBUTARY INFLOW				3230.5	96.6%	2.26E+05	98.6%	0.15	240.9	28.5
***TOTAL INFLOW				3343.0	100.0%	2.29E+05	100.0%	0.14	214.5	28.5
GAUGED OUTFLOW				5045.2	150.9%	1.44E+06		0.24	163.5	29.3
ADVECTIVE OUTFLOW				-3041.7		6.16E+05		0.26	163.5	55.0
***TOTAL OUTFLOW				2003.6	59.9%	2.11E+05		0.23	163.5	17.1
***RETENTION				1339.4	40.1%	1.65E+05		0.30		
BATHTUB										
Overflow Rate (m/yr)				3.3		Nutrient Resid. Time (yrs)			0.2678	
Hydraulic Resid. Time (yrs)				0.4469		Turnover Ratio			3.7	
Reservoir Conc (mg/m3)				164		Retention Coef.			0.401	

Overall Mass Balance Based Upon Component:

Predicted TOTAL N

Outflow & Reservoir Concentrations

<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Load</u> <u>kg/yr</u>	<u>%Total</u>	<u>Load Variance</u> <u>(kg/yr)²</u>	<u>%Total</u>	<u>CV</u>	<u>Conc</u> <u>mg/m³</u>	<u>Export</u> <u>kg/km²/yr</u>
1	1	1	T44	40830.8	91.6%	2.60E+07	88.1%	0.13	3044.8	359.9
2	4	1	T45	75732.8		2.94E+08		0.23	2454.9	439.1
PRECIPITATION				3750.0	8.4%	3.52E+06	11.9%	0.50	1724.1	1000.0
TRIBUTARY INFLOW				40830.8	91.6%	2.60E+07	88.1%	0.12	3044.8	359.9
***TOTAL INFLOW				44580.8	100.0%	2.96E+07	100.0%	0.12	2860.5	380.4
GAUGED OUTFLOW				75732.8	169.9%	2.94E+08		0.23	2454.9	439.1
ADVECTIVE OUTFLOW				-45657.5		1.29E+08		0.25	2454.9	826.1
***TOTAL OUTFLOW				30075.2	67.5%	4.20E+07		0.22	2454.9	256.6
***RETENTION				14505.5	32.5%	3.17E+07		0.39		
Oakwood Lake										
Overflow Rate (m/yr)				3.3		Nutrient Resid. Time (yrs)			0.3015	
Hydraulic Resid. Time (yrs)				0.4469		Turnover Ratio			3.3	
Reservoir Conc (mg/m3)				2455		Retention Coef.			0.325	

Modeling for a 67 Percent Reduction

East Oakwood

File: C:\BATHTUB oakwood avgs_School\East Oakwood Oct 2005\East Oakwood\east oakgrab3-67.btb

Predicted & Observed Values Ranked Against CE Model Development Dataset

Variable	1 East Oakwood Predicted Values-->			Observed Values-->		
	Mean	CV	Rank	Mean	CV	Rank
TOTAL P MG/M3	57.7	0.24	58.2%	162.0	0.40	91.2%
TOTAL N MG/M3	948.5	0.24	46.6%	2063.5	0.49	87.1%
C.NUTRIENT MG/M3	43.6	0.19	59.8%	113.6	0.44	92.6%
CHL-A MG/M3	37.4	0.35	96.4%	89.3	0.65	99.8%
SECCHI M	1.0	0.33	45.2%	1.0	0.96	46.0%
ORGANIC N MG/M3	1014.8	0.32	93.2%	1865.0	0.53	99.6%
TP-ORTHO-P MG/M3	64.3	0.39	78.9%	102.0	0.68	90.1%
ANTILOG PC-1	810.8	0.52	82.0%	2839.3	0.65	96.9%
ANTILOG PC-2	17.0	0.09	96.8%	28.3	0.79	99.8%
(N - 150) / P	13.8	0.36	38.2%	11.8	0.65	29.6%
INORGANIC N / P	1.0		0.0%	3.3	7.27	1.4%
TURBIDITY 1/M	0.1		1.1%	0.1		1.1%
ZMIX * TURBIDITY	0.1		0.0%	0.1		0.0%
ZMIX / SECCHI	1.5	0.34	2.2%	1.5	0.93	2.1%
CHL-A * SECCHI	36.8	0.10	96.5%	89.3	1.16	99.9%
CHL-A / TOTAL P	0.6	0.26	97.0%	0.6	0.76	94.8%
FREQ(CHL-a>10) %	96.5	0.04	96.4%	99.9	0.00	99.8%
FREQ(CHL-a>20) %	75.7	0.23	96.4%	98.2	0.04	99.8%
FREQ(CHL-a>30) %	51.8	0.43	96.4%	92.6	0.15	99.8%
FREQ(CHL-a>40) %	33.7	0.61	96.4%	83.8	0.30	99.8%
FREQ(CHL-a>50) %	21.8	0.76	96.4%	73.4	0.46	99.8%
FREQ(CHL-a>60) %	14.1	0.90	96.4%	63.0	0.62	99.8%
CARLSON TSI-P	62.6	0.05	58.2%	77.5	0.07	91.2%
CARLSON TSI-CHLA	66.1	0.05	96.4%	74.7	0.08	99.8%
CARLSON TSI-SEC	60.2	0.08	54.8%	60.0	0.23	54.0%

East Oakwood

File: C:\BATHTUB oakwood avgs_School\East Oakwood Oct 2005\East Oakwood\east oakgrab3-67.btb

Overall Water & Nutrient Balances

Overall Water Balance

Averaging Period = 1.00 years

Trb	Type	Seg	Name	Area km ²	Flow hm ³ /yr	Variance (hm ³ /yr) ²	CV	Runoff m/yr
1	1	1	T44	113.4	13.4	0.00E+00	0.00	0.12
2	4	1	T45	172.5	30.9	0.00E+00	0.00	0.18
			PRECIPITATION	3.8	2.2	0.00E+00	0.00	0.58
			TRIBUTARY INFLOW	113.4	13.4	0.00E+00	0.00	0.12
			***TOTAL INFLOW	117.2	15.6	0.00E+00	0.00	0.13
			GAUGED OUTFLOW	172.5	30.9	0.00E+00	0.00	0.18
			ADVECTIVE OUTFLOW		-18.6	1.00E+00	0.05	0.34
			***TOTAL OUTFLOW	117.2	12.3	1.00E+00	0.08	0.10
			***EVAPORATION		3.3	1.00E+00	0.30	

Overall Mass Balance Based Upon Component:

Predicted TOTAL P

Outflow & Reservoir Concentrations

Trb	Type	Seg	Name	Load kg/yr	%Total	Load Variance (kg/yr) ²	%Total	CV	Conc mg/m ³	Export kg/km ² /yr
1	1	1	T44	1066.1	90.5%	2.46E+04	88.6%	0.15	79.5	9.4
2	4	1	T45	1778.7		1.77E+05		0.24	57.7	10.3
			PRECIPITATION	112.5	9.5%	3.16E+03	11.4%	0.50	51.7	30.0
			TRIBUTARY INFLOW	1066.1	90.5%	2.46E+04	88.6%	0.15	79.5	9.4
			***TOTAL INFLOW	1178.6	100.0%	2.77E+04	100.0%	0.14	75.6	10.1
			GAUGED OUTFLOW	1778.7	150.9%	1.77E+05		0.24	57.7	10.3
			ADVECTIVE OUTFLOW	-1072.4		7.60E+04		0.26	57.7	19.4
			***TOTAL OUTFLOW	706.4	59.9%	2.59E+04		0.23	57.7	6.0
			***RETENTION	472.2	40.1%	2.04E+04		0.30		

Overflow Rate (m/yr)	3.3	Nutrient Resid. Time (yrs)	0.2678
Hydraulic Resid. Time (yrs)	0.4469	Turnover Ratio	3.7
Reservoir Conc (mg/m3)	58	Retention Coef.	0.401

Overall Mass Balance Based Upon Component:

Predicted TOTAL N

Outflow & Reservoir Concentrations

Trb	Type	Seg	Name	Load kg/yr	%Total	Load Variance (kg/yr) ²	%Total	CV	Conc mg/m ³	Export kg/km ² /yr
1	1	1	T44	13474.4	78.2%	2.84E+06	44.7%	0.13	1004.8	118.8
2	4	1	T45	29260.3		4.94E+07		0.24	948.5	169.7
			PRECIPITATION	3750.0	21.8%	3.52E+06	55.3%	0.50	1724.1	1000.0
			TRIBUTARY INFLOW	13474.4	78.2%	2.84E+06	44.7%	0.12	1004.8	118.8
			***TOTAL INFLOW	17224.4	100.0%	6.35E+06	100.0%	0.15	1105.2	147.0
			GAUGED OUTFLOW	29260.3	169.9%	4.94E+07		0.24	948.5	169.7
			ADVECTIVE OUTFLOW	-17640.4		2.12E+07		0.26	948.5	319.2
			***TOTAL OUTFLOW	11620.0	67.5%	7.15E+06		0.23	948.5	99.2
			***RETENTION	5604.4	32.5%	4.93E+06		0.40		

Overflow Rate (m/yr)	3.3	Nutrient Resid. Time (yrs)	0.3015
Hydraulic Resid. Time (yrs)	0.4469	Turnover Ratio	3.3
Reservoir Conc (mg/m3)	948	Retention Coef.	0.325

**Appendix R.
TMDL – West Oakwood Lake
(Trophic State Index)**

**TOTAL MAXIMUM DAILY LOAD EVALUATION
TSI Impairment**

for

West Oakwood Lake

(HUC 10170202)

Brookings County, South Dakota

**East Dakota Water Development District
Brookings, South Dakota**

December 2005

West Oakwood Lake Total Maximum Daily Load

Waterbody Type:	Lake
Assessment Unit ID:	SD-BS-L-W_Oakwood_01
303(d) Listing Parameter:	TSI Impairment
Designated Uses:	Warmwater Semi-permanent Fish Life Propagation Immersion Recreation Limited Contact Recreation Fish and Wildlife Propagation, Recreation and Stock Watering
Size of Waterbody:	702 acres
Size of Watershed:	40,912 acres
Water Quality Standards:	Narrative and Numeric
Indicators:	Water Chemistry
Analytical Approach:	Models including AnnAGNPS and BATHTUB
Location:	HUC Code: 10170202
Goal (BATHTUB based):	70 percent reduction in Total Phosphorus (3,558.6 kg/yr)
Target (BATHTUB based):	≤ 63.4 (median of Secchi depth and chlorophyll-a TSI) 1,591.7 kg/yr Total Phosphorus

Objective

The intent of this summary is to clearly identify the components of the TMDL submittal to support adequate public participation and facilitate the US Environmental Protection Agency (EPA) review and approval. The TMDL was developed in accordance with Section 303(d) of the federal Clean Water Act and guidance developed by EPA.

Introduction

West Oakwood Lake is a 702-acre natural lake with a watershed of approximately 40,912 acres. West Oakwood Lake consists of three connected lake segments Johnson Lake, North Lake Tetonkaha, and South Lake Tetonkaha. These lakes are located within the Big Sioux River Basin (HUC 10170202) in northwestern Brookings County, South Dakota.

These lakes are included as part of the North-Central Big Sioux River Watershed Assessment Project. The entire study area for this project is also outlined in Figure 1. The watershed of this lake lies within Brookings County as shown by the shaded region in Figure 2.

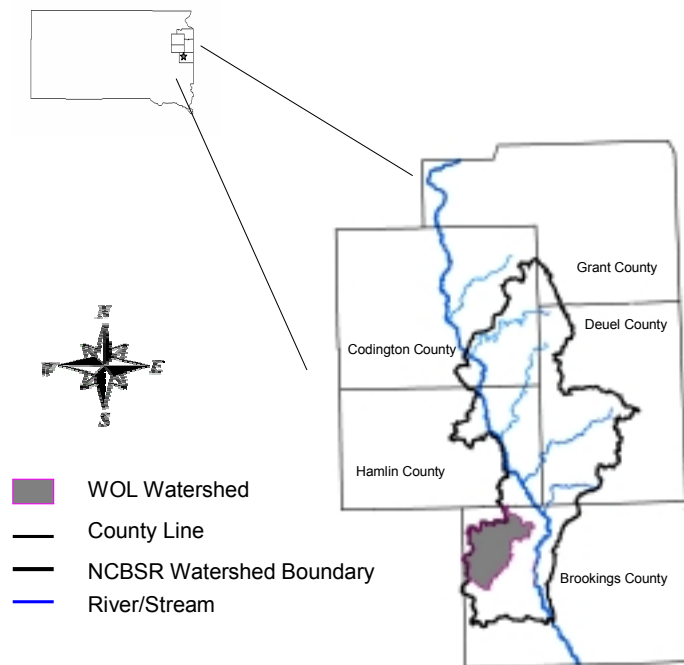


Figure 1. Location of the West Oakwood Lake Watershed

This lake was first identified in the 2002 303(d) Waterbody List for TMDL development due to TSI impairment and not supporting its Warmwater Semi-permanent Fish Life Propagation beneficial use. This lake has been continuously listed for TSI impairment, with its most recent listing in the 2006 Integrated Report.

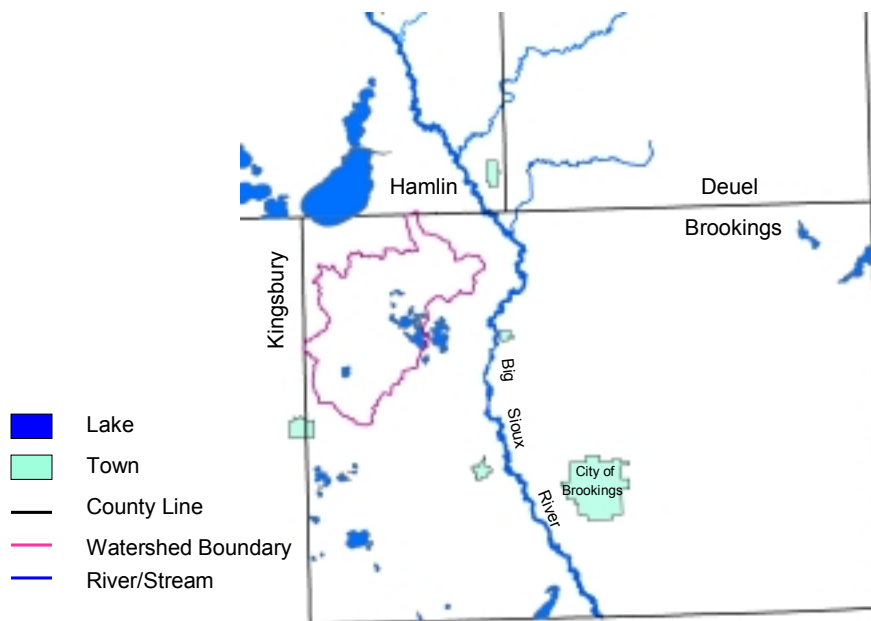


Figure 2. Location of the West Oakwood Lake Watershed

Information supporting this listing was derived from statewide ambient monitoring data. Furthermore, the North-Central Big Sioux River Watershed Assessment Project identified West Oakwood Lake for TMDL development due to not meeting the median Trophic State Index (TSI) value for a warmwater semi-permanent fishery. In addition, an aquatic plant survey was conducted on this lake and found vegetation to be scarce. Algae was also sampled which showed excessive growth and the presence of several nuisance blue-green algae species.

Problem Identification

One in-lake monitoring site (Site L10) was setup on Johnson Lake and two in-lake monitoring sites (Site L11 and Site L12) were setup on Lake Tetonkaha (Figure 3). Water quality sampling at these sites indicated excessive phosphorus. Algae sampling found the presence of noxious species in both the June and August samples with chlorophyll-*a* samples averaging 126.7 ppb on Johnson Lake and 121.2 ppb on Lake Tetonkaha.

The watershed area shown in Figure 2 drains approximately 86 percent grass/grazing land and cropland acres. No municipalities are located in the area.

Monitoring sites was setup on each of the inlets to West Oakwood Lake (Site T43 and Site T48) and were assessed for water quality. These inlets were found to be meeting the numeric water quality criteria and to be supporting their assigned beneficial uses.

Water quality at the outlet (Site T44) of West Oakwood Lake was also assessed. This outlet was found to be meeting its numeric water quality criteria and to be supporting its beneficial uses.

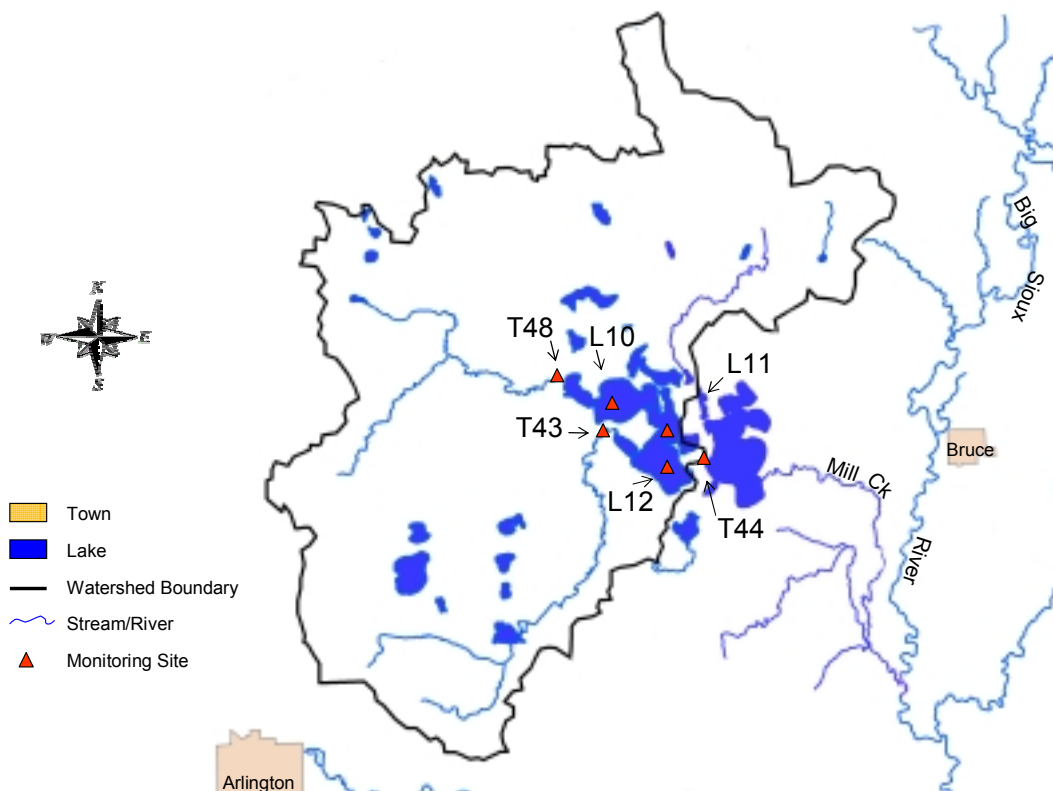


Figure 3. West Oakwood Lake Monitoring Sites

Total phosphorus load to West Oakwood Lake is 5,150.3 kg annually. Of the total load, precipitation contribution is 66.6 kg/yr, and non-point source contribution is 5,083.7 kg/yr. The two inlets to West Oakwood Lake were taken into consideration when calculating the phosphorus loading. Site T43 contributed an estimated 4,157.8 kg/yr (81 percent of the total phosphorus load), while Site T48 contributed 925.9 kg/yr (18 percent of the total phosphorus load).

Non-point sources (such as ungaged runoff and sediment loading) or point sources (such as drainage pipes) may also be contributing to the phosphorus load. A 70 percent reduction in phosphorus load is required to improve the TSI enough to meet the requirements to support the assigned beneficial uses of West Oakwood Lake. This reduction was calculated using tributary runoff which requires a reduction of 3,558.6 kg/yr (approximately 70 percent of the total non-point source contribution) to meet the median Trophic State Index of ≤ 63.4 in order for the lake to fully support its assigned beneficial uses.

A total of 30 phosphorus samples were taken from the three in-lake monitoring locations (Site L10, Site L11, and Site L12). Total phosphorus is not tied to a numeric standard, but is a component of TSI. The excessive algae growth in West Oakwood Lake is believed to be attributed to the excessive total phosphorus concentrations.

Excessive algae growth is likely caused by the high levels of nutrients within the lake and from watershed runoff. West Oakwood Lake is a phosphorus limited lake which is a sign that excessive phosphorus in the water is causing algal growth (Table 1). Improving water quality by reducing the phosphorus concentrations would help to control the excessive algae growth.

Table 1. Total Phosphorus and Chlorophyll-a Means for West Oakwood Lake

	Total Phosphorus (ppb)	Chlorophyll-a (ppb)
April-May	135	50
June-August	280	144
September-October	192	150

Description of Applicable Water Quality Standards & Numeric Water Quality Targets

West Oakwood Lake has been assigned beneficial uses by the state of South Dakota Surface Water Quality Standards regulations (See page 7 of the Assessment Report). Along with these assigned uses are narrative and numeric criteria that define the desired water quality of this lake. These criteria must be maintained for the lake to satisfy its assigned beneficial uses, which are listed below:

- Warmwater semi-permanent fish life propagation
- Limited contact recreation
- Immersion recreation
- Fish and wildlife propagation, recreation and stock watering

Individual parameters, including median TSI value of Secchi depth and chlorophyll-a, determine the support of this lake's beneficial uses and compliance with water quality standards. West Oakwood Lake experiences nutrient enrichment and nuisance algal blooms which are typical signs of the eutrophication process.

Administrative Rules of South Dakota Article 74:51 contains numeric and narrative standards applicable to the surface waters (i.e. streams, lakes) of the state. It contains language that prohibits 1) the existence of materials causing pollutants to form, 2) visible pollutants, 3) taste and odor producing materials, and 4) nuisance aquatic life.

If adequate numeric criteria are not available, alternate measures to assess the trophic status of a lake are used. This alternate method is based on the Trophic State Index (Carlson 1977). The SD DENR has developed an EPA-approved protocol that establishes desired TSI levels for lakes based on their fishery classification (SD DENR 2005). Using this protocol, the median of the TSI results of Secchi depth and chlorophyll-*a* are used in the determination of impairment. For a lake with a warmwater semi-permanent fishery to support its beneficial uses based on TSI, the median TSI value must be ≤ 63.4 . If the TSI results are higher than this, then the lake would not be supporting of its assigned beneficial uses.

West Oakwood Lake currently has a BATHTUB modeled predicted total phosphorus TSI of 83.3, a chlorophyll-*a* TSI of 76.8, and a Secchi depth TSI of 77.4. The BATHTUB observed value for total phosphorus TSI is 82.7, for chlorophyll-*a* TSI is 77.9, and for Secchi depth TSI is 76.5 (Attachment 1). Using SD DENR protocol for a warmwater semi-permanent fishery, the BATHTUB predicted median TSI value (of chlorophyll-*a* and Secchi depth) is 77.1, which is indicative of increased levels of primary productivity.

Water samples were obtained using SD DENR standard operating procedures and the results were compared to the applicable water quality criteria. All parameters were in compliance with numeric criteria.

Recommended specific TSI parameters for West Oakwood Lake are 66.5 for total phosphorus, 62.4 for chlorophyll-*a*, and 64.1 for Secchi depth. The TMDL numeric target will reduce the total phosphorus loading of West Oakwood Lake, consequently lowering the median TSI (using chlorophyll-*a* and Secchi depth) to 63.3.

Pollutant Assessment

Point Sources

There are no known point source pollutants of concern in this watershed.

Non-point Sources

Non-point and background sources of pollution in the West Oakwood Lake watershed were estimated using BATHTUB and AnnAGNPS modeling.

Under current conditions, monitored non-point source loadings of total phosphorus from the watershed into West Oakwood Lake was estimated to be 5,083.7 kg/yr, and were attributed to inlet Site T43 and inlet Site T48. Reductions were based only on phosphorus contributions from the inlet sites since background contributions can not be reduced. The required reduction of total phosphorus (3,558.6 kg/yr) was determined by the BATHTUB modeling a 70 percent reduction. Precipitation (background) contribution of phosphorus was estimated at 66.6 kg/yr.

Linkage Analysis

Water quality data was collected at three in-lake monitoring sites, two inlet sites, and one outlet site. Samples were collected according to South Dakota's EPA approved Standard Operating Procedures for Field Samplers. Water samples were sent to the State Health Laboratory in Pierre, South Dakota, for analysis. Quality assurance/quality control samples were collected on 10% of the samples according to South Dakota's EPA approved Non-point Source Quality Assurance/Quality Control Plan. Details concerning water sampling techniques, analysis, and quality control are addressed in the assessment final report.

In addition to water quality monitoring, data was collected to complete a watershed landuse model. The AnnAGNPS model was used to identify watershed areas contributing potential nutrient and sediment loads. More information about AnnAGNPS results can be found in the Results Section of the Assessment Report. The areas shaded in Figure 4 represent AnnAGNPS cells contributing the most to external nutrient loadings. These areas are contributing more than one pound per acre per year of phosphorus and more than three pounds per acre per year of nitrogen. These results are based on a 10-year simulation using current conditions.

By comparing the AnnAGNPS results from three 10-year simulation scenarios (present condition, applying no-tillage practices, and removal of feedlots) the cells showing the most reductions (top five percent of cells) in nutrients after applied BMPs were identified and listed in Appendix O of the Assessment Report.

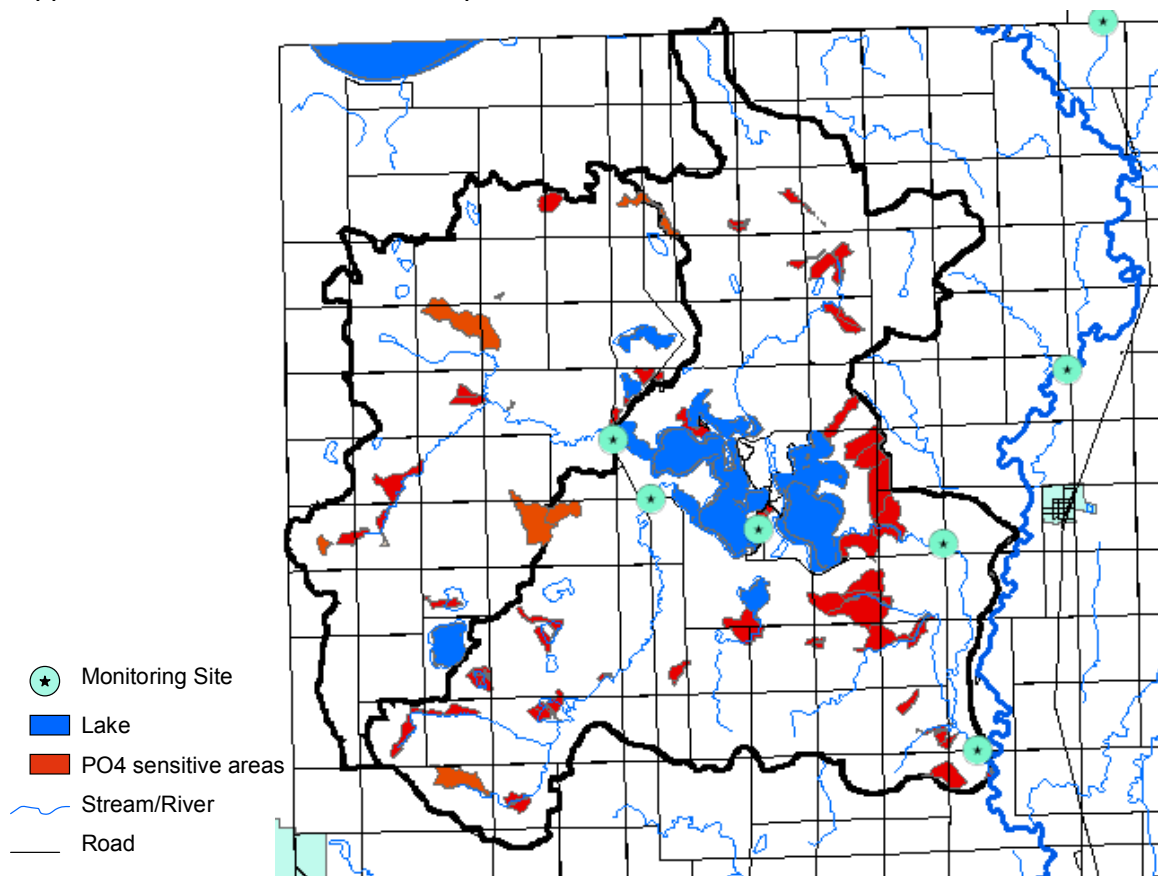


Figure 4. Areas Contributing the Most Nutrients in the Oakwood Lakes Watershed

The AnnAGNPS model predicted a one percent reduction in phosphorus after the removal of all feedlots. A seven percent reduction was predicted when no-tillage practices were applied to all the crops.

The impacts of phosphorus reductions on the condition of West Oakwood Lake were calculated using the BATHTUB model. The BATHTUB predicted a reduction of 70 percent (3,558.6 kg/yr) of the current total phosphorus non-point source load (5,083.7 kg/yr) to reduce the median TSI value (chlorophyll-*a* and Secchi depth) from 77.1 to 63.3. The AnnAGNPS model shows a maximum reduction of eight percent by implementing BMPs related to feedlots and cropping practices. Other external BMPs that should be considered include riparian vegetation management to ensure an adequate buffer zone between the lake and shoreline activities and homeowner management of shoreline activities. Applying the external BMPs would maintain the current water quality conditions of this lake, but the goal should be to improve the water quality conditions. In order to achieve improvement in water quality, the remaining 62 percent reduction in phosphorus would need to come from internal lake sources. An aggressive removal of rough fish species and the placement of a rough fish barrier between the Big Sioux River and East Oakwood Lake could greatly improve water quality conditions.

TMDL and Allocations

TMDL

Total phosphorus (kg) = 70 % reduction

	0 kg/yr	(WLA)
+	1,525.1 kg/yr	(LA)
+	66.6 kg/yr	(Background)
+	Implicit	(MOS)
<hr/>		
	1,591.7 kg/yr	(TMDL)

Wasteload Allocations (WLAs)

There are no known point source pollutants of concern in this watershed. Therefore, the “wasteload allocation” component of this TMDL is considered a zero value. The TMDL is considered wholly included within the “load allocation” component.

Load Allocations (LAs)

Load allocations account for the portion of the TMDL assigned to non-point sources. Natural background constitutes 66.6 kg/yr of the total. The remainder of the LA is assigned to inlet contribution that is likely contributing phosphorus at rates above the natural background. A total phosphorus load reduction from external sources, as well as in-lake reductions of phosphorus would be needed to attain water quality standards for pH and control algal biomass. A 70 percent reduction in phosphorus load could be achieved with a combination of external and internal BMP application. For more specific information see the Management Options and Recommendations section of the Assessment Report.

Seasonal Variation

Different seasons of the year can yield differences in water quality due to changes in temperature, precipitation and agricultural practices. To determine seasonal differences, West Oakwood Lake phosphorus and chlorophyll-*a* samples were separated into spring (April to

May), summer (June to August), and fall (September to October). This TMDL targets the most productive part of the year summer through fall (June-October). Not only is this the period of peak recreational use, but it is also the period during which most impairments are occurring.

Margin of Safety

The margin of safety (MOS) is a portion of the loading capacity that is set aside to prevent the exceedence of a water quality standard as a means of accounting for the uncertainty involved in developing a TMDL. The MOS for this TMDL is implicit, meaning total phosphorus reductions were calculated based on extremely conservative estimations already built into the models, to include conservative model inputs using best professional judgment.

Critical Conditions

Based upon the assessment data, nutrient loading to West Oakwood Lake is most severe during the summer months (June-August) and impairments usually result in late summer to fall (September-October) because of warmer water temperatures and increased algal growth.

Follow-Up Monitoring

West Oakwood Lake should continue to be monitored through the statewide lake assessment project and the South Dakota Game, Fish and Parks lake survey in order to observe and evaluate long-term trophic status, biological communities, and ecological trends.

Periodically during the implementation project and then once complete, monitoring will be necessary to ensure TSI values improve and the goals of this TMDL are met. Periodic water quality sampling at the original monitoring sites is suggested.

Public Participation

Efforts taken to gain public education, review, and comment during development of the TMDL involved:

1. East Dakota Water Development District monthly public board meetings
2. Individual contact with people knowledgeable about the watershed
3. Public meetings involving presentations about the watershed

Comments from these public meetings have been taken into consideration in the development of the West Oakwood Lake TMDL.

Implementation Plan

The East Dakota Water Development District is working with the South Dakota DENR and various stakeholders to initiate an implementation project, which is estimated to begin in 2007.

West Oakwood Lake BATHTUB Modeling at Current Conditions

West Oakwood

File: C:\BATHTUB oakwood avgs_School\Oakwood lakes Oct 2005\West Oakwood\westoakwood2.btb

Predicted & Observed Values Ranked Against CE Model Development Dataset

Segment:	4 Area-Wtd Mean			Observed Values-->		
	Predicted Values-->			Mean	CV	Rank
Variable	Mean	CV	Rank	Mean	CV	Rank
TOTAL P MG/M3	244.0	0.40	96.5%	239.4	0.46	96.3%
TOTAL N MG/M3	2652.4	0.25	93.6%	3818.7	0.30	98.2%
C.NUTRIENT MG/M3	157.2	0.22	96.8%	186.3	0.39	98.1%
CHL-A MG/M3	111.3	0.38	99.9%	124.2	0.51	100.0%
SECCHI M	0.3	0.20	4.5%	0.3	0.42	5.5%
ORGANIC N MG/M3	2702.9	0.38	100.0%	3946.0	0.19	100.0%
TP-ORTHO-P MG/M3	196.5	0.41	97.6%	204.4	0.51	97.8%
ANTILOG PC-1	7865.8	0.52	99.6%	10198.2	0.26	99.8%
ANTILOG PC-2	14.5	0.24	93.8%	16.8	0.27	96.6%
(N - 150) / P	10.4	0.47	23.7%	15.9	0.33	46.0%
INORGANIC N / P	2.4	7.66	0.6%	4.6	4.60	3.0%
TURBIDITY 1/M	0.1		2.3%	0.1		2.3%
ZMIX * TURBIDITY	0.2		0.0%	0.2		0.0%
ZMIX / SECCHI	7.5	0.20	78.3%	7.1	0.24	74.9%
CHL-A * SECCHI	33.2	0.30	95.2%	39.5	0.39	97.2%
CHL-A / TOTAL P	0.5	0.37	91.0%	0.5	0.39	94.6%
FREQ(CHL-a>10) %	100.0	0.00	99.9%	100.0	0.00	100.0%
FREQ(CHL-a>20) %	99.3	0.01	99.9%	99.5	0.01	100.0%
FREQ(CHL-a>30) %	96.4	0.05	99.9%	97.4	0.03	100.0%
FREQ(CHL-a>40) %	91.0	0.11	99.9%	93.2	0.07	100.0%
FREQ(CHL-a>50) %	83.6	0.18	99.9%	87.2	0.11	100.0%
FREQ(CHL-a>60) %	75.3	0.25	99.9%	80.1	0.16	100.0%
CARLSON TSI-P	83.3	0.07	96.5%	82.7	0.05	96.3%
CARLSON TSI-CHLA	76.8	0.05	99.9%	77.9	0.04	100.0%
CARLSON TSI-SEC	77.4	0.04	95.5%	76.5	0.05	94.5%

Segment:	1 Johnson Lake			Observed Values-->		
	Predicted Values-->			Mean	CV	Rank
Variable	Mean	CV	Rank	Mean	CV	Rank
TOTAL P MG/M3	215.1	0.39	95.2%	302.8	0.55	98.0%
TOTAL N MG/M3	2751.1	0.27	94.3%	4219.0	0.19	98.8%
C.NUTRIENT MG/M3	152.7	0.24	96.5%	225.9	0.38	98.9%
CHL-A MG/M3	107.3	0.40	99.9%	126.7	0.45	100.0%
SECCHI M	0.3	0.21	4.8%	0.3	0.46	5.2%
ORGANIC N MG/M3	2605.2	0.39	100.0%	4029.0	0.21	100.0%
TP-ORTHO-P MG/M3	187.3	0.43	97.3%	260.7	0.62	98.9%
ANTILOG PC-1	7393.2	0.55	99.5%	11747.4	0.40	99.8%
ANTILOG PC-2	14.3	0.24	93.6%	16.2	0.44	96.1%
(N - 150) / P	12.1	0.49	30.9%	13.4	0.57	36.5%
INORGANIC N / P	5.3	7.69	4.1%	4.5	8.43	2.9%
TURBIDITY 1/M	0.0		0.0%	0.0		0.0%
ZMIX * TURBIDITY	0.0		0.0%	0.0		0.0%
ZMIX / SECCHI	6.8	0.21	72.8%	6.6	0.44	71.1%
CHL-A * SECCHI	32.7	0.30	95.0%	39.8	0.64	97.3%
CHL-A / TOTAL P	0.5	0.35	92.9%	0.4	0.70	88.3%
FREQ(CHL-a>10) %	100.0	0.00	99.9%	100.0	0.00	100.0%
FREQ(CHL-a>20) %	99.2	0.01	99.9%	99.6	0.01	100.0%
FREQ(CHL-a>30) %	96.0	0.06	99.9%	97.8	0.04	100.0%
FREQ(CHL-a>40) %	90.0	0.12	99.9%	93.9	0.09	100.0%
FREQ(CHL-a>50) %	82.2	0.20	99.9%	88.3	0.15	100.0%
FREQ(CHL-a>60) %	73.5	0.28	99.9%	81.5	0.23	100.0%
CARLSON TSI-P	81.6	0.07	95.2%	86.5	0.09	98.0%
CARLSON TSI-CHLA	76.5	0.05	99.9%	78.1	0.06	100.0%
CARLSON TSI-SEC	77.1	0.04	95.2%	76.7	0.08	94.8%

Segment:	2 North Tetonkaha			Observed Values-->		
	Predicted Values-->			Mean	CV	Rank
	Variable	Mean	CV	Rank	Mean	CV
TOTAL P MG/M3	254.1	0.41	96.8%	191.0	0.36	93.8%
TOTAL N MG/M3	2616.0	0.25	93.3%	2942.0	0.72	95.4%
C.NUTRIENT MG/M3	159.8	0.22	96.9%	147.6	0.52	96.2%
CHL-A MG/M3	113.6	0.38	99.9%	137.9	0.50	100.0%
SECCHI M	0.3	0.20	4.4%	0.3	0.35	4.9%
ORGANIC N MG/M3	2753.6	0.38	100.0%	3976.0	0.16	100.0%
TP-ORTHO-P MG/M3	200.0	0.41	97.7%	160.3	0.39	96.1%
ANTILOG PC-1	8131.1	0.53	99.6%	9651.0	0.44	99.7%
ANTILOG PC-2	14.5	0.24	94.0%	18.5	0.43	97.8%
(N - 150) / P	9.7	0.48	20.5%	14.6	0.83	41.2%
INORGANIC N / P	0.0	1.85	0.0%	0.0	3.06	0.0%
TURBIDITY 1/M	0.1		1.1%	0.1		1.1%
ZMIX * TURBIDITY	0.2		0.0%	0.2		0.0%
ZMIX / SECCHI	9.5	0.20	88.2%	9.1	0.34	86.6%
CHL-A * SECCHI	33.4	0.30	95.3%	42.5	0.61	97.8%
CHL-A / TOTAL P	0.4	0.39	90.3%	0.7	0.61	98.0%
FREQ(CHL-a>10) %	100.0	0.00	99.9%	100.0	0.00	100.0%
FREQ(CHL-a>20) %	99.4	0.01	99.9%	99.7	0.01	100.0%
FREQ(CHL-a>30) %	96.7	0.05	99.9%	98.4	0.03	100.0%
FREQ(CHL-a>40) %	91.5	0.10	99.9%	95.4	0.08	100.0%
FREQ(CHL-a>50) %	84.5	0.17	99.9%	90.8	0.14	100.0%
FREQ(CHL-a>60) %	76.4	0.24	99.9%	84.9	0.22	100.0%
CARLSON TSI-P	84.0	0.07	96.8%	79.9	0.06	93.8%
CARLSON TSI-CHLA	77.0	0.05	99.9%	78.9	0.06	100.0%
CARLSON TSI-SEC	77.6	0.04	95.6%	77.0	0.06	95.1%

Segment:	3 South Tetonkaha			Observed Values-->		
	Predicted Values-->			Mean	CV	Rank
	Variable	Mean	CV	Rank	Mean	CV
TOTAL P MG/M3	281.2	0.42	97.5%	184.0	0.33	93.3%
TOTAL N MG/M3	2527.0	0.24	92.6%	4039.0	0.18	98.5%
C.NUTRIENT MG/M3	161.9	0.22	97.1%	160.0	0.27	97.0%
CHL-A MG/M3	115.5	0.38	99.9%	106.3	0.62	99.9%
SECCHI M	0.3	0.20	4.2%	0.3	0.42	6.4%
ORGANIC N MG/M3	2812.3	0.38	100.0%	3780.0	0.18	100.0%
TP-ORTHO-P MG/M3	208.2	0.40	97.9%	156.3	0.36	95.9%
ANTILOG PC-1	8375.2	0.52	99.6%	8205.7	0.43	99.6%
ANTILOG PC-2	14.6	0.24	94.1%	16.1	0.52	96.0%
(N - 150) / P	8.5	0.49	15.2%	21.1	0.37	62.5%
INORGANIC N / P	0.0	1.55	0.0%	9.4	4.86	12.2%
TURBIDITY 1/M	0.3		19.0%	0.3		19.0%
ZMIX * TURBIDITY	0.6		1.2%	0.6		1.2%
ZMIX / SECCHI	6.7	0.20	72.3%	5.8	0.41	62.8%
CHL-A * SECCHI	33.6	0.30	95.4%	36.1	0.75	96.3%
CHL-A / TOTAL P	0.4	0.42	87.8%	0.6	0.70	95.5%
FREQ(CHL-a>10) %	100.0	0.00	99.9%	100.0	0.00	99.9%
FREQ(CHL-a>20) %	99.4	0.01	99.9%	99.1	0.02	99.9%
FREQ(CHL-a>30) %	96.9	0.04	99.9%	95.8	0.09	99.9%
FREQ(CHL-a>40) %	91.9	0.10	99.9%	89.7	0.19	99.9%
FREQ(CHL-a>50) %	85.1	0.16	99.9%	81.8	0.31	99.9%
FREQ(CHL-a>60) %	77.2	0.23	99.9%	73.0	0.44	99.9%
CARLSON TSI-P	85.5	0.07	97.5%	79.3	0.06	93.3%
CARLSON TSI-CHLA	77.2	0.05	99.9%	76.4	0.08	99.9%
CARLSON TSI-SEC	77.8	0.04	95.8%	75.5	0.08	93.6%

West Oakwood

File: C:\BATHTUB oakwood avgs_School\Oakwood lakes Oct 2005\West Oakwood\westoakwood2.btb

Overall Water & Nutrient Balances

Overall Water Balance

				Averaging Period = 1.00 years				
<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Area</u> km ²	<u>Flow</u> hm ³ /yr	<u>Variance</u> (hm ³ /yr) ²	<u>CV</u> -	<u>Runoff</u> m/yr
1	1	3	T43	40.8	9.9	0.00E+00	0.00	0.24
2	1	1	T48	70.4	4.8	0.00E+00	0.00	0.07
PRECIPITATION				2.2	1.3	0.00E+00	0.00	0.58
TRIBUTARY INFLOW				111.2	14.7	0.00E+00	0.00	0.13
***TOTAL INFLOW				113.4	16.0	0.00E+00	0.00	0.14
ADVECTIVE OUTFLOW				113.4	14.0	3.51E-01	0.04	0.12
***TOTAL OUTFLOW				113.4	14.0	3.51E-01	0.04	0.12
***EVAPORATION					2.0	3.51E-01	0.30	

Overall Mass Balance Based Upon Component:

				Predicted	Outflow & Reservoir Concentrations						
				TOTAL P	Load Variance		Conc	Export			
<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Load</u> kg/yr	<u>%Total</u>	<u>(kg/yr)²</u>	<u>%Total</u>	<u>CV</u>	<u>mg/m³</u>	<u>kg/km²/yr</u>	
1	1	3	T43	4157.8	80.7%	4.05E+06	95.4%	0.48	420.4	101.8	
2	1	1	T48	925.9	18.0%	1.94E+05	4.6%	0.48	193.3	13.2	
PRECIPITATION				66.6	1.3%	1.11E+03	0.0%	0.50	51.7	30.0	
TRIBUTARY INFLOW				5083.7	98.7%	4.24E+06	100.0%	0.41	346.3	45.7	
***TOTAL INFLOW				5150.3	100.0%	4.24E+06	100.0%	0.40	322.5	45.4	
ADVECTIVE OUTFLOW				3934.9	76.4%	2.77E+06		0.42	281.2	34.7	
***TOTAL OUTFLOW				3934.9	76.4%	2.77E+06		0.42	281.2	34.7	
***RETENTION				1215.4	23.6%	3.61E+05		0.49			
Overflow Rate (m/yr)				6.3					Nutrient Resid. Time (yrs)	0.2356	
Hydraulic Resid. Time (yrs)				0.3554					Turnover Ratio	4.2	
Reservoir Conc (mg/m3)				244					Retention Coef.	0.236	

Overall Mass Balance Based Upon Component:

				Predicted	Outflow & Reservoir Concentrations						
				TOTAL N	Load Variance		Conc	Export			
<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Load</u> kg/yr	<u>%Total</u>	<u>(kg/yr)²</u>	<u>%Total</u>	<u>CV</u>	<u>mg/m³</u>	<u>kg/km²/yr</u>	
1	1	3	T43	20247.8	57.3%	4.28E+07	59.9%	0.32	2047.3	495.9	
2	1	1	T48	12894.7	36.5%	2.74E+07	38.4%	0.41	2692.0	183.2	
PRECIPITATION				2220.0	6.3%	1.23E+06	1.7%	0.50	1724.1	1000.0	
TRIBUTARY INFLOW				33142.5	93.7%	7.02E+07	98.3%	0.25	2257.7	298.0	
***TOTAL INFLOW				35362.5	100.0%	7.14E+07	100.0%	0.24	2214.6	311.7	
ADVECTIVE OUTFLOW				35362.5	100.0%	7.14E+07		0.24	2527.0	311.7	
***TOTAL OUTFLOW				35362.5	100.0%	7.14E+07		0.24	2527.0	311.7	
***RETENTION				0.0		3.64E-01		10.00			
Overflow Rate (m/yr)				6.3					Nutrient Resid. Time (yrs)	0.3731	
Hydraulic Resid. Time (yrs)				0.3554					Turnover Ratio	2.7	
Reservoir Conc (mg/m3)				2652					Retention Coef.	0.000	

West Oakwood Lake
Modeling for a 70 Percent Reduction

West Oakwood

File: C:\BATHTUB oakwood avgs_School\East Oakwood Oct 2005\West Oakwood\westoakwood2-70.btb

Predicted & Observed Values Ranked Against CE Model Development Dataset

Variable	4 Area-Wtd Mean					
	Predicted Values-->			Observed Values-->		
	Mean	CV	Rank	Mean	CV	Rank
TOTAL P MG/M3	75.9	0.38	69.5%	239.4	0.46	96.3%
TOTAL N MG/M3	921.9	0.24	44.8%	3818.7	0.30	98.2%
C.NUTRIENT MG/M3	48.6	0.23	65.0%	186.3	0.39	98.1%
CHL-A MG/M3	25.7	0.38	90.4%	124.2	0.51	100.0%
SECCHI M	0.8	0.20	31.8%	0.3	0.42	5.5%
ORGANIC N MG/M3	750.5	0.32	81.6%	3946.0	0.19	100.0%
TP-ORTHO-P MG/M3	44.1	0.43	65.8%	204.4	0.51	97.8%
ANTILOG PC-1	716.4	0.51	79.4%	10198.2	0.26	99.8%
ANTILOG PC-2	10.2	0.23	80.9%	16.8	0.27	96.6%
(N - 150) / P	10.3	0.47	23.3%	15.9	0.33	46.0%
INORGANIC N / P	5.8	1.69	5.0%	4.6	4.60	3.0%
TURBIDITY 1/M	0.1		2.3%	0.1		2.3%
ZMIX * TURBIDITY	0.2		0.0%	0.2		0.0%
ZMIX / SECCHI	3.0	0.20	20.9%	7.1	0.24	74.9%
CHL-A * SECCHI	19.3	0.30	81.7%	39.5	0.39	97.2%
CHL-A / TOTAL P	0.3	0.37	80.9%	0.5	0.39	94.6%
FREQ(CHL-a>10) %	88.7	0.13	90.4%	100.0	0.00	100.0%
FREQ(CHL-a>20) %	53.7	0.45	90.4%	99.5	0.01	100.0%
FREQ(CHL-a>30) %	28.7	0.73	90.4%	97.4	0.03	100.0%
FREQ(CHL-a>40) %	15.3	0.96	90.4%	93.2	0.07	100.0%
FREQ(CHL-a>50) %	8.3	1.15	90.4%	87.2	0.11	100.0%
FREQ(CHL-a>60) %	4.7	1.32	90.4%	80.1	0.16	100.0%
CARLSON TSI-P	66.5	0.08	69.5%	82.7	0.05	96.3%
CARLSON TSI-CHLA	62.4	0.06	90.4%	77.9	0.04	100.0%
CARLSON TSI-SEC	64.1	0.05	68.2%	76.5	0.05	94.5%

Variable	1 Johnson Lake					
	Predicted Values-->			Observed Values-->		
	Mean	CV	Rank	Mean	CV	Rank
TOTAL P MG/M3	67.4	0.38	64.8%	302.8	0.55	98.0%
TOTAL N MG/M3	960.4	0.26	47.4%	4219.0	0.19	98.8%
C.NUTRIENT MG/M3	47.7	0.24	64.1%	225.9	0.38	98.9%
CHL-A MG/M3	25.1	0.39	89.9%	126.7	0.45	100.0%
SECCHI M	0.8	0.21	32.5%	0.3	0.46	5.2%
ORGANIC N MG/M3	729.8	0.33	80.1%	4029.0	0.21	100.0%
TP-ORTHO-P MG/M3	40.9	0.45	62.8%	260.7	0.62	98.9%
ANTILOG PC-1	686.9	0.52	78.4%	11747.4	0.40	99.8%
ANTILOG PC-2	10.1	0.23	80.6%	16.2	0.44	96.1%
(N - 150) / P	12.0	0.49	30.6%	13.4	0.57	36.5%
INORGANIC N / P	8.7	1.58	10.8%	4.5	8.43	2.9%
TURBIDITY 1/M	0.0		0.0%	0.0		0.0%
ZMIX * TURBIDITY	0.0		0.0%	0.0		0.0%
ZMIX / SECCHI	2.7	0.21	16.5%	6.6	0.44	71.1%
CHL-A * SECCHI	19.2	0.30	81.4%	39.8	0.64	97.3%
CHL-A / TOTAL P	0.4	0.35	84.3%	0.4	0.70	88.3%
FREQ(CHL-a>10) %	88.0	0.14	89.9%	100.0	0.00	100.0%
FREQ(CHL-a>20) %	52.2	0.48	89.9%	99.6	0.01	100.0%
FREQ(CHL-a>30) %	27.4	0.77	89.9%	97.8	0.04	100.0%
FREQ(CHL-a>40) %	14.4	1.01	89.9%	93.9	0.09	100.0%
FREQ(CHL-a>50) %	7.7	1.20	89.9%	88.3	0.15	100.0%
FREQ(CHL-a>60) %	4.3	1.37	89.9%	81.5	0.23	100.0%
CARLSON TSI-P	64.9	0.08	64.8%	86.5	0.09	98.0%
CARLSON TSI-CHLA	62.2	0.06	89.9%	78.1	0.06	100.0%
CARLSON TSI-SEC	63.9	0.05	67.5%	76.7	0.08	94.8%

Segment:	2 North Tetonkaha			Observed Values-->		
	Predicted Values-->			Mean	CV	Rank
Variable	Mean	CV	Rank	Mean	CV	Rank
TOTAL P MG/M3	78.9	0.40	71.1%	191.0	0.36	93.8%
TOTAL N MG/M3	911.7	0.24	44.1%	2942.0	0.72	95.4%
C.NUTRIENT MG/M3	49.5	0.23	65.8%	147.6	0.52	96.2%
CHL-A MG/M3	26.2	0.39	90.9%	137.9	0.50	100.0%
SECCHI M	0.7	0.21	31.1%	0.3	0.35	4.9%
ORGANIC N MG/M3	761.2	0.33	82.3%	3976.0	0.16	100.0%
TP-ORTHO-P MG/M3	44.5	0.43	66.1%	160.3	0.39	96.1%
ANTILOG PC-1	740.3	0.51	80.1%	9651.0	0.44	99.7%
ANTILOG PC-2	10.2	0.23	81.1%	18.5	0.43	97.8%
(N - 150) / P	9.7	0.48	20.3%	14.6	0.83	41.2%
INORGANIC N / P	4.4	1.89	2.7%	0.0	3.06	0.0%
TURBIDITY 1/M	0.1		1.1%	0.1		1.1%
ZMIX * TURBIDITY	0.2		0.0%	0.2		0.0%
ZMIX / SECCHI	3.8	0.21	34.3%	9.1	0.34	86.6%
CHL-A * SECCHI	19.5	0.30	82.0%	42.5	0.61	97.8%
CHL-A / TOTAL P	0.3	0.39	79.7%	0.7	0.61	98.0%
FREQ(CHL-a>10) %	89.4	0.12	90.9%	100.0	0.00	100.0%
FREQ(CHL-a>20) %	55.1	0.44	90.9%	99.7	0.01	100.0%
FREQ(CHL-a>30) %	29.9	0.72	90.9%	98.4	0.03	100.0%
FREQ(CHL-a>40) %	16.1	0.95	90.9%	95.4	0.08	100.0%
FREQ(CHL-a>50) %	8.8	1.14	90.9%	90.8	0.14	100.0%
FREQ(CHL-a>60) %	5.0	1.31	90.9%	84.9	0.22	100.0%
CARLSON TSI-P	67.1	0.08	71.1%	79.9	0.06	93.8%
CARLSON TSI-CHLA	62.7	0.06	90.9%	78.9	0.06	100.0%
CARLSON TSI-SEC	64.3	0.05	68.9%	77.0	0.06	95.1%

Segment:	3 South Tetonkaha			Observed Values-->		
	Predicted Values-->			Mean	CV	Rank
Variable	Mean	CV	Rank	Mean	CV	Rank
TOTAL P MG/M3	86.7	0.41	74.5%	184.0	0.33	93.3%
TOTAL N MG/M3	869.1	0.23	41.2%	4039.0	0.18	98.5%
C.NUTRIENT MG/M3	49.3	0.23	65.7%	160.0	0.27	97.0%
CHL-A MG/M3	26.1	0.39	90.8%	106.3	0.62	99.9%
SECCHI M	0.7	0.21	31.3%	0.3	0.42	6.4%
ORGANIC N MG/M3	773.9	0.32	83.2%	3780.0	0.18	100.0%
TP-ORTHO-P MG/M3	49.1	0.40	69.8%	156.3	0.36	95.9%
ANTILOG PC-1	740.8	0.51	80.1%	8205.7	0.43	99.6%
ANTILOG PC-2	10.3	0.23	81.3%	16.1	0.52	96.0%
(N - 150) / P	8.3	0.49	14.6%	21.1	0.37	62.5%
INORGANIC N / P	2.5	2.56	0.7%	9.4	4.86	12.2%
TURBIDITY 1/M	0.3		19.0%	0.3		19.0%
ZMIX * TURBIDITY	0.6		1.2%	0.6		1.2%
ZMIX / SECCHI	2.6	0.21	15.3%	5.8	0.41	62.8%
CHL-A * SECCHI	19.5	0.30	81.9%	36.1	0.75	96.3%
CHL-A / TOTAL P	0.3	0.42	75.0%	0.6	0.70	95.5%
FREQ(CHL-a>10) %	89.2	0.13	90.8%	100.0	0.00	99.9%
FREQ(CHL-a>20) %	54.8	0.45	90.8%	99.1	0.02	99.9%
FREQ(CHL-a>30) %	29.7	0.73	90.8%	95.8	0.09	99.9%
FREQ(CHL-a>40) %	15.9	0.96	90.8%	89.7	0.19	99.9%
FREQ(CHL-a>50) %	8.7	1.15	90.8%	81.8	0.31	99.9%
FREQ(CHL-a>60) %	4.9	1.31	90.8%	73.0	0.44	99.9%
CARLSON TSI-P	68.5	0.09	74.5%	79.3	0.06	93.3%
CARLSON TSI-CHLA	62.6	0.06	90.8%	76.4	0.08	99.9%
CARLSON TSI-SEC	64.2	0.05	68.7%	75.5	0.08	93.6%

West Oakwood

File: C:\BATHTUB oakwood avgs_School\East Oakwood Oct 2005\West Oakwood\westoakwood2-70.btb

Overall Water & Nutrient Balances

Overall Water Balance

				Averaging Period = 1.00 years				
<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Area</u> km ²	<u>Flow</u> hm ³ /yr	<u>Variance</u> (hm ³ /yr) ²	<u>CV</u> -	<u>Runoff</u> m/yr
1	1	3	T43	40.8	9.9	0.00E+00	0.00	0.24
2	1	1	T48	70.4	4.8	0.00E+00	0.00	0.07
PRECIPITATION				2.2	1.3	0.00E+00	0.00	0.58
TRIBUTARY INFLOW				111.2	14.7	0.00E+00	0.00	0.13
***TOTAL INFLOW				113.4	16.0	0.00E+00	0.00	0.14
ADVECTIVE OUTFLOW				113.4	14.0	3.51E-01	0.04	0.12
***TOTAL OUTFLOW				113.4	14.0	3.51E-01	0.04	0.12
***EVAPORATION					2.0	3.51E-01	0.30	

Overall Mass Balance Based Upon Component:

				Predicted TOTAL P		Outflow & Reservoir Concentrations				
<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Load</u> kg/yr	<u>%Total</u>	<u>Load Variance</u> (kg/yr) ² %Total		<u>CV</u>	<u>Conc</u> mg/m ³	<u>Export</u> kg/km ² /yr
1	1	3	T43	1247.3	78.4%	3.64E+05	95.1%	0.48	126.1	30.5
2	1	1	T48	277.8	17.5%	1.75E+04	4.6%	0.48	58.0	3.9
PRECIPITATION				66.6	4.2%	1.11E+03	0.3%	0.50	51.7	30.0
TRIBUTARY INFLOW				1525.1	95.8%	3.82E+05	99.7%	0.41	103.9	13.7
***TOTAL INFLOW				1591.7	100.0%	3.83E+05	100.0%	0.39	99.7	14.0
ADVECTIVE OUTFLOW				1213.7	76.3%	2.51E+05		0.41	86.7	10.7
***TOTAL OUTFLOW				1213.7	76.3%	2.51E+05		0.41	86.7	10.7
***RETENTION				378.0	23.7%	3.36E+04		0.48		
Overflow Rate (m/yr)				6.3		Nutrient Resid. Time (yrs)			0.2371	
Hydraulic Resid. Time (yrs)				0.3554		Turnover Ratio			4.2	
Reservoir Conc (mg/m3)				76		Retention Coef.			0.237	

Overall Mass Balance Based Upon Component:

				Predicted TOTAL N		Outflow & Reservoir Concentrations				
<u>Trb</u>	<u>Type</u>	<u>Seg</u>	<u>Name</u>	<u>Load</u> kg/yr	<u>%Total</u>	<u>Load Variance</u> (kg/yr) ² %Total		<u>CV</u>	<u>Conc</u> mg/m ³	<u>Export</u> kg/km ² /yr
1	1	3	T43	6074.3	49.9%	3.85E+06	51.0%	0.32	614.2	148.8
2	1	1	T48	3868.4	31.8%	2.47E+06	32.7%	0.41	807.6	55.0
PRECIPITATION				2220.0	18.3%	1.23E+06	16.3%	0.50	1724.1	1000.0
TRIBUTARY INFLOW				9942.7	81.7%	6.32E+06	83.7%	0.25	677.3	89.4
***TOTAL INFLOW				12162.7	100.0%	7.55E+06	100.0%	0.23	761.7	107.2
ADVECTIVE OUTFLOW				12162.7	100.0%	7.55E+06		0.23	869.1	107.2
***TOTAL OUTFLOW				12162.7	100.0%	7.55E+06		0.23	869.1	107.2
***RETENTION				0.0		4.15E-02		10.00		
Overflow Rate (m/yr)				6.3		Nutrient Resid. Time (yrs)			0.3770	
Hydraulic Resid. Time (yrs)				0.3554		Turnover Ratio			2.7	
Reservoir Conc (mg/m3)				922		Retention Coef.			0.000	

Appendix S.
Public Notice and EPA Comments and SDDENR Response
to comments for East Oakwood Lake
and West Oakwood Lake
(Trophic State Index)

East and West Oakwood TSI TMDLs

- The Introduction section (p. 1), the body of the assessment report and the individual TMDLs should be updated to reflect the most recent listing information from the 2006 303(d) list. Also, each individual TMDL (i.e., Appendix DD – JJ) should include the State’s assessment unit ID(s) for the segment(s) covered, and a statement as to whether the segment covered by the TMDL is on the 2006 303(d) list or not.

SDDENR Response - The assessment unit IDs have been added to each lake and language has been added to reflect the 2006 IR. Assessment unit IDs for the smaller waterbodies not specifically listed in the 2006 IR will be created and added to the TMDL language.

EPA response: OK

- The phosphorus TMDLs that were developed to address the TSI impairments in East Oakwood Lake and West Oakwood Lake are well written. Based on the data collected during the assessment it appears that East Oakwood Lake may be impaired for dissolved oxygen and pH. The pH impairment is mentioned in the assessment report, but the dissolved oxygen results do not recognize the impairments. Table 53 (p. 47) indicates that 7 of the 59 dissolved oxygen samples taken in East Oakwood Lake exceed the WQS – an 11.9% violation rate. Based on this violation rate we recommend adding a dissolved oxygen target to the East Oakwood Lake TMDL, and a dissolved oxygen/phosphorus linkage analysis (similar to what UT DEQ has used – see other recently developed lake TMDLs developed by SD DENR). These revisions would allow the phosphorus TMDL to address the dissolved oxygen violations.

SDDENR Response – Language was added to the report showing that the number of DO surface samples that violated water quality standard did not exceed the threshold. In the 2006 Integrated Report Lakes are listed based on the following criteria:

- 10% surface exceedances, based on >20 sample points; or
- 25% surface exceedances, based on <20 sample points

Based on Table 53 (pg 47 in report) there were 40 surface samples collected during the assessment. Of these 40 three exceeded the daily minimum DO standard of 5.0 mg/L. This equates to a 7.5% violation rate.

EPA response: OK



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
REGION 8

1595 Wynkoop Street
DENVER, CO 80202-1129
Phone 800-227-8917
<http://www.epa.gov/region08>

RECEIVED

JUN 13 2008

JUN 23 2008

Ref: 8EPR-EP

Steven M. Pirner
Secretary
South Dakota Department of Environment & Natural Resources
Joe Foss Building
523 East Capitol
Pierre, SD 57501-3181

DEPT. OF ENVIRONMENT AND
NATURAL RESOURCES,
SECRETARY'S OFFICE

Re: TMDL Approvals

East Oakwood Lake; SD-BS-L-E_OAKWOOD_01

West Oakwood Lake; SD-BS-L-W_OAKWOOD_01

Steve
Dear Mr. Pirner:


We have completed our review of the total maximum daily loads (TMDLs) as submitted by your office for the waterbodies listed in the enclosure to this letter. In accordance with the Clean Water Act (33 U.S.C. 1251 *et. seq.*), we approve all aspects of the TMDLs as developed for the water quality limited waterbodies as described in Section 303(d)(1). Based on our review, we feel the separate elements of the TMDLs listed in the enclosed table adequately address the pollutants of concern as given in the table, taking into consideration seasonal variation and a margin of safety.

Some of the TMDLs listed in the enclosed table may be for waters not found on the State's current Section 303(d) waterbody list. The Environmental Protection Agency understands that such waters would have been included on the list had the State been aware, at the time the list was compiled, of the information developed in the context of calculating these TMDLs. This information demonstrates that the non-listed water is, in fact, a water quality limited segment in need of a TMDL. The State need not include these waters that have such TMDLs associated with them on its next Section 303(d) list for the pollutant covered by the TMDL.



Thank you for submitting these TMDLs for our review and approval. If you have any questions, the most knowledgeable person on my staff is Vern Berry and may be reached at 303-312-6234.

Sincerely,

A handwritten signature in cursive script that reads "Carol L. Campbell".

Carol L. Campbell
Acting Assistant Regional Administrator
Office of Ecosystems Protection
and Remediation

Enclosures

APPROVED TMDLS

2 Pollutant TMDLs completed
 2 causes addressed from the 2008 303(d) list
 0 Determinations made that no pollutant TMDL was needed

Waterbody Name & AU ID	TMDL Parameter/ Pollutant (303(d) list ca use)	Water Quality Goal/Endpoint	TMDL WLA/LA/MOS	Supporting Documentation (not an exhaustive list of supporting documents)
East Oakwood Lake* SD-BS-L- E_OAKWOOD_01	Phosphorus (TSI); pH impairment documented in the assessment report**	Secchi – chlorophyll-a TSI ≤ 63.4	LC = 1,178.6 kg/yr LA = 1,178.6 kg/yr WLA = 0 kg/yr MOS = Implicit	<ul style="list-style-type: none"> Watershed Assessment Final Report and TMDL, Oakwood Lakes Watershed Assessment, Brookings County, South Dakota (SD DENR, December 2005)
West Oakwood Lake* SD-BS-L- WOAKWOOD_01	Phosphorus (TSI)	Secchi – chlorophyll-a TSI ≤ 63.4	LC = 1,591.7 kg/yr LA = 1,591.7 kg/yr WLA = 0 kg/yr MOS = Implicit	<ul style="list-style-type: none"> Watershed Assessment Final Report and TMDL, Oakwood Lakes Watershed Assessment, Brookings County, South Dakota (SD DENR, December 2005)

* Indicates that the waterbody has been included on the State's Section 303(d) list of waterbodies in need of TMDLs.
 ** Improvements in the pH readings in East Oakwood Lake can be achieved through reduction of organic loading to the lake as a result of proposed BMP implementation. The TMDL contains a linkage analysis between phosphorous loading and pH in lakes and reservoirs.
 LC = loading capacity; WLA = wasteload allocation; LA = load allocation; MOS = margin of safety
 TMDL = LC = \sum WLA_s + \sum LA_s + MOS

EPA REGION VIII TMDL REVIEW FORM

Document Name:	Oakwood Lakes Watershed Assessment Final Report and TMDL
Submitted by:	Gene Stueven, SD DENR
Date Received:	April 21, 2008
Review Date:	May 22, 2008
Reviewer:	Vern Berry, EPA
Formal or Informal Review?	Formal – Final Approval

This document provides a standard format for EPA Region 8 to provide comments to the South Dakota Department of Environment and Natural Resources on TMDL documents provided to the EPA for either official formal or informal review. All TMDL documents are measured against the following 11 review criteria:

1. Water Quality Impairment Status
2. Water Quality Standards
3. Water Quality Targets
4. Significant Sources
5. Technical Analysis
6. Margin of Safety and Seasonality
7. Total Maximum Daily Load
8. Allocation
9. Public Participation
10. Monitoring Strategy
11. Restoration Strategy

Each of the 11 review criteria are described below to provide the rationale for the review, followed by EPA's comments. This review is intended to ensure compliance with the Clean Water Act and also to ensure that the reviewed documents are technically sound and the conclusions are technically defensible.

1. Water Quality Impairment Status

Criterion Description – Water Quality Impairment Status

TMDL documents must include a description of the listed water quality impairments. While the 303(d) list identifies probable causes and sources of water quality impairments, the information contained in the 303(d) list is generally not sufficiently detailed to provide the reader with an adequate understanding of the impairments. TMDL documents should include a thorough description/summary of all available water quality data such that the water quality impairments are clearly defined and linked to the impaired beneficial uses and/or appropriate water quality standards.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – East and West Oakwood Lakes are chain of lakes in northwestern Brookings County, South Dakota collectively called Oakwood Lakes. West Oakwood Lake is comprised of two interconnected lakes (Johnson Lake and Lake Tetonkaha), and are connected to East Oakwood Lake by a series of culverts. East Oakwood Lake is a 1,000 acre natural lake with a watershed of approximately 14,128 acres, and West Oakwood Lake is a 702 acre natural lake with a watershed of approximately 40,912 acres. These lakes are within the Upper Big Sioux sub-basin (HUC 10170202) of the Big Sioux River Basin. They are listed on South Dakota’s 2008 303(d) list as impaired (SD-BS-L-E_OAKWOOD_01 and SD-BS-L-W_OAKWOOD_01) for trophic state index (TSI) due to nonpoint sources and are ranked as priority 2 (i.e., medium priority) for TMDL development. Data collected during the period of assessment show that East Oakwood Lake is also impaired pH. The overall watershed size is approximately 55,040 acres and drains predominantly agricultural land. Approximately 73 percent of the area is cropland and 20 percent is rangeland. The mean Secchi – chlorophyll *a* TSI during the period of the project assessment was 75.7 and 76.7 for East and West Oakwood Lakes respectively. Based on this data Oakwood Lakes are not currently meeting their designated beneficial uses for warmwater semi-permanent fish life propagation.

2. Water Quality Standards

Criterion Description – Water Quality Standards

The TMDL document must include a description of all applicable water quality standards for all affected jurisdictions. TMDLs result in maintaining and attaining water quality standards. Water quality standards are the basis from which TMDLs are established and the TMDL targets are derived, including the numeric, narrative, use classification, and antidegradation components of the standards.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – Oakwood Lakes are impaired for TSI which is a surrogate measure used to determine whether the narrative standards are being met. South Dakota has applicable narrative standards that may be applied to the undesirable eutrophication of lakes. Data from Oakwood Lakes indicate problems with nutrient enrichment and nuisance algal blooms, which are typical signs of the eutrophication process. The narrative standards being implemented in these TMDLs are:

“Materials which produce nuisance aquatic life may not be discharged or caused to be discharged into surface waters of the state in concentrations that impair a beneficial use or create a human health problem.” (See ARSD §74:51:01:09)

“All waters of the state must be free from substances, whether attributable to human-induced point source discharges or nonpoint source activities, in concentration or combinations which will adversely impact the structure and function of indigenous or intentionally introduced aquatic communities.” (See ARSD §74:51:01:12)

The numeric standard for pH is $\geq 6.5 - \leq 9.0$ standard units.

Other applicable water quality standards are included on pages 6 - 7 of the assessment report.

3. Water Quality Targets

Criterion Description – Water Quality Targets

Quantified targets or endpoints must be provided to address each listed pollutant/water body combination. Target values must represent achievement of applicable water quality standards and support of associated beneficial uses. For pollutants with numeric water quality standards, the numeric criteria are generally used as the TMDL target. For pollutants with narrative standards, the narrative standard must be translated into a measurable value. At a minimum, one target is required for each pollutant/water body combination. It is generally desirable, however, to include several targets that represent achievement of the standard and support of beneficial uses (e.g., for a sediment impairment issue it may be appropriate to include targets representing water column sediment such as TSS, embeddeness, stream morphology, up-slope conditions and a measure of biota).

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – Water quality targets for this TMDL are based on interpretation of narrative provisions found in State water quality standards. In June 2005, SD DENR published *Targeting Impaired Lakes in South Dakota*. This document proposed targeted median growing season Secchi disk/chlorophyll a Trophic State Index (TSI) values for each beneficial use designation category. In South Dakota algal blooms can limit contact and immersion recreation beneficial uses. Also algal blooms can deplete oxygen levels which can affect aquatic life uses. SD DENR considers several algal species to be nuisance aquatic species. TSI measurements can be used to estimate how much algal production may occur in lakes. Therefore, TSI is used as a measure of the narrative standard in order to determine whether beneficial uses are being met.

The median Secchi-chlorophyll *a* TSI for East Oakwood Lake during the period of the assessment was 75.7, and for West Oakwood Lake it was 76.7. Nutrient reduction response modeling was conducted with BATHTUB, an Army Corps of Engineers eutrophication response model. The results of the modeling show that the beneficial use TSI target of ≤ 63.4 for warmwater semi-permanent fish life can be met in East Oakwood Lake with a 67 percent reduction in the total phosphorus loading, and can be met in West Oakwood Lake with a 70 percent reduction in total phosphorus loading.

The proposed water quality targets for these water bodies are: **maintain a growing season median Secchi -chlorophyll *a* TSI at or below 63.4; and pH ≥ 6.5 - ≤ 9.0 s.u. (for East Oakwood Lake only).**

4. Significant Sources

Criterion Description – Significant Sources

TMDLs must consider all significant sources of the stressor of concern. All sources or causes of the stressor must be identified or accounted for in some manner. The detail provided in the source assessment step drives the rigor of the allocation step. In other words, it is only possible to specifically allocate quantifiable loads or load reductions to each significant source when the relative load contribution from each source has been estimated. Ideally, therefore, the pollutant load from each significant source should be quantified. This can be accomplished using site-specific monitoring data, modeling, or application of other assessment techniques. If insufficient time or resources are available to accomplish this step, a phased/adaptive management approach can be employed so long as the approach is clearly defined in the document.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – The TMDLs identify the major sources of phosphorus as coming from nonpoint source agricultural landuses within the watershed. In particular, a loading analysis was done for nutrients and sediment considering various agricultural land use and land management factors. Cropland and rangeland are the primary sources identified. Approximately 73% of the landuse is cropland and 20% is rangeland and pasture in the watershed. Also, there are 51 animal feeding operations in the watershed totalling more than 8,600 animals of which 80 percent are cattle.

5. Technical Analysis

Criterion Description – Technical Analysis

TMDLs must be supported by an appropriate level of technical analysis. It applies to all of the components of a TMDL document. It is vitally important that the technical basis for all conclusions be articulated in a manner that is easily understandable and readily apparent to the reader. Of particular importance, the cause and effect relationship between the pollutant and impairment and between the selected targets, sources, TMDLs, and allocations needs to be supported by an appropriate level of technical analysis.

- Satisfies Criterion

- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – The technical analysis addresses the linkage between the water quality target and the identified sources of nutrients, and describes the models or methods used to derive the TMDL loads that will ensure that the water quality standards are met. Various models and loading analysis were used to determine the cause and effect relationship between the water quality target and the identified sources.

Based on the loads measured during the period of the assessment and the technical analysis, the total phosphorus load (i.e., the loading capacity) for East Oakwood Lake should be 1,178.6 kg/yr, and for West Oakwood Lake is should be 1,591.7 kg/yr to achieve the Secchi depth – chlorophyll-*a* TSI target. The loading calculations are based on estimates of nutrient loading derived from the FLUX model and the predicted TSI values and nutrient load reduction response derived from the BATHTUB mathematical model. The FLUX model was used to facilitate the analysis and reduction of tributary inflow and outflow nutrient loadings for Oakwood Lakes. Output from the FLUX program was then provided as an input file to calibrate the BATHTUB eutrophication response model.

The Agricultural Non-Point Source Model (AGNPS) model was used to simulate the potential nutrient loading from the animal feeding operations within the watershed. Of the 51 feedlots evaluated, 17 were rated at 50 or greater. Runoff from those 17 feedlots have a greater potential to release nutrients to the watershed.

The Annualized Agricultural Non-Point Source Model (AnnAGNPS) model was used to simulate alterations in land use practices and the resulting nutrient reduction response. The nutrient loading source analysis was used to identify necessary controls in the watershed. The analysis included the identification of critical nutrient loading cells, improving pasture conditions, changing tilling practices, improving manure management practices, reducing fertilizer rates and reducing runoff from feedlots. Critical phosphorus cells were defined as those cells having phosphorus yields greater than 1 lb/acre/year (p 119, Figure 75 of assessment report). Implementing a combination of feedlot improvements or removal, converting to the use of no-till on cropland, converting cropland to pastureland or CRP, decreasing fertilizer application rates and minimizing internal loading from the lake by implementing in-lake controls should achieve the necessary phosphorus reductions needed to meet the water quality targets in the Oakwood Lakes.

Improvements in the pH readings in East Oakwood Lake can be achieved through reduction of nutrient loading to the lake. The TMDL contains a linkage analysis between phosphorous loading and pH exceedances in the lake. It is anticipated that meeting the phosphorous load reduction target in East Oakwood Lake will address the pH impairment.

6. Margin of Safety and Seasonality

Criterion Description – Margin of Safety and Seasonality

A margin of safety (MOS) is a required component of the TMDL that accounts for the uncertainty about the relationship between the pollutant loads and the quality of the receiving water body (303(d)(1)(c)). The MOS can be implicitly expressed by incorporating a margin of safety into conservative assumptions used to develop the TMDL. In other cases, the MOS can be built in as a separate component of the TMDL (in this case, quantitatively, a TMDL = WLA + LA + MOS). In all cases, specific documentation describing the rationale for the MOS is required.

Seasonal considerations, such as critical flow periods (high flow, low flow), also need to be considered when establishing TMDLs, targets, and allocations.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – An appropriate margin of safety is included in each TMDL through conservative assumptions in the derivation of the targets and in the modeling. Additionally, ongoing monitoring has been proposed to assure water quality goals are achieved. Seasonality was adequately considered by evaluating the cumulative impacts of the various seasons on water quality and by proposing BMPs that can be tailored to seasonal needs.

7. TMDL

Criterion Description – Total Maximum Daily Load

TMDLs include a quantified pollutant reduction target. According to EPA regulations (see 40 CFR 130.2(i)). TMDLs can be expressed as mass per unit of time, toxicity, % load reduction, or other measure. TMDLs must address, either singly or in combination, each listed pollutant/water body combination.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – The TMDL established for East Oakwood Lake is a 1,178.6 kg/yr total phosphorus load to the lake (67% reduction in annual total phosphorus load). The TMDL established for West Oakwood Lake is a 1,591.7 kg/yr total phosphorus load to the lake (70% reduction in annual total phosphorus load). These are “measured loads” which are based on the flow and concentration data collected during the period of the assessment. Since the annual loading varies from year-to-year, these TMDLs are considered long term average phosphorus loads.

For parameters such as phosphorus, for which narrative water quality criteria often apply, attainment of WQS cannot always be judged on a daily basis. Assessment of cumulative loading impacts is necessary to

understand how to achieve WQS and to estimate the allowable loading capacity; therefore identifying long-term allocations for such situations is appropriate and informative from a management perspective. For TMDLs in which it is determined that a non-daily allocation is more meaningful in understanding the pollutant/waterbody dynamics, EPA recommends that practitioners identify and include such an allocation, as well as a daily load expression with the final TMDL submission. Unfortunately, the Oakwood Lakes TMDLs were developed long before EPA's draft technical guidance for developing daily loads was released.

The TMDL targets, calculations and loads developed by SD DENR for the East and West Oakwood Lake TMDLs are based on an annual timeframe rather than a "daily" load. EPA recognizes that, under the specific circumstances, the state may deem this the most appropriate timeframe (i.e., the TSI water quality target is based on an interpretation of narrative water quality standards which naturally does not include an averaging period). EPA notes that the East and West Oakwood Lake TMDL calculations for phosphorus can be readily approximated to a daily format through simple division of the annual loads by the number of days in a year. For East Oakwood Lake this would be a daily load of 3.23 kg/day of phosphorus, and for West Oakwood Lake it would be a daily load of 4.36 kg/day of phosphorus. However, simply dividing an annual loads by 365 would produce an "average" daily loads that would not match the actual phosphorus load reaching the lake on a given day. EPA's draft technical guidance for developing daily loads mentions that because many TMDLs are developed for precipitation-driven parameters, one number will often not represent an adequate daily load value. Instead, the guidance recommends that a range of values might need to be presented to account for allowable differences in loading due to seasonal or flow-related conditions (e.g., daily maximum and daily median). EPA will work with SD DENR to ensure these daily load considerations are included in future TMDLs.

8. Allocation

Criterion Description – Allocation

TMDLs apportion responsibility for taking actions or allocate the available assimilative capacity among the various point, nonpoint, and natural pollutant sources. Allocations may be expressed in a variety of ways such as by individual discharger, by tributary watershed, by source or land use category, by land parcel, or other appropriate scale or dividing of responsibility. A performance based allocation approach, where a detailed strategy is articulated for the application of BMPs, may also be appropriate for nonpoint sources. Every effort should be made to be as detailed as possible and also, to base all conclusions on the best available scientific principles.

In cases where there is substantial uncertainty regarding the linkage between the proposed allocations and achievement of water quality standards, it may be necessary to employ a phased or adaptive management approach (e.g., establish a monitoring plan to determine if the proposed allocations are, in fact, leading to the desired water quality improvements).

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – These TMDLs address the need to reduce phosphorus loading in order to attain water quality standards in East and West Oakwood Lakes. The allocations for the TMDLs are "load

allocations” attributed to nonpoint sources. There are no point source discharges of phosphorus in this watershed. The source allocations for phosphorus are assigned to nonpoint source runoff from agricultural sources in the watershed.

9. Public Participation

Criterion Description – Public Participation

The fundamental requirement for public participation is that all stakeholders have an opportunity to be part of the process. Notifications or solicitations for comments regarding the TMDL should clearly identify the product as a TMDL and the fact that it will be submitted to EPA for review. When the final TMDL is submitted to EPA for review, a copy of the comments received by the state should be also submitted to EPA.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – The State’s submittal includes a summary of the public participation process that has occurred which describes the ways the public has been given an opportunity to be involved in the TMDL development process. In particular, the State has encouraged participation through public meetings in the watershed and has had individual contact with residents in the watershed. Also, the draft TMDL was posted on the State’s internet site to solicit comments during the public notice period. The level of public participation is found to be adequate.

10. Monitoring Strategy

Criterion Description – Monitoring Strategy

TMDLs may have significant uncertainty associated with selection of appropriate numeric targets and estimates of source loadings and assimilative capacity. In these cases, a phased TMDL approach may be necessary. For Phased TMDLs, it is EPA’s expectation that a monitoring plan will be included as a component of the TMDL documents to articulate the means by which the TMDL will be evaluated in the field, and to provide supplemental data in the future to address any uncertainties that may exist when the document is prepared.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case. Comments or questions provided for informational purposes.

SUMMARY – East and West Oakwood Lakes will continue to be monitored through the statewide lake assessment project. Post-implementation monitoring will be necessary to ensure that the specified TMDL loads and water quality targets have been reached, and the beneficial uses are protected.

11. Restoration Strategy

Criterion Description – Restoration Strategy

At a minimum, sufficient information should be provided in the TMDL document to demonstrate that if the TMDL were implemented, water quality standards would be attained or maintained. Adding additional detail regarding the proposed approach for the restoration of water quality is not currently a regulatory requirement, but is considered a value added component of a TMDL document.

- Satisfies Criterion
- Satisfies Criterion. Questions or comments provided below should be considered.
- Partially satisfies criterion. Questions or comments provided below need to be addressed.
- Criterion not satisfied. Questions or comments provided below need to be addressed.
- Not a required element in this case, Comments or questions provided for informational purposes.

SUMMARY – The South Dakota DENR will work with the East Dakota Water Development District and various stakeholders to initiate an implementation project for Oakwood Lakes. Implementation of various best management practices will be necessary to meet or exceed the WQ and TMDL targets/goals. This includes improvements to pasture grazing practices, implementation of no-till residue management on small grain and row crop lands, reducing fertilizer application rates, improved manure management practices, reduction in feedlot runoff and in-lake controls. Additional BMPs may be necessary if the water quality controls are not met after the first round of BMPs are implemented.