
Overview


The ML350 Gen9 is the 2P premium server which delivers a class-leading combination of performance, availability, expandability, manageability, reliability and serviceability making it the choice for remote offices, growing businesses and data centers.

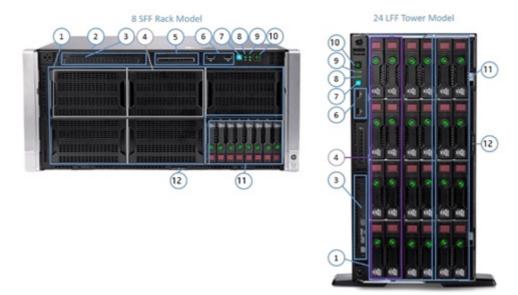

Front view details for Rack (SFF) and Tower (LFF)

- 1. Optional HDD cage Drive Cage Bays (Rack shown with blanks. Tower shown with 16 LFF Optional drives)
- 2. Quick removal access panel (shown on Rack)
- 3. Slim Height Drive Bay for Optional Slim Height SATA DVD-ROM or DVD RW Optical Drive (shown on Tower)
- 4. Media Drive Cage Bays (Rack supports two half height or one full height device; Tower supports one half height device)
- 5. Systems Insight Display Bay for Optional SID (Rack models only)
- 6. Two (2) USB 2.0 connectors
- 7. Unit ID LED button
- 8. Health LED
- 9. NIC Activity LED
- 10. Power On /Standby button & system power LED button
- 11. Eight (8) SFF (Rack)/LFF (Tower) SAS/SATA HDD cage
- 12. Serial label pull tab

Overview

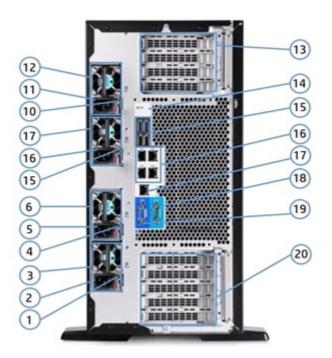

Rear View (Tower Model)

- 1. Power supply Power LED
- 2. Power supply Power connection
- 3. HP Flexible Slot 4 Power Supply (Optional 500w Power Supply shown)
- 4. Power supply Power LED
- 5. Power supply Power connection
- 6. HP Flexible Slot 3 Power Supply (Optional 500w Power Supply shown)
- 7. Power supply Power LED
- 8. Power supply Power connection
- 9. HP Flexible Slot 2 Power Supply (Optional 500w Power Supply shown)
- 10. Power supply Power LED
- 11. Power supply Power connection
- 12. HP Flexible Slot 1 Power Supply (Standard Entry Model 500w Power Supply shown)
- 13. PCI Slots (Slots 1-4) Slot 1 and 3 can support Optional GPU
- 14. Unit ID LED
- 15. USB 3.0 Connectors (2) top & USB 2.0 Connectors (2) bottom
- 16. Embedded 4 x 1GbE Network Adapter
- 17 Dedicated iLO Connector
- 18. Serial Connector
- 19. Video Connector
- 20. PCI Slots (Slots 5-9) (requires Optional second processor)-Slot 6 and 8 can support Optional GPU



Overview



Interior View (Rack Model)

- 1. System fans: Three (3) fans are standard Optional Five (5) systems fans are shown.
- 2. Twenty four DIMM slots: DDR4 Registered (RDIMM) or Load Reduced Registered (LRDIMM) memory
- 3. Nine (9) PCIe expansion slots (8 PCIe Gen3 and 1 PCIe Gen2)
- 4. Two (2) processors and heatsinks (Second Processor is Optional)
- 5. Optional HP Flexible Smart Array or Smart HBA (not shown here)
- 6. Optional HP Smart Storage Battery is under the system fans



Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following URL: http://www.intel.com/xeon

Intel® Xeon® processor E5-2600 v3 product family is designed to deliver the best combination of performance, built-in capabilities, and cost-effectiveness. One (or two) of the following Intel® Xeon® E5-2600 v3 processors based on the model

Processor	Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
One of the following	E5-2699v3	2.3GHz	18	45MB	145W	9.6GT/s	2133
depending on Model	E5-2698v3	2.3GHz	16	40MB	135W	9.6GT/s	2133
	E5-2697v3	2.6GHz	14	35MB	145W	9.6GT/s	2133
	E5-2695v3	2.3GHz	14	35MB	120W	9.6GT/s	2133
	E5-2690v3	2.6GHz	12	30MB	135W	9.6GT/s	2133
	E5-2683v3	2.0GHz	14	35MB	120W	9.6GT/s	2133
	E5-2680v3	2.5GHz	12	30MB	120W	9.6GT/s	2133
	E5-2670v3	2.3GHz	12	30MB	120W	9.6GT/s	2133
	E5-2667v3	3.2GHz	8	20MB	135W	9.6GT/s	2133
	E5-2660v3	2.6GHz	10	25MB	105W	9.6GT/s	2133
	E5-2650v3	2.3GHz	10	25MB	105W	9.6GT/s	2133
	E5-2650Lv3	1.8GHz	12	30MB	65W	9.6GT/s	2133
	E5-2643v3	3.4GHz	6	20MB	135W	9.6GT/s	2133
	E5-2640v3	2.6GHz	8	20MB	90W	8.0GT/s	1866
	E5-2630v3	2.4Ghz	8	20MB	85W	8.0GT/s	1866
	E5-2630Lv3	1.8GHz	8	20MB	55W	8.0GT/s	1866
	E5-2620v3	2.4GHz	6	15MB	85W	8.0GT/s	1866
	E5-2609v3	1.9GHz	6	15MB	85W	6.4GT/s	1600
	E5-2603v3	1.6GHz	6	15MB	85W	6.4GT/s	1600

NOTE: E5-2623 v3 will be available in Early 2015.

Chipset

Intel® C610 Series Chipset Intel® E5-2600v3 Processor Family **NOTE:** For more information regarding Intel chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/.

On System ManagementHP iLO (Firmware HP iLO4 2.0) 4GB NAND Chipset

NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the iLO QuickSpecs.



Standard Features

Memory One of the following depending on Model	Type HP SmartMemory DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)				
	DIMM Slots Available	24	(12 DIMM slots per processor, 4 channels per processor, 3 DIMMs per channel)		
	Maximum Capacity (LRDIMM)	768GB	(24 x 16GB RDIMM)		
	Maximum Capacity (RDIMM)	384GB	(24 x 32GB LRDIMM)		
Memory Protection	Advanced ECC		ses single device data correction to detect and correct Itibit error that occurs within a single DRAM chip.		
	Online spare	Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.			

Expansion Slots	Expansion Slots #	Technology	/ Bus Width	Connector Width	Bus Number	Form Factor	Notes
	9	PCle 3.0	x4	x8		Full Length/Full Height	For processor 2
	8	PCle 3.0	x16	x16		Full Length/Full Height	For processor 2
	7	PCle 3.0	x4	x8		Full Length/Full Height	For processor 2
	6	PCle 3.0	x16	x16		Full Length/Full Height	For processor 2
	5	PCle 2.0	x4	x8		Half Length, Full Height Slot	For processor 2
	4	PCle 3.0	x4	x8	0	Full Length/Full Height	For processor 1
	3	PCle 3.0	x16	x16	0	Full Length/Full Height	For processor 1
	2	PCle 3.0	x4	x8	0	Full Length/Full Height	For processor 1
	1	PCle 3.0	x8	x16	0	Full Length/Full Height	For processor 1

NOTE: Bus number - Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

NOTE: Nine total expansion slots. Three PCIe 3.0 x16 (x16 speed); One PCIe 3.0 x16 (x8 speed); Four PCIe 3.0 x8 (x4 speed); One PCIe 2.0 x8 (x4 speed).

Storage Controller	Entry Models	HP Dynamic Smart Array B140i
One of the following	Base Models	HP Flexible Smart Array P440ar/2GB
depending on Model	Performance Models	HP Flexible Smart Array P440ar/2GB



Standard Features

Internal Storage Devices One of the following depending on Model	Optical Drives	Optional SATA 9.5mm DVD-ROM Optical Drive Optional SATA 9.5mm DVD RW Optical Drive NOTE: Optical is optional in entry, base and performance BTO models. None ship standard
	Hard Drive Bays	 (8) Hot plug SFF SAS/SATA HDD bays; upgradable to (48) (8) Hot Plug LFF SAS/SATA HDD Bays; upgradable to (24) NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF HDD Blank Kit or P/N 666986-B21: HP LFF HDD Blank Kit. These part numbers for single HDD blanks below are also provided should the customer require replacement HDD blanks for their server.

Maximum Internal Storage One of the following depending on Model	Hot Plug LFF SAS Hot Plug LFF SATA Hot Plug SFF SAS Hot Plug SFF SATA Hot Plug SFF SATA SSD Hot Plug SFF SAS SSD Hot Plug LFF SATA SSD	CAPACITY 144TB 144TB 48TB 57.6TB 76.8TB 76.8TB 38.4TB	CONFIGURATION 24 x 6TB 24 x 6TB 48 x 1TB 48 x 1.2TB 48 x 1.6TB 48 x 1.6TB 24 x 1.6TB
---	--	--	---

Power Supply

One of the following depending on Model

HP 500W Flex Slot Platinum Hot Plug Power Supply HP 800W Flex Slot Platinum Hot Plug Power Supply HP 1400W Flex Slot Platinum Plus Hot Plug Power Supply

HP Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HP ProLiant Gen9 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the ProLiant Power Cables web page.

To review the power requirements for your selected system, please use the HP Power Advisor Tool located at www.hp.com/go/hppoweradvisor.

Power specifications and technical content for all HP Server power supplies can be found at www.hp.com/go/proliant/powersupply.

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.



Standard Features

System Fans		Non-redundant	Redundant		
One of the following	1P model	3 fans	6 fans		
depending on Model	NOTE: Fan Redundancy is standard in performance model. Option 725878-B21 includes four fans and PCIe baffles are required for fan redundant kit.				
	2P model	4 fans	8 fans		
Interfaces	Serial	1			
	Video	1 (rear)			
	Network RJ-45 (Ethernet)	4			
	HP iLO Remote Management N	etwork Port 1 Gb Dedicated			
	SD Slot	1 (internal)			
	NOTE: The Micro-SD slot is not a hot-pluggable device. Customers should not attempt to plug an Micro-SD card into the Micro-SD slot while the server is powered.				
	USB 2.0 Ports	5 (2 front, 2 rear, 1 inter	nal)		
	USB 3.0	3 (2 rear, 1 internal)			
Support for ProLiant Servers	Virtualization Software and lates	SLES) HP's Certified and Supported ProLia at listing of software drivers available p.com/go/ossupport and our driver de	for your server, please visit ou		
Upgradeability	Upgradable for two processors (NOTE: Total 6, 8, 10, 12, 14, 16 Up to 24 DIMM slots available for Up to 48 SFF Hard Drive Bays; 8 PCIe 3.0 and 1 PCIe 2.0 I/O s Redundant Power Supply and R Optional optical drive (up to 1) Optional System Insight Display	5, 18 cores. or higher Memory capacity Or 24 LFF Hard Drive Bays lots for additional communications a redundant Fans	and storage expansion		



Standard Features

iance PCle PXE WOL Nove IPMI Micro USB SMB ASHI	2.0b Compliant 3.0 Compliant Support Support I Certified 2.0, SMASH CLP, DCMI 1.0 compliant soft® Logo certifications 3.0 Support OS 2.7.1 RAE A3/A4 gy Star
Integ 32 bi	color: maximum resolution of 1600 x 1200 rated Matrox G200 video standard color: maximum resolution of 1280 x 1024 16 MB Flash 256 MB DDR3
Unifie mana ProLi Mode NOTI of leg UEFI • • • • • • • • • • • • • • • • • • •	erver UEFI /Legacy ROM d Extensible Firmware Interface (UEFI) is an industry standard that provides better geability and more secured configuration while interacting with your server at boot time. HP ant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot The UEFI System Utilities function is analogous to the HP ROM-Based Setup Utility (RBSU) acy BIOS. For more information, please visit http://www.hp.com/go/proliantuefi/docs. enables numerous new capabilities specific to HP ProLiant servers such as: Secure Boot Operating system specific functionality Support for > 2.2 TB (using GPT) boot drives USB 3.0 Stack Embedded UEFI Shell Mass Configuration Deployment Tool using HP RESTful API. PXE boot support for IPv6 networks Boot support for option cards that only support a UEFI option ROM ore information please visit www.hp.com/go/proliant/uefi. E: For UEFI Boot Mode, boot environment and OS image installations should be configured riv to support UEFI. E: HP UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode factory.
For n NOT prope NOT in the	ore information please visit www.hp E: For UEFI Boot Mode, boot enviro rly to support UEFI. E: HP UEFI FIO Setting (758959-B2

Form Factor



Standard Features		
Embedded Managemer	ntHP Integrated Lights- Out (HP iLO)	Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at www.hp.com/go/ilo.
	UEFI	Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at www.hp.com/go/ProLiant/uefi.
	HP RESTful API	RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server www.hp.com/go/restfulapi.
	Intelligent Provisioning	Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at www.hp.com/go/intelligentprovisioning.
	Embedded Remote Support	HP's embedded remote support, used with Insight Online direct connect or HP Insight Remote Support, allows HP ProLiant servers to transmit hardware events directly to HP or an HP Authorized Partner for automated phone home support. Learn more at www.hp.com/go/insightonline/info.
Server utilities	HP Smart Update	Optimize firmware and driver updates with HP Smart Update solutions. Learn more at www.hp.com/go/smartupdate.
	HP Systems Insight Manager (HP SIM)	HP SIM allows you to monitor the health of your HP ProLiant Servers and HP Integrity Servers, and also provides you with basic support for non-HP servers. HP SIM also integrates with HP SUM to provide quick and seamless firmware updates. Learn more at www.hp.com/go/sim.
	Scripting Tool Kit and Windows PowerShell	Provision 1 to many servers using your own scripts to discover and deploy them with HP Scripting Tool Kit for Windows and Linux or HP Scripting Tools for Windows PowerShell. Learn more at www.hp.com/go/ProLiantSTK or www.hp.com/go/powershell.
	HP RESTful Interface Tool	HP RESTful Interface tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at www.hp.com/go/restfulapi.
	HP iLO Mobile Application	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: www.hp.com/go/ilo/mobileapp.
	HP Insight Online	HP Insight Online, available at no additional cost as part of your HP warranty, Care Pack or contractual support agreement with HP, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at www.hp.com/go/insightonline/info.



Standard Features	
	NOTE: The Service Pack for ProLiant (which includes HP SUM) can be downloaded from www.hp.com/go/spp/download. More information can be found: http://www.hp.com/go/SmartUpdate, www.hp.com/go/spp and http://www.hp.com/go/hpsum.
Security	Power-on password Setup password Serial interface control Power switch security Administrator's password TPM 1.2 UEFI
Warranty	This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html

Optional Features Embedded ManagementiLO Advanced HP iLO Advanced licenses offer smart remote functionality without compromise, for all HP ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HP iLO Advanced at www.hp.com/go/iloadvanced. HP Insight Control, lets you deploy, migrate, monitor, remote control, and Server Management HP Insight Control optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol. **HP OneView** Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity, see www.hp.com/go/oneview. NOTE: HP OneView support for HP ProLiant Gen9 rack (DL) and blade (BL) servers will be available with a future version of HP OneView to be released Early 2015. Customers may purchase HP OneView licenses now, and will be granted rights to use HP Insight Control software and transition to HP OneView with a free upgrade, when available. Customers also have the option to purchase HP Insight Control. **HP Insight Cluster** HP Insight Cluster Management Utility is a hyperscale-optimized **Management Utility** management framework that includes software for the provisioning, (CMU) control, performance management and monitoring of groups of nodes and infrastructure. Learn more at www.hp.com/go/cmu. **Rack and Power** HP Rack and Power Infrastructure products and services create highly efficient and intelligent Infrastructure solutions for existing or new IT data centers. HP Rack and Power infrastructure solutions - rack infrastructure, power protection and management, performance optimized data centers (PODs) - are the foundation you are looking for to help secure your long-term IT success. These products are

designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, HP is uniquely positioned to address the key concerns of power, cooling, cable management



and system access.

Learn more at HP Rack and Power Infrastructure.

Optional Features	
HPC Interconnects	NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HP Cluster Platform product portfolio. These high-speed interconnects are fully supported by HP when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html.
Storage Software	Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities. Storage software that gets the job done:
	 Data Protection and Recovery Software Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity. Data Archive and Migration Software HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage. Storage Resource Management Software (SRM) HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments. Data Replication Software HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting. Storage Device Management Software Maximize your investment in HP storage and networking with software that enables hardware- specific configuration, performance tuning and connectivity management. HP StoreVirtual VSA With HP StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HP ProLiant Gen9 servers include a 3-year limited license for HP StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HP StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at www.hp.com/go/vsa1TB.
One Config Simple (SCE)	SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator.



Service and Support

HP Technology Services HP Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HP to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.
 Protect your business beyond warranty with HP Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.
 Ontimized Support

Optimized Support
recommendationHP Proactive Care - Call to Repair commitment, 24x7 coverage, three year Care Pack Service
Prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive
consultations when your products are connected to HP. Includes enhanced escalation management
and the industry's highest level of hardware support commitment - hardware will be returned to
operating conditions within six (6) hours after you open your case. Comes with collaborative
software call management with two hour call back to reduce troubleshooting.

As a leading global support provider for Microsoft, Red Hat, VMware, SUSE and other operating systems, HP is able to simplify and shorten your time to resolution with one call for hardware or software questions. http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf.

HP ProLiant Server Hardware Installation Help ensure your new HP ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf.

Standard Support HP Proactive Care - 24x7 coverage, three year Care Pack Service

recommendation

This service helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. Includes four hour response for hardware, and collaborative call management for software with a two hour callback. http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf.

HP ProLiant Hardware Installation

Help ensure your new HP ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf.

Related Services

These services help modernize key systems and leverage new technology to support a changing business climate and prepare you for the new style of IT. HP understands the needs of the data center of the future and will serve as your guide for the journey. www.hp.com/services/consulting.

Data Privacy Services

Protect your data through better media management. HP Data privacy services help manage and protect sensitive data. www.hp.com/services/dataprivacy.

Factory Express for Servers and storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Choose how your factory solutions are built, tested, integrated, shipped and deployed. http://www.hp.com/go/factory-express.

HP Foundation Care

Hardware and software support services provide easy connection to HP to resolve support issues



Service and Support

quickly. Includes collaborative call management for industry leading software; full software support may also be purchased, giving you one place to call for help.www.hp.com/services/foundationcare.

Additional HP Care Pack services can be found at: www.hp.com/go/cpc.

Parts and Materials HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction.



Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

2. HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

3. If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

4. Not all models are available in all regions. Check with your local country HP offices for availability.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Hard Drive Blank Kit or P/N 666986-B21: HP LFF Hard Drive Blank Kit.

NOTE: All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the ProLiant Power Cables web page.

CAUTION: HP recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

	Entry Models	Base Models	
[SKU Number]	765819-xx1	765820-xx1	
Model Name	HP ProLiant ML350 Gen9 E5-2609v3 8GB-R B140i	HP ProLiant ML350 Gen9 E5-2620v3 16GB-R	
	8LFF 500W PS Entry Server	P440ar 8SFF 500W PS Base Server	
Processor	Intel® Xeon® E5-2609v3	Intel® Xeon® E5-2620v3	
Number of Processors	0	ne	
Memory	8GB (1x8GB Registered DIMMs, 2133 MHz)	16GB (1x16GB Registered DIMMs, 2133 MHz)	
Network Controller	HP Embedded 1Gb Ethe	ernet 4-port 331i Adapter	
Storage Controller	HP Dynamic Smart Array B140i	HP Smart Array P440ar/2G Controller	
Hard Drive	None ship standard; includes 6 LFF hard drive blanks	None ship standard; includes 6 SFF hard drive blanks	
Internal Storage	8 LFF HDD Bays (upgradable to 24)	(8) Hot plug SFF SAS/SATA HDD bays; upgradable to (48)	
Optical Drive Bay	1; (Optional: DVD	D-ROM, DVD-RW)	
Optical Drive	Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive)		
PCI-Express Slots	9 PCI	e slots	
Power Supply	(1) HP 500W Flex Slot	Platinum Power Supply	
Fans	3 hot plug fans, non-redundant		
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control (optional)		
Form Factor	Towe	r (5U)	
Warranty		bor, 3-Year Onsite support with next business day onse	



Pre-configured Models

	Energy Star Models	Performance Models	
[SKU Number]	765821-xx1	765822-xx1	
Model Name	HP ProLiant ML350 Gen9 2xE5-2630v3 2P 32GB-R	HP ProLiant ML350 Gen9 2xE5-2650v3 2P 32GB-R	
	P440ar 8SFF 2x800W PS ES Rack Server	P440ar 8SFF 2x800W PS ES Tower Server	
Processor	Intel® Xeon® E5-2630v3	Intel® Xeon® E5-2650v3	
Number of	Τ\	NO	
Processors			
Memory	32GB (2x16GB Registe	ered DIMMs, 2133 MHz)	
Network Controller	HP Embedded 1Gb Ethe	ernet 4-port 331i Adapter	
Storage Controller	HP Smart Array P440ar/2G Controller		
Hard Drive	None ship standard; includes 6 SFF hard drive blanks		
Internal Storage	(8) Hot plug SFF SAS/SATA HDD bays; upgradable to (48)		
Optical Drive Bay	1; (Optional: DVD-ROM, DVD-RW)	Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive)	
Optical Drive	Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive)		
PCI-Express Slots	9 PCIe slots		
Power Supply	(2) HP 800W Flex Slot Platinum Power Supply		
Fans	8 hot plug fans, redundant		
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control		
Energy Oter	(optional)		
Energy Star	Meets Energy Star requirements		
Accessories		included	
Form Factor	Rack (5U), HP Easy Install Rails	Tower (5U)	
Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response		

Country Code Key

xx1 = 001	US
xx1 = 011	AU
xx1 = 031	UK
xx1 = 291	Japan
xx1 = 371	AP
xx1 = 421	EU
xx1 = AA1	PRC
xx=B21	Worldwide

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.



Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.

2. FIO indicates that this option is only available as a factory installable option.

3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

<u> </u>		<u> </u>
HP ProLiant ML350 Gen9 Hot	HP ProLiant ML350 Gen9 Hot	HP ProLiant ML350 Gen9 Hot
Plug 8SFF Configure-to-order	Plug 8SFF Configure-to-order	Plug 8LFF Configure-to-order
Rack Server	Tower Server	Tower Server
754534-B21	754536-B21	754537-B21
2 (optional) x HP Smart Socket Guides		
24 DIMM slots for RDIMM, LRDIMM DDR4 Memory		
HP Dynamic Smart Array B140i		
9 Standard (8 FH/FL, 1 FH/HL)		
8SFF H	Hot Plug 8LFF Hot Plug	
HP Embedded 1Gb Ethernet 4-port 331i Adapter		
3 hot plug fans, non redundant		
iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight		
Control (optional)		
2 front, 2 internal, 4 rear		
	Plug 8SFF Configure-to-order Rack Server 754534-B21 2 (0 24 DIMM 8SFF H HP Emb	Plug 8SFF Configure-to-order Rack Server Plug 8SFF Configure-to-order Tower Server 754534-B21 754536-B21 2 (optional) x HP Smart Socket Gui 24 DIMM slots for RDIMM, LRDIMM DDR4 HP Dynamic Smart Array B140i 9 Standard (8 FH/FL, 1 FH/HL) 8SFF Hot Plug HP Embedded 1Gb Ethernet 4-port 331i 3 hot plug fans, non redundant iLO Management (standard), Intelligent Provisioning (standard), i Control (optional)

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HP Processors	 Select one or two processors from Core options-Processor section below, If one processor is desired, select one xxxxx-L21 If two processors are desired, select one xxxxx-L21 and one xxxxx-B21. Up to 2 processors supported. Mixing different processor models is not supported. DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.
	For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.
HP Memory	Select one or more memory from Core options-Memory section below,
	 LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM. HP memory from previous generation servers are not qualified or warranted with this HP ProLiant Server. HP SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.



Configuration Information - Factory Integrated Models

- Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient.
- Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: www.hp.com/go/ddr4memory-configurator

HP Power Supplies

- Select one or more power supplies from Core Options-Power Supplies section below:
 - Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HP Power Advisor tool to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.
 - Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

Step 3: Choose Additional Factory Integratable Options

HP Networking	Select a standup NIC adapter from Core options-Networking section below,
	Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs
	 These options are upgradeable and can be changed from the original configuration after the server is shipped.
	• For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
HP Drives	Select one or more drives from Core options-HP Drives section below:
	 The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
	• The HP ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HP Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".
HP Graphics Options	Select one or more graphics adapter from Additional options section below.
	 Please see the HP Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor This section may contain FIO options, please see HP Computation & Graphics Accelerators
UD Unique Ontiene	section below.
HP Unique Options	Select one or more Unique options from Core options section below.
	 This section may contain FIO options, please see the Unique options section below. FIO indicates that this option is only available as a factory installable option.
HP Cooling Options	Select one or more Fan Kits from Core options section below.
	This section may contain FIO options, please see HP Cooling Options section below.

FIO indicates that this option is only available as a factory installable option.

HP Storage Controllers Select one or more Storage options from Additional options section below.



HP Rail Kits

Configuration Information - Factory Integrated Models

- The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22
- This section may contain FIO options, please see HP Storage Controllers section below.
- FIO indicates that this option is only available as a factory installable option.

Select one type of rail kit from Additional options section below.

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- To assist in the installation of the server into the rack, an optional installation tool is available by contacting your local services representative (p/n 695539-001).
- See HP Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

CAUTION: HP recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.



Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Unique Options	HP ML350 Gen9 8SFF Hard Drive Cage Kit NOTE: Add'I 8SFF Hard Drive Cage, allowing for up 48SFF Drive Bays.	778157-B21
	HP ML350 Gen9 8LFF Hot Plug Drive Cage Kit NOTE: Add'I 8LFF Hard Drive backplane allowing for up 24FF Drive Bays.	726547-B21
	HP ML350 Gen9 Redundant Fan Kit NOTE: Add'l 4 fans for redundancy.	725878-B21
	HP ML350 Gen9 Flexible Smart Array Controller Mini-SAS Cable Kit NOTE: Mini-SAS Cable Kit for Flexible Smart Array Controller.	765652-B21
	HP ML350 Gen9 Smart Array Cable Kit NOTE: Mini-SAS Cable Kit for stand up P series Smart Array Card.	765650-B21
	HP ML350 Gen9 LFF Media Cage Kit NOTE: Cage for converting LFF drive bays to a media device.	726561-B21
	HP ML350 Gen9 Host Bus Adapter Mini-SAS Cable Kit NOTE: Mini-SAS Cable kit for Host Bus Adapter.	765648-B21
	HP ML350 Gen9 Graphic Card Support Kit NOTE: Cables and brackets for supporting graphic cards.	726565-B21
	HP ML350 Gen9 SFF Media Cage Kit NOTE: Cage for converting SFF drive bays to a media device.	726545-B21
	HP ML350 Gen9 Tower to Rack Conversion Kit NOTE: For converting a tower model to a rack model.	726567-B21
	HP ML350 Gen9 System Insight Display Kit NOTE: For rack model only.	726563-B21
HP Processors	Entry Processors - E5-2600v3 series Processors	
	HP ML350 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit	726661-B21
	HP ML350 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit	726661-L21
	HP ML350 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit	726664-B21
	HP ML350 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit	726664-L21
	Base Processors - E5-2600v3 series Processors	
		726651-B21
	Base Processors - E5-2600v3 series Processors HP ML350 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor	726651-B21 726651-L21
	Base Processors - E5-2600v3 series Processors HP ML350 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit HP ML350 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO	
	Base Processors - E5-2600v3 series Processors HP ML350 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit HP ML350 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit HP ML350 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor	726651-L21



Core Options

HP ML350 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit	726658-L21
HP ML350 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit	726671-B21
HP ML350 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit	726671-L21
Performance Processors - E5-2600v3 series Processors	
HP ML350 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) Processor Kit	726636-B21
HP ML350 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) FIO Processor Kit	726636-L21
HP ML350 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) Processor Kit	726639-B21
HP ML350 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) FIO Processor Kit	726639-L21
HP ML350 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) Processor Kit	726642-B21
HP ML350 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) FIO Processor Kit	726642-L21
HP ML350 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit	726645-B21
HP ML350 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit	726645-L21
HP ML350 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit	726648-B21
HP ML350 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit	726648-L21
HP ML350 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit	726668-B21
HP ML350 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit	726668-L21
HP ML350 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) Processor Kit	726674-B21
HP ML350 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) FIO Processor Kit	726674-L21
HP ML350 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) Processor Kit	726677-B21
HP ML350 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) FIO Processor Kit	726677-L21
HP ML350 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) Processor Kit	726680-B21
HP ML350 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) FIO Processor Kit	726680-L21
HP ML350 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) Processor Kit	726683-B21
HP ML350 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	726683-L21



Core Options		
	HP ML350 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) Processor Kit	765794-B21
	HP ML350 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) FIO Processor Kit	765794-L21
	HP ML350 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) Processor Kit	781828-B21
	HP ML350 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) FIO Processor Kit	781828-L21
	HP ML350 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) Processor Kit	781830-B21
	HP ML350 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) FIO Processor Kit	781830-L21
HP Memory	Registered DIMMs (RDIMMs) for E5-2600v3 Series	
	HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
	HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
	Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series	
	HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP Optical Drives	HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21
	HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21
HP Drives	SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives	
	HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
	HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21
	HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759212-B21
	HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
	HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759210-B21
	HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
	HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759208-B21
	HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
	HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21



Core Options

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21
SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B2 ²
HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B21
HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B21
SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B2 ⁻
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B2 ²
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B2
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B2 ⁻
SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B2 ⁻
SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	753874-B2
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B2
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B2
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B2
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B2
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B2
SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HP ML350 Gen9 8SFF Hard Drive Cage Kit	778157-B2
12G SAS Hot Plug SFF (2.5-inch) Enterprise Performance Solid State Drives	
HP 800GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive	741159-B2 ⁻
HP 400GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive	741155-B2
HP 200GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive	741151-B2 ⁻
12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	741146-B2
HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	741142-B2
HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	741138-B2
12G SAS Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762263-B2
HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762261-B2



Core Options

12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	700070 004
HP 800GB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	762270-B21
HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	762272-B21
6G SATA Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691868-B21
HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691866-B21
HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691864-B21
HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691862-B21
6G SATA Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717973-B21
HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739898-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717971-B21
HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739888-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717969-B21
6G SATA Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives	
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	717965-B21
HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734360-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691860-B21
HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691856-B21
HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691854-B21
HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691852-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	
HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718189-B21
HP 600GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	739900-B21
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718183-B21



HP ProLiant ML350 Generation9 (Gen9)

Core Options		
	HP 300GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	739890-B21
	HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718177-B21
	6G SATA Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives	
	HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	718171-B21
	HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734362-B21
	Hard Drive Blank Kits	
	HP Large Form Factor Hard Drive Blank Kit	666986-B21
	HP Small Form Factor Hard Drive Blank Kit	666987-B21
	Hard Drive Kits	
	HP ML350 Gen9 SFF Media Cage Kit	726545-B21
	HP ML350 Gen9 8LFF Hot Plug Drive Cage Kit	726547-B21
	HP ML350 Gen9 LFF Media Cage Kit	726561-B21
	HP ML350 Gen9 8SFF Hard Drive Cage Kit	778157-B21
	Disk Enclosures	
	HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A
HP Networking	1 Gigabit Ethernet adapters	
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
	10 Gigabit Ethernet adapters	
	HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
	HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
	HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
	HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
	HP StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A
HP InfiniBand	HP InfiniBand FDR 2-port 545QSFP Adapter	702211-B21
HP Power Supplies	NOTE: Mixing of power supplies in the same server is not supported. All power supplies the same input voltage, output rating, and efficiency rating. If non-matching power sup installed, you may receive an error message and/or experience operational issues wit	plies are
	NOTE: Prior to selecting a power supply option, it is highly recommended that you reverse server configuration in the HP Power Advisor tool to determine the right size power su server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor	view your pply for your
	HP Flex Slot Platinum Hot-plug Power supplies	
	HP 500W Flex Slot Platinum Hot Plug Power Supply Kit	720478-B21
	HD 900W Flox Slot Distinum Hat Diug Dowar Supply Kit	720479-B21
	HP 800W Flex Slot Platinum Hot Plug Power Supply Kit	120419-021



Core Options

HP Computation and Graphics Accelerators	HP ML350 Gen9 Graphic Card Support Kit NOTE: One Graphic Card Support Kit is required for each computation or graphics accelerator.	726565-B21
	NVIDIA Quadro K6000 PCI-E Graphics Adapter NOTE: Min/max rule does not apply to this option. A maximum of four of these cards can be selected. Each requires one Graphic Card Support Kit (726565-B21). NOTE: If this SKU is selected then minimum quantity = 2 of 800W Power Supply Kit (725870-B21) must be selected.	730874-B21
	HP NVIDIA Quadro K5200 GPU Graphics Accelerator NOTE: Min/max rule does not apply to this option. A maximum of four of these cards can be selected. Each requires one Graphic Card Support Kit (726565-B21).	J0G91A
	HP NVIDIA Quadro K4200 Graphics Accelerator NOTE: Min/max rule does not apply to this option. A maximum of four of these cards can be selected. Each requires one Graphic Card Support Kit (726565-B21).	J0G90A
	 NOTE: Only the above listed Graphics cards are HP standard supported options in this server. NOTE: The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2 NOTE: Please see the HP Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor. 	

HP Cooling Options HP ML350 Gen9 Redundant Fan Kit NOTE: 4 fans are included.

725878-B21



Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Insight software	HP Insight Control	
in moight contaire	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28ABE
	NOTE: The Electronic software license is available in EMEA only.	
	HP Insight Control Server Provisioning Media Kit	BD883A
	HP Insight Management Media Kit	C6N31A
Embedded Managem	entHP iLO Advanced	
-	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21
	HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
	HP iLO Advanced Electronic License with 3yr 24x7 Tech Support and Updates	BD506AAE
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License	C6N36ABE
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License	TA850AAE
HP Security	HP Trusted Platform Module Option	488069-B21
	HP Security Bezel Kit NOTE: Rack model only.	660584-B21
	 NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can secure used to authenticate the server platform. These artifacts can include passwords, cer encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data prote available in Windows Server® 2008. BitLocker leverages the enhanced security capa Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help p and to ensure that a server running Windows Server 2008 has not been tampered wi system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM. NOTE: ProLiant OS pre-installed units will come with the partition required for TPM on NOTE: The TPM key is unique to every TPM deployed server and must be retained. losing the key could result in data loss. 	tificates and ection feature abilities of a protect user data ith while the deployment.



Additional Options

HP Storage Controllers	SAS Controller				
	HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller NOTE: Smart Storage Battery included.	726736-B21			
	HP H240ar 12Gb 1-port Int Smart Host Bus Adapter	726757-B21			
	HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller	726821-B21			
	HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller	726825-B21			
	HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller	726897-B21			
	HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int FIO SAS Controller NOTE: Smart Storage Battery included.	749974-B21			
	HP H240ar 12Gb 1-port Int FIO Smart Host Bus Adapter	749976-B21			
	HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller NOTE: Smart Storage Battery included.	761872-B21			
	HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller NOTE: Smart Storage Battery included.	761874-B21			
	SAS Controller Options				
	HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers	727258-B21			
	HP Cable Options				
	HP ML350 Gen9 Host Bus Adapter Mini-SAS Cable Kit	765648-B21			
	HP ML350 Gen9 Smart Array Cable Kit	765650-B21			
	HP ML350 Gen9 Flexible Smart Array Controller Mini-SAS Cable Kit	765652-B21			
	HP ML350 Gen9 Mini SAS Cable FIO Kit	765654-B21			
HP Tape Backup	NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backu see: http://www.hp.com/storage/SPOCK and http://www.hp.com/go/ebs.	ip products			
	Tape Drives				
	HP StoreEver LTO-6 Ultrium 6650 SAS Internal Tape Drive	EH963A			
	HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A			
	HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive	EH969A			
	HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	C0H19A			
	HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	C0L99A			
	HP StoreEver LTO-4 Ultrium 1760 SAS Internal WW Tape Drive	EH919B			
	HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive	EH920B			

HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit EH946C HP StoreEver LTO-5 Ultrium 3000 SAS Internal Tape Drive EH957B HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive EH958B HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack-mount EJ014B HP StoreEver LTO-5 Ultrium 3280 SAS Internal Tape Drive EH899B HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive EH900B HP StoreEver LTO-5 Ultrium 3280 SAS Tape Drive in 3U Rack-mount EJ013B HP StoreEver LTO-6 Ultrium 6250 External Tape Drive EH970A HP StoreEver 1U SAS Rack-mount Kit AE459B **HP Tape Storage Systems HP StoreEver MSL6480**



Additional Options		
	HP StoreEver MSL6480 Scalable Expansion Module NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14604_div/14604_div.html (Worldwide).	QU626A
	HP StoreEver MSL6480 Scalable Base Module	QU625A
	HP MSL2024 0-Drive Tape Library	AK379A
	HP MSL4048 0-Drive Tape Library	AK381A
	HP MSL Library Extender Kit	AQ746A
HP Disk Backup	HP RDX Removable Disk Backup Systems USB	
	HP RDX 2TB USB3.0 Internal Disk Backup System NOTE: For the complete range of RDX drives and media see: http://www.hp.com/go/rdx. For hardware and software compatibility of HP disk backup products see: http://www.hp.com/storage/SPOCK.	E7X52A
HP Storage Options	NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows an detailed compatibility information please see: http://h18006.www1.hp.com/storage/saninfrastructure/hba.html Emulex Fibre Channel HBAs	d Linux. For
	HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
	HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
	HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter	C8R38A
	HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A
	QLogic Fibre Channel HBAs	
	HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A
	HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
	HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter	QW971A
	HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter Converged Network Adapter	QW972A
	HP StoreFabric CN1100R Dual Port Converged Network Adapter	QW990A

Additional Options

HP Disk Storage	Disk Enclosures		
Systems	HP D6000 Dual I/O Module Disk Enclosure	QQ695A	
	NOTE: See the D6000 Disk Enclosure QuickSpecs for additional information including configuration steps and additional options needed for a complete		
	solution at:		
	http://h18000.www1.hp.com/products/quickspecs/14419_div/14419_div.html (Worldwide).		
	HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle	E7W304	
	HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle	E7W31/	
	HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle	QQ697/	
	HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle	QQ698/	
	HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle	QQ6994	
	HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle	QQ7004	
HP Data Center Racks	HP 11000 G2 Series Racks		
	HP 11648 1075mm Pallet Universal Rack	H6J87A	
	HP 11648 1075mm Shock Universal Rack	H6J88A	
	HP 11642 1075mm Pallet Universal Rack	H6J65/	
	HP 11642 1075mm Shock Universal Rack	H6J66/	
	HP 11642 1200mm Pallet Universal Rack	H6J67	
	HP 11642 1200mm Shock Universal Rack	H6J68	
	HP 11636 1075mm Pallet Universal Rack	H6J77.	
	HP 11636 1075mm Shock Universal Rack	H6J78	
	HP 11622 G2 1075mm Pallet Universal Rack	H6J83	
	HP 11622 G2 1075mm Shock Universal Rack	H6J84/	
	HP 11614 1075mm Shock Universal Rack	H6J82/	
	NOTE: Please see the HP 11000 G2 Series Racks QuickSpecs for information on additional racks options and rack specifications.		
	HP Intelligent Series Racks		
	HP 647 1075mm Pallet Intelligent Series Rack	BW911	
	HP 647 1075mm Shock Intelligent Series Rack	BW912	
	HP 647 1200mm Pallet Intelligent Series Rack	BW913/	
	HP 647 1200mm Shock Intelligent Series Rack	BW914	
	HP 642 1075mm Pallet Intelligent Series Rack	BW903	
	HP 642 1075mm Shock Intelligent Series Rack	BW904	
	HP 642 1200mm Pallet Intelligent Series Rack	BW907/	
	HP 642 1200mm Shock Intelligent Series Rack	BW908/	
	HP 636 1075mm Pallet Intelligent Series Rack	BW895/	
	HP 636 1075mm Shock Intelligent Series Rack	BW896/	
	HP 842 1075mm Pallet Intelligent Series Rack	BW917/	
	HP 842 1075mm Shock Intelligent Series Rack	BW9184	
	NOTE: Please see the HP Intelligent Series Racks QuickSpecs for information on a options and rack specifications.	additional racks	
	HP Value Series Rack		

HP Value Series Rack



Additional Options

HP V142 1075mm deep Pallet 100 series Rack AF046A **NOTE:** Please see the HP Value Series Rack QuickSpecs for information on additional racks options and rack specifications.

	HP Basic Power Distribution Unit (bPDU)					
nits (PDUs)	HP 4.9kVA 24A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D7				
	HP 8.3kVA 40A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D7				
	HP 7.3kVA 32A High Voltage INTL Core Modular Power Distribution Unit	252663-B3				
	HP 17.3kVA 48A Three Phase NA/JP Modular Power Distribution Unit	AF511.				
	HP 22kVA 32A Three Phase INTL Core Modular Power Distribution Unit	AF518				
	HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU	H5M56				
	HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU	H5M58				
	HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU	H5M68				
	HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU	H5M70				
	NOTE: To learn more about HP Basic Power Distribution Units (bPDU), please visit website at www.hp.com/go/pdu.	the HP				
	HP Monitored Power Distribution Units (mPDU)					
	HP 2.8kVA 120 Volt L5-30 Input (12xNEMA 5-20R)NA/JP Monitored PDU	D9N43				
	HP 3.6kVA 200-240 Volt Detachable C20 Input (16xC13) WW Monitored PDU	D9N45				
	HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Monitored PDU	D9N47				
	HP 7.3kVA 230 Volt IEC309 32A Input (20xC13/4xC19) INTL Monitored PDU	D9N48				
	HP 7.3kVA 230 Volt IEC309 32A Input (32xC13/4xC19) INTL Monitored PDU	D9N50				
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (18xC13/3xC19) INTL Monitored PDU	D9N55				
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N57				
	HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (12xC13/12xC19) NA/JP Monitored PDU	D9N59				
	HP 22kVA 400 Volt IEC309 32A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N56				
	HP 22kVA 400 Volt IEC309 32A 3-Phase Input (12xC13/12xC19) INTL Monitored PDU	D9N60				
	NOTE: Please see the HP Monitored Power Distribution Units QuickSpecs for infor additional options and product specifications.	mation on				
	HP Intelligent Power Distribution Units (iPDU					
	HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520				
	HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF521				
	HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522				
	HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF523				
	HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535				



Additional Options		
	HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit	AF531A
	HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit	AF532A
	HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit	AF525A
	HP 7.3kVA 32A Single Phase INTL Intelligent Modular Power Distribution Kit	AF534A
	NOTE: Please see the HP Intelligent Power Distribution Units QuickSpecs for information additional options and product specifications.	ition on
HP Rack Mount	Rack location options	
Consoles, KVM Switches, and	HP ML350 Gen9 Discover Service FIO Kit NOTE: Rack CTO server only	726549-B2
Keyboards	HP 36U Location Discovery Kit	BW945
	HP 42U Location Discovery Kit	BW946
	HP 47U Location Discovery Kit	BW947
	Rail Kits	
	HP ML350 Gen9 5U FIO Rail Kit NOTE: Rack CTO server only	790357-B2
	HP ML350 Gen9 Tower to Rack Conversion Kit	726567-B
	HP Rack Mount Consoles HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor	AZ870
	HP TFT7600 G2 KVM Console Rackmount Keyboard Intl Monitor	AZ884
	HP TFT7600 G2 KVM Console Rackmount Keyboard DE Monitor	AZ872
	HP TFT7600 G2 KVM Console Rackmount Keyboard UK Monitor NOTE: Please see the HP Rack Console QuickSpecs for information on additional options and product specifications.	AZ871
	HP KVM Switches	
	HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620
	HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF62
	HP Server Console 0x2x8 Port Analog Switch	AF616
	HP Server Console 0x2x16 Port Analog Switch	AF61
	HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618
	HP 1x4 USB/PS2 KVM Console Switch NOTE: To learn more, please visit the HP KVM Switches web page.	AF61 ²
	HP USB Keyboard and Mouse	
	HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B2
	HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B
	HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B
	HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B
	HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B
	HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B
	HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B
	HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B
	HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B



Additional Options

	HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
	HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
	HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
	HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
	HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
	HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
	HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
	HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
	HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
	HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
	HP USB BFR with PVC Free KR Keyboard/Mouse Kit NOTE: Please see the HP USB Keyboard and Mouse QuickSpecs for information on additional options and product specifications.	672097-KD3
	Micro SD Options	
	-	700139-B21
	HP 32GB microSD Enterprise Mainstream Flash Media Kit HP 8GB microSD Enterprise Mainstream Flash Media Kit	700139-В21 726116-В21
		737953-B21
	HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	/3/905-B21
HP Uninterruptible	HP Tower UPS	
Power Systems (UPS)	HP T750J JP Uninterruptible Power System	AF456A
	HP T1000 G3 1000VA INTL Tower Uninterruptible Power System	AF449A
	HP T1500 G3 1400VA NA Tower Uninterruptible Power System	AF450A
	HP T1500 G3 1400VA INTL Tower Uninterruptible Power System	AF451A
	HP T1000 G3 1000VA NA Tower Uninterruptible Power System	AF448A
	HP T1000J JP Uninterruptible Power System	AF457A
	HP T1500J JP Uninterruptible Power System	AF458A
	HP Rack-mountable UPS	
	HP R1.5kVA G3 1U INTL Uninterruptible Power System	AF471A
	HP R1.5kVA G3 1U JP/TW Uninterruptible Power System	AF470A
	HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System	AF466A

HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power SystemAF466AHP R/T3000 G2 2U Detachable Cord High Voltage INTL Uninterruptible PowerAF468ASystemHP R5KVA 3U IEC309-32A High Voltage INTL Uninterruptible Power SystemAF461AHP R7KVA 4U IEC-32A High Voltage INTL Uninterruptible Power SystemAF463ANOTE: To learn more, please visit the HP Uninterruptible Power Systems (UPS)AF463A



Additional Options

HP Care Pack Services Proactive Care


HP 3 year 24x7 ML350 Gen9 Proactive Care Service	U7BG4E
HP 3 year Call to Repair ML350 Gen9 Proactive Care Service	U7BH0E
HP 3 year 24x7 with Defective Media Retention ML350 Gen9 Proactive Care Service	U7BG5E
HP 3 year 24x7 with Comprehensive Defective Material Retention ML350 Gen9 Proactive Care Service	U7BG6E
HP 3 year Call to Repair with Defective Media Retention ML350 Gen9 Proactive Care Service	U7BH1E
HP 3 year CTR with Comprehensive Defective Material Retention ML350 Gen9 Proactive Care Service	U7BH2E



Memory

Memory Subsystem Architecture Each Intel® Xeon® E5-2600v3 family processor socket contains four memory channels per installed processor with three DIMMs per channel for a total of twelve (12) DIMMs or a grand total of twenty-four (24) DIMMs for the server.

Memory Population guidelines

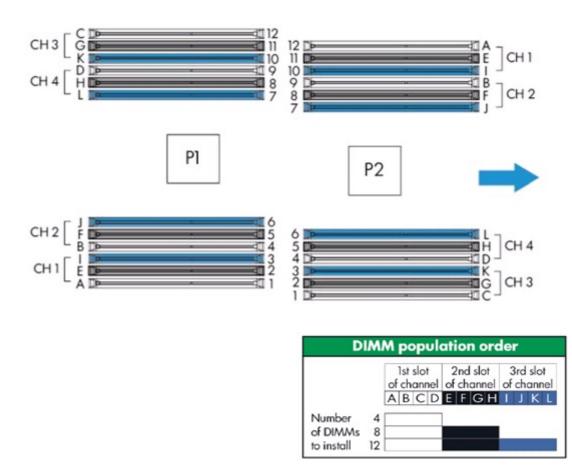

General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Place the DIMMs with the highest number of ranks in the white slot when mixing DIMMs of different ranks on the same channel.
- Do not mix RDIMMs or LRDIMMs.
- Quad rank RDIMMs are not supported in HP ProLiant ML350 Gen9 servers.
- Quad rank LRDIMMs are capable of up to three DIMMs per channel.
- RDIMMs operating at 1.2V
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.



Memory

QuickSpecs

- The maximum memory capacity is a function of the memory type and number of installed processors.
- To realize the performance memory capabilities listed in this document, HP SmartMemory is required.
- There are four (4) channels per processor; eight (8) channels per server There are three (3) DIMM slots for each memory channel; twenty-four (24) total slots Memory channels1 and 3 consists of the three (3) DIMMs that are furthest from the processor

Memory channel 2 and 4 consists of the three (3) DIMMs that are closest to the processor

Intel Gen9 Supported Memory Bandwidth for HP ProLiant Gen8 Intel® Xeon®E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity						
[DIMM Type]	Registered DIMMS (RDIMMs) Load Reduced (LRDI					
DIMM Rank	Single Rank	Single Rank Dual Rank Quad F				
DIMM Capacity	8GB	16GB	32GB			
Voltage		Std Voltage 1.2V				
SLOTS THAT CAN BE POPUL	ATED					
24 slot servers		24				
MAXIMUM CAPACITY (GB)*						
	192 384 768					
1 DIMM Per Channel	2133					
2 DIMM Per Channel	2133					
3 DIMM Per Channel	1600	1600	1600			

DIMM slot and configuration diagram

DIMM slot and configuration diagrams

- Population order; start with "A" first, "B" second, "C" third, etc.
- When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...
- When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A, CPU1-B, CPU2-B, CPU1-C, CP2-C

	CPU1		(PU2	
	Slot #	population order	Slot #	population order	
	1	A	1	С	
Chnl 1	2	E	2	G	Chnl 1
	3	1	3	K	

		CPU1		CPU2	
	Slot #	population order	Slot #	population order	
	4	В	4	D	
Chnl 2	5	F	5	Н	Chnl 2
	6	J	6	L	7



Memory

		CPU1		CPU2	
	Slot #	population order	Slot #	population order	
	7	L	7	J	
Chnl 3	8	Н	8	F	Chnl 3
	9	D	9	В	

		CPU1		CPU2	
	Slot #	population order	Slot #	population order	
	10	K	10	I	
Chnl 4	11	G	11	E	Chnl 4
	12	С	12	A	

Memory Speed by Processor Model

Processor Models	Supported Memory Speeds
E5-2609v3, E5-2603v3,	1600MHz
E5-2640v3, E5-2630v3, E5-2620v3, E5-	1866MHz
2630Lv3,	
E5-2690v3, E5-2680v3, E5-2670v3, E5-2660v3,	2133MHz
E5-2650v3, E5-2650Lv3, E5-2697v3, E5-	
2695v3, E5-2667v3, E5-2643v3, E5-2683v3,	
E5-2699v3, E5-2698v3,	

Standard and Maximum Memory Capacity (Pre-	Pre-Configured Models	Standard Memory	Plus Optional Memory	Standard Memory Replaced with Optional Memory
configured Models)	E5-2609v3,	8GB (1x8GB)	376GB (23x16GB, 1x8GB)	768GB (24x32GB)
	E5-2620v3,	16GB (1x16GB)	384GB (23x16GB, 1x16GB)	768GB (24x32GB)
	E5-2630v3, E5-2650v3,	32GB (2x16GB)	384GB (22x16GB, 2x16GB)	768GB (24x32GB)


DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common Gigabyte values.

- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB




Memory

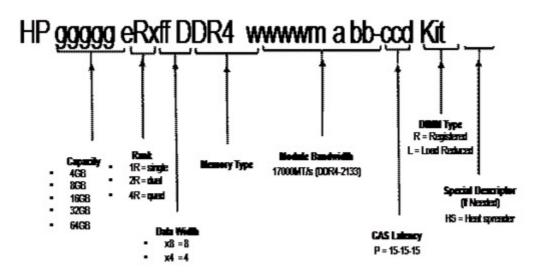



Storage

48 SFF hot-plug drive model

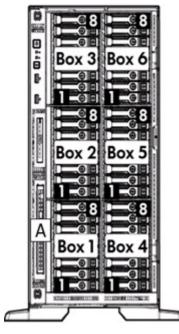

24 LFF hot-plug drive model



- A Optional Slim DVD-ROM/DVD-RW
- 1-8 8 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

- A Optional Slim DVD-ROM/DVD-RW
- 1-8 8 x LFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays



Technical Specifications

System Unit	Tower Dimensions	18.27 x 8.62 x 30.28 in	(46.4 x 21.9 x 76.9 cm)	
,	Rack Dimensions	8.58 x 17.51 x 29.37 in (21.8 x 44.5 x 74.6 cm)		
	Tower Weight	Minimum:	66.14lb(30kg)	
	U	Maximum:	121.30lb (55kg)	
	Rack Weight	Minimum:	57.3lb(26kg)	
	-	Maximum:	112.4lb(51kg)	
	Input Requirements	Range Line Voltage	100 to 120 VAC	
	(per power supply)		200 to 240 VAC	
	BTU Rating	Maximum	For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only	
	Power Specifications			
	Power Supply Output	Rated Steady-State Power	For 1400W Power Supply: 1400W (at 100 VAC), 1400W (at 240 VAC), 1400W (at 240 VAC) For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only	
		Maximum Peak Power	For 1400W Power Supply: 1400W (at 100 to 127 VAC), 1400W (at 200 to 240 1VAC), 1400W (at 240 VAC) input for China only For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only	
	System Inlet Temperature	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. For approved hardware configurations, the supported system inlet range is extended to be: 5° to 40°C (41° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: www.hp.com/go/proliant/Ashrae For approved	



Technical Specifications		
		hardware configurations, the supported system inlet range is extended to be: 5° to 45°C (41° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: www.hp.com/servers/ASHRAE
	Extended Ambient Operating Support	
	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity	Operating	Minimum to be the higher (more moisture) of - 12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	declared average by (LpAm) when the pr Noise emissions we	red A-Weighted sound power levels (LWAd) and vstander position A-Weighted sound pressure levels oduct is operating in a 23°C ambient environment. re measured in accordance with ISO 7779 (ECMA accordance with ISO 9296 (ECMA 109).
	ldle	
	LWAd	3.6 Bels (1P LFF Entry) 3.5 Bels (1P SFF Base) 3.6 Bels (2P SFF E-star Rack) 3.4 Bels (2P SFF E-star Tower)
	LpAm	21 dBA (1P LFF Entry) 21 dBA (1P SFF Base) 20 dBA (2P SFF E-star Rack) 19 dBA (2P SFF E-star Tower)
	Operating	
	LWAd	3.7 Bels (1P LFF Entry)3.6 Bels (1P SFF Base)4.5 Bels (2P SFF E-star Rack)4.5 Bels (2P SFF E-star Rack)



Technical Specificat	ions	·	
		LpAm	21 dBA (1P LFF Entry) 22 dBA (1P SFF Entry) 28 dBA (2P SFF E-star Rack) 28 dBA (2P SFF E-star Tower)
		500GB LFF SATA Midli NOTE: Configurations t (2) 500GB SFF SATA N bit. NOTE: The Listed soun	ested for 1P LFF Entry models included two (2) ne HDD and Windows 2012 Enterprise 64-bit. ested for 1P and 2P SFF models included two <i>I</i> idline HDD and Windows 2012 Enterprise 64- d levels apply to standard shipping al options may result in increased sound levels.
	Emissions	FCC Rating	Class A
	Classification (EMC)	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1
		NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.	
HP Dynamic Smart	Number of PCI links	Four	
Array B140i Controller	PCI link rate	4 Gb/s	
	Storage protocol suppor	SATA	
	SAS/SATA peak data transfer rate	6 Gb/s	
	Number of SAS/SATA links	10 links	
	SAS/SATA connectivity	2x4 connectors; 2x1 co	nnectors
	Expander support	No	
	Drives supported (max)	Up to 10 Internal Drives	
	RAID support	0, 1, 10, 5 SATA	
	Software management	HP SSA, SMH, SIM	
	Warranty	Server warranty	
	HP Secure Encryption license	Not Supported	
	HP SmartCache License	Not Supported	
	HP Smart Storage Administrator	Supported	



Technical Specifications

HP Ethernet 1Gb 4-por 331i Adapter	Network Interface Compatibility Ports	10Base-T/100Base-TX/1000Base-TX IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX PCI Express, two lanes (x2)		
	Data Transfer Method			
	Controller	BCM5719		
		10Base-T (Half-Duplex)	10 Mb/s per port, 40 Mb/s combined	
		10Base-T (Full-Duplex)	20 Mb/s per port, 80 Mb/s combined	
	Network Transfer Rate	· · · /	100 Mb/s per port, 400 Mb/s combined	
		100Base-TX (Full- Duplex)	200 Mb/s per port, 800 Mb/s combined	
		1000Base-TX (Half and Full-Duplex)	1000Mb/s per port, 4000 Mb/s combined	
		1000Base-TX (Full- Duplex)	2000Mb/s per port, 8000 Mb/s combined	
	Connector	Four RJ-45		
	Cable Support	10 Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)	
		10/100/1000 Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)	
Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.		
		The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.		



Summary of Changes

Date	Version History	Action	Description of Change
9/23/2014	From Version 1 to 2	Changed	Changes made throughout the QuickSpecs.



© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

