

4 Port PCI Express PCIe SuperSpeed USB 3.0 Controller Card Adapter with UASP - SATA Power

Product ID: PEXUSB3S4V



The PEXUSB3S4V PCI Express USB 3.0 Card (with SATA Power) adds 4 external USB 3.0 ports to any PCI Express-enabled computer system with support for data rates up to 5 Gbps, while remaining backward compatible with USB 2.0 / 1.x devices.

Enhanced with UASP support (USB Attached SCSI Protocol), this USB 3.0 controller performs up to 70% faster than conventional USB 3.0 when paired with a <u>UASP supported enclosure</u> (Note: UASP requires a compatible operating system). Using a more efficient protocol than the traditional USB BOT (Bulk-Only Transport), UASP technology optimizes transfers by allowing multiple commands to be processed simultaneously, significantly increasing transfer speeds for less wait time on data transfers. See our UASP test results below for further details.

The card uses a "stacked" port layout that places the ports one on top of the other, enabling all four USB 3.0 ports to be external facing, while still allowing the card to fit into a small form factor/low profile computer system using the included low profile bracket.



Data Sheet

Plus, with a built-in SATA power connector, each USB port can provide up to 900mA of power to devices that draw power from a host bus connection (500mA for USB 2.0) by connecting to your computer power supply.


Backed by a StarTech.com 2-year warranty and free lifetime technical support.


Improved Performance with UASP

UASP is supported in Windows® 8 and Server 2012. In testing UASP performed with up to a 70% faster read / 40% faster write speed over traditional USB 3.0 at peak performance.

At the same peak in testing, UASP also showed up to an 80% reduction in required processor resources.

Test results were obtained using an Intel® Ivy Bridge system, StarTech.com add-on USB 3.0 cards, a UASP-enabled StarTech.com enclosure, and a SATA III solid state drive.

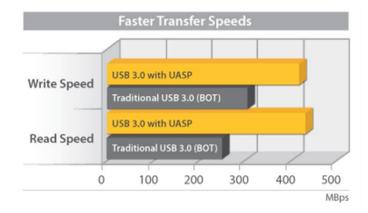

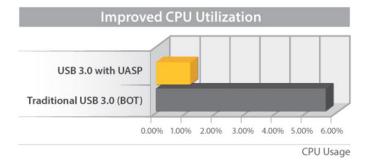





Certifications, Reports and Compatibility









Applications

- Upgrade an older PCIe-based system with USB 3.0 connectivity, to fully utilize USB 3.0 devices
- Expand a system's USB capabilities with four additional external USB ports, for connecting additional external hard drives, CD/DVD drives, MP3 players, printers, scanners, webcams, game controllers, digital cameras, etc.

Features

- 4 external USB 3.0 ports in a stacked layout
- UASP support for more efficient data transfer
- Fully compliant with USB 3.0 revision 1.0 specifications and Intel xHCI rev0.95 specifications
- Built-in optional SATA power connector for bus-powered USB devices
- Optionally provides up to 900mA per USB port
- Backward compatible with USB 2.0 and USB 1.0/1.1 devices
- Compliant with PCI Express 2.0 specifications
- Includes a Low Profile/half-height installation bracket



Data Sheet

Warranty	2 Years
Bus Type	PCI Express
Card Type	Standard Profile (LP bracket incl.)
Chipset ID Interface	Renesas/NEC - μPD720201
	USB 3.0
Port Style	Integrated on Card
Ports	4
Type and Rate	USB 3.0 - 5 Gbit/s
UASP Support	Yes
Connector Type(s)	1 - PCI Express x1 Male
External Ports	4 - USB Type-A (9 pin) USB 3.0 Female
Internal Ports	1 - SATA Power (15 pin) Plug
OS Compatibility	Windows® XP, Vista, 7, 8, 8.1, 10 Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016
Note	The maximum throughput of this card is limited by the bus interface. If used with PCI Express Gen 1.0 enabled computers, the max throughput is 2.5 Gbps. If used with PCI Express Gen 2.0 enabled computers, the max throughput is 5 Gbps.
System and Cable Requirements	Available PCI Express expansion slot
Humidity	20% ~ 80% RH
Humidity Operating Temperature	20% ~ 80% RH 5°C to 50°C (41°F to 122°F)
Operating Temperature	5°C to 50°C (41°F to 122°F)
Operating Temperature Storage Temperature	5°C to 50°C (41°F to 122°F) -25°C to 70°C (-13°F to 158°F)
Operating Temperature Storage Temperature Product Height	5°C to 50°C (41°F to 122°F) -25°C to 70°C (-13°F to 158°F) 2.7 in [68 mm]
Operating Temperature Storage Temperature Product Height Product Length	5°C to 50°C (41°F to 122°F) -25°C to 70°C (-13°F to 158°F) 2.7 in [68 mm] 3 in [75 mm]
Operating Temperature Storage Temperature Product Height Product Length Product Weight	5°C to 50°C (41°F to 122°F) -25°C to 70°C (-13°F to 158°F) 2.7 in [68 mm] 3 in [75 mm] 2.4 oz [68 g]
Operating Temperature Storage Temperature Product Height Product Length Product Weight Product Width	5°C to 50°C (41°F to 122°F) -25°C to 70°C (-13°F to 158°F) 2.7 in [68 mm] 3 in [75 mm] 2.4 oz [68 g] 0.7 in [19 mm]
Operating Temperature Storage Temperature Product Height Product Length Product Weight Product Width Package Quantity	5°C to 50°C (41°F to 122°F) -25°C to 70°C (-13°F to 158°F) 2.7 in [68 mm] 3 in [75 mm] 2.4 oz [68 g] 0.7 in [19 mm]
Operating Temperature Storage Temperature Product Height Product Length Product Weight Product Width Package Quantity Shipping (Package) Weight	5°C to 50°C (41°F to 122°F) -25°C to 70°C (-13°F to 158°F) 2.7 in [68 mm] 3 in [75 mm] 2.4 oz [68 g] 0.7 in [19 mm] 1 4.9 oz [138 g]
	Bus Type Card Type Chipset ID Interface Port Style Ports Type and Rate UASP Support Connector Type(s) External Ports Internal Ports OS Compatibility Note



Data Sheet

1 - Instruction Manual

Product appearance and specifications are subject to change without notice.