

Synology®

Disk Station

DS509+



Quick Installation Guide

SAFETY INSTRUCTIONS

Please read these safety instructions carefully before use, and keep this manual in a safe place for your future reference.

		
<p>Keep away from direct sunlight and away from chemicals. Make sure the environment does not experience abrupt changes in temperature or humidity.</p>	<p>Do keep Synology product upright. Do not lay it down horizontally.</p>	<p>Do not place the Synology product close to any liquid.</p>
		
<p>Before cleaning, unplug the power cord first. Wipe Synology product with damp paper towels. Do not use chemical or aerosol cleaners to clean it.</p>	<p>Do not place the Synology product on a cart, table, or desk, which is not stable to avoid the product from falling over.</p>	<p>The power cord must plug in to the right supply voltage. Make sure that the supplied AC voltage is correct and stable.</p>

PACKAGE CONTENTS

Before you begin, please check the package contents to verify that you have received the items below.

	
DS509+X 1	Installation CD X 1
	
2M RJ-45 LAN cable X 2	AC Power Cord X 1
Assembling Kit	
	
Screw for hard drive(s) X 24 (4 spared)	Tubular key X 2

Note:

It is recommended that you install hard disks with the same size to make the best use of hard disk capacity.

INSTALL HARD DISK


Disk Station requires at least one 3.5" SATA hard drive for installation. Refer to the following steps for details:

Warning! If you use a hard disk with data on it to install, system will format the hard disk and erase all data in some cases. Please back up the data if you need it in the future.

1. Push the clip in the direction as shown below.



2. Remove the tray from the machine.

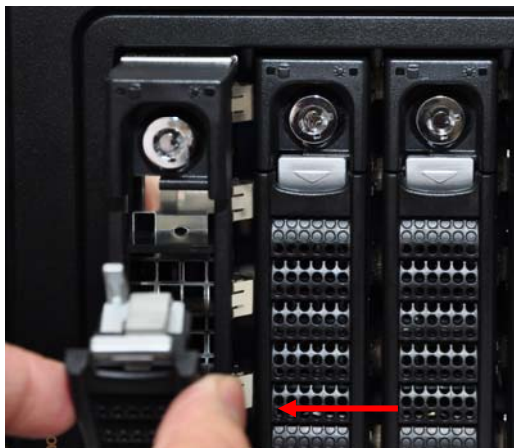

3. Attach the SATA hard disk to the hard disk tray and use 4 screws to fix the hard disk.



4. The disk position is numbered as shown below. Starting from the left: HDD1, HDD2, HDD3, HDD4, and HDD5, respectively.



5. Insert the hard disk tray.



Reminder: Make sure the tray is completely attached to the system. Otherwise, the hard disk might not be able to function properly.


6. Push the tray to fix the clip.



7. Repeat the step above to assemble all hard disks you have prepared.

TURN ON SERVER

1. Connect the AC adapter to the power port. Then plug the power cord into a power socket.

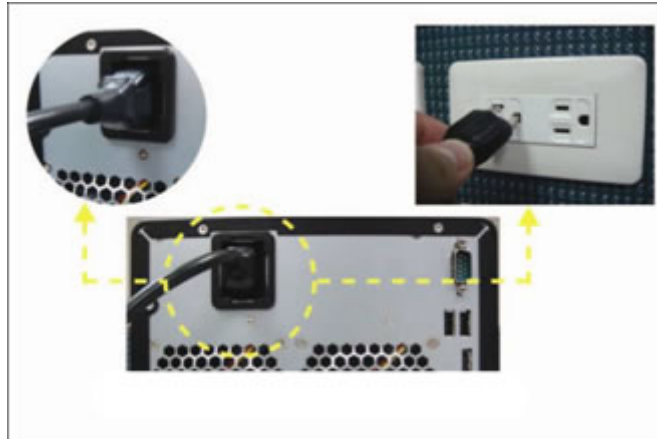

2. Connect the RJ-45 cable to the server and connect the other end to your switch/hub/router or notebook/desktop/ PC.



3. Press the power button on the front panel to turn on the server.



INSTALL SYSTEM SOFTWARE

Windows User

1. Insert the installation CD to your computer.



2. Choose Set up the Synology Server on the autorun menu.



3. Click Browse to select the ".pat" installation file in the installation CD.
4. Follow the on-screen instructions to complete the setup process.

Note: If you choose One-Click Setup, the admin password will be blank.

Mac User


1. Insert the installation CD to your computer.




2. Double click on the CD-Rom Drive thumbnail.



3. Double click MacOSX.

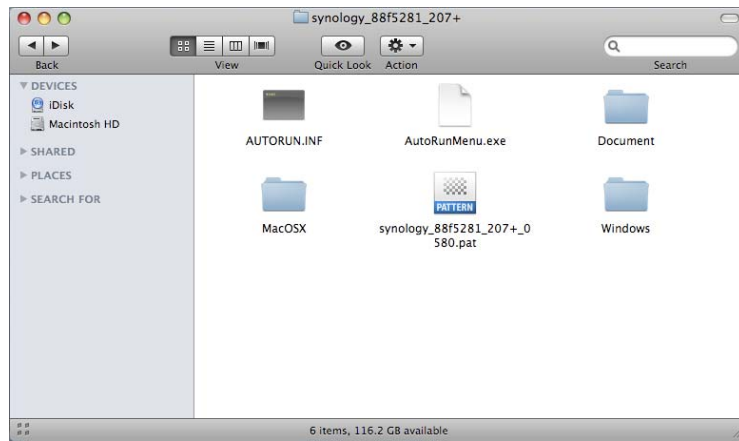


4. Double click Synology Assistant-SYNOLOGY.dmg.

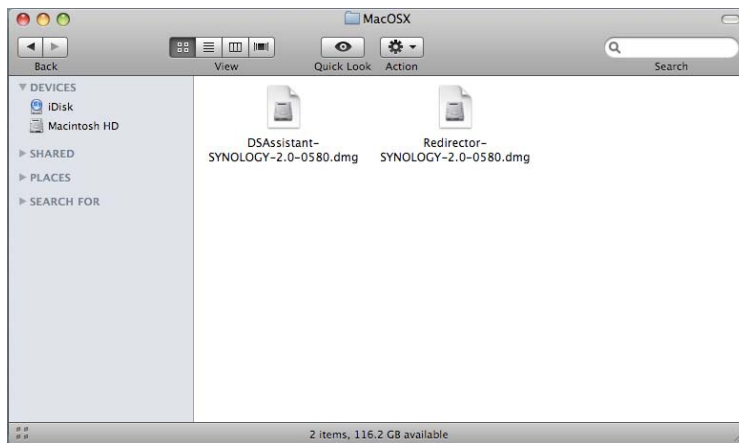

5. Double click on the automatically generated thumbnail Synology Assistant-SYNOLOGY. dmg on the desktop.



6. Double click Synology Assistant to run the Setup Wizard.

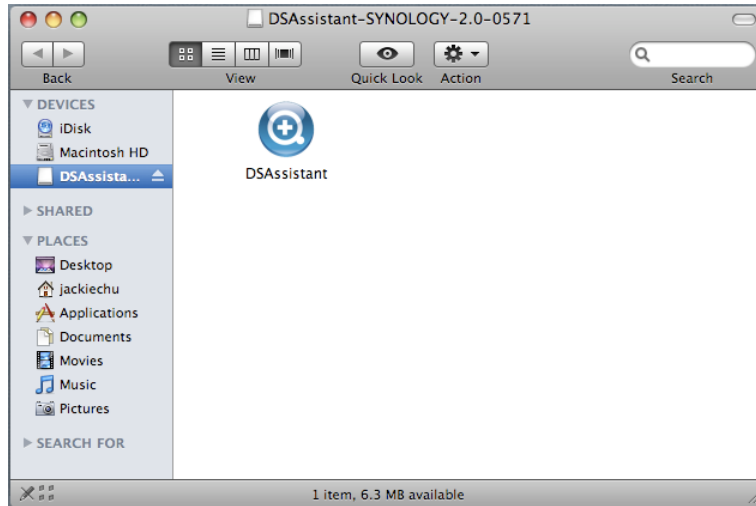

7. Click Browse to select the ".pat" installation file in the installation CD.
8. Follow the on-screen instructions to complete the setup process.

Note: If you choose One-Click Setup, the admin password will be blank.

CONGRATULATIONS!

Server has been set up. Refer to the User's Guide in the installation CD for advanced settings and management. For more information or online resources, please visit <http://www.synology.com>.