



Residential Electric Water Heaters

Designed to meet all your water heating needs, the GSW line of residential electric water heaters provides the optimum in reliability, performance and energy efficiency. With unique and patented special features and a broad range of models and sizes, there is a GSW product to suit any application. A leader in water heaters, our complete line of electric water heaters includes leading brand names like Space Saver® compact models.

DESIGNED FOR PERFORMANCE

- TankSaver® design
- Glass-lined tanks for longer life
- Meets latest energy efficiency regulations
- Factory-installed plastic-lined nipples
- Patented Styropour® base for added energy efficiency
- Tamper-resistant drain valve
- Thermostatically controlled long life elements
- CFC-free foam insulation

EASY TO INSTALL AND REPAIR



- Removable anodes
- Conveniently located T&P and drain valve

LIMITED TANK AND PARTS WARRANTY

Consult written warranty on the back of this sheet, with documentation included with water heater or contact GSW for complete warranty information.

EXCLUSIVE DESIGN

The exclusive TankSaver design works to prolong tank life. TankSaver impedes corrosion by guarding metal tank openings from exposure and keeping them watertight. The durable construction virtually eliminates rust.

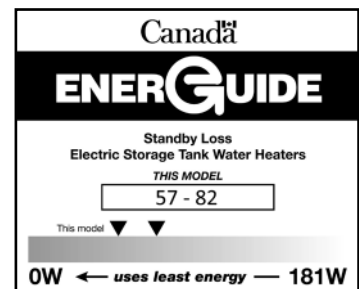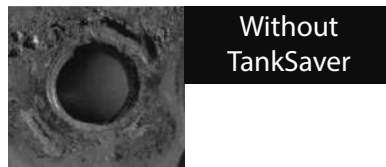



Residential Electric Water Heaters

SPECIFICATIONS

Tank Warranty	Model	Capacity			Standby Loss	First Hour Rating	Elements		Dimensions		Shipping Weight	BC Compliant
		IG	USG	LITRES			WATTS	VOLTS	Height to Top of Tank (A)	Diameter (B)		
In Years**					WATTS	USG (L)	WATTS		IN (CM)	IN (CM)	LBS (KG)	
TOP ENTRY												
6	G650SDE-30X	40	50	182	57	60 (221)	3000	208	48 ¾ (124)	22 (56)	129 (59)	√
6	G650SDE-30	40	50	182	57	60 (221)	3000	240	48 ¾ (124)	22 (56)	129 (59)	√
6	G650SDE1-30X	40	50	182	66	60 (221)	3000	208	48 (122)	21 ½ (55)	121 (55)	-
6	G650SDE1-30	40	50	182	66	60 (221)	3000	240	48 (122)	21 ½ (55)	121 (55)	-
6	G650SDE-45X	40	50	182	57	60 (221)	4500	208	48 ¾ (124)	22 (56)	129 (59)	√
6	G650SDE-45	40	50	182	57	60 (221)	4500	240	48 ¾ (124)	22 (56)	129 (59)	√
6	G650SDE1-45X	40	50	182	66	60 (221)	4500	208	48 (122)	21 ½ (55)	121 (55)	-
6	G650SDE1-45	40	50	182	66	60 (221)	4500	240	48 (122)	21 ½ (55)	121 (55)	-
6	G650SDE-60X	40	50	182	57	60 (221)	6000	208	48 ¾ (124)	22 (56)	129 (59)	√
6	G650SDE-60	40	50	182	57	60 (221)	6000	240	48 ¾ (124)	22 (56)	129 (59)	√
6	G650SDE1-60X	40	50	182	66	60 (221)	6000	208	48 (122)	21 ½ (55)	121 (55)	-
6	G650SDE1-60	40	50	182	66	60 (221)	6000	240	48 (122)	21 ½ (55)	121 (55)	-
6	G680TDE-30X	60	80	284	78	81 (298)	3000	208	60 ½ (154)	24 (61)	208 (95)	√
6	G680TDE-30	60	80	284	78	81 (298)	3000	240	60 ½ (154)	24 (61)	208 (95)	√
6	G680TDE-45X	60	80	284	78	81 (298)	4500	208	60 ½ (154)	24 (61)	208 (95)	√
6	G680TDE-45	60	80	284	78	81 (298)	4500	240	60 ½ (154)	24 (61)	208 (95)	√
6	G680TDE-60X	60	80	284	78	81 (298)	6000	208	60 ½ (154)	24 (61)	208 (95)	√
6	G680TDE-60	60	80	284	78	81 (298)	6000	240	60 ½ (154)	24 (61)	208 (95)	√
9	G950SDE-30	40	50	182	57	60 (221)	3000	240	48 ¾ (124)	22 (56)	129 (59)	√
9	G980TDE-45	60	80	284	78	81 (298)	4500	240	60 ½ (154)	24 (61)	208 (95)	√
12	G1250SDE-45	40	50	182	57	60 (221)	4500	240	48 ¾ (124)	22 (56)	129 (59)	√
BOTTOM ENTRY												
6	G650SDEB-30	40	50	182	66	60 (221)	3000	240	48 (122)	22 (56)	123 (57)	√
6	G680TDEB-45	60	80	284	82	81 (298)	4500	240	48 ¾ (124)	24 (61)	208 (95)	√

9 and 12 year models feature incoloy elements, brass drain valve and dual anode rods.
 **In Residential applications. Reduced warranty in Commercial applications. Critical Parts (i.e. elements and thermostat) warranted for 6 years; all other parts warranted for 1 year.

