

GE current
a Daintree company

LED HORTICULTURE LIGHTING SYSTEMS



Arize™ Lynk²

Grow vertically. Grow sustainably. Grow more.

Optimized

Four all-new spectra complete our 9 spectral offerings, for every stage from propagation through harvest

Sustainable

Efficiency levels hitting 3.2 $\mu\text{mol}/\text{J}$ lets you grow more while consuming less than ever before

Effortless

Increased run lengths and simplified connectors make the Lynk² even easier to install than the previous generation

Trusted



Standard five-year warranty and a lifetime exceeding 54,000 hours ensures consistent, predictable yields for years to come

Visit www.led.com for the latest in lighting innovations from the inventors of the LED

Spectra



Type R

High red light to optimize plant growth and photosynthesis

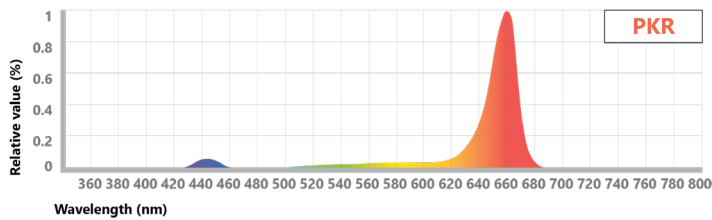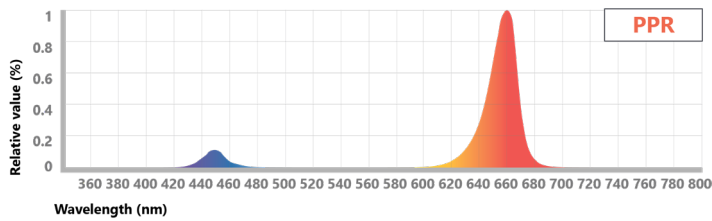


Type F

Encourages a stretching and expansion response for more robust growth

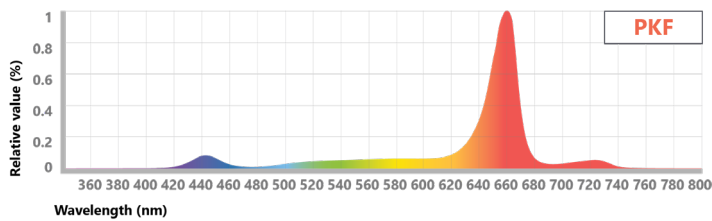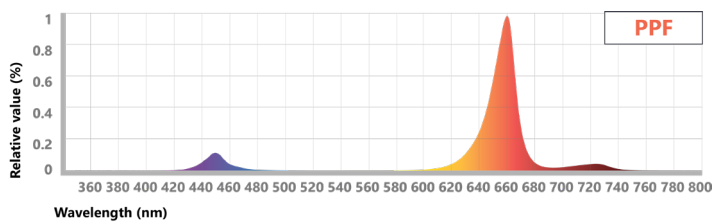



Type V

Lowest red light for secondary metabolite production to promote plant structure and leaf mass

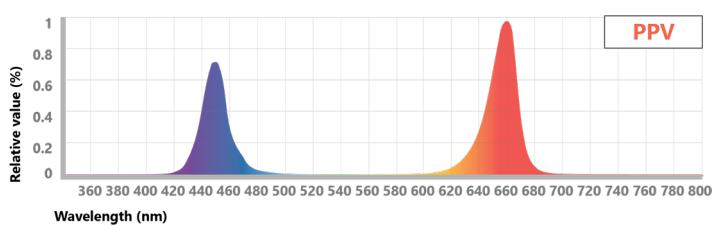



Type B

Light that supports biomass and secondary metabolite production

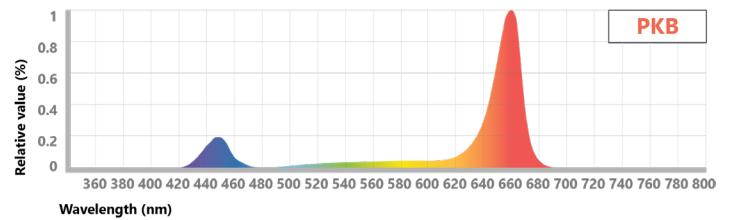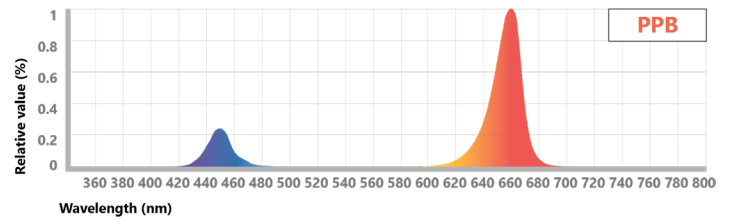

Type BR

Increased blue ratio boosts secondary metabolite production to promote crop quality and phytochemical profile

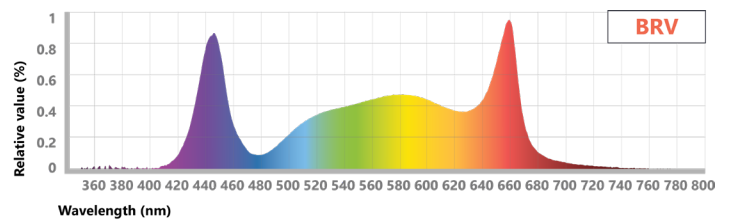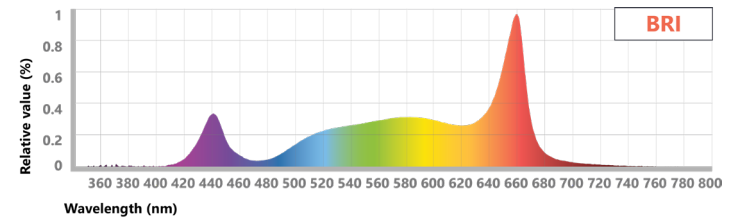

Spectrum Photon Distribution

Ratio	Blue PF	Green PF	Red PF	Far Red PF
PPR	9.5%	0.0%	90.5%	0.0%
PPB	18.2%	0.0%	81.8%	0.0%
PPV	40.0%	0.0%	60.0%	0.0%
PPF	11.0%	0.0%	84.0%	5.0%
PKR	8.0%	15.0%	77.0%	0.0%
PKB	15.5%	15.0%	69.5%	0.0%
PKF	7.6%	15.0%	72.4%	5.0%
BRI	15.0%	38.0%	47.0%	0.0%
BRV	25.0%	38.0%	37.0%	0.0%



Installation options

Fixture Length	Maximum Bars Per Leader Cable				Qty of Mounting Clips	Electrical Loading Detail Typical Current (A)			
	120VAC	208VAC	230VAC	277VAC		120VAC	208VAC	230VAC	277VAC
4 ft	14	20	26	26	2	0.30	0.17	0.16	0.14
8 ft	7	10	13	13	3	0.60	0.34	0.32	0.28

Specifications

SKU	Description	Spectrum	Electrical Power (W) ²	PPF (μmol/s) ¹	Efficacy (μmol/J) ²	Length
93137762	GEHL48HPPR3	PPR	32	103	3.2	4 ft.
93137764	GEHL48HPPB3	PPB	32	97	3.0	4 ft.
93137763	GEHL48HPPF3	PPF	30	90	3.0	4 ft.
93137765	GEHL48HPPV3	PPV	32	90	2.7	4 ft.
93137936	GEHL48HPKR3	PKR	32	90	2.8	4 ft.
93137938	GEHL48HPKB3	PKB	32	90	2.7	4 ft.
93137937	GEHL48HPKF3	PKF	32	89	2.7	4 ft.
93137939	GEHL48HBRI3	BRI	32	77	2.3	4 ft.
93137940	GEHL48HBRV3	BRV	32	70	2.2	4 ft.
93137941	GEHL96HPPR3	PPR	64	206	3.2	8 ft.
93137942	GEHL96HPPB3	PPB	64	194	3.0	8 ft.
93137943	GEHL96HPPV3	PPV	64	180	2.7	8 ft.
93137945	GEHL96HPKB3	PKB	64	180	2.7	8 ft.
93137944	GEHL96HPKR3	PKR	64	180	2.8	8 ft.

¹ Typical PPF +/-10% ² Tested at maximum input voltage

Dimensions

	4 ft.	8 ft.
L x W x H	47.3" x 1.5" x 2.0" 120.1 x 3.8 x 5.1 cm	95.0" x 1.5" x 2.0" 241.3 x 3.8 x 5.1 cm
Weight	2.75 lbs (1.25 kg)	5.29 lbs (2.40 kg)

Specifications

Input voltage	120-277V	Mounting height	>6" (15.24 cm) above canopy
Max source current	0.3mA 4 ft., 0.6mA 8 ft.	Operating environment	0°C to 40°C (32°F to 104°F)
Dimming voltage	0-10V	IP rating	IP66, UL 8800 wet location
Dimming range	10% - 100%	Lifetime	L90: >54,000 hours ¹
Power factor	>0.9	Warranty	Five-year limited warranty
Cooling	Passive	System certifications	UL E492907, CE, UKCA, DLC ²
Light distribution	126°	Fixtures per box	10

¹ Tested at 40°C per TM-21

Accessories

SKU	Product Code	Description	Package Quantity
88818	Wet Clip Standard	Standard Mounting Clip	12 clips per bag
10734	Wet Clip Slim	Slim Mounting Clip	12 clips per bag
93142247	GECA30A18-CC10B	10' M19 leader cable, dimming	1 cable per bag
93142249	GECA30A18-CD06B	6' M19 leader cable, wall plug, non-dimming	1 cable per bag
93142250	GECA30A18-CE06B	6' M19 leader cable, L6-20P 240V twist-lock plug, non-dimm.	1 cable per bag
93142251	GECA30A18-CK06B	6' M19 leader cable, L7-20P 277V twist-lock plug, non-dimm.	1 cable per bag
93142252	GECA30A18-CF02B	2' M19 jumper cable, dimming	1 cable per bag
93142256	GECA30A14-CI04B	4' splitter, 1 M19 male to 5 M19 female connectors, dimming	1 cable per bag
35-414067-01	Nylon Wire Clip	Cable clamps to secure fixture connection cables	100 clamps per bag



²Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/horticultural-lighting/search/ to confirm qualification.

© 2021 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information provided is subject to change without notice.