

Key Features

Amazing color accuracy | Smart design | Enhanced sound




Product Description


The ViewSonic® LightStream™ PJD5553LWS price-performance short throw projector features 3,200 lumens, native WXGA 1280 x 800 resolution, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, while SonicExpert™, ViewSonic's proprietary sound enhancement technology, powers a 2W speaker to deliver incredibly clear and audible sound. A short throw lens with a 0.49 throw ratio offers large projection images for smaller rooms. The PJD5553LWS also features HDMI and VGA connectivity, and a RS232 control port. An energy-saving DynamicEco® feature reduces power consumption by up to 70%, and extends the lamp life up to 10,000 hours**. With advanced audiovisual features, flexible connectivity options, and an affordable price, the PJD5553LWS is ideal for use in education and small business environments.

Find the right ViewSonic projector for your home theater, classroom, or enterprise solutions using our [Projector Distance Calculator](#).



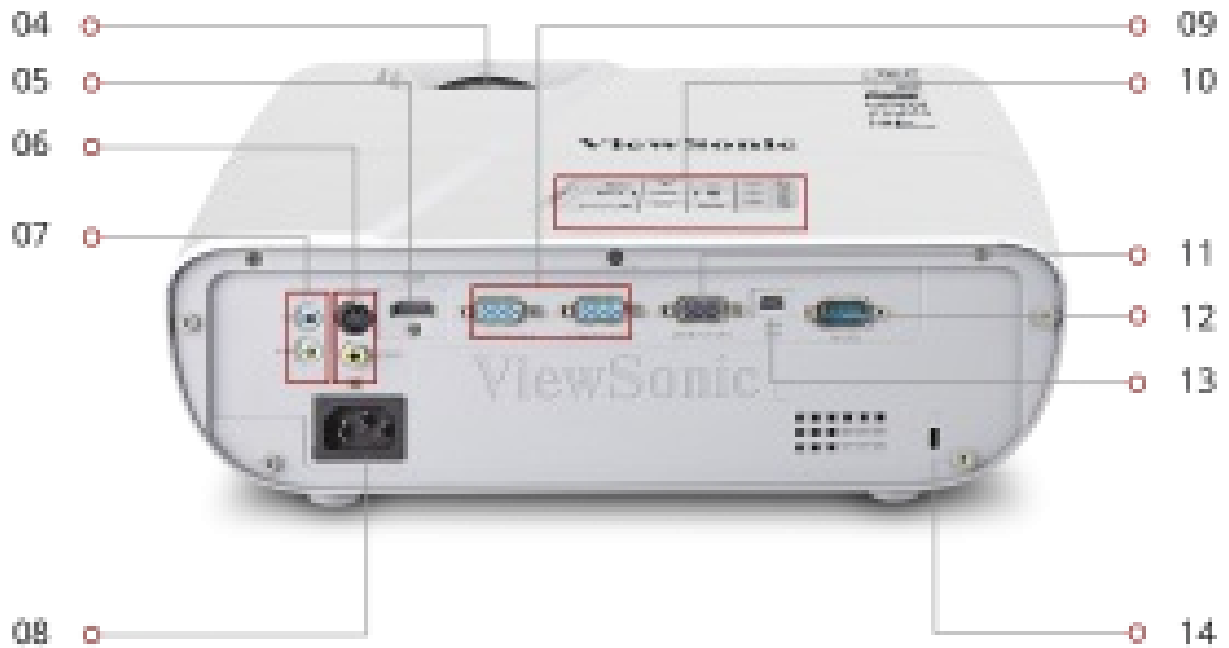


- 1. IR remote sensor
- 2. Projection lens
- 3. Elevation foot
- 4. Focus ring
- 5. HDMI
- 6. Video In
- 7. Audio In/Out
- 8. AC In
- 9. VGA (x2)
- 10. Control Panel
- 11. Monitor Out
- 12. RS232
- 13. USB type Mini B
- 14. Kensington® Lock Slot



1280 x 800 RESOLUTION



3,200 ANSI LUMENS



0.49 THROW RATIO

Contact **Sales**

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP
Resolution Type:	WXGA
Resolution:	1280 x 800
Brightness (Lumens):	3,200 ANSI
Display Size (in.):	50 - 250 in. / 1.27 - 6.35 m
Throw Distance:	1.74 - 8.66 ft. / 0.53 - 2.64 m
Throw Ratio:	0.49
Keystone:	Manual vertical digital keystone correction ($\pm 40^\circ$)
Lens:	Fixed zoom / manual optical focus

Light Source (watt):	190
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	10000
Color Depth:	30 bits, 1.07B Color (10+10+10)
Dynamic Contrast Ratio:	20,000:1
Aspect Ratio:	16:10
Video Signal:	
Frequency Horizontal:	15–102KHz
Frequency Vertical:	23–120Hz
Compatibility:	
PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080
Connector:	
3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI 1.4(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1), RGB Input(15-pin mini D-Sub (x2))	
Audio:	
Internal Speakers:	2W
Power:	
Voltage:	100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max):	265W
Stand-by:	<0.5W
Controls:	
Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information(See user guide for full OSD functionality)
Operating Conditions:	
Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	10-90%
Noise Level:	
Normal:	32dB
Eco-Mode:	27dB
Additional Hardware:	
Kensington Lock Slot:	1
Weight (imperial):	
Gross (lbs):	8.4
Weight (metric):	
Net Without Stand (kg):	2.5
Gross (kg):	3.8
Dimensions (imperial) (WxHxD):	
Packaging (in.):	16.0 x 8.85 x 13.58
Physical Without Stand (in.):	12.44 x 8.98 x 4.08
Dimensions (metric) (WxHxD):	
Packaging (mm):	408 x 225 x 345
Physical Without Stand (mm):	316 x 228 x 103.7
General:	
Regulations: CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE, C-Tick, Mexico Energy, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S, PSB, KCC, KC, SASO, CCC, BIS, WEEE, RoHS, REACH, SVHC, ErP	
PACKAGE CONTENTS: PJD5553LWS projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)	
Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).	
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.	
UPC: 766907808117	
Accessories:	
PJ-IWBADP-003, PJ-IWBADP-006, PJ-VTOUCH-10S, PJ-VTOUCH-10S-S, PJ-WMK-305, PJ-WMK-601, PJ-WMK-601-S, PRJ-EE-05-03, PRJ-EEEW-07-01, PRJ-EEEW-07-02, PRJ-EW-07-01, PRJ-EW-07-02	
Awards:	

