

# ETS-T40Fit

Black Twister





ETS-T40F-BK

# ETS-T40Fit

## Black Twister

CPU cooler

- Support 200W TDP
- 100% RAM Compatibility\*
- Intel® Skylake (LGA 1151) support




ETS-T40F-BK

### Features

- Compact side flow air cooler for 100% RAM compatibility
- Outstanding cooling performance : Thermal resistance 0.1°C/W
  - VGF (Vortex Generator Flow), to increase air convection in-between the fins
  - VEF (Vacuum Effect Flow), to optimize airflow inside the cooler
  - HDT (Heat-pipe Direct Touch), to improve thermal conductivity
- Unique TCC (Thermal Conductive Coating) on heatsink, to create better velocity of thermal transferring and to prevent oxidation
- 4 x Ø6mm high performance heat pipes to improve heat conductivity
- Patented circular type LED fan for utmost and eye-catching light effects
- Dual fan installation option
- High thermal conductivity grease to ensure the best thermal conduction between CPU and the heat sink
- Easy and solid Installation :
  - All-in-one back-plate design offers universal AMD & Intel desktop CPU compatibility
  - Durable metal mounting plate
- "1-Clip" fan bracket design for user-friendly installation

## Close-up for features



Patented VGF/VEF design




HDT design



Patented circular LED fan




100% RAM compatibility\*  
\*On designated CPU socket






"1-Clip" fan bracket

## Twister Bearing technology

## Dimension



- MTBF  $\geq$  160,000 hrs
- Low noise profile
- Detachable fan blades

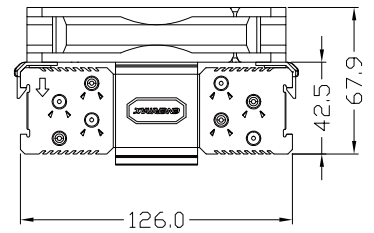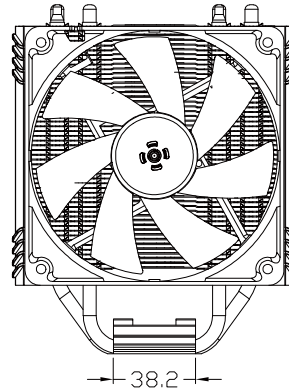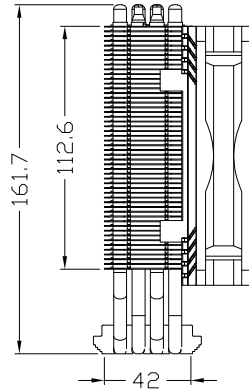

unit : mm

## Specifications

Model		ETS-T40F-BK
Compatible Socket	Intel® LGA775/1150/1151/1155/1156/1366/2011/2011-3 AMD® AM2/AM2+/AM3/AM3+/FM1/FM2/FM2+	
Heat Sink Dimension (mm)	126(L) x 40(W) x 161.7(H)	
Weight	460g	
Heat Pipe	4 x Ø6 mm	
Material	Copper Heat Pipes / Aluminum Fins	
Thermal Grease	Dow Corning® TC5121	
Fan	Fan Dimension (mm)	120 x 120 x 25 mm
	Speed	800-1800 RPM
	Air Flow	33.26 ~ 75.98 CFM 56.51 ~ 129.09 m³/h
	Air Pressure	0.97 ~ 2.28 mmH <sub>2</sub> O
	Rated Voltage	12V
	Bearing Type	Twister Bearing
	MTBF	160,000 hours
	Noise	16 ~ 26dBA
	Connector	4 pin PWM connector