

Overview

HPE StoreEasy 1000 Storage

Whether you are a small, medium, or large business with a branch or remote offices, storage worries should be the last thing on your mind. As you work with your large number of users, you need to accommodate their demands to store and access growing volumes of files such as business documents, images, audio files, and videos. You need efficient file storage that is secure, yet easy to manage.

Hewlett Packard Enterprise is here to help. With HPE StoreEasy 1000 Storage—a new breed of optimized, efficient, secure, and highly available storage systems—you stand to gain a lot. The StoreEasy 1000 product family is designed for small businesses, branch offices, and workgroup environments.

The StoreEasy 1000 product family caters to your unique storage needs. They integrate easily into new and existing environments offering your storage administrators and IT generalists a straightforward, consistent management experience.

With built-in security, your data remains well protected and available to your users when and where they want to access it. It also enables you to install and run endpoint protection such as antivirus on the system itself, reducing the cost and complexity of connecting an external endpoint protection server. With features including constant health monitoring, mirrored OS disks, advanced memory protection, reliable software support, and more, you can provide users with a highly available solution that keeps their data ready and highly available. Not to mention the support and expertise our highly skilled Hewlett Packard Enterprise certified professionals can offer.

What's New

- Brand new models - StoreEasy 1650 Expanded Storage

Models

HPE StoreEasy 1450 Storage

HPE StoreEasy 1450 Storage products are storage solutions that deliver multi-protocol file serving and application storage in a compact and affordable 1U rack-mount form factor. They're easy to install and manage, making them perfect for a small workgroup, small business or remote office. All StoreEasy 1450 models have Windows Storage Server 2012 R2, Standard Edition, pre-installed from the factory on the four internal LFF drives configured as RAID6. The StoreEasy 1450 is built on a ProLiant DL160 Gen 9 server and includes a rail kit and cable management arm.



1-4 4 x LFF SATA/SAS/SSD Hot Pluggable Hard Drives
Bays

HP StoreEasy 1450 Storage

K2R11A


NOTE: This model has no drives pre-configured - at least four drives of the same type/capacity, 100GB or greater, must be ordered for pre-installation of OS in the factory. The OS is not a field installable option. Please go to StoreEasy 1450 configuration information section for details of available options for various components.

Overview

| | |
|--|--------|
| HP StoreEasy 1450 4TB SATA Storage (4 x 1TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R12A |
| HP StoreEasy 1450 8TB SATA Storage (4 x 2TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R13A |
| HP StoreEasy 1450 16TB SATA Storage (4 x 4TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R14A |

HPE StoreEasy 1550 Storage

HPE StoreEasy 1550 Storage products are storage solutions that deliver multi-protocol file serving and application storage in a compact and affordable tower form factor package. They're easy to install and manage, making them perfect for a small workgroup, small business or remote office. All StoreEasy 1550 models have Windows Storage Server 2012 R2, Standard Edition, pre-installed from the factory on the four internal LFF drives configured as RAID6. The StoreEasy 1550 is built on a ProLiant ML110 Gen 9 Server.

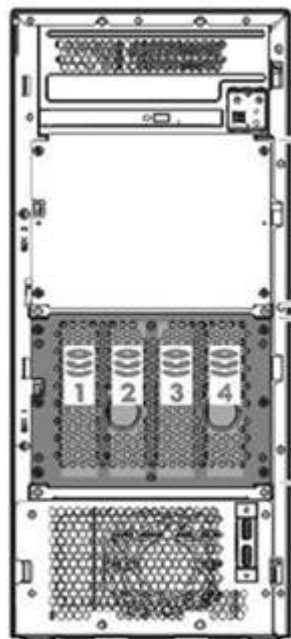

1-4 4 x LFF SATA/SAS/SSD Hot Pluggable Hard Drives Bays

| | |
|---------------------------|--------|
| HP StoreEasy 1550 Storage | K2R62A |
|---------------------------|--------|

NOTE: This model has no drives pre-configured - at least four drives of the same type/capacity, 100GB or greater, must be ordered for pre-installation of OS in the factory. The OS is not a field installable option. Please go to StoreEasy 1550 configuration information section for details of available options for various components.


| | |
|--|--------|
| HP StoreEasy 1550 4TB SATA Storage (4 x 1TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R63A |
| HP StoreEasy 1550 8TB SATA Storage (4 x 2TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R64A |
| HP StoreEasy 1550 16TB SATA Storage (4 x 4TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R65A |

HPE StoreEasy 1650 Storage

HPE StoreEasy 1650 Storage products deliver high capacity and drives down your cost per GB. Six-Core

Overview

processing, up to 96TB internal storage capacity, and ready for external expandability enhance this ultra-dense 2U shared storage solution for small, medium, or large IT environments. All StoreEasy 1650 models have Windows Storage Server 2012 R2, Standard Edition, pre-installed from the factory on two rear internal 120B 6G Value Endurance SFF SSDs configured as RAID1. The StoreEasy 1650 is built on a ProLiant DL380 Gen 9 Server and includes a rail kit and cable management arm.

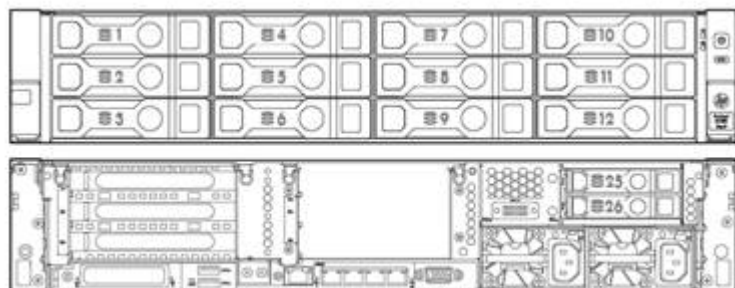

- 1-12 12 x LFF SATA/SAS/SDD Hot Pluggable Hard Drive Bays

- 25-26 2 x SFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays (StoreEasy 1650 90TB SATA SKU# M0S97A has three LFF Hard Drive Bays in rear – not shown)

HP StoreEasy 1650 Storage

NOTE: This model has no drives pre-configured for capacity requirement– Drive bundles must be ordered separately for complete configuration. Please go to StoreEasy 1650 configuration information section for details of available options for various components.) K2R15A

HP StoreEasy 1650 16TB SAS Storage K2R16A

(8 x 2TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 4 open LFF slots and 2 x 120GB 6G Value Endurance SFF SSDs in rear with pre-installed OS)

HP StoreEasy 1650 32TB SAS Storage K2R17A

(8 x 4TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 4 open LFF slots and 2 x 120GB 6G Value Endurance SFF SSDs in rear with pre-installed OS)

HP StoreEasy 1650 48TB SAS Storage K2R18A

(8 x 6TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 4 open LFF slots and 2 x 120GB 6G Value Endurance SFF SSDs in rear with pre-installed OS)



HP StoreEasy 1650 90TB SATA Storage M0S97A

(15 x 6TB 6G 7.2K RPM LFF MDL SATA HDDs pre-installed, 12 HDDs in front slots, 3 HDDs in rear slots (with pre-installed OS on two of the rear HDDs in a RAID 1 configuration. This SKU also comes with 48GB of memory (3 x 16GB RDIMMS). All other specifications are the same as other StoreEasy 1650 SKUs


Overview

HPE StoreEasy 1650 Expanded Storage

HPE StoreEasy 1650 Expanded Storage products offers revolutionary storage density, with more than double the storage capacity of Competitors for addressing bulk file storage use cases in a 2U form factor. Six-Core processing, up to 224TB internal storage capacity, and ready for external expandability enhance this ultra-dense 2U shared storage solution for small, medium, or large IT environments. All StoreEasy 1650 Expanded models have Windows Storage Server 2012 R2, Standard Edition, pre-installed from the factory on two rear internal 120B 6G Value Endurance SFF SSDs configured as RAID1. The StoreEasy 1650 Expanded Storage is built on a Apollo 4200 Gen9 Server and includes a rail kit and cable management arm.

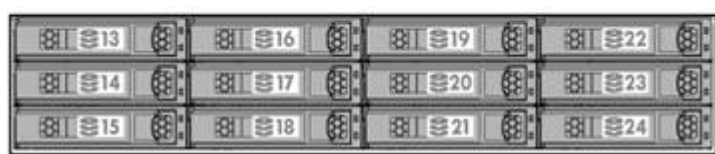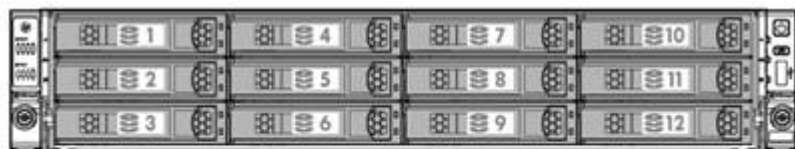

- 1-12. Front row of LFF drives
- 13-24. Second row of LFF Drives

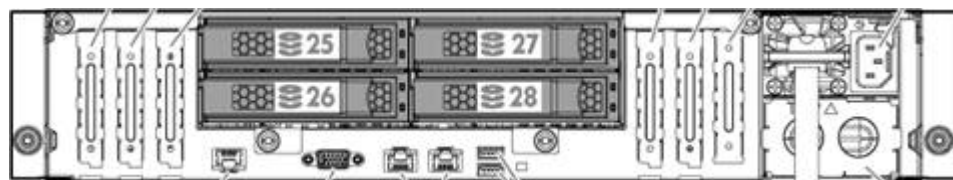

- 25-28 Rear rows of LFF drives

HP StoreEasy 1650 Expanded Storage N9Y08A

(28 open LFF HDD slots- 24 in Front, 4 in Rear and Dual 120GB Value Endurance Solid State M.2 Enablement Kit in rear with pre-installed OS.)

NOTE: This model has no drives pre-configured for capacity requirement– Drive bundles must be ordered separately for complete configuration. Please go to StoreEasy 1650 Expanded configuration information section for details of available options for various components)

HP StoreEasy 1650 Expanded 32TB SAS Storage N9Y09A

(8 x 4TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 20 open LFF slots and Dual 120GB Value Endurance Solid State M.2 Enablement Kit in rear with pre-installed OS)

HP StoreEasy 1650 Expanded 48TB SAS Storage N9Y10A

(8 x 6TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 20 open LFF slots and Dual 120GB Value Endurance Solid State M.2 Enablement Kit in rear with pre-installed OS)


HP StoreEasy 1650 Expanded 64TB SAS Storage N9Y11A

(8 x 8TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 20 open LFF slots and Dual 120GB Value Endurance Solid State M.2 Enablement Kit in rear with pre-installed OS)

Overview

HPE StoreEasy 1850 Storage

HPE StoreEasy 1850 Storage products deliver Enterprise-class performance, expandability, and flexibility. Six-Core processing, up to 24 internal SFF data drives for performance, and ready for external expandability enhance this ultra-dense 2U shared storage solution for small, medium, or large IT environments. All StoreEasy 1850 models have Windows Storage Server 2012 R2, Standard Edition, pre-installed from the factory on two rear internal 120B 6G Value Endurance SFF SSDs configured as RAID1. The StoreEasy 1850 is built on a ProLiant DL380 Gen 9 server and includes a rail kit and cable management arm.

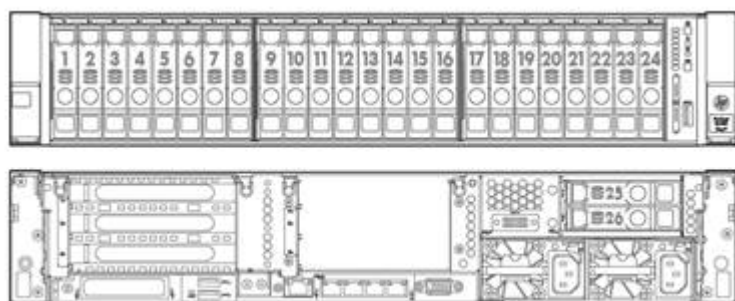

- 1-24 24 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays
- 25-26 2 x SFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays

HP StoreEasy 1850 Storage K2R19A
 (24 open SFF slots in front and 2 x 120GB 6G Value Endurance SFF SSDs in rear with pre-installed OS)

NOTE: This model has no drives pre-configured for capacity requirement– Drive bundles must be ordered separately for complete configuration. Please go to StoreEasy 1850 configuration information section for details of available options for various components.)

HP StoreEasy 1850 9.6TB SAS Storage K2R20A
 (8 x 1.2TB 12G 10K RPM ENT SAS SFF HDDs pre-installed, 16 open SFF slots and 2 x 120GB 6G Value Endurance SFF SSDs in rear with pre-installed OS)

HP StoreEasy 1850 14.4TB SAS Storage K2R21A
 8 x 1.8TB 12G 10K RPM 512e SAS SFF HDDs pre-installed, 16 open SFF slots and 2 x 120GB 6G Value Endurance SFF SSDs in rear with pre-installed OS

Hardware Specifications of StoreEasy models

| | StoreEasy 1450 | StoreEasy 1550 | StoreEasy 1650 | StoreEasy 1650 Expanded | StoreEasy 1850 |
|------------------------------------|--|--|---|---|--|
| Processor / Cache Memory | Intel® Xeon® E5-2603v3 (1.6GHz/6- core/15MB/85W) Processor | Intel® Xeon® E5-2603v3 (1.6GHz/6- core/15MB/85W) Processor | Intel® Xeon® E5-2609v3 (1.9GHz/6- core/15MB/85W) Processor | Intel® Xeon® E5-2609v3 (1.9GHz/6- core/15MB/85W) Processor | Intel® Xeon® E5-2609v3 (1.9GHz/6- core/15MB/85W) Processor |
| Memory Type | DDR4 Registered (RDIMM) | | | | |
| Maximum (by O/S license) | 2TB | | | | |
| Standard | 8GB (1 x 8GB) | 8GB (1 x 8GB) | 16GB (2 x 8GB)/48GB (2 x 16GB on sku M0S97A only) | 16GB (2 x 8GB) | 16GB (2 x 8GB) |
| DIMM Sockets | 16 | 8 | 24 | 16 | 24 |
| Network Controller NIC ports | 2 | 2 | 4 | 2 | 4 |
| Controller | HPE 361i Adapter 1GbEthernet 2- port | Broadcom 5717 Dual-port 1Gb | HPE 331i Adapter 1GbEthernet 4- port, plus optional HPE Flexible LOM for 10GbE, 10Gb or 40Gb Infiniband | HPE 361i Adapter 1GbEthernet 2-port plus optional HPE Flexible LOM for 10GbE, 10Gb or 40Gb Infiniband | HPE 331i Adapter 1G Ethernet 4-port, plus optional HPE Flexible LOM for 10GbE, 10Gb or 40Gb Infiniband |

Hardware Specifications of StoreEasy models

StoreEasy 1450

Expansion Slots

| CPU1 PCIe riser slots | Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Form Factor | Notes |
|-----------------------|-------------------|------------|-----------|-----------------|------------|-------------------------------|------------------|
| | 1 | PCIe 3.0 | x16 | x16 | | Full-height, half-length slot | Processor 1 |
| | 2 | PCIe 3.0 | x16 | x16 | | Low profile slot | Smart Array P440 |
| CPU2 riser PCIe slots | Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Form Factor | Notes |
| | 3 | PCIe 3.0 | x16 | x16 | | Low profile slot | Processor 2 |

NOTE: When populating slots on CPU2 riser, second processor must be installed.

NOTE: Bus Width data indicates the number of physical electrical lanes running to the connector.

StoreEasy

1550

Expansion Slots

| Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Form Factor | Notes |
|-------------------|------------|-----------|-----------------|------------|---|------------------|
| 5 | PCIe 3.0 | x8 | x8 | | Full-height, half-length slot | For processor 1 |
| 4 | PCIe 3.0 | x4 | x4 | | Full-height, half-length slot | For processor 1 |
| 3 | PCIe 3.0 | x8 | x8 | | Full-height, half-length slot | Smart Array P440 |
| 2 | PCIe 3.0 | x4 | x4 | | Full-height, half-length slot | For processor 1 |
| 1 | PCIe 3.0 | x16 | x16 | | Full-height, ¾ length (up to 9.5") Slot | For processor 1 |

NOTE: Bus number - Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

NOTE: Five total expansion PCIe 3.0 slots. One PCIe 3.0 x16 (x16 speed); Two PCIe 3.0 x 8 (x8 speed); Two PCIe 3.0 x 4 (x4 speed).

Hardware Specifications of StoreEasy models

StoreEasy
1650 and 1850
Expansion
Slots

| Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Form Factor | Notes |
|-------------------|------------|-----------|-----------------|------------|-------------------------------|--------|
| 1 | PCIe 3.0 | x8 | x16 | 7 | Full-height, half-length slot | Proc 1 |
| 2 | PCIe 3.0 | x8 | x16 | 10 | Full-height, half-length slot | Proc 1 |
| 3 | PCIe 3.0 | x8 | x8 | 13 | Half length, full height slot | Proc 1 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Indicates the number of physical electrical lanes running to the connector.

NOTE: All slots support PCIe cards to 150W or more depending on card, but an additional Power Cord Option is required (PN 669777-B21). See Option Section below for offering.

Slot 2 PCIe
Riser
(Optional 3-slot)
719073-B21

| Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Device Number | Form Factor | Notes |
|-------------------|------------|-----------|-----------------|------------|---------------|-------------------------------|--------|
| 4 | PCIe 3.0 | x16 | x16 | 16 | | Full height, full length slot | Proc 2 |
| 5 | PCIe 3.0 | x16 | x16 | 20 | | Full height, full length slot | Proc 2 |
| 6 | PCIe 3.0 | x8 | x8 | 23 | | Full-height, half-length slot | Proc 2 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Indicates the number of physical electrical lanes running to the connector.

NOTE: When populating the second optional riser slot, the second processor must be installed.

NOTE: All slots support PCIe cards to 150W or more depending on card but an additional Power Cord Option is required (PN 669777-B21). See Option Section below for offering.

NOTE: Slot 2 PCIe Riser cannot be added to StoreEasy 1650 sku# M0S97A as the space is occupied by 2 LFF drive bays.

Hardware Specifications of StoreEasy models

**StoreEasy
1650
Expanded
Storage
Expansion
Slots**

| Standard | Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
|----------|-------------------|------------|-----------|-----------------|-------------|--------|
| | 1 | PCIe 3.0 | x8 | X8 | Low profile | Proc 1 |
| | 2 | PCIe 3.0 | x16 | x16 | Low profile | Proc 1 |
| | 3 | PCIe 3.0 | X8 | x8 | Low profile | Proc 1 |
| | 4 | PCIe 3.0 | X8 | X8 | Low profile | Proc 1 |
| | 5 | PCIe 3.0 | x16 | x16 | Low Profile | Proc 2 |
| | 6 | PCIe 3.0 | x8 | x8 | Low Profile | Proc 2 |
| | 7 | PCIe 3.0 | X16 | X16 | Low Profile | Proc 2 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Indicates the number of physical electrical lanes running to the connector.

NOTE: When populating the second optional riser slot, the second processor must be installed.

NOTE: All slots support PCIe cards to 150W or more depending on card but an additional Power Cord Option is required (PN 669777-B21). See Option Section below for offering.

NOTE: Slot 2 PCIe Riser cannot be added to StoreEasy 1650 SKU# M0S97A as the space is occupied by 2 LFF drive bays.

| Storage Controller | StoreEasy 1450 | StoreEasy 1550 | StoreEasy 1650 | StoreEasy 1650 Expanded | StoreEasy 1850 |
|-------------------------|--|--|---|---|---|
| Controller(s) | HPE Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller | HPE Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller | HPE Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller | HPE Flexible Smart Array P840ar/2G FIO Controller | HPE Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller |
| RAID | 6, 60, 5, 50, 1, 10, 1 ADM, 10 ADM | 6, 60, 5, 50, 1, 10, 1 ADM, 10 ADM | 6, 60, 5, 50, 1, 10, 1 ADM, 10 ADM | 6, 60, 5, 50, 1, 10, 1 ADM, 10 ADM | 6, 60, 5, 50, 1, 10, 1 ADM, 10 ADM |
| Internal SAS connectors | | | | | |
| External SAS connectors | 1 | 1 | 2 | 2 | 2 |
| | None | None | None | None | None |

Hardware Specifications of StoreEasy models

| Storage | StoreEasy 1450 | StoreEasy 1550 | StoreEasy 1650 | StoreEasy 16 Expanded |
|--------------------------------|---|--|---|--|
| Hard Drives Internal | (4) Four 3.5" (Large Form Factor) hot-plug bays | (4) Four 3.5" (Large Form Factor) hot-plug bays standard, up to (4) Four additional 3.5" LFF bays as an option | (12) Twelve 3.5" (Large Form Factor) hot-plug bays in front and (2) Two 2.5" (Small Form Factor) hot-plug bays in rear/ (12) Twelve 3.5" (Large Form Factor) hot-plug bays in front and (3)Three 3.5" (Large Form Factor) hot-plug bays in rear - SKU# M0S97A only | (28) Twelve 3.5" (Large Form Factor) hot-plug bays in front a rear rows and (2) Two 2.5" (Small Form Factor) hot-plug bays in rear |
| External | Support for D3000 and D6000 (requires an additional Smart Array controller than the standard SA P440) | Support for D3000 and D6000 (requires an additional Smart Array controller than the standard SA P440) | Support for D3000 and D6000 (requires an additional Smart Array controller than the standard SA P440ar) | Support for D3000 and D6000(require an additional Smart Array controller than the standard S P840ar) |
| Maximum Storage Capacity (raw) | 32TB | 48TB | 96TB | 224TB |
| Internal SATA | 32TB | 48TB | 96TB | 224TB |
| Internal SAS | 1.568PB P440 allows | 2.352PB P440 allows | 3.930PBs 15 x 6TB HDDs | 3.296PBs 28 x 8TB HDDs |
| Internal plus External | 4 x 8TB internal+ 192 x 8TB external using 16 D3600s(requires 2 P441s) | 8 x 6TB internal+ 384 x 6TB external using 16 D3600s(requires 4 P441s) | internal+480 x 8TB HDDs using 40 D3600s (requires 5 P441s) | internal+384 x 8TB HDDs using 40 D3600s (requires 4 P441s) |
| Power Supply | 900W AC 240V DC Power Input Module (redundant optional) | 750W CS Gold Hot Plug Power Supply (redundant optional) | 800 Watts Platinum, Hot Plug redundant | 800 Watts Platinum, Hot Plug redundant |

Hardware Specifications of StoreEasy models

| Power Cords | StoreEasy 1450 | StoreEasy 1550 | StoreEasy 1650 | StoreEasy 1650 Expanded | StoreEasy 1850 |
|-------------|---|---|--|--|--|
| | One high voltage power cord (IEC C13 to C14) standard | Regional or country specific power cord required. | Two high voltage power cords (IEC C13 to C14) standard | Two high voltage power cords (IEC C13 to C14) standard | Two high voltage power cords (IEC C13 to C14) standard |

NOTE: All StoreEasy 1X50s ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables web page](#).

NOTE: The HPE StoreEasy 1550 Storage product is a tower server that ships standard with a 6' country specific NEMA power cord that allows connection to wall outlets in a home or office. If customers require additional local power cords, they can check the [power cord matrix](#) for the appropriate country specific SKU. Please see the following [power cord matrix](#):

<http://www.hp.com/go/powercordmatrix>

| System Fans | StoreEasy 1450 | StoreEasy 1550 | StoreEasy 1650 | StoreEasy 1650 Expanded | StoreEasy 1850 |
|-------------|---|-----------------------------------|---|---|---|
| | 7 hot-plug redundant fans ship standard | 2 hot-plug non redundant standard | 6 hot-plug redundant fans ship standard | 8 hot-plug redundant fans ship standard for 1 processor; 10 hot-plug redundant fans ship for 2 processors | 6 hot-plug redundant fans ship standard |

| Form Factor | StoreEasy 1450 | StoreEasy 1550 | StoreEasy 1650 | StoreEasy 1650 Expanded | StoreEasy 1850 |
|-------------|--|----------------|---|---|---|
| | 1U rack mount (includes rail kit and cable management arm) | 4.5U Tower | 2U rack mount (includes rail kit and cable management arm) | 2U rack mount (includes rail kit and cable management arm) | 2U rack mount (includes rail kit and cable management arm) |

Hardware Specifications of StoreEasy models

Additional options See the corresponding ProLiant QuickSpecs for additional options.

StoreEasy 1450 (DL160 Gen 9):

<https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04346224>

StoreEasy 1550 (ML110 Gen 9):

<https://www.hpe.com/h20195/v2/gethtml.aspx?docname=c04545452>

StoreEasy 1650 (DL380 Gen 9): <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04346247>

StoreEasy 1650 Expanded (Apollo Gen 9):

<https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04616495>

StoreEasy 1850 (DL380 Gen 9):

<https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04346247>

NOTE: Options offered in the HPE ProLiant servers listed above will work in the respective StoreEasy product if supported on Windows Server 2012 R2, Standard Edition. Because StoreEasy is a storage product not every possible option available in the equivalent ProLiant server is listed in the StoreEasy 1X50 QuickSpecs. Options that are shown in this document are the most common ones needed for the primary StoreEasy use model as a file storage product.

Features and benefits

Optimized: Ease of management

The HPE StoreEasy Storage comes with pre-configured hardware with the latest generation storage OS for purpose-built file storage.

Microsoft Windows Storage Server 2012 R2, Standard Edition with HPE enhanced value and unique features.

HPE enhanced Initial Configuration Tasks Wizard: StoreEasy installation and network configuration wizards simplify installation and prevent network configuration errors for faster deployment.

The StoreEasy Dashboard consolidates all key status information such as capacity utilization, performance, and health in a single interface and reduces the need to navigate multiple tools and interfaces for system monitoring. Low capacity warning email alerts now available to minimize disruption.

The StoreEasy Pool Manager is a best practices driven storage provisioning tool that automatically discovers system storage and recommends the most efficient setup for optimum performance, optimum capacity, or a balanced configuration based on the available storage.

The StoreEasy Tools menu within Windows Server manager to access the most commonly accessed tools and tasks that an administrator uses for day-to-day management of StoreEasy. The StoreEasy Tools menu provides management of storage pools, snapshots, emails and alerts, enclosure settings, and firmware updates. It also includes access to the Deduplication Evaluation tool, storage viewer and the initial configuration task wizard.

StoreEasy hard drive bundles make it easier for you to buy, deploy and provision additional storage capacity over the life of the product.

Optimized: Tailored for file storage

Windows Storage Server 2012 R2 (WSS2012 R2) includes a robust range of file serving and storage capabilities. It addresses heterogeneous environments and it enables more efficient storage utilization. WSS2012 R2 delivers a similar level of performance and reliability as more expensive storage solutions and it offers support for both file (CIFS/SMB and NFS) and block (iSCSI) protocols, allows for a flexible mix of configurations and includes advanced data management tools. WSS2012 R2 leverages your Windows Server management skill sets and tools including Active Directory, PowerShell and System Center. Extensive protocol support: SMB (2.0, 2.1, 3.0, 3.02), NFS (v2, v3, v4.1), WebDAV, HTTP/HTTPS, FTP/FTPS, iSCSI

- SMB3 protocol: Leverage high performance continually available file shares to deliver feature-rich storage for business-critical applications and virtual servers using advanced new functionality.
- SMB3 Multi-channel: Enable aggregation of network bandwidth and network fault tolerance when multiple paths are available between SMB clients and file servers.
- NFS v4.1: For Windows Storage Server 2012 R2, Server for NFS has been updated to support continuous availability. These improvements make it possible to reliably store and run VMware ESX on a virtual machine that is running Windows Server 2012 by using the NFS protocol to share files. Additional improvements in failover clustering take advantage of better resilience to hardware and software outages that may afflict individual cluster nodes. At the same time, failover clustering isolates VMware ESX hypervisor hosts from intermittent glitches during failovers.
- iSCSI: Some applications require block storage. iSCSI Target Server can provide these applications with continuously available block storage. Since the storage is remotely

Features and benefits

accessible it can also consolidate block storage for central or branch office locations. By using boot-capable NICs or a software loader, you can deploy hundreds of diskless servers. This is ideal for large deployments of identical operating system images, such as a Hyper-V server farm or High Performance Computing (HPC) clusters.

- File Server Resource Manager (FSRM): File Server Resource Manager is a set of features within the WSS2012 R2 OS that allows you to manage and classify data that is stored on file servers. File Server Resource Manager includes the following features:
- Storage Quotas: Quotas allow you to limit the space that is allowed for a volume or folder, and they can be automatically applied to new folders that are created on a volume. You can also define quota templates that can be applied to new volumes or folders.
- File screening: File screens help you control the types of files that user can store on a file server. You can limit the extension that can be stored on your shared files. For example, you can create a file screen that does not allow files with an MP3 extension to be stored in personal shared folders on a file server.
- File Classification Infrastructure: File Classification Infrastructure provides insight into your data by automating classification processes so that you can manage your data more effectively. You can classify files and apply policies based on this classification. Example policies include dynamic access control for restricting access to files, file encryption, and file expiration. Files can be classified automatically by using file classification rules or manually by modifying the properties of a selected file or folder.
- File Management Tasks: File Management Tasks enables you to apply a conditional policy or action to files based on their classification. The conditions of a file management task include the file location, the classification properties, the date the file was created, the last modified date of the file, or the last time the file was accessed. The actions that a file management task can take include the ability to expire files, encrypt files, or run a custom command.
- Storage reports: Storage reports are used to help you identify trends in disk usage and how your data is classified. You can also monitor a selected group of users for attempts to save unauthorized files.
- Unlimited Client Access Licenses (CALs) included

NOTE: Windows Storage Server 2012 R2 and Windows Server 2012 R2 are built on the same code base. Applications certified for Windows Server are expected to have the same application compatibility profile on Windows Storage Server. Windows Storage Server 2012 R2 and Windows Server 2012 have the same application frameworks, services and plumbing to support running the full breadth of Window-compatible applications. Applications that rely upon certain roles that are removed from Windows Storage Server 2012 R2, such as fax server, active directory domain controller or terminal services will not be able to leverage those roles. Independent Software Vendors (ISVs) ultimately decide what versions and editions of Windows are supported by their products and users should review ISV compatibility and support information before purchasing. StoreEasy customers should review the End User License Agreement (EULA) to see the types of applications that are permitted for installation. All versions of Windows Storage Server 2012 R2 can join Active Directory domains, but cannot be a domain controller.

More information on Windows Storage Server 2012 R2 Standard Edition can be found here: <http://technet.microsoft.com/en-us/library/jj643303.aspx>

Efficient: Saves you Achieve an average of 50–60 percent space savings with granular data deduplication.

Features and benefits

money and time

Data Deduplication: Data deduplication enables Windows Storage Server 2012 R2 to store more data in less physical space for greater storage efficiency. Data deduplication uses variable size chunking and compression, which deliver optimization ratios of 2:1 for general file servers and up to 20:1 for virtualization data. Evaluate your deduplication savings with the included deduplication evaluation tool which allows you to determine the expected savings that you would get if deduplication is enabled on a particular volume. The Deduplication evaluation tool supports local drives and mapped or unmapped remote shares.

Work Folders: With Work Folders users can store and access work files on personal computers and devices, often referred to as bring-your-own device (BYOD), in addition to corporate PCs. Users gain a convenient location to store work files, and they can access them from anywhere. Organizations maintain control over corporate data by storing the files on centrally managed file servers, and optionally specifying user device policies such as encryption and lock-screen passwords. Work Folders can be deployed with existing deployments of Folder Redirection, Offline Files, and home folders. Work Folders stores user files in a folder on the server called a sync share. You can specify a folder that already contains user data, which enables you to adopt Work Folders without migrating servers and data or immediately phasing out your existing solution. Work folders is supported on Windows 7, Windows 8 and Apple iPad clients.

File sync and share feature enable mobile workers to access their files from anywhere. Provides corporate data controls including data encryption, data wipe, user lock screen password enforcement, file classification, and storage quotas

Use advanced data management to automatically improve use of resources, comply with data retention policies, and enhance protection of sensitive files.

Consolidate multiple workloads and IT services in a single platform with included support for a broad range of file access protocols, Microsoft® Hyper-V and SQL Server application storage, iSCSI block access, and IT infrastructure services such as print, Domain Name System (DNS), and DHCP..

DFS Namespaces: Enables you to group shared folders that are located on different servers into one or more logically structured namespaces. Each namespace appears to users as a single shared folder with a series of subfolders. However, the underlying structure of the namespace can consist of numerous file shares that are located on different servers and in multiple sites.

Reduce your branch office WAN usage with Hosted BranchCache, automatically caching frequently accessed corporate data center files.

Hosted Branch Cache: Using client/server architecture, Windows 7/8 client computers can cache content on the local network via the Hosted Cache running on the StoreEasy 1000 Storage. Other clients who need the same content retrieve it directly from the Hosted Cache.

New VHDX Standard: Deploy larger capacity virtual storage that can grow to 64 terabytes, is more resilient against corruption, and provides more efficient usage of new 4 KB sector hard disks with the new VHDX virtual storage standard.

Live Storage Migration: Maintain maximized service-level availability even while moving virtual machine storage between host servers independent of the actual virtual machine.

Secure: Protect your data always

The StoreEasy 1000 Storage protects data while at rest with file system encryption and BitLocker Drive Encryption, and while it is being transferred with SMB encryption and

Features and benefits

signing.

Use File Classification Infrastructure to dynamically identify files based on sensitivity and implement sophisticated access controls using Active Directory Rights Management Services.

Volume Shadow Copy Service: Creates point-in-time copies (snapshots) of files and folders at predetermined time intervals that can then be accessed from client computers.

VSS for Remote SMB File Shares: Leverage proven Volume Shadow Copy Service (VSS) to offload snapshot and backup operations to remote storage from VSS hardware providers within Hyper-V virtual machines

Distributed File System Replication (DFS-R): Enables you to efficiently replicate folders (including those referred to by a DFS namespace path) across multiple servers and sites. DFS Replication uses a compression algorithm known as remote differential compression (RDC). RDC detects changes to the data in a file, and it enables DFS Replication to replicate only the changed file blocks instead of the entire file.

Install and run endpoint protection, such as an antivirus, on the system itself—reducing the cost and complexity of connecting to an external endpoint protection server. Prevent against data loss with Volume Shadow Copy Service online snapshots and support for agent-based backup software.

Opt to utilize the power of LiveVault from j2 Global for easy data backup to the cloud with 7-year retention. Also, enable simplified and cost efficient compliance archiving with iTernity Compliant Archive Solution (iCAS), now validated to meet the United States Securities and Exchange Commission (SEC) 17a-4(f) requirements.

Highly Available: Increases uptime with such standard features as near continuous health monitoring with HPE Active Health System, mirrored OS drives, redundant fans (not available on all models) and power, and advanced memory protection.

Confidently deploy large file systems leveraging file system online self-healing, online verification, and precise and rapid repair that massively reduces downtime from file corruption.

Take advantage of Vision Solutions Double-Take Availability software for critical data protection with real-time byte-level replication. In the event of a failure, recover the data—with a minimum of loss—from the replicated data repository. Software installation files now included with free 14-day evaluation license.

Get support from file storage experts with 3-Year Parts, 3-Year Labor, and 3-Year Onsite support with next business day response (StoreEasy 1650/1850) or 3-Year Parts, 1-Year Labor, and 1-Year Onsite support with next business day response (StoreEasy 1450/1550). All StoreEasy products also include one year of 24x7 software telephone support for the Windows Storage Server operating system.

Optional Software

HPE Data Protector software HPE Data Protector Software is enterprise data protection and disaster recovery, ensuring recovery from any disruption. Data Protector integrates a variety of techniques to eliminate backup and recovery windows. The capabilities to eliminate planned downtime range from online backup and backup of open files to zero-downtime, zero-impact backup. The software provides industry-leading instant recovery as well as several disaster recovery alternatives to eliminate unplanned downtime, allowing recovery of entire data centers in minutes.

Data Protector is enabling organizations to reduce costs by automating routine tasks to maximize the effectiveness of the data protection staff. For the price of an entry-level product, it provides the enterprise functionality customers need. Data Protector scales from single server to distributed enterprise, covering an extensive range of heterogeneous applications, operating environments and storage configurations with a single solution. For more information on HPE Data Protector: <http://www.hp.com/go/dataprotector>

Double-Take Availability from Vision Solutions

Protect your critical HPE StoreEasy data with Double-Take Availability's real-time byte-level replication. In the event of a failure, recover the data—with a minimum of loss—from the replicated data repository. For more information read the [Technical White Paper](#).

iCAS software by iTernity

Get open, flexible, and expandable long-term archiving with iTernity Compliant Archive Solution (iCAS). Together, HPE StoreEasy and iCAS are your key to legally compliant data archiving.

For more information on iTernity iCAS go to: http://www.iternity.com/HPE-icas_en.html

LiveVault from j2 Global

HPE StoreEasy and LiveVault enables organizations to protect their critical application data and manage their long-term retention needs in the cloud. For a 30 day free trial of Livevault go to :

<http://www.remotedatabackups.com/storeeasy/>

StoreEasy 1450 configuration information

Common Specifications for all StoreEasy 1450 Storage models

| | |
|------------------------|--|
| Processor | One Intel® Xeon® E5-2603v3 Processor (1.6GHz/6-core/15MB/85W) |
| Memory | 8GB (1 x 8GB Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory) |
| Storage Controller | HPE Smart Array P440/4GB FBWC 12Gb 1-port Internal SAS Controller |
| Internal Drive Support | Four 3.5" (Large Form Factor) hot-plug drive bays in front |
| Network Port(s) | HPE 361i Adapter 1GbEthernet 2-port |
| Expansion Slots | 2 x PCIe (one slot occupied by Smart Array P440) |
| Power | 1 x 900W Gold Non-Redundant |
| Form Factor | 1U Rack |
| Operating System | Microsoft® Windows Storage Server 2012 R2, Standard Edition |
| Licenses | HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License NOTE: For more information, visit: http://www.hp.com/go/ilo |

Select a Pre-configured model

StoreEasy 1450 Pre-configured models come with factory-installed drives and the Microsoft Windows Storage Server 2012 R2 Standard Edition operating system pre-installed

NOTE: All options in steps 2 to 11 (except addition of internal drives in step2) of configure-to-order model are available for Pre-configured models. Ordered options ship separately and are not factory integrated.

NOTE: Model names are based on raw storage capacity, not available user storage.

| | |
|--|--------|
| HP StoreEasy 1450 4TB SATA Storage (4 x 1TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R12A |
| HP StoreEasy 1450 8TB SATA Storage (4 x 2TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R13A |
| HP StoreEasy 1450 16TB SATA Storage (4 x 4TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R14A |

Steps for Configure-to-order model

Step1 : Choose a Base Model

The StoreEasy 1450 base model below have no internal drives pre-installed. This model requires selection of drive bundles for factory Integration.

NOTE: 4 drives of the same type and capacity must be selected for the StoreEasy 1450 model. This model cannot ship with less than 4 drives pre-configured so that the operating system can be pre-installed. The 4 drives will be configured as RAID 6 for OS installation.

StoreEasy 1450 configuration information

Other drive types and capacities can be used in external enclosures.

NOTE: Options (other than drives selected as part of the configure-to-order process) ship separately and are not factory integrated.

StoreEasy 1450 Storage Base model K2R11A

Specifications Same as the StoreEasy 1450 pre-configured models listed above

NOTE: This model does not include pre-configured HDDs. At least four drives of the same type/capacity, 100GB or greater, must be ordered for pre-installation of OS in the factory. This system cannot be shipped with less than 4 HDDs. The four drives will be factory configured as RAID 6 with the OS pre-installed

Step2 : Choose required internal drive bundles and optional external drives

| | | |
|---------------|-----------------------------------|---|
| Drive Options | Minimum Number of Drives Required | 4 |
| | Maximum Number of Drives Allowed | 4 |

StoreEasy 1450 LFF Drive Bundles

HP StoreEasy 32TB Smart-carrier 4-pack Bundle N9Y12A

NOTE: Bundle contains 4 x HPE 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive (SKU #793703-B21)

HP StoreEasy 24TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle K2R22A

NOTE: Bundle contains 4 x HPE 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 761477-B21)

HP StoreEasy 16TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle

NOTE: Bundle contains 4 x HPE 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 695510-B21)

E7W91A

HP StoreEasy 12TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle

NOTE: Bundle contains 4 x HPE 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652766-B21)

E7W90A

HP StoreEasy 8TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle

NOTE: Bundle contains 4 x HPE 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652753-B21)

E7W89A

HP StoreEasy 4TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle

NOTE: Bundle contains 4 x HPE 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652753-B21)

E7W88A

HPE Drive options (The following options are applicable only for the external storage drives)

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 765424-B21

HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737394-B21

HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737261-B21

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

StoreEasy 1450 configuration information

| | |
|--|------------|
| HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 761477-B21 |
| HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 695510-B21 |
| HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652766-B21 |
| HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652757-B21 |
| HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652753-B21 |
| HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818367-B21 |
| HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818365-B21 |
| SAS Hot Plug LFF (3.5-inch) Midline 512e Drives | |
| HPE 8TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive | 819201-B21 |
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765259-B21 |
| HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765257-B21 |
| SAS Hot Plug LFF (3.5-inch) 512e Performance Drives | |
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793671-B21 |
| HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793669-B21 |
| SAS Hot Plug LFF (3.5-inch) Midline 512e Helium Drives | |
| HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793703-B21 |
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793699-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
| HPE 4TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive | 861678-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 628061-B21 |
| HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive | 658079-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 657750-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline 512e Drives | |
| HPE 8TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive | 819203-B21 |

StoreEasy 1450 configuration information

| | |
|---|------------|
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765255-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765253-B21 |
| SATA Hot Plug LFF (3.5-inch) 512e Performance Drives | |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793667-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives | 793665-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline 512e Helium Drives | |
| HP 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793695-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive | 793683-B21 |
| 12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762272-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804680-B21 |
| HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804674-B21 |
| HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804668-B21 |
| HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804642-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816933-B21 |
| HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816923-B21 |
| HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804608-B21 |
| HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816913-B21 |
| HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804602-B21 |
| HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816903-B21 |
| HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804596-B21 |

StoreEasy 1450 configuration information

| | |
|---|------------|
| HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789147-B21 |
| HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816893-B21 |
| HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804590-B21 |
| HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816883-B21 |
| HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804584-B21 |
| HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804578-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Mixed Use Solid State Drives | |
| HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764945-B21 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764943-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764941-B21 |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764939-B21 |
| HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 817015-B21 |
| HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804634-B21 |
| HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816999-B21 |
| HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804628-B21 |
| HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816989-B21 |
| HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 832417-B21 |
| HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816979-B21 |
| HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804616-B21 |
| HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816969-B21 |

D3000 or D6000 Disk Enclosures

The StoreEasy 1450 product support all of the D3000 or D6000 Disk Enclosure product

StoreEasy 1450 configuration information

families. A Smart Array with external ports must be added to the StoreEasy 1450 to add external Disk Enclosures.

(See the D3000 or D6000 Disk Enclosure QuickSpecs for more information)

Step 3: Choose optional external storage controller

SAS Controllers

HPE Smart Array Controllers

HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller 726825-B21

HPE Smart Host Bus Adapters

HP H241 12Gb 2-ports Ext Smart Host Bus Adapter 726911-B21

Step 4 : Choose optional second Network Adapter

NOTE: HPE 361i 1GbEthernet 2-port Network Adapter is included in all of the StoreEasy 1450 models. Recommended option for additional network connectivity is HPE Ethernet 1Gb 4-port 366T Adapter – SKU# 811546-B21

1 Gigabit Ethernet adapters

Intel chipset-based with RSS, I/O AT, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

HP Ethernet 1Gb 4-port 366T Adapter 811546-B21

HP Ethernet 1Gb 2-port 361T Adapter 652497-B21

Broadcom chipset-based with RSS,VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

HP Ethernet 1Gb 4-port 331T Adapter 647594-B21

HP Ethernet 1Gb 2-port 332T Adapter 615732-B21

10 Gigabit Ethernet adapters

NOTE: A minimum of two Gigabytes (2 GB) of system memory is required per each adapter

Intel chipset-based with RSS, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

HP Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

HP Ethernet 10Gb 2-port 561T Adapter (RDMA and I/O AT features are also available with this NIC) 716591-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter 727055-B21

Broadcom chipset-based with RSS,VMQ, VMWNQ, VMDq, MSI-X features¹

HP Ethernet 10Gb 2-port 530T Adapter 656596-B21

HP Ethernet 10Gb 2-port 530SFP Adapter 652503-B21

Mellanox chipset-based with RDMA, RSS, VMQ, VMWNQ,MSI-X,EEE features¹

HP Ethernet 10Gb 2-port 546SFP+ Adapter 779793-B21

1. Features description

RSS: Receive side scaling (RSS) is a network driver technology that enables the efficient distribution of network receive processing across multiple CPUs in multiprocessor

StoreEasy 1450 configuration information

systems.

EEE (Green Ethernet) : Reduces power consumption during periods of low activity.

I/O AT: I/O Acceleration Technology (I/OAT), developed by Intel, is a set of features particularly designed to reduce the receiver-side packet processing overhead.

MSI-X: For PCI 3.0, a device can support up to 2,048 different messages. Devices that support PCI 3.0 MSI-X feature a dynamically programmable hardware table that contains entries for each of the interrupt sources in the device. Each entry in this table can be programmed with one of the messages that are allocated to a device, and can be independently masked

VMDq : Virtual Machine Device Queues (VMDq) is a technology that allows the network adapter to create multiple separate queues, distributing the processing load across multiple cores.

VMWVQ: Enables VMs in your VMWare environment to take advantage of 10GbE, without this capability the max you can get is about 3 - 4 Gb.

VMQ: VMQ, in a Hyper-V implementation, uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management operating system to the virtual machine. This improves network performance to the VMs.

RDMA: Remote Direct Memory Access (RDMA) is a technology that allows computers in a network to exchange data in main memory without involving the processor, cache, or operating system of either computer. Like locally-based Direct Memory Access (DMA), RDMA improves throughput and performance because it frees up resources. RDMA also facilitates a faster data transfer rate.

iSCSIa : iSCSI acceleration reduces CPU utilization by up to

Infiniband Adapters

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information :

<http://www.hp.com/go/ProLiantNICs>

| | |
|--|------------|
| HP InfiniBand FDR 2-port 545QSFP Adapter | 702211-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter | 764284-B21 |

Step 5: Choose optional Fibre Channel HBAs and CNAs

NOTE: For the complete listing of Fibre Channel Host Bus Adapters for Windows please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Emulex Fibre Channel HBAs

| | |
|--|--------|
| HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter | C8R38A |
| HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter | C8R39A |
| HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AJ762B |
| HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ763B |
| QLogic Fibre Channel HBAs | |
| HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AK344A |
| HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ764A |

StoreEasy 1450 configuration information

| | |
|--|--------|
| HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter | QW971A |
| HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter | QW972A |
| Converged Network Adapter | |
| HP StoreFabric CN1100R Dual Port Converged Network Adapter | QW990A |
| HP StoreFabric CN1200E 10Gb Converged Network Adapter | E7Y06A |
| HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter | N3U51A |
| HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter | N3U52A |

Step 6: Choose optional second Processor

| | |
|---|------------|
| HP DL160 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit | 763235-B21 |
| I/O Expansion Option | |
| HP DL160 Gen9 Low Profile PCIe CPU2 Riser Kit | 725586-B21 |

NOTE: CPU 2 is required if this riser is to be installed, enables one PCIe3 slot.

Step 7: Choose optional extra memory kit

NOTE: Hewlett Packard Enterprise recommends that you add the same type memory to the product that is shipped standard with the product

| | |
|--|------------|
| Registered DIMMs (RDIMMs) for E5-2600v3 Series | |
| HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726718-B21 |

Step 8 : Choose redundant power supply

Add a second power supply for redundancy.

| | |
|---|------------|
| HPE 900W AC 240VDC Power Input Module FIO Kit | 828734-B21 |
|---|------------|

NOTE: This power supply must be ordered when adding a second power supply to the StoreEasy 1450 Base model only (K2R11A)

| | |
|---------------------------------------|------------|
| HPE 900W AC 240VDC Power Input Module | 775595-B21 |
|---------------------------------------|------------|

NOTE: This power supply must be ordered when adding a second power supply to the StoreEasy 1450 Pre-configured models only (K2R12A, K2R13A, K2R14A)

Step 9 : Choose optional Optical Drives

| | |
|--|------------|
| HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive | 726536-B21 |
| HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive | 726537-B21 |

Step 10 : Choose optional Security option

| | |
|------------------------------------|------------|
| HPE Trusted Platform Module Option | 488069-B21 |
|------------------------------------|------------|

Step 11 : Choose optional System Recovery option



StoreEasy 1450 configuration information

HPE StoreEasy XX50 Rcvry Software Media Kit

P4A92A

The HPE StoreEasy XX50 Recovery Software Media Kit contains a System Recovery DVD that is used to re-install the factory operating system image. Booting the system from the System Recovery DVD will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the StoreEasy 1000 Administrator Guide for more information on performing a System Recovery.

NOTE: If desired the StoreEasy 1450 Recovery Software can be downloaded from HPE's Software Depot at no charge, so that the user can create their own System Recovery DVD or System Recovery USB flash drive. The Recovery Software is available [here:https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=P4A92-11002](https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=P4A92-11002)

NOTE: For more information on how to perform a system recovery on a StoreEasy 1450 refer to the StoreEasy 1000 Administrator's Guide. The guide can be downloaded from <http://www.hp.com/support> . Search for the StoreEasy 1450 product model in the drivers and download section.

NOTE: All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.

StoreEasy 1550 configuration information

Common Specifications for all HPE StoreEasy 1550 Storage models

| | |
|------------------------|---|
| Processor | One Intel® Xeon® E5-2603v3 Processor (1.6GHz/6-core/15MB/85W) |
| Memory | 8GB (1 x 8GB Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory) |
| Storage Controller | HPE Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller |
| Internal Drive Support | Four 3.5" (Large Form Factor) hot-plug drive bays in front, up to four additional LFF drive bays available as an option |
| Network Port(s) | Broadcom 5717 1Gb 2-port |
| Expansion Slots | 5 x PCIe (one slot occupied by Smart Array P440) |
| Power | 1 x 750W Gold Non-Redundant |
| Form Factor | 4.5U Tower |
| Operating System | Microsoft® Windows Storage Server 2012 R2, Standard Edition |
| Licenses | HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License |

NOTE: For more information, visit: <http://www.hp.com/go/ilo>

Choose a Pre-configured model

StoreEasy 1550 Pre-configured models come with factory-installed drives and the Microsoft Windows Storage Server 2012 R2 Standard Edition operating system pre-installed

NOTE: All options in steps 2 to 10 of configure-to-order model are available for pre-configured models. Ordered options ship separately and are not factory integrated

NOTE: Model names are based on raw storage capacity, not available user storage.

| | |
|---|--------|
| HPE StoreEasy 1550 4TB SATA Storage (4 x 1TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R63A |
| HPE StoreEasy 1550 8TB SATA Storage (4 x 2TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R64A |
| HPE StoreEasy 1550 16TB SATA Storage (4 x 4TB 6G 7.2K RPM MDL SATA LFF HDDs pre-installed) | K2R65A |

Steps for Configure-to-order model

Step1 : Choose a Base Model

The StoreEasy 1550 base model below have no internal drives pre-installed. This model requires selection of drives for factory

Integration

NOTE: 4 drives of the same type and capacity must be selected for the StoreEasy 1550 model. This model cannot ship with less than 4 drives pre-configured so that the operating system can be pre-installed. The 4 drives will be configured as RAID 6 for OS installation. Other drive types and capacities can be used in external enclosures.

NOTE: Options (other than drives selected as part of the configure-to-order process) ship separately and are not factory integrated

| | |
|-----------------------------------|--------|
| StoreEasy 1550 Storage Base model | K2R62A |
|-----------------------------------|--------|

StoreEasy 1550 configuration information

Specifications

Same as the StoreEasy 1550 pre-configured models listed above

NOTE: This model does not include pre-configured HDDs. At least four drives of the same type/capacity, 100GB or greater, must be ordered for pre-installation of OS in the factory. This system cannot be shipped with less than 4 HDDs. The four drives will be factory configured as RAID 6 with the OS pre-installed

Step2 : Choose required internal storage and optional external storage drives

| | | |
|---------------|-----------------------------------|---|
| Drive Options | Minimum Number of Drives Required | 4 |
| | Maximum Number of Drives Allowed | 8 (requires optional LFF HDD card cage) |

StoreEasy 1550 LFF Drive Bundles and HDD card cage (These options are required to be ordered together)

HPE StoreEasy 24TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle K2R22A

NOTE: Bundle contains 4 x HPE 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 761477-B21)

HPE StoreEasy 16TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W91A

NOTE: Bundle contains 4 x HPE 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 695510-B21)

HPE StoreEasy 12TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W90A

NOTE: Bundle contains 4 x HPE 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652766-B21)

HPE StoreEasy 8TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W89A

NOTE: Bundle contains 4 x HPE 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652753-B21)

HPE StoreEasy 4TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W88A

NOTE: Bundle contains 4 x HPE 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652753-B21)

Second 4LFF Hot Plug Drive cage kit 784584-B21

HPE Drive options (The following options are applicable only for the external storage drives)

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 765424-B21

HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737394-B21

HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737261-B21

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive 765259-B21

HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 761477-B21

HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive 765257-B21

StoreEasy 1550 configuration information

| | |
|---|------------|
| HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818367-B21 |
| HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818365-B21 |
| HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 695510-B21 |
| HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652766-B21 |
| HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652757-B21 |
| HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652753-B21 |
| SAS Hot Plug LFF (3.5-inch) Midline 512e Drives | |
| HPE 8TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive | 819201-B21 |
| HPE 8TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive | 819203-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765255-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 753874-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765253-B21 |
| HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 693687-B21 |
| HPE 4TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive | 861678-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 628061-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658079-B21 |
| HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive | 858596-B21 |
| HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive | 861676-B21 |
| HPE 1TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive | 858594-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 657750-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives | |
| HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804608-B21 |
| HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804602-B21 |
| HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789147-B21 |
| HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804596-B21 |
| HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804590-B21 |
| HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804584-B21 |
| HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804578-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD | |
| HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816933-B21 |
| HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816923-B21 |
| HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816913-B21 |
| HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816903-B21 |
| HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816893-B21 |
| HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816883-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Write Intensive Solid State Drives | |
| HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804680-B21 |

StoreEasy 1550 configuration information

| | |
|--|------------|
| HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804674-B21 |
| HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804668-B21 |
| HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804642-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Mixed Use Solid State Drives | |
| HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804634-B21 |
| HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804628-B21 |
| HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 832417-B21 |
| HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804616-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD | |
| HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 817015-B21 |
| HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816999-B21 |
| HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816989-B21 |
| HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816979-B21 |
| HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816969-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Solid State Drives | |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764943-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764941-B21 |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764939-B21 |

D3000 or D6000 Disk Enclosures

The StoreEasy 1550 support all of D3000 or D6000 Disk Enclosure product families. A Smart Array with external ports

must be added to the StoreEasy 1550 to add external Disk Enclosures.

(See the D3000 or D6000 Disk Enclosure QuickSpecs for more information).

Step 3: Choose optional external storage controller

SAS Controllers

HPE Smart Array Controllers

| | |
|--|------------|
| HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller | 726825-B21 |
| HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller | 726903-B21 |

HPE Smart Host Bus Adapters

| | |
|---|------------|
| HP H241 12Gb 2-ports Ext Smart Host Bus Adapter | 726911-B21 |
|---|------------|

Step 4 : Choose optional second Network Adapter

NOTE : Broadcom 5717 1Gb 2-port Network Adapter is included in all of the StoreEasy 1550 models.

Recommended option for additional network connectivity is HPE Ethernet 1Gb 2-port 361T Adapter – SKU# 652497-B21

StoreEasy 1550 configuration information

1 Gigabit Ethernet adapters

Intel chipset-based with RSS, I/O AT, VMQ, VMWVQ, VMDq, MSI-X,EEE features¹

HP Ethernet 1Gb 2-port 361T Adapter 652497-B21

HP Ethernet 1Gb 4-port 366T Adapter 811546-B21

Broadcom chipset-based with RSS,VMQ, VMWVQ, VMDq, MSI-X,EEE features¹

HP Ethernet 1Gb 4-port 331T Adapter 647594-B21

HP Ethernet 1Gb 2-port 332T Adapter 615732-B21

10 Gigabit Ethernet adapters

NOTE: A minimum of two Gigabytes (2 GB) of system memory is required per each adapter

Intel chipset-based with RSS, VMQ, VMWVQ, VMDq, MSI-X,EEE features¹

HP Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

HP Ethernet 10Gb 2-port 561T Adapter (RDMA and I/O AT features are also available with this NIC) 716591-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter 727055-B21

Mellanox chipset-based with RDMA, RSS, VMQ, VMWVQ,MSI-X,EEE features¹

HP Ethernet 10Gb 2-port 546SFP+ Adapter 779793-B21

1. Features description

RSS: Receive side scaling (RSS) is a network driver technology that enables the efficient distribution of network receive processing across multiple CPUs in multiprocessor systems.

EEE (Green Ethernet): Reduces power consumption during periods of low activity.

I/O AT: I/O Acceleration Technology (I/OAT), developed by Intel, is a set of features particularly designed to reduce the receiver-side packet processing overhead.

MSI-X: For PCI 3.0, a device can support up to 2,048 different messages. Devices that support PCI 3.0 MSI-X feature a dynamically programmable hardware table that contains entries for each of the interrupt sources in the device. Each entry in this table can be programmed with one of the messages that are allocated to a device, and can be independently masked.

VMDq : Virtual Machine Device Queues (VMDq) is a technology that allows the network adapter to create multiple separate queues, distributing the processing load across multiple cores.

VMWVQ: Enables VMs in your VMWare environment to take advantage of 10GbE, without this capability the max you can get is about 3 - 4 Gb.

VMQ : VMQ, in a Hyper-V implementation, uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management

operating system to the virtual machine. This improves network performance to the VMs.

RDMA: Remote Direct Memory Access (RDMA) is a technology that allows computers in a network to exchange data in main memory without involving the processor, cache, or operating system of either computer. Like locally-based Direct Memory Access (DMA), RDMA improves throughput and performance because it frees up resources. RDMA also facilitates a faster data transfer rate.

RDMA also facilitates a faster data transfer rate.

iSCSIa : iSCSI acceleration reduces CPU utilization by up to 8x.

StoreEasy 1550 configuration information

Step 5: Choose optional extra memory kit

NOTE: Add the same type memory to the product that is shipped standard with the product

Registered DIMMs (RDIMMs) for E5-2600v3 Series

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726718-B21

Step 6 : Choose redundant power supply

Add a second power supply for redundancy

HP 750W Common Slot Gold Hot Plug Power Supply Kit 512327-B21

Step 7 : Choose optional Optical Drives

HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive 726536-B21

HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive 726537-B21

Step 8: Choose optional Security option

HP Trusted Platform Module Option 488069-B21

Step 9: Choose optional System Recovery option

HPE StoreEasy XX50 Rcvry Software Media Kit P4A92A

The HPE StoreEasy XX50 Recovery Software Media Kit contains a System Recovery DVD that is used to re-install the factory operating system image. Booting the system from the System Recovery DVD will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the StoreEasy 1000 Administrator Guide for more information on performing a System Recovery.

NOTE: If desired the StoreEasy 1550 Recovery Software can be downloaded from HPE's Software Depot at no charge, so that the user can create their own System Recovery DVD or System Recovery USB flash drive. The Recovery Software is available here:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=P4A92-11002>

NOTE: For more information on how to perform a system recovery on a StoreEasy 1550 refer to the StoreEasy 1000 Administrator's Guide. The guide can be downloaded from <http://www.hp.com/support> Search for the StoreEasy product model in the drivers and download section.

NOTE: All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.

StoreEasy 1650 configuration information

Common Specifications for all HPE StoreEasy 1650 Storage models

| | |
|------------------------|--|
| Processor | One Intel® Xeon® E5-2609v3 Processor (1.9GHz/6-core/15MB/85W) |
| Memory | 16GB (2 x 8GB Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory) SKU# M0S97A only - 48GB (3 x 16GB Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory) |
| Storage Controller | HPE Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller |
| Internal Drive Support | Twelve 3.5" (Large Form Factor) hot-plug drive bays in front, Two 2.5" (Small Form Factor) hot-plug drive bays in rear occupied by OS drives SKU# M0S97A only- Twelve 3.5" (Large Form Factor) hot-plug drive bays in front, Three 3.5" (Large Form Factor) hot-plug drive bays in rear, two of which contain a 120GB RAID 1 partition for the OS |
| Network Port(s) | 1Gb Ethernet 4-port 331i Adapter |
| Expansion Slots | 3x PCIe |
| Power | 2 x 800W Platinum |
| Form Factor | 2U rack |
| Operating System | Microsoft® Windows Storage Server 2012 R2, Standard Edition |
| Licenses | HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License NOTE: For more information, visit: http://www.hp.com/go/ilo |

Choose a Pre-configured model

StoreEasy 1650 Pre-configured models come with factory-installed drives and the Microsoft Windows Storage Server 2012 R2 Standard Edition operating system pre-installed

NOTE: All options in steps 2 to 9 of configure-to-order model are available for pre-configured models. Ordered options ship separately and are not factory integrated.

NOTE: Model names are based on raw storage capacity, not available user storage.

| | |
|--|--------|
| HP StoreEasy 1650 16TB SAS Storage (8 x 2TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 4 open LFF slots) | K2R16A |
| HP StoreEasy 1650 32TB SAS Storage (8 x 4TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 4 open LFF slots) | K2R17A |
| HP StoreEasy 1650 48TB SAS Storage (8 x 6TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 4 open LFF slots) | K2R18A |
| NOTE: When adding drives to the any of the 4 open LFF slots for the models above, Hewlett Packard Enterprise recommends as a best practice to use all internal data drives of the same type and capacity. | |
| HP StoreEasy 1650 90TB SATA Storage (15 x 6TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 12 in front and 3 in rear) | M0S97A |

StoreEasy 1650 configuration information

Steps for Configure-to-order model

Step1 : Choose a Base Model

The StoreEasy 1650 model come with 2 x120GB 6G SATA Value Endurance SFF (2.5-inch) SC Solid State Disk (SSD) drives factory configured as RAID 1 with OS pre-installed (the OS drives are in the two rear bays). The StoreEasy 1650 can ship with just the OS drives and no data drives. If data drives are needed, select the drives for factory integration.

NOTE: You should use internal data drives for this models be the same type and capacity. The data drives don't have to be the same as the OS drives.

StoreEasy 1650 Storage

K2R15A

NOTE: This model does not include pre-configured data drives. It does include 2 x120GB 6G SATA Value Endurance SFF (2.5-inch) SC Solid State Disk (SSD) drives factory configured as RAID 1 with OS pre-installed (the OS drives are in the two rear SFF bays). Data drives can be added for factory integration

Specifications

Same as the StoreEasy 1650 pre-configured models listed above

Step2 : Choose required internal storage and optional external storage drives

| | | |
|---------------|-----------------------------------|----|
| Drive Options | Minimum Number of Drives Required | 0 |
| | Maximum Number of Drives Allowed | 12 |

StoreEasy 1650 LFF Drive Bundles

HP StoreEasy 32TB Smart-carrier 4-pack Bundle N9Y12A

NOTE: Bundle contains 4 x HPE 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive (SKU #793703-B21)

HP StoreEasy 24TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle K2R22A

NOTE: Bundle contains 4 x HPE 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 761477-B21)

HP StoreEasy 16TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W91A

NOTE: Bundle contains 4 x HPE 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 695510-B21)

HP StoreEasy 12TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W90A

NOTE: Bundle contains 4 x HPE 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652766-B21)

HP StoreEasy 8TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W89A

StoreEasy 1650 configuration information

NOTE: Bundle contains 4 x HPE 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652753-B21)

HP StoreEasy 4TB SAS LFF(3.5in) Smart Carrier 4-pack HDD Bundle E7W88A

NOTE: Bundle contains 4 x HPE 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive (SKU 652753-B21)

HPE Drive options (The following options are applicable only for the external storage drives)

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 765424-B21

HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737394-B21

HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737261-B21

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 8TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive 819201-B21

HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive 793703-B21

HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive 793699-B21

HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive 765259-B21

HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 761477-B21

HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive 765257-B21

HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 818367-B21

HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 818365-B21

HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 652766-B21

HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 652757-B21

HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 652753-B21

SAS Hot Plug LFF (3.5-inch) 512e Performance Drives

HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive 793671-B21

HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive 793669-B21

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 8TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive 819203-B21

HP 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive 793695-B21

HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yrWarranty Hard Drive 793683-B21

HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive 765255-B21

HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive 765253-B21

HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 693687-B21

HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 628061-B21

HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 658079-B21

HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 657750-B21

HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 658071-B21

SATA Hot Plug LFF (3.5-inch) 512e Performance Drives

HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive 793667-B21

StoreEasy 1650 configuration information

| | |
|--|------------|
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives | 793665-B21 |
| 12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762272-B21 |
| | |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Solid State Drives | |
| HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764945-B21 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764943-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764941-B21 |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764939-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives | |
| HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816933-B21 |
| HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816923-B21 |
| HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804608-B21 |
| HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816913-B21 |
| HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804602-B21 |
| HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816903-B21 |
| HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804596-B21 |
| HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789147-B21 |
| HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816893-B21 |
| HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804590-B21 |
| HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816883-B21 |
| HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804584-B21 |
| HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804578-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Write Intensive Solid State Drives | |
| HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804680-B21 |
| HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804674-B21 |
| HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804668-B21 |
| HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804642-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Mixed Use Solid State Drives | |
| HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804634-B21 |
| HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804628-B21 |
| HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 832417-B21 |
| HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804616-B21 |

D3000 or D6000 Disk Enclosures

The StoreEasy 1650 support all of D3000 or D6000 Disk Enclosure product families. A Smart Array with external ports

must be added to the StoreEasy 1650 to add external Disk Enclosures.

StoreEasy 1650 configuration information

(See the D3000 or D6000 Disk Enclosure QuickSpecs for more information).

Step 3 : Choose optional external storage controller

SAS Controllers

HPE Smart Array Controllers

HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller 726825-B21

HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller 726903-B21

HPE Smart Host Bus Adapters

HP H241 12Gb 2-ports Ext Smart Host Bus Adapter 726911-B21

Step 4 : Choose optional second Network Adapter

NOTE: HPE 331i Adapter 1GbEthernet 4-port is included in all of the StoreEasy 1650 models. Recommended option for additional network connectivity is HPE Ethernet 10Gb 2-port 560SFP+ Adapter – SKU#665249-B21

1 Gigabit Ethernet adapters

Intel chipset-based with RSS, I/O AT, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

HP Ethernet 1Gb 4-port 366T Adapter 811546-B21

HP Ethernet 1Gb 2-port 361T Adapter 652497-B21

Broadcom chipset-based with RSS,VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

HP Ethernet 1Gb 4-port 331T Adapter 647594-B21

HP Ethernet 1Gb 2-port 332T Adapter 615732-B21

10 Gigabit Ethernet adapters

NOTE: A minimum of two Gigabytes (2 GB) of system memory is required per each adapter

Intel chipset-based with RSS, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

HP Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

HP Ethernet 10Gb 2-port 561T Adapter (RDMA and I/O AT features are also available with this NIC) 716591-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter 727055-B21

Broadcom chipset-based with RSS,VMQ, VMWNQ, VMDq, MSI-X features¹

HP Ethernet 10Gb 2-port 530T Adapter 656596-B21

HP Ethernet 10Gb 2-port 530SFP Adapter 652503-B21

Emulex chipset-based with RDMA, RSS, VMQ, VMWNQ, MSI-X features¹

HP Ethernet 10Gb 2-port 557SFP+ Adapter 788995-B21

Mellanox chipset-based NICs with RDMA, RSS, VMQ, VMWNQ,MSI-X,EEE features¹

HP Ethernet 10Gb 2-port 546SFP+ Adapter 779793-B21

FlexibleLOM Adapters

NOTE: FlexibleLOM Adapters provide flexibility in meeting networking needs now and adapt to any future requirements without using a standard PCIe slot. These options are field upgradeable, integrate seamlessly with the StoreEasy system architecture and form factor.

Intel chipset-based with RSS, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter 665243-B21

HP Ethernet 10Gb 2-port 561FLR-T Adapter (RDMA and I/O AT features are also available with this NIC) 700699-B21

HP Ethernet 1Gb 4-port 366FLR Adapter 665240-B21

StoreEasy 1650 configuration information

| | |
|--|------------|
| HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter | 727054-B21 |
| Broadcom chipset-based with RSS,VMQ, VMWVQ, VMDq, MSI-X features ¹ | |
| HP FlexFabric 10Gb 2-port 533FLR-T Adapter | 700759-B21 |
| HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter | 700751-B21 |
| HP Ethernet 1Gb 4-port 331FLR Adapter | 629135-B22 |
| Emulex chipset-based with RDMA, RSS, VMQ, VMWVQ, MSI-X features ¹ | |
| HP FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter | 727060-B21 |
| HPE FlexFabric 10Gb 2-port 556FLR-T Adapter | 794525-B21 |
| Mellanox chipset-based with RDMA, RSS, VMQ, VMWVQ, MSI-X features ¹ | |
| HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter | 779799-B21 |
| HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter | 817749-B21 |

1. Features description

RSS: Receive side scaling (RSS) is a network driver technology that enables the efficient distribution of network receive processing across multiple CPUs in multiprocessor systems.

EEE (Green Ethernet): Reduces power consumption during periods of low activity.

I/O AT: I/O Acceleration Technology (I/OAT), developed by Intel, is a set of features particularly designed to reduce the receiver-side packet processing overhead.

MSI-X: For PCI 3.0, a device can support up to 2,048 different messages. Devices that support PCI 3.0 MSI-X feature a dynamically

programmable hardware table that contains entries for each of the interrupt sources in the device. Each entry in this table can be

programmed with one of the messages that are allocated to a device, and can be independently masked.

VMDq : Virtual Machine Device Queues (VMDq) is a technology that allows the network adapter to create multiple separate queues, distributing the processing load across multiple cores.

VMWVQ: Enables VMs in your VMWare environment to take advantage of 10GbE, without this capability the max you can get is about 3 - 4 Gb.

VMQ : VMQ, in a Hyper-V implementation, uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management

operating system to the virtual machine. This improves network performance to the VMs.

RDMA: Remote Direct Memory Access (RDMA) is a technology that allows computers in a network to exchange data in main memory without involving the processor, cache, or operating system of either computer. Like locally-based Direct Memory Access (DMA), RDMA improves throughput and performance because it frees up resources. RDMA also facilitates a faster data transfer rate.

iSCSIa : iSCSI acceleration reduces CPU utilization by up to 8x.

Infiniband Adapters

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information :

<http://www.hp.com/go/ProLiantNICs>

| | |
|--|------------|
| HP InfiniBand FDR 2-port 545QSFP Adapter | 702211-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter | 764284-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR+QSFP Adapter | 764285-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR+QSFP Adapter | 764286-B21 |
| HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter | 825110-B21 |
| HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter | 825111-B21 |

StoreEasy 1650 configuration information

Step 5: Choose optional Fibre Channel HBAs and CNAs

NOTE: For the complete listing of Fibre Channel Host Bus Adapters for Windows please see: <http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Emulex Fibre Channel HBAs

| | |
|--|--------|
| HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter | C8R38A |
| HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter | C8R39A |
| HPE StoreFabric SN1100E 4-port 16Gb Fibre Channel Host Bus Adapter | P9D99A |
| HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AJ762B |
| HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ763B |
| HP StoreFabric 84E 4-port 8Gb Fibre Channel Host Bus Adapter | E7Y63A |

QLogic Fibre Channel HBAs

| | |
|---|--------|
| HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AK344A |
| HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ764A |
| HPE StoreFabric 84Q 4-port 8Gb Fibre Channel Host Bus Adapter | P9D91A |
| HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter | QW971A |
| HPE StoreFabric SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter | P9D93A |
| HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter | QW972A |
| HPE StoreFabric SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter | P9D94A |

Converged Network Adapter

| | |
|---|--------|
| HP StoreFabric CN1100R Dual Port Converged Network Adapter | QW990A |
| HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter | N3U52A |
| HP StoreFabric CN1200E 10Gb Converged Network Adapter | E7Y06A |
| HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter | N3U51A |

Step 6: Choose optional second Processor

| | |
|---|------------|
| HP DL380 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit I/O Expansion Option | 719052-B21 |
| HP DL380 Gen9 Secondary 3 Slot GPU Ready Riser Kit | 719073-B21 |

NOTE: This is for slot 2 and supports double wide GPGPUs. Slot2: 2x Gen3 x16 FH/FL, 1xGen3 x8 FH/HL.

Step 7: Choose optional extra memory kit

NOTE: Add the same type memory to the product that is shipped standard with the product

Registered DIMMs (RDIMMs) for E5-2600v3 Series

| | |
|--|------------|
| HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726718-B21 |
| HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726719-B21 |

Step 8: Choose optional Security option

| | |
|-----------------------------------|------------|
| HP Trusted Platform Module Option | 488069-B21 |
|-----------------------------------|------------|

Step 9: Choose optional System Recovery option

StoreEasy 1650 configuration information

HP StoreEasy XX50 Recovery Software Media Kit

P4A92A

The HPE StoreEasy XX50 Recovery Software Media Kit contains a System Recovery DVD that is used to re-install the factory operating system image. Booting the system from the System Recovery DVD will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the StoreEasy 1000 Administrator Guide for more information on performing a System Recovery.

NOTE: If desired the StoreEasy 1650 Recovery Software can be downloaded from HPE's Software Depot at no charge, so that the user can create their own System Recovery DVD or System Recovery USB flash drive. The Recovery Software is available here:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=P4A92-11002>

NOTE: For more information on how to perform a system recovery on a StoreEasy 1650 refer to the StoreEasy 1000 Administrator's Guide. The guide can be downloaded from <http://www.hp.com/support> . Search for the StoreEasy product model in the drivers and download section.

NOTE: All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.

StoreEasy 1650 Expanded configuration information

Common Specifications for all HPE StoreEasy 1650 Expanded Storage models

| | |
|------------------------|---|
| Processor | One Intel® Xeon® E5-2609v3 Processor (1.9GHz/6-core/15MB/85W) |
| Memory | 16GB (2 x 8GB Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory) |
| Storage Controller | HPE Flexible Smart Array P840ar/2G FIO Controller |
| Internal Drive Support | Twenty eight 3.5" (Large Form Factor) hot-plug drive bays (24 in front and 4 in rear), HPE Dual 120GB Value Endurance Solid State M.2 Enablement Kit in rear PCIe slot used for OS drives |
| Network Port(s) | 1Gb Ethernet 2-port 361i Adapter |
| Expansion Slots | 4x PCIe |
| Power | 2 x 800W Platinum |
| Form Factor | 2U rack |
| Operating System | Microsoft® Windows Storage Server 2012 R2, Standard Edition |
| Licenses | HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License NOTE: For more information, visit: http://www.hp.com/go/ilo |

Choose a Pre-configured model

StoreEasy 1650 Expanded Pre-configured models come with factory-installed drives and the Microsoft Windows Storage Server

2012 R2 Standard Edition operating system pre-installed

NOTE: All options in steps 2 to 9 of configure-to-order model are available for pre-configured models. Ordered options ship separately and are not factory integrated.

NOTE: Model names are based on raw storage capacity, not available user storage.

| | |
|---|--------|
| HP StoreEasy 1650 Expanded 32TB SAS Storage (8 x 4TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 20 open LFF slots) | N9Y09A |
| HP StoreEasy 1650 Expanded 48TB SAS Storage (8 x 6TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 20 open LFF slots) | N9Y10A |
| HP StoreEasy 1650 Expanded 64TB SAS Storage (8 x 8TB 6G 7.2K RPM LFF MDL SAS HDDs pre-installed, 20 open LFF slots) | N9Y11A |

NOTE: When adding drives to the any of the 4 open LFF slots for the models above, Hewlett Packard Enterprise recommends as a best practice to use all internal data drives of the same type and capacity.

StoreEasy 1650 Expanded configuration information

Steps for Configure-to-order model

Step1 : Choose a Base Model

The StoreEasy 1650 Expanded model come with 2 x120GB 6G SATA Value Endurance SFF (2.5-inch) SC Solid State Disk (SSD) drives factory configured as RAID 1 with OS pre-installed (the OS drives are in the two rear bays). The StoreEasy 1650 Expanded can ship with just the OS drives and no data drives. If data drives are needed, select the drives for factory integration.

NOTE: You should use internal data drives for this models be the same type and capacity. The data drives don't have to be the same as the OS drives.

StoreEasy 1650 Expanded Storage N9Y08A

NOTE: This model does not include pre-configured data drives. It does include Dual 120GB Value Endurance Solid State M.2 Enablement Kit in rear PCIe slot factory configured as RAID 1 with OS pre-installed. Data drives can be added for factory integration

Specifications Same as the StoreEasy 1650 Expanded pre-configured models listed above

Step2 : Choose required internal storage and optional external storage drives

| | | |
|---------------|-----------------------------------|----|
| Drive Options | Minimum Number of Drives Required | 4 |
| | Maximum Number of Drives Allowed | 28 |

StoreEasy 1650 Expanded LFF Drive Bundles

HP StoreEasy 8TB SAS LFF (3.5in) Low profile 4-pack HDD Bundle N9Y58A

NOTE: Bundle contains 4 x HPE 2TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive (SKU# 797279-B21)

HP StoreEasy 16TB SAS LFF (3.5in) Low profile 4-pack HDD Bundle N9Y43A

NOTE: Bundle contains 4 x HPE 4TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive (SKU# 797267-B21)

HP StoreEasy 24TB SAS LFF (3.5in) Low profile 4-pack HDD Bundle N9Y44A

NOTE: Bundle contains 4 x HPE 6TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive (SKU# 797263-B21)

HP StoreEasy 32TB SAS LFF (3.5in) Low profile 4-pack HDD Bundle N9Y45A

NOTE: Bundle contains 4 x HPE 8TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive (SKU# 805337-B21)

HP StoreEasy 32TB SATA LFF (3.5in) Low profile 4-pack HDD N9Y46A

NOTE: Bundle contains 4 x HPE 8TB 6G SATA 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive (SKU# 805334-B21)

HPE Drive options (The following options are applicable only for the external storage drives)

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

| | |
|--|------------|
| HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive | 805337-B21 |
| HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive | 797263-B21 |
| HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive | 797265-B21 |

StoreEasy 1650 Expanded configuration information

| | |
|---|------------|
| HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive | 797271-B21 |
| HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive | 797273-B21 |
| HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) Low Profile Midline 1yr Warranty Hard Drive | 797275-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765255-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 753874-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765253-B21 |
| HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 693687-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 628061-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658079-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 657750-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| SATA Hot Plug LFF (3.5-inch) Performance Drives | |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793667-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives | 793665-B21 |
| 12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762272-B21 |
| HP 800GB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762270-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691854-B21 |
| HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691852-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives | |
| HP 960GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789157-B21 |
| HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789147-B21 |
| HP 240GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789137-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value G1 Solid State Drives | |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive | 756660-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive | 756639-B21 |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive | 756624-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Solid State Drives | |
| HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764945-B21 |

StoreEasy 1650 Expanded configuration information

| | |
|---|------------|
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764943-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764941-B21 |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764939-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive | 757342-B21 |
| HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718189-B21 |
| HP 600GB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive | 739900-B21 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718183-B21 |
| HP 300GB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive | 739890-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718177-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Light G1 Solid State Drives | |
| HP 960GB 6G SATA Light Endurance LFF 3.5-in SC Converter ENT Light 3yr Wty G1 Solid State Drive | 756604-B21 |

D3000 or D6000 Disk Enclosures

The StoreEasy 1650 Expanded support all of the D3000 or D6000 Disk Enclosure product families. A Smart Array with external

Ports must be added to the StoreEasy 1650 Expanded to add external Disk Enclosures. (See the D3000 or D6000 Disk Enclosure QuickSpecs for more information)

Step 3 : Choose optional external storage controller

SAS Controllers

HPE Smart Array Controllers

| | |
|--|------------|
| HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller | 726825-B21 |
|--|------------|

HPE Smart Host Bus Adapters

| | |
|---|------------|
| HP H241 12Gb 2-ports Ext Smart Host Bus Adapter | 726911-B21 |
|---|------------|

Step 4 : Choose optional second Network Adapter

NOTE: HPE 361i 1GbEthernet 2-port Network Adapter is included in all of the StoreEasy 1650 Expanded models. Recommended option for additional network connectivity is HPE Ethernet 10Gb 2-port 560SFP+ Adapter – SKU#665249-B21

1 Gigabit Ethernet adapters

StoreEasy 1650 Expanded configuration information

Broadcom chipset-based with RSS,VMQ, VMWVQ, VMDq, MSI-X,EEE features¹

| | |
|-------------------------------------|------------|
| HP Ethernet 1Gb 4-port 331T Adapter | 647594-B21 |
| HP Ethernet 1Gb 2-port 332T Adapter | 615732-B21 |

10 Gigabit Ethernet adapters

NOTE: A minimum of two Gigabytes (2 GB) of system memory is required per each adapter

Intel chipset-based with RSS, VMQ, VMWVQ, VMDq, MSI-X,EEE features¹

| | |
|--|------------|
| HP Ethernet 10Gb 2-port 560SFP+ Adapter | 665249-B21 |
| HP Ethernet 10Gb 2-port 561T Adapter (RDMA and I/O AT features are also available with this NIC) | 716591-B21 |

| | |
|--|------------|
| HPE Ethernet 10Gb 2-port 562SFP+ Adapter | 727055-B21 |
|--|------------|

Broadcom chipset-based with RSS,VMQ, VMWVQ, VMDq, MSI-X features¹

| | |
|--------------------------------------|------------|
| HP Ethernet 10Gb 2-port 530T Adapter | 656596-B21 |
|--------------------------------------|------------|

Mellanox chipset-based with RDMA, RSS, VMQ, VMWVQ,MSI-X,EEE features¹

| | |
|---|------------|
| HP Ethernet 10Gb 2-port 546SFP+ Adapter | 779793-B21 |
|---|------------|

FlexibleLOM Adapters

NOTE: FlexibleLOM Adapters provide flexibility in meeting networking needs now and adapt to any future requirements without using a standard PCIe slot. These options are field upgradeable, integrate seamlessly with the StoreEasy system architecture and form factor

Intel chipset-based with RSS, VMQ, VMWVQ, VMDq, MSI-X,EEE features¹

| | |
|--|------------|
| HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter | 665243-B21 |
| HP Ethernet 1Gb 4-port 366FLR Adapter | 665240-B21 |
| HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter | 727054-B21 |
| Mellanox chipset-based with RDMA, RSS, VMQ, VMWVQ, MSI-X features ¹ | |
| HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter | 779799-B21 |

1. Features description

RSS: Receive side scaling (RSS) is a network driver technology that enables the efficient distribution of network receive processing across multiple CPUs in multiprocessor systems.

EEE (Green Ethernet) : Reduces power consumption during periods of low activity.

I/O AT: I/O Acceleration Technology (I/OAT), developed by Intel, is a set of features particularly designed to reduce the receiver-side packet processing overhead.

MSI-X: For PCI 3.0, a device can support up to 2,048 different messages. Devices that support PCI 3.0 MSI-X feature a dynamically programmable hardware table that contains entries for each of the interrupt sources in the device. Each entry in this table can be programmed with one of the messages that are allocated to a device, and can be independently masked.

VMDq : Virtual Machine Device Queues (VMDq) is a technology that allows the network adapter to create multiple separate queues, distributing the processing load across multiple cores.

VMWVQ: Enables VMs in your VMWare environment to take advantage of 10GbE, without this capability the max you can get is about 3 - 4 Gb.

VMQ : VMQ, in a Hyper-V implementation, uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management operating system to the virtual machine. This improves network performance to the VMs.

RDMA: Remote Direct Memory Access (RDMA) is a technology that allows computers in a network to exchange data in main memory without involving the processor, cache, or operating system of either computer. Like locally-based Direct Memory Access (DMA), RDMA improves throughput and performance because it frees up resources. RDMA also facilitates a faster data transfer rate.

StoreEasy 1650 Expanded configuration information

iSCSIa : iSCSI acceleration reduces CPU utilization by up to 8x.

Infiniband Adapters

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information :

<http://www.hp.com/go/ProLiantNICs>

| | |
|---|------------|
| HP InfiniBand FDR 2-port 545QSFP Adapter | 702211-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter | 764284-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR+QSFP Adapter | 764285-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR+QSFP Adapter | 764286-B21 |
| QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA | 583211-B21 |
| HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter | 829335-B21 |

Step 5: Choose optional second Processor

Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor P9N51A

NOTE: P9N51A is not Factory Integrated on skus N9Y09A, N9Y10A or N9Y11A. For factory integration of the second processor order sku N9Y08A.

Step 6: Choose optional extra memory kit

NOTE: Add the same type memory to the product that is shipped standard with the product

Registered DIMMs (RDIMMs) for E5-2600v3 Series

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726718-B21

Step 7: Choose optional Security option

HP Trusted Platform Module Option 488069-B21

Step 8 : Choose optional System Recovery option

HP StoreEasy XX50 Recovery Software Media Kit P4A92A

The HPE StoreEasy XX50 Expanded Recovery Software Media Kit contains a System Recovery DVD that is used to re-install the factory operating system image. Booting the system from the System Recovery DVD will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the StoreEasy 1000 Administrator Guide for more information on performing a System Recovery.

NOTE: If desired the StoreEasy 1650 Expanded Recovery Software can be downloaded from HPE's Software Depot at no charge, so that the user can create their own System Recovery DVD or System Recovery USB flash drive. The Recovery Software is available here:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=P4A92-11002>

NOTE: For more information on how to perform a system recovery on a StoreEasy 1650

StoreEasy 1650 Expanded configuration information

Expanded refer to the StoreEasy 1000 Administrator's Guide. The guide can be downloaded from <http://www.hp.com/support>. Search for the StoreEasy product model in the drivers and download section.

NOTE: All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.

StoreEasy 1850 configuration information

Common Specifications for all HPE StoreEasy 1850 Storage models

| | |
|------------------------|---|
| Processor | One Intel® Xeon® E5-2609v3 Processor (1.9GHz/6-core/15MB/85W) |
| Memory | 16GB (2 x 8GB Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory) |
| Storage Controller | HPE Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller |
| Internal Drive Support | Twelve 3.5" (Large Form Factor) hot-plug drive bays in front, Two 2.5" (Small Form Factor) hot-plug drive bays in rear occupied by OS drives |
| Network Port(s) | 1Gb Ethernet 4-port 331i Adapter |
| Expansion Slots | 3x PCIe |
| Power | 2 x 800W Platinum |
| Form Factor | 2U rack |
| Operating System | Microsoft® Windows Storage Server 2012 R2, Standard Edition |
| Licenses | HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License |

NOTE: For more information, visit: <http://www.hp.com/go/ilo>

Choose a Pre-configured model

StoreEasy 1850 Pre-configured models come with factory-installed drives and the Microsoft Windows Storage Server 2012 R2 Standard Edition operating system pre-installed

NOTE: All options in steps 2 to 9 of configure-to-order model are available for pre-configured models. Ordered options ship separately and are not factory integrated.

NOTE: Model names are based on raw storage capacity, not available user storage.

| | |
|--|--------|
| HP StoreEasy 1850 9.6TB SAS Storage (8 x 1.2TB 12G 10K RPM ENT SAS SFF HDDs pre-installed, 16 open SFF slots) | K2R20A |
| HP StoreEasy 1850 14.4TB SAS Storage (8 x 1.8TB 12G 10K RPM ENT SAS 512e SFF HDDs pre-installed, 16 open SFF slots) | K2R21A |

NOTE: When adding drives to the any of the 16 open SFF slots for these models, You should use all internal data drives of the same type and capacity.

StoreEasy 1850 configuration information

Steps for Configure-to-order model

Step1 : Choose a Base Model

The StoreEasy 1850 models come with 2 x120GB 6G SATA Value Endurance SFF (2.5-inch) SC Solid State Disk (SSD) drives factory configured as RAID 1 with OS pre-installed (the OS drives are in the two rear bays). The StoreEasy 1850 can ship with just the OS drives and no data drives. If data drives are needed, select the drives for factory integration.

NOTE: You should use internal data drives for this models be the same type and capacity. The data drives don't have to be the same as the OS drives.

StoreEasy 1850 Storage

K2R19A

NOTE: This model does not include pre-configured data drives. It does include 2 x120GB 6G SATA Value Endurance SFF (2.5-inch) SC Solid State Disk (SSD) drives factory configured as RAID 1 with OS pre-installed (the OS drives are in the two rear SFF bays). Data drives can be added for factory integration

Specifications Same as the StoreEasy 1850 pre-configured models listed above

Step2 : Choose required internal Storage and optional external storage options

| | | |
|---------------|--------------------------|----|
| Drive Options | Minimum Number of Drives | 0 |
| | Required | |
| | Maximum Number of Drives | 24 |
| | Allowed | |

StoreEasy 1850 SFF Drive Bundles

HP StoreEasy 7.2TB SAS SFF(2.5in) Smart Carrier 4-pack HDD Bundle K2R23A

NOTE: Bundle contains 4 x HPE 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive (SKU 791034-B21)

HP StoreEasy 4.8TB SAS SFF(2.5in) Smart Carrier 4-pack HDD Bundle E7W93A

NOTE: Bundle contains 4 x HPE 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive (SKU 718162-B21)

HP StoreEasy 3.6TB SAS SFF(2.5in) Smart Carrier 4-pack HDD Bundle E7W92A

NOTE: Bundle contains 4 x HPE 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive (SKU 652589-B21)

HPE Drive options(The following options are applicable only for the external storage drives)

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

| | |
|--|------------|
| HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive | 791034-B21 |
| HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 781518-B21 |
| HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive | 718162-B21 |
| HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 785069-B21 |
| HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652589-B21 |
| HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Hard Drive | 748387-B21 |

StoreEasy 1850 configuration information

| | |
|---|------------|
| HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759212-B21 |
| HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 781516-B21 |
| HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652583-B21 |
| HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759210-B21 |
| HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652572-B21 |
| HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759208-B21 |
| HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 785067-B21 |
| HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652611-B21 |
| HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652564-B21 |
| HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652605-B21 |
| SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives | |
| HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765466-B21 |
| HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765464-B21 |
| HPE 1TB 12G SAS 7.2K rpm SFF (2.5in) SC Midline 1yr Warranty Hard Drive | 832514-B21 |
| HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652749-B21 |
| HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652745-B21 |
| SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives | |
| HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765455-B21 |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765453-B21 |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655710-B21 |
| HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655708-B21 |
| 12G SAS Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives | |
| HPE 1.6TB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846432-B21 |
| HPE 800GB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846430-B21 |
| 12G SAS Mixed Use Hot Plug SFF (2.5-inch) Solid State Drives | |
| HPE 3.2TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822567-B21 |
| HPE 1.6TB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846436-B21 |
| HPE 1.6TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822563-B21 |
| HPE 800GB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid State Drive | 846434-B21 |
| HPE 800GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822559-B21 |
| HPE 400GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 822555-B21 |
| 6G SATA Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives | |
| HPE 3.84TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816576-B21 |
| HPE 1.92TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816572-B21 |
| HPE 960GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816568-B21 |
| HPE 480GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816562-B21 |
| 12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 1.92TB 12G SAS Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802891-B21 |
| HP 1.6TB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779176-B21 |
| HP 800GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802586-B21 |
| HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779172-B21 |
| HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779168-B21 |

StoreEasy 1850 configuration information

| | |
|---|------------|
| HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive | 779164-B21 |
| HP 200GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802578-B21 |
| HP 400GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 802582-B21 |
| | |
| 12G SAS Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762263-B21 |
| HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762261-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives | |
| HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739898-B21 |
| 6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value M1 Solid State Drives | |
| HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764929-B21 |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764927-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764925-B21 |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764923-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives | |
| HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816929-B21 |
| HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816919-B21 |
| HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804605-B21 |
| HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816909-B21 |
| HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804599-B21 |
| HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 789145-B21 |
| HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804593-B21 |
| HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816899-B21 |
| HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816889-B21 |
| HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804587-B21 |
| HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816879-B21 |
| HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804581-B21 |
| HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804575-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives | |
| HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804677-B21 |
| HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804671-B21 |
| HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804665-B21 |
| HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804639-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives | |
| HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 817011-B21 |
| HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804631-B21 |
| HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816995-B21 |

StoreEasy 1850 configuration information

| | |
|--|------------|
| HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804625-B21 |
| HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 832414-B21 |
| HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816989-B21 |
| HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816985-B21 |
| HP 240GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816975-B21 |
| HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804613-B21 |
| HP 120GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816965-B21 |

D3000 or D6000 Disk Enclosures

The StoreEasy 1850 supports all of D3000 or D6000 Disk Enclosure product families. A Smart Array with external ports must be added to the StoreEasy 1850 to add external Disk Enclosures. (See the D3000 or D6000 Disk Enclosure QuickSpecs for more information)

Step 3 : Choose optional external storage controller

SAS Controllers

HPE Smart Array Controllers

| | |
|--|------------|
| HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller | 726825-B21 |
| HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller | 726903-B21 |

HPE Smart Host Bus Adapters

| | |
|---|------------|
| HP H241 12Gb 2-ports Ext Smart Host Bus Adapter | 726911-B21 |
|---|------------|

Step 4 : Choose optional second Network Adapter

NOTE: HPE 331i Adapter 1GbEthernet 4-port is included in all of the StoreEasy 1850 models. Recommended option for additional network connectivity is HPE Ethernet 10Gb 2-port 561T Adapter - SKU# 716591-B21

1 Gigabit Ethernet adapters

Intel chipset-based with RSS, I/O AT, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

| | |
|-------------------------------------|------------|
| HP Ethernet 1Gb 4-port 366T Adapter | 811546-B21 |
| HP Ethernet 1Gb 2-port 361T Adapter | 652497-B21 |

Broadcom chipset-based with RSS,VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

| | |
|-------------------------------------|------------|
| HP Ethernet 1Gb 4-port 331T Adapter | 647594-B21 |
| HP Ethernet 1Gb 2-port 332T Adapter | 615732-B21 |

10 Gigabit Ethernet adapters

NOTE: A minimum of two Gigabytes (2 GB) of system memory is required per each adapter

Intel chipset-based with RSS, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

| | |
|--|------------|
| HP Ethernet 10Gb 2-port 560SFP+ Adapter | 665249-B21 |
| HP Ethernet 10Gb 2-port 561T Adapter (RDMA and I/O AT features are also available with this NIC) | 716591-B21 |

| | |
|--|------------|
| HPE Ethernet 10Gb 2-port 562SFP+ Adapter | 727055-B21 |
|--|------------|

Broadcom chipset-based with RSS,VMQ, VMWNQ, VMDq, MSI-X features¹

| | |
|--|------------|
| HP Ethernet 10Gb 2-port 530T Adapter | 656596-B21 |
| HP Ethernet 10Gb 2-port 530SFP Adapter | 652503-B21 |

Mellanox chipset-based with RDMA, RSS, VMQ, VMWNQ,MSI-X,EEE features¹

| | |
|---|------------|
| HP Ethernet 10Gb 2-port 546SFP+ Adapter | 779793-B21 |
|---|------------|

StoreEasy 1850 configuration information

| | |
|---|------------|
| HP Ethernet 10Gb 2-port 557SFP+ Adapter | 788995-B21 |
|---|------------|

FlexibleLOM Adapters

NOTE: FlexibleLOM Adapters provide flexibility in meeting networking needs now and adapt to any future requirements without using a standard PCIe slot. These options are field upgradeable, integrate seamlessly with the StoreEasy system architecture and form factor

Intel chipset-based with RSS, VMQ, VMWNQ, VMDq, MSI-X,EEE features¹

| | |
|---|------------|
| HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter | 665243-B21 |
|---|------------|

| | |
|--|------------|
| HP Ethernet 10Gb 2-port 561FLR-T Adapter (RDMA and I/O AT features are also available with this NIC) | 700699-B21 |
|--|------------|

| | |
|---------------------------------------|------------|
| HP Ethernet 1Gb 4-port 366FLR Adapter | 665240-B21 |
|---------------------------------------|------------|

| | |
|--|------------|
| HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter | 727054-B21 |
|--|------------|

Broadcom chipset-based with RSS,VMQ, VMWNQ, VMDq, MSI-X features¹

| | |
|--|------------|
| HP FlexFabric 10Gb 2-port 533FLR-T Adapter | 700759-B21 |
|--|------------|

| | |
|---|------------|
| HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter | 700751-B21 |
|---|------------|

| | |
|---------------------------------------|------------|
| HP Ethernet 1Gb 4-port 331FLR Adapter | 629135-B22 |
|---------------------------------------|------------|

Emulex chipset-based with RDMA, RSS, VMQ, VMWNQ, MSI-X features¹

| | |
|---|------------|
| HP FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter | 727060-B21 |
|---|------------|

| | |
|---|------------|
| HPE FlexFabric 10Gb 2-port 556FLR-T Adapter | 794525-B21 |
|---|------------|

Mellanox chipset-based with RDMA, RSS, VMQ, VMWNQ, MSI-X features¹

| | |
|---|------------|
| HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter | 779799-B21 |
|---|------------|

| | |
|--|------------|
| HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter | 817749-B21 |
|--|------------|

1. Features description

RSS: Receive side scaling (RSS) is a network driver technology that enables the efficient distribution of network receive processing across multiple CPUs in multiprocessor systems.

EEE (Green Ethernet): Reduces power consumption during periods of low activity.

I/O AT: I/O Acceleration Technology (I/OAT), developed by Intel, is a set of features particularly designed to reduce the receiver-side packet processing overhead.

MSI-X: For PCI 3.0, a device can support up to 2,048 different messages. Devices that support PCI 3.0 MSI-X feature a dynamically programmable hardware table that contains entries for each of the interrupt sources in the device. Each entry in this table can be programmed with one of the messages that are allocated to a device, and can be independently masked.

VMDq: Virtual Machine Device Queues (VMDq) is a technology that allows the network adapter to create multiple separate queues, distributing the processing load across multiple cores.

VMWNQ: Enables VMs in your VMWare environment to take advantage of 10GbE, without this capability the max you can get is about 3 - 4 Gb.

VMQ : VMQ, in a Hyper-V implementation, uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management

operating system to the virtual machine. This improves network performance to the VMs.

RDMA: Remote Direct Memory Access (RDMA) is a technology that allows computers in a network to exchange data in main memory without involving the processor, cache, or operating system of either computer. Like locally-based Direct Memory Access (DMA), RDMA improves throughput and performance because it frees up resources. RDMA also facilitates a faster data transfer rate.

iSCSIa : iSCSI acceleration reduces CPU utilization by up to 8x.

StoreEasy 1850 configuration information

Infiniband Adapters

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information :

<http://www.hp.com/go/ProLiantNICs>

| | |
|--|------------|
| HP InfiniBand FDR 2-port 545QSFP Adapter | 702211-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter | 764284-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR+QSFP Adapter | 764285-B21 |
| HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR+QSFP Adapter | 764286-B21 |
| HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter | 825110-B21 |
| HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter | 825111-B21 |

Step 5: Choose optional Fibre Channel HBAs and CNAs

NOTE: For the complete listing of Fibre Channel Host Bus Adapters for Windows please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Emulex Fibre Channel HBAs

| | |
|--|--------|
| HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter | C8R38A |
| HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter | C8R39A |
| HPE StoreFabric SN1100E 4-port 16Gb Fibre Channel Host Bus Adapter | P9D99A |
| HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AJ762B |
| HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ763B |
| HP StoreFabric 84E 4-port 8Gb Fibre Channel Host Bus Adapter | E7Y63A |

QLogic Fibre Channel HBAs

| | |
|---|--------|
| HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AK344A |
| HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ764A |
| HPE StoreFabric 84Q 4-port 8Gb Fibre Channel Host Bus Adapter | P9D91A |
| HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter | QW971A |
| HPE StoreFabric SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter | P9D93A |
| HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter | QW972A |
| HPE StoreFabric SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter | P9D94A |

Converged Network Adapter

| | |
|---|--------|
| HP StoreFabric CN1100R Dual Port Converged Network Adapter | QW990A |
| HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter | N3U52A |
| HP StoreFabric CN1200E 10Gb Converged Network Adapter | E7Y06A |
| HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter | N3U51A |

StoreEasy 1850 configuration information

Step 6: Choose optional second Processor

HP DL380 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit 719052-B21

I/O Expansion Option

HP DL380 Gen9 Secondary 3 Slot GPU Ready Riser Kit 719073-B21

NOTE: This is for slot 2 and supports double wide GPGPUs. Slot2: 2x Gen3 x16 FH/FL, 1xGen3 x8 FH/HL.

Step 7: Choose optional extra memory kit

NOTE: Hewlett Packard Enterprise recommends that you add the same type memory to the product that is shipped standard with the product

Registered DIMMs (RDIMMs) for E5-2600v3 Series

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726718-B21

Step 8: Choose optional Security option

HP Trusted Platform Module Option 488069-B21

Step 9 : Choose optional System Recovery option

HP StoreEasy XX50 Recovery Software Media Kit P4A92A

The HPE StoreEasy XX50 Recovery Software Media Kit contains a System Recovery DVD that is used to re-install the factory operating system image. Booting the system from the System Recovery DVD will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the StoreEasy 1000 Administrator Guide for more information on performing a System Recovery.

NOTE: If desired the StoreEasy 1850 Recovery Software can be downloaded from HPE's Software Depot at no charge, so that the user can create their own System Recovery DVD or System Recovery USB flash drive. The Recovery Software is available here:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=P4A92-11002>

NOTE: For more information on how to perform a system recovery on a StoreEasy 1850 refer to the StoreEasy 1000 Administrator's Guide. The guide can be downloaded from <http://www.hp.com/support> . Search for the StoreEasy product model in the drivers and download section.


NOTE: All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.

Different Views of StoreEasy 1000 models

StoreEasy 1450

Front View


- | | |
|-----------------------------|----------------------|
| 1. Optical Drive (optional) | 3. USB 2.0 connector |
| 2. Serial label pull tab | 4. LFF Drive Bays |

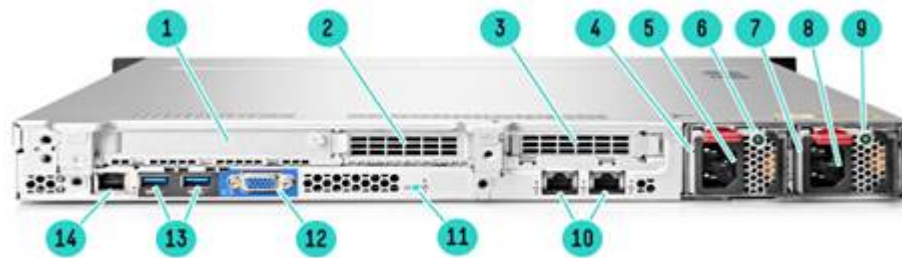

Rear view

- | | |
|---|-------------------------------------|
| 1. PCIe3 slot 1 (primary, associated with processor 1) | 8. Power supply 2 power connector |
| 2. PCIe3 slot 2 (primary, associated with processor 1 occupied by Smart Array P440) | 9. Power Supply 2 LED |
| 3. PCIe3 slot 3 (secondary, associated with processor 2) | 10. Embedded 2x1GbE network adapter |
| 4. Power supply 1 bay | 11. Unit ID LED |
| 5. Power supply 1 Power Connector (Optional) | 12. Video Connector |
| 6. Power supply 1 LED (Optional) | 13. USB3.0 connectors |
| 7. Power supply 2 bay | 14. Dedicated iLO connector |

Different Views of StoreEasy 1000 models

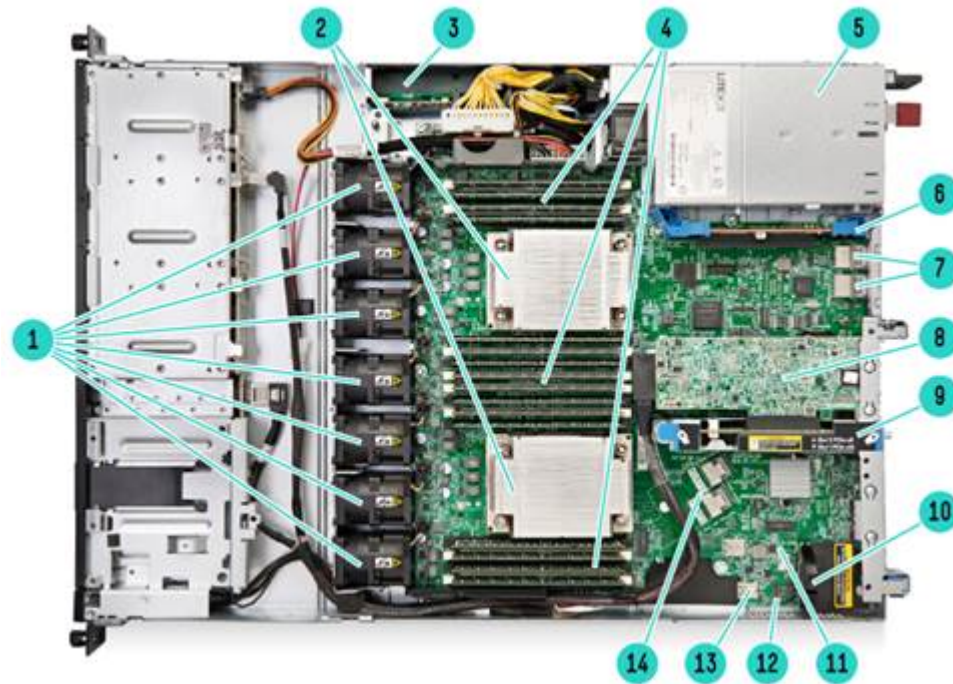


Internal View

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. Hot Swappable fans (up to 7) 2. Processor heat sinks (processors with HPE Smart Sockets placed below heat sinks) 3. HPE Smart Storage Battery 4. DDR4 DIMM slots (up to 16) 5. Entry level power supply bay (1x900W shown) 6. Connector for secondary PCIe riser (associated with CPU2) 7. Embedded 2x1GbE network adapter | <ol style="list-style-type: none"> 8. HPE Smart Array P440 controller 9. Primary PCIe riser (2 PCIe3 slots associated with CPU1) 10. Dedicated iLO module connector 11. MicroSD card slot 12. Internal SATA ports (one for ODD and another one reserved) 13. Internal USB 3.0 connector 14. Embedded B140i SATA controller (not used in StoreEasy 1450) |
|---|--|

StoreEasy 1550

NOTE: StoreEasy 1550 product views shown below are for references purposes and do not reflect exact configuration of the product. Refer to the technical specifications section of the QuickSpecs for more details.


Different Views of StoreEasy 1000 models

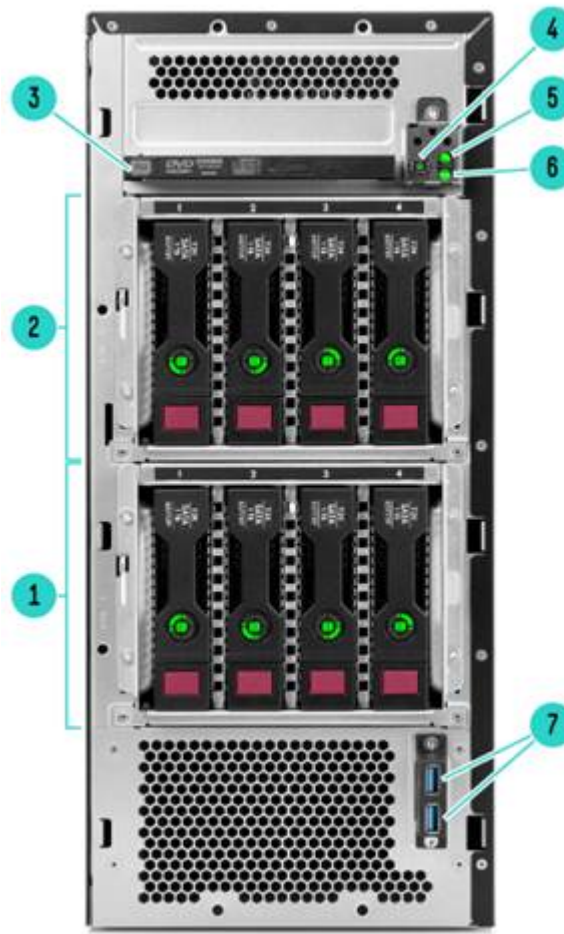

Front View

- 1. Drive cage
- 2. Drive cage (optional)
- 3. Optical drive (optional)
- 4. Power button/LED
- 5. Health LED
- 6. NIC status LED
- 7. USB 3.0 (2) connectors

Different Views of StoreEasy 1000 models

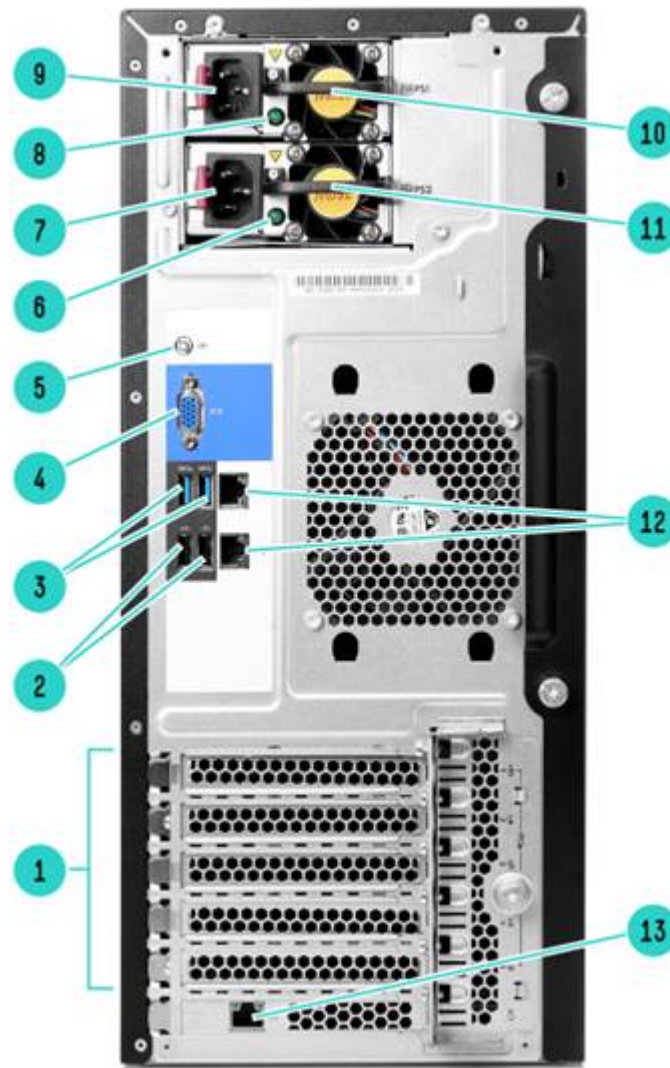

Rear View

- | | |
|---|------------------------------------|
| 1. PCIe3 Slots (Slots 1-5) | 8. Power supply 1 LED |
| 2. USB 2.0 (2) connectors | 9. Power supply 1 power connection |
| 3. USB 3.0 (2) connectors | 10. Power Supply 1 bay |
| 4. Video connector | 11. Power Supply 2 bay (optional) |
| 5. UID button/LED | 12. Network RJ-45 ports (2) |
| 6. Power supply 2 LED | 13. HPE ML Gen9 dedicated iLO port |
| 7. Power supply 2 power connection (optional) | |


Different Views of StoreEasy 1000 models

StoreEasy 1650



Front View


- | | |
|---|---------------------|
| 1. Health LED | 4. UID button/LED |
| 2. Power On/Standby button and system power LED | 5. 12 LFF Drive Bay |
| 3. NIC status LED | |

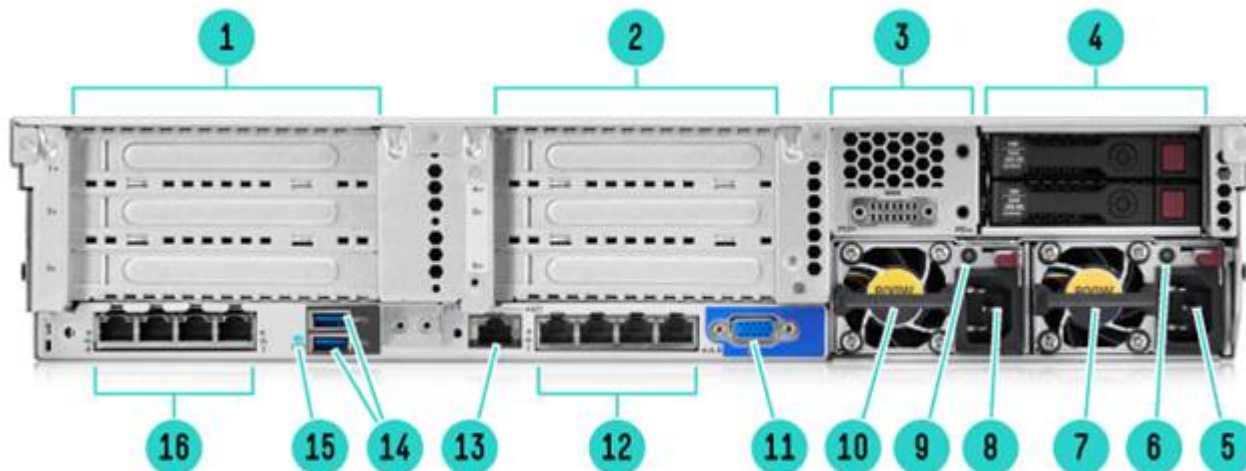

Rear view*

Different Views of StoreEasy 1000 models

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. PCI Slots (Slots 1-3 top to bottom, riser shipped standard) 2. PCI Slots (Slots 4-6 top to bottom, requires optional second riser card and second processor; not available on SE1650 90TB SKU# M0S97A) 3. Optional serial port 4. Rear 2 SFF drive slots (SE1650 90TB SKU# M0S97A has 3 LFF drives in rear – see Note below) 5. HPE Flexible Slot Power Supply bay 1 (800w shown) 6. Power supply Power LED 7. Power supply Power connection 8. HPE Flexible Slot Power Supply bay 2 (800w shown) | <ol style="list-style-type: none"> 9. Power supply Power LED 10. Power supply Power connection 11. VGA connector 12. Embedded 4x1GbE Network Adapter 13. Dedicated iLO connector 14. USB 3.0 connectors (2) 15. Unit ID LED 16. Optional FlexibleLOM ports (Shown: 4x1GbE) |
|---|--|

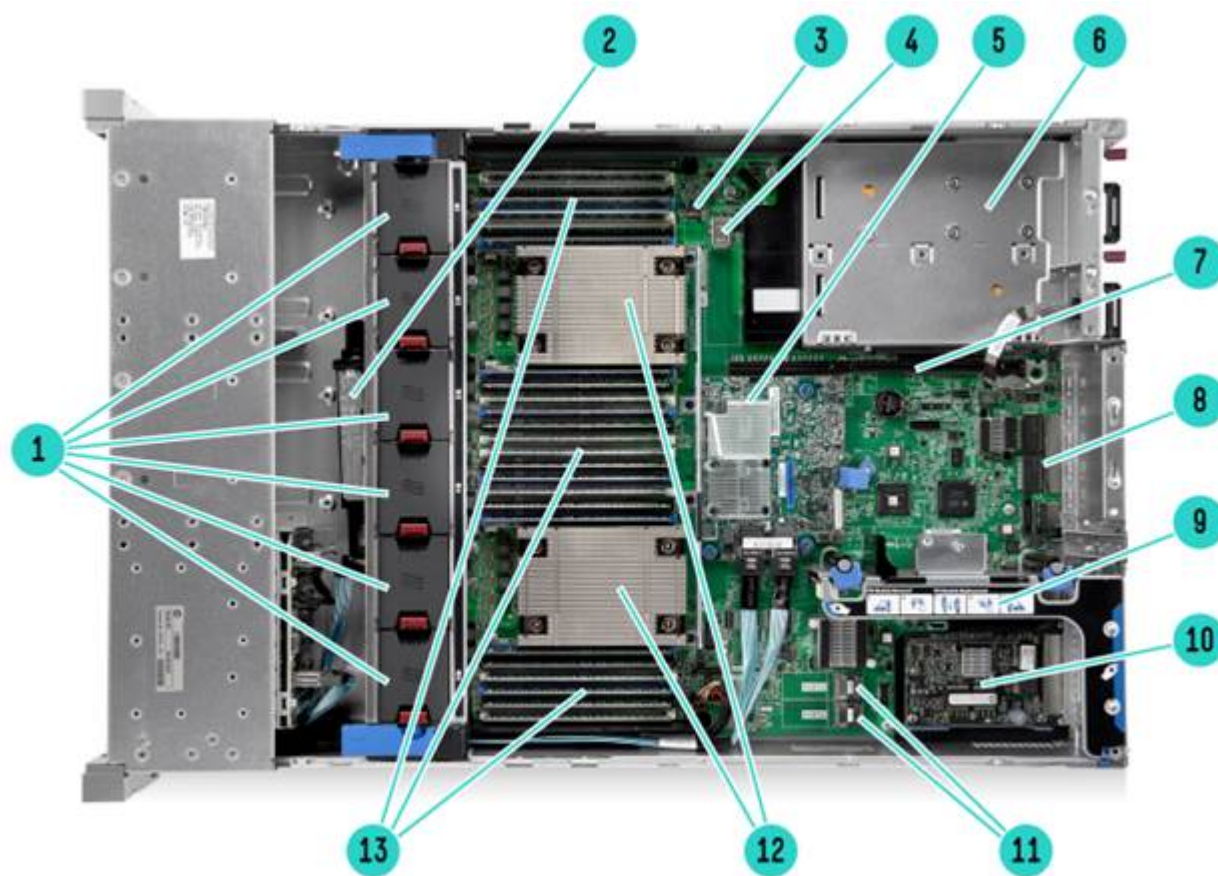

Internal View

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. Fan cage shown with 6 standard Hot-plug fans (High Performance fans optional) 2. HPE Smart Storage Battery 3. MicroSD card slot 4. Internal USB 3.0 connector 5. HPE Flexible Smart Array (P440ar) 6. (Under) Hot Plug redundant HPE Flexible Slot Power supplies | <ol style="list-style-type: none"> 8. Embedded 4x1Gbe NIC 9. Primary PCIe riser, standard (Optional double wide GPU riser) 10. Optional Flexible LOM slot 11. X4 SATA ports (1 and 2) 12. 2 Processors, heatsink showing, with HPE Smart Socket Guide 13. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor) |
|---|---|

Different Views of StoreEasy 1000 models


- 7. Connection for second (optional) riser (Required second CPU)

StoreEasy 1650 Expanded



Front View


- 1-12. Front row of LFF drives
- 13-24. Second row of LFF Drives

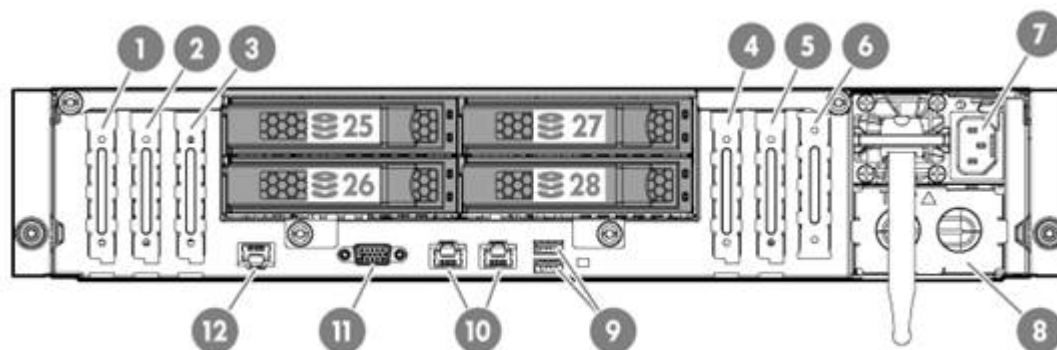

Rear view

Different Views of StoreEasy 1000 models

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. PCI Slot 7 2. PCI Slot 6 3. PCI Slot 5 4. Dual 120GB Value Endurance Solid State M.2 5. PCI Slot 1 6. Flexible LOM Slot 7. HPE Flexible Slot Power Supply bay 1 8. HPE Flexible Slot Power Supply bay 2 (blank shown) | <ol style="list-style-type: none"> 9. USB 3.0 Ports 10. Embedded 2x1GbE Ethernet 11. Rear VGA (Video) Port 12. Dedicated iLO Management Port 25. LFF Drive number 25 26. LFF Drive number 26 27. LFF Drive number 27 28. LFF Drive number 28 |
|---|--|

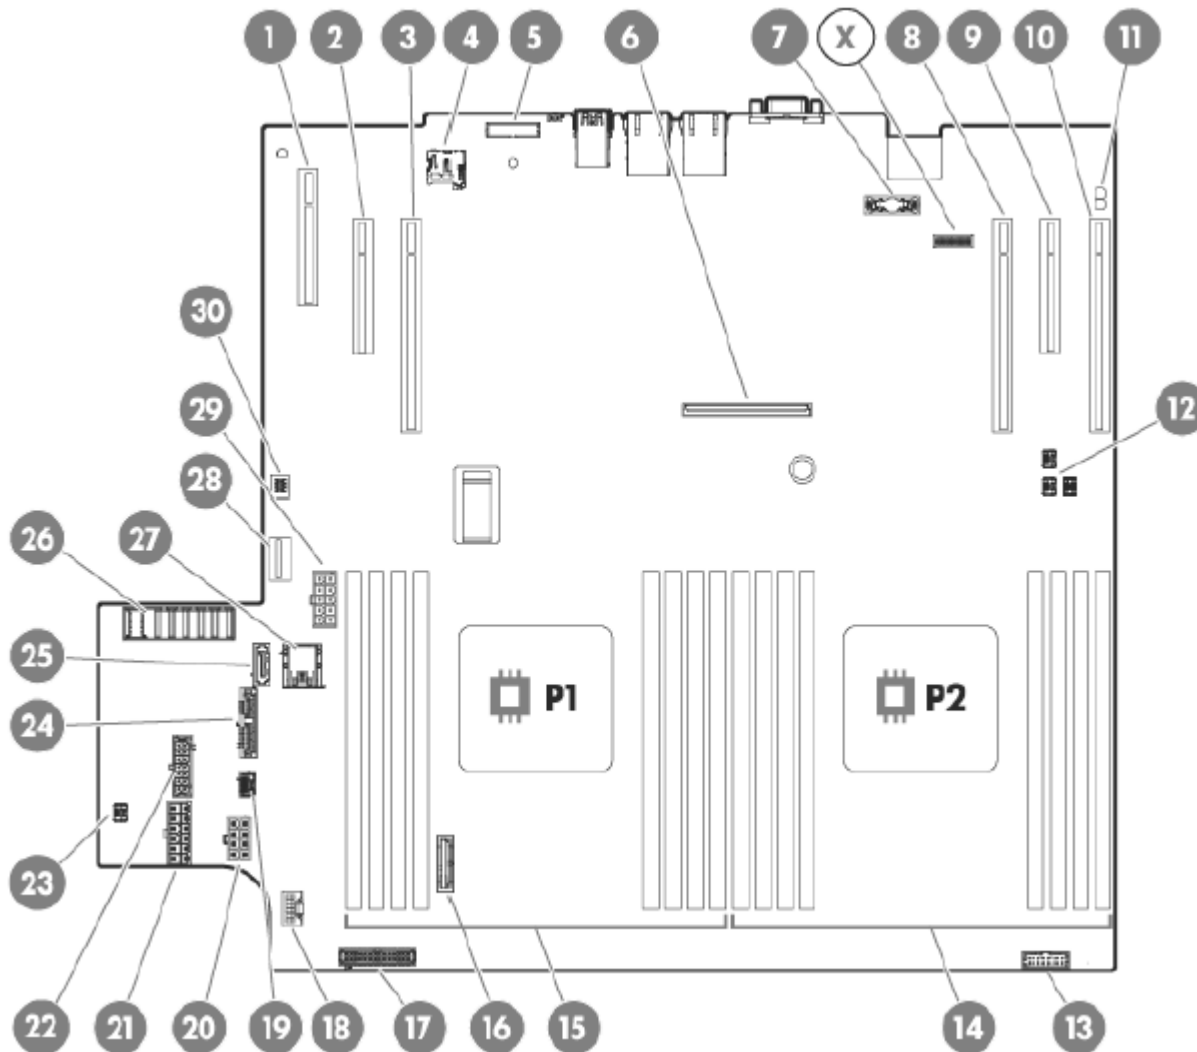

Different Views of StoreEasy 1000 models

Internal View

- | | |
|--|--|
| 1. Flexible LOM Slot | 17. Fan signal connector |
| 2. PCIe3 x8 (8, 4, 1) slot 1 for low-profile, standup expansion board | 18. HPE Smart Storage Battery connector |
| 3. PCIe3 x16 (16, 8, 4, 1) slot 2 for low-profile, standup expansion board or riser cage options | 19. Rear SFF drive backplane detection connector |
| 4. microSD slot | 20. Fan power connector |
| 5. TPM connector | 21. Front drive cage 2 backplane power connector |
| 6. HPE Flexible Smart Array Controller slot | 22. Front drive cage 1 backplane power connector |
| 7. Dedicated iLO management module connector | 23. Storage backup power connector for expansion slots 1–2 |
| 8. PCIe3 x16 (16, 8, 4, 1) slot 5 for low-profile, standup expansion board | 24. SATA 6Gb/s connector 4 |
| 9. PCIe3 x8 (8, 4, 1) slot 6 for low-profile, standup expansion board | 25. SATA 6Gb/s connector 5 |
| 10. PCIe3 x16 (16, 8, 4, 1) slot 7 for low-profile, standup expansion board | 26. Power pass-through board connector |
| 11. NMI header | 27. Internal USB 3.0 connector |

StoreEasy 1850



Front View

- | | |
|----------------------------|---|
| 1. 8 SFF Drive Bay 1 | 6. UID button/LED |
| 2. 8 SFF Drive Bay 2 | 7. NIC status LED |
| 3. 8 SFF Drive Bay 3 | 8. Health LED |
| 4. Serial label pull tab | 9. Power On/Standby button and system power LED |
| 5. Front USB 3.0 connector | |

Different Views of StoreEasy 1000 models

Rear view and internal view of StoreEasy 1850 the same as StoreEasy 1650 shown above

Technical Specifications

StoreEasy Dimensions 4 LFF - 1.7 x 17.1 x 23.9 inches (4.29 x 43.46 x 60.76 cm)
1450 (H x W x D)

Weight Maximum: 33.04 lb (15kg)
(approximate) (all hard

drives, power
supplies, and
processors
Installed)

Minimum: 22.03 lb (10kg)
(one hard
drive, power
supply, and
processor
installed)

Input Rated Line 100 to 240 VAC
Requirements Voltage

for Standard
460W PSU,
see power
specifications
tables for detail
on 460W,
750W and
1200W power
supplies)

Rated Input For 550W Power Supply:
Current 6.7 A (at 100 VAC)
3.3 A (at 200 VAC)

Rated Input 47 to 63 Hz
Frequency

Rated Input For 550 W Power Supply:
Power < 670 W (at 100 VAC),
< 660 W (at 200 VAC),

BTU Rating Maximum For 550 W Power Supply:
2201 BTU/hr (at 100 VAC),
2153 BTU/hr (at 200 VAC)

Power To review typical system power ratings use the Power
SpecificationsAdvisor which is available via the online tool located at
URL: <http://www.hp.com/go/proliant-energy-efficient> or
<http://www.hp.com/go/hppoweradvisor> - Click on the
system of interest. Example: DL160 Gen9- Follow the
instructions of the next screens.

Power SupplyRated For 550 W Power Supply:
Output Steady-State550 W (at 100 VAC),
Power 550 W (at 200 VAC),
Maximum For 550 W Power Supply:
Peak Power 550 W (at 100 VAC),
550 W (at 200 VAC),

Technical Specifications

| | |
|---|---|
| System Inlet Standard Temperature Operating Support | <p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).</p> |
| Extended Ambient Operating Support | <p>For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae.</p> <p>For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae.</p> <p>System performance may be reduced if operating in the extended ambient operating range or with a fan fault.</p> <p>NOTE: Supports A3 and A4 extended ambient.</p> |
| Relative Humidity | <p>Non-operating Operating</p> <p>Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.</p> |
| (non-condensing) | <p>Non-operating</p> <p>5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.</p> |

Technical Specifications

| | | |
|--------------------------------|--|---|
| Altitude | Operating | 3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). | |
| | Idle | |
| | L WAd | Entry 5.1 B Base 5.2 B Performance 5.0 B |
| | L pAm | Entry 34.2 dBA Base 35.9 dBA Performance 34.9 dBA |
| | Operating | |
| | L WAd | Entry 5.3 B Base 5.3 B Performance 5.6 B |
| L pAm | Entry 36.3 dBA Base 36.2 dBA Performance 39.7 dBA | |
| Emissions Classification (EMC) | FCC Rating Normative Standards | Class A CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22; K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

| | | |
|--|--------------------------|-------|
| HPE Dynamic Smart Array B140i Controller | Number of PCI links | Four |
| | PCI link rate | 4Gb/s |
| | Storage protocol support | SATA |

Technical Specifications

| | |
|----------------------------------|--------------------------------|
| SAS/SATA peak data transfer rate | 6Gb/s |
| Number of SAS/SATA links | 10 links |
| SAS/SATA connectivity | 2x4 connectors; 2x1 connectors |
| Expander support | No |
| Drives supported (max) | Up to 10 Internal Drives |
| RAID support | 0, 1, 10, 5 SATA |
| Software management | HPE SSA, SMH, SIM |
| Warranty | Server warranty |
| HPE Secure Encryption license | Not Supported |
| HPE SmartCache License | Not Supported |
| HPE Smart Storage Administrator | Supported |

| | | |
|-------------------------------------|---------------------------------|--|
| HPE Embedded Dual Port 361i Adapter | Network Interface Compatibility | 10Base-T/100Base-TX/1000Base-TX |
| | | IEEE 802.3 10Base-T |
| | | IEEE 802.3ab 1000Base-T |
| | | IEEE 802.3u 100Base-TX |
| | | IEEE 1588, IEEE 802.1AS |
| | | IEEE 802.3az - Energy Efficient Ethernet (EEE) |
| | Data Transfer Method | PCI Express v 2.0, 5.0 GT/s, two lanes (x2) |
| | Controller | Intel I350 Powerville |

Technical Specifications

| | | |
|-----------------------|------------------------------------|--|
| Network Transfer Rate | 10Base-T (Half-Duplex) | 10 Mb/s per port, 40 Mb/s combined |
| | 10Base-T (Full-Duplex) | 20 Mb/s per port, 80 Mb/s combined |
| | 100Base-TX (Half-Duplex) | 100 Mb/s per port, 400 Mb/s combined |
| | 100Base-TX (Full-Duplex) | 200 Mb/s per port, 800 Mb/s combined |
| | 1000Base-TX (Half and Full-Duplex) | 1000Mb/s per port, 4000 Mb/s combined |
| Connector | Two RJ-45 | |
| Cable Support | 10 Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) |
| | 10/100/1000 Base-TX | Category 5 or higher UTP; up to 328 ft (100 m) |

| | | | | |
|----------------------|--------------------------------|---|---|--|
| HPE Smart Array P440 | Dimensions (excluding bracket) | Low Profile PCIe Form Factor | Low Profile PCIe Form Factor | Low Profile PCIe Form Factor |
| | Disk Drive | 6.6 x 2.7 x 0.57 in (16.8 x 6.86 x 1.6 cm) | 19.05 cm x 24.13 cm x 5.72 cm (7.5 in x 9.5 in x 2.25 in) | 6.6 x 2.7 x 0.57 in (16.8 x 6.86 x 1.6 cm) |
| | SAS Port Link Rate | 12Gb/s SAS (Serial Attached SCSI) capable | | |
| | PCIe Link Rate | 12Gb/s SAS (Serial Attached SCSI) | | |
| | Cache Memory | 6Gb/s SATA (Serial AT Attachment) | | |
| | Physical Drives Supported | 12Gb/s per physical link supported; | | |
| | Logical Drives Supported | PCIe3 x8 | | |
| | Memory Addressing | DDR3-1866MHz, 72-bit wide bus at 14.9GB/s (4GB cache module) | | |
| | RAID Support | Up to 8 drives without 12G SAS Expander card; up to 48 drives with 2 SAS Expander card (ML350 Gen9) | | |
| | Upgradeable Firmware | Up to 64 logical drives | | |

| | | |
|----------------|------------------|---|
| StoreEasy 1550 | Tower Dimensions | 17.32(H) x 7.68(W) x 18.92(D) in (44 x 19.5 x 48.05 cm) |
|----------------|------------------|---|

Technical Specifications

| | | |
|--------------|-------------|--|
| Tower | Minimum: | 27.56lb (12.5kg) |
| Weight | Maximum: | 55lb (24.9g) |
| Input | Range Line | 100 to 240 VAC |
| Requirements | Voltage | For 350W & 550W Power Supply:8A (at Rated Input 100~240 VAC) |
| | Current | |
| | Rated Input | 50 to 60 Hz |
| | Frequency | |
| | Rated Input | For 550 W Power Supply:< 639 W (at 100 VAC),< 605 W (at 200 VAC) |
| | Power | For 350 W Power Supply:< 427 W (at 100 VAC),< 427 W (at 200 VAC) |
| BTU Rating | Maximum | For 550 W Power Supply:2204 BTU/hr (at 100 VAC),2113 BTU/hr (at 200 VAC) For 350 W Power Supply:1452 BTU/hr (at 100 VAC),1544 BTU/hr (at 200 VAC) |

Power Specifications To review typical system power ratings use the Power Specifications Advisor which is available via the online tool located at URL: <http://www.hp.com/go/proliant-energy-efficient> or <http://www.hp.com/go/hppoweradvisor> - Click on the system of interest.

| | | |
|--------------|--------------|---|
| Power Supply | Rated | For 550 W Power Supply:550 W (at 100 VAC),550 W (at 200 VAC), |
| Output | Steady-State | Power |
| | Maximum | For 350 W Power Supply:350 W (at 100 VAC),350 W (at 200 VAC), |
| | Peak Power | |

System Inlet Temperature Standard Operating Support 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C(86°F).

Extended Ambient Operating Support For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3048 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hp.com/servers/ashrae>.

Technical Specifications

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3048 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hp.com/servers/ashrae>.

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

NOTE: Supports A3 extended ambient.

| | | |
|-------------------|---------------|--|
| Relative Humidity | Non-operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr(36°F/hr). |
| | Operating | Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity. |
| Altitude | Non-operating | 5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |
| | Operating | 3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457m/min (1500 ft/min). |
| Acoustic Noise | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457m/min (1500 ft/min). |
| | Operating | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). |
| | Idle | |
| | L WAd | 3.6 Bels (LFF Non Hot-Plug Base) 3.6 Bels (LFF Hot-plug Base) 4.1 Bels (LFF Hot-plug Performance) |
| | L pAm | 21 dBA (LFF Non Hot-Plug Base) 21 dBA (LFF Hot-plug Base) 27 dBA (LFF Hot-plug Performance) |

Technical Specifications

| | |
|-------|---|
| L WAd | 3.6 Bels (LFF Non Hot-Plug Base) 3.7 Bels (LFF Hot-plug Base) 4.2 Bels (LFF Hot-plug Performance) |
| L pAm | 21 dBA (LFF Non Hot-Plug Base) 21 dBA (LFF Hot-plug Base) 25 dBA (LFF Hot-plug Performance) |

NOTE: Configurations tested for LFF non hot-plug based models included one (1) 1TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: Configurations tested for LFF hot-plug base models included one (1) 1TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: Configurations tested for LFF hot-plug performance models included four (4) 2TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

| | | |
|----------------|---------------------|---|
| Emissions | FCC Rating | Class B |
| Classification | Normative Standards | CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

| | | |
|--|----------------------------------|--------------------------------|
| HPE Dynamic Smart Array B140i Controller | Number of PCI links | Four |
| | PCI link rate | 4Gb/s |
| | Storage protocol support | SATA |
| | SAS/SATA peak data transfer rate | 6Gb/s |
| | Number of SAS/SATA links | 10 links |
| | SAS/SATA connectivity | 2x4 connectors; 2x1 connectors |
| | Expander support | No |
| | Drives supported (max) | Up to 10 Internal Drives |

Technical Specifications

RAID support 0, 1, 10, 5 SATA
 Software management HPE SSA, SMH, SIM
 Warranty Server warranty
 HPE Secure Encryption license Not Supported
 HPE SmartCache License
 HPE Smart Storage Administrator Supported

| | | |
|--------------------------------------|---------------------------------|--|
| HPE Ethernet 1Gb 2-port 330i Adapter | Network Interface Compatibility | 10Base-T/100Base-TX/1000Base-TX IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX |
| | Data Transfer Method | PCI Express, two lanes (x2) |
| | Controller | BCM5717 |
| | Network Transfer Rate | 10Base-T (Half-Duplex) 10 Mb/s per port, 40 Mb/s combined 10Base-T (Full-Duplex) 20 Mb/s per port, 80 Mb/s combined 100Base-TX (Half-Duplex) 100 Mb/s per port, 400 Mb/s combined 100Base-TX (Full-Duplex) 200 Mb/s per port, 800 Mb/s combined 100Base-TX (Half-Duplex) 1000Mb/s per port, 4000 Mb/s combined 100Base-TX (Full-Duplex) 2000Mb/s per port, 8000 Mb/s combined |
| | Connector | RJ-45 |
| | Cable Support | 10 Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m) 10/100/1000 Base-TX Category 5 or higher UTP; up to 328 ft (100 m) |

Technical Specifications

StoreEasy 1650/1850 Dimensions SFF Drives: 3.44 x 17.54 x 26.75 in (8.73 x 44.55 x 67.94 cm)
LFF Drives: 3.44 x 17.54 x 28.75 in (8.73 x 44.55 x 73.02 cm)

NOTE: Dimensions without Bezel.

Weight (approximate) Minimum: 32.6 lb (14.759 kg)
(Minimum -

8SFF chassis with 1xSFF HDD and 7 HDD blanks, 1x processor, 1x power supply (plus blank), 1x Flexible Smart Array, 1x Riser installed)

Maximum: 51.5 lb (23.6 kg)

(Maximum - 12 LFF hard drives (No rear drives), 2x processors, 2x power supplies, 1x Flexible Smart Array, 2x Risers installed)

Input

Requirements Range Line 100 to 120 VAC
(per power supply) Voltage 200 to 240 VAC

BTU Rating Maximum For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only
For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

Technical Specifications

| | | |
|--|------------------------------------|---|
| Power Supply Output (per power supply) | Rated Power | <p>For 1400W Power Supply: 1400W (at 100 VAC), 1400W (at 240 VAC), 1400W (at 240 VAC)</p> <p>For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only</p> <p>For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only</p> |
| | Maximum Peak Power | <p>For 1400W Power Supply: 1400W (at 100 to 127 VAC), 1400W (at 200 to 240 1VAC), 1400W (at 240 VAC) input for China only</p> <p>For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only</p> <p>For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only</p> |
| System Inlet Temperature | Standard Operating Support | <p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).</p> |
| | Extended Ambient Operating Support | <p>For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/Ashrae</p> <p>For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:</p> |

Technical Specifications

<http://www.hp.com/servers/Ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

| | | |
|-------------------|----------------------------|--|
| Relative Humidity | Non-operating Operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity. |
| (non-condensing) | Non-operating | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |
| Altitude | Operating | 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Acoustic Noise | | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). |
| | Idle | |
| | L WAd | 4.0 B Entry LFF 4.1 B Entry 4.2 B Base 5.7 B Base LFF 4.3 B Perf |
| | L pAm | 23 dBA Entry LFF 24 dBA Entry 24 dBA Base 39 dBA Base LFF 25 dBA Perf |
| | Operating | |
| | L WAd | 4.3 B Entry LFF 4.6 B Entry 4.8 B Base 5.9 B Base LFF 5.6 B Perf |

Technical Specifications

| | |
|-------|------------------|
| L pAm | 25 dBA Entry LFF |
| | 29 dBA Entry |
| | 30 dBA Base |
| | 31 dBA Base LFF |
| | 39 dBA Perf |

NOTE: The Listed sound levels apply to standard shipping configurations (Entry LFF, Entry, Base, Base LFF and Performance models) additional options may result in increased sound levels. The Base LFF model leverages our High Efficiency Fans, other models are shipping with standard fan options.

| | | |
|--------------------------------|--------------------------------|--|
| Emissions Classification (EMC) | FCC Rating Normative Standards | Class A CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |
|--------------------------------|--------------------------------|--|

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

| | | |
|--|----------------------------------|--------------------------------|
| HPE Dynamic Smart Array B140i Controller | Number of PCI links | Four |
| | PCI link rate | 4Gb/s |
| | Storage protocol support | SATA |
| | SAS/SATA peak data transfer rate | 6Gb/s |
| | Number of SAS/SATA links | 10 links |
| | SAS/SATA connectivity | 2x4 connectors; 2x1 connectors |
| | Expander support | No |
| | Drives supported (max) | Up to 10 Internal Drives |
| | RAID support | 0, 1, 10, 5 SATA |
| | Software management | HPE SSA, SMH, SIM |

Technical Specifications

| | |
|---------------------------------|-----------------|
| Warranty | Server warranty |
| HPE Secure Encryption license | Not Supported |
| HPE SmartCache License | Not Supported |
| HPE Smart Storage Administrator | Supported |

| | | | |
|--------------------------------------|------------------------------------|--|--------------------------------------|
| HPE Ethernet 1Gb 4-port 331i Adapter | Network Interface | 10Base-T/100Base-TX/1000Base-TX | |
| | | IEEE 802.3 10Base-T | |
| | Compatibility | IEEE 802.3ab 1000Base-T | |
| | | IEEE 802.3u 100Base-TX | |
| | Data Transfer Method | PCI Express, two lanes (x2) | |
| | Controller | BCM5719 | |
| | | 10Base-T (Half-Duplex) | 10 Mb/s per port, 40 Mb/s combined |
| | | 10Base-T (Full-Duplex) | 20 Mb/s per port, 80 Mb/s combined |
| | Network Transfer Rate | 100Base-TX (Half-Duplex) | 100 Mb/s per port, 400 Mb/s combined |
| | | 100Base-TX (Full-Duplex) | 200 Mb/s per port, 800 Mb/s combined |
| | 1000Base-TX (Half and Full-Duplex) | 1000Mb/s per port, 4000 Mb/s combined | |
| | 1000Base-TX (Full-Duplex) | 2000Mb/s per port, 8000 Mb/s combined | |
| Connector | Four RJ-45 | | |
| Cable Support | 10 Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) | |
| | 10/100/1000 Base-TX | Category 5 or higher UTP; up to 328 ft (100 m) | |

Technical Specifications

| | | | |
|------------------------|---|--|---|
| HPE Smart Array P440ar | Dimensions (excluding bracket) Disk Drive | Flexible Smart Array Form Factor 5.3 x 4.1 x 1.2 in 12Gb/s SAS (Serial Attached SCSI) 6Gb/s SATA (Serial AT Attachment) | Low Profile PCIe Form Factor 6.6 x 2.7 x 0.57 in (16.8 x 6.86 x 1.6 cm) |
| | SAS Port Link Rate PCIe Link Rate Cache Memory | 12Gb/s per physical link supported PCIe3 x8 DDR3-1866MHz, 72-bit wide bus at 14.9GB/s (2GB cache module) | |
| | Physical Drives Supported Logical Drives Supported | Up to 26 drives Up to 64 logical drives | |
| | Memory Addressing | 64-bit, supporting servers with memory space greater than 4 GiB (4.4GB) | |
| | RAID Support | RAID 6, 60 (Advanced Data Guarding) RAID 5, 50 (Distributed Data Guarding) RAID 1, 10 (Drive Mirroring) RAID 1 ADM, 10 ADM (Advanced Data Mirroring) RAID 0 (Striping) | |
| | Upgradeable Firmware | Upgradeable firmware with recovery ROM feature | |

| | | |
|-------------------------|------------|---|
| StoreEasy 1650 Expanded | Dimensions | LFF Drives: 3.44 x 17.54 x 28.75 in (8.73 x 44.55 x 73.02 cm) NOTE: Dimensions without Bezel. |
|-------------------------|------------|---|

Input

| | | | |
|---------------------------------|-------|--------------|----------------------------------|
| Requirements (per power supply) | Range | Line Voltage | 100 to 120 VAC 200 to 240 VAC |
|---------------------------------|-------|--------------|----------------------------------|

| | | |
|------------|---------|--|
| BTU Rating | Maximum | For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only |
|------------|---------|--|

| | | |
|--|--|--|
| Power Supply Output (per power supply) | Rated Steady-State Power Maximum Peak Power | For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 VAC), 800W (at 240 VAC) input for China only |
|--|--|--|

Technical Specifications

| | |
|---|---|
| System Inlet Standard Temperature Operating Support | 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F). |
| Extended Ambient Operating Support | For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/Ashrae |
| | For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/Ashrae |
| | System performance may be reduced if operating in the extended ambient operating range or with a fan fault. |
| Relative Humidity | Non-operating Operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity. |
| (non-condensing) | Non-operating 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |

Technical Specifications

| | | |
|----------------|---------------|--|
| Altitude | Operating | 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Acoustic Noise | | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). |
| | Idle | |
| | L WAd | 4.0 B Entry LFF 4.1 B Entry 4.2 B Base 5.7 B Base LFF 4.3 B Perf |
| | L pAm | 23 dBA Entry LFF 24 dBA Entry 24 dBA Base 39 dBA Base LFF 25 dBA Perf |
| | Operating | |
| | L WAd | 4.3 B Entry LFF 4.6 B Entry 4.8 B Base 5.9 B Base LFF 5.6 B Perf |
| | L pAm | 25 dBA Entry LFF 29 dBA Entry 30 dBA Base 31 dBA Base LFF 39 dBA Perf |

NOTE: The Listed sound levels apply to standard shipping configurations (Entry LFF, Entry, Base, Base LFF and Performance models) additional options may result in increased sound levels. The Base LFF model leverages our High Efficiency Fans, other models are shipping with standard fan options.

Technical Specifications

| | | |
|--------------------------------|--------------------------------|--|
| Emissions Classification (EMC) | FCC Rating Normative Standards | Class A CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |
|--------------------------------|--------------------------------|--|

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

| | | |
|--|--|---|
| HPE Dynamic Smart Array B140i Controller | Number of PCI links PCI link rate Storage protocol support SAS/SATA peak data transfer rate Number of SAS/SATA links SAS/SATA connectivity Expander support Drives supported (max) RAID support Software management Warranty HPE Secure Encryption license HPE SmartCache License HPE Smart Storage Administrator | Four 4Gb/s SATA 6Gb/s 10 links 2x4 connectors; 2x1 connectors No Up to 10 Internal Drives 0, 1, 10, 5 SATA HPE SSA, SMH, SIM Server warranty Not Supported Not Supported Supported |
|--|--|---|

Technical Specifications

| | | | |
|--------------------------------------|-----------------------|---|---------------------------------------|
| | Network Interface | 10Base-T/100Base-TX/1000Base-TX | |
| | | IEEE 802.3 10Base-T | |
| | Compatibility | IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX | |
| | Data Transfer Method | PCI Express, two lanes (x2) | |
| | Controller | BCM5719 | |
| HPE Ethernet 1Gb 2-port 36li Adapter | | 10Base-T (Half-Duplex) | 10 Mb/s per port, 40 Mb/s combined |
| | | 10Base-T (Full-Duplex) | 20 Mb/s per port, 80 Mb/s combined |
| | Network Transfer Rate | 100Base-TX (Half-Duplex) | 100 Mb/s per port, 400 Mb/s combined |
| | | 100Base-TX (Full-Duplex) | 200 Mb/s per port, 800 Mb/s combined |
| | | 1000Base-TX (Half and Full-Duplex) | 1000Mb/s per port, 4000 Mb/s combined |
| | | 1000Base-TX (Full-Duplex) | 2000Mb/s per port, 8000 Mb/s combined |
| Connector | Four RJ-45 | | |
| Cable Support | 10 Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) | |
| | 10/100/1000 Base-TX | Category 5 or higher UTP; up to 328 ft (100 m) | |

Warranty

HPE StoreEasy 1650, HPE StoreEasy 1650 Expanded and HPE StoreEasy 1850 Storage products come with a standard 3-3-3 warranty (3 years parts exchange, 3 years labor and 3 years onsite, next business day response). HPE StoreEasy 1450 and 1550 Storage products come with a standard 3-1-1 warranty (3 years parts exchange, 1 year labor and 1 year onsite, next business day response). Software media is warranted to be free of physical defect for a period of 90 days from delivery.

| | |
|------------------------------------|---|
| Services Included with the Product | One year of Hewlett Packard Enterprise Software Support for the Windows Storage Server OS, standard 9x5 business hours (software advisory and remedial software telephone support, and media and documentation distribution service). |
|------------------------------------|---|

| | |
|---------------------|--|
| Service and Support | Services to accelerate time to results |
|---------------------|--|

Hewlett Packard Enterprise Storage Services bring you a rich portfolio of consulting and support services designed to add value to our core storage products and solutions. We have the know-how and experience to put storage technology to work for you. We work closely with you as your strategic partner, leveraging our full services portfolio to make sure that everything works to optimize your enterprise.

Choose from services aligned to our storage product offerings and lifecycle. From mission-critical onsite services to innovative web-based remote support, you choose the precise level of attention and support your business demands.

| | |
|----------------------------|--|
| Discover, plan, and design | Choose from a rich portfolio of services to make the most of HPE StoreEasy Storage, so you can efficiently and affordably consolidate, manage, and extract value from unstructured data. |
|----------------------------|--|

Hewlett Packard Enterprise Services can help you discover needs and create a plan for simplifying the environment, reducing risk, and maximizing your storage investments

HPE Backup Recovery Efficiency Analysis - Assessment of how efficiently backup components are being used as the amount of data to be backed up continues to grow exponentially via analysis intelligence and a snapshot of your current backup environment.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8490ENW.pdf>

HPE Backup Recovery Impact Analysis - Focus placed on service requirements and design as the key to success for gaining a clear understanding of the role of increasingly diverse data protection strategies. <https://www.hpe.com/h20195/V2/GetPDF.aspx/4AA4-1175ENW.pdf>

HPE Backup Recovery Modernization - Initial discovery, interviews, reference architecture design, proposal content development, vendor grading, and final recommendations carried out so as to require minimal resources and locations on your part.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/4AA4-1199ENW.pdf>

HPE Storage Cloud Design Service - Build a scalable, low-cost enterprise storage environment with inherent cloud benefits to meet big data needs.

| | |
|------------|---|
| Deploy and | We can help you configure, set up, and efficiently use your HPE StoreEasy Storage, as well as |
|------------|---|

Service and Support, HPE Care Pack, and Warranty Information

integrate

help migrate data, improve capacity utilization, and establish information management standards used across backup, replication, and archiving needs.

HPE StoreEasy 1000/3000 Storage S Installation and Startup Service -Expert system installation and setup by a Hewlett Packard Enterprise technical specialist designed to reduce implementation time and cost, with your basic questions about the service answered during the included orientation session. http://h20195.www2.hp.com/v2/GetDocument.aspx?cc=us&doclang=EN_US&docname=4AA2-6112ENW&doctype=data%20sheet&lc=en&searchquery=&jumpid=reg_r1002_usen_c-001_title_r0004

HPE Storage Data Migration Services - End-to-end data migration service providing seamless discovery, assessment, planning, and design, completely customizable to your organization's storage area network or network attached storage environment and using innovative software to help you migrate to Hewlett Packard Enterprise storage quickly and efficiently. <https://www.hpe.com/h20195/V2/GetPDF.aspx/4AA3-0774ENW.pdf>

HPE Storage and Data Consultant Residency Service - Strategic augmentation of your current environment with Hewlett Packard Enterprise resources who become your trusted advisor to provide answers that are right for your storage and backup environment. <https://www.hpe.com/h20195/V2/GetPDF.aspx/4AA3-9481ENW.pdf>

HPE Proactive Select - A flexible way to purchase services to fit your environment with an extensive menu of Hewlett Packard Enterprise Proactive Select event and technical services, such as onsite firmware upgrades, health checks, assessments, and education. <https://www.hpe.com/h20195/V2/GetPDF.aspx/4AA2-3842ENW.pdf>

Operate and support

Choose the right support to maximize uptime, free up your resources, and achieve improved value-as you get the most out of the existing IT assets while accelerating time-to-revenue.

HPE Proactive Care 24x7 - Hardware and software support services designed specifically for your technology with rapid access to Advanced Solution Center Specialists plus firmware and software management and best practice advice <https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

HPE Proactive Care Personalized Support - An option-if you have HPE Proactive Care- to bring increased personalization of the Proactive Care support experience through the assignment of an Account Service Manager (ASM) who provides IT best practice advice to help address IT issues and projects. <https://www.hpe.com/h20195/V2/GetPDF.aspx/4AA4-3446ENW.pdf>

HPE Support Plus 24 - Support for environments where proactive help from Hewlett Packard Enterprise is not required, with 24x7 hardware and software support onsite that includes third-party support with a maximum four-hour onsite response. <https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-6638EN.pdf>

HPE Education Services - Comprehensive training for new, as well as experienced, storage administrators designed to expand your skills and keep you up to speed with the latest storage and virtualization technology from Hewlett Packard Enterprise Storage. <http://education.hp.com/curr-storsan.htm>

Optimized Care - Choose from three levels of operate and support care

Service and Support, HPE Care Pack, and Warranty Information

Delivers the highest levels of performance and stability through deployment and proactive management practices

HPE Proactive Care 24x7-Plus, 20 credits per year

Additional options - HPE Proactive Care Personalized Support (once per Proactive Care support new environment), an additional day of Hewlett Packard Enterprise Personalized Support, and 10 additional HPE Proactive Select credits per year

Standard Care-maintains high level of uptime, along with expert help to cut the cost and complexity of implementation and support

HPE Proactive Care 24x7-Plus, 10 credits per year

Additional options - HPE Proactive Care Personalized Support (once per Proactive Care support new environment), an additional day of Hewlett Packard Enterprise Personalized Support, and 10 additional HPE Proactive Select credits per year

Basic Care-Minimum recommended support

Support Plus 24- Plus, 10 credits per year

Additional options - 10 HPE Proactive Select credits per year

Remote Support Automation

HPE Insight Remote Support-Available at no additional cost to all warranty, HPE Care Pack Service and service agreement customers, uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnosis and problem resolution.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/4AA2-4676ENW.pdf>

<http://h18004.www1.hp.com/products/servers/management/insight-remote-support/overview.html>

For more information

<http://www.hp.com/services/storage>

To learn more on HPE Storage Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner

HPE Care Pack Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from Hewlett Packard Enterprise or an enterprise reseller are quoted using Hewlett Packard Enterprise order configuration tools.
- Customers purchasing from a commercial reseller can find HPE Care Pack Services at <http://www.hp.com/go/lookuptool>

Summary of Changes

| Date | Version History | Action | Description of Change |
|--------------|-----------------------|--------------------|--|
| 15-Aug-2016 | From version 28 to 29 | Changed | Changes made to the Configuration Sections of the document. |
| 17-Jun-2016 | From Version 27 to 28 | Changed | Changes made to the Hardware Specifications and Configuration Info Sections. |
| 11-Mar-2016 | From Version 26 to 27 | Changed | Changes were made throughout the entire document |
| 19-Feb-2016 | From Version 25 to 26 | Changed | Changed the entire document structure. |
| 29-Jan-2016 | From Version 24 to 25 | Changed | Content edition on the configuration section |
| 11-Dec-2015 | From Version 23 to 24 | Changed | Changes made to the Standard Features and Options Sections |
| 01-Dec-2015 | From Version 22 to 23 | Changed | Changes were made throughout the entire document |
| 28-Sept-2015 | From Version 21 to 22 | Changed | Added the StoreEasy System Recovery DVD, changes in the What's New Sections |
| 19-Jun-2015 | From Version 20 to 21 | Changes | Changes made on the following sections: Overview, Features and Benefits, Standard Features, Options and Service and Support |
| 01-Jun-2015 | From Version 19 to 20 | Changed | Added the StoreEasy 1550 Storage model |
| 30-Mar-2015 | From Version 18 to 19 | Changed | Added new models, changes were made on the entire document. |
| 18-Dec-2014 | From Version 17 to 18 | Changed | Added SCSI HBA to StoreEasy 1640 options and other minor edits. |
| 17-Oct-2014 | From Version 16 to 17 | Changed Removed | Changed in the Options Section of the QS. Removed the HPE StoreEasy 1X30 Storage from the document. |
| 18-Jul-2014 | From Version 15 to 16 | Added | Added HPE StoreEasy Windows Storage Server 2012 R2 Upgrade section |
| 03-Jul-2014 | From Version 13 to 15 | Changed | Standard Features – Memory – StoreEasy 1640 Standard changed 12GB to 16GB and 3 x 4GB to 4 x 4GB; Standard Features – Storage External – added D3000 to supported products; Optional Software – HPE LiveVault section – replaced URL; Models – Pre-Configured – StoreEasy 1640 Models – memory - changed 12GB to 16GB and 3 x 4GB to 4 x 4GB; Options – added HPE D3000 Enclosures section |
| 09-May-2014 | From Version 12 to 13 | Changed | Storage Controllers and Service and Support were revised. |
| 11-Apr-2014 | From Version 11 to 12 | Changed | Changes were to Storage Controllers, Hard Drives, and Optional Software. |
| 31-Mar-2014 | From Version 10 to 11 | Changed | Changes were made throughout. |
| 31-Jan-2014 | From Version 9 to 10 | Changed | Updated the following: Standard Features - Windows Storage Server 2012 Note updated; Optional Software - HPE Autonomy LiveVault updated; Configuration Information - Add a Network Adapter - 656596-B21 added |

Summary of Changes

"(StoreEasy 1430 only" to the description; added 718904-B21 and 728987-B21 to the supported adapters; Add More Storage- StoreEasy 1430/1530 - removed BC377A and BC390AAE, added D7526A, D7527A and D7527AAE and removed link to DA14228 and added 729552-B21 and 650926-B21 and QW990A; StoreEasy 1630/1830 - added 698531-B21, D7526A, D7527A, removed BC377A and BC390AAE - removed links to DA14227, DA14228, DA13200 DA14336 and DA14343, added 729552-B21 and 650926-B21 added C8R38A and C8R39A and QW990A; Hard Drives for the StoreEasy 1430/1530 - added 652753-B21, 718171-B21; 734362-B21, 718189-B21, 739900-B21, 718183-B21, 739890-B21, 718177-B21, 691860-B21, 691856-B21, 691854-B21, and 691852-B21; Hard Drives for StoreEasy 1630 - - added 718171-B21; 734362-B21, 718189-B21, 739900-B21, 718183-B21, 739890-B21, 718177-B21, 691860-B21, 691856-B21, 691854-B21, and 691852-B21; removed 653124-B21 and 653122-B21. Hard Drives for StoreEasy 1830 - added 718162-B21, 717965-B21, 734360-B21, 717973.B21, 717971-B21, 739898-B21, 739888-B21, 717969-B21, 653078-B21

04-Oct-2013 From Version 8 to 9 Changed

Updated the following sections
Standard Features - Storage Controller

20-Sep-2013 From Version 7 to 8 Changed

Options - HPE Hard Drives for StoreEasy 1830
Updated the following: Options - StoreEasy Disk Enclosures - Updated existing NOTE and added new NOTE for the 25 SFF Disk Enclosure; Options - Drives for StoreEasy Enclosures - added 1.2TB SAS HDD - 693648-B21

19-Aug-2013 From Version 6 to 7 Changed

Changed What's New to read:
New StoreEasy 1630 with 2 SFF rear drives with pre-installed OS. 12 LFF slots open for data drives.

28-Jun-2013 From Version 5 to 6 Changed

Changes made to update the HPE StoreEasy 1630 Storage throughout the QuickSpecs.
Drives for StoreEasy Enclosures was revised in Options
Note was added to Operating System in Standard Features
HPE 10 GbE PCI-e Dual Port Network Interface Card was added to StoreEasy 1830 in Options

10-Jun-2013 From Version 4 to 5 Changed

HPE StoreFabric SN1000Q 16GB 1-port and 2-port PCIe Fibre Channel Host Bus Adapters were added to QLogic Fibre Channel HBAs in Options
Overview: Updated What's New, HPE StoreEasy 1430 Storage, HPE StoreEasy 1530 Storage, HPE StoreEasy 1630 Storage and HPE StoreEasy 1830 Storage.
Features and Benefits: Updated Efficiently Save money and

Summary of Changes

| | | | |
|-------------|---------------------|---------|--|
| | | | time, Secure: Protect your data and organization always and Highly Available, Prevent User and Organization disruption sections. |
| | | | Optional Software: Update HPE Data Protector software hyperlink. |
| | | | Options: Updated HPE Hard Drives for StoreEasy 1430/1530, HPE Hard Drives for StoreEasy 1630, StoreEasy Disk Enclosures, Drives for StoreEasy Enclosures, Add a Power Cord StoreEasy 1530 and StoreEasy 1830 I/O Expansion Options sections. |
| 19-Apr-2013 | From Version 3 to 4 | Changed | Standard Features: Updated Maximum Storage Capacity(raw) Models (Drives Configure-to-Order): Updated StoreEasy 1830 Storage Options: Updated Add a Network Adapter section StoreEasy 1430/1530, StoreEasy 1630 and StoreEasy 1830 Service and Support, Hp Care Pack, and Warranty Information: Udated Warranty section |
| 08-Mar-2013 | From Version 2 to 3 | Changed | Changes were made in the following sections: Standard Features: Updated Operating System section Options: in all sections updated parts and part numbers. |
| 21-Dec-2012 | From Version 1 to 2 | Changed | Changes were made in the following sections: Overview: update Models Models (Drives Configure to Order): in Step 1 update hyperlink Options: in all sections updated parts and part numbers. |
| 21-Dec-2012 | Version 1 | Created | Document Created |



© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Windows is a US registered trademark of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.

c04111444 - 14434 - Worldwide - V29 - 15-August-2016



Summary of Changes