

Product Highlights

- **Integrated services in a single device**

Dual-band wireless N, firewall, 3G support, bandwidth management all on the same device, to address the businesses networking needs.

- **Professional Intrusion Prevention System (IPS)**

Automatic updates from a comprehensive IPS signature database focus on attack payloads to protect the network against zero-day attacks.

- **D-Link Green™**

Power-saving technology that reduces the electricity bills and increases the product's lifespan.



DSR-250N/500N/1000N

Unified Services Router

Key Features

High VPN Performance

- High VPN Performance
- Protocol: IPSec, PPTP, L2TP, SSL
- VPN tunnels
- SSL VPN tunnels for remote access
- DES, 3DES, AES encryption
- Main/Aggressive Negotiation

Wireless Access and Security

- IEEE 802.11 a1/b/g/n (2.4GHz, 5GHz¹)
- IEEE 802.1x RADIUS authentication with EAP-TLS, EAP-TLLS, EAP-PEAP
- WPS, WEP, WPA-PSK, WPA-EAP, WPA2-PSK, WPA2-EAP

Interfaces:

- Gigabit LAN ports
- Gigabit WAN Port
- Console port
- USB 2.0 port

Enhanced Network Services

- IPv6
- DHCP Server/Relay
- Dynamic DNS
- IEEE 802.1q VLAN
- Multiple SSID
- SSID-to-VLAN Mapping

Firewall system:

- IPS
- NAT, PAT

Content Filtering

- Static URL Address Filtering
- Keyword Filtering

Fault Tolerance²

- WAN Traffic Failover
- 3G and Physical Traffic Failover¹
- Outbound Load Balancing³

D-Link Unified Services Routers offer secure, high performance networking solutions to address the growing needs of businesses. The integrated high-speed IEEE 802.11n and 3G¹ wireless technologies offer comparable performance to traditional wired networks, but with fewer limitations. Each router provides optimal network security with features such as Virtual Private Network (VPN) tunnels, IP Security (IPSec), Point-to-Point Tunneling Protocol (PPTP), Layer 2 Tunnelling Protocol (L2TP), and Secure Sockets Layer (SSL). These routers empower your mobile workers with remote access anywhere and anytime using SSL VPN tunnels.

Comprehensive Management Capabilities.

The DSR-250N/500N/1000N include dual-WAN Gigabit Ethernet that provides policy based service management ensuring maximum productivity for your business operations. The failover feature maintains data traffic without disconnecting when a landline connection is lost. The Outbound Load Balancing feature² adjusts outgoing traffic across two WAN interfaces and optimises the system performance resulting in high availability. The second WAN port can be configured as a DMZ port allowing you to isolate servers from your LAN.

Superior Wireless Performance

Designed to deliver superior wireless performance, the DSR-250N/500N/1000N include 802.11 a1/b/g/n, allowing for operation on either the 2.4 GHz or 5 GHz¹ wireless LAN radio bands. Multiple In Multiple Out (MIMO) technology allows the DSR-1000N to provide high data rates with minimal "dead spots" throughout the wireless coverage area.

¹ DSR-1000N only

² DSR-500N/1000N only

³ Available with future firmware upgrade

⁴ With D-Link's DWM-156 USB 3G dongle.

Flexible Deployment Options

The DSR-250N/500N/1000N support Third Generation (3G) Networks via an extendable USB 3G dongle⁴. This 3G network capability offers an additional secure data connection for networks that provide critical services. They can be configured to automatically switch to a 3G network whenever a physical link is lost.

Robust VPN Features

A fully featured virtual private network (VPN) provides your mobile workers and branch offices with a secure link to your network. The DSR-250N/500N/1000N are capable of simultaneously managing 5,10 or 20 Secure Sockets Layer (SSL) VPN tunnels respectively, empowering mobile users by providing remote access to a central corporate database. Site-to-site VPN tunnels use IP Security (IPSec) Protocol, Point-to-Point Tunnelling Protocol (PPTP), or Layer 2 Tunnelling Protocol (L2TP) to facilitate branch office connectivity through encrypted virtual links. The DSR-250N supports up to 25 simultaneous VPN tunnels, the DSR-500N supports up to 35 simultaneous VPN tunnels, and the DSR-1000N up to 70 VPN tunnels.

Efficient Green Technology

As a concerned member of the global community, D-Link is devoted to providing eco-friendly products. D-Link Green Wi-Fi and D-Link Green Ethernet save power and help cut energy usage costs. The D-Link Green WLAN Scheduler shuts down your wireless network automatically according to a schedule you define, allowing you to turn off your wireless network during off-peak hours, saving energy and keeping your network secure. The D-Link Green Ethernet program adjusts power usage based on the detected cable length and link status. In addition, compliance with RoHS (Restriction of Hazardous Substances) and WEEE (Waste Electrical and Electronic Equipment) directives make D-Link Green certified devices an environmentally responsible choice.



If the worst should happen to your network you need the very best support and fast. Downtime costs your business money. D-Link Assist maximises your uptime by solving technical problems quickly and effectively. Our highly trained technicians are on standby around the clock, ensuring that award-winning support is only a phone call away.

With a choice of three affordable service offerings covering all D-Link business products, you can select the package that suits you best:

D-Link Assist Gold - for comprehensive 24-hour support

D-Link Assist Gold is perfect for mission-critical environments where maximum uptime is a high priority. It guarantees four hour around-the-clock response. Cover applies 24/7 for every day of the year including holidays.

D-Link Assist Silver - for prompt same-day assistance

D-Link Assist Silver is designed for 'high availability' businesses that require rapid response within regular working hours. It provides a four hour response service Monday to Friday from 8am to 5pm, excluding holidays.

D-Link Assist Bronze - for guaranteed response on the next business day

D-Link Assist Bronze is a highly cost-effective support solution for less critical environments. Response is guaranteed within eight business hours Monday to Friday from 8am to 5pm, excluding holidays.


D-Link Assist can be purchased together with any D-Link business product. So whether you're buying switching, wireless, storage, security or IP Surveillance equipment from D-Link, your peace of mind is guaranteed. D-Link Assist also offers installation and configuration services to get your new hardware working quickly and correctly.

Green Wi-Fi




The WLAN Scheduler turns down WLAN during off-peak hours to enhance network security and save power.

Green Ethernet

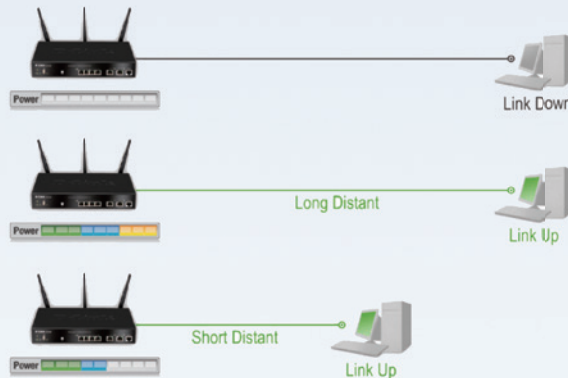


The D-Link Green Ethernet power-saving program can adjust power by detecting link status and cable length.

USB 2.0 Extension

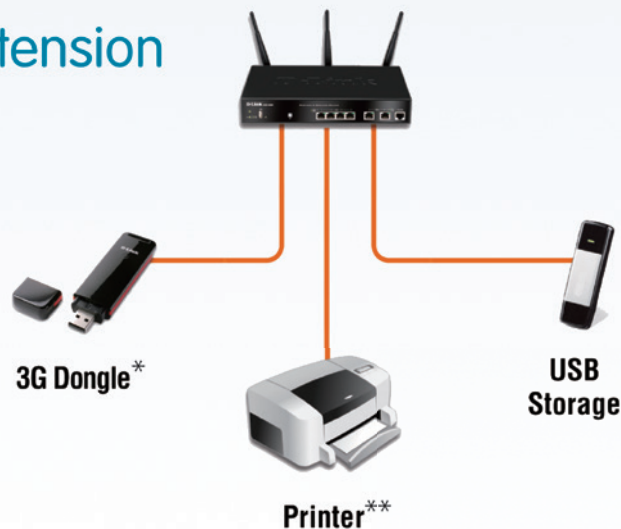


Supports one (DSR-250N/500N) or two (DSR-1000N) USB 2.0 devices to extend functionality via D-Link's SharePort feature.

Secure VPN Network Implementation

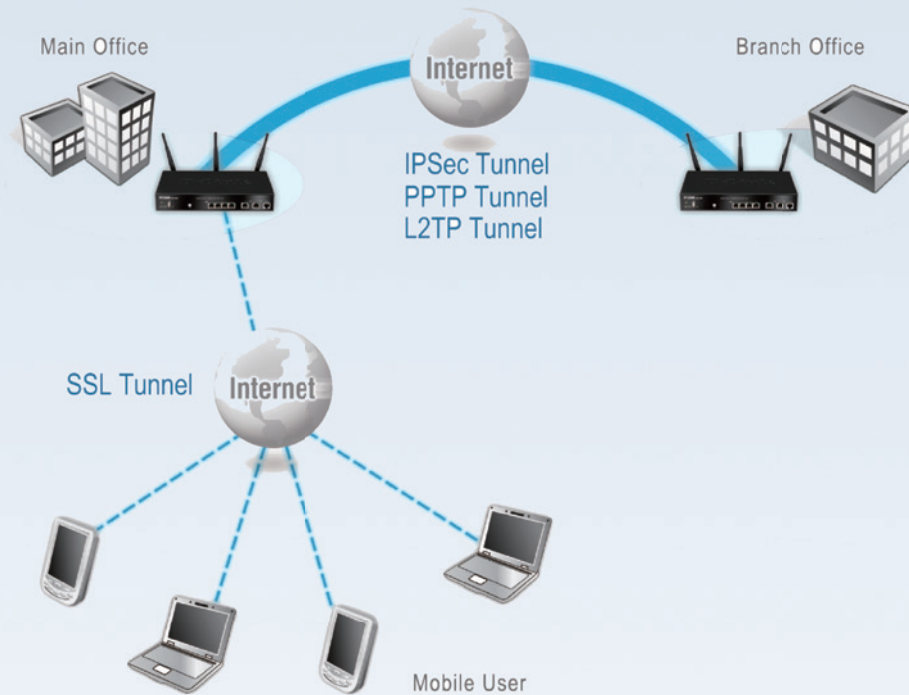

Dual-WAN/3G for Redundant Internet

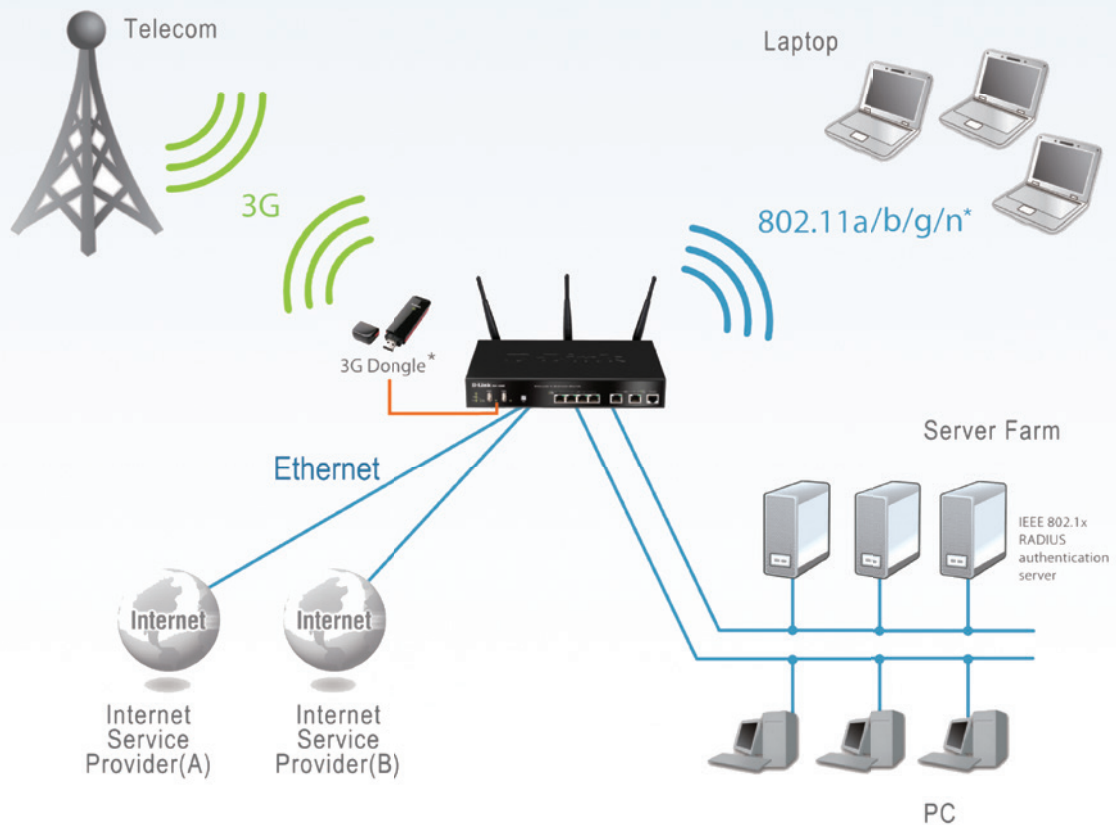

* DSR-1000N only

Technical Specifications	DSR-250N	DSR-500N	DSR-1000N
Interface			
Ethernet	• 1 x 10/100/1000 Mbps WAN ports • 8 x 10/100/1000 Mbps LAN ports	• 2 x 10/100/1000 Mbps WAN ports • 4 x 10/100/1000 Mbps LAN ports	• 2 x 10/100/1000 Mbps WAN ports • 4 x 10/100/1000 Mbps LAN ports
Wireless	• 802.11b/g/n (single-band) • 2 detachable 2dBi omni-directional antennas	• 802.11b/g/n (single-band) • 3 detachable 2dBi omni-directional antennas	• 802.11a/b/g/n (dual-band) • 3 detachable 2dBi omni-directional antennas
USB 2.0 ports	1	1	2
Console	1 x RJ-45		
System Performance⁹			
Firewall throughput ⁸	45 Mbps	70 Mbps	130 Mbps
VPN throughput ¹⁰	35 Mbps	70 Mbps	100 Mbps
Concurrent sessions	20,000	30,000	60,000
New sessions (per second)	200	300	600
Policies	200	300	600
Internet Connection Type			
Static/ dynamic IP	✓	✓	✓
PPPoE/ L2TP/ PPTP	✓	✓	✓
Multiple PPPoE	✓	✓	✓
Firewall System			
Static route	✓	✓	✓
Dynamic route	–	RIPv1, RIPv2, OSPF ⁷	
Dynamic DNS	✓	✓	✓
Inter-VLAN route	✓	✓	✓
NAT, PAT	✓	✓	✓
Web content filtering (WCF)	Static URL, keywords		
Intrusion prevention system (IPS)	Signature package included in firmware		
Networking			
DHCP server/ client	✓	✓	✓
DHCP relay	✓	✓	✓
IEEE802.1q VLAN	✓	✓	✓
VLAN (Port-Based)	✓	✓	✓
IP multicast	IGMP Proxy		
IPv6	✓	✓	✓
Route failover	✓	✓	✓
3G redundancy	✓	✓	✓
Outbound load balancing	–	✓	✓
Wireless			
Multiple service set identifier (SSID)	✓	✓	✓
Service set identifier (SSID) to VLAN mapping	✓	✓	✓
Wireless security	<ul style="list-style-type: none"> • Wired Equivalent Privacy (WEP), Wi-Fi Protect Setup (WPS), Wi-Fi Protected Access – Personal (WPA-PSK), • Wi-Fi Protected Access – Enterprise (WPA-EAP), Wi-Fi Protected Access version 2 – Personal (WPA-PSK), • Wi-Fi Protected Access version 2 – Enterprise (WPA-EAP) 		

Technical Specifications	DSR-250N	DSR-500N	DSR-1000N
Virtual Private Network (VPN)			
VPN tunnels	25	35	70
Encryption methods	DES, 3DES, AES, Twofish, Blowfish, CAST-128, NULL		
IPSec/PPTP/L2TP server	✓	✓	✓
PPTP/L2TP clients	25/25	25/25	25/25
IPSec NAT traversal	✓	✓	✓
Dead peer detection	✓	✓	✓
IP Encapsulating Security Payload (ESP)	✓	✓	✓
IP Authentication Header (AH)	✓	✓	✓
VPN tunnel keep alive	✓	✓	✓
Hub and spoke	✓	✓	✓
SSL Virtual Private Network (SSL VPN)			
SSL VPN tunnel	5	10	20
SSL encryption methods	DES, 3DES, AES		
SSL message integrity	MD5, SHA1		
Bandwidth Management			
Max. bandwidth control	✓	✓	✓
Priority bandwidth control	Port-Based QoS, 3 Classes		
System Management			
Web-based user interface	HTTP, HTTPS		
Command line	✓	✓	✓
SNMP	v1, v2c, v3		
Physical & Environment			
Power input	100-240 VAC, 50-60Hz		
Power supply	External	Internal	
Max. power consumption	12.6 W	16.8 W	19.3 W
Dimensions (L x W x H)	140 x 203 x 35 mm	180 x 280 x 44 mm	180 x 280 x 44 mm
Operation temperature	0 to 40 °C		
Storage temperature	-20 to 70 °C		
Operation humidity	5% to 95% non-condensing		
EMI/EMC	FCC Class B, CE Class B, C-Tick		FCC Class B, CE Class B, VCCI, C-Tick, IC
Safety	cUL, LVD (EN60950-1)		
MTBF	250,000 hours	260,000 hours	

⁷ Available with future firmware upgrade.

⁸ The maximum Firewall plaintext throughput is based on RFC2544 testing methodologies.

⁹ Actual performance may vary depending on network conditions and activated services.

¹⁰ VPN throughput is measured using UDP traffic with a 1420 byte packet size, adhering to RFC2544.



For more information: www.dlink.com