

Proiect:	

Item: _____

Date: _

Quantity: _

Models **Tray Size** ☐ CPM-MTD-1216 12 1/4" x 16 1/2" ☐ CPM-MTD-1418 14" x 18" $15^{1/4}$ " x $20^{1/2}$ " ☐ CPM-MTD-1520 ☐ CPM-MTD-1622 16" x 22" □ CPM-MTD-1821 17 1/2" x 21" ☐ CPM-MTD-2-1014 10" x 14" 12 ^{1/4}" x 16 ^{1/2}" ☐ CPM-MTD-2-1216 14" x 18" ☐ CPM-MTD-2-1418 $15^{1/4}$ " x $20^{1/2}$ " ☐ CPM-MTD-2-1520 ☐ CPM-MTD-2-1622 16" x 22" ☐ CPM-MTD-2-1821 17 1/2" x 21"

CPM-MTD-2-1014







U.L. Sanitation Classified to NSF Standards

- Heavy duty stainless steel construction
- Large capacity
- Sizes to fit virtually all racks or trays
- Mobile, easy to move from dish-room to serving area
- Easy to clean design

Standard Features

- √ Self-leveling dispensers
- ✓ Corner bumpers
- √ 4" swivel casters with brakes

Optional Features (specify)


- ☐ (00) Silverware dispenser
- ☐ (PP) Napkin dispenser
- ☐ (SS) Stainless steel legs
- ☐ (TT) Wrap-around bumpers
- ☐ 5" Swivel casters

REV 4/29/23

Approvals:



bv LT

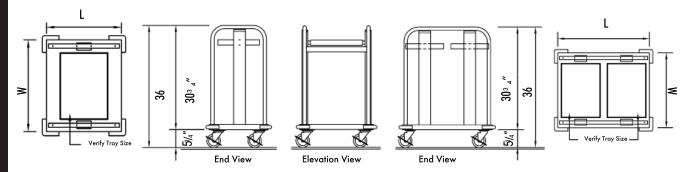

CPM-MRD-xxxx shown
Note: Add 2" for corner bumpers.

CPM-MRD-2-xxxx shown

Model	LxWxH	Tray Size	Tray Capacity	Tray Stacks	Approx. Ship Weight
CPM-MTD-1216	19 ¹ /8" x 21 ³ /4" x 35 ³ /4"	12 ¹ /4"x 16 ¹ /2"	150	1	70 lbs.
CPM-MTD-1418	21 ¹ /8" x 23 ³ /4" x 35 ³ /4"	14"x18"	150	1	75 lbs.
CPM-MTD-1520	22 ¹ /8" x 25 ³ /4" x 35 ³ /4"	15 ¹ /4"x 20 ¹ /2"	150	1	77 lbs.
CPM-MTD-1622	23 ¹ /8" x 27 ³ /4" x 35 ³ /4"	16"x 22"	150	1	82 lbs.
CPM-MTD-1821	25 ¹ /8" x 26 ³ /4" x 35 ³ /4"	17 ¹/2"x 21"	150	1	84 lbs.
CPM-MTD-2-1014	27 ¹ /4" x 22 ¹ /4" x 35 ³ /4"	10"x 14"	300	2	85 lbs.
CPM-MTD-2-1216	38 ¹ /4" x 21 ³ /4" x 35 ³ /4"	12 ¹ /4"x 16 ¹ /2"	300	2	100 lbs.
CPM-MTD-2-1418	42 ¹ /4" x 23 ³ /4" x 35 ³ /4"	14"x18"	300	2	136 lbs.
CPM-MTD-2-1520	44 ¹ /4" x 25 ³ /4" x 35 ³ /4"	15 ¹ /4"x 20 ¹ /2"	300	2	138 lbs.
CPM-MTD-2-1622	46 ¹ /4" x 27 ³ /4" x 35 ³ /4"	16"x 22"	300	2	148 lbs.
CPM-MTD-2-1821	50 ¹ /4" x 26 ³ /4" x 35 ³ /4"	17 ¹/2"x 21"	300	2	152 lbs.

Base and Frame

Base to be fabricated from a minimum of 14 gauge stainless steel with all sides turned square with all corners fully welded, ground and polished. Underside reinforced with heavy gauge channels. Base to have non-marking corner bumpers. Frame shall be constructed of 1" O.D. 16 gauge stainless steel tubing bolted to the base.

Dispenser Mechanism

Easily removable self-leveling mechanisms shall be field adjustable without the use of tools and shall be supplied with a stainless steel tray platform.

Casters

4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories. Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 4/29/23

