HP ScanJet Pro 3000 s4 Sheet-feed Scanner



Fast, affordable, and designed to handle everything from simple color jobs to complex workflows. Quickly and reliably digitize larger projects with scan speeds up to 40 ppm/80 ipm and a 50-page ADF.¹ Recommended for 4,000 pages per day.





Small size. Fast scans. Same reliable results.

- Produce scans at up to 40 ppm/80 ipm¹ with two-sided scanning that captures both sides at once.
- Free up space for work. This HP ScanJet Pro is small and slim—a modern design perfect for the desktop.
- Don't wait for warm-up—HP Instant-on Scanning lets you begin scanning quickly.
- Load up to 50 pages into the automatic document feeder for fast, unattended scanning.



Optimize workflows with one-touch scanning


- Streamline routine work with one-touch scanning—create one-button, custom settings for recurring scan jobs.
- Scan images directly into applications with included and full-featured TWAIN and ISIS[®].
- Easily transfer scans into editable text, searchable PDF files, and more file types, using built-in OCR.
- Quickly share or archive scans directly to popular cloud destinations with HP Scan software.



Capture business documents like a pro

- Define scan profiles for common document types, and scan to multiple destinations with HP Scan software.
- Capture and organize documents, business cards, and other file types with feature-rich software.
- Produce clear, legible scans—up to 1,200-dpi resolution.

Get to know the HP ScanJet Pro 3000 s4

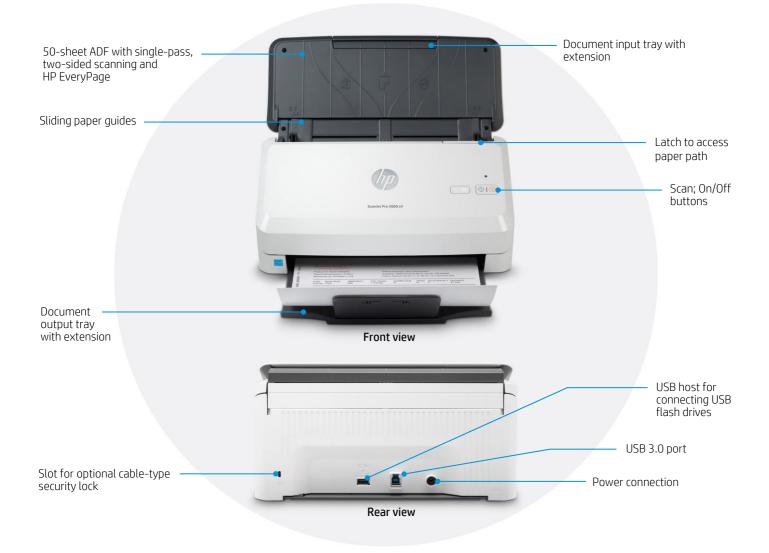

At a glance

Model (product number)	ScanJet Pro 3000 s4 (6FW07A)	
Scan speeds (simplex/duplex)	Up to 40 pages per minute (ppm)/80 images per minute (ipm) ¹	
ADF capacity	50-sheet ADF; scans media sizes up to 309.9 cm (122 inches)	
Recommended daily duty cycle	Up to 4,000 pages	
Connectivity	USB 3.0; Scan to USB drive	
Software included	HP Scan (with built-in optical character recognition [OCR]), WIA, TWAIN, ISIS, I.R.I.S. Readiris™ Pro and Cardiris™ (Win only)	
Media weight supported	40 to 210 g/m² (10.4 to 54.6 lb)	

¹ Scan speed measured at 300 dpi (black-and-white, greyscale, and colour). Actual processing speeds may vary depending on scan resolution, network conditions, computer performance, and application software.

Technical specifications

Scan technology Scan type Scan speed ADF (letter)	CMOS CIS (Contact Image Sensor)	
	Sheetfed; Color scanning: Yes	
Scall speed Abi (letter)	Up to 40 ppm/80 ipm	
Scan resolution	Hardware: 600 x 600 dpi;	
	Optical Up to 600 dpi	
Scan file format	For text & images: PDF, PDF/A, Encrypted PDF, JPEG, PNG, BMP, TIFF, Word, Excel, PowerPoint, Text (.txt), Rich Text (.rtf) and Searchable PDF	
Scan input modes	One default scan mode on front-panel for HP scan in Win OS, HP Easy Scan/ICA in Mac OS and third parties applications via TWAIN, ISIS and WIA	
Scanner advanced features	Auto exposure, Auto threshold, Auto detect color, Background smooth/removal, Auto detect size, Straighten content, Enhance content, Multi-streaming, Auto feed, Multi-feed detection sensor, Advanced multi-feed detection, Auto orient, Multi-color dropout, Channel color dropout, Edge erase, Delete blank page, Merge pages, Hole fill, PDF permissions, Document separation (Blank page, Barcode, Zonal barcode, Zonal OCR)	
Light source (scanning)	LED	
Multi feed detection	YES	
ENERGY STAR Qualified	Yes	
Output resolution dpi settings	75; 150; 200; 240; 300; 400; 500; 600; 1200 ppi	
Bit depth / Grayscale levels	24-bit (external), 48-bit (internal); Grayscale levels: 256	
Digital sending standard features	Scan to PC, Scan to USB Drive	
Duplex ADF scanning	Yes	
Scan Size	Single-pass duplex	
Scan Size	ADF: 216 x 3100 mm	
Media types	Cut Sheet Paper, Printed Paper (Laser and ink), Pre-Punched Paper, Bank Checks, Business Cards, Freight Bills, Carbonless forms, Plastic Carrier sheets for easily damaged documents, Previously stapled media with staple removed, Plastic cards (up to 1.24mm)	
Media size, adf	U.SLetter: 215.9 x 279.4 mm (8.5 x 11 in); U.SLegal: 215.9 x 355.6 mm (8.5 x 14 in); U.SExecutive: 184.2 x 266.7 mm (7.25 x 10.5 in); ISO A4: 210 x 297 mm (8.3 x 11.7 in); IS B5: 182 x 257 mm (7.2 x 10.1 in); ISO B5: 176 x 250 mm (7.0 x 9.9 in); ISO A5: 148 x 10 x 84.1 in); ISO A7: 74 x 104 mm (2.9 x 4.1 in); ISO A8: 52 x 74 mm (2.0 x 2.9 in); ISO A5: 150 x 27.5 mm (7.2 x 10.2 in); ISO A8: 52 x 74 mm (2.0 x 2.9 in); ISO A8: 10 x 210 x	
Media weight (ADF)	40 to 210 g/m2	
Auto document feeder capacity	Standard, 50 sheets	
Duty cycle (daily)	Recommended daily duty cycle: 4000 pages	
Standard connectivity	USB 3.0	
Memory	256 MB	
Processor speed	ARM-1176 666 MHz	
Control panel	Scan button, Power button with a LED and a LED for Error indication	
Twain version	Windows: 32-bit and 64-bit TWAIN version 2.1; Mac: n/a	
Software included	Windows: HP WIA scan driver, HP TWAIN scan driver (32-bit and 64-bit), HP Scan, HP Scanner Tools Utility, I.R.I.S Readiris Pro, I.R.I.S Cardiris, OpenText ISIS	
Compatible operating systems	Microsoft® Windows® (10, 8.1, 7, XP: 32-bit and 64-bit, 2008 R2, 2012 R2, 2016, 2019); MacOS (Catalina 10.15, Mojave 10.14, High Sierra 10.13); Linux (Ubuntu, Fedora, Debian, RHEL, Linux Mint, Open Suse, Manjaro); Citrix ready	
Minimum system requirements	PC: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13, Microsoft® Windows® 10, 8.1, 7, XP: 32-bit and 64-bit, 2008 R2, 2012 R2, 2016, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB	
Minimum system requirements	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer	
	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB Operating humidity range: 10% to 80% RH Recommended humidity operating range: 30% to 70% relative humidity (RH) Operating temperature range: 10 to 35°C Storage temperature range: -40 to 60°C	
Operating environment	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB Operating humidity range: 10% to 80% RH Recommended humidity operating range: 30% to 70% relative humidity (RH) Operating temperature range: 10 to 35°C Storage temperature range: -40 to 60°C Recommended operating temperature range: 17.5 to 25°C Power supply type: External power adapter Power consumption: 4.4 Wats (scean), 24 Watts (scanning), 1.1 Watts (sleep), 0.1 Watts (auto-off), 0.1 Watts (off)	
Operating environment Power	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB Operating humidity operating range: 30% to 70% relative humidity (RH) Operating themperature range: 10 to 35°C Storage temperature range: 40 to 60°C Recommended operating temperature range: 17.5 to 25°C Power supply type: External power adapter Power requirements: Input Voltage range: 90 - 264 VAC, Rated Frequency: 50 - 60HZ, Worldwide use	
Operating environment Power Dimensions (w x d x h)	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB Operating humidity operating range: 10% to 80% RH Recommended humidity operating range: 30% to 70% relative humidity (RH) Operating themperature range: 10 to 35% C Storage temperature range: 40 to 60% C Recommended operating temperature range: 17.5 to 25% C Power soupply type: External power adapter Power requirements: input Voltage range: 90 - 264 VAC, Rated Frequency: 50 - 60HZ, Worldwide use 300 x 172 x 154 mm	
Operating environment Power Dimensions (w x d x h) Weight	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB Operating humidity operating range: 10% to 80% RH Recommended humidity operating range: 30% to 70% relative humidity (RH) Operating temperature range: 10 to 35% C Storage temperature range: 40 to 60% C Recommended operating temperature range: 17.5 to 25% C Power supply type: External power adapter Power requirements: input Voltage range: 90 - 264 VAC, Rated Frequency: 50 - 60HZ, Worldwide use 300 x 172 x 154 mm 2.7 kg	
Operating environment Power Dimensions (w x d x h) Weight What's in the box	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB Operating humidity range: 10% to 80% RH Recommended humidity operating range: 30% to 70% relative humidity (RH) Operating themperature range: 10 to 35°C Storage temperature range: 10 to 36°C Recommended operating temperature range: 10 to 35°C Power supply type: External power adapter Power requirements: Input Voltage range: 90 - 264 VAC, Rated Frequency: 50 - 60HZ, Worldwide use 300 x 172 x 154 mm 2.7 kg Power cord; Power Adapter; USB Cable; Scanner Engine; Flyers; Install Guide One-year bench limited warranty whole unit replacement, phone and Web support included. Warranty may vary by country as	
Operating environment Power Dimensions (w x d x h) Weight What's in the box Warranty Electromagnetic emission	2008 R2, 2012 R2, 2016, 2019, 2 GB available hard disk space, CD-ROM/DVD drive or Internet connection, USB port, Microsoft® Internet Explorer Mac: macOS Catalina 10.15,macOS Mojave 10.14, macOS High Sierra 10.13; 1 GB HD; Internet required; USB Operating humidity range: 10% to 80% RH Recommended humidity operating range: 30% to 70% relative humidity (RH) Operating temperature range: 10 to 35°C Recommended operating temperature range: 10 to 35°C Recommended operating temperature range: 17.5 to 25°C Power osupply type: External power adapter Power requirements: Input Voltage range: 90 - 264 VAC, Rated Frequency: 50 - 60HZ, Worldwide use 300 x 172 x 154 mm 2.7 kg Power cord; Power Adapter; USB Cable; Scanner Engine; Flyers; Install Guide One-year bench limited warranty whole unit replacement, phone and Web support included. Warranty may vary by country as required by law. Go to hp. com/support to learn about HP world-class service and support options in your region. CISPR 22:2008 & CISPR 32: 2012/ EN 55032:2012 - Class B, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010, FCC Title	

Ordering information

Number	Description		
6FW07A	HP ScanJet Pro 3000 s4 Sheet-feed Scanner		
HP Care Packs			
Number	Description		
U9JR0E	HP 3 year Standard Exchange Service		
U9JR1E	HP 3 year Next Business Day Exchange Service		
U9JR2E U9JR3E	HP 3 year Next Business Day Onsite Exchange Service HP 3 year Return to Depot Service		
U9JR3E U9JR4PE	HP 1 year Post Warranty Standard Exchange Service		
U9JR5PE	HP 1 year Post Warranty Next Business Day Exchange Service		
U9JR6PE	HP 1 year Post Warranty Next Business Day Onsite Exchange Service		
U9JR7PE	HP 1 year Post Warranty Return to Depot Service		
	r investment with HP Care Pack. Let HP certified esolve vour technical issues. For more details on HP Care		

nical issues. For more details on HP Care engineers resolve your techr Pack, go to hp.com/go/cpc

HP Inc. offices

(613) 8833 5000	hp.com.au
(010) 6564 3888	hp.com.cn
(852) 3077 2688	hp.com.hk
(80) 2612 9000	hp.com/in
(62-21) 5799 1088	hp.com/id
(02) 2199 0114	hp.co.kr
(603) 2332 3333	hp.com.my
(09) 918 9555	hp.co.nz
(632) 888 5900	hp.com/ph
(65) 6275 3888	hp.com.sg
(02) 3789 9900	hp.com.tw
(662) 353 9500	hp.com/th
(848) 3823 4151	hp.com/vn
	(010) 6564 3888 (852) 3077 2688 (80) 2612 9000 (62-21) 5799 1088 (02) 2199 0114 (603) 2332 3333 (09) 918 9555 (632) 888 5900 (65) 6275 3888 (02) 3789 9900 (662) 353 9500

For the following countries, please fax your queries to (65) 6275 6707 Bangladesh, Bhutan, Brunei, Cambodia, Maldives, Nepal, Pakistan, Sri Lanka

Supported paper

Contact HP via phone: Asia: 65 6253 8500

Solutions

For more solutions information, please visit hp.com/go/gsc

¹ Power requirements are based on the country/region where the ¹ Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages. This will damage the printer and void the product warranty. Energy Star value typically based on measurement of 115V device. ² EPEAT® registered where applicable. EPEAT registration varies by country. See http://www.epeat.net for registration status by country. ³ Sheet feed speeds: (All resolutions up to and including 300 ppi). Simplex 40 A-4 pages per minute. Duplex 80 A-4 images per minute.

minute.







HP Care Pack

Sign up for updates hp.com/go/getupdated

© Copyright 2020 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Noting herein should be construed as constituting an additional warranty. IP shall not be liable for technical or editorial errors or omissions contained herein. ENERGY STAR and the ENERGY STAR logo are registered U.S. marks. Microsoft and Windows are registered trademarks of Microsoft Corporation. AirPrint and the AirPrint logo are trademarks of Apple Inc., registered in the U.S. and other countries. Linux is a U.S. registered trademark of Linus Torvalds. UNIX is a registered trademark of The Open Group.

