



Philips Signage Solutions
Q-Line Display

48"

Direct LED Backlight
Full HD

SignageSolutions

BDL4830QL

Intensify your signage experience

with priceless smart performance

Deliver startlingly clear images in a more eco-friendly way. High on performance and reliability, yet low on power consumption, it is ideal for projects where there is no room for compromise.

Maximising the impact of your message

- Full HD LED for brilliant images with incredible contrast
- Manage and control your network remotely via SmartControl

Innovative solutions for any signage application

- Free and easy-to-use content management with SmartCMS
- Connect and control your content via the cloud with HTML5
- Save and play content with internal memory
- Schedule what you want, when you want with SmartPlayer

Care about you, your business and your audience

- Show clinical images consistently with D-image
- SmartPower for energy saving

Highlights

Full HD LED technology

Picture Quality matters. Standard displays deliver quality, but you expect more. Imagine crisp detail paired with high brightness, incredible contrast and realistic colours for a true-to-life picture.

SmartControl



SmartControl lets you remotely control and manage your network of displays via RJ45 and RS232C. Easily fine-tune all display settings including resolution, brightness, contrast and cloning of your settings over your complete network.

SmartCMS



Free and easy-to-use content management system that works exclusively with Philips Signage Solutions displays to manage your digital signage content. With SmartCMS you can create and schedule your own content over 24 hours every day. Simply create your network, design your content and schedule your playlist, and you are ready to play!

SmartBrowser



Connect and control your content via the cloud with the integrated HTML5 browser. Design your signage content online and connect it with a display or with your entire network. Simply plug in a RJ45 Internet cable for network connection and connect the display with the dedicated URL address, and you are ready to play your cloud-based content.

Internal Memory

Save and play content with internal memory. Upload your media into the display and playback content immediately. Working in conjunction with the internal browser, it also serves as a memory cache when streaming online content. If the network ever fails, the internal memory keeps content running by playing a cached version of the content, ensuring that your media stays up even if the network goes down.

SmartPlayer

Turn your USB into a true cost-effective digital signage device. Simply save your content (video, audio, pictures) on your USB and plug into your display. Create your playlist and schedule your content via the on-screen menu, and enjoy your own playlists anytime, anywhere.

Clinical D-image



D-image helps you to review and diagnose clinical images with consistent and accurate display performance. To achieve reliable clinical interpretations, our professional displays are factory calibrated to give optimised greyscale standard display performance. D-image helps you to excel in every aspect of patient care.

SmartPower



The backlight intensity can be controlled and pre-set by the system to reduce the power consumption by up to 50%, which saves substantially on energy costs.

SmartCollection

SmartCollection

SmartCollection offers you customisable solutions to meet your specific requirements.

Both integrators and solution providers are offered the latest innovations, while the audience can enjoy impactful solutions. When developing smart innovations we focus on Caring, Innovative and Impactful solutions.

Specifications

Picture/Display

- Diagonal screen size: 47.6 inch / 120.9 cm
- Panel resolution: 1920 x 1080p
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 350 cd/m²
- Contrast ratio (typical): 4000:1
- Dynamic contrast ratio: 500,000:1
- Response time (typical): 8 ms
- Aspect ratio: 16:9
- Viewing Angle (H / V): 178 / 178 degree
- Pixel pitch: 0.549 x 0.549 mm
- Display colours: 16.7 Million
- DICOM: Clinical D-image

Supported Display Resolution

Computer formats

| Resolution | Refresh rate |
|-------------|-------------------|
| 640 x 480 | 60, 67, 72, 75 Hz |
| 800 x 600 | 56, 60, 72, 75 Hz |
| 1024 x 768 | 60 Hz |
| 1280 x 768 | 60 Hz |
| 1280 x 800 | 60 Hz |
| 1360 x 768 | 60 Hz |
| 1366 x 768 | 60 Hz |
| 1440 x 900 | 60 Hz |
| 1600 x 1200 | 60 Hz |
| 1920 x 1080 | 60 Hz |
| 1920 x 1200 | 60 Hz |

Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 480i | 60 Hz |
| 480p | 60 Hz |
| 576p | 50 Hz |
| 576i | 50 Hz |
| 720p | 50, 60 Hz |
| 1080i | 50, 60 Hz |
| 1080p | 50, 60 Hz |

Connectivity

- Video input: DVI-D, HDMI, Component (RCA), Composite (RCA), VGA (Analogue D-Sub)
- Audio input: 3.5-mm jack, Audio Left/Right (RCA)
- Audio output: Audio Left/Right (RCA), 3.5 mm jack
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack
- Other connections: USB

Convenience

- Memory: Internal memory access, 8 GB eMMC
- Screen-saving functions: Pixel Shift

- Energy-saving functions: Smart Power
- Tiled Matrix: Up to 15 x 15
- Start-up: Wake up on LAN, Switch on delay, Switch on status
- Start-up window: enable/disable Philips logo
- Keyboard control: Lockable, Hidden
- Network controllable: RS232, RJ45, One Wire (HDMI-CEC)
- Signal Loop Through: RS232, IR Loop through

Dimensions

- Bezel width: 11.9 (TLR)/14.7 (B) mm
- Set dimensions (W x H x D): 1081.8 x 623.4 x 59.9 mm
- Set dimensions in inch (W x H x D): 42.59 x 24.54 x 2.36 inch
- VESA Mount: 400 x 400 mm, 200 x 200 mm, M6
- Product weight: 11.52 kg
- Product weight (lb): 25.4 lb

Operating conditions

- Temperature range (operation): 5 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80 %
- MTBF: 50,000 hour(s)

Power

- Consumption (On mode): 115 W (EnergyStar 6.0 test method)
- Mains power: 100 ~ 240 VAC
- Standby power consumption: <0.5 W

Sound


- Built-in speakers: 2 x 10 W RMS

Multimedia Applications

- USB Playback Video: 3G2, 3GP, ASF, ASX, AVI, DAT, DivX, F4V, FLV, M2TS, M4V, MK3D, MKV, MOV, MP4, MPE, MPEG, MPG, MTS, QT, TRP, TS, TTS, VOB, WEBM, WMV, Xvid
- USB Playback Picture: BMP, GIF, JPEG, JPG
- USB Playback Audio: AAC, AC3, AIF, AIFF, AMR, EC3, M4A, MP3, OGA, OGG, WAV, WMA

Accessories

- Included accessories: AC Power Cord, RS232 cable, VGA cable, Remote Control, Batteries for remote control, User manual on CD-ROM, Quick start guide

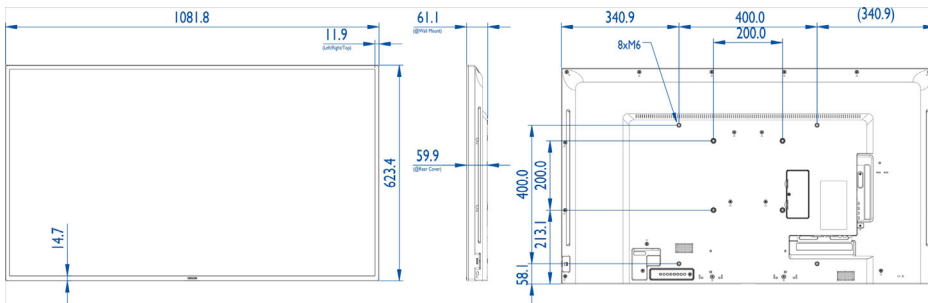

Issue date 2016-09-05

Version: 1.2.1

12 NC: 8670 001 22321
EAN: 87 12581 73031 4

© 2016 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com