



Philips Signage Solutions
OPS accessory

HDBaseT receiver
OPS insert compatible

SignageSolutions

CRD25

Future-Proof Connectivity

With HDBaseT OPS receiver

Making use of leading technology standards, the HDBaseT OPS receiver integrated within the OPS insert provides you with a powerful combination and a unique all-in-one solution

Innovative solutions for any signage application

- Optional OPS Insert to create an all-in-one solution
- OPS receiver module enables reception of HDBaseT signals

Specifications

Related Products

- Compatible with: BDL4256ET, BDL4260EL, BDL4271VL, BDL4280VL, BDL4660EL, BDL4671VL, BDL4677XH, BDL4678XL, BDL4680VL, BDL4765EL, BDL5551EL, BDL5556ET, BDL5560EL, BDL5571VL, BDL5580VL, BDL5588XH, BDL5588XL

576i	50 Hz
576p	50 Hz
720p	50, 60 Hz

Dimensions

- Set dimensions (W x H x D): 141.1 x 23.5 x 105.8 mm

Operating conditions

- Altitude: 0 ~ 3000 m
- Relative humidity: 20 ~ 80 %
- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- MTBF: 60,000 hour(s)

Miscellaneous

- Regulatory approvals: CB, CE, C-Tick, FCC, Class B, RoHS, UL/cUL, VCCI
- Warranty: 3-year warranty

Accessories

- Included accessories: Quick start guide, RS232 cable


Supported Display Resolution

Computer formats

Resolution	Refresh rate
1280 x 768	60 Hz
1280 x 800	60 Hz
1360 x 768	60 Hz
1366 x 768	60 Hz
1440 x 900	60 Hz
1920 x 1080p	60 Hz
640 x 480	60, 67, 72, 75 Hz
800 x 600	56, 60, 72, 75 Hz

Video formats

Resolution	Refresh rate
1080i	50, 60 Hz
1080p	50, 60 Hz
480i	60 Hz
480p	60 Hz

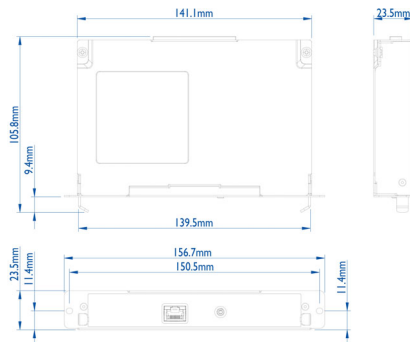

Highlights

OPS Insert



Turn your display into an all-in-one digital signage solution and create a display network that is connected, intelligent and secure. Open Pluggable Specification (OPS) is an industry-standard slot into which you can add an OPS-standardised media player. This cable-free solution gives you the ability to install, use or maintain your hardware whenever you need to.

HDBaseT signals



HDBaseT is a connectivity standard over a single CAT5e/6 cable, converging uncompressed full-HD digital video and audio signals.



Issue date 2015-02-10

Version: 3.0.1

12 NC: 8670 001 11649
EAN: 87 12581 71116 0

© 2015 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com