




EASY 5 COLORS  
**SELECCTOR**  
2700K • 3000K • 3500K • 4000K • 5000K



**NEW ADJUSTABLE DESIGN**

24° / 38° / 60°

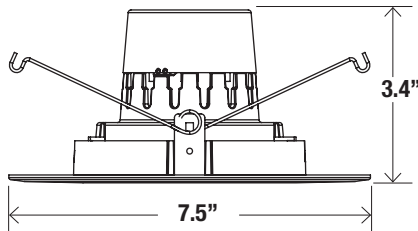

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1100	1100	16W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

**Ordering Guide for Compatible Housing**

IC - New Construction	Non-IC New Construction
LD6IC	LD6-AT
HLD6IC-AT	HLD6-AT
LD600IC-AT	B6-AT
EZ6IC-AT	
B6IC-AT	
B6IC-100-AT	
B600-IC	

IC - For Remodel	Non-IC For Remodel
LD6RIC-AT	LD6R-AT
HLD6RIC-AT	HLD6R-AT
EZ6IC-AT	B6R-AT
B6RIC-AT	

**FEATURES**

4" round baffle multi-CCT LED "Canless Downlight" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 3 lumen output and 5-Color SeleCCTor switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.

LUMENS	1100L
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Round Adjustable
TRIM COLORS	WH (White)
DIMMING	DIMTR ( Triac Dimming)
EMERGENCY	16W high voltage inverter ( remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TEST	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- IC-rated and Air-Tight ready and may be in direct contact with insulation.
- Can be installed in shallow plenum spaces.
- May be installed in drywall or suspended ceilings.
- Flicker-free 120V forward-phase dimming down to 5%.
- Even illumination achieved with patent-pending optics and edge-lit LED technology.
- Ideal where ceiling or top access is unavailable.
- Five-year warranty for parts and components. (Labor not included)

**RL665-1100L-DIMTR-120-27K/30K/35K/40K/50K-90-MD-WH**

TYPE	LUMEN	CCT	CRI	DISTRUBUTION	FINISH
RL665	☐ 1100L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90+	☐ MD - Medium Distribution	☐ WH - White

