



*Do NOT use serrated jaw pipe wrench to tighten in main or saddle.



Coupling used w/ 73120 & 73120B Corporation Valves

A.Y. McDonald corporation stops come standard with a 360° opening head. Use only smooth jawed wrenches on corporation bodies and position the wrench only on the flats provided on the body. They are made in the United States of America and are manufactured to meet or exceed the AWWA C800 (latest revision) standard, except where noted.

Ball Valve style valves are rated at 300 psig and has a PTFE coated ball support by two EPDM seals.

Plug Valve style valves are rated at 100 psig and are precision machined to assure a perfect match between the plug and body.

For outlet connection options, see page 2.

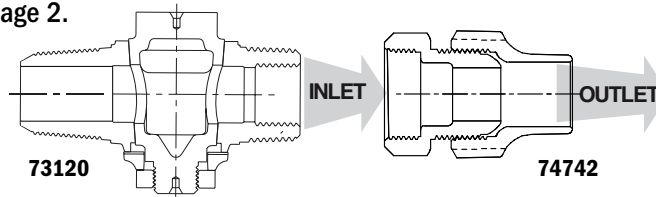

73120

AWWA INLETS		INLET X OUTLET SIZE CONNECTIONS		
Model #	Outlet Connection	5/8"	3/4"	1"
73120	Special Purpose Thread	●	●	●
73120B	Special Purpose Thread	●	●	●



74742

		INLET X OUTLET SIZE CONNECTIONS				
Model #	Outlet Connection	1/2" x 3/4"	5/8" x 3/4"	5/8" x 1"	3/4"	1"
74742F	FNPT		●		●	●
74742	Flare		●		●	●
74742-22	-22 CTS Compression		●		●	●
74742G	G CTS Compression	●	●		●	●
74742Q	Q CTS Compression	●	●	●	●	●
74742T	T CTS Compression	●	●	●	●	●



74749

		INLET X OUTLET SIZE CONNECTIONS					
Model #	Outlet Connection	1/2" x 3/4"	5/8" x 3/4"	5/8" x 1"	3/4"	3/4" x 1"	1"
74749F	FNPT		●		●		●
74749	Flare	●	●	●	●	●	●
74749-22	-22 CTS Compression	●	●	●	●	●	●
74749G	G CTS Compression	●	●	●	●	●	●
74749Q	Q CTS Compression	●	●	●	●	●	●
74749T	T CTS Compression	●	●	●	●	●	●
74749SG	G CTS Compression	●	●	●	●	●	●



74777

		INLET X OUTLET SIZE CONNECTIONS		
Model #	Outlet Connection	5/8" x 3/4"	3/4"	1"
74777F	FNPT	●	●	●
74777	Flare	●	●	●
74777-22	-22 CTS Compression	●	●	●
74777G	G CTS Compression	●	●	●
74777Q	Q CTS Compression	●	●	●
74777T	T CTS Compression	●	●	●



74777S

		INLET X OUTLET SIZE CONNECTIONS
Model #	Outlet Connection	3/4"
74777SF	FNPT	●
74777S	Flare	●
74777S-22	-22 CTS Compression	●
74777SG	G CTS Compression	●
74777SQ	Q CTS Compression	●
74777ST	T CTS Compression	●

OPTIONS

- For Handyloc - Replace "Q" or "-3Q" with "H" or "-3H" in 3/4" & 1" only.
- For valve or fitting less Flare nut add "L" to end of model number
- C903 Kitec (K), 3/4" & 1" Replace "Q" in model number with "K" i.e. 74742Q = 74742K)
- CTS Anode (QA) & Flare Anode (A) - Replace "Q" with QA or add "A" to flare
- Insert stiffeners are required on all flexible plastic connections, refer to the Service Fitting & Coupling catalog