



P16

UHF RFID ANTENNA

The Vulcan RFID™ p16 UHF RFID Antenna is a compact RFID UHF antenna with circular polarization. This antenna has a radiation pattern characterized by a 20° beamwidth in the endfire direction and a 90° beamwidth in the broadside direction.

This antenna is **IP 68** rated, meaning it is dust resistant even in high concentrations, making it perfect for indoor use. Additionally, this antenna can withstand water immersion up to 1 m (3 ft) up to 30 minutes.

The Vulcan RFID™ p16 UHF RFID Antenna's radiation pattern makes it ideal for many RFID applications such as:

- Marathons
- Race Timing
- Anti-Theft Loss Prevention
- Doors
- Corridors
- Toll Systems
- Vehicle Tracking






Specifications

ELECTRICAL	Operating Frequency:	FCC (902-928 MHz), ETSI (865-868 MHz)
	Polarization:	Right Hand Circular Polarization
	Gain:	9.3 dBi (US), 9.4 dBi (EU)
	Max Read Distance:	Up to 9 m (29.5 ft)
	Elevation Beamwidth:	20°
	Azimuth Beamwidth:	90°
	Input Impedance:	50 Ω
	VSWR:	< 1.4:1
	Front-to-Back Ratio:	< -20 dB
	Axial Ratio:	US: At boresight 0.6 dB, at 3 dB beamwidth 1.0 dB (typical), 2.8 dB (max)
		EU: At boresight 0.6 dB, at 3 dB beamwidth 0.5 dB (typical), 2.5 dB (max)
	Radiation Pattern:	Fan beam
Antenna Technology:	Patch	
Sidelobe:	< -15 dB	
MECHANICAL	Connector Type:	SMA Female (connects to SMA Male)
	Mounting:	Integrated Mounting Holes
	Cable:	Not Included
	Dimensions - Excludes Connector:	837 x 137 x 3.3 mm (32.9 x 5.4 x 0.13 in)
	Dimensions - Edge Mount Connector:	837 x 137 x 9 mm (32.9 x 5.4 x 0.3 in)
	Dimensions - Flange Connector:	837 x 137 x 15 mm (32.9 x 5.4 x 0.6 in)
	Weight:	0.73 kg (1.60 lbs)
ENVIRONMENT	Operating Temperature:	-20 °C to +80 °C (-4 °F to +176 °F)
	IP Rating:	IP 68




Diagrams

With flange straight or flange right angle connector

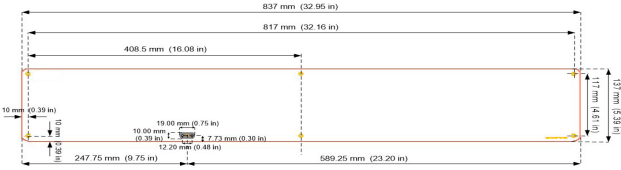


Antenna Board Thickness = 3.3 mm (0.13 in)
6 Holes \varnothing = 3.3 mm (0.13 in)
2 Holes \varnothing = 2.5 mm (0.10 in)
1 Hole \varnothing = 1.4 mm (0.06 in)

With edge mount connector

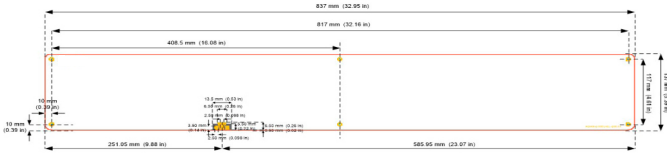

Antenna Board Thickness = 3.3 mm (0.13 in)
Holes \varnothing = 3.3 mm (0.13 in)

Radiation Pattern

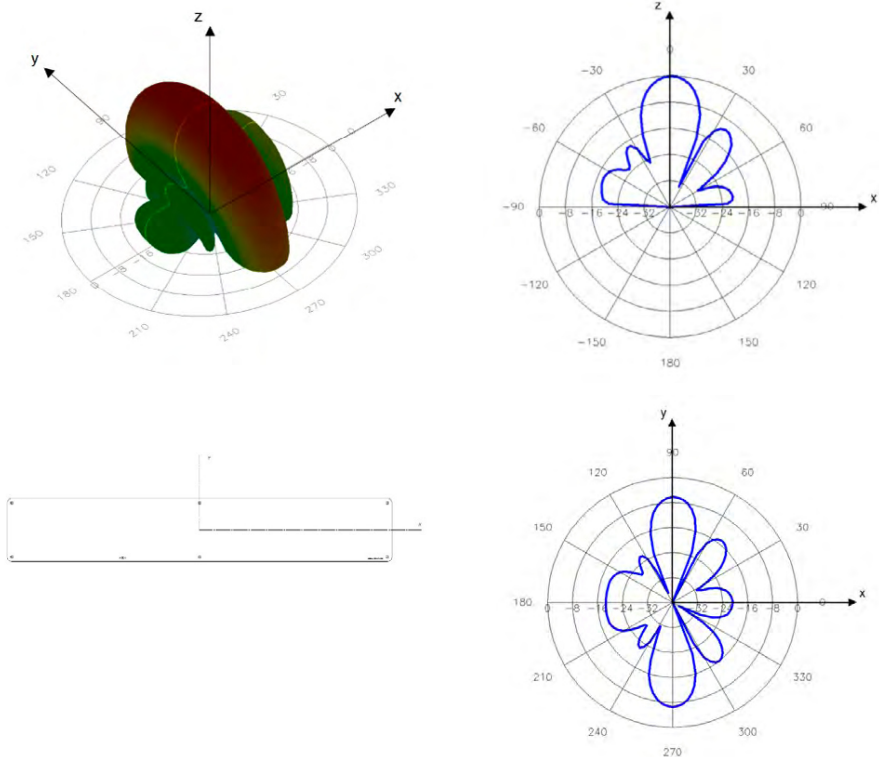



Product Variations

Product Code	Connector Type	FCC (902-928 MHz)	ETSI (865-868 MHz)
	Flange Straight	VUL-ADAN-P16US-FLSMA-200	VUL-ADAN-P16EU-FLSMA-200
	Flange Right Angle	VUL-ADAN-P16US-FRSMA-200	VUL-ADAN-P16EU-FRSMA-200
	Edge Mount (ETSI Only)	–	VUL-ADAN-P16EU-ELSMA-200

Accessories & Compatible Products

Vulcan RFID™



VUL-MAPPER

Vulcan RFID™



VUL-ADHD-ADANP16-100

Vulcan RFID™



195-RP-TNC-M-SMA-M-12
240-RP-TNC-M-SMA-M-25
400-RP-TNC-M-SMA-M-35

*For custom cable connectors or lengths please [contact us](#).

About Vulcan RFID™ Products

Vulcan RFID™ offers a broad range of innovative RFID antennas, RFID inlays, custom RFID tags, and accessories suited for a wide variety of industries and applications. With an extensive portfolio, Vulcan RFID™ products are manufactured to withstand environments ranging from mild to extreme. All Vulcan RFID™ products are thoroughly tested and built on a name you can trust. Vulcan RFID™ products enable you to reach and sustain high levels of performance with your UHF or NFC frequency application.



Inside USA
1 (888) 238-1155
Outside USA
1 (205) 383-2244

info@atlasRFIDstore.com
www.atlasRFIDstore.com