

Pigtail Cable

MODEL: TL-ANT24PT3 [Datasheet](#)



Features

- Easy to install and use
- Manufactured using 3m Low Loss CFD-200 cable that provides a higher performance cable with excellent flexibility
- N Male to RP-SMA Female connector, applicable in most of connections between the wireless AP/Router and antenna

Description

The TL-ANT24PT3 pigtail cable is ideal for flexible connection between rigid outdoor cable and wireless access points/routers. It is very easy to use, no configuration or installation software required.


Specifications

| | |
|----------------|-------------------------|
| Frequency | DC ~ 3GHz |
| Impedance | 50Ω Nominal |
| Insertion Loss | 2.9 dB |
| VSWR (MAX.) | 1.5:1 Max. |
| Connector Type | N Male to RP-SMA Female |
| Operating Temp | -10°C~+60°C |
| Storage Temp | -40°C~+80°C |

Diagram

Outdoor Point to Point Application

Simple and Convenient Installation with Excellent Transmission Range

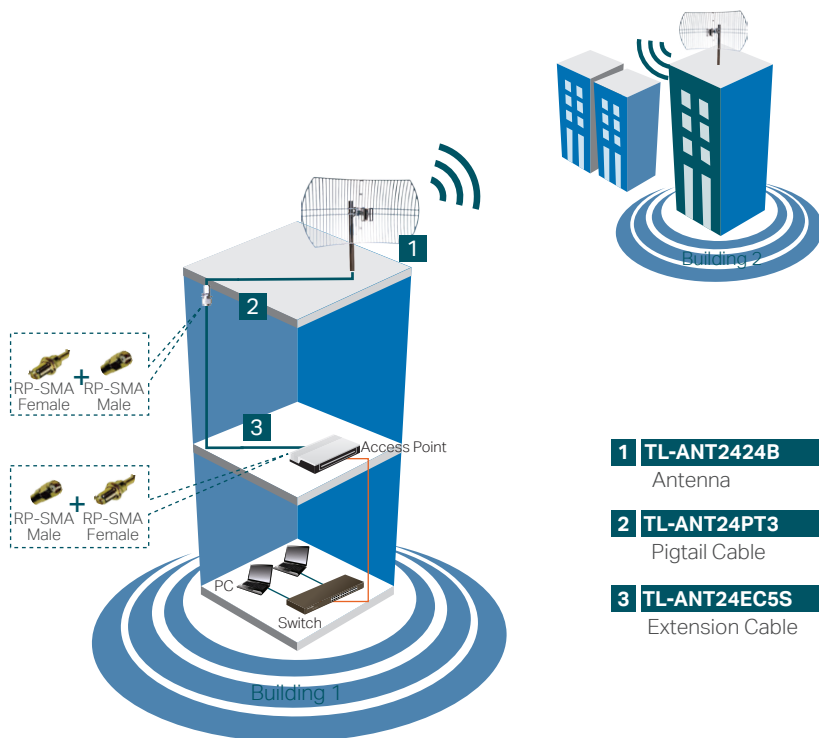

Package

- Pigtail Cable
TL-ANT24PT3

www.tp-link.com

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2016 TP-Link Technologies Co., Ltd. All rights reserved.